



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 717 793 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication: 02.11.2006 Bulletin 2006/44 (51) Int Cl.: G09G 3/36^(2006.01)

(21) Application number: 05009234.5

(22) Date of filing: 27.04.2005

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR LV MK YU

- Saiki, Kenji
Anpachi-cho, Anpachi-gun (JP)
- Matsuda, Seiji
Mizuho-shi, Gifu (JP)

(71) Applicant: SANYO ELECTRIC CO., LTD.
Moriguchi-shi, Osaka 570-8677 (JP)


(74) Representative: Glawe, Delfs, Moll
Patent- und Rechtsanwälte,
Rothenbaumchaussee 58
20148 Hamburg (DE)

(72) Inventors:
• Kobayashi, Mitsugu
Nagoya-shi, Aichi (JP)

(54) Active matrix liquid crystal display device

(57) A first output buffer (22) of a driving LSI (20) outputs the first video signal voltage (V) and the second output buffer (23) outputs the second video signal voltage (*V) with the opposite polarity from that of the first video signal voltage. The first and the second video signal voltages (V, *V) are fed to a drain driver (2) of a display panel (1) through a pair of signal wirings. The drain driver (2) supplies the first video signal voltage (V) to a pixel and the second video signal voltage (*V) with the opposite polarity to the pixel adjacent to the first pixel through a drain line (5). In this way, any pair of the adjacent pixels in horizontal and vertical direction receives the video signal voltages with opposite polarities from each other.

FIG. 1

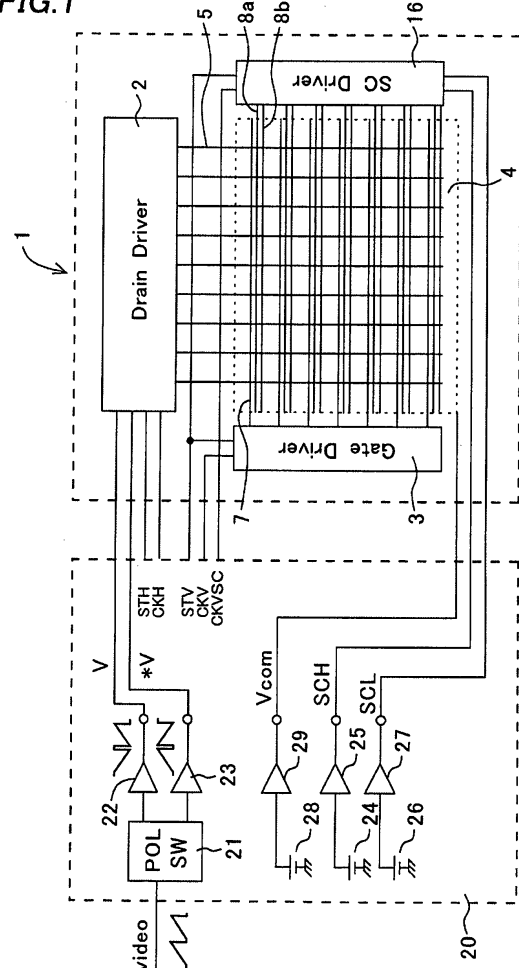

EP 1 717 793 A1

Description**BACKGROUND OF THE INVENTION****Field of Invention**

[0001] This invention relates to an active matrix display device.

Description of Related Art

[0002] The deterioration of liquid crystal is prevented by the common AC driving that gives AC potential to a common electrode and a supplemental capacitance in the active matrix display device where an image signal is applied to a pixel electrode through a switching element such as a thin film transistor (TFT). Also, low energy consumption is achieved by lowering both electric current and voltage of a drain driver through the minimization of the voltage difference between the positive and negative polarities of video signal inputted to the drain driver. The voltage polarity of the common electrode and all the supplemental capacitance lines is inverted at each horizontal period in a line inversion driving system where polarity of the video signal given to the drain line is inverted at each horizontal period during the common AC driving.

[0003] The Japanese patent publication 2003-150127 discloses the common DC dot inversion driving system, in which the video voltages with opposite polarities are applied to the pixels in such way that any pair of the adjacent pixels in horizontal and vertical direction have opposite polarity from each other by supplying the video voltage with opposite polarities to the pixel electrodes next to each other in gate line direction with the voltage V_{com} of the common electrode potential as the DC potential.

[0004] However, line-flicker easily appears in the line inversion driving system, deteriorating the display quality. Although the common DC dot inversion driving system can achieve the high quality display since it does not cause line-flicker, its energy consumption is large because of the wider dynamic range of the video signals V , V^* (signal V^* signifies the signal with the opposite polarity from that of signal V) as shown in Fig. 12.

[0005] It is an object of this invention to provide an active matrix display that achieves a high quality display while using less energy.

SUMMARY OF THE INVENTION

[0006] The solution according to the invention lies in the features of the independent claim and preferably in those of the dependent claims.

[0007] The invention provides an active matrix display device that includes a plurality of a first pixel electrodes and a plurality of a second pixel electrodes. Each of the second pixel electrodes is disposed adjacent a corresponding first pixel electrode. The device also includes

a signal processing circuit outputting a composite video signal having a first video signal and a second video signal that has a polarity opposite from a polarity of the first video signal. The dynamic range of the composite video signal is not larger than the sum of the dynamic range of the first video signal and the dynamic range of the second video signal. The device further includes a driver circuit supplying the first video signal to the first pixel electrodes and the second video signal to the second pixel electrodes.

[0008] By virtue of the claimed combination, in particular of supplying a double-phased video signal to the first and second pixel electrodes in combination with setting the dynamic range of the compound signal of the first and second video signal, the active display device according to the invention is enabled to have an improved display quality as well as a reduced energy consumption. In contrast to the known technique of common DC inversion driving, the invention allows to maintain the high quality display, while consuming a reduced amount of energy. This is largely due to the fact that using the double-phased video signal allows for making the inversion cycle one horizontal period for each line rather than one horizontal period for each pixel. Additionally, the reduction of the dynamic range of the compound video signal in contrast to a sum of the dynamic range of the first and second video signal contributes to a further reduction in energy consumption.

BRIEF DESCRIPTION OF THE DRAWINGS**[0009]**

Fig. 1 is a circuit block chart of the active matrix display device of the first embodiment of this invention.

Fig. 2 is a model view of the pixel region of the display panel of the active matrix display device of the first embodiment of this invention.

Fig. 3 is a pattern view of the display region of the display panel of the active matrix display device of the first embodiment of this invention.

Fig. 4 is an equivalent circuit diagram of the display region shown in Fig. 2.

Fig. 5 is another circuit block chart of the active matrix display device of the first embodiment of this invention.

Fig. 6 is a timing chart showing the relation among the signals of the display panel of the active matrix display device of the first embodiment of this invention.

Fig. 7 is a waveform of the signal showing the driving method of the active matrix display device of the first

embodiment of this invention..

Fig. 8 is a waveform of the signal showing the driving method of the active matrix display device of the first embodiment of this invention.

Fig. 9 is a waveform of the signal showing the driving method of the active matrix display device of the prior art.

Fig. 10 is a circuit block chart of the active matrix display device of the second embodiment of this invention.

Fig. 11 is a model view of the pixel region of the display panel of the active matrix display device of the second embodiment of this invention.

Fig. 12 is a waveform of the signal showing the driving method of the active matrix display device of the prior art.

DETAILED DESCRIPTION OF THE INVENTION

[0010] Next, the first embodiment of the active matrix display device of this invention will be explained by referring to the figures. Fig. 1 is a circuit block chart of the active matrix display device. Fig. 2 is a model view of the pixel region of the display panel of the active matrix display device. Fig. 3 is a pattern view of the display region of the display panel of the active matrix display device, and Fig. 4 is its equivalent circuit diagram.

[0011] A display panel 1 and a driving LSI 20 that supplies a driving signal to the display panel 1 are provided, as shown in Fig. 1. The configuration of the display panel 1 will be explained.

[0012] A drain driver 2 is disposed in row direction and a gate driver 3 is disposed in column direction on a display panel. A display region 4 for displaying image is disposed surrounded with the drain driver 2 and gate driver 3. A plurality of drain lines 5 and a plurality of rectangular pixel electrode with the longitudinal side in column direction are disposed in column direction and a gate line 7, a first supplemental capacitance line 8a and a second supplemental capacitance line 8b are disposed in row direction in the display region 4, as shown in Figs. 3 and 4.

[0013] A TFT 9 and a first supplemental capacitance 10a or a second supplemental capacitance 10b are formed in the region with the pixel electrode 6 (referred to as "a pixel" hereinafter). That is, the first supplemental capacitance 10a is disposed in the first pixel GS1 and the second supplemental capacitance 10b is disposed in the second pixel GS2 adjacent to the first pixel GS1. The first pixel GS1 and the second pixel GS2 are alternately formed in row direction.

[0014] The TFT 9 includes a gate electrode 9g extending from the gate line 7, a drain region 9d that is a semiconductor layer electrically connected to the drain line 5

through a contact, and a source region 9s that is a semiconductor layer electrically connected to the pixel electrode 6 through a contact. The first supplemental capacitance 10a includes a supplemental capacitance electrode 10x that is a semiconductor layer connected to the TFT 9 and a supplemental capacitance electrode 10y extending from the first supplemental capacitance line 8a and superimposing over the supplemental capacitance electrode 10x with a capacitance-insulating layer.

The second supplemental capacitance 10b includes the supplemental capacitance electrode 10x mentioned above and a supplemental capacitance electrode 10z extending from the second supplemental capacitance line 8b and superimposing over the supplemental capacitance electrode 10x with a capacitance-insulating layer.

[0015] A first parasitic capacitance 15a is formed between the pixel electrode 6 and the second supplemental capacitance line 8b in the first pixel GS1, and a second parasitic capacitance 15b is formed between the pixel electrode 6 and the first supplemental capacitance line 8a in the second pixel GS2. A liquid crystal is sealed in between the substrate with the TFT 9 formed on it and the other substrate facing against the first substrate. A common electrode 11 is formed on the other substrate, forming a supplemental capacitance electrode corresponding to the pixel electrode 6 of a liquid crystal capacitance 12.

[0016] The driving LSI 20, which will be explained below, formed outside of the display panel 1 supplies the first video signal voltage V and the second video signal voltage *V with the polarities opposite to each other to the drain driver 2. The drain driver 2, then, consecutively selects the drain line 5, feeding either the first video signal voltage V or the second video signal voltage *V. The first video signal voltage V and the second video signal voltage *V have voltages with the polarities opposite to each other, the voltage of the common electrode 11 (referred to as the common electrode potential Vcom, hereinafter) being their the reference voltage.

[0017] That is, the drain driver 2 supplies the first video signal voltage V (indicated as "+" in Fig. 2) to the pixel electrode 6 of a pixel and supplies the second video signal *V (indicated as "-" in Fig. 2) with the opposite polarity from that of the first video signal voltage to the pixel electrode 6 of the pixel adjacent to the pixel with the first video signal voltage. In this way, any pair of the adjacent pixels in horizontal and vertical direction receives the video signal voltages with opposite polarities from each other.

[0018] The gate driver 3 consecutively selects the gate line 7 and applies the gate signal GV. The display region 4 is a region for image display with a plurality of pixel electrodes 6. The drain line 5 is the wiring for transmitting either the first video signal voltage V or the second video signal voltage *V that have the polarities opposite from each other to the TFT 9 through the contact. The pixel electrode 6, which is a display unit configuring the pixel region, is the electrode for driving the liquid crystal by the video signal voltages V, *V transmitted from the drain line

5 through TFT 9 together with the common electrode 11.

[0019] The gate line 7, selected by the gate driver 3 receives the gate signal GV, turning the TFT 9 on. The first supplemental capacitance line 8a is formed in the same layer as the layer of the gate line 7 together with the supplemental capacitance electrode 10y arranged in row direction, connecting the first supplemental capacitances 10a formed in each row. The second supplemental capacitance line 8b is formed in the same layer as the layer of the gate line 7 together with the supplemental capacitance electrode 10z arranged in row direction, connecting the second supplemental capacitances 10b formed in each row.

[0020] The first supplemental capacitance line 8a and the second supplemental capacitance line 8b receive a high potential SCH and a low potential SCL with the opposite polarities from a SC driver and the polarities are inverted with a predetermined timing. The SC driver includes a shift resistor and a signal supply circuit.

[0021] The TFT 9 is a switching element for letting the electric current go through a channel region, which is a semiconductor layer, located directly under the gate electrode 9g, either from the source region 9s to the drain region 9d or from the drain region 9d to the source region 9s only when the voltage is applied to the gate electrode 9g. The first supplemental capacitance 10a and the second supplemental capacitance 10b hold the electric load coming from the video signal voltages V and *V supplied from the drain line 5 through the TFT 9 for one frame period, supplementing the loss of electric load of the liquid crystal capacitance 12. The common electrode 11, with a certain amount of voltage applied drives the liquid crystal with the pixel electrode 6 according to the video signal voltages V and *V applied to the pixel electrode 6. The electric load of the liquid crystal capacitance 12 comes from the video signal voltages V, and *V supplied from the drain line 5 through the TFT 9 and held by the liquid crystal.

[0022] However, the electric charge held by the liquid crystal 12 easily leaks due to current leakage because of impurities in the liquid crystal while the TFT 9 is off. Therefore, the electric charge held in the first supplemental capacitance 10a and the second supplemental capacitance 10b supplements the electric load of the liquid crystal capacitance 12.

[0023] Next, the configuration of the driving LSI 20 provided outside of the display panel 1 will be explained. An analog video signal inputted from outside is processed into the first video signal voltage V and the second video signal voltage *V with the polarities opposite from that of the first video signal voltage through a polarity switching circuit 21. The polarities of the first video signal voltage V and the second video signal voltage *V are inverted for each horizontal period.

[0024] The first video signal voltage V and the second video signal voltage *V are outputted to a pair of signal wirings through an output buffer 22 and an output buffer 23 respectively, and then fed to the drain driver 2 of the

display panel 1.

[0025] The reference numeral 24 denotes a potential source for generating the high potential SCH, which is outputted through a high potential buffer 25. The reference numeral 26 denotes a potential source for generating the low potential SCL, which is outputted through a low potential buffer 27. The High potential SCH and the low potential SCL are supplied to the SC driver 16.

[0026] The reference numeral 28 denotes a potential source for generating a common electrode potential Vcom, which is outputted through an output buffer 29. The high potential SCH and the low potential SCL outputted from the first and the second output buffers 25, 27 have the polarities opposite from that of the common electrode potential Vcom outputted from the output buffer 29. Since the high potential SCH, the low potential SCL and the common electrode potential Vcom are all DC potential, the energy consumption of the driving LSI 20 will be reduced.

[0027] The driving LSI 20 generates a horizontal start signal STH, a horizontal clock signal CKH, a vertical start signal STV, a vertical clock signal CKV, a SC driver controlling clock CKVS and other controlling clocks and supplies these signals to the display panel 1.

[0028] An analog video signal is inputted into the driving LSI 20 in the active matrix display device mentioned above. However, it is also possible to input a digital video signal and change it into an analog video signal. Fig. 5 shows a block circuit diagram of the active matrix display device with this configuration. A digital video signal inputted from outside is processed into a pair of digital video signals, whose polarities are inverted at each horizontal period, by an inversion processing circuit 61. The pair of the digital video signals is inputted into DA converters (digital analog converter) 62, 63 respectively, and inverted into analog video signals, a first video signal potential V and the second video signal potential *V with the opposite polarities.

[0029] The first video signal voltage V and the second video signal voltage *V are outputted to a pair of signal wirings through an output buffer 22 and an output buffer 23 respectively, and then fed to the drain driver 2 of the display panel 1. Other configuration is the same as that of the active matrix display device shown in Fig. 1.

[0030] Next, the driving method of the active matrix display device mentioned above will be explained. Fig. 6 is a timing chart showing the relation among signals in the display panel. The chart shows the timing of the potential change of the vertical start signal STV, the gate signal GV, the horizontal start signal STH, the horizontal clock signal CKH, the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b.

[0031] First, the pulse of the gate signal GV1 starts up after the pulse of the vertical start signal STV starts up, turning on the TFT 9 connected to the gate line 7 in the first row which receives the gate signal GV1. Then, the pulse of the horizontal start signal STH starts up, and it

is synchronized with the pulse of the horizontal clock signal CKH while the gate signal GV1 is supplied to the gate line 7 in the first row. The drain driver 2 consecutively selects the drain line 5 and the first and the second video signal voltages V, *V are consecutively applied to the pixel electrode 6, the first supplemental capacitance 10a, and the second supplemental capacitance 10b through the TFT 9.

[0032] The first video signal voltage V is fed to the pixel electrode 6 of the first pixel GS1, the first supplemental capacitance 10a and the first parasitic capacitance 15a. The second video signal voltage *V is fed to the pixel electrode 6 of the second pixel GS2, the second supplemental capacitance 10b and the first parasitic capacitance 15b.

[0033] The gate signal GV1 is not supplied to the gate line 7 on the first row, turning off the TFT 9 that is connected to the gate line 7 when the video signal voltage VD is fed to all the drain lines 5. Then, the pulse of the gate signal GV2 and gate signal GV3 consecutively get started, feeding the gate signal GV2 to the gate line 7 on the second row and the gate signal GV3 to the gate line 7 on the third row. This operation is repeated.

[0034] The polarity of the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b are inverted while the TFT 9 connected to the gate line 7 is off because the gate line 7 does not receive the gate signal GV. That is, the polarity is inverted for the period starting from the time when the gate signal GV1 gets halted to the time when the gate signal GV 2 gets started. The SC driver 16 controls the potential SCa of the first supplemental capacitance line 8a to change from the high potential SCH into low potential SCL and the potential SCb of the second supplemental capacitance line 8b to change from the low potential SCL into the high potential SCH. The inversion of the polarities between the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b takes place for each row with one frame circle.

[0035] The voltage of the pixel electrode 6 (referred to as the pixel voltage Vp, hereinafter) changes either to the positive voltage direction or the negative voltage direction through its capacitance coupling with the first supplemental capacitance 10a and first parasitic capacitance 15a or the capacitance coupling with the second supplemental capacitance 10b and the second parasitic capacitance 15b, performing the dot inversion driving, based on the voltage change ΔVs of the supplemental capacitance line. Then, the pulse of the vertical start signal STV starts up again when the gate signal GV is fed to all the gate line 7, feeding the gate signal GV to the gate line 7 on the first row. The same operation is repeated.

[0036] Therefore, each pixel in the first row receives the video signals with the polarity of + - + -,,, each pixel in the second row receives the video signals with the

polarity of - + - +,,, and each pixel in the third row receives the video signals with the polarity of + - + -,,, . This operation is repeated, performing the dot inversion driving.

[0037] Figs. 7A and 7B are the waveform showing the driving method of the display device of an embodiment of this invention. Fig. 7A shows the change of the pixel voltage Vp of the first pixel GS1 around the time when the polarity of the voltage SCa of the first supplemental capacitance line 8a is inverted. Fig. 7B shows the change of the pixel voltage Vp of the second pixel GS2 around the time when the polarity of the voltage SCb of the second supplemental capacitance line 8b is inverted.

[0038] It shows that the voltage SCa of the first supplemental capacitance line 8a is inverted from 3.15V to 0V and the voltage SCb of the second supplemental capacitance line 8b is inverted from 0V to 3.15V after the gate signal GV1 drops down to low level.

[0039] The pixel voltage Vp of the first pixel GS1 changes in negative voltage direction against the stable voltage Vcom of the common electrode 11 and the pixel voltage Vp of the second pixel electrode GS2 changes in positive voltage direction against the stable voltage Vcom of the common electrode 11 through the capacitance coupling mentioned above according to the voltage change ΔVsc.

[0040] The active matrix display device of this embodiment described above can improve the quality of image by performing the dot inversion driving. Additionally, since the video signal is not a single-phased signal, but a double-phased signal with the first and second video signal voltages V and *V, it is possible to make the inversion circle one horizontal period (1H period), leading to the smaller electric load to the driving LSI 20 and the reduction of the energy consumption, as shown in Fig. 8. If the video signal is a single-phased signal, the video signal should be inverted at a high speed within one horizontal period for each pixel (for each dot) in order to make the dot inversion driving possible, as shown in Fig. 9, leading to the larger energy consumption by the driving LSI 20.

[0041] The dynamic range of the compound signal of the first and the second video signal voltages V, *V is the same dynamic range of each of the first and second video signal voltages V, *V (for example, about 2.5V) in this embodiment, as shown in Fig. 7, leading to the further reduction of the energy consumption by the driving LSI 20. Additionally, it is possible to further reduce the energy consumption if the dynamic range of the composite signal of the first and the second video signal voltages V, *V is smaller than the sum of the dynamic range of the first and second video signal voltages V, *V.

[0042] The double-phased video signal with the first and the second video signal voltages V, *V is fed to the display panel 1 in this embodiment, the video signal voltage of any even-numbered phase, such as the video signal voltage with four phases, six phases or eight phases can also be generated in the driving LSI 20 and fed to the display panel 1. For example, the first and the third

video signal voltages V1 and V3 has the same polarity and the second and the fourth video signal voltages V2 and V4 has the polarity opposite from that of the first and the third video signal voltages, when the video signal with four phases is generated. The video signals V1, V2, V3, and V4 are fed in this order to each of the pixels, achieving the low energy-consumption dot inversion driving.

[0043] Next, the second embodiment of the active matrix display device of this invention will be explained by referring to the figures. Fig. 10 is a circuit block chart of the active matrix display device. And Fig. 11 is a model view of the pixel region of the display panel of the active matrix display device of this invention.

[0044] The first embodiment relates to the active matrix display device with black and white display. However, the active matrix display device of the second embodiment of this invention is a multiple-color display.

[0045] The video signals with three primary colors, RGB are supplied to the driving LSI 40 in this active matrix display device. Polarity switching circuits 41, 42, 43 corresponding to the video signals with three primary colors, RGB, and a pair of output buffers to amplify the output of the switching elements are formed in the driving LSI 40.

[0046] The video signal voltage SR and the video signal voltage *SR with the polarity opposite from that of the video signal RS are acquired as to the red color. Likewise, the video signal voltage SG and the video signal voltage *SG with the polarity opposite from that of the video signal SG are acquired as to the green color, and the video signal voltage SB and the video signal voltage *SB with the polarity opposite from that of the video signal SB are acquired as to the blue color. That is, the video signal with two phases that has the opposite polarities with the common electrode voltage Vcom as the reference voltage is generated for each color.

[0047] These video signal voltages are fed to a drain driver 32 of a display panel 51 through 6 signal wirings. Pixels corresponding to three primary colors, RGB, are formed in the order of R, G, and B in a display region 34 of the display panel 51 as shown in Fig. 10. The drain driver 32 applies the video signal voltages SR and *SR to the pixels in such way that the red pixels adjacent to each other receive the video signal voltages with the opposite polarities. Likewise, the drain driver 32 applies the video signal voltages SR and *SR to the pixels in such way that the green pixels adjacent to each other receive the video signal voltages with the opposite polarities, and video signal voltages SB and *SB to the pixels in such way that the blue pixels adjacent to each other receive the video signal voltages with the opposite polarities.

[0048] The dot inversion driving can be achieved in this way in the full-color active matrix display device. Since the video signals corresponding to each color has the inversion circle of one horizontal period, as in the first embodiment, it is possible to make the electric load of the driving LSI 40 smaller, leading to the reduced energy consumption. Also, the dynamic range of the video signals corresponding to each color is set narrower, as in

the first embodiment, the smaller load of the driving LSI 40 is achieved, leading to the further reduction of the energy consumption.

[0049] The first and the second embodiments of this invention can achieve the high quality active matrix display device that is capable of both the line inversion driving with the low energy consumption and the dot inversion driving with high quality display.

[0050] The driving LSIs 20, 40 are formed outside the display panels 1, 51 respectively in the first and the second embodiments. However, it is also possible to form the driving LSIs 20, 40 within the display panels 1, 51, respectively. The TFT is used as the switching element for each pixel. The TFT can be poly-silicon TFT or amorphous TFT. It is also possible to use TFD (thin film diode) instead of TFT, as a switching element.

Claims

1. An active matrix display device comprising:
 - a plurality of a first pixel electrodes (GS1);
 - a plurality of a second pixel electrodes (GS2), each of the second pixel electrodes (GS2) being disposed adjacent a corresponding first pixel electrode (GS1);
 - a signal processing circuit (20, 40) outputting a composite video signal comprising a first video signal (V) and a second video signal (*V) that has a polarity opposite from a polarity of the first video signal (V), a dynamic range of the composite video signal not being larger than a sum of a dynamic range of the first video signal (V) and a dynamic range of the second video signal (*V); and
 - a driver circuit (2, 32) supplying the first video signal (V) to the first pixel electrodes (GS1) and the second video signal (*V) to the second pixel electrodes (GS2).
2. The active matrix display device of claim 1, wherein the dynamic range of the composite video signal is the sum of the dynamic range of the first video signal (V) and the dynamic range of the second video signal (*V).
3. The active matrix display device of claim 1 or 2, wherein the composite video signal further comprises a pair of video signals (SR, *SR, SG, *SG) that have opposite polarities.
4. The active matrix display device according to any of claims 1 to 3, further comprising a supplemental capacitance electrode (10a, 10b) provided for each of the first and second pixel electrodes (GS1, GS2), a first supplemental capacitance line (8a) provided so as to form capacitance between the first supplementen-

tal capacitance line (8a) and the supplemental capacitance electrodes (10a) provided for the first pixel electrodes (GS1), and a second supplemental capacitance line (8b) provided so as to form capacitance between the second supplemental capacitance line (8b) and the supplemental capacitance electrodes (10b) provided for the second pixel electrodes (GS2).

5

5. The active matrix display device according to any of claims 1 to 4, wherein the polarities are determined with respect to a DC voltage (V_{com}) applied to a common electrode (11) facing the first and second pixel electrodes (GS1, GS2).

10

6. The active matrix display device according to any of claims 1 to 5, wherein the second video signal ($*V$) is an inverted first video signal (V).

15

20

25

30

35

40

45

50

55

FIG. 1

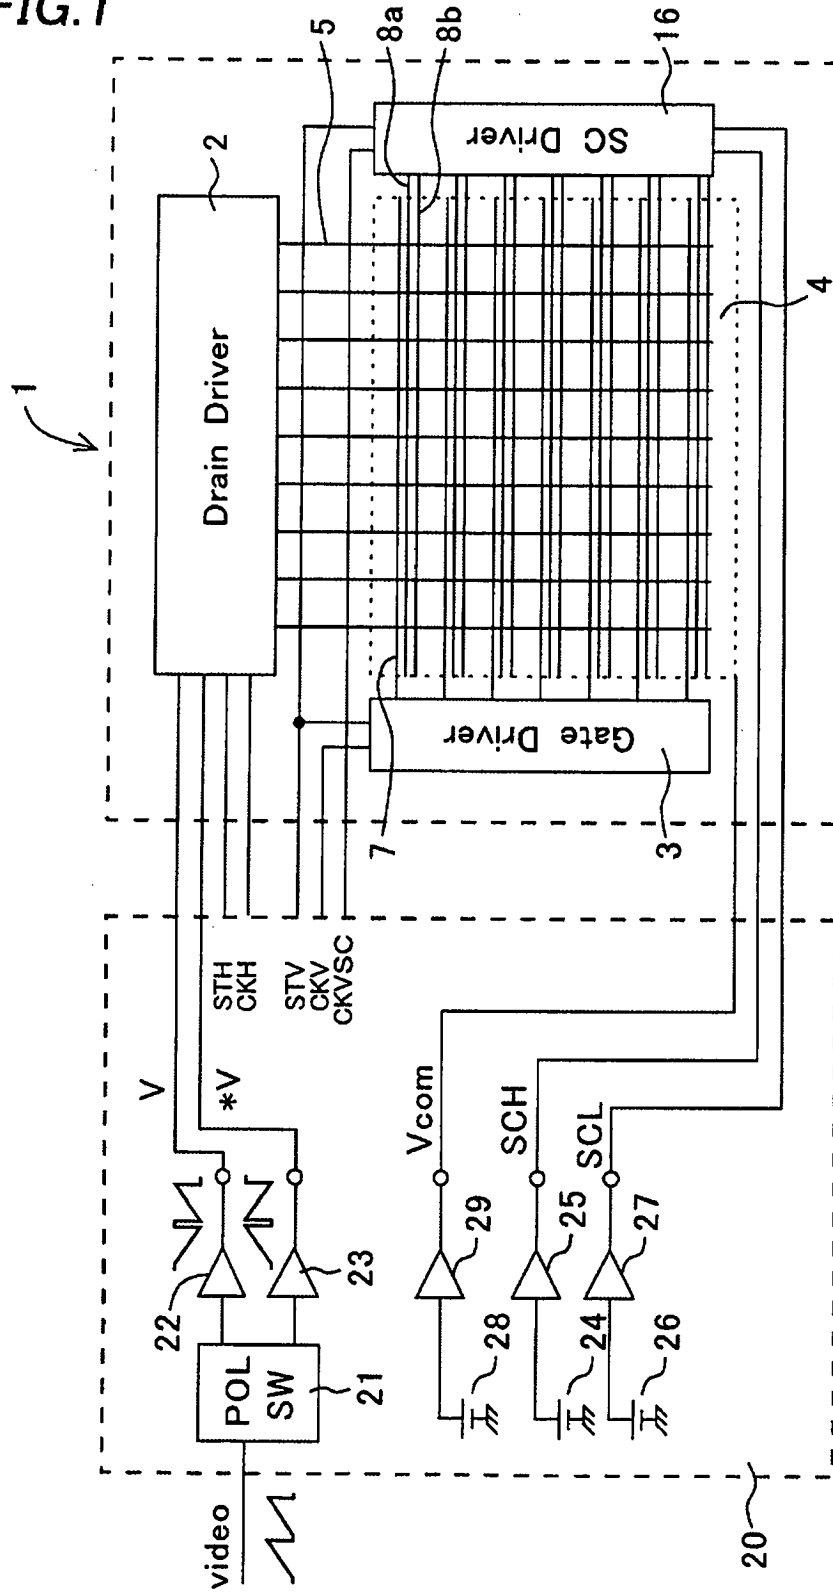


FIG. 2

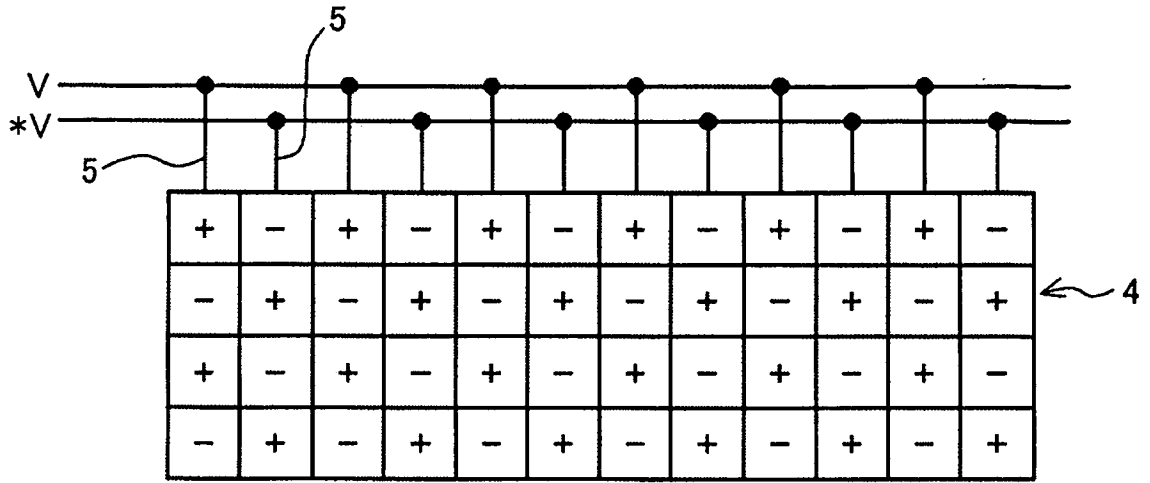


FIG. 3

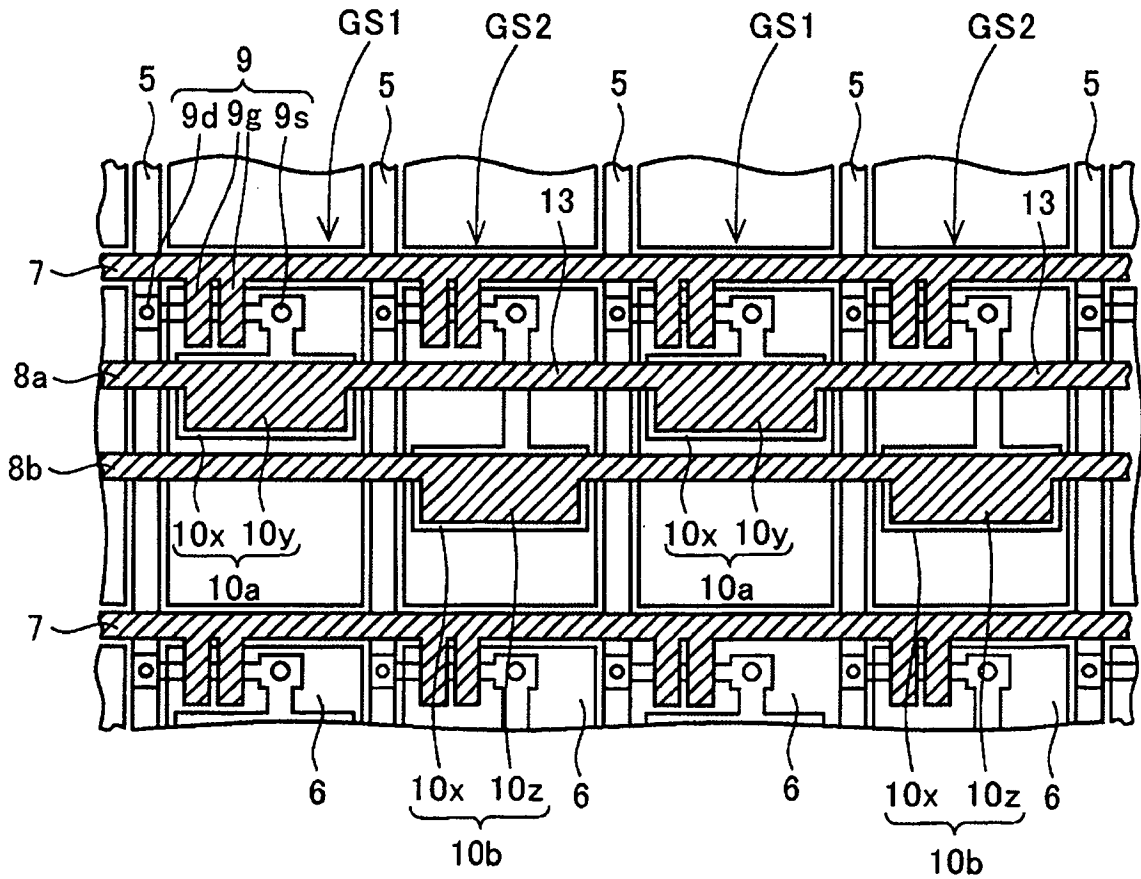
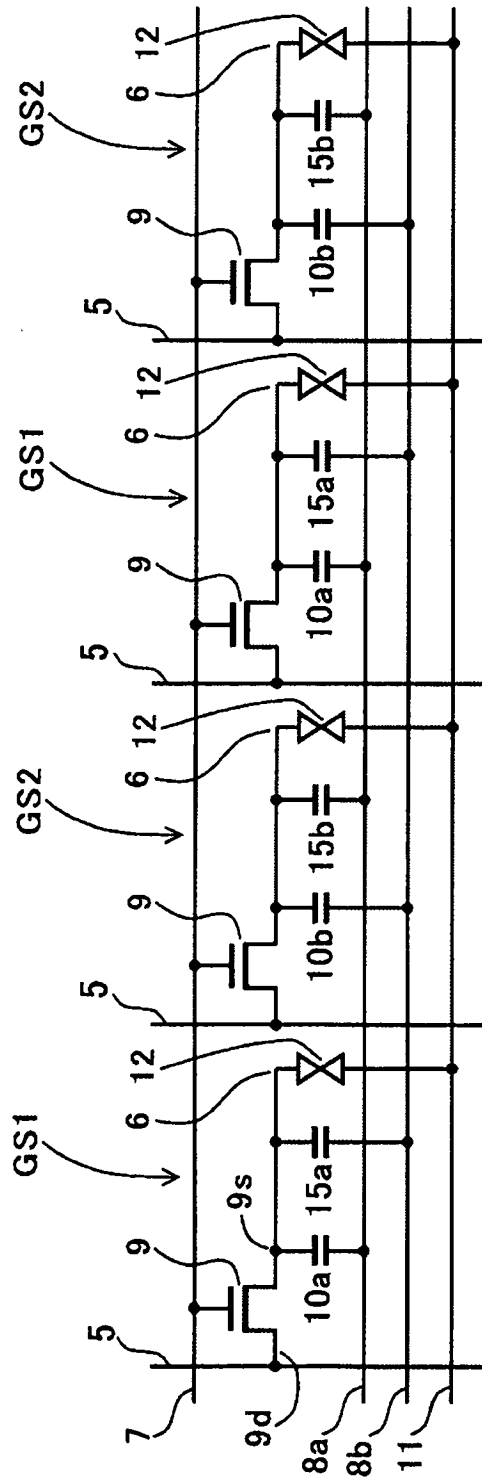


FIG.4



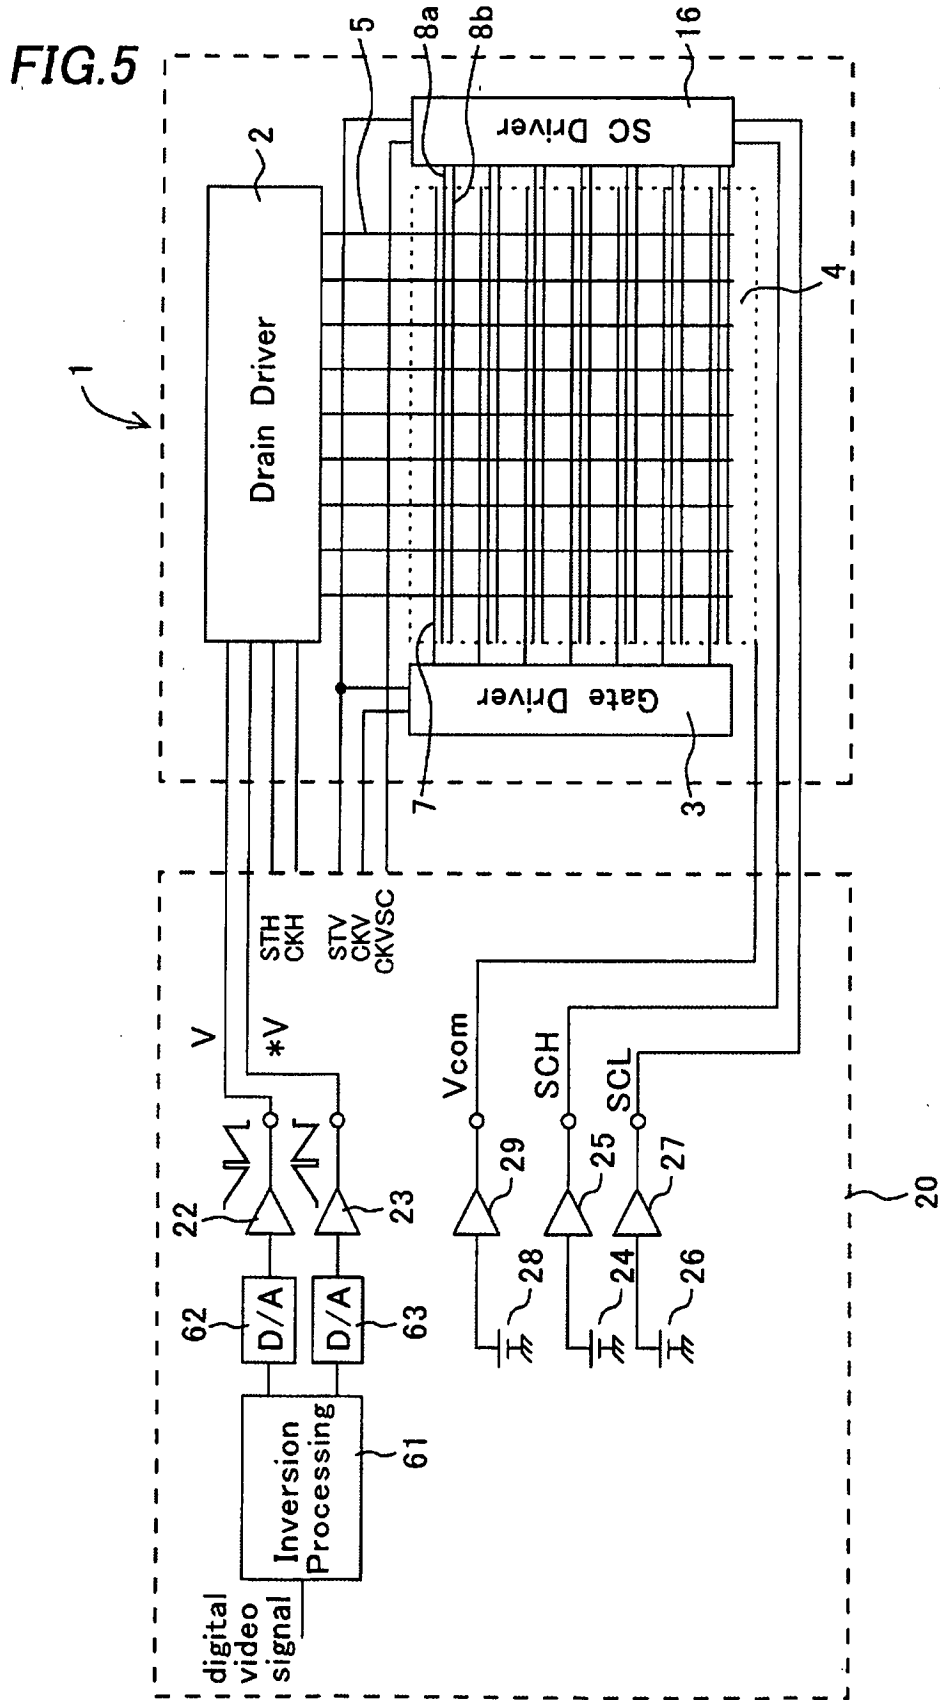


FIG.6

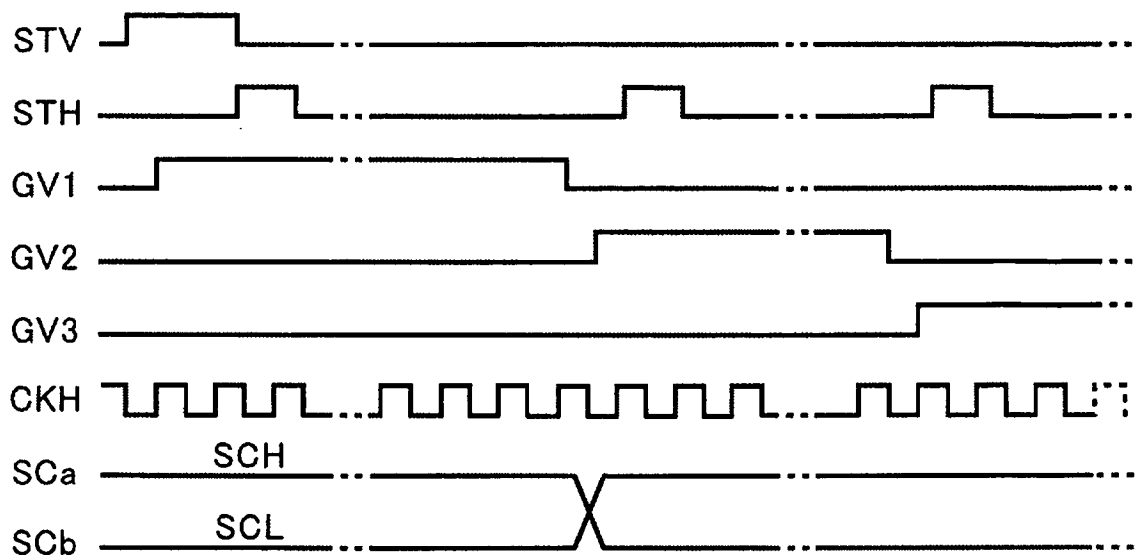


FIG. 7A

pixel potential V_P (the first pixel GS1)

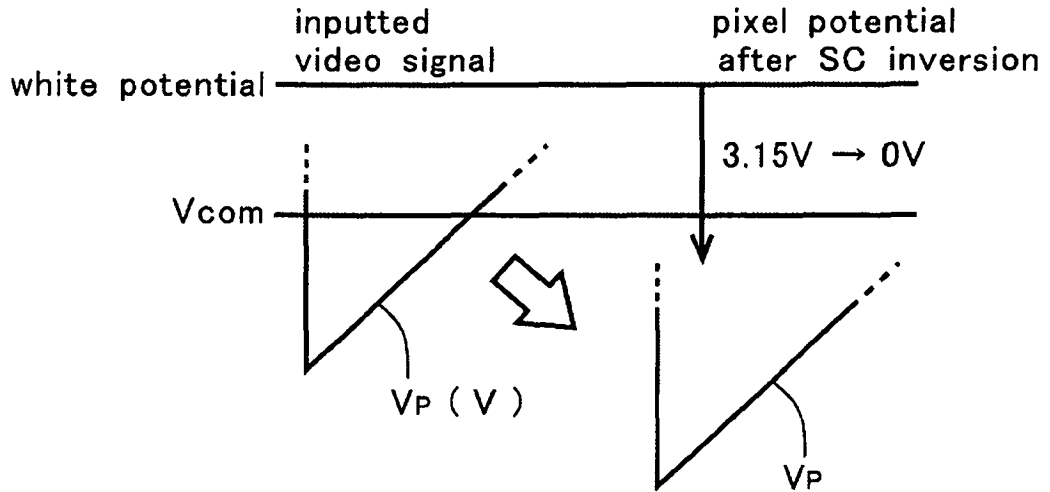


FIG. 7B

pixel potential V_P (the second pixel GS2)

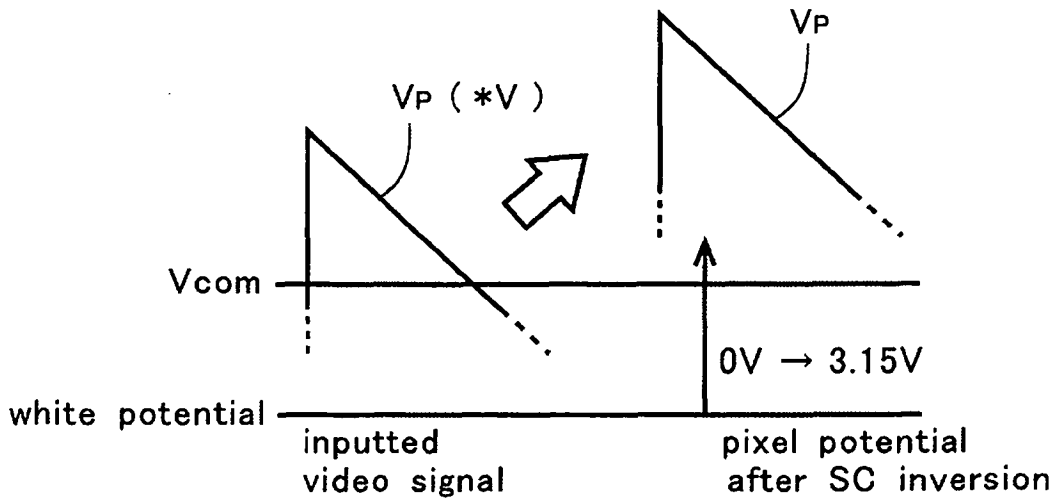


FIG.8

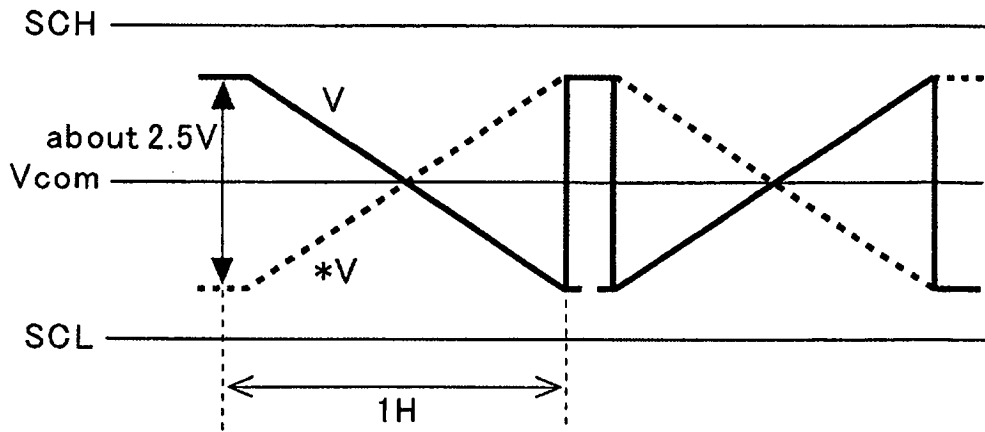


FIG.9

PRIOR ART

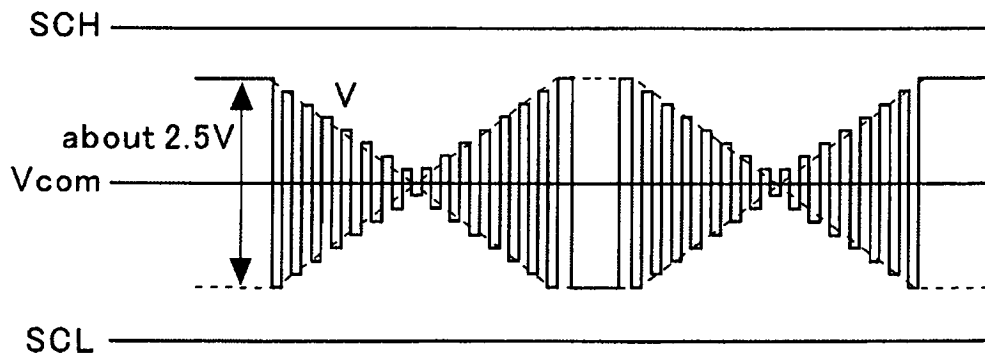


FIG. 10

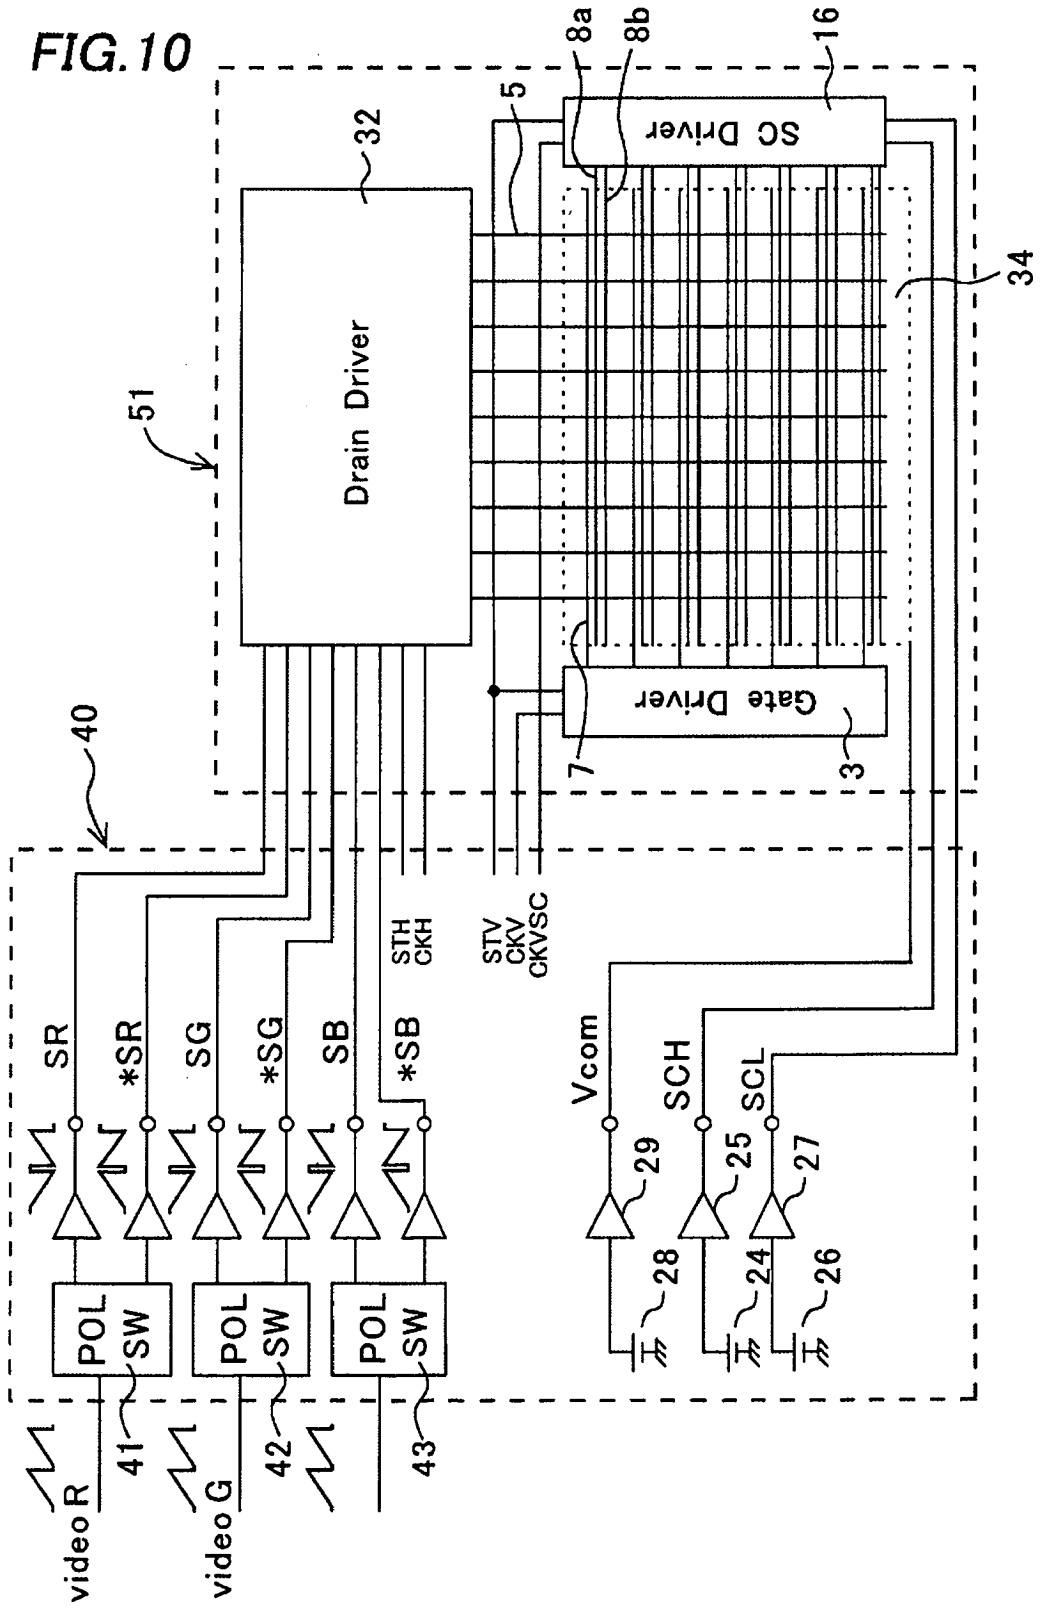


FIG.11


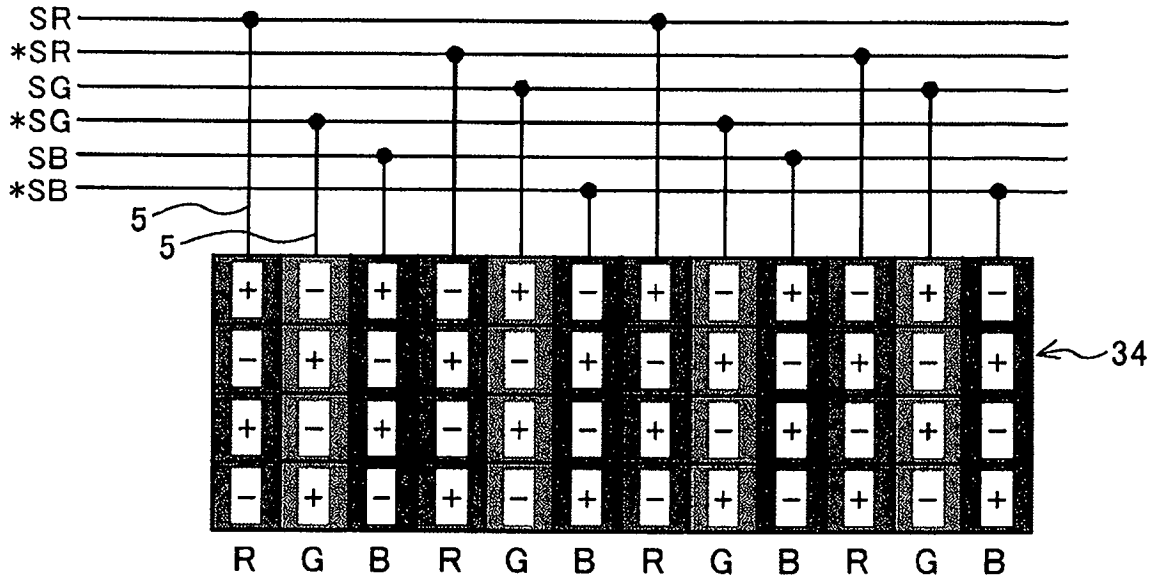


FIG.12

PRIOR ART



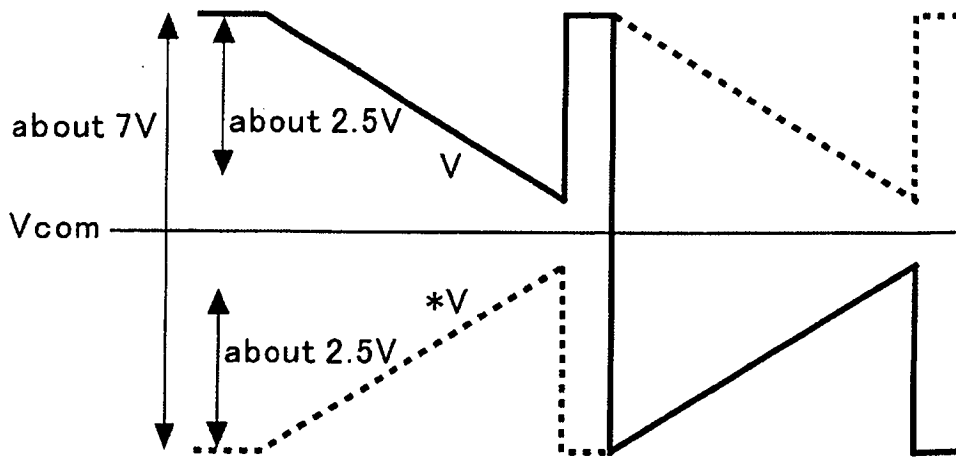

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	<p>SENDA M ET AL: "NEW DOT-INVERSION DRIVING METHOD FOR LOW POWER CONSUMPTION LTPS TFT LCDS"</p> <p>2004 SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS. SEATTLE, WA, MAY 25 - 27, 2004, SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, SAN JOSE, CA : SID, US, vol. VOL. 35 PRT 2, 26 May 2004 (2004-05-26), pages 976-979, XP001222836</p> <p>* the whole document *</p> <p style="text-align: center;">-----</p>	1-6	G09G3/36
			<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p> <p>G09G</p>
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		3 August 2005	Fanning, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>..... & : member of the same patent family, corresponding document</p>			

7
EPO FORM 1503 03/82 (P04C01)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2003150127 A [0003]

专利名称(译)	有源矩阵液晶显示装置		
公开(公告)号	EP1717793A1	公开(公告)日	2006-11-02
申请号	EP2005009234	申请日	2005-04-27
[标]申请(专利权)人(译)	三洋电机株式会社		
申请(专利权)人(译)	SANYO ELECTRIC CO., LTD.		
当前申请(专利权)人(译)	SANYO ELECTRIC CO., LTD.		
[标]发明人	KOBAYASHI MITSUGU SAIKI KENJI MATSUDA SEIJI		
发明人	KOBAYASHI, MITSUGU SAIKI, KENJI MATSUDA, SEIJI		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3655 G09G3/3607 G09G3/3614 G09G2300/0876 G09G2310/0297		
外部链接	Espacenet		

摘要(译)

驱动LSI (20) 的第一输出缓冲器 (22) 输出第一视频信号电压 (V)，第二输出缓冲器 (23) 输出第二视频信号电压 (*V)，其极性与第一视频信号电压相反。视频信号电压。第一和第二视频信号电压 (V, *V) 通过一对信号配线馈送到显示板 (1) 的漏极驱动器 (2)。漏极驱动器 (2) 通过漏极线 (5) 将第一视频信号电压 (V) 提供给像素，并且将与第一像素相邻的像素具有相反极性的第二视频信号电压 (*V) 提供给漏极线 (5)。以这种方式，水平和垂直方向上的任何一对相邻像素接收彼此具有相反极性的视频信号电压。

