



(11) **EP 1 758 083 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
05.12.2018 Bulletin 2018/49

(51) Int Cl.:
G09G 3/32 ^(2016.01)

(21) Application number: **06251612.5**

(22) Date of filing: **24.03.2006**

(54) **Organic light emitting display**

Organische lichtemittierende Anzeige

Affichage électroluminescent organique

(84) Designated Contracting States:
DE FR GB

(30) Priority: **01.08.2005 KR 20050070434**

(43) Date of publication of application:
28.02.2007 Bulletin 2007/09

(73) Proprietors:
• **Samsung Display Co., Ltd.**
Gyeonggi-do (KR)
• **IUCF-HYU (Industry-University Cooperation**
Foundation Hanyang University)
Seongdong-gu, Seoul (KR)

(72) Inventors:
• **Ryu, Do Hyung**
Yongin-si
Gyeonggi-do (KR)
• **Chung, Bo Yong**
Yongin-si
Gyeonggi-do (KR)
• **Kwon, Oh Kyong**
Yongin-si
Gyeonggi-do (KR)

(74) Representative: **Mouteney, Simon James**
Marks & Clerk LLP
90 Long Acre
London
WC2E 9RA (GB)

(56) References cited:
EP-A- 1 796 070 WO-A-2005/029456
WO-A1-2005/069267 US-A1- 2004 104 870
US-A1- 2007 024 541

- **HAI-JUNG IN ET AL: "A Novel**
Voltage-Programming Pixel with
Current-Correction Method for Large-Size and
High-Resolution AMOLEDs on Poly-Si
Backplane" INTERNATIONAL MEETING ON
INFORMATION DISPLAY, XX, XX, no. 286, 23 July
2005 (2005-07-23), pages 901-904, XP002405123
- **MATSUEDA Y ET AL: "35.1: 2.5-in. AMOLED with**
Integrated 6-Bit Gamma Compensated Digital
Data Driver" 2004 SID INTERNATIONAL
SYMPOSIUM. SEATTLE, WA, MAY 25 - 27, 2004,
SID INTERNATIONAL SYMPOSIUM, SAN JOSE,
CA : SID, US, 25 May 2004 (2004-05-25), pages
1116-1119, XP007011917

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

1. Field of the Invention

[0001] The present invention relates to an organic light emitting display, and more particularly to an organic light emitting display that can display an image of uniform brightness.

2. Discussion of Related Art

[0002] Recently, various flat panel display devices have been developed to substitute for a cathode ray tube (CRT) display because the CRT display is relatively heavy and bulky. Flat panel display devices include liquid crystal displays (LCDs), field emission displays (FEDs), plasma display panels (PDPs), organic light emitting display devices, etc.

[0003] An organic light emitting display device is a flat display device that displays an image using an organic light emitting diode that generates light by the recombination of electrons and holes. Such an organic light emitting display device has advantages in that it has a high response speed, and operates with a low power consumption.

[0004] FIG. 1 is a view showing a conventional organic light emitting display device. With reference to FIG. 1, the conventional organic light emitting display device includes a display region 30, a scan driver 10, a data driver 20, and a timing controller 50. The display region 30 includes a plurality of pixels 40 coupled with scan lines S1 to Sn and data lines D1 to Dm. The scan driver 10 drives the scan lines S1 to Sn. The data driver 20 drives the data lines D1 to Dm. The timing controller 50 controls the scan driver 10 and the data driver 20.

[0005] The timing controller 50 generates a data drive control signal DCS and a scan drive control signal SCS according to externally supplied synchronous signals. The data drive control signal DCS generated by the timing controller 50 is provided to the data driver 20, and the scan drive control signal SCS is provided to the scan driver 10. Furthermore, the timing controller 50 provides externally supplied data Data to the data driver 20.

[0006] The scan driver 10 receives the scan drive control signal SCS from the timing controller 50. Upon the receipt of the scan drive control signal SCS, the scan driver generates a scan signal, and sequentially provides the generated scan signal to the scan lines S1 to Sn.

[0007] The data driver 20 receives the data drive control signal DCS from the timing controller 50. Upon the receipt of the data drive control signal DCS, the data driver 20 generates a data signal (predetermined voltage), and provides the generated data signal to the data lines D1 to Dm in synchronization with the scan signal.

[0008] The display region 30 receives a first power of a first power supply ELVDD and a second power of a second power supply ELVSS from an exterior, and provides them to respective pixels 40. Upon the receipt of the first power of the first power supply ELVDD and the second power of the second power supply ELVSS, each of the pixels 40 controls an amount of current flowing into the second power supply ELVSS from the first power supply ELVDD through an organic light emitting diode corresponding to the data signal, thus generating light corresponding to the data signal.

[0009] That is, in the conventional organic light emitting display device, each of the pixels 40 generates light of a predetermined luminance corresponding to the data signal. However, due to non-uniformity of threshold voltages and a deviation of electron mobility of transistors included in each pixel 40, the conventional organic light emitting display device has a problem in that it cannot display an image of a desired (or uniform) luminance. In practice, threshold voltages of transistors included in each of the pixels 40 can be compensated to some degree by controlling a construction of pixel circuits included in the pixels 40, but a deviation of electron mobility cannot be compensated. In order to solve the problem, an electric current (instead of a voltage) can be supplied as a data signal. In practice, when the electric current is supplied as the data signal, although the transistors have non-uniform voltage-current characteristics, the organic light emitting display device can display a uniform image at the display region 30.

[0010] However, because the current supplied as the data signal is a minute current, it takes a long time to charge a data line. For example, assuming that a load capacitance of the data line is 30 pF, a time of several ms is required to charge a load of the data line by a data signal ranging from several tens nA to several hundreds nA. Upon considering one (1) horizontal period of several tens μ s, a charge time of several ms may be too long. Therefore, an organic light emitting display device capable of displaying uniform brightness with a fast response time is still required.

[0011] Accordingly, it is an aspect of the present invention to provide an organic light emitting display device capable of displaying an image of uniform brightness with a fast response time.

[0012] There is disclosed in "A Novel Voltage-Programming Pixel with Current-Correction Method for large-Size and High Resolution AMOLEDs on Poly-Si Backplane", Hai-JUNG IN et al, International meeting on information Display, XX, XX, No. 286, 23 July 2005, pages 901-904, XP002405123, an AMOLED voltage-programming pixel structure with current correction method especially for large size displays and HDTV. WO-A-2005/069267 describes an active matrix electro-luminescent display device having a shorting transistor connected between the gate and drain of the drive transistor.

The present invention provides an organic light emitting display device in accordance with claim 1 or claim 12 below.

[0013] Preferred features are set out in claims 2 to 11 and 13 to 21.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings, together with the specification, illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the present invention.

FIG. 1 is a view showing a conventional organic light emitting display device;

FIG. 2 is a view showing an organic light emitting display device according to a first embodiment of the present invention;

FIG. 3 is a circuit diagram showing an example of a pixel shown in FIG. 2;

FIG. 4 is a waveform chart that illustrates a driving method of the pixel shown in FIG. 3;

FIG. 5 is a circuit diagram showing another example of the pixel shown in FIG. 2;

FIG. 6 is a block diagram showing an example of a data driving circuit shown in FIG. 2;

FIG. 7 is a block diagram showing another example of the data driving circuit shown in FIG. 2;

FIG. 8 is a view showing an example of a connected relation of a voltage generator, a digital-analog converter, a first buffer, a second buffer, a switching unit, a current sink unit, and a pixel shown in FIG. 6;

FIG. 9 is a waveform chart showing a method for driving the switching unit, the current sink unit, and the pixel shown in FIG. 8;

FIG. 10 is a view showing another example of the switching unit shown in FIG. 8;

FIG. 11 is a view showing another example of a connected relation of the voltage generator, the digital-analog converter, the first buffer, the second buffer, the switching unit, the current sink unit, and the pixel shown in FIG. 6;

FIG. 12 is a view showing an organic light emitting display device according to a second embodiment of the present invention;

FIG. 13 is a view showing an organic light emitting display device according to a third embodiment of the present invention in which an auxiliary line is positioned at a location different from that of the auxiliary line of FIG. 12;

FIG. 14 is a view showing an organic light emitting display device according to a fourth embodiment of the present invention; and

FIG. 15 is a view for illustrating an operation of a voltage generator shown in FIG. 14.

DETAILED DESCRIPTION

[0015] In the following detailed description, certain exemplary embodiments of the present invention are shown and described, by way of illustration. As those skilled in the art would recognize, the described exemplary embodiments may be modified in various ways, all without departing from the scope of the present invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, rather than restrictive. There may be parts shown in the drawings, or parts not shown in the drawings, that are not discussed in the specification as they are not essential to a complete understanding of the invention. Like reference numerals designate like elements. Here, when a first element is connected to/with a second element, the first element may not only be directly connected to/with the second element but also be indirectly connected to/with the second element via a third element. Also, when a first element is on a second element, the first element may not only be directly on the second element but may also be indirectly on the second element via a third element.

[0016] FIG. 2 is a view showing an organic light emitting display device according to an embodiment of the present invention.

[0017] With reference to FIG. 2, the organic light emitting display device according to a first embodiment of the present invention includes a display region 130, a scan driver 110, a data driver 120, and a timing controller 150. The display region 130 includes a plurality of pixels 140 that are coupled with scan lines S1 to Sn, light emitting control lines E1 to En, and data lines D1 to Dm. The scan driver 110 drives the scan lines S1 to Sn, and the light emitting control lines E1 to En. The data driver 120 drives the data lines D1 to Dm. The timing controller 150 controls the scan driver 110 and the data driver 120.

[0018] The display region 130 has pixels 140 that are formed at an area divided by the scan lines S1 to Sn, the light emitting control lines E1 to En, and the data lines D1 to Dm. Each of the pixels 140 receives a first power of a first power supply EVVDD, a second power of a second supply ELVSS, and a reference power of a reference power supply Vref from an exterior. Upon receiving the reference power of the reference power supply Vref, each pixel 140 compensates for a voltage drop of the first power of the first power supply EVVDD using the first power supply EVVDD and the reference power supply Vref. Furthermore, each of the pixels 140 provides a predetermined electric current from the first power supply EVVDD to the second power supply ELVSS via an organic light emitting diode (not shown). For this purpose,

each of the pixels 140 may be configured as shown in FIG. 3 or FIG. 5. A detailed construction of the pixel 140 shown in FIG. 3 or FIG. 5 will be described later.

[0019] The timing controller 150 generates a data drive control signal DCS and a scan drive control signal SCS corresponding to externally supplied synchronous signals. The data drive control signal DCS and the scan drive control signal SCS generated by the timing controller 150 are provided to the data driver 120 and the scan driver 110, respectively. Furthermore, the timing controller 150 provides externally supplied data Data to the data driver 120.

[0020] When the scan driver 110 receives the scan drive control signal SCS from the timing controller 150, it sequentially provides a scan signal to the scan lines S1 to Sn. Moreover, when the scan driver 110 receives the scan drive control signal SCS from the timing controller 150, it sequentially provides a light emitting control signal to the light emitting control lines E1 to En. Here, the light emitting control signal is supplied to overlap with two corresponding scan signals. For this purpose, a width of the light emitting control signal is set to be identical with or greater than the scan signal.

[0021] The data driver 120 receives the data drive control signal DCS from the timing controller 150. Upon receiving the data drive control signal DCS, the data driver 120 generates the data signal, and provides it to the data lines D1 to Dm. Here, the data driver 120 supplies a predetermined current to data lines D1 to Dm during a first period of one (1) horizontal period H. In contrast to this, the data driver 120 supplies a predetermined voltage to the data lines D1 to Dm during a second period of the one (1) horizontal period H other than the first period. In order to do this, the data driver 120 includes at least one data driving circuit 200. A detailed construction of the data driving circuit 200 will be explained later. Hereinafter, in order to help the understanding of the present invention, the voltage supplied to the data lines D1 to Dm during the second period is referred to as the data signal.

[0022] FIG. 3 is a circuit diagram showing an example of the pixel 140 shown in FIG. 2. In order to help the understanding of the description thereof, FIG. 3 shows a pixel coupled with an m-th data line Dm, an (n-1)-th scan line Sn-1, an n-th scan line Sn, and an n-th light emitting control line En.

[0023] Referring to FIG. 3, the pixel 140 of this embodiment of the present invention includes a light emitting element OLED and a pixel circuit 142 for supplying a current to the light emitting element OLED.

[0024] The organic light emitting diode OLED generates light of a predetermined color according to the current from the pixel circuit 142. For this purpose, the organic light emitting diode OLED is formed by organic materials, phosphorescent materials, and/or inorganic materials.

[0025] When a scan signal is supplied to the (n-1)-th scan line Sn-1 (previous scan line), the pixel circuit 142 compensates for a voltage drop of the first power of the power supply ELVDD and a threshold voltage of the fourth transistor M4. Furthermore, when the scan signal is supplied to the n-th scan line Sn (current scan line), the pixel circuit 142 is charged with a voltage corresponding to the data signal. In order to perform these functions, the pixel circuit 142 includes first to sixth transistors M1 to M6, a first capacitor C1, and a second capacitor C2.

[0026] A first electrode of the first transistor M1 is coupled with the data line Dm, and a second electrode thereof is coupled with a first node N1. A gate electrode of the first transistor M1 is coupled with the n-th scan line Sn. When the scan signal is supplied to the n-th scan line Sn, the first transistor M1 is turned-on to electrically connect the data line Dm to the first node N1.

[0027] A first electrode of the second transistor M2 is coupled with the data line Dm, and a second electrode thereof is coupled with a second electrode of the fourth transistor M4. A gate electrode of the second transistor M2 is coupled with the n-th scan line Sn. When a scan signal is supplied to the n-th scan line Sn, the second transistor M2 is turned-on to electrically connect the second electrode of the fourth transistor M4 to the data line Dm.

[0028] A first electrode of the third transistor M3 is coupled with the reference power supply Vref, and a second electrode thereof is coupled with the first node N1. A gate electrode of the third transistor M3 is coupled with the (n-1)-th scan line Sn-1. When the scan signal is supplied to the (n-1)-th scan line Sn-1, the third transistor M3 is turned-on to electrically connect the first power supply ELVDD to the first node N1.

[0029] A first electrode of the fourth transistor M4 is coupled with the first power supply ELVDD, and a second electrode thereof is coupled with a first electrode of the sixth transistor M6. A gate electrode of the fourth transistor M4 is coupled with the second node N2. The fourth transistor M4 provides a current corresponding to a voltage applied to the second node N2, namely, a voltage charged in the first and second capacitors C1 and C2, to the first electrode of the sixth transistor M6.

[0030] A first electrode of the fifth transistor M5 is coupled with the second electrode of the fourth transistor M4, and a second electrode thereof is coupled with the second node N2. A gate electrode of the fifth transistor M5 is coupled with the (n-1)-th scan line Sn-1. When the scan signal is supplied to the (n-1)-th scan line Sn-1, the fifth transistor M5 is turned-on, causing the fourth transistor M4 to be diode-connected.

[0031] A first electrode of the sixth transistor M6 is coupled with the second electrode of the fourth transistor M4, and a second electrode thereof is coupled with an anode electrode of the light emitting element OLED. A gate electrode of the sixth transistor M6 is coupled with an n-th light emitting control line En. When a light emitting control signal is supplied to the n-th light emitting control line En, the sixth transistor M6 is turned-off, whereas when the light emitting control signal is not supplied to the n-th light emitting control line En, the sixth transistor M6 is turned-on. Here, the light emitting

control signal supplied to the n-th light emitting control line E_n overlaps with the scan signal supplied to the (n-1)-th scan line S_{n-1} and the n-th scan line S_n . Accordingly, when the scan signal is supplied to the (n-1)-th scan line S_{n-1} and the n-th scan line S_n and a predetermined voltage is charged in the first and second capacitors C1 and C2, the sixth transistor M6 is turned-off. In other cases, the sixth transistor M6 is turned-on to electrically connect the fourth transistor M4 with the light emitting element OLED. In FIG. 3, although PMOS transistors M1 through M6 are shown, the types of the transistors are not limited thereto, and can be changed.

[0032] In addition, in the pixel 140 of FIG. 3, the reference power supply V_{ref} does not supply an electric current to the organic light emitting diode OLED. That is, because the reference power supply V_{ref} does not supply an electric current to pixels 140, a voltage drop of the reference power of the reference power supply 140 is not a concern. Accordingly, the same voltage can be maintained regardless of positions of the pixels 140. Here, a voltage value of the reference power supply V_{ref} is set to be identical with or different from that of the first power supply ELVDD.

[0033] FIG. 4 is a timing chart for illustrating a method for driving the pixel shown in FIG. 3. In FIG. 4, one (1) horizontal period H is divided into first and second periods. During the first period, a predetermined current PC flows through the data lines D1 to Dm. During the second period, a data signal DS is supplied to the data lines D1 to Dm. In practice, during the first period, the predetermined current PC is supplied from the pixel 140 to the data driving circuit 200 (current sink). During the second period, the data signal DS is supplied from the data driving circuit 200 to the pixel 140. Hereinafter, it is assumed that an initial voltage value of the reference power supply V_{ref} and an initial voltage value of the first power supply ELVDD are set to be identical with each other.

[0034] Referring to FIG. 3 and FIG. 4, the scan signal is supplied to the n-th scan line S_{n-1} . When the scan signal is supplied to the n-th scan line S_{n-1} , both of the third transistor M3 and the fifth transistor M5 are turned-on. When the fifth transistor M5 is turned-on, the fourth transistor M4 is diode-connected. When the fourth transistor M4 is diode-connected, a voltage value obtained by subtracting a threshold voltage of the fourth transistor M4 from a voltage of the first power supply ELVDD, is applied to the second node N2.

[0035] Further, when the third transistor M3 is turned-on, a voltage of the reference power supply V_{ref} is applied to the first node N1. At this time, a voltage corresponding to a difference between the first node N1 and the second node N2 is charged in a second capacitor C2. Assuming that a voltage value of the reference power supply V_{ref} is identical with a voltage value of the first power supply ELVDD, a voltage corresponding to a threshold voltage of the fourth transistor M4 is charged in the second capacitor C2. Moreover, when a predetermined voltage drop occurs in the first power supply ELVDD, a threshold voltage of the fourth transistor M4 and a voltage corresponding to a voltage drop of the first power supply ELVDD are charged in the second capacitor C2. That is, in embodiments of the present invention, while the scan signal is being supplied to the (n-1)-th scan line S_{n-1} , a threshold voltage of the fourth transistor M4 and a voltage corresponding to a voltage drop of the first power supply ELVDD are charged in the second capacitor C2, whereby a voltage drop of the first power supply ELVDD can be compensated for.

[0036] After a predetermined voltage is charged in the second capacitor C2, the scan signal is supplied to the n-th scan line S_n . When the scan signal is supplied to the n-th scan line S_n , the first transistor M1 and the second transistor M2 are turned-on. When the second transistor M2 is turned-on, the predetermined current PC from the pixel 140 is provided to the data driving circuit 200 via the data line Dm. In practice, the predetermined current PC is supplied to the data driving circuit 200 through the first power supply ELVDD, the fourth transistor M4, the second transistor M2, and the data line Dm. At this time, a predetermined voltage corresponding to the predetermined current PC is charged in the first capacitor C1 and the second capacitor C2.

[0037] In addition, the data driving circuit 200 resets a voltage of a gamma voltage unit (not shown) using the predetermined voltage (referred to as a compensation voltage hereinafter) generated when the predetermined current PC is sunk, and generates a data signal DS using the reset voltage of the gamma voltage unit. Next, during a second period of one (1) horizontal period, when the data signal DS is provided to the first node N1 via the first transistor M1, a voltage corresponding to a difference between the data signal DS and the first power supply ELVDD1 is charged in the first capacitor C1. At this time, since the second node N2 is set in a floating state, the second capacitor C2 maintains a previously charged voltage.

[0038] That is, according to embodiments of the present invention, while a scan signal is being supplied to a previous scan line, the threshold voltage of the fourth transistor M4 and a voltage corresponding to a voltage drop of the first power supply ELVDD are charged in the second capacitor C2, thereby causing the threshold voltage of the fourth transistor M4 and the voltage drop of the first power supply ELVDD to be compensated for. Furthermore, embodiments of the present invention reset a voltage of a gamma voltage unit and supplies a generated data signal using the reset voltage of the gamma voltage unit while the scan signal is being supplied to a current scan line, so that the mobility of transistors included in the pixel 140 can be compensated for. Therefore, embodiments of the present invention compensate for non-uniformity of a threshold voltage of the transistor and mobility in order to display uniform image. A method of resetting the voltage of the gamma voltage unit will be explained below.

[0039] FIG. 5 is a circuit diagram showing another example of the pixel 140 shown in FIG. 2 that includes a pixel circuit 142'. Except that the first capacitor C1 is installed between the second node N2 and the first power supply ELVDD, the

pixel circuit 142' of FIG. 5 has substantially the same construction as that of the pixel circuit 142 shown in FIG. 3.

[0040] Referring to FIG. 4 and FIG. 5, a scan signal is supplied to the n-th scan line Sn-1. When the scan signal is supplied to the n-th scan line Sn-1, both of the third transistor M3 and the fifth transistor M5 are turned-on. When the fifth transistor M5 is turned-on, the fourth transistor M4 is diode-connected. When the fourth transistor M4 is diode-connected, a voltage value obtained by subtracting a threshold voltage of the fourth transistor M4 from a voltage of the first power supply ELVDD, is applied to the second node N2.

[0041] Further, when the third transistor M3 is turned-on, a voltage of the reference power supply Vref is applied to the first node N1. Accordingly, a voltage corresponding to a difference between a voltage of the first node N1 and a voltage of the second node N2 is charged in the second capacitor C2. Here, while the scan signal is being supplied to the (n-1)-th scan line Sn-1, because the first transistor M1 and the second transistor M2 are turned-off, the data signal DS is not provided to the pixel 140.

[0042] When the scan signal is supplied to the n-th scan line Sn, the first transistor M1 and the second transistor M2 are turned-on. When the second transistor M2 is turned-on, the predetermined current PC from the pixel 140 is provided to the data driving circuit 200 via the data line Dm. In practice, the predetermined current PC is supplied to the data driving circuit 200 through the first power supply ELVDD, the fourth transistor M4, the second transistor M2, and the data line Dm. At this time, a predetermined voltage corresponding to the predetermined current PC is charged in the first capacitor C1 and the second capacitor C2.

[0043] In addition, the data driving circuit 200 resets a voltage of a gamma voltage unit (not shown) using the predetermined voltage (referred to as a compensation voltage hereinafter) generated when the predetermined current PC is sunk, and generates a data signal DS using the reset voltage of the gamma voltage unit. Next, during a second period of one (1) horizontal period, when the data signal DS is provided to the first node N1 via the first transistor M1, a predetermined voltage corresponding to the data signal DS is charged in the first capacitor C1 and the second capacitor C2.

[0044] In practice, when the data signal DS is supplied, a voltage of the first node N1 drops from the voltage of the reference power supply Vref to a voltage of the data signal DS. At this time, since the second node N2 is in a floating state, the voltage value of the second node N2 drops to correspond to a voltage drop amount of the first node N1. In this case, a voltage drop in the second node N2 is determined by capacities (or capacitances) of the first capacitor C1 and the second capacitor C2.

[0045] When a voltage of the second node N2 drops, a predetermined voltage is charged in the first capacitor C1 corresponding to a voltage value of the second node N2. Here, because the reference power supply Vref has a fixed voltage value, a charge voltage of the first capacitor C1 is determined by the data signal DS. In other words, since the charge voltage of the first capacitor C1 is determined by the reference power supply Vref and the data signal DS, a desired voltage may be charged in the pixel 140 shown in FIG. 5 regardless of a voltage drop in the first power supply ELVDD.

[0046] In addition, embodiments of the present invention reset a voltage of a gamma voltage unit and supplies a generated data signal using the rest voltage of the gamma voltage unit while the scan signal is being supplied to a current scan line, so that the mobility of transistors included in the pixel 140 can be compensated for. Therefore, embodiments of the present invention compensate for non-uniformity of a threshold voltage of the transistor and mobility in order to display a uniform image.

[0047] FIG. 6 is a block diagram showing an example of the data driving circuit shown in FIG. 2. In order to help the understanding of the data driving circuit, in FIG. 6, it is assumed that a data driving circuit 200 has j (j is a natural number greater than 2) channels.

[0048] Referring to FIG. 6, the data driving circuit 200 includes a shift register 210, a sampling latch 220, a holding latch 230, a gamma voltage unit 240, a digital-analog converter (referred to as DAC hereinafter) 250, a first buffer unit 270, a second buffer unit 260, a current supply unit 280, and a selector 290.

[0049] The shift register 210 receives a source shift clock SSC and a source start pulse SSP from the timing controller 150. When the shift register 210 receives a source shift clock SSC and a source start pulse SSP, it sequentially generates j sampling signals while shifting the source start pulse SSP every one period of the source shift clock SSC. In order to do this, the shift register 210 includes j shift registers 2101 to 210j.

[0050] The sampling latch 220 sequentially stores data Data in response to the sampling signals sequentially supplied from the shift register section 210. Here, the sampling latch section 220 includes j sampling latches 2201 to 220j for storing j data Data. Furthermore, each of the sampling latches 2201 to 220j has a size corresponding to the bit number of the data Data. For example, when the data Data is formed by k bits, the sampling latches 2201 to 220i are set to have k bit size.

[0051] When a source output enable signal SOE is inputted to the holding latch section 230, the holding latch 230 receives and stores the data Data from the sampling latch section 220. Moreover, when a source output enable signal SOE is inputted to the holding latch 230, the holding latch 230 supplies data Data stored therein to the DAC 250. So as to perform this operation, the holding latch 230 includes j holding latches 2301 to 230j set by k bits. Each of the holding

latches 2301 to 230j has a size corresponding to the bit number of data. For example, each of the holding latches 2301 to 230j is set by k bits so that data may be stored therein.

[0052] The gamma voltage unit 240 includes j voltage generators 2401 to 240j that generate a predetermined data voltage corresponding to data of k bits. As shown in FIG. 8, each of the j voltage generators 2401 to 240j is composed of a plurality of voltage division resistors R1 to R ℓ , and generates 2^k data voltages. Here, each of the j voltage generators 2401 to 240j resets voltage values of data voltages using a compensation voltage supplied from the second buffer unit 260, and provides the reset data voltages to DACs 2501 to 250j.

[0053] The DAC 250 includes j DACs 2501 to 250j for generating a data signal DS in response to a digital value of the data. Each of the j DACs 2501 to 250j selects one of a plurality of data voltages corresponding to a digital value of data supplied from the holding latch 230, and generates the data signal DS.

[0054] The first buffer unit 270 provides the data signal DS supplied from the DAC 250 to the selector 290. In order to perform the function, the first buffer unit 270 includes j buffers 2701 to 270j.

[0055] The selector 290 controls electric connections between the data lines D1 to Dj and the first buffers 2701 to 270j. In practice, the selector 290 electrically connects the first buffers 2701 to 270j to the data lines D1 to Dj during only the second period of one (1) horizontal period, but does not electrically connect the first buffers 2701 to 270j to the data lines D1 to Dj during remaining periods of the one (1) horizontal period. For this purpose, the selector 290 includes j switches 2901 to 290j.

[0056] The current supply unit 280 sinks a predetermined current PC from the pixels 140 coupled with the data lines D1 to Dj during the first period of the one (1) horizontal period. In practice, the current supply unit 280 sinks a maximum current to flow through each pixel 140, namely, an electric current to be supplied to the organic light emitting diode OLED when the pixel 140 emits light of the greatest brightness. Moreover, the current supply unit 280 provides a predetermined compensation voltage generated when the electric current is sunk to the second buffer unit 260. In order to do this, the current supply unit 280 includes j current sink units 2801 to 280j.

[0057] The second buffer unit 260 provides a compensation voltage supplied from the current supply unit 280 to the gamma voltage unit 240. So as to perform the operation, the second buffer unit 260 includes second j buffers 2601 to 260j.

[0058] On the other hand, as shown in FIG. 7, the data driving circuit 200 of a second embodiment of the present invention further includes a level shifter 300 connected to (or installed at a next stage of) the holding latch 230. The level shifter 300 increases a voltage level of data supplied from the holding latch 230, and provides the data having the increased voltage level to the DAC 250. When data having a higher voltage level from an external system is supplied to the data driving circuit 200, a circuit component having high resisting potential according to the voltage level should be installed, thereby causing an increase in a manufacturing cost. Accordingly, in FIG. 7, data having a lower voltage level is supplied to the data driving circuit 200 from an external system. The level shifter 300 boosts the data having a lower voltage level to a higher voltage level such that the circuit component having high resisting potential is not needed.

[0059] FIG. 8 is a view showing an example of a connected relation of a voltage generator, a digital-analog converter, a first buffer, a second buffer, a switching unit, a current sink unit, and a pixel shown in FIG. 6. So as to help the understanding of the voltage generator, the digital-analog converter, the first buffer, the second buffer, the switching unit, the current sink unit, and the pixel, it is assumed that a j-th channel is shown in FIG. 8 and the data line Dj is coupled with the pixel circuit 142 shown in FIG. 3.

[0060] With reference to FIG. 8, the voltage generator 240j includes a plurality of voltage division resistors R1 to R ℓ . The voltage division resistors R1 to R ℓ divide between a voltage of the reference power supply Vref and a compensation voltage supplied from the second buffer unit 260j to generate a plurality of data voltages V0 to V 2^k-1 . The generated data voltages V0 to V 2^k-1 are provided to the DAC 250j.

[0061] The DAC 250j selects and provides one of the data voltages V0 to V 2^k-1 to the first buffer 270j. Here, the data voltage selected by the DAC 250j is used as the data signal DS.

[0062] The first buffer 270j transfers the data signal DS supplied from the DAC 250j to the switch 290j.

[0063] The switch 290j includes an eleventh transistor M11. The eleventh transistor M11 is controlled by a first control signal CS1 shown in FIG. 9. That is, the eleventh transistor M11 is turned-on during the second period of one (1) horizontal period H and turned-off during the first period. Accordingly, the data signal DS is provided to the data line Dj during the second period of one (1) horizontal period H, but is not provided thereto during remaining periods.

[0064] The current sink unit 280j includes a twelfth transistor M12, a thirteenth transistor M13, a current source I_{max}, and a third capacitor C3. The twelfth transistor M12 and the thirteenth transistor M13 are controlled by a second control signal CS2. The current source I_{max} is coupled with a first electrode of the thirteenth transistor M13. The third capacitor C3 is coupled between a third node N3 and a ground voltage source GND.

[0065] A gate electrode of the twelfth transistor M12 is coupled with a gate electrode of the thirteenth transistor M13, and a second electrode thereof is coupled with a second electrode of the thirteenth transistor M13 and the data line Dj. Moreover, a first electrode of the twelfth transistor M12 is coupled with the second buffer 260j. The twelfth transistor M12 is turned-on during the first period of one (1) horizontal period and turned-off during the second period according to the second control signal CS.

[0066] The gate electrode of the thirteenth transistor M13 is coupled with the gate electrode of the twelfth transistor M12, and the second electrode thereof is coupled with the data line Dj. Furthermore, a first electrode of the thirteenth transistor M13 is coupled with the current source I_{max}. The thirteenth transistor M13 is turned-on during the first period of one (1) horizontal period and turned-off during the second period according to the second control signal CS.

[0067] The current source I_{max} receives an electric current from the pixel circuit 142 to be supplied to the organic light emitting diode OLED when the pixel 140 emits light of the greatest brightness during the first period. The first period is a period during which the twelfth transistor M12 and the thirteenth transistor M13 are turned-on.

[0068] When an electric current is sunk from the pixel 140 by the current source I_{max}, a compensation voltage applied to the third node N3 is stored in the third capacitor C3. In practice, the third capacitor C3 charges the compensation voltage applied to the third node N3 during the first period. Although the twelfth transistor M12 and the thirteenth transistor M13 are turned-off, the third capacitor C3 maintains the compensation voltage of the third node N3.

[0069] When the second buffer 260j provides the compensation voltage applied to the third node N3, namely, the voltage charged in the third capacitor C3, the voltage generator 240j divides a voltage between the reference power supply V_{ref} and the compensation voltage from the second buffer 260j. Here, in the pixels 140, the compensation voltages applied to the third node N3 can be set to be identical or different according to mobility of the transistors included in each of the pixels 140. In practice, the compensation voltage supplied to j voltage generators 2401 to 240j is determined by a current coupled pixel 140.

[0070] In addition, if different compensation voltages are supplied to the j voltage generators 2401 to 240j, the data voltages V0 to V_{2^k-1} supplied to DAC 2501 to 250j installed every j channel are differently set. Since each of the data lines D1 to Dj is controlled by the current coupled pixel 140, although the mobility of the transistors included in the pixel 140 may be different, the data voltages V0 to V_{2^k-1} may still display a uniform image in the pixel 140.

[0071] FIG. 9 is a waveform chart showing a method for driving the switching unit, the current sink unit, and the pixel circuit 142 shown in FIG. 8.

[0072] A voltage value of the data signal DS supplied to the pixel 140 will be explained in detail by reference to FIG. 8 and FIG. 9. A scan signal is first provided to the (n-1)-th scan line S_{n-1}. When the scan signal is first provided to the (n-1)-th scan line S_{n-1}, the third transistor M3 and the fifth transistor M5 are turned-on. Accordingly, a voltage value obtained by subtracting a threshold voltage of the fourth transistor M4 from the voltage of the first power supply ELVDD is applied to the second node N2, and a voltage of the reference power supply V_{ref} is applied to the first node N1. A voltage corresponding to a voltage drop of the first power supply ELVDD and the threshold voltage of the fourth transistor M4 are charged in the second capacitor C2.

[0073] In practice, the voltages applied to the first node N1 and the second node N2, respectively may be expressed by following equations 1 and 2.

$$V_{N1} = V_{ref} \quad (1)$$

$$V_{N2} = ELVDD - |V_{thM4}| \quad (2)$$

where, V_{N1} is a voltage applied to the first node N1, V_{N2} is a voltage applied to the second node N2, and V_{thM4} is a threshold voltage of the fourth transistor M4.

[0074] During a period between a first time when the scan signal is not supplied to the (n-1)-th scan line S_{n-1} and a second time when the scan signal is supplied to the n-th scan line, the first node N1 and the second node N2 are set in a floating state. Consequently, the voltage value charged in the second capacitor C2 is unchanged.

[0075] Next, the scan signal is provided to the n-th scan line S_n to turn-on the first transistor M1 and the second transistor M2. During the first period of a supply period of the scan signal to the n-th scan line S_n, the twelfth transistor M12 and the thirteenth transistor M13 are turned-on. When the twelfth transistor M12 and the thirteenth transistor M13 are turned-on, an electric current of the current source I_{max} is sunk via the first power supply ELVDD, the fourth transistor M4, the second transistor M2, the data line Dj, and the thirteenth transistor M13.

[0076] At this time, because the electric current of the current source I_{max} flows through the fourth transistor M4, it may be expressed by a following equation 3.

$$I_{max} = \frac{1}{2} \mu_p C_{ox} \frac{W}{L} (ELVDD - V_{N2} - |V_{thM4}|)^2 \quad (3)$$

where, μ represents a mobility, C_{ox} represents a capacity of an oxide layer, W represents a channel width, and L represents a channel length.

[0077] When the electric current of the equation 3 flows through the fourth transistor M4, a voltage applied to the second node N2 may be expressed by a following equation 4.

$$V_{N2} = ELVDD - \sqrt{\frac{2 I_{max} L}{\mu_p C_{ox} W}} - |V_{thM4}| \quad (4)$$

[0078] In addition, a voltage applied to the first node N1 is expressed by a following equation 5 according to a coupling of the second capacitor C2.

$$V_{N1} = V_{ref} - \sqrt{\frac{2 I_{max} L}{\mu_p C_{ox} W}} = V_{N3} = V_{N4} \quad (5)$$

where, the first voltage V_{N1} applied to the first node N1 is set to be identical with the third voltage V_{N3} applied to the third node N3 and the fourth voltage V_{N4} applied to the fourth node N4. That is, when an electric current is sunk by the current source I_{max} , a voltage expressed by the equation 5 is applied to the fourth node N4.

[0079] On the other hand, voltages applied to the third node N3 and the fourth transistor N4 may be affected by the mobility of transistors included in the pixel 140 in which a current electric current is sunk as indicated in equation 5. Accordingly, when the electric current is sunk by the current source I_{max} , voltages applied to the third node N3 and the fourth transistor N4 may be differently set according to respective pixels 140 (in a case of different mobility).

[0080] Also, when the voltage embodied by the equation 5 is applied to the fourth node N4, a voltage V_{diff} of the voltage generator 240j may be expressed by a following equation 6.

$$V_{diff} = V_{ref} - (V_{ref} - \sqrt{\frac{2 I_{max} L}{\mu_p C_{ox} W}}) \quad (6)$$

[0081] In addition, when an h (h is a natural number less than an f , which is also a natural number) data voltage is selected among f data voltages in the DAC 250j, a voltage V_b supplied to the first buffer 270j may be expressed by a following equation 7.

$$V_b = V_{ref} - \frac{h}{f} \sqrt{\frac{2 I_{max} L}{\mu_p C_{ox} W}} \quad (7)$$

[0082] Also, after the electric current is sunk to charge the voltage of the equation 7 in the third capacitor C3 during the first period, the twelfth transistor M12 and the thirteenth transistor M13 are turned-off during the second period, and the eleventh transistor M11 is turned-on. At this time, the third capacitor C3 maintains a voltage value charged therein. Accordingly, a voltage value of the third node N3 may have a value of the equation 5.

[0083] Moreover, since the eleventh transistor M11 is turned-on, the voltage supplied to the first buffer 270j is provided to the first node N1 via the eleventh transistor M11, the data line Dj, and the first transistor M1. That is, a voltage of the equation 7 is provided to the first node N1. Furthermore, a voltage applied to the second node N2 may be expressed by a following equation 8 by a coupling of the second capacitor C2.

$$V_{N2} = ELVDD - \frac{h}{f} \sqrt{\frac{2I_{max}}{\mu_p C_{OX}} \frac{L}{W}} - |V_{thM4}| \quad (8)$$

[0084] At this time, an electric current flowing through the fourth transistor M4 may be expressed by a following equation 9.

$$\begin{aligned} I_{N4} &= \frac{1}{2} \mu_p C_{OX} \frac{W}{L} (ELVDD - V_{N2} - |V_{thM4}|)^2 \\ &= \frac{1}{2} \mu_p C_{OX} \frac{W}{L} \left(ELVDD - \left(ELVDD - \frac{h}{f} \sqrt{\frac{2I_{max}}{\mu_p C_{OX}} \frac{L}{W}} - |V_{thM4}| \right) - V_{thM4} \right)^2 \\ &= \left(\frac{h}{f} \right)^2 I_{max} \end{aligned} \quad (9)$$

[0085] With reference to the equation 9, an electric current flowing through the fourth transistor is determined by a data voltage generated by the voltage generator 240j in embodiments of the present invention. Namely, according to embodiments of the present invention, the electric current determined by the data voltage flows through the fourth transistor M4 regardless of a threshold voltage of the fourth transistor M4 and the mobility, and accordingly a uniform image may be displayed.

[0086] On the other hand, a construction of the switch 290j according to embodiments of the present invention may be variously designed. For example, as shown in FIG. 10, the switch 290j includes the eleventh transistor M11 and a fourteenth transistor M14 coupled with each other in a transmission gate form. The eleventh transistor M11 is of NMOS type and receives the first control signal CS1, whereas the fourteenth transistor M14 is of PMOS type, and receives the second control signal CS2. Here, since the first control signal CS1 and the second control signal CS2 have polarities opposite to each other, the eleventh transistor M11 and the fourteenth transistor M14 are turned-on and turned-off at the same time, respectively.

[0087] Also, when the eleventh transistor M11 and the fourteenth transistor M14 are coupled with each other in the transmission gate form, a voltage-current characteristic curve has an approximately straight line that allows a switching error to be minimized.

[0088] FIG. 11 is a view showing another example of a connected relation of a voltage generator, a digital-analog converter, a first buffer, a second buffer, a switching section, a current sink section, and a pixel shown in FIG. 6. Except for a pixel circuit 142' coupled with the data line Dj changes, all arrangements of FIG. 11 are substantially identical with those of FIG. 8. Accordingly, a voltage supplied to the pixel circuit 142' will be described further below.

[0089] With reference to FIG. 9 and FIG. 11, when the scan signal is first provided to the (n-1)-th scan line Sn-1, the voltages expressed by the equations 1 and 2 are applied to the first node N1 and the second node N2.

[0090] Next, when the scan signal is provided to the n-th scan line Sn, during the first period when the twelfth transistor M12 and the thirteenth transistor M13 are turned-on, an electric current flowing through the fourth transistor M4 is expressed by the equation 3, and the voltage applied to the second node N2 is expressed by the equation 4. In addition, by a coupling of the second capacitor C2, the voltage applied to the first node N1 may be expressed by a following equation 10.

$$V_{N1} = V_{ref} - \left(\frac{C1+C2}{C2} \right) \sqrt{\frac{2I_{max}}{\mu_p C_{ox}} \frac{L}{W}} = V_{N3} = V_{N4}$$

(10)

[0091] Moreover, because the voltage applied to the first node N1 is provided to the second node N2 and the third node N3, the voltage Vdiff of the voltage generator 240j may be expressed by a following equation 11.

$$V_{diff} = V_{ref} - \left(V_{ref} - \left(\frac{C1+C2}{C2} \right) \sqrt{\frac{2I_{max}}{\mu_p C_{ox}} \frac{L}{W}} \right) \quad (11)$$

[0092] Furthermore, when the h-th data voltage is selected from f data voltages in the DAC 250j, the voltage Vb supplied to the first buffer 270j may be expressed by a following equation 12.

$$Vb = V_{ref} - \frac{h}{f} \left(\frac{C1+C2}{C2} \right) \sqrt{\frac{2I_{max}}{\mu_p C_{ox}} \frac{L}{W}} \quad (12)$$

[0093] The voltage supplied to the first buffer 270j is provided to the first node N1. At this time, the voltage applied to the second node N2 may be expressed by the equation 8. Consequently, an electric current flowing through the fourth transistor M4 may be expressed by the equation 9. That is, according to embodiments of the present invention, the electric current supplied to the organic light emitting diode OLED through the fourth transistor M4 is determined by a data voltage regardless of a threshold voltage of the fourth transistor M4 and the mobility, so that a uniform image can be displayed.

[0094] On the other hand, as shown in FIG. 5, in the pixel circuit 142, although a voltage of the first node N1 greatly changes, a voltage of the second node N2 slowly changes, that is, $C1+C2/C2$. Accordingly, the case where the pixel 140 shown in FIG. 5 is used, the pixel circuit 142 can set a voltage range of the voltage generator 240j wider than that of the case where the pixel circuit 142 shown in FIG. 3 is used. As described above, when the voltage range of the voltage generator 240j is set to have a wide voltage range, an influence of the eleventh transistor M11 and the first transistor M1 due to a switching error can be reduced.

[0095] On the other hand, the description of FIG. 8 and FIG. 11 is an ideal case without considering a load of the data lines Dj. In practice, when a predetermined current PC is sunk, a voltage value applied to the first node N1 and the third node N3 is set differently according to a voltage drop of the data line Dj. That is, when a predetermined current PC is sunk, the voltage value of the third node N3 is set lower than that of the first node N1 according to the voltage drop of the data line Dj, whereby an image of a desired data cannot be displayed.

[0096] In an enhancement of the above described embodiments, a compensation voltage applied to the third node N3 is boosted by a voltage corresponding to a voltage drop of the data line Dj. An arrangement for compensating for a voltage corresponding to a voltage drop of the data line Dj by installing a boosting unit at the data driving circuit 200 is disclosed in patent application entitled "Data Driving Circuit and Driving Method of Light Emitting Display Using the Same" filed in the United States Patent and Trademark Office on the same date as the present application, and the entire content of which is incorporated herein by reference. As such, embodiments of the present invention include an apparatus for supplying a voltage corresponding to a voltage drop of the data line Dj to the boosting unit.

[0097] FIGs. 12 and 13 respectively are views showing an organic light emitting display device according to a second embodiment and a third embodiment of the present invention. In each of FIGs. 12 and 13, elements that are substantially the same as those shown in FIG. 2 are allotted the same reference numerals, and the description of the same elements will be omitted.

[0098] Referring to FIG. 12, the organic light emitting display device according to the second embodiment of the present invention includes an auxiliary line AL, connectors 310, and voltage transfer units 320. The auxiliary line AL is formed parallel to the data lines D1 through Dm. The connectors 310 are formed at respective crossing parts of the auxiliary line AL and the scan lines S1 to Sn. The voltage transfer units 320 are coupled between the connectors 310 and the data driving circuit 120.

[0099] The auxiliary line AL is formed at the display region 130 to have the same (or similar) width and thickness as

those of the data lines D1 to Dm. One side of the auxiliary line AL is coupled with a first reference power supply Vref and another side thereof is coupled with a current source I_{max}. When a pixel 140 emits light of a maximal brightness, the current source I_{max} receives an electric current which is flown into the organic light emitting diode OLED, from the first reference power supply Vref via the auxiliary line AL. On the other hand, the auxiliary line AL is formed at a specific position of the display region 130 parallel to the data lines D1 to Dm. For example, the auxiliary line AL may be formed at a left edge of the display region 130 as shown in FIG. 12 or at a right edge thereof as shown in FIG. 13 (according to the third embodiment).

[0100] When the scan signal is supplied to one of the scan lines S1 to S_n coupled with the connectors 310, the connectors 310 electrically connect the auxiliary line AL to the voltage transfer unit 320. In order to do this, the connectors 310 include at least one transistor that is turned-on when the scan signal is supplied. In practice, each of the connectors 310 includes a thirtieth transistor M31. A first electrode of the thirtieth transistor M31 is coupled with the auxiliary line AL, and a second electrode thereof is coupled with the voltage transfer unit 320.

[0101] When the thirtieth transistor M31 is turned-on, the voltage transfer unit 320 transfers a voltage value from the auxiliary line AL to the data driving circuits 200. In order to perform this function, the voltage transfer unit includes a buffer 321.

[0102] In the operation, when the scan signal is first supplied to a first scan line S1, the thirtieth transistor M31 coupled with the first scan line S1 is turned-on. When the thirtieth transistor M31 is turned-on, a voltage of the first reference power supply Vref dropped by the auxiliary line AL is provided to the buffer 321. Here, a voltage of a second reference power supply Vref2 is determined by subtracting a voltage corresponding to a voltage drop generated in the auxiliary line AL from the voltage of the first reference power supply Vref. The buffer 321 transfers the voltage of the second power supply Vref supplied from the thirtieth transistor M31 to the data driving circuits 200.

[0103] Also, during a first period of a supply period of the scan signal to the first scan line S1, a predetermined current from respective pixels 140 is supplied to the data driving circuit 200. This causes compensation voltages corresponding to respective pixels 140 to be applied to the data driving circuit 200. Upon receiving the compensation voltages and the voltage of the second reference power supply Vref2, the data driving circuit 200 boosts compensation voltages using the voltage of the second reference power supply Vref2. In practice, the data driving circuit 200 boosts the compensation voltages by a difference between the voltage of the first reference power supply Vref and the voltage of the second reference power supply Vref2. When the compensation voltages are boosted by a difference between the voltage of the first reference power supply Vref and the voltage of the second reference power supply Vref2, the voltages dropped by the loads of the data lines D1 to Dm may be compensated. In other words, since the difference between the voltage of the reference power supply Vref and the second reference power supply Vref2 is set to be similar to a voltage drop of the data lines D1 to Dm, the voltage drop of the data lines D1 to Dm may be compensated for by boosting the compensation voltages, thereby allowing an image of desired data to be displayed in the pixels 140.

[0104] Next, every time the scan signal is sequentially provided to the second scan line S2 through the n-th scan line S_n, the voltage of the second reference compensation voltages may be stably compensated for corresponding to the voltage drop of the data lines D1 to Dm. In other words, since the connectors 310 coupled with respective scan lines S1 to S_n are coupled with the auxiliary line AL by different lengths, the voltage of the second power supply Vref2 generated corresponding to the voltage drop of the auxiliary line AL is generated to have different values every time the scan signal is supplied to the scan lines S1 to S_n. As a result, every time the scan signal is supplied to respective scan lines S1 to S_n, the compensation voltages generated in selected pixels are stably compensated.

[0105] FIG. 14 is a view showing an organic light emitting display device according to a fourth embodiment of the present invention. In FIG. 14, elements that are substantially the same as those shown in FIG. 2 are allotted the same reference numerals, and the description of the same elements will be omitted.

[0106] With reference to FIG. 14, the organic light emitting display device according to the fourth embodiment of the present invention includes a voltage generator 330 and a subtracter 332.

[0107] The voltage generator 330 receives a vertical sync signal Vsync and a horizontal sync signal Hsync. Every time the horizontal sync signal is inputted to the voltage generator 332, the voltage generator 330 generates and provides a voltage increasing in a stepped form to the subtracter 332. Upon receiving the vertical sync signal Vsync, the voltage generator 330 is initialized.

[0108] An operation of the voltage generator 330 having the construction mentioned above will be illustrated by reference to FIG. 15 in more detail. First, every time the vertical sync signal Vsync is inputted to the voltage generator 330, it is initialized as a predetermined voltage. Next, every time the horizontal sync signal is inputted to the voltage generator 332, the voltage generator 330 generates and provides a voltage increasing by a predetermined level to the subtracter 332. Here, the voltage generated by the voltage generator 330 is set to be identical with a voltage dropped according to a load of the data lines D1 to Dm.

[0109] In practice, the voltage increasing every time the horizontal sync signal Hsync is inputted to the voltage generator 330 is experimentally determined to be identical with or similar to a voltage dropped by the load of the data lines D1 to Dm, namely, a voltage drop of the compensation voltage. In other words, the voltage value increasing in the voltage

generator 330 is set to be identical with or similar to a voltage drop of the compensation voltage generated when the scan signal is sequentially provided to the first scan line S1 to the n-th scan line Sn.

[0110] The subtracter 332 receives a voltage from a first reference power supply Vref and a voltage from the voltage generator 330. Upon receiving the voltage from the first reference power supply Vref and a voltage from the voltage generator 330, the subtracter 332 obtains a voltage of a second reference power supply Vref2 by subtracting the voltage from the voltage generator 330 from the voltage of the first reference power supply Vref, and provides the voltage of the second power supply Vref2 to the data driving circuits 200. Accordingly, the data driving circuit 200 boosts compensation voltages by a difference between the voltage of the first reference power supply Vref and the voltage of the second power supply Vref2. On the other hand, in embodiments of the present invention, the voltage generated by the voltage generator 330 can be directly provided to the data driving circuit 200. In this case, the driving circuit 200 boosts the compensation voltages by the voltage supplied from the voltage generator 330.

[0111] As mentioned above, in accordance with an organic light emitting display device of embodiments of the present invention using compensation voltages generated when an electric current is sunk from a pixel, since voltage values of a plurality of data voltages generated by a voltage generator are reset, and at least one of the reset data voltages is supplied to the pixel in which the electric current is sunk, a uniform image may be displayed regardless of a mobility of a transistor. Furthermore, in embodiments of the present invention, when a voltage drop (or a drop-voltage) of the compensation voltage generated by a data line is generated, the compensation voltage is boosted by the amount of the voltage drop (or the drop-voltage), thereby allowing an image of desired brightness to be displayed in pixels.

[0112] While the invention has been described in connection with certain exemplary embodiments, it is to be understood by those skilled in the art that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications included within the scope of the appended claims and equivalents thereof.

Claims

1. An organic light emitting display device comprising:

a scan driver (110) for driving a scan line and a light emitting control line, the scan line and the light emitting control line being formed parallel to each other, the scan driver being adapted to provide a scan signal and a light emitting control signal to the scan line and the light emitting control line, respectively;

a data driver (120) for driving a data line formed at a direction intersecting the scan line and the light emitting control line;

a pixel (140) disposed to be coupled with the scan line, the light emitting control line, and the data line;

wherein the data driver is arranged to be coupled with the data line during a first period of one horizontal period for receiving a predetermined current from the pixel (140) selected according to the scan signal, and for resetting a voltage value of a data signal using a compensation voltage generated when the predetermined current is received, and for providing the reset voltage value of the data signal to the pixel (140) during a second period of the one horizontal period, the second period being a period other than the first period;

an auxiliary line (AL) formed parallel to the data line, one side of the auxiliary line (AL) being coupled with a reference power supply (Vref) and another side of the auxiliary line (AL) being coupled with a current source (Imax);

a connector (310) disposed at a crossing area of the auxiliary line (AL) and the scan line, a first electrode of the connector (310) being coupled to the auxiliary line (AL) and a second electrode of the connector (310) being coupled to the scan line, the connector (310) for electrically connecting the auxiliary line (AL) to a third electrode of the connector (310) when a scan signal is supplied to the scan line; and

a voltage transfer unit (320) coupled with the third electrode of the connector (310) for transferring a voltage supplied from the connector (310) to the data driver (120), wherein the voltage value supplied from the voltage transfer unit (320) to the data driver (120) is set to a value obtained by subtracting a voltage value of a voltage drop of the auxiliary line (AL) from a voltage value of the reference power supply (Vref).

2. An organic light emitting display device according to claim 1, wherein the current source (Imax) is arranged to receive substantially the same current as the predetermined current from the reference power supply (Vref) via the auxiliary line (AL).

3. An organic light emitting display device according to claim 1, wherein a current value of the predetermined current is set to be substantially identical with a current value of an electric current flowing through an organic light emitting diode when the pixel (140) emits light of a maximum brightness.

4. An organic light emitting display device according to claim 1, wherein the connector (310) includes at least one transistor (M31), and wherein the at least one transistor (M31) is arranged to be turned-on when the scan signal is provided to the scan line to electrically connect the voltage transfer unit (320) to the auxiliary line (AL).

5. An organic light emitting display device according to claim 1, wherein the voltage transfer unit (320) includes at least one buffer (321).

6. An organic light emitting display device according to claim 1, wherein the data driver (120) is adapted to boost the compensation voltage by a difference between a voltage supplied from the voltage transfer unit (320) and a voltage of the reference power supply (Vref).

7. An organic light emitting display device according to claim 1, wherein the auxiliary line (AL) is formed at one side of the data line.

8. An organic light emitting display device according to claim 1, wherein the scan line comprises a previous scan line and a present scan line, and wherein the pixel (140) comprises:

a first power supply (EVLDD);

an organic light emitting diode for receiving an electric current from the first power supply (EVLDD);

a first transistor (M1) and a second transistor (M2), the first transistor (M1) and the second transistor (M2) being coupled with the data line and being arranged to be turned-on when the scan signal is supplied to the present scan line;

a third transistor (M3) coupled between a second electrode of the first transistor (M1) and the reference power supply (Vref), the third transistor (M3) being arranged to be turned-on when the scan signal is supplied to the previous scan line;

a fourth transistor (M4) for controlling an amount of an electric current supplied to the organic light emitting diode; and

a fifth transistor (M5) coupled between a gate electrode and a second electrode of the fourth transistor (M4), the fifth transistor (M5) being turned-on to diode-connect the fourth transistor (M4) when the scan signal is supplied to the previous scan line.

9. An organic light emitting display device according to claim 8, wherein the pixel (140) further comprises:

a first capacitor (C1) coupled with a second electrode of the first transistor (M1) and the first power supply (EVLDD); and

a second capacitor (C2) coupled with the second electrode of the first transistor (M1) and a gate electrode of the fourth transistor (M4).

10. An organic light emitting display device according to claim 8, wherein the pixel (140) further comprises:

a first capacitor (C1) coupled with a gate electrode of the fourth transistor (M4) and the first power supply (EVLDD); and

a second capacitor (C2) coupled with a second electrode of the first transistor (M1) and a gate electrode of the fourth transistor (M4).

11. An organic light emitting display device according to claim 8, further comprising a sixth transistor (M6) coupled between a second electrode of the fourth transistor (M4) and the organic light emitting diode, the sixth transistor (M6) being arranged to be turned-off when the light emitting control signal is supplied and being turned-on during substantially all other remaining periods.

12. An organic light emitting display device, comprising:

a display region (130) including a pixel (140) coupled with a scan line, a light emitting control line, and a data line; a scan driver (110) for providing a scan signal and a light emitting control signal to the scan line and the light emitting control line, respectively;

a data driver (120) coupled with the data line during a first period of one horizontal period for receiving a predetermined current from the pixel (140) selected according to the scan signal, the data driver (120) being for resetting a voltage value of a data signal using a compensation voltage generated when the predetermined

current is received and for providing the voltage value of the data signal to the pixel (140) during a second period of the one horizontal period, the second period being a period other than the first period; and a voltage generator (330) for generating and providing a voltage in each of a plurality of horizontal periods when the scan signal is supplied to the data driver, the horizontal periods comprising a first horizontal period and a second horizontal period following the first horizontal period, wherein the voltage provided by the voltage generator (330) in the second horizontal period is increased to a sum of the voltage provided by the voltage generator (330) in the first horizontal period and a predetermined voltage.

13. An organic light emitting display device according to claim 12, wherein the voltage generator (330) is adapted to provide the voltage increased by the predetermined voltage every time an external horizontal sync signal is supplied to the data driver (120), and is adapted to be initialized when an external vertical sync signal is supplied.

14. An organic light emitting display device according to claim 12, wherein a voltage generated by the voltage generator (330) is set to be substantially identical with a voltage drop of the compensation voltage generated by the data lines.

15. An organic light emitting display device according to claim 14, wherein the data driver (120) is adapted to boost a voltage value of the compensation voltage by a voltage value generated by the voltage generator (330).

16. An organic light emitting display device according to claim 14, further comprising a subtractor (332) coupled between the voltage generator (330) and the data driver (120), the subtractor (332) being for subtracting a voltage value supplied from the voltage generator (330) from a voltage value of a first reference power supply (Vref) supplied from an exterior to obtain a voltage value of a second reference power supply (Vref), and for providing the voltage value of the second reference power supply to the data driver (120).

17. An organic light emitting display device according to claim 16, wherein the data driver (120) is adapted to boost a voltage value of the compensation voltage by a difference between the voltage value of the first reference power supply (Vref) and the voltage value of the second reference power supply (Vref).

18. An organic light emitting display device according to claim 17, wherein the scan line comprises a previous scan line and a present scan line, and wherein the pixel (140) includes:

a first power supply (EVLDD);

an organic light emitting diode for receiving an electric current from the first power supply (EVLDD);

a first transistor (M1) and a second transistor (M2), the first transistor (M1) and the second transistor (M2) being coupled with the data line and being arranged to be turned-on when the scan signal is supplied to the present scan line;

a third transistor (M3) coupled between a second electrode of the first transistor (M1) and the reference power supply (Vref), the third transistor (M3) being arranged to be turned-on when the scan signal is supplied to the previous scan line;

a fourth transistor (M4) for controlling an amount of an electric current supplied to the organic light emitting diode; and

a fifth transistor (M5) coupled between a gate electrode and a second electrode of the fourth transistor (M4), the fifth transistor (M5) being arranged to be turned-on to diode-connect the fourth transistor (M4) when the scan signal is supplied to the previous scan line.

19. An organic light emitting display device according to claim 18, wherein the pixel (140) further comprises:

a first capacitor (C1) coupled with a second electrode of the first transistor (M1) and the first power supply (EVLDD); and

a second capacitor (C2) coupled with the second electrode of the first transistor (M1) and a gate electrode of the fourth transistor (M4).

20. An organic light emitting display device according to claim 18, wherein the pixel (140) further comprises:

a first capacitor (C1) coupled with a gate electrode of the fourth transistor (M4) and the first power supply (EVLDD); and

a second capacitor (C2) coupled with a second electrode of the first transistor (M1) and a gate electrode of the

fourth transistor (M4).

21. An organic light emitting display device according to claim 18, further comprising a sixth transistor (M6) coupled between a second electrode of the fourth transistor (M4) and the organic light emitting diode, the sixth transistor (M6) being arranged to be turned-off when the light emitting control signal is supplied and being arranged to be turned-on during substantially all other remaining periods.

Patentansprüche

1. Organische lichtemittierende Anzeigevorrichtung, umfassend:

einen Abtasttreiber (110) zum Ansteuern einer Abtastleitung und einer Lichtemissions-Steuerleitung, wobei die Abtastleitung und die Lichtemissions-Steuerleitung parallel zueinander ausgebildet sind, wobei der Abtasttreiber dafür ausgelegt ist, ein Abtastsignal und ein Lichtemissions-Steuersignal für die Abtastleitung bzw. für die Lichtemissions-Steuerleitung bereitzustellen;

einen Datentreiber (120) zum Ansteuern einer Datenleitung, die in einer Richtung ausgebildet ist, welche die Abtastleitung und die Lichtemissions-Steuerleitung schneidet;

ein Pixel (140), das angeordnet ist, um mit der Abtastleitung, der Lichtemissions-Steuerleitung und der Datenleitung gekoppelt zu werden;

wobei der Datentreiber eingerichtet ist, um während einer ersten Periode einer horizontalen Periode mit der Datenleitung gekoppelt zu werden, um einen vorbestimmten Strom von dem gemäß dem Abtastsignal ausgewählten Pixel (140) zu empfangen, und um unter Verwendung einer Kompensationsspannung, die erzeugt wird, wenn der vorbestimmte Strom empfangen wird, einen Spannungswert eines Datensignals zurückzusetzen, und um den Rücksetzspannungswert des Datensignals während einer zweiten Periode der einen horizontalen Periode dem Pixel (140) bereitzustellen, wobei die zweite Periode eine andere Periode als die erste Periode ist; eine Hilfsleitung (AL), die parallel zur Datenleitung ausgebildet ist, wobei eine Seite der Hilfsleitung (AL) mit einer Referenzspannungsversorgung (Vref) gekoppelt ist und eine andere Seite der Hilfsleitung (AL) mit einer Stromquelle (Imax) gekoppelt ist;

einen Verbinder (310), der an einem Kreuzungsbereich der Hilfsleitung (AL) und der Abtastleitung angeordnet ist, wobei eine erste Elektrode des Verbinders (310) mit der Hilfsleitung (AL) gekoppelt ist und eine zweite Elektrode des Verbinders (310) mit der Abtastleitung gekoppelt ist, wobei der Verbinder (310) die Abtastleitung (AL) elektrisch mit einer dritten Elektrode des Verbinders (310) verbindet, wenn der Abtastleitung ein Abtastsignal zugeführt wird; und

eine Spannungsübertragungseinheit (320), die mit der dritten Elektrode des Verbinders (310) gekoppelt ist, um eine von dem Verbinder (310) gelieferte Spannung an den Datentreiber (120) zu übertragen, wobei der von der Spannungsübertragungseinheit (320) an den Datentreiber (120) gelieferte Spannungswert auf einen Wert eingestellt wird, der durch Subtrahieren eines Spannungswerts eines Spannungsabfalls der Hilfsleitung (AL) von einem Spannungswert der Referenzspannungsversorgung (Vref) erhalten wird.

2. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei die Stromquelle (Imax) eingerichtet ist, um im Wesentlichen den gleichen Strom wie den vorbestimmten Strom von der Referenzspannungsversorgung (Vref) über die Hilfsleitung (AL) zu empfangen.

3. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei ein Stromwert des vorbestimmten Stroms so eingestellt ist, dass er im Wesentlichen identisch mit einem Stromwert eines durch eine organische Leuchtdiode fließenden elektrischen Stroms ist, wenn das Pixel (140) Licht einer maximalen Helligkeit emittiert.

4. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei der Verbinder (310) mindestens einen Transistor (M31) einschließt, und wobei der mindestens eine Transistor (M31) eingerichtet ist, um eingeschaltet zu werden, wenn das Abtastsignal der Abtastleitung bereitgestellt wird, um die Spannungsübertragungseinheit (320) elektrisch mit der Hilfsleitung (AL) zu verbinden.

5. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei die Spannungsübertragungseinheit (320) mindestens einen Puffer (321) einschließt.

6. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei der Datentreiber (120) dafür ausgelegt ist, die Kompensationsspannung durch eine Differenz zwischen einer von der Spannungsübertragungseinheit (320)

gelieferten Spannung und einer Spannung der Referenzspannungsversorgung (V_{ref}) zu verstärken.

7. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei die Hilfsleitung (AL) auf einer Seite der Datenleitung ausgebildet ist.

8. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 1, wobei die Abtastleitung eine vorhergehende Abtastleitung und eine aktuelle Abtastleitung umfasst, und wobei das Pixel (140) umfasst:

eine erste Stromversorgung (EVLDD);

eine organische Leuchtdiode zum Empfangen eines elektrischen Stroms von der ersten Stromversorgung (EVLDD);

einen ersten Transistor (M1) und einen zweiten Transistor (M2), wobei der erste Transistor (M1) und der zweite Transistor (M2) mit der Datenleitung gekoppelt sind und eingerichtet sind, um eingeschaltet zu werden, wenn das Abtastsignal der aktuellen Abtastleitung zugeführt wird;

einen dritten Transistor (M3), der zwischen eine zweite Elektrode des ersten Transistors (M1) und die Referenzspannungsversorgung (V_{ref}) geschaltet ist, wobei der dritte Transistor (M3) eingerichtet ist, um eingeschaltet zu werden, wenn das Abtastsignal der vorhergehenden Abtastleitung zugeführt wird;

einen vierten Transistor (M4) zum Steuern einer Menge eines elektrischen Stroms, die der organischen Leuchtdiode zugeführt wird; und

einen fünften Transistor (M5), der zwischen eine Gate-Elektrode und eine zweite Elektrode des vierten Transistors (M4) geschaltet ist, wobei der fünfte Transistor (M5) eingeschaltet wird, um den vierten Transistor (M4) als Diode zu verbinden, wenn das Abtastsignal der vorhergehenden Abtastleitung zugeführt wird.

9. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 8, wobei das Pixel (140) ferner umfasst:

einen ersten Kondensator (C1), der mit einer zweiten Elektrode des ersten Transistors (M1) und der ersten Stromversorgung (EVLDD) gekoppelt ist; und

einen zweiten Kondensator (C2), der mit der zweiten Elektrode des ersten Transistors (M1) und einer Gate-Elektrode des vierten Transistors (M4) gekoppelt ist.

10. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 8, wobei das Pixel (140) ferner umfasst:

einen ersten Kondensator (C1), der mit einer Gate-Elektrode des vierten Transistors (M4) und der ersten Stromversorgung (EVLDD) gekoppelt ist; und

einen zweiten Kondensator (C2), der mit einer zweiten Elektrode des ersten Transistors (M1) und einer Gate-Elektrode des vierten Transistors (M4) gekoppelt ist.

11. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 8, ferner umfassend einen sechsten Transistor (M6), der zwischen eine zweite Elektrode des vierten Transistors (M4) und die organische Leuchtdiode geschaltet ist, wobei der sechste Transistor (M6) eingerichtet ist, um ausgeschaltet zu werden, wenn das Lichtemissions-Steuersignal zugeführt wird, und während im Wesentlichen aller anderen verbleibenden Perioden eingeschaltet zu werden.

12. Organische lichtemittierende Anzeigevorrichtung, umfassend:

einen Anzeigebereich (130) mit einem Pixel (140), das mit einer Abtastleitung, einer Lichtemissions-Steuerleitung und einer Datenleitung gekoppelt ist;

einen Abtasttreiber (110) zum Bereitstellen eines Abtastsignals und eines Lichtemissions-Steuersignals für die Abtastleitung bzw. die Lichtemissions-Steuerleitung;

einen Datentreiber (120), der während einer ersten Periode einer horizontalen Periode mit der Datenleitung gekoppelt ist, um einen vorbestimmten Strom von dem gemäß dem Abtastsignal ausgewählten Pixel (140) zu empfangen, wobei der Datentreiber (120) dazu dient, unter Verwendung einer Kompensationsspannung, die erzeugt wird, wenn der vorbestimmte Strom empfangen wird, einen Spannungswert des Datensignals zurückzusetzen, und um den Spannungswert des Datensignals während einer zweiten Periode der einen horizontalen Periode dem Pixel (140) bereitzustellen, wobei die zweite Periode eine andere Periode als die erste Periode ist; und

einen Spannungsgenerator (330) zum Erzeugen und Bereitstellen einer Spannung in jeder von einer Vielzahl von horizontalen Perioden, wenn das Abtastsignal dem Datentreiber zugeführt wird, wobei die horizontalen

Perioden eine erste horizontale Periode und eine zweite horizontale Periode, die der ersten horizontalen Periode folgt, umfassen,

wobei die Spannung, die durch den Spannungsgenerator (330) in der zweiten horizontalen Periode bereitgestellt wird, auf eine Summe der Spannung, die durch den Spannungsgenerator (330) in der ersten horizontalen Periode bereitgestellt wird, und einer vorbestimmten Spannung erhöht wird.

13. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 12, wobei der Spannungsgenerator (330) dafür ausgelegt ist, die um die vorbestimmte Spannung erhöhte Spannung jedes Mal bereitzustellen, wenn dem Datentreiber (120) ein externes horizontales Synchronisationssignal zugeführt wird, und dafür ausgelegt ist, initialisiert zu werden, wenn ein externes vertikales Synchronisationssignal zugeführt wird.

14. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 12, wobei eine durch den Spannungsgenerator (330) erzeugte Spannung so eingestellt ist, dass sie im Wesentlichen identisch mit einem Spannungsabfall der Kompensationsspannung ist, die durch die Datenleitungen erzeugt wird.

15. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 14, wobei der Datentreiber (120) dafür ausgelegt ist, einen Spannungswert der Kompensationsspannung durch einen Spannungswert zu verstärken, der durch den Spannungsgenerator (330) erzeugt wird.

16. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 14, ferner umfassend einen Subtrahierer (332), der zwischen den Spannungsgenerator (330) und den Datentreiber (120) geschaltet ist, wobei der Subtrahierer (332) dazu dient, einen von dem Spannungsgenerator (330) zugeführten Spannungswert von einem Spannungswert einer ersten Referenzspannungsversorgung (V_{ref}), die von außen zugeführt wird, zu subtrahieren, um einen Spannungswert einer zweiten Referenzspannungsversorgung (V_{ref}) zu erhalten, und um den Spannungswert der zweiten Referenzspannungsversorgung dem Datentreiber (120) bereitzustellen.

17. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 16, wobei der Datentreiber (120) dafür ausgelegt ist, einen Spannungswert der Kompensationsspannung durch eine Differenz zwischen dem Spannungswert der ersten Referenzspannungsversorgung (V_{ref}) und dem Spannungswert der zweiten Referenzspannungsversorgung (V_{ref}) zu verstärken.

18. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 17, wobei die Abtastleitung eine vorhergehende Abtastleitung und eine aktuelle Abtastleitung umfasst, und wobei das Pixel (140) einschließt:

eine erste Stromversorgung (EVLDD);

eine organische Leuchtdiode zum Empfangen eines elektrischen Stroms von der ersten Stromversorgung (EVLDD);

einen ersten Transistor (M1) und einen zweiten Transistor (M2), wobei der erste Transistor (M1) und der zweite Transistor (M2) mit der Datenleitung gekoppelt sind und eingerichtet sind, um eingeschaltet zu werden, wenn das Abtastsignal der aktuellen Abtastleitung zugeführt wird;

einen dritten Transistor (M3), der zwischen eine zweite Elektrode des ersten Transistors (M1) und die Referenzspannungsversorgung (V_{ref}) geschaltet ist, wobei der dritte Transistor (M3) eingerichtet ist, um eingeschaltet zu werden, wenn das Abtastsignal der vorhergehenden Abtastleitung zugeführt wird;

einen vierten Transistor (M4) zum Steuern einer Menge eines elektrischen Stroms, die der organischen Leuchtdiode zugeführt wird; und

einen fünften Transistor (M5), der zwischen eine Gate-Elektrode und eine zweite Elektrode des vierten Transistors (M4) geschaltet ist, wobei der fünfte Transistor (M5) eingerichtet ist, um eingeschaltet zu werden, um den vierten Transistor (M4) als Diode zu verbinden, wenn das Abtastsignal der vorhergehenden Abtastleitung zugeführt wird.

19. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 18, wobei das Pixel (140) ferner umfasst:

einen ersten Kondensator (C1), der mit einer zweiten Elektrode des ersten Transistors (M1) und der ersten Stromversorgung (EVLDD) gekoppelt ist; und

einen zweiten Kondensator (C2), der mit der zweiten Elektrode des ersten Transistors (M1) und einer Gate-Elektrode des vierten Transistors (M4) gekoppelt ist.

20. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 18, wobei das Pixel (140) ferner umfasst:

einen ersten Kondensator (C1), der mit einer Gate-Elektrode des vierten Transistors (M4) und der ersten Stromversorgung (EVLDD) gekoppelt ist; und
einen zweiten Kondensator (C2), der mit einer zweiten Elektrode des ersten Transistors (M1) und einer Gate-Elektrode des vierten Transistors (M4) gekoppelt ist.

21. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 18, ferner umfassend einen sechsten Transistor (M6), der zwischen eine zweite Elektrode des vierten Transistors (M4) und die organische Leuchtdiode geschaltet ist, wobei der sechste Transistor (M6) eingerichtet ist, um ausgeschaltet zu werden, wenn das Lichtemissions-Steuersignal zugeführt wird, und eingerichtet ist, um während im Wesentlichen aller anderen verbleibenden Perioden eingeschaltet zu werden.

Revendications

1. Dispositif d'affichage électroluminescent organique comprenant :

un pilote de balayage (110) destiné à piloter une ligne de balayage et une ligne de commande d'émission de lumière, la ligne de balayage et la ligne de commande d'émission de lumière étant formées parallèlement l'une à l'autre, le pilote de balayage étant apte à fournir un signal de balayage et un signal de commande d'émission de lumière pour la ligne de balayage et la ligne de commande d'émission de lumière, respectivement ;
un pilote de données (120) destiné à piloter une ligne de données formée dans une direction coupant la ligne de balayage et la ligne de commande d'émission de lumière ;
un pixel (140) disposé de manière à être couplé à la ligne de balayage, à la ligne de commande d'émission de lumière et à la ligne de données ;
dans lequel le pilote de données est agencé de manière à être couplé à la ligne de données au cours d'une première période d'une période horizontale pour recevoir un courant prédéterminé en provenance du pixel (140) sélectionné selon le signal de balayage, et pour réinitialiser une valeur de tension d'un signal de données en utilisant une tension de compensation générée lorsque le courant prédéterminé est reçu, et pour fournir la valeur de tension réinitialisée du signal de données au pixel (140) au cours d'une seconde période de ladite première période horizontale, la seconde période étant une période distincte de la première période ;
une ligne auxiliaire (AL) formée parallèlement à la ligne de données, un côté de la ligne auxiliaire (AL) étant couplé à une alimentation électrique de référence (V_{ref}) et un autre côté de la ligne auxiliaire (AL) étant couplé à une source de courant (I_{max}) ;
un connecteur (310) disposé au niveau d'une zone de croisement de la ligne auxiliaire (AL) et de la ligne de balayage, une première électrode du connecteur (310) étant couplée à la ligne auxiliaire (AL) et une deuxième électrode du connecteur (310) étant couplée à la ligne de balayage, le connecteur (310) étant destiné à connecter électriquement la ligne auxiliaire (AL) à une troisième électrode du connecteur (310) lorsqu'un signal de balayage est fourni à la ligne de balayage ; et
une unité de transfert de tension (320) couplée à la troisième électrode du connecteur (310) pour transférer une tension fournie du connecteur (310) au pilote de données (120), dans lequel la valeur de tension fournie de l'unité de transfert de tension (320) au pilote de données (120) est définie sur une valeur obtenue en soustrayant une valeur de tension d'une chute de tension de la ligne auxiliaire (AL) d'une valeur de tension de l'alimentation électrique de référence (V_{ref}).

2. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la source de courant (I_{max}) est agencée de manière à recevoir sensiblement le même courant que le courant prédéterminé provenant de l'alimentation électrique de référence (V_{ref}) par l'intermédiaire de la ligne auxiliaire (AL).
3. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel une valeur de courant du courant prédéterminé est définie de manière à être sensiblement identique à une valeur de courant d'un courant électrique circulant à travers une diode électroluminescente organique lorsque le pixel (140) émet une lumière d'une intensité maximale.
4. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel le connecteur (310) inclut au moins un transistor (M31), et dans lequel ledit au moins un transistor (M31) est agencé de manière à être mis sous tension lorsque le signal de balayage est fourni à la ligne de balayage pour connecter électriquement l'unité de transfert de tension (320) à la ligne auxiliaire (AL).

5. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel l'unité de transfert de tension (320) comprend au moins un tampon (321).

6. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel le pilote de données (120) est apte à amplifier la tension de compensation d'une différence entre une tension fournie à partir de l'unité de transfert de tension (320) et une tension de l'alimentation électrique de référence (Vref).

7. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la ligne auxiliaire (AL) est formée sur un côté de la ligne de données.

8. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la ligne de balayage comprend une ligne de balayage précédente et une ligne de balayage actuelle, et dans lequel le pixel (140) comprend :

une première alimentation électrique (EVLDD) ;

une diode électroluminescente organique destinée à recevoir un courant électrique en provenance de la première alimentation électrique (EVLDD) ;

un premier transistor (M1) et un deuxième transistor (M2), le premier transistor (M1) et le deuxième transistor (M2) étant couplés à la ligne de données et étant agencés de manière à être mis sous tension lorsque le signal de balayage est fourni à la ligne de balayage actuelle ;

un troisième transistor (M3) couplé entre une deuxième électrode du premier transistor (M1) et l'alimentation électrique de référence (Vref), le troisième transistor (M3) étant agencé de manière à être mis sous tension lorsque le signal de balayage est fourni à la ligne de balayage précédente ;

un quatrième transistor (M4) destiné à commander une quantité d'un courant électrique fourni à la diode électroluminescente organique ; et

un cinquième transistor (M5) couplé entre une électrode grille et une deuxième électrode du quatrième transistor (M4), le cinquième transistor (M5) étant mis sous tension pour connecter par diode le quatrième transistor (M4) lorsque le signal de balayage est fourni à la ligne de balayage précédente.

9. Dispositif d'affichage électroluminescent organique selon la revendication 8, dans lequel le pixel (140) comprend en outre :

un premier condensateur (C1) couplé à une deuxième électrode du premier transistor (M1) et à la première alimentation électrique (EVLDD) ; et

un second condensateur (C2) couplé à la deuxième électrode du premier transistor (M1) et à une électrode grille du quatrième transistor (M4).

10. Dispositif d'affichage électroluminescent organique selon la revendication 8, dans lequel le pixel (140) comprend en outre :

un premier condensateur (C1) couplé à une électrode grille du quatrième transistor (M4) et à la première alimentation électrique (EVLDD) ; et

un second condensateur (C2) couplé à une deuxième électrode du premier transistor (M1) et à une électrode grille du quatrième transistor (M4).

11. Dispositif d'affichage électroluminescent organique selon la revendication 8, comprenant en outre un sixième transistor (M6) couplé entre une deuxième électrode du quatrième transistor (M4) et la diode électroluminescente organique, le sixième transistor (M6) étant agencé de manière à être mis hors tension lorsque le signal de commande d'émission de lumière est fourni, et étant mis sous tension pendant sensiblement toutes les autres périodes restantes.

12. Dispositif d'affichage électroluminescent organique, comprenant :

une région d'affichage (130) comprenant un pixel (140) couplé à une ligne de balayage, à une ligne de commande d'émission de lumière et à une ligne de données ;

un pilote de balayage (110) destiné à fournir un signal de balayage et un signal de commande d'émission de lumière à la ligne de balayage et à la ligne de commande d'émission de lumière, respectivement ;

un pilote de données (120) couplé à la ligne de données au cours d'une première période d'une période horizontale pour recevoir un courant prédéterminé en provenance du pixel (140) sélectionné selon le signal de balayage, le pilote de données (120) étant destiné à réinitialiser une valeur de tension d'un signal de données

en utilisant une tension de compensation générée lorsque le courant prédéterminé est reçu et à fournir la valeur de tension du signal de données au pixel (140) au cours d'une seconde période de ladite une période horizontale, la seconde période étant une période distincte de la première période ; et

un générateur de tension (330) destiné à générer et à fournir une tension dans chacune d'une pluralité de périodes horizontales lorsque le signal de balayage est fourni au pilote de données, les périodes horizontales comprenant une première période horizontale et une seconde période horizontale suivant la première période horizontale ;

dans lequel la tension fournie par le générateur de tension (330) dans la seconde période horizontale est augmentée jusqu'à une somme de la tension fournie par le générateur de tension (330) dans la première période horizontale et d'une tension prédéterminée.

13. Dispositif d'affichage électroluminescent organique selon la revendication 12, dans lequel le générateur de tension (330) est apte à fournir la tension augmentée de la tension prédéterminée à chaque fois qu'un signal de synchronisation horizontale externe est fourni au pilote de données (120), et est apte à être initialisé lorsqu'un signal de synchronisation verticale externe est fourni.

14. Dispositif d'affichage électroluminescent organique selon la revendication 12, dans lequel une tension générée par le générateur de tension (330) est définie de manière à être sensiblement identique à une chute de tension de la tension de compensation générée par les lignes de données.

15. Dispositif d'affichage électroluminescent organique selon la revendication 14, dans lequel le pilote de données (120) est apte à amplifier une valeur de tension de la tension de compensation d'une valeur de tension générée par le générateur de tension (330).

16. Dispositif d'affichage électroluminescent organique selon la revendication 14, comprenant en outre un soustracteur (332) couplé entre le générateur de tension (330) et le pilote de données (120), le soustracteur (332) étant destiné à soustraire une valeur de tension fournie par le générateur de tension (330) d'une valeur de tension d'une première alimentation électrique de référence (V_{ref}) fournie depuis l'extérieur, en vue d'obtenir une valeur de tension d'une seconde alimentation électrique de référence (V_{ref}), et à fournir la valeur de tension de la seconde alimentation électrique de référence au pilote de données (120).

17. Dispositif d'affichage électroluminescent organique selon la revendication 16, dans lequel le pilote de données (120) est apte à amplifier une valeur de tension de la tension de compensation d'une différence entre la valeur de tension de la première alimentation électrique de référence (V_{ref}) et la valeur de tension de la seconde alimentation électrique de référence (V_{ref}).

18. Dispositif d'affichage électroluminescent organique selon la revendication 17, dans lequel la ligne de balayage comprend une ligne de balayage précédente et une ligne de balayage actuelle, et dans lequel le pixel (140) inclut :

une première alimentation électrique (EVLDD) ;

une diode électroluminescente organique destinée à recevoir un courant électrique en provenance de la première alimentation électrique (EVLDD) ;

un premier transistor (M1) et un deuxième transistor (M2), le premier transistor (M1) et le deuxième transistor (M2) étant couplés à la ligne de données et étant agencés de manière à être mis sous tension lorsque le signal de balayage est fourni à la ligne de balayage actuelle ;

un troisième transistor (M3) couplé entre une deuxième électrode du premier transistor (M1) et l'alimentation électrique de référence (V_{ref}), le troisième transistor (M3) étant agencé de manière à être mis sous tension lorsque le signal de balayage est fourni à la ligne de balayage précédente ;

un quatrième transistor (M4) destiné à commander une quantité d'un courant électrique fourni à la diode électroluminescente organique ; et

un cinquième transistor (M5) couplé entre une électrode grille et une deuxième électrode du quatrième transistor (M4), le cinquième transistor (M5) étant agencé de manière à être mis sous tension en vue de connecter par diode le quatrième transistor (M4) lorsque le signal de balayage est fourni à la ligne de balayage précédente.

19. Dispositif d'affichage électroluminescent organique selon la revendication 18, dans lequel le pixel (140) comprend en outre :

un premier condensateur (C1) couplé à une deuxième électrode du premier transistor (M1) et à la première

alimentation électrique (EVLDD) ; et

un second condensateur (C2) couplé à la deuxième électrode du premier transistor (M1) et à une électrode grille du quatrième transistor (M4).

- 5 **20.** Dispositif d'affichage électroluminescent organique selon la revendication 18, dans lequel le pixel (140) comprend en outre :

un premier condensateur (C1) couplé à une électrode grille du quatrième transistor (M4) et à la première

10 alimentation électrique (EVLDD) ; et

un second condensateur (C2) couplé à une deuxième électrode du premier transistor (M1) et à une électrode grille du quatrième transistor (M4).

- 15 **21.** Dispositif d'affichage électroluminescent organique selon la revendication 18, comprenant en outre un sixième transistor (M6) couplé entre une deuxième électrode du quatrième transistor (M4) et la diode électroluminescente organique, le sixième transistor (M6) étant agencé de manière à être mis hors tension lorsque le signal de commande d'émission de lumière est fourni, et étant agencé de manière à être mis sous tension pendant sensiblement toutes les autres périodes restantes.

20

25

30

35

40

45

50

55

FIG. 1
(PRIOR ART)

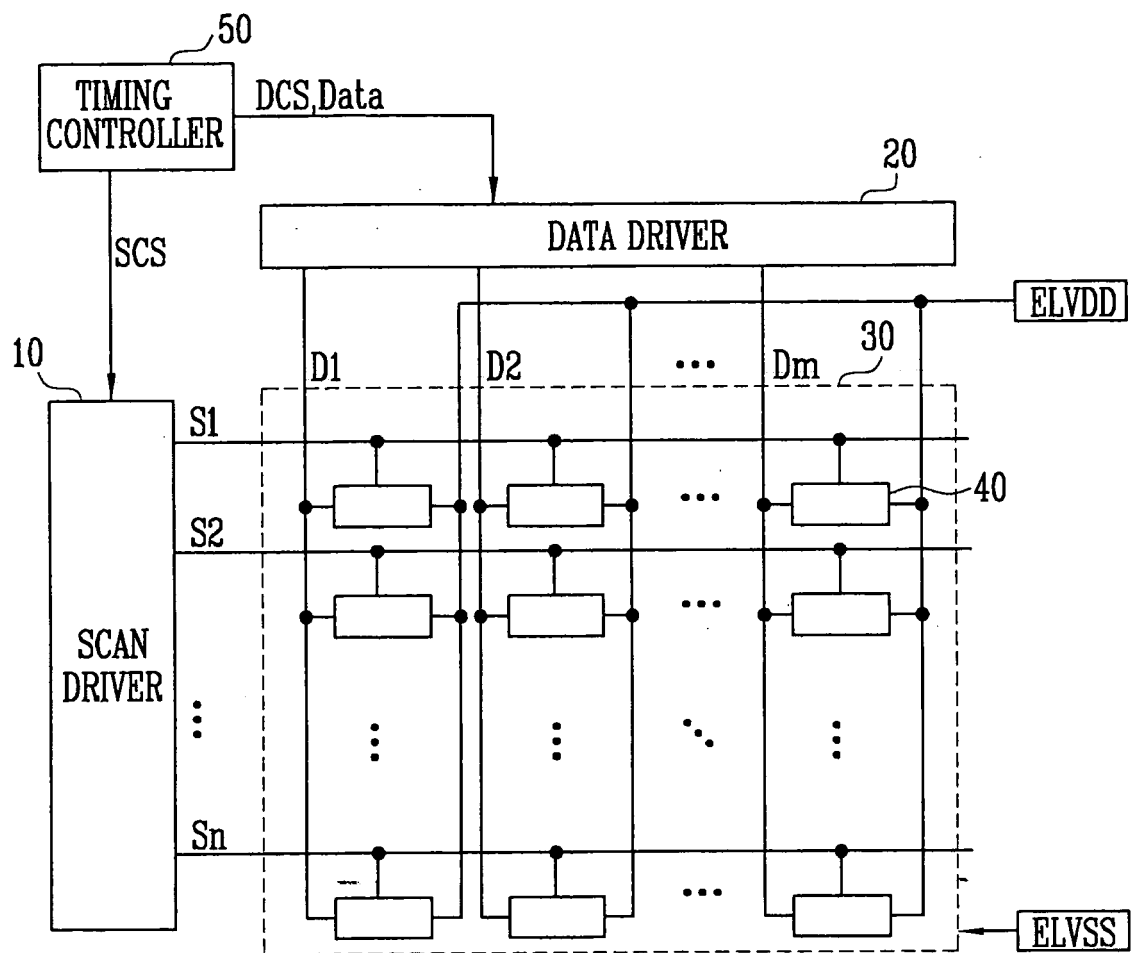


FIG. 2

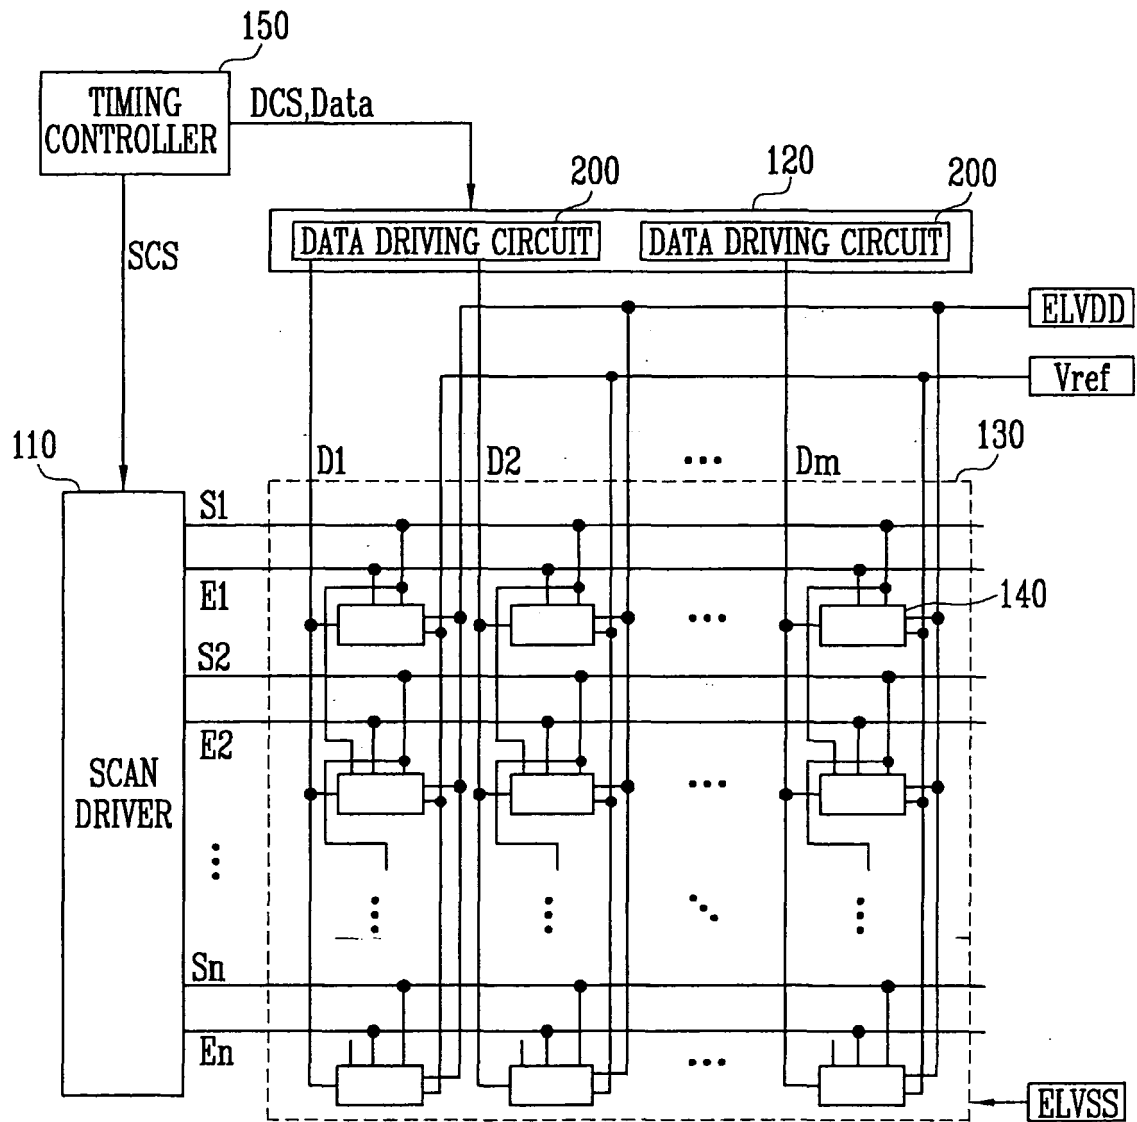


FIG. 3

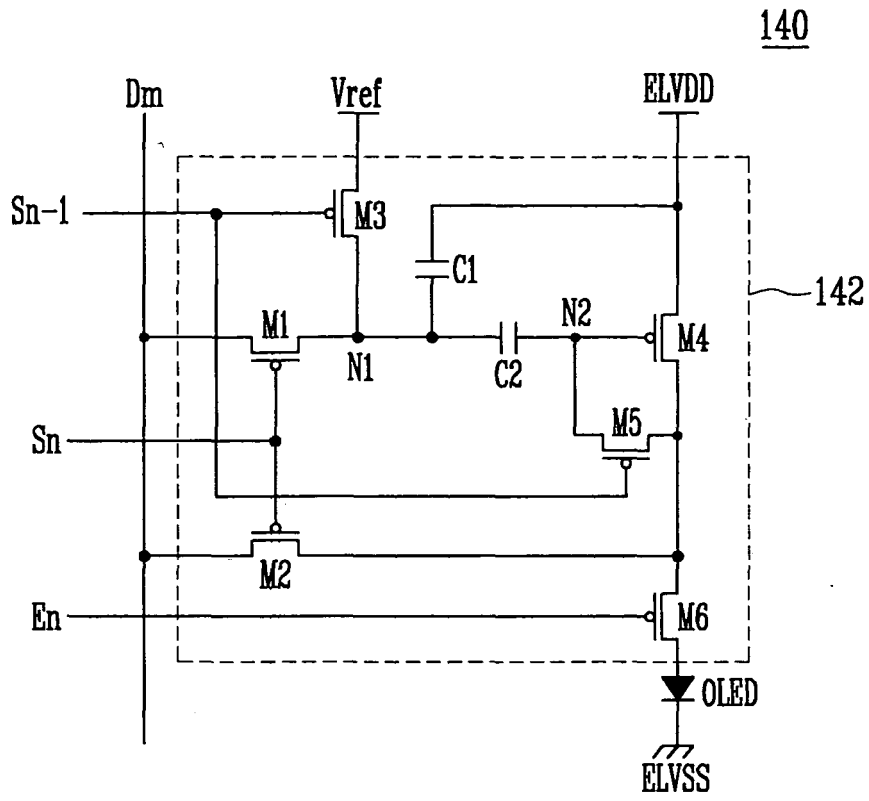


FIG. 4

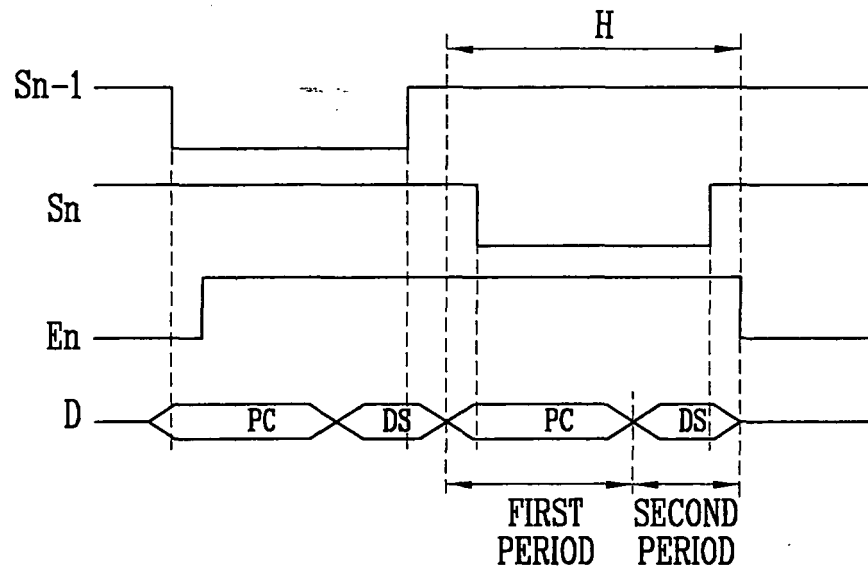


FIG. 5

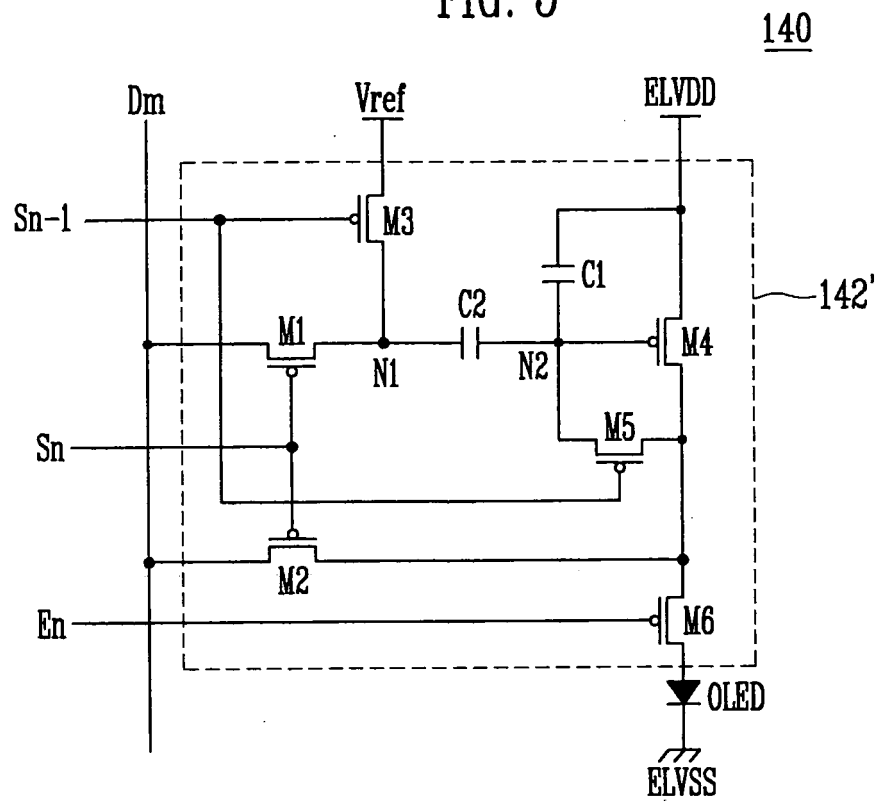


FIG. 6

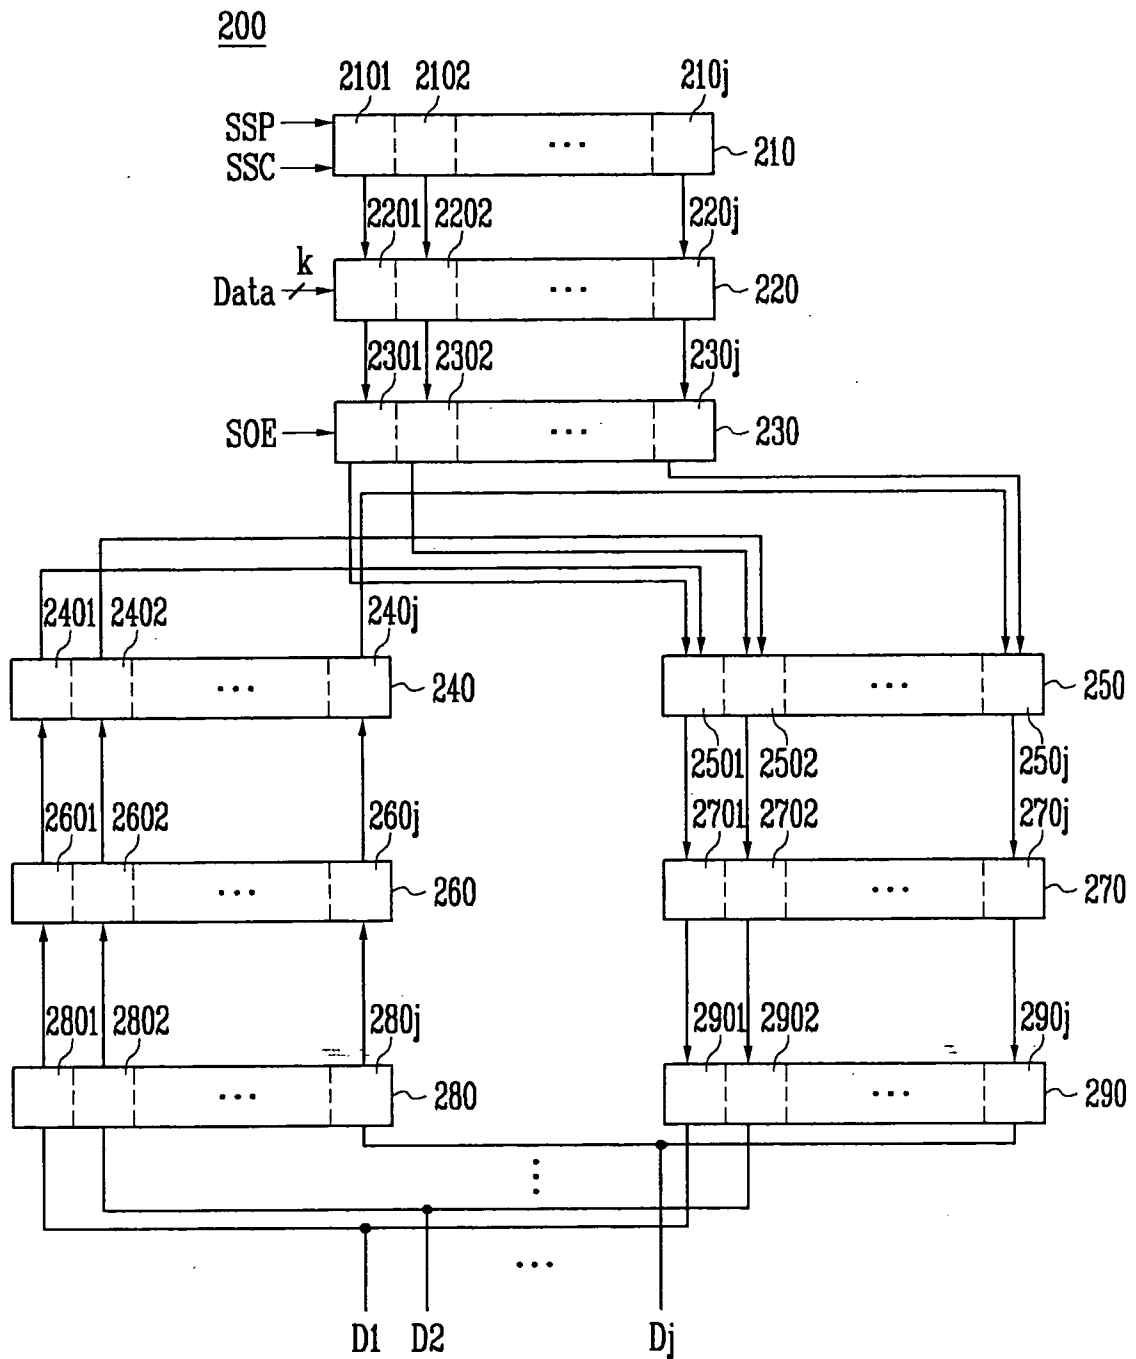


FIG. 7

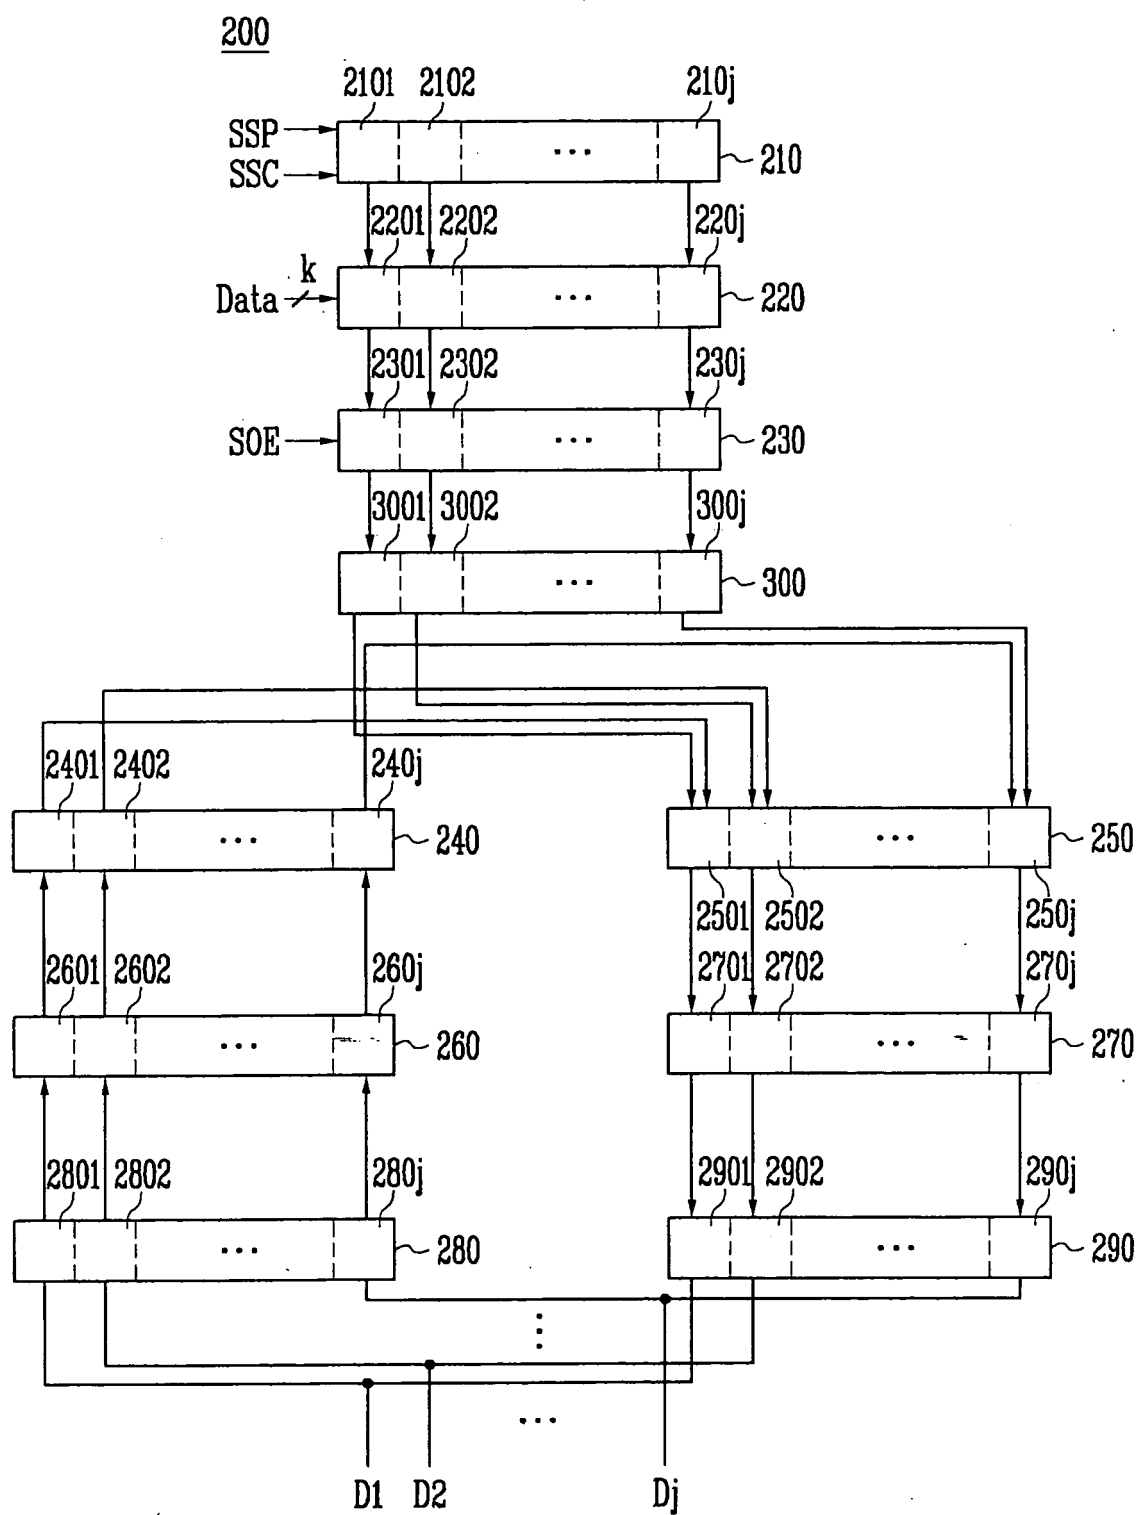


FIG. 8

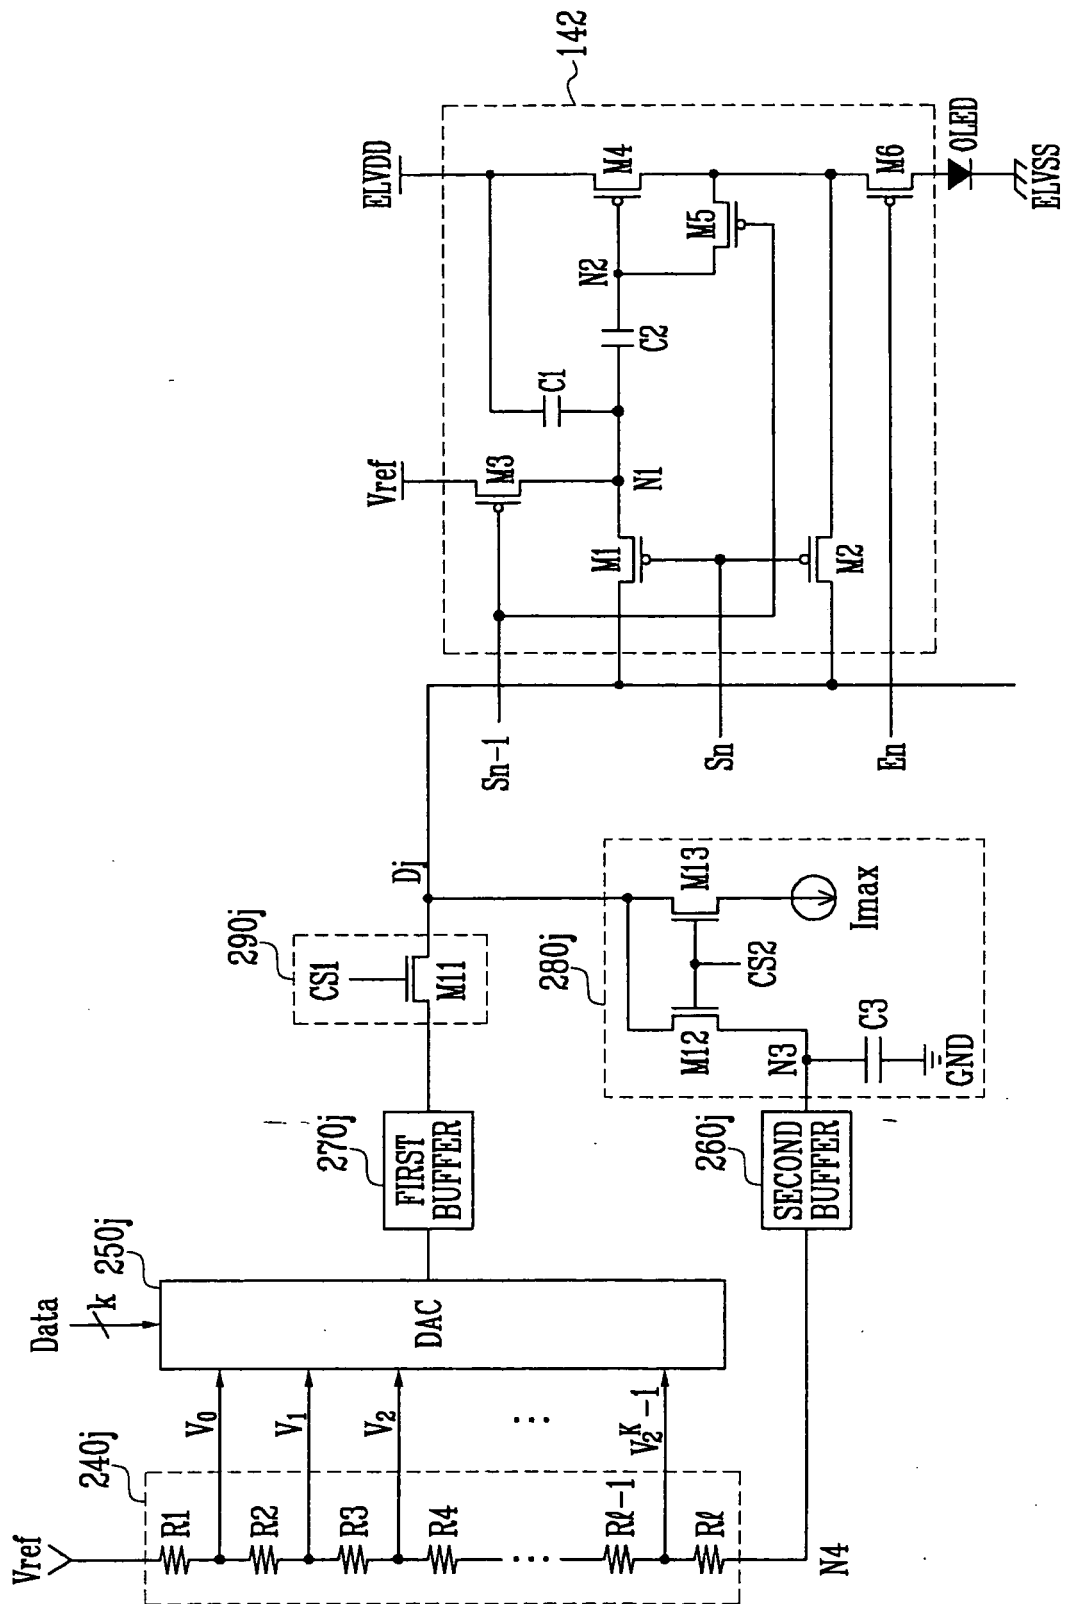


FIG. 9

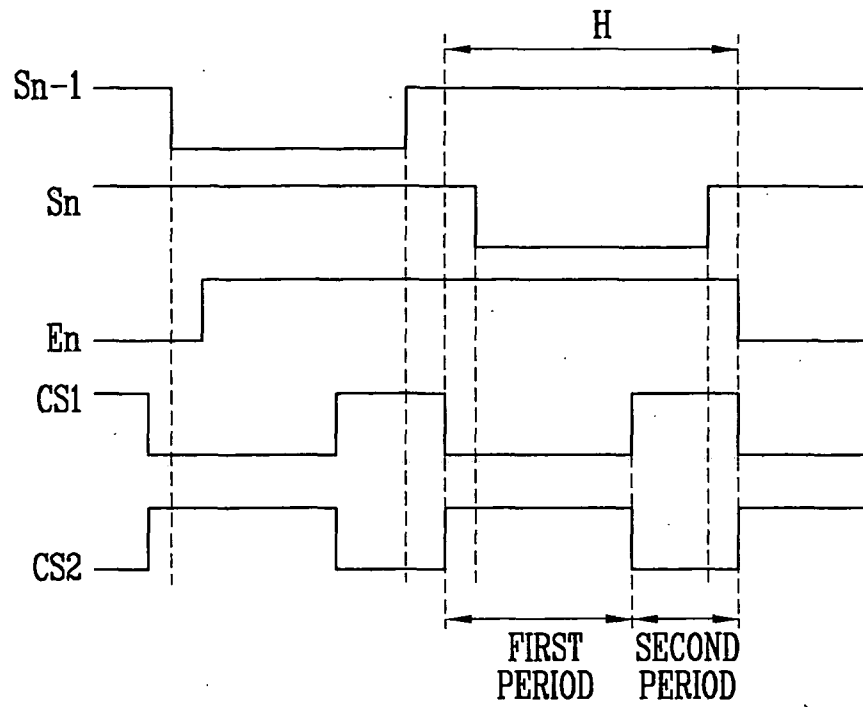


FIG. 10

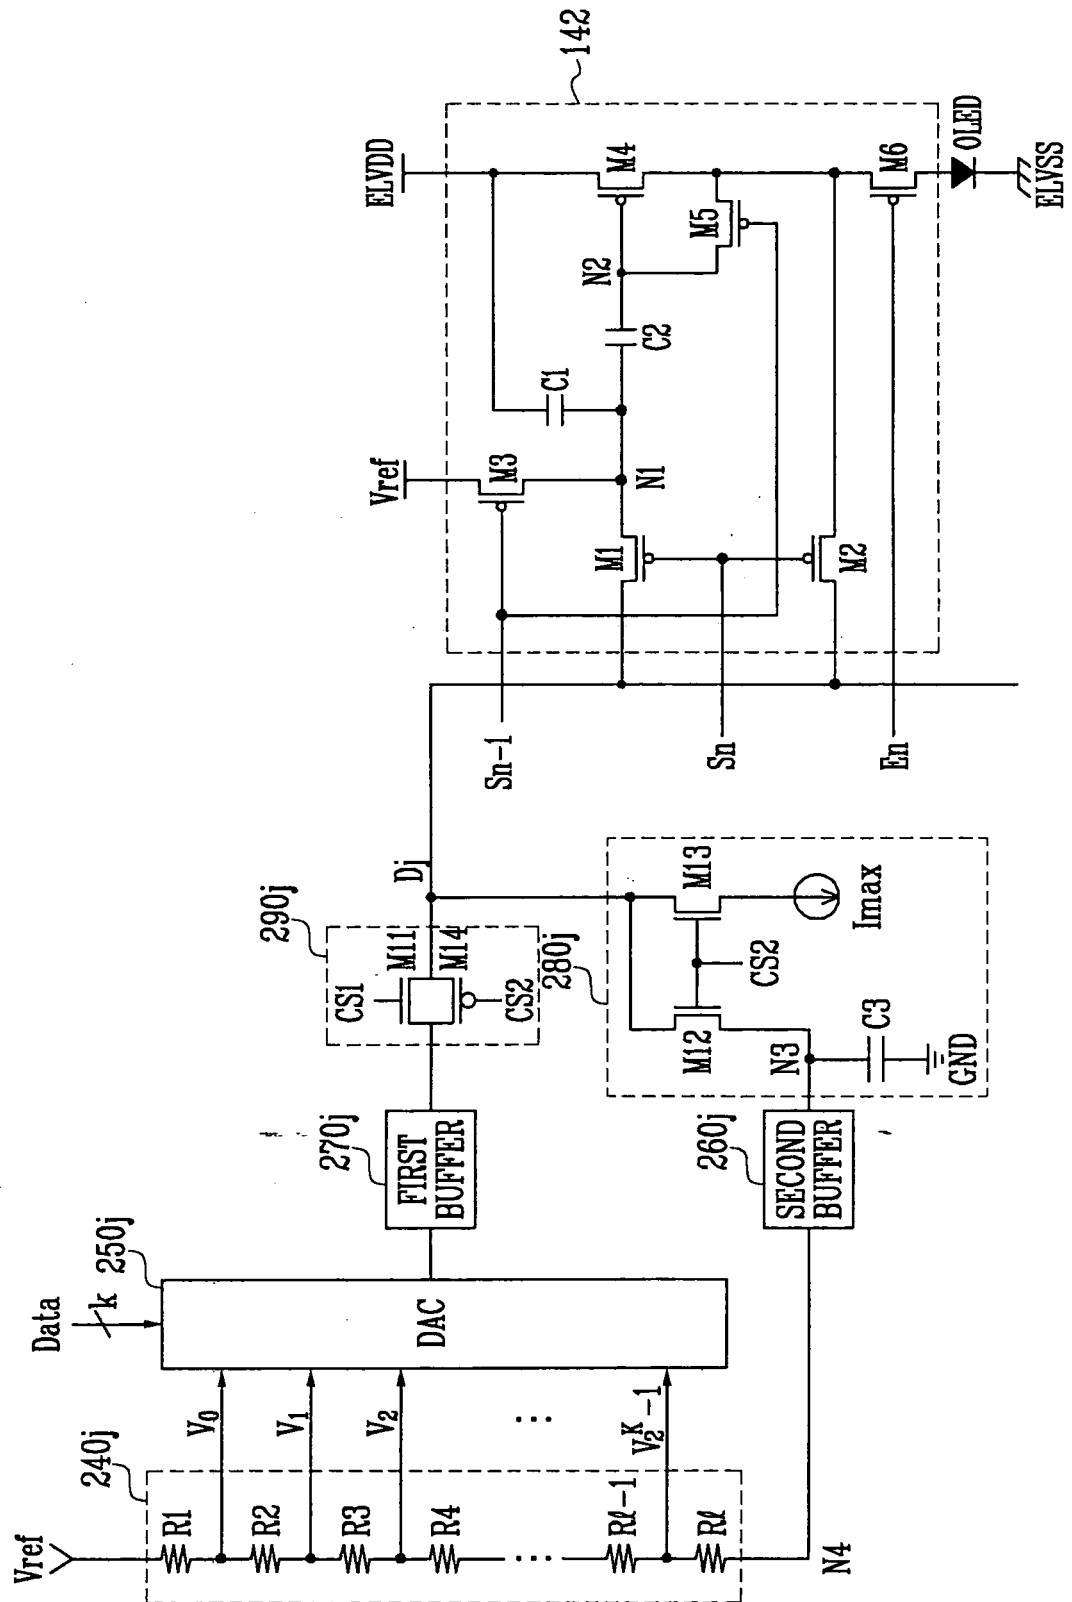


FIG. 11

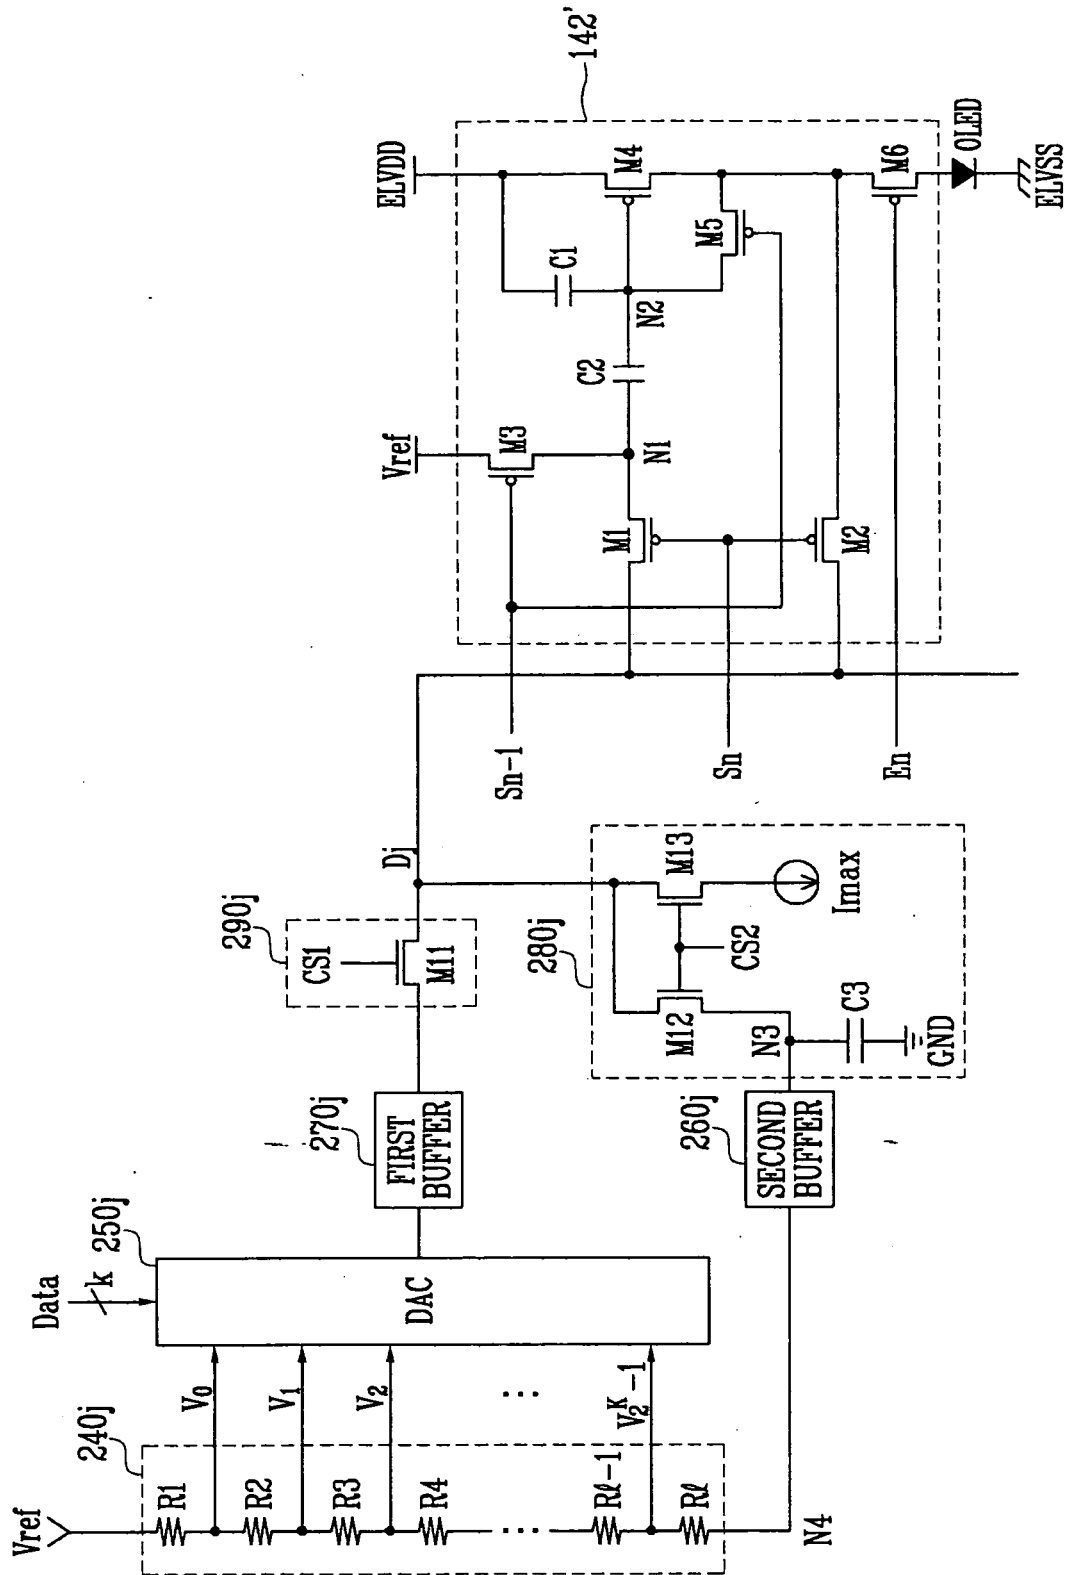


FIG. 12

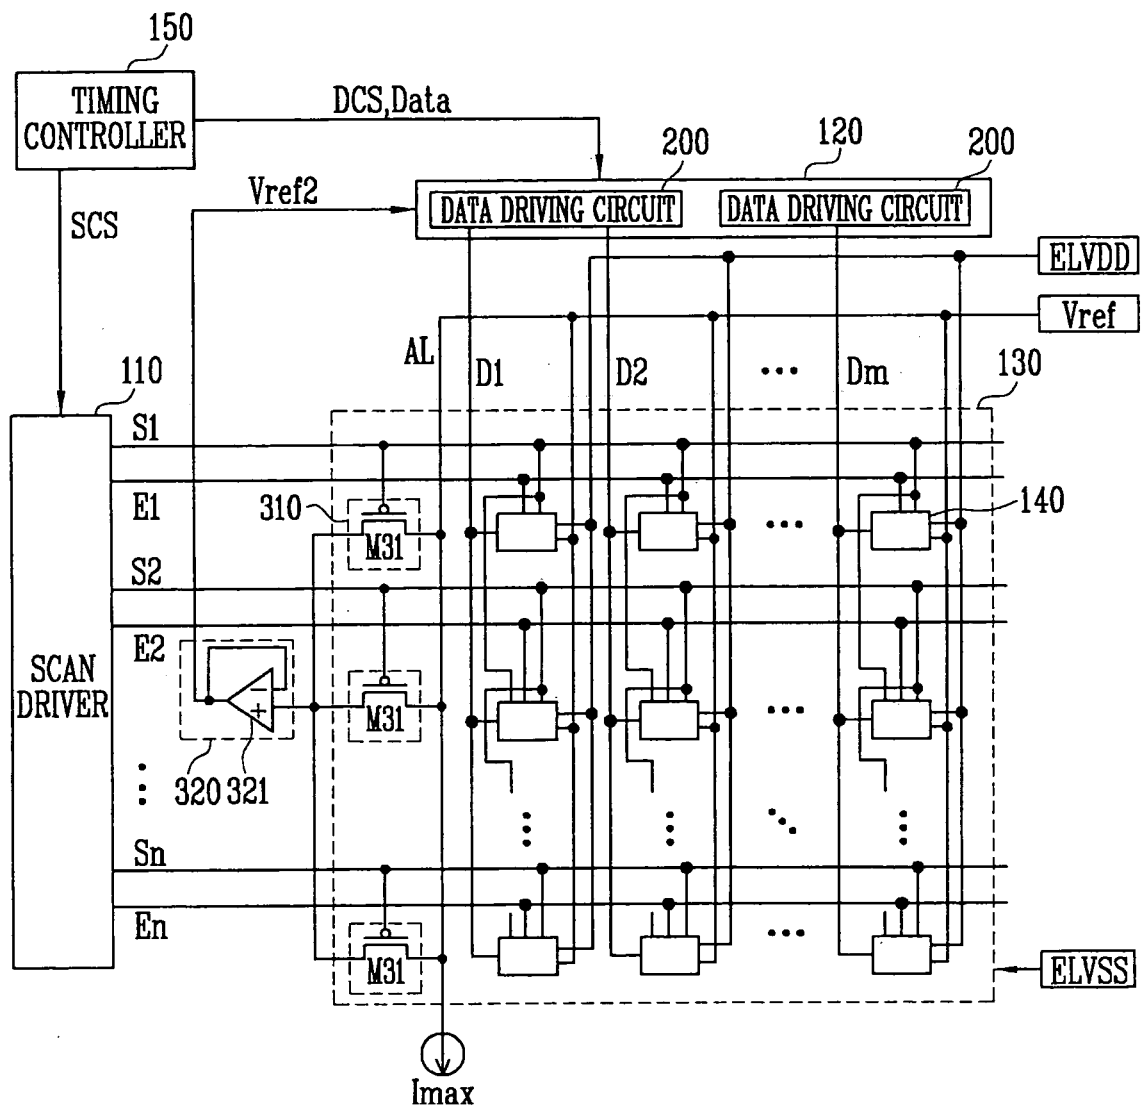


FIG. 13

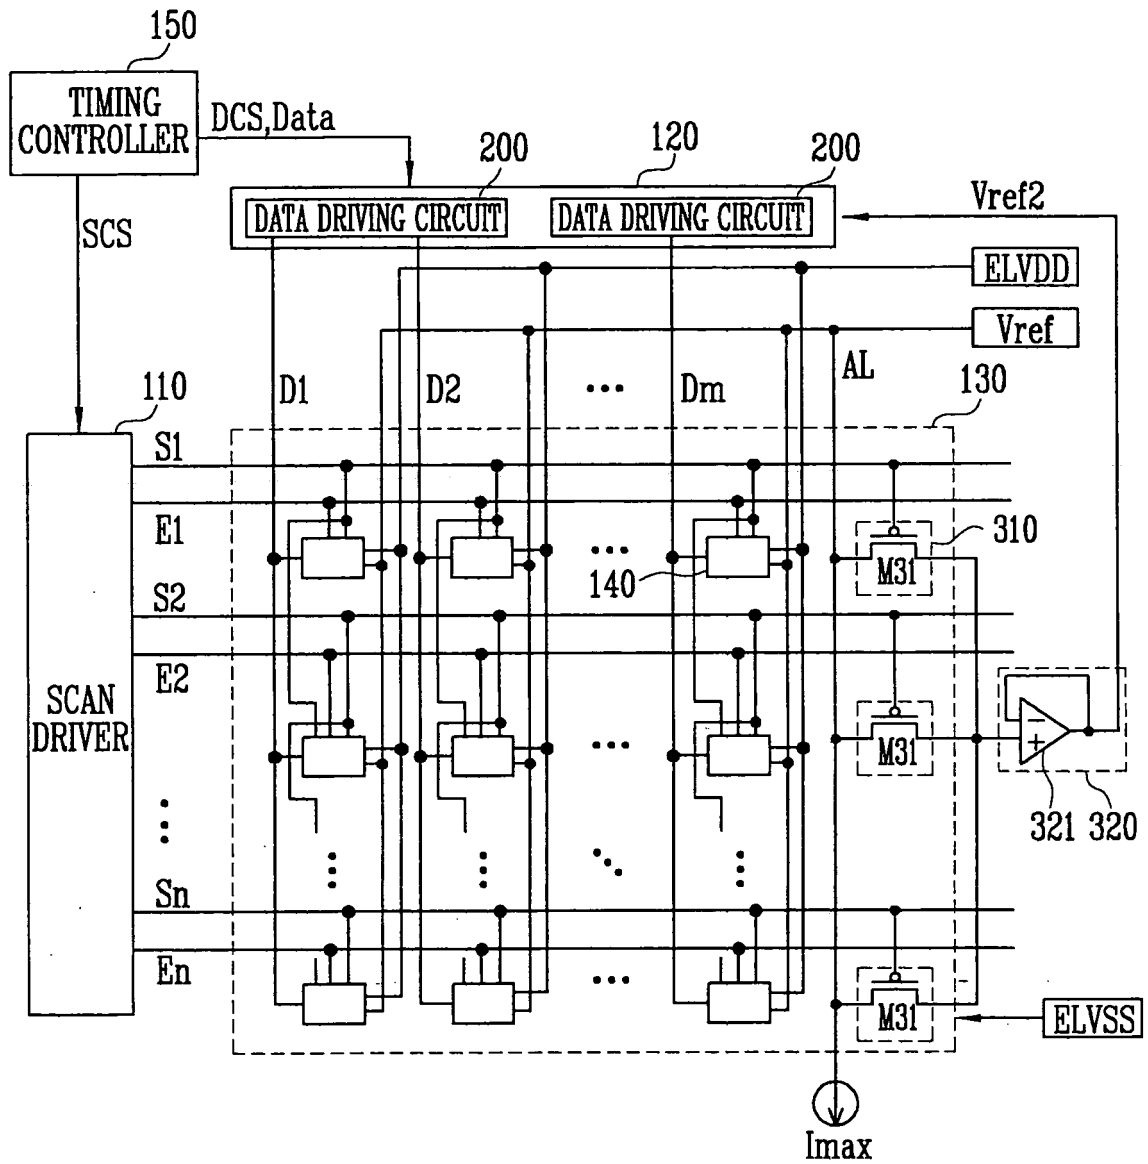


FIG. 14


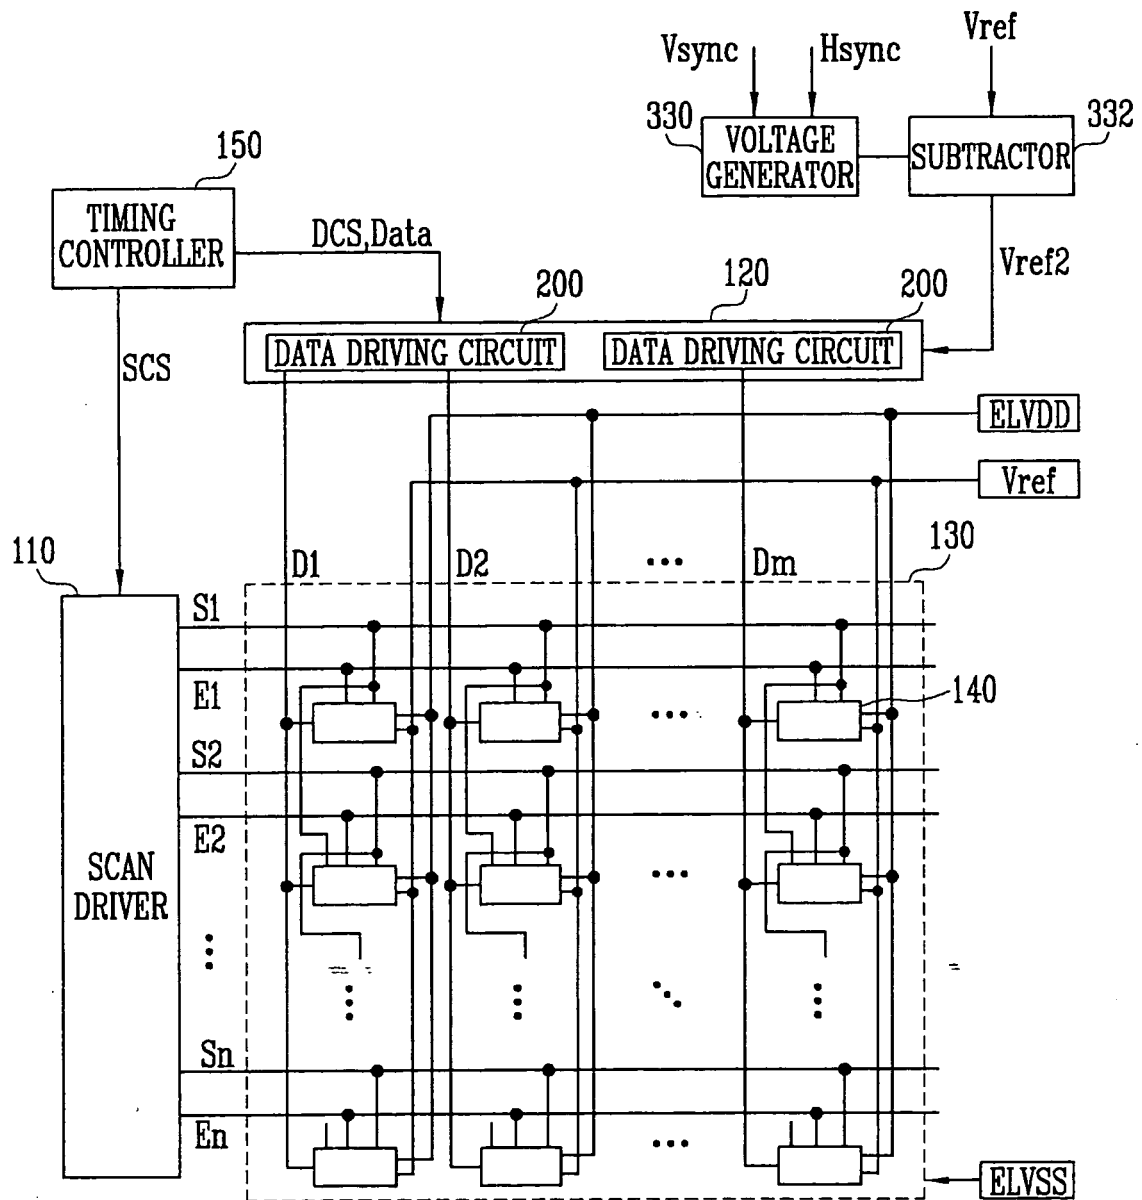


FIG. 15

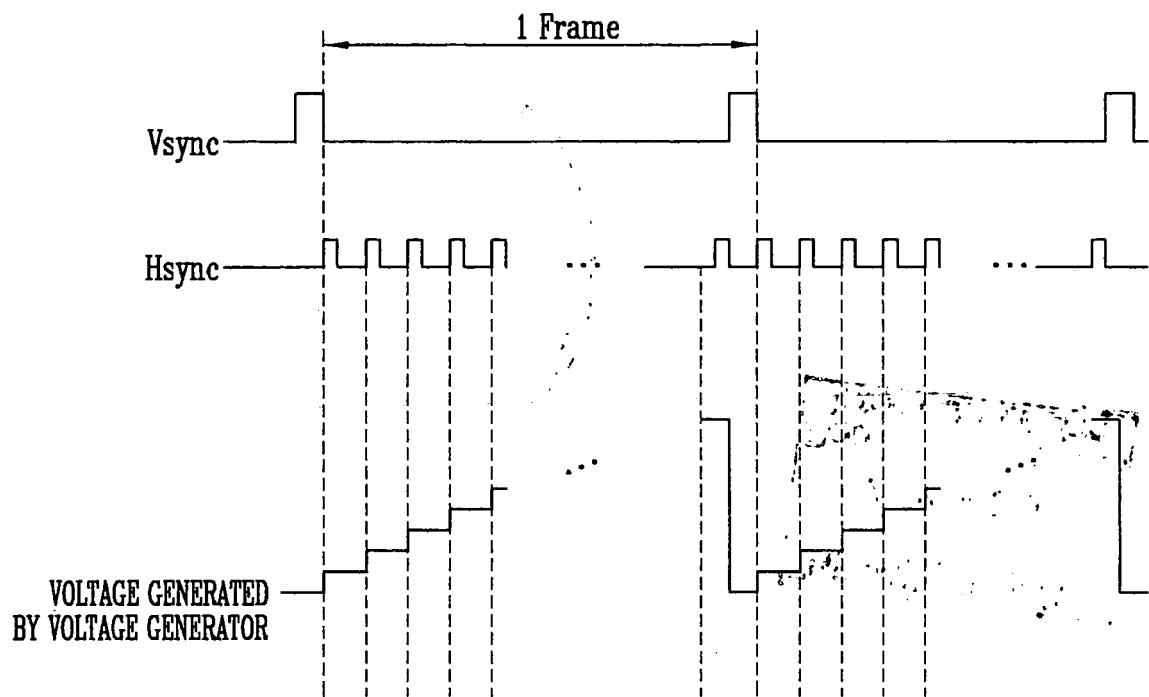

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005069267 A [0012]

Non-patent literature cited in the description

- **HAI-JUNG IN et al.** A Novel Voltage-Programming Pixel with Current-Correction Method for large-Size and High Resolution AMOLEDs on Poly-Si Back-plane. *International meeting on information Display*, 23 July 2005, vol. XX, XX (286), 901-904 [0012]

专利名称(译)	有机发光显示器		
公开(公告)号	EP1758083B1	公开(公告)日	2018-12-05
申请号	EP2006251612	申请日	2006-03-24
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司 汉阳大学校产学协力团		
申请(专利权)人(译)	三星SDI CO. , LTD. IUCF-HYU (产学合作基金会汉阳大学)		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD. IUCF-HYU (产学合作基金会汉阳大学)		
[标]发明人	RYU DO HYUNG CHUNG BO YONG KWON OH KYONG		
发明人	RYU, DO HYUNG CHUNG, BO YONG KWON, OH KYONG		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3233 G09G3/3283 G09G3/3291 G09G2300/0819 G09G2300/0852 G09G2300/0861 G09G2310/0251 G09G2310/027 G09G2310/0289 G09G2320/0223 G09G2320/043 G09G2330/02		
优先权	1020050070434 2005-08-01 KR		
其他公开文献	EP1758083A3 EP1758083A2		
外部链接	Espacenet		

摘要(译)

一种能够显示均匀亮度的图像的有机发光显示装置。扫描驱动器驱动彼此平行形成的扫描线和发光控制线。数据驱动器驱动在与扫描线和发光控制线交叉的方向上形成的数据线，并且像素被设置为与扫描线，发光控制线和数据线耦合。与数据线平行地形成辅助线。辅助线的一侧与参考电源耦合，辅助线的另一侧与电流源耦合。连接器设置在辅助线和扫描线的交叉区域。电压传输单元与连接器耦合，并将提供给连接器的电压传输到数据驱动器。

