



EP 2 284 825 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
16.02.2011 Bulletin 2011/07

(51) Int Cl.:  
G09G 3/32 (2006.01)

(21) Application number: 10171400.4

(22) Date of filing: 30.07.2010

(84) Designated Contracting States:  
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO SE SI SK SM TR  
Designated Extension States:  
BA ME RS

(30) Priority: 03.08.2009 KR 20090071279

(71) Applicant: Samsung Mobile Display Co., Ltd.  
Yongin-City  
Gyunggi-do (KR)

(72) Inventor: Lee, Baek-Woon  
Gyunggi-do (KR)

(74) Representative: Gulde Hengelhaupt Ziebig &  
Schneider  
Patentanwälte - Rechtsanwälte  
Wallstrasse 58/59  
10179 Berlin (DE)

### (54) Organic light emitting display and driving method thereof

(57) An organic light emitting display is driven in a simultaneous (or concurrent) emission scheme. The organic light emitting display includes: a display unit (130) including a plurality of pixels (140) coupled to scan lines (S1, S2, S3, Sn), control lines (GC1, GC2, GC3, GCn), and data lines (D1, D2, Dm); a control line driver (160) for providing control signals to the pixels (140) through

the control lines (GC1, GC2, GC3, GCn); and a power driver (170) for applying a power at different levels to the pixels (140) of the display unit (130) during a plurality of periods of one frame. The control signals and the power are concurrently provided to the pixels (140) included in the display unit.

**Description****CROSS-REFERENCE TO RELATED APPLICATIONS**

5 [0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2009-0071279, filed on August 3, 2009, in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

**BACKGROUND**10 **1. Field**

[0002] Embodiments of the present invention relate to an organic light emitting display and a driving method thereof.

15 **2. Description of Related Art**

[0003] Recently, various flat panel displays with reduced weight and volume in comparison to a cathode ray tube have been developed. The various flat panel displays include a liquid crystal display (LCD), a field emission display (FED), a plasma display panel (PDP), an organic light emitting diode (OLED) display, etc.

20 [0004] Among the various flat panel displays, the organic light emitting display, which displays an image using organic light emitting diodes that emit light by recombination of electrons and holes, has rapid response speed and low power consumption.

[0005] Generally, OLED displays can be classified as a passive matrix type OLED (PMOLED) display or an active matrix type OLED (AMOLED) display according to a method of driving the OLEDs.

25 [0006] The AMOLED display includes a plurality of gate lines, a plurality of data lines, a plurality of power lines, and a plurality of pixels that are coupled to the data lines and the power lines and arranged in a matrix form. Also, each of the pixels generally includes an organic light emitting (EL) device, two transistors, that is, a switching transistor that transfers a data signal and a driving transistor that drives the EL device according to the data signal, and a capacitor that maintains a data voltage corresponding to the data signal.

30 [0007] Such an AMOLED display has a low power consumption, but the intensity or amount of current flowing through the organic light emitting device varies according to deviation in threshold voltage among the transistors, thereby causing display nonuniformity.

35 [0008] In other words, since the characteristics of the transistors provided in each pixel vary according to variables in their manufacturing processes, it is difficult to manufacture the transistors so that the characteristics of all of the transistors in the AMOLED display are identical, thereby causing deviation in the threshold voltage between the transistors of different pixels.

[0009] A compensation circuit that includes a plurality of transistors and capacitors may be provided in the respective pixels. However, in this case, each pixel includes the additional plurality of transistors and capacitors of the compensation circuit.

40 [0010] More specifically, if the compensation circuit is added in each pixel as described above, additional transistors, capacitors and signal lines for controlling the transistors are added in each pixel so that in a bottom emission type AMOLED display, the aperture ratio is reduced and probability that defects are generated is increased due to the increased complexity in the constituents of the circuit.

45 [0011] Moreover, there is a recent demand for a high-speed scan driving of 120Hz or more in order to remove the screen motion blur phenomenon. However, in this case, a charging time available for each scan line is significantly reduced. In other words, when the compensation circuit is provided in each pixel so that additional transistors are provided in each pixel coupled to one scan line, capacitive load of the scan line becomes large. Therefore, a high-speed scan driving is difficult to be implemented.

**SUMMARY OF THE INVENTION**

50 [0012] Embodiments of the present invention relate to an organic light emitting display that is driven in a simultaneous (or concurrent) emission scheme and is able to perform the threshold voltage compensation of driving transistors provided in each pixel, thereby enabling high-speed driving of the display through simple circuit.

55 [0013] According to an embodiment of the present invention, an organic light emitting display includes: a display unit including a plurality of pixels coupled to scan lines, control lines, and data lines; a control line driver for providing control signals to the pixels through the control lines; and a power driver for applying a power at different levels to the pixels of the display unit during a plurality of periods of one frame. The control signals and the power may be concurrently provided to the pixels included in the display unit.

[0014] The organic light emitting display may further include: a scan driver for supplying scan signals to the pixels through the scan lines; a data driver for supplying data signals to the pixels through the data lines; and a timing controller for controlling the control line driver, the power driver, the scan driver, and the data driver.

5 [0015] The scan signals may be applied sequentially to the scan lines for a partial period of the periods of one frame and may be applied concurrently to the scan lines during the periods other than the partial period.

[0016] Sequentially applied scan signals may be applied during two horizontal periods, two adjacently applied ones of the scan signals being applied to be overlapped with each other by one horizontal period.

10 [0017] The data signals may be applied sequentially to the pixels by each of the data lines corresponding to the sequentially applied scan signals and may be concurrently applied to the pixels through the data lines during the periods other than the partial period.

[0018] The power may include a first power applied to the pixels.

15 [0019] Each of the pixels may include: a first transistor having a gate electrode coupled to a scan line of the scan lines, a first electrode coupled to a data line of the data lines, and a second electrode coupled to a first node; a second transistor having a gate electrode coupled to the first node, a first electrode, and a second electrode; a third transistor having a gate electrode coupled to a control line of the control lines, a first electrode coupled to the second electrode of the second transistor, and a second electrode coupled to the first power; an organic light emitting diode having an anode electrode coupled to the first electrode of the second transistor and a cathode electrode coupled to a second power; and a capacitor coupled between the gate electrode of the second transistor and the first electrode of the second transistor.

[0020] The first to third transistors may be NMOS transistors.

20 [0021] When the first power and the control signals are applied at a high level to the pixels included in the display unit, the pixels may be configured to light-emit concurrently at brightness corresponding to the data signals pre-stored at each of the pixels.

[0022] The power may include a first power and a second power, and the first power and the second power may be applied to the pixels.

25 [0023] Each of the pixels may include: a first transistor having a gate electrode coupled to a scan line of the scan lines, a first electrode coupled to a data line of the data lines, and a second electrode coupled to a first node; a second transistor having a gate electrode coupled to the first node, a first electrode, and a second electrode; a third transistor having a gate electrode coupled to a control line of the control lines, a first electrode coupled to the first electrode of the second transistor, and a second electrode coupled to the second power; an organic light emitting diode having a cathode electrode coupled to the first electrode of the second transistor and an anode electrode coupled to the first power; and a capacitor coupled between the gate electrode of the second transistor and the first electrode of the second transistor.

[0024] The first to third transistors may be PMOS transistors.

30 [0025] Another embodiment of the present invention is directed to a driving method of an organic light emitting display. The method includes: (a) resetting data voltages applied to respective pixels by concurrently applying a first power, scan signals, control signals, and data signals, having voltage values at respective levels, to the entirety of the pixels that constitute a display unit; (b) storing a threshold voltage of a driving transistor included in the respective pixels by concurrently applying the first power, the scan signals, the control signals, and the data signals, having the voltage values at respective levels, to the entirety of the pixels; (c) applying the scan signals sequentially to the pixels coupled to scan lines of the display unit and applying the data signals to the pixels through the data lines corresponding to the sequentially applied scan signals; and (d) light-emitting concurrently the entirety of the pixels at brightness corresponding to the data voltages stored in the respective pixels by concurrently applying the first power, the scan signals, the control signals, and the data signals, having the voltage values at respective levels, to the entirety of the pixels.

35 [0026] The driving method may further include: (e) turning off emission of the pixels by concurrently applying the first power, a second power, the control signals, and the data signals, having the voltage values at respective levels, to the entirety of the pixels and thus lowering a voltage of an anode electrode of an organic light emitting diode included in the respective pixels.

[0027] One frame may be implemented through (a) to (d).

40 [0028] The one frame may be a progressively progressed frame and may include an nth frame for displaying a left-eye image and an n+1st frame for displaying a right-eye image.

45 [0029] An entire time between an emission period of the nth frame and an emission period of the n+1st frame may be synchronized with a response time of a shutter glasses.

50 [0030] Each of the pixels may include: a first NMOS transistor having a gate electrode coupled to a scan line, a first electrode coupled to a data line, and a second electrode coupled to a first node; a second NMOS transistor having a gate electrode coupled to the first node, a first electrode, and a second electrode; a third NMOS transistor having a gate electrode coupled to a control line, a first electrode coupled to the first electrode of the second NMOS transistor, and a second electrode coupled to the first power; an organic light emitting diode having an anode electrode coupled to the first electrode of the second NMOS transistor and a cathode electrode coupled to a second power; and a capacitor coupled between the gate electrode of the second NMOS transistor and the first electrode of the second NMOS transistor.

[0031] In (a), the first power may be applied at a low level, the scan signal may be applied at a high level, and the control signal may be applied at a high level.

[0032] In (b), the first power may be applied at a high level, and the scan signal and the control signal may be applied at a high level, respectively.

5 [0033] In (c), the control signal may be applied at a low level. In (c), widths of the sequentially applied scan signals may be applied at two horizontal time, adjacently applied ones of the scan signals being applied to be overlapped with each other by one horizontal time.

[0034] In (d), the first power may be applied at a high level, the scan signal may be applied at a low level, and the control signal may be applied at a high level.

10 [0035] With the embodiments as described above, the pixel circuit provided in the respective pixels of the organic light emitting display includes three transistors and one capacitor, and the pixels are driven in the simultaneous (or concurrent) emission scheme. Thereby, the threshold voltage compensation and the high-speed driving of the driving transistor provided in the respective pixels can be performed with a simple circuit.

15 [0036] Moreover, the embodiments enable improved three dimension (3D) display performance through the simultaneous (or concurrent) emission scheme as described in the embodiments.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0037] The accompanying drawings, together with the specification illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the present invention.

20 [0038] FIG. 1 is a block diagram of an organic light emitting display according to an embodiment of the present invention;

[0039] FIG. 2 is a diagram showing a driving operation in a simultaneous (or concurrent) emission scheme according to an embodiment of the present invention;

25 [0040] FIG. 3 is a diagram showing an example where a pair of shutter glasses for 3D display is implemented in a progressive emission scheme according to a related art;

[0041] FIG. 4 is a diagram showing an example where a pair of shutter glasses for 3D display is implemented in a simultaneous (or concurrent) emission scheme according to an embodiment of the present invention;

30 [0042] FIG. 5 is a graph comparing the duty ratios that can be obtained in the simultaneous (or concurrent) emission scheme and the progressive emission scheme;

[0043] FIG. 6 is a circuit view showing a circuit schematic according to one embodiment of a pixel in FIG. 1;

[0044] FIG. 7 is a driving timing diagram of the pixel in FIG. 6;

[0045] FIGS. 8A, 8B, 8C, 8D and 8E are circuit diagrams and waveform diagrams for explaining the driving of an organic light emitting display according to an embodiment of the present invention; and

[0046] FIG. 9 is a circuit diagram according to another embodiment of the pixel in FIG. 1.

35

## DETAILED DESCRIPTION

[0047] Hereinafter, certain exemplary embodiments according to the present invention will be described with reference to the accompanying drawings. Here, when a first element is described as being coupled to a second element, the first element may be directly coupled to the second element, or may be indirectly coupled to the second element via a third element. Further, some of the elements that are not essential to a complete understanding of the invention are omitted for clarity. Also, like reference numerals refer to like elements throughout.

40 [0048] Hereinafter, exemplary embodiments according to the present invention will be described with reference to the accompanying drawings.

45 [0049] FIG. 1 is a block diagram of an organic light emitting display according to an embodiment of the present invention, and FIG. 2 is a diagram showing a driving operation in a simultaneous (or concurrent) emission scheme according to an embodiment of the present invention.

50 [0050] Referring to FIG. 1, the organic light emitting display according to one embodiment of the present invention includes a display unit 130 that includes pixels 140 that are coupled to scan lines S1 to Sn, control lines GC1 to GCn and data lines D1 to Dm, a scan driver 110 that provides scan signals to the pixels 140 through the scan lines S1 to Sn, a control line driver 160 that provides control signals to the pixels 140 through the control lines GC1 to GCn, a data driver 120 that provides data signals to the pixels 140 through the data lines D1 to Dm, and a timing controller 150 that controls the scan driver 110, the data driver 120, and the control line driver 160.

55 [0051] In addition, the pixels 140 of the display unit 130 are positioned on regions defined by the crossings of the scan lines S1 to Sn and the data lines D1 to Dm. The pixels 140 receive a first power ELVDD and a second power ELVSS from the outside. Each of the pixel circuits 142 controls the amount of current flowing through an OLED included in each pixel 140 to correspond to the data signals. Then, light having a brightness (e.g., a predetermined brightness) corresponding to the data signals is generated in the OLED.

[0052] In the embodiment of FIG. 1, the first power ELVDD applied to the pixels 140 of the display unit 130 provides voltage values at different levels during one frame. To this end, a first power ELVDD driver 170 that controls the supply of the first power ELVDD is provided, and the first power ELVDD driver 170 is controlled by the timing controller 150.

[0053] Moreover, in the embodiment of FIG. 1, the organic light emitting display is driven in a simultaneous (or concurrent) emission scheme rather than in a progressive emission scheme. As shown in FIG. 2, this means that data is input in sequence during the period of one frame, and after the input of the data is completed, light emission of the pixels 140 in accordance with the data of one frame is performed throughout the display unit 130, including all of the pixels 140.

[0054] In the progressive emission scheme according to the related art, the emission is performed in sequence right after data is input in sequence per scan line. However, in the embodiment of FIG. 1, the input of the data is performed in sequence, but the emission is collectively or concurrently performed on the entire display unit 130 after the input of the data is completed.

[0055] Referring to FIG. 2, the driving steps according to an embodiment of the present invention is divided into (a) a reset step, (b) a threshold voltage compensation step, (c) a scanning step (a data input step), and (d) an emission step. Herein, (c) the scanning step (the data input step) is performed in sequence per the respective scan lines, but (a) the reset step, (b) the threshold voltage compensation step, and (d) the emission step are each performed collectively and simultaneously or concurrently on the entirety of the display unit 130.

[0056] Further, (e) an emission turn-off step may also be included after (d) the emission step.

[0057] Here, (a) the reset step, which is a step where the data voltage applied to each pixel 140 of the display unit 130 is reset, is a period where the voltage of the anode electrode of the organic light emitting diode is dropped below the voltage of the cathode electrode so that the organic light emitting diode is not light-emitting.

[0058] Further, (b) the threshold voltage compensation step is a period where the threshold voltage of the driving transistor provided in each pixel 140 is compensated for.

[0059] Therefore, the signals applied during (a) the reset step, (b) the threshold voltage compensation step, (d) the emission step, and (e) the emission turn-off step, that is, the scan signals applied to the respective scan lines S1 to Sn, the first power ELVDD applied to the respective pixels 140, and the control signals applied to the respective control lines GC1 to GCn, are collectively and simultaneously (or concurrently) applied to the pixels 140 provided in the display unit 130 at corresponding voltage levels (e.g., predetermined voltage levels), respectively.

[0060] In the "simultaneous (or concurrent) emission scheme" according to the embodiment of the present invention, the respective operation periods ((a) to (e) steps) are clearly divided in time. Therefore, the number of the transistors of the compensation circuit provided in the respective pixels 140 and the number of the signal lines that control thereof can be reduced, such that the pair of shutter glasses for 3D display can be easily implemented.

[0061] When a user wears the "pair of shutter glasses" that switches transmittance of left eye and right eye between 0% and 100% and sees a screen displayed on an image display, that is, on the display unit of the organic light emitting display, the screen is displayed to the user as a left-eye image and a right-eye image for each frame. As such, the user sees the left-eye image with only his or her left eye and the right-eye image with only his or her right eye, thereby experiencing three-dimensional effects.

[0062] FIG. 3 is a diagram showing an example where a pair of shutter glasses for 3D display is implemented in a progressive emission scheme according to a related art, and FIG. 4 is a diagram showing an example where a pair of shutter glasses for 3D display is implemented in a simultaneous (or concurrent) emission scheme according to an embodiment of the present invention.

[0063] FIG. 5 is a graph comparing the duty ratio (emission time) that can be obtained in the cases of the simultaneous (or concurrent) emission scheme and the progressive emission scheme.

[0064] When the screen is displayed in the progressive emission scheme according to the related art as in the aforementioned case shown in FIG. 3, the response time (for example, 2.5ms) of the pair of shutter glasses is finite (e.g., non-zero) so that the emission should be turned off during the response time in order to prevent a cross talk phenomenon between the left-eye/right-eye images.

[0065] In other words, a non-light emitting period during the response time is additionally generated between a frame (n<sup>th</sup> frame) where the left-eye image is output and a frame (n+1<sup>st</sup> frame) where the right-eye image is output. Therefore, having a disadvantage that the securing of the emission time, that is, the duty ratio of the emission time decreases.

[0066] In the "simultaneous (or concurrent) emission scheme" according to one embodiment of the present invention, referring to FIG. 4, the light-emitting step is collectively and simultaneously (or concurrently) performed on the entire display unit as aforementioned, and the non-emission period is performed during the periods other than the light-emitting step so that the non-emission period is between the period where the left-eye image is output and the period where the right-eye image is output.

[0067] In other words, the emission turn-off period, the reset period, and the threshold voltage compensation period, which are the periods between the emission period of the n<sup>th</sup> frame and the emission period of the n+1<sup>st</sup> frame, are non-light emitting periods, so that if the entire time of the above periods are synchronized with the response time (for example, 2.5ms) of the pair of shutter glasses, there is no need to reduce the duty ratio of the emission time unlike in the progressive

emission scheme according to the related art.

[0068] Therefore, when implementing the pair of shutter glasses for 3D display, the "simultaneous (or concurrent) emission scheme" can improve the duty ratio by the response time of the pair of shutter glasses as compared to the "progressive emission scheme" according to the related art, making it possible to improve performance. This is illustrated in the graph of FIG. 5.

[0069] FIG. 6 is a circuit diagram of the pixel 140 in FIG. 1 according to one embodiment of the present invention, and FIG. 7 is a driving timing diagram of the pixel 140 in FIG. 6.

[0070] Referring to FIG. 6, the pixel 140 according to one embodiment of the present invention includes an OLED and a pixel circuit 142 that supplies current to the diode OLED.

[0071] The anode electrode of the OLED is coupled to the pixel circuit 142, and the cathode electrode thereof is coupled to a second power ELVSS. The OLED generates light having a brightness (e.g., a predetermined brightness) corresponding to the current supplied from the pixel circuit 142.

[0072] In the embodiment of FIG. 1, the pixels 140 that constitute the display unit 130 receive data signals supplied to the data lines D1 to Dm when scan signals are supplied sequentially to the scan lines S1 to Sn for a partial period (the aforementioned (c) step) of one frame. However, the scan signals applied to the scan lines S1 to Sn, the first power ELVDD applied to the pixels 140, and the control signals applied to the control lines GC1 to GCn, having predetermined voltage levels, are collectively and simultaneously (or concurrently) applied to the pixels 140, during other periods (e.g., (a), (b), (d), and (e) steps) of one frame.

[0073] In one embodiment of the present invention, the pixel circuit 142 provided in the respective pixels 140 includes three transistors M1 to M3 and one capacitor Cst.

[0074] Moreover, in one embodiment of the present invention, in consideration of the capacitance of a parasitic capacitor Coled generated by the anode electrode and the cathode electrode of the OLED, the coupling effect of the capacitor Cst and the parasitic capacitor Coled is utilized. This will be described in more detail with reference to FIGS. 8A - 8E.

[0075] Here, the gate electrode of the first transistor M1 is coupled to a scan line S, and the first electrode of the first transistor M1 is coupled to a data line D. The second electrode of the first transistor M1 is coupled to a first node N1.

[0076] Here, a scan signal Scan(n) is applied to the gate electrode of the first transistor M1, and a data signal Data(t) is applied to the first electrode of the first transistor M1.

[0077] The gate electrode of the second transistor M2 is coupled to the first node N1, and the first electrode of the second transistor M2 is coupled to the anode electrode of the OLED. The second electrode of the second transistor M2 is coupled to a first power ELVDD(t) through the first and second electrodes of the third transistor M3. The second transistor M2 serves as a driving transistor.

[0078] The gate electrode of the third transistor M3 is coupled to a control line GC, the first electrode of the third transistor M3 is coupled to the second electrode of the second transistor M2, and the second electrode of the third transistor M3 is coupled to the first power ELVDD(t).

[0079] Here, a control signal GC(t) is applied to the gate electrode of the third transistor M3, and the first power ELVDD(t) that is varied to a voltage level (e.g., a predetermined level) is input into the second electrode of the third transistor M3.

[0080] In addition, the cathode electrode of the OLED is coupled to a second power ELVSS(t), and the capacitor Cst is coupled between the gate electrode of the second transistor M2, at the first node, and the first electrode of the second transistor M2, coupled to the anode electrode of the OLED.

[0081] In the embodiment shown in FIG. 6, all of the first to third transistors M1 to M3 are implemented as NMOS transistors, however, the present invention is not limited as such.

[0082] As described above, the pixels 140 according to the embodiment of the present invention are driven in the "simultaneous (or concurrent) emission scheme."

[0083] Referring to FIG. 7, the driving of the pixels 140 is divided into a reset period Reset, a threshold voltage compensation period Vth, a scan/data input period Scan, an emission period Emission, and an emission turn-off period Off for each frame, as shown in FIG. 7.

[0084] Here, the scan signals are input sequentially scan line by scan line, and the data signals are input sequentially into the pixels corresponding thereto for the scan/data input period Scan. However, the signals having voltage values at respective levels (e.g., predetermined levels), that is, the first power ELVDD(t), the scan signal Scan(n), the control signal GC(t), the data signal Data(t), are collectively applied to all of the pixels 140 that constitute the display unit 130 for periods other than the scan/data input period Scan.

[0085] In other words, the threshold voltage compensation of the driving transistor provided in the respective pixels 140 and the emission operations of the respective pixels 140 are simultaneously (or concurrently) implemented in all of the pixels 140 of the display unit 130 for each frame.

[0086] Hereinafter, the driving in the simultaneous (or concurrent) emission scheme according to one embodiment of the present invention will be described in more detail with reference to FIGS. 8A to 8E.

[0087] FIGS. 8A to 8E are circuit diagrams and waveform diagrams for explaining the driving of an organic light emitting display according to an embodiment of the present invention.

[0088] For the convenience of explanation, although the voltage levels of the input signals are described using concrete numerical values, these are exemplary values for facilitating understanding but are not actual design values.

[0089] Moreover, in the embodiment of FIGS. 8A to 8E, it is assumed that the capacitance of the capacitor Cst is 1/5 of the capacitance of the parasitic capacitor Coled of the organic light emitting diode.

5 [0090] First, referring to FIG. 8A, a Reset period is illustrated. In the Reset period, the data voltage applied to the respective pixels 140 of the display unit 130 is reset, wherein the voltage of the anode electrode of the OLED is dropped below the voltage of the cathode electrode of the OLED in order that the OLED is not light-emitting.

10 [0091] In other words, during the Reset period, the first power ELVDD(t) is applied at a low level (for example, -3V), the scan signal Scan(n) is applied at a high level (for example, 11V), and the control signal GC(t) is applied at a high level (for example, 20V).

[0092] Moreover, when the threshold voltage of the second transistor M2, which is a driving transistor, is stored, the data signal Data(t) is applied with a voltage value corresponding to the magnitude of the threshold voltage of the second transistor M2 so that the voltage at the anode electrode of the OLED, which is coupled to the first electrode of the second transistor M2, becomes about 0V.

15 [0093] In one embodiment, for the convenience of explanation, assuming that the threshold voltage of the second transistor M2 is 1V, the data signal Data(t) applied during the Reset period becomes 1V, as shown in FIG. 8A.

20 [0094] Further, the reset step in the Reset period is collectively applied to all of the pixels 140 that constitute the display unit 130 so that the signals applied during the reset step, that is, the first power ELVDD(t), the scan signal Scan(n), the control signal GC(t), and the data signal Data(t), are applied simultaneously or concurrently to all of the pixels 140, the signals having their voltage values set at respective levels.

[0095] According to the application of the signals as described above, the first transistor M1, the second transistor M2, and the third transistor M3 are turned on.

25 [0096] Therefore, the voltage at 1V corresponding to the threshold voltage of the second transistor M2 is applied as the data signal to the first node N1, and a current path is formed from the first power ELVDD(t) to the anode electrode of the OLED as the second and third transistors M2 and M3 are turned on so that the voltage value at the anode electrode is dropped to -3V, which is the voltage value of the first power ELVDD(t).

30 [0097] Next, referring to FIG. 8B, a period, where the threshold voltage of the driving transistor M2 provided in the pixels 140 of the display unit 130 is stored in the capacitor Cst, is illustrated. In this embodiment, the defects due to the deviation in the threshold voltage of the driving transistor M2, when data voltage is charged in the pixels 140, is compensated for.

[0098] In other words, during the threshold voltage compensation period Vth, the first power ELVDD(t) is applied at a high level (for example, 15V), the scan signal Scan(n) and the control signal GC(t) are applied at a high level (for example, 11V and 20V), respectively, in the same manner as the Reset period, and the data signal Data(t) also maintains the same voltage value (for example, 1V) as that in the previous Reset period.

35 [0099] Moreover, in the threshold voltage compensation period Vth is also collectively applied to the pixels 140 that constitute the display unit 130. Therefore, the signals applied during the threshold voltage compensation period Vth, including the first power ELVDD(t), the scan signal Scan(n), the control signal GC(t), and the data signal Data(t), are applied simultaneously or concurrently to all of the pixels 140, at respective voltage values.

40 [0100] According to the application of the signals as described above, the first transistor M1, the second transistor M2, and the third transistor M3 are turned on.

[0101] However, in the case of the second transistor M2, it is turned on until the voltage difference Vgs between the gate electrode and the first electrode corresponds to the threshold voltage of the second transistor M2, and thereafter, it is turned off.

45 [0102] In other words, the voltage of the anode electrode of the organic light emitting diode, which is dropped to -3V during the original Reset step when a current path is formed between the first power ELVDD(t) and the anode electrode as the second and third transistors M2 and M3 are turned on, is raised to a voltage (0V in the embodiment of FIG. 8B) that is equal to the voltage (for example, 1V) of the gate electrode of the second transistor M2 - the threshold voltage (for example, 1 V) of the second transistor M2.

50 [0103] Therefore, the first electrode of the capacitor Cst coupled to the first node N1 is at 1 V, and the second electrode of the capacitor Cst coupled to the anode electrode of the OLED is at 0V, such that the voltage stored in the capacitor Cst becomes 1 V, that is, the voltage corresponding to the threshold voltage of the second transistor M2.

[0104] Next, referring to FIG. 8C, a scan/data input period Scan is illustrated. In the scan/data input period Scan, the scan signals are applied sequentially to the pixels 140, the pixels 140 being coupled to the scan lines S1 to Sn, so that the data signals supplied to the data lines D1 to Dm are applied to the pixels 140.

55 [0105] In other words, in the scan/data input period Scan of FIG. 8C, the scan signals are input sequentially to the scan lines S1 to Sn, the data signals corresponding thereto are input sequentially to the pixels 140 coupled to the respective scan lines S1 to Sn, and the control signal GC(t) is applied at a low level (for example, -3V) during the period.

[0106] However, in one embodiment of the present invention, the widths of the sequentially applied scan signals are

exemplarily applied at two horizontal time 2H, as shown in FIG. 8C. In other words, the width of the n-1<sup>st</sup> scan signal Scan(n-1) and the width of the nth scan signal Scan(n) applied following thereof are applied to be overlapped by 1H.

[0107] Moreover, as the control signal GC(t) is applied at a low level, the third transistor M3 that is an NMOS transistor in FIG. 8C is turned off so that the first power ELVDD(t) may be provided at any levels for the period.

[0108] In the case of the pixel shown in FIG. 8C, if the scan signal Scan(n) at a high level is applied so that the first transistor M1 is turned on, the data signal Data(t) having a voltage value (e.g., a predetermined voltage value) is applied to the first node N1 via the first and second electrodes of the first transistor M1.

[0109] Here, assuming that the voltage value of the applied data signal Data(t) is 6V, the voltage of the first node N1 is raised from the previous 1V to 6V so that the voltage at the anode electrode becomes

$$-V_{th} + \frac{C_{st}}{C_{st} + C_{oled}} (Data - 1) = -1 + 1/6(6 - 1) \text{ due to the coupling effects between the capacitor } C_{st}$$

and the parasitic capacitor Coled of the organic light emitting diode. Herein, it is assumed that the capacitance of Cst is 1/5 of the capacitance of Coled.

[0110] Consequently, the voltage having a value that reflects the threshold voltage of the second transistor M2 is applied to the anode electrode of the organic light emitting diode, that is, the first electrode of the second transistor M2.

[0111] However, since the third transistor M3 is not turned on during the scan/data input period, a current path is not formed between the organic light emitting diode and the first power ELVDD(t) so that current is not substantially supplied to the OLED. That is, an emission is not performed.

[0112] Next, referring to FIG. 8D, an Emission period is illustrated. In the Emission period, a current corresponding to the data voltage stored in each of the pixels 140 of the display unit 130 is supplied to the OLED provided in each of the pixels 140 so that the emission is performed.

[0113] In other words, during the Emission period, the first power ELVDD(t) is applied at a high level (for example, 15V), the scan signal Scan(n) is applied at a low level (for example, -3V), and the control signal GC(t) is applied at a high level (for example, 20V).

[0114] Here, as the scan signal Scan(n) is applied at a low level, the first transistor M1 that is an NMOS transistor in FIG. 8D is turned off so that the data signal may be supplied at any levels for the period.

[0115] Moreover, the emission step of the Emission period is also collectively applied to the pixels 140 that constitute the display unit 130. Therefore, the signals applied during the emission step, that is, the first power ELVDD(t), the scan signal Scan(n), the control signal GC(t), and the data signal Data(t), are simultaneously or concurrently applied to all of the pixels 140, the signals having their voltage values set at respective levels.

[0116] According to the application of the signals as described above, the first transistor M1 is turned off, and the second transistor M2 and the third transistor M3 are turned on.

[0117] As the second transistor M2 and the third transistor M3 are turned on as described above, a current path is formed between the first power ELVDD(t) and the cathode electrode of the OLED. Therefore, a current corresponding to a Vgs voltage value of the second transistor M2, that is, the voltage corresponding to the voltage difference between the gate electrode and the first electrode of the second transistor M2, is applied to the organic light emitting diode so that it is emitting light at a brightness corresponding thereto.

[0118] Here, in one embodiment of the present invention, the voltage Vgs becomes

$$Data + V_{th} - \frac{C_{st}}{C_{st} + C_{oled}} (Data - 1),$$

and

the current flowing to the OLED corresponding to the voltage Vgs is represented by

$$I_{oled} = \beta/2(V_{gs} - V_{th})^2$$

wherein  $\beta$  represents constant value so that in the embodiment as illustrated in FIG. 8D, the current flowing to the organic light emitting diode is represented as:

$$Ioled = \frac{\beta}{2} (Data + Vth - \frac{Cst}{Cst + Coled} (Data - 1) - Vth) = \frac{\beta}{2} (Data - \frac{Cst}{Cst + Coled} (Data - 1))$$

5 [0119] This current addresses the problem generated by the deviation in the threshold voltage of the second transistor M2.

[0120] After the emission is performed on all of the pixels 140 of the display unit 130 as described above, an emission turn-off step is performed as shown in FIG. 8E.

10 [0121] In other words, referring to FIG. 8E, during the emission turn-off period, the first power ELVDD(t) is applied at a low level (for example, -3V), the scan signal Scan(n) is applied at a low level (for example, -3V), and the control signal CG(t) is applied at a high level (for example, 20V).

[0122] In other words, compared with the Emission period of FIG. 8D, the emission turn-off period Off is the same except that the first power ELVDD(t) is changed from the high level to the low level (for example, -3V).

15 [0123] In this case, a current path is formed between the anode electrode of the organic light emitting diode and the first power ELVDD(t) as the second and third transistors M2 and M3 are turned on. Therefore, the voltage at the anode electrode is gradually dropped to -3V that is the voltage value at the first power ELVDD(t), and consequently, the voltage of the anode electrode is dropped below that of the cathode electrode so that the emission is turned off.

[0124] As described above, one frame is implemented through the periods shown in FIGS. 8A to 8E, and the periods 20 are continuously repeated, thereby implementing the following frames. In other words, after the emission turn-off period of FIG. 8E, the reset period of FIG. 8A begins again.

[0125] FIG. 9 is a circuit diagram showing a pixel 240 according to another embodiment of the present invention.

[0126] Referring to FIG. 9, compared with the embodiment of FIG. 6, it is different in that a transistor that constitutes a pixel circuit 242 is implemented as a PMOS transistor.

25 [0127] In this case, compared with the driving timing diagrams of FIG. 7, the polarities of a scan signal Scan(n), a control signal GC(n) are inverted as applied, a first power ELVDD(t) is fixed (for example, 0V), and the voltage of a second power ELVSS is varied as time elapses to be in a form that is the inverse of the waveform of the first power ELVDD(t) of FIG. 7.

[0128] Consequently, compared with the embodiment of FIG. 6, in the embodiment of FIG. 9, a difference is that the 30 transistor is implemented as a PMOS transistor and not as an NMOS transistor, but the driving operations and the principles thereof are similar, and thus, the detailed description thereof will be omitted.

[0129] Referring to FIG. 9, the pixel 240 in one embodiment of the present invention includes an OLED and a pixel circuit 242 that supplies a current to the OLED.

[0130] The cathode electrode of the OLED is coupled to the pixel circuit 242, and the anode electrode of the OLED 35 is coupled to the first power ELVDD(t). The OLED generates light having a brightness (e.g., a predetermined brightness) corresponding to the current supplied by the pixel circuit 242.

[0131] However, in the embodiment of FIG. 9, the pixels 240 that constitute the display unit receive data signals supplied to data lines D1 to Dm when scan signals are supplied sequentially to scan lines S1 to Sn for a partial period (the aforementioned (c) step) of one frame, but the scan signals applied to the respective scan lines S1 to Sn, the second power ELVSS applied to the respective pixels 240, and control signals applied to respective control lines GC1 to GCn 40 are collectively and simultaneously (or concurrently) applied to the respective pixels 240, the signals having voltage levels at respective levels (e.g., predetermined levels) for other periods ((a), (b), and (d) steps) of the one frame.

[0132] The pixel circuit in each of the pixels 240 includes three transistors PM1 to PM3 and one capacitor Cst in FIG. 9.

[0133] Here, the gate electrode of the first transistor PM1 is coupled to a scan line S, and the first electrode of the first transistor PM1 is coupled to a data line D. The second electrode of the first transistor PM1 is coupled to a first node N1. 45

[0134] In other words, the scan signal Scan(n) is applied to the gate electrode of the first transistor PM1, and the data signal Data(t) is applied to the first electrode of the first transistor PM1. The second electrode of the first transistor PM1 is connected to a first node N1.

[0135] The gate electrode of the second transistor PM2 is coupled to the first node N1, and the first electrode of the second transistor PM2 is coupled to the cathode electrode of the organic light emitting diode. The second electrode of the second transistor PM2 is coupled to the second power ELVSS through the first and second electrodes of the third transistor PM3. The second transistor PM2 serves as a driving transistor. 50

[0136] In other words, the gate electrode of the third transistor PM3 is coupled to the control line GC, the first electrode of the third transistor PM3 is coupled to the second electrode of the second transistor PM2, and the second electrode of the third transistor PM3 is coupled to the second power ELVSS.

[0137] Therefore, the control signal GC(t) is applied to the gate electrode of the third transistor PM3, and the second power ELVSS that is varied to a predetermined level to be provided is applied to the second electrode thereof. 55

[0138] In addition, the anode electrode of the OLED is coupled to the first power ELVDD(t), and the capacitor Cst is

coupled between the gate electrode of the second transistor PM2, that is, the first node N 1, and the first electrode of the second transistor PM2, that is, the cathode electrode of the OLED.

[0139] In the embodiment of FIG. 9, all of the first to third transistors PM1 to PM3 are implemented as PMOS transistors.

[0140] While the present invention has been described in connection with certain exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, and equivalents thereof.

## 10 Claims

### 1. An organic light emitting display comprising:

15 a display unit (130) comprising a plurality of pixels (140) coupled to scan lines (S1, S2, S3, Sn), control lines (GC1, GC2, GC3, GCn), and data lines (D1, D2, Dm);  
 a control line driver (160) for providing control signals to the pixels (140) through the control lines (GC1, GC2, GC3, GCn); and  
 a power driver (170) for applying a power at different levels to the pixels (140) during a plurality of periods of one frame,  
 20 wherein the control line driver (160) is adapted to provide control signals to the pixels (140) concurrently with the power provided to the pixels (140) from the power driver (170).

### 2. The organic light emitting display as claimed in claim 1, further comprising:

25 a scan driver (110) for supplying scan signals to the pixels (140) through the scan lines (S1, S2, S3, Sn);  
 a data driver (120) for supplying data signals to the pixels (140) through the data lines (D1, D2, Dm); and  
 a timing controller (150) for controlling the control line driver (160), the power driver (170), the scan driver (110), and the data driver (120).

30 3. The organic light emitting display as claimed in claim 2, wherein the scan driver (110) is configured to sequentially apply the scan signals to the scan lines (S1, S2, S3, Sn) during a scanning period of the periods of one frame and to concurrently apply the scan signals to the scan lines (S1, S2, S3, Sn) during the periods except for the scanning period,  
 and/or

35 wherein the data driver (120) is configured to sequentially apply the data signals to the pixels (140) corresponding to the sequentially applied scan signals during the scanning period and to concurrently apply the data signals to all of the pixels (140) through the data lines (D1, D2, Dm) during the periods except for the scanning period.

40 4. The organic light emitting display as claimed in one of the preceding claims, wherein the power comprises a first power (ELVDD) adapted to be applied to the pixels (140), and  
 wherein, when the first power (ELVDD) and the control signals are applied at a high level to the pixels (140) included in the display unit (130), the pixels (140) are configured to concurrently emit light at a brightness corresponding to the data signals pre-stored at each of the pixels (140).

45 5. The organic light emitting display as claimed in one of the preceding claims, wherein the power comprises a first power (ELVDD) and a second power (ELVSS), and the first power (ELVDD) and the second power (ELVSS) are adapted to be applied to the pixels (140).

50 6. The organic light emitting display as claimed in claim 5, wherein each of the pixels (140) comprises:

a first transistor (M1) having a gate electrode coupled to a scan line of the scan lines (S1, S2, S3, Sn), a first electrode coupled to a data line of the data lines (D1, D2, Dm), and a second electrode coupled to a first node (N1);  
 a second transistor (M2) having a gate electrode coupled to the first node (N1), a first electrode, and a second electrode;  
 55 a third transistor (M3) having a gate electrode coupled to a control line of the control lines (GC1, GC2, GC3, GCn), a first electrode coupled to the second electrode of the second transistor, (M2) and a second electrode coupled to the first power (ELVDD) ;  
 an organic light emitting diode (OLED) having an anode electrode coupled to the first electrode of the second

transistor (M2) and a cathode electrode coupled to a second power (ELVSS); and  
 a capacitor (Cst) coupled between the gate electrode of the second transistor (M2) and the first electrode of  
 the second transistor (M2),  
 wherein the first to third transistors (M1, M2, M3) are NMOS transistors.

5

7. The organic light emitting display as claimed in claim 5, wherein each of the pixels (140) comprises:

a first transistor (PM1) having a gate electrode coupled to a scan line (S) of the scan lines (S1, S2, S3, Sn), a  
 first electrode coupled to a data line (D) of the data lines (D1, D2, Dm), and a second electrode coupled to a  
 first node (N1);  
 a second transistor (PM2) having a gate electrode coupled to the first node (N1), a first electrode, and a second  
 electrode;  
 a third transistor (PM3) having a gate electrode coupled to a control line (GC) of the control lines (GC1, GC2,  
 GC3, GCn), a first electrode coupled to the first electrode of the second transistor (PM2), and a second electrode  
 coupled to the second power (ELVSS);  
 an organic light emitting diode (OLED) having a cathode electrode coupled to the first electrode of the second  
 transistor (PM2) and an anode electrode coupled to the first power (ELVDD); and  
 a capacitor (Cst) coupled between the gate electrode of the second transistor (PM2) and the first electrode of  
 the second transistor (PM2),  
 wherein the first to third transistors (PM1, PM2, PM3) are PMOS transistors.

10

15

20

8. A driving method of an organic light emitting display according to one of claims 1 through 7, the method comprising:

(a) resetting data voltages applied to a plurality of pixels (140) by concurrently applying a first power (ELVDD),  
 scan signals, control signals, and data signals, having voltage values at respective levels, to all of the pixels  
 (140) that constitute a display unit (130);  
 (b) storing a threshold voltage of a driving transistor (M2, PM2) included in the respective pixels (140) by  
 concurrently applying the first power (ELVDD), the scan signals, the control signals, and the data signals, having  
 the voltage values at respective levels, to all of the pixels (140);  
 (c) applying the scan signals sequentially to the pixels (140) coupled to scan lines (S1, S2, S3, Sn) of the display  
 unit (140) and applying the data signals to the pixels (140) through the data lines (D1, D2, Dm) corresponding  
 to the sequentially applied scan signals; and  
 (d) controlling all of the pixels (140) to concurrently emit light at a brightness corresponding to the data voltages  
 stored in the pixels (140) by concurrently applying the first power (ELVDD), the scan signals, the control signals,  
 and the data signals, having the voltage values at respective levels, to all of the pixels (140).

25

30

35

9. The driving method of the organic light emitting display as claimed in claim 8, further comprising:

(e) turning off emission of the pixels (140) by concurrently applying the first power (ELVDD), a second power  
 (ELVSS), the control signals, and the data signals, having the voltage values at respective levels, to all of the  
 pixels (140) and thus lowering a voltage of an anode electrode of an organic light emitting diode (OLED) included  
 in the respective pixels (140).

40

50

10. The driving method of the organic light emitting display as claimed in claim 8, wherein one frame is implemented  
 through (a) to (d), and  
 wherein left-eye images and right-eye images are alternately displayed during subsequent frames.

11. The driving method of the organic light emitting display as claimed in claim 10, wherein a time interval between the  
 emission periods of two subsequent frames is synchronized with a response time of a pair of shutter glasses.

12. The driving method of the organic light emitting display as claimed in one of claims 8-11, wherein each of the pixels  
 (140) comprises:

a first NMOS transistor (M1) having a gate electrode coupled to a scan line (S), a first electrode coupled to a  
 data line (D), and a second electrode coupled to a first node (N1);  
 a second NMOS transistor (M2) having a gate electrode coupled to the first node (N1), a first electrode, and a  
 second electrode;  
 a third NMOS transistor (M3) having a gate electrode coupled to a control line (GC), a first electrode coupled

55

to the first electrode of the second NMOS transistor (M2), and a second electrode coupled to the first power (ELVDD);  
5 an organic light emitting diode (OLED) having an anode electrode coupled to the first electrode of the second NMOS transistor (M2) and a cathode electrode coupled to a second power (ELVSS); and  
a capacitor (Cst) coupled between the gate electrode of the second NMOS transistor (M2) and the first electrode of the second NMOS transistor (M2).

10 13. The driving method of the organic light emitting display as claimed in claim 12, wherein, in (a), the first power (ELVDD) is applied at a low level, the scan signal is applied at a high level, and the control signal is applied at a high level,  
and/or  
wherein, in (b), the first power (ELVDD) is applied at a high level, and the scan signal and the control signal are applied at a high level, respectively.

15 14. The driving method of the organic light emitting display as claimed in one of claims 12 and 13, wherein, in (c), the control signal is applied at a low level and/or sequentially applied scan signals are applied for the duration of two predetermined time periods and overlap with each other by one time period.

20 15. The driving method of the organic light emitting display as claimed in one of claims 12-14, wherein, in (d), the first power (ELVDD) is applied at a high level, the scan signal is applied at a low level, and the control signal is applied at a high level.

25

30

35

40

45

50

55

FIG. 1

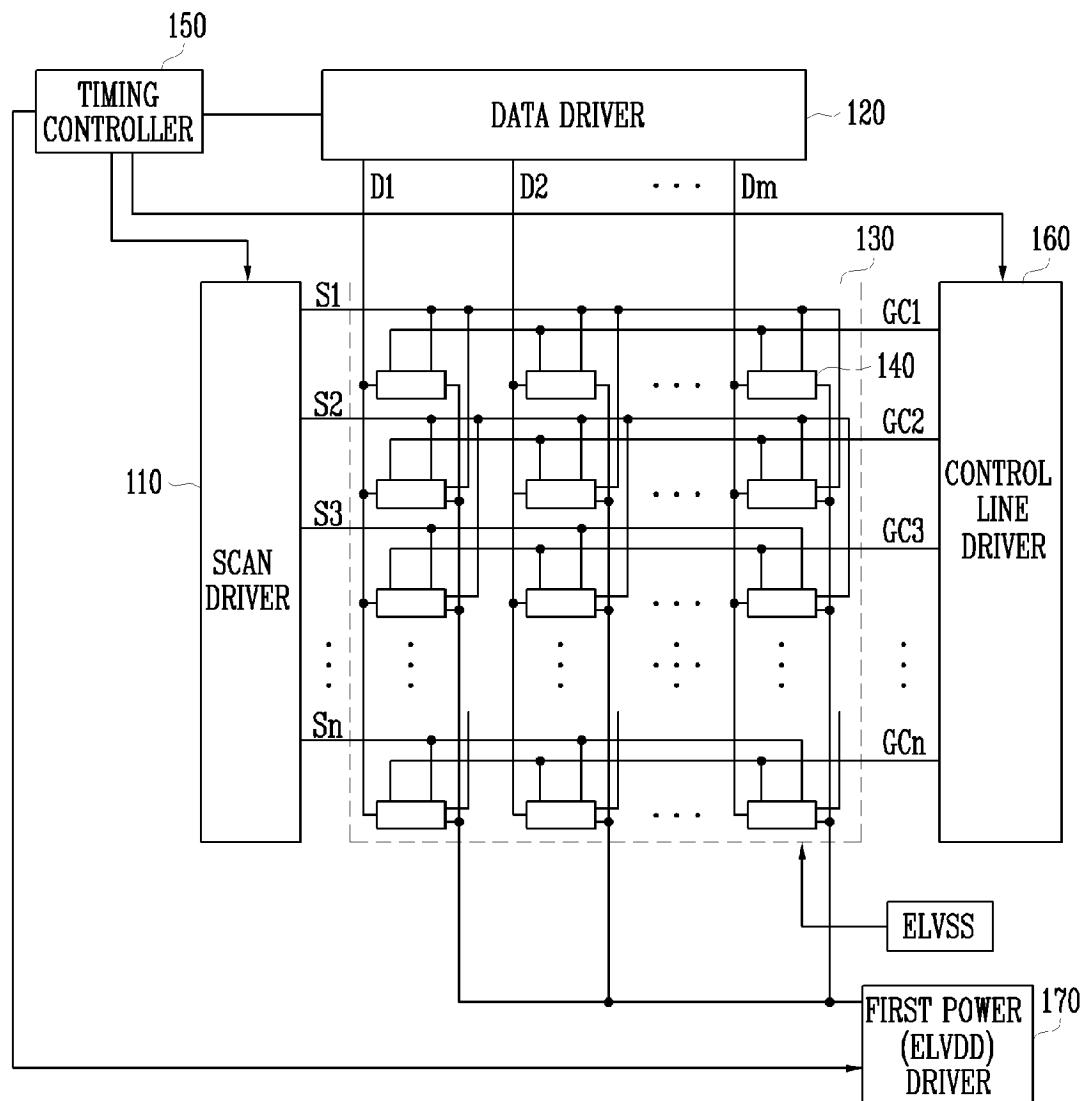


FIG. 2

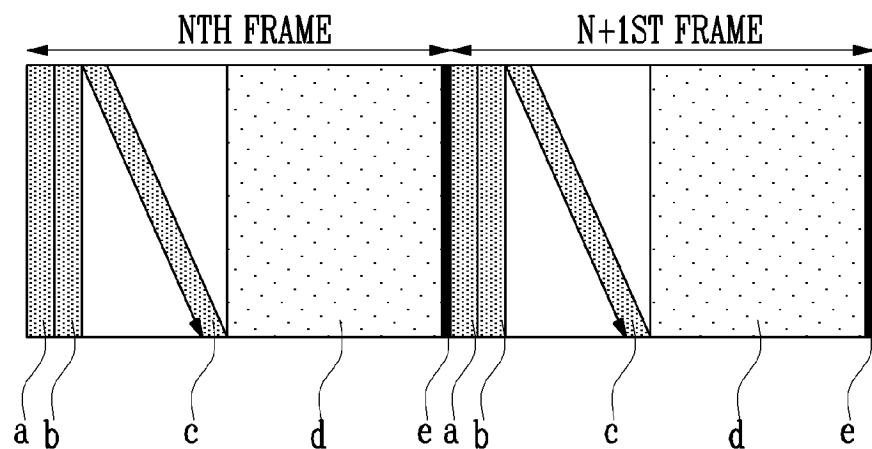


FIG. 3  
(Related Art)

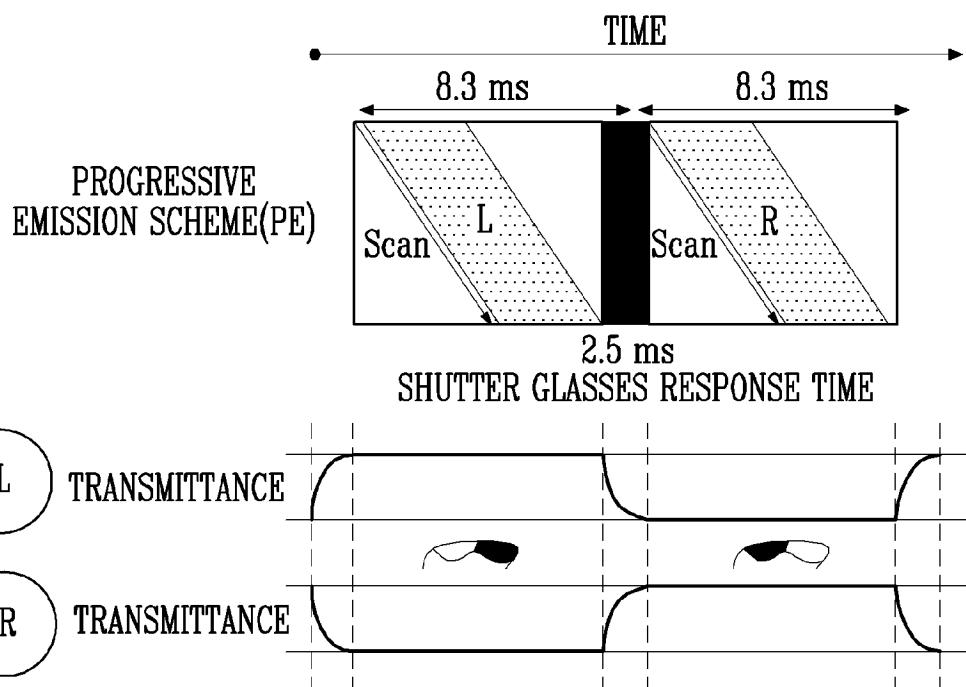


FIG. 4

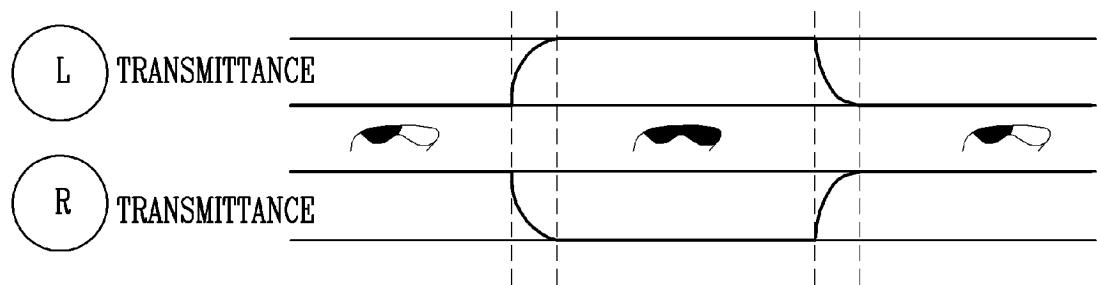
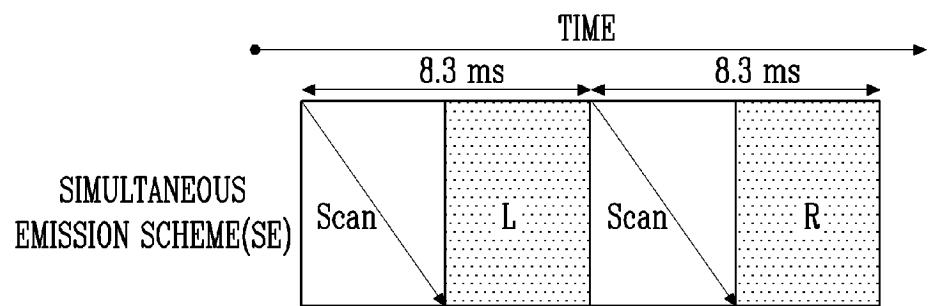


FIG. 5

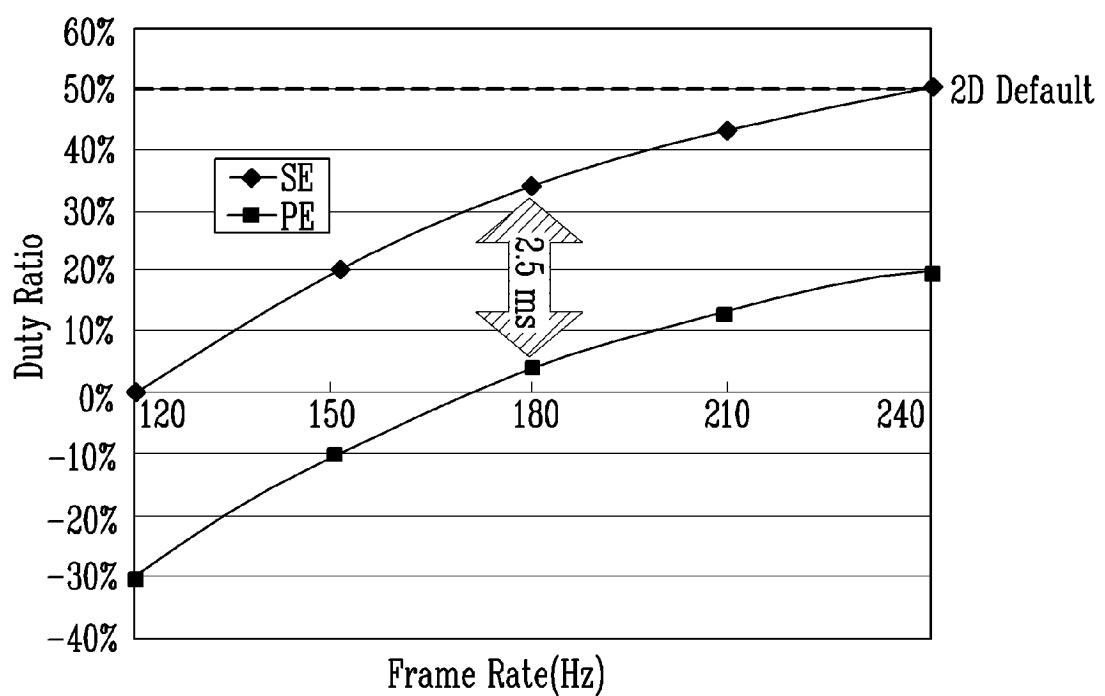


FIG. 6

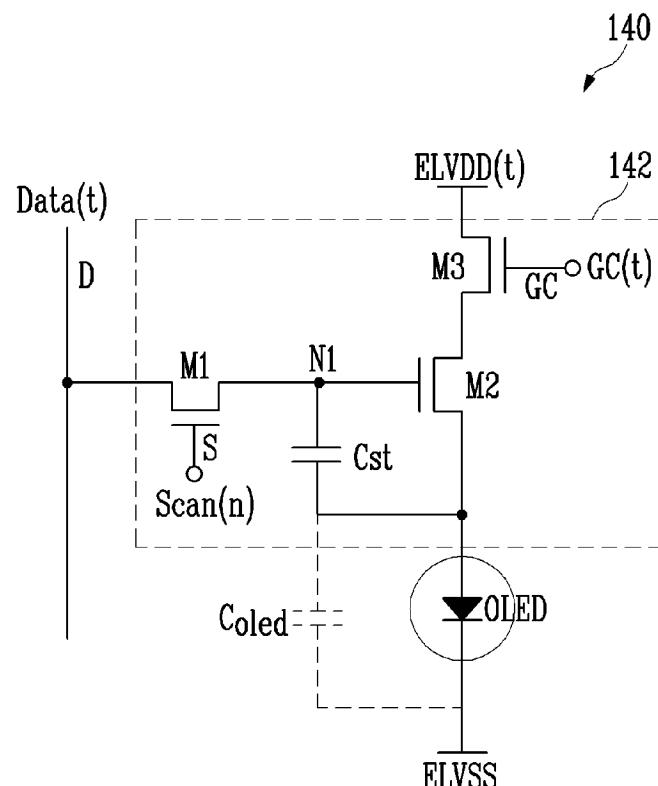


FIG. 7

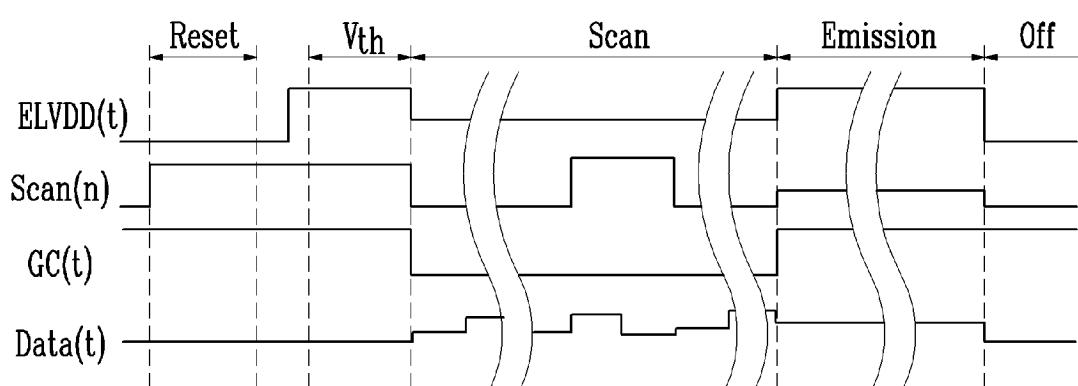


FIG. 8A

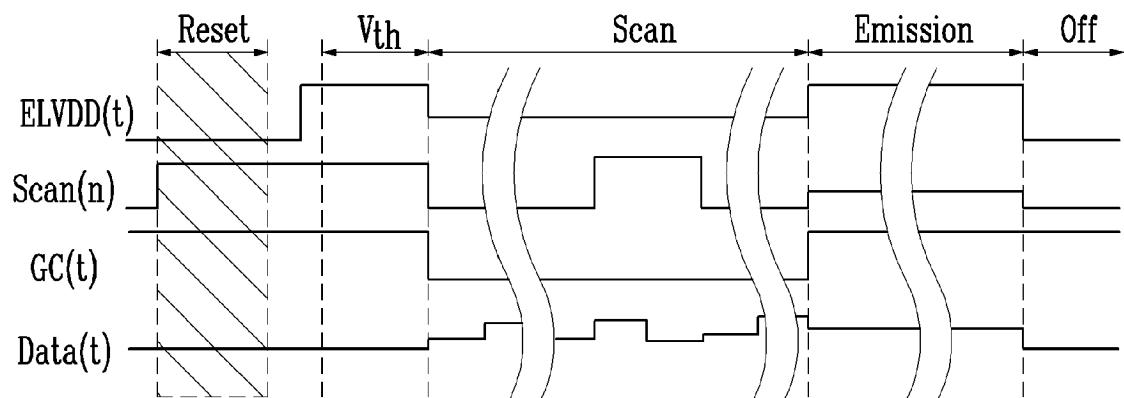
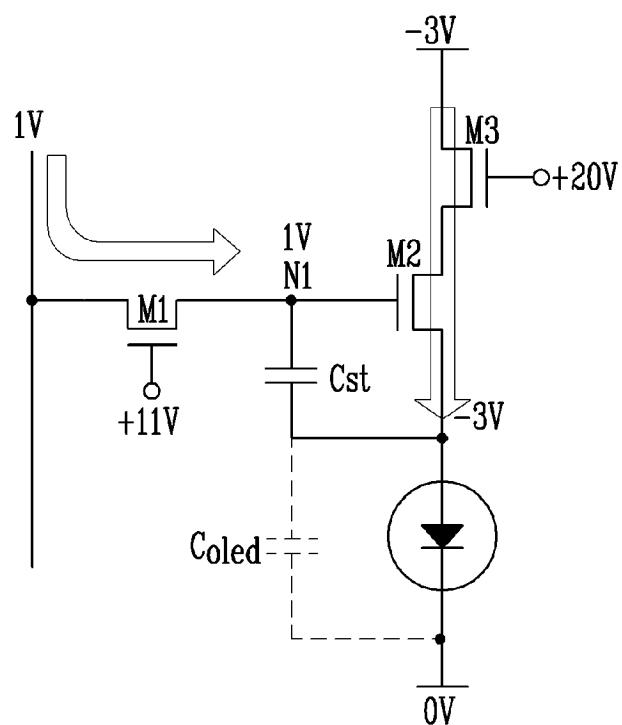


FIG. 8B

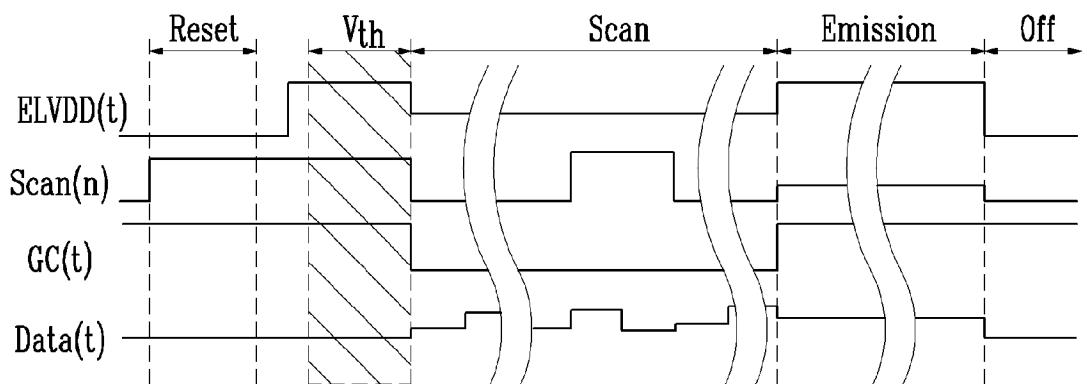
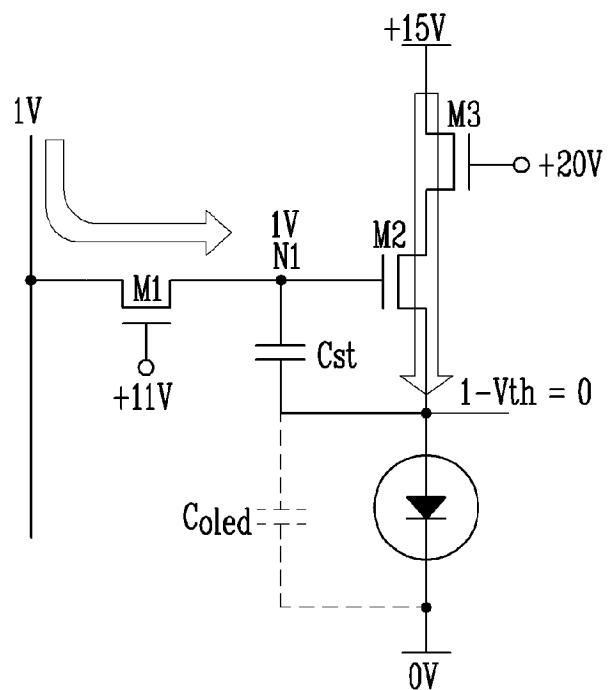


FIG. 8C

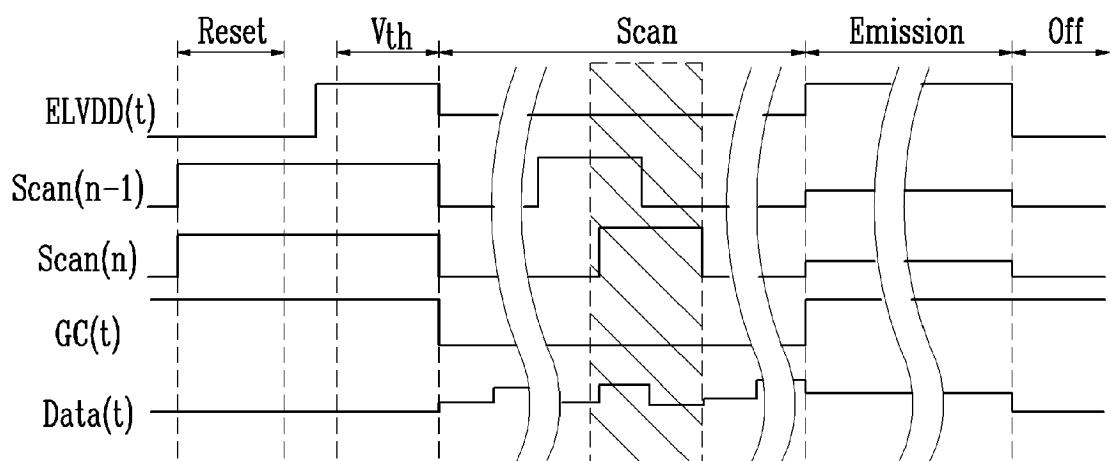
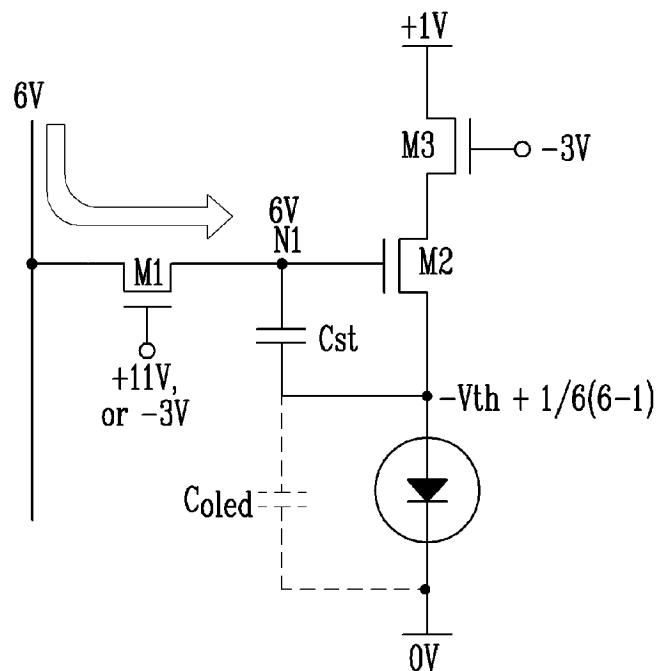


FIG. 8D

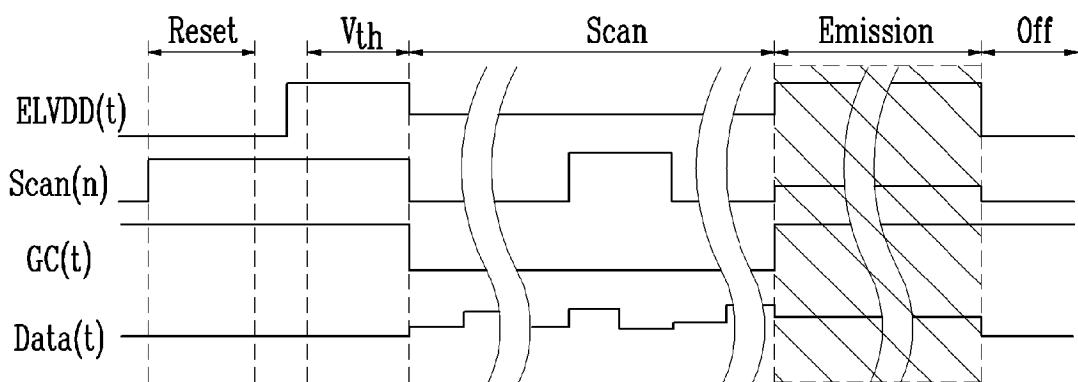
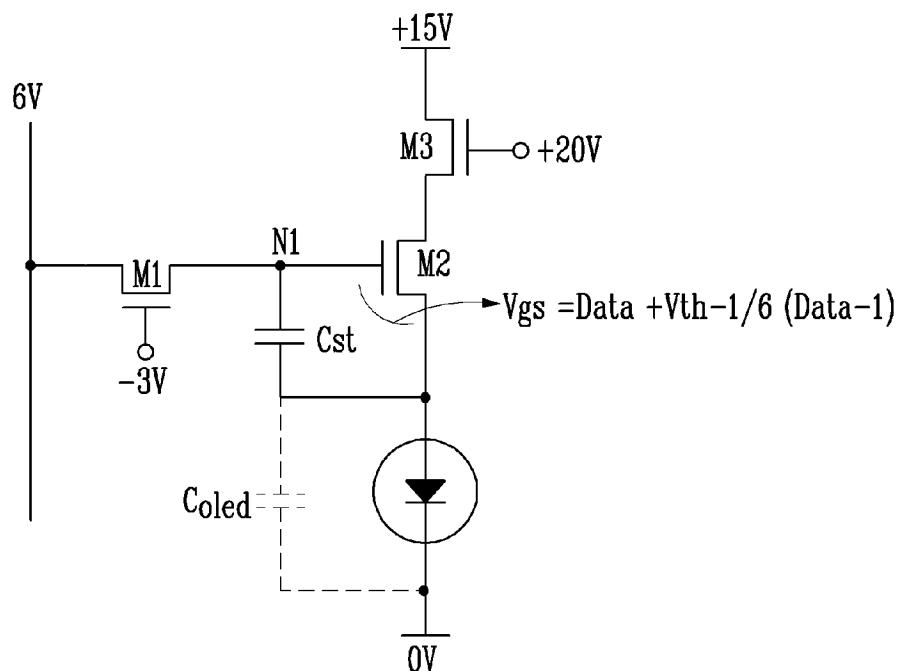


FIG. 8E



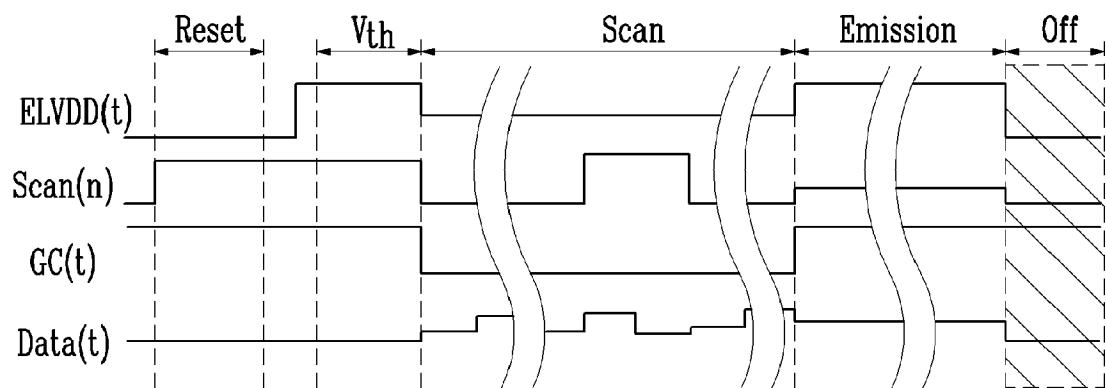


FIG. 9

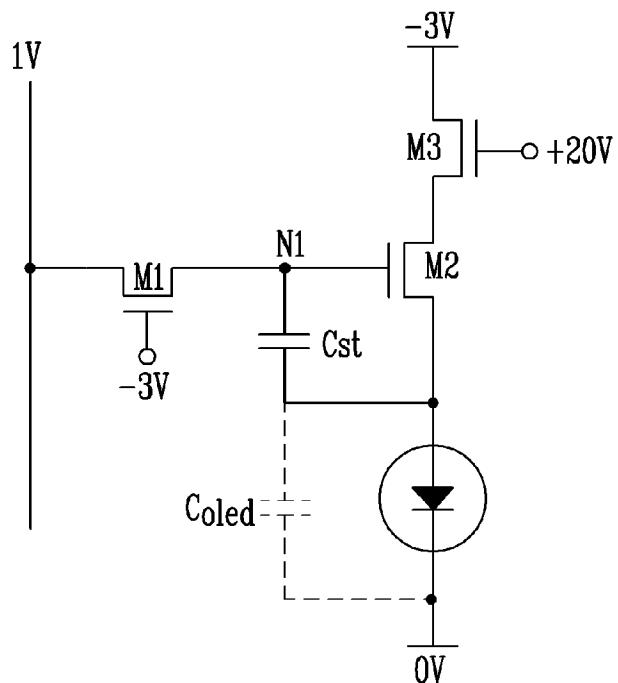

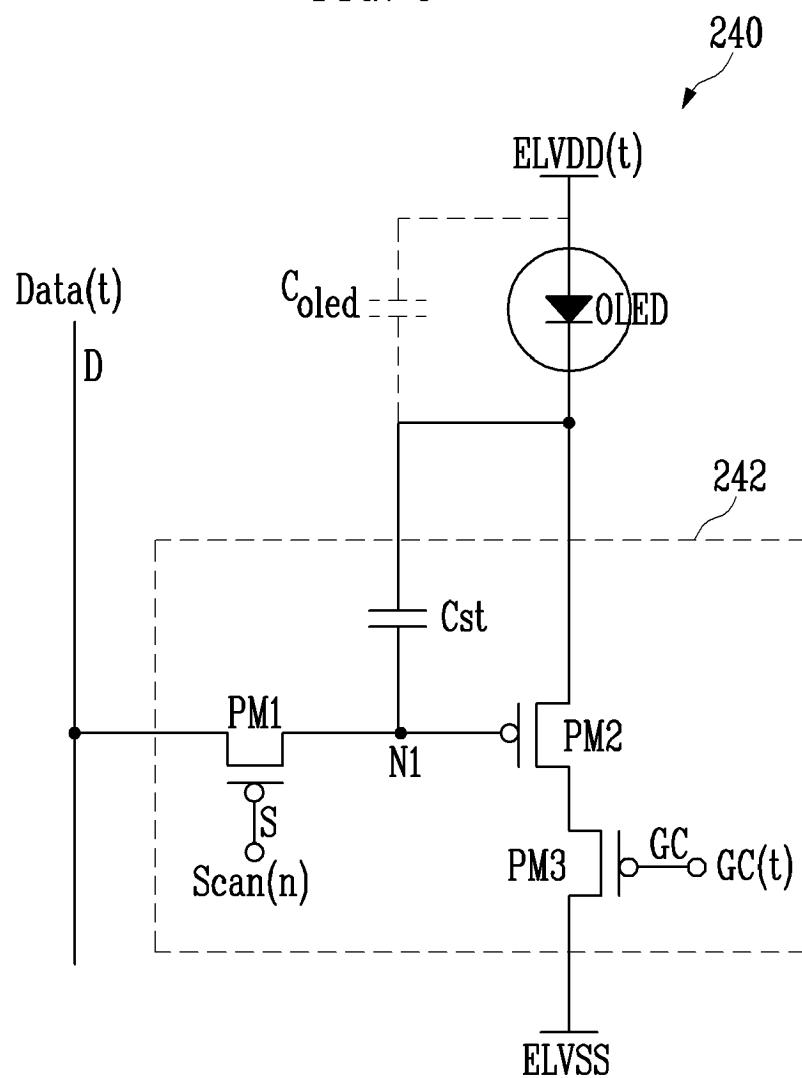

## EUROPEAN SEARCH REPORT

Application Number  
EP 10 17 1400

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (IPC)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	US 2004/174349 A1 (LIBSCH FRANK ROBERT [US] ET AL) 9 September 2004 (2004-09-09) * paragraphs [0066] - [0074], [0 86], [0 91] - [0098]; figures 2,3,7,9 *	1-9, 12-15	INV. G09G3/32
Y	-----	10,11	
X	EP 1 785 979 A2 (SONY CORP [JP]) 16 May 2007 (2007-05-16) * paragraph [0121] - paragraph [0133]; figures 29,30,37 *	1,2,4-7	
Y	----- JP 2000 112428 A (JAPAN BROADCASTING CORP) 21 April 2000 (2000-04-21) * abstract; figure 1 * * paragraph [0008] *	10,11	
	-----		
			TECHNICAL FIELDS SEARCHED (IPC)
			G09G
The present search report has been drawn up for all claims			
1	Place of search	Date of completion of the search	Examiner
	The Hague	20 October 2010	Vázquez del Real, S
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 10 17 1400

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-10-2010

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2004174349	A1	09-09-2004	CN	1530904 A		22-09-2004
			CN	101136173 A		05-03-2008
			JP	2004295131 A		21-10-2004
			TW	269258 B		21-12-2006
EP 1785979	A2	16-05-2007	KR	20070051748 A		18-05-2007
			US	2007115225 A1		24-05-2007
JP 2000112428	A	21-04-2000		NONE		

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- KR 1020090071279 [0001]

专利名称(译)	有机发光显示器及其驱动方法		
公开(公告)号	<a href="#">EP2284825A1</a>	公开(公告)日	2011-02-16
申请号	EP2010171400	申请日	2010-07-30
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星移动显示器有限公司.		
当前申请(专利权)人(译)	三星移动显示器有限公司.		
[标]发明人	LEE BAEK WOON		
发明人	LEE, BAEK-WOON		
IPC分类号	G09G3/32		
CPC分类号	H04N13/341 G09G3/003 G09G3/3225 G09G3/3233 G09G3/3266 G09G2300/0819 G09G2300/0852 G09G2300/0861 G09G2300/0866 G09G2310/063 G09G2320/043 G09G2320/0626 G09G2340/0435		
优先权	1020090071279 2009-08-03 KR		
其他公开文献	<a href="#">EP2284825B1</a>		
外部链接	<a href="#">Espacenet</a>		

### 摘要(译)

有机发光显示器以同时(或并发)发射方案驱动。有机发光显示器包括：显示单元(130)，包括耦合到扫描线(S1, S2, S3, Sn)的多个像素(140)，控制线(GC1, GC2, GC3, GCn)和数据线(D1, D2, Dm)；控制线驱动器(160)，用于通过控制线(GC1, GC2, GC3, GCn)向像素(140)提供控制信号；电源驱动器(170)，用于在一帧的多个周期期间将不同电平的电力施加到显示单元(130)的像素(140)。控制信号和功率同时提供给包括在显示单元中的像素(140)。

$$-V_{th} + \frac{Cst}{Cst + Coldd} (Data - 1) = -1 + \frac{1}{6} (6 - 1)$$