



(11) **EP 1 612 764 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.10.2017 Bulletin 2017/43

(51) Int Cl.:
G09G 3/32 (2016.01)

(21) Application number: **05012344.7**

(22) Date of filing: **05.07.2000**

(54) **Image display apparatus**

Anzeigevorrichtung mit Leuchtdioden und einem Eigenschaftenkorrekturspeicher

Dispositif d'affichage à diodes électroluminescentes utilisant une mémoire de correction de
caractéristique d'une diode LED

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **08.07.1999 JP 19455199**
25.10.1999 JP 30249399
25.10.1999 JP 30313499

(43) Date of publication of application:
04.01.2006 Bulletin 2006/01

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
00114437.7 / 1 067 505

(73) Proprietor: **Nichia Corporation**
Anan-shi Tokushima 774-8601 (JP)

(72) Inventor: **Tsuji, Ryuhei**
Anan-shi, Tokushima 774-8601 (JP)

(74) Representative: **Schumacher & Willsau**
Patentanwalts-gesellschaft mbH
Nymphenburger Straße 42
80335 München (DE)

(56) References cited:
EP-A- 0 702 347

- **PATENT ABSTRACTS OF JAPAN** vol. 1998, no. 03, 27 February 1998 (1998-02-27) -& JP 09 305146 A (PIONEER ELECTRON CORP), 28 November 1997 (1997-11-28) -& US 5 923 309 A (PIONEER ELECTRONIC CORPORATION) 13 July 1999 (1999-07-13)
- **PATENT ABSTRACTS OF JAPAN** vol. 018, no. 050 (P-1683), 26 January 1994 (1994-01-26) -& JP 05 273939 A (SHARP CORP), 22 October 1993 (1993-10-22)
- **PATENT ABSTRACTS OF JAPAN** vol. 1995, no. 11, 26 December 1995 (1995-12-26) -& JP 07 199861 A (TAKIRON CO LTD), 4 August 1995 (1995-08-04)
- **PATENT ABSTRACTS OF JAPAN** vol. 017, no. 038 (M-1358), 25 January 1993 (1993-01-25) -& JP 04 257464 A (RICOH CO LTD), 11 September 1992 (1992-09-11)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 612 764 B1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to an image display apparatus comprising a display section of a plurality of light emitting diodes arranged in an m-line by n-column matrix, a vertical driver section being operable to select each consecutive line of the display section and a source current to each line, a horizontal driver section being operable to supply driving current to each column of the display section corresponding to image data for the selected line, an image data correction section being operable to correct externally input image data according to correction stored in a correction data memory section to output corrected image data to the horizontal driver section, and to read out one line of correction data from the correction data memory section each time one line of corrected image data is output to the horizontal driver section, the correction data memory section being operable to store correction data to correct externally input image data for an LED characteristic variation of each LED, and the image data correction section comprising a buffer memory operable to store and read out one display line-worth of correction data from the correction data memory section.

[0002] Today, bright red, green, and blue (RGB) light emitting diodes (LEDs) of 1000mcd or more have been developed, and fabrication of large-scale LED displays has become possible. These LED displays have features such as low power consumption, lightness in weight, and the possibility for thin panel display. Further, demand for large-scale displays, which can be used out doors, has increased dramatically.

[0003] Practical large-scale LED displays are configured to fit the installation space by assembling a plurality of LED units. An LED unit is formed from a dot matrix array of RGB LEDs arranged on a substrate board.

[0004] Further, an LED display is provided with a driver circuit capable of driving each individual light emitting diode. Specifically, each LED control device, which transmits display data to each LED unit, is connected to the LED display, and a plurality of LED units is connected to form one large-scale LED display. The number of LED units used increases as the LED display becomes larger in scale. For example, a large-scale display can use 300 vertical x 400 horizontal, or 120,000 LED units.

[0005] The LED display uses a dynamic driver system as its driver method, and specifically, the display is connected in driven as described below.

[0006] For example, in an m x n dot matrix LED unit, each LED anode in each line is connected to a common source line, and each LED cathode in each column is connected to a common current line. The m-line common source lines are sequentially turned on for display with a prescribed period. For example, m-line common source line switching is performed via decoder circuitry based on the address signal.

[0007] However, when LEDs connected to a selected common source line were activated in related art apparatus, charge accumulated in non-activated LEDs connected to unselected common source lines. When these common source lines were then selected, excess current developed as a result of charge built-up during their inactive period. As a result of this problem, LEDs controlled to be off emitted low levels of light and sufficient image contrast could not be obtained. These types of effects caused display quality degradation.

[0008] Further, in an LED display, corrected image data are typically used for each LED device to display a high quality image. This is because device-to-device LED variation in brightness, for example, is relatively large.

[0009] More specifically, the control circuit has a read-only-memory (ROM) correction data memory section to store correction data corresponding to each LED device. Corrected image data based on the correction data stored in ROM has been used for display.

[0010] However, since correction data were stored in ROM in related art apparatus, correction data could not be re-written. Consequently, related art apparatus had the problem that it was necessary to provide a re-writable memory device separate from ROM when different correction data were required.

[0011] Further, to accurately represent image data on an LED display, the light emission characteristics (driving current vs. brightness characteristics) of each LED device in the image display apparatus must be uniform. However, since LEDs are fabricated on wafers by semiconductor technology, light emission characteristic variation results from fabrication lot-to-lot, wafer-to-wafer, and chip-to-chip. Therefore, it is necessary to correct image data amplitude to compensate for light emission characteristic differences of the LED for each pixel.

[0012] EP-A-0 702 347 discloses an LED display device and a method for adjusting brightness of the LEDs. The LED display device has an LED array with a dot matrix of LEDs, a matrix driver unit for driving the LEDs, and a control unit for controlling the matrix driver unit. The display device has a data storage unit for storing brightness-corrected data prepared according to the characteristic brightness of each of the LEDs, selects the brightness-corrected data stored in the data storage unit according to externally provided display data, and drives the LEDs according to the selected brightness-corrected data.

[0013] JP-A-7 199 861 discloses a light emitting diode display unit including an EEPROM, an I/O control circuit and a PWM signal generating circuit, wherein an emission light intensity value is stored in the EEPROM. The I/O control circuit latches the emission light intensity value read out from the EEPROM to output to the PWM signal generating circuit. When a write-in signal becomes active, the circuit makes a data signal latched in a latch circuit to be the emission light intensity value to rewrite it in the storage content of the EEPROM. Since a testing display can be made by connecting the light emitting di-

ode display unit with a personal computer capable of an interactive procession and by transmitting testing data to the computer, the emission light intensity is adjusted by a remote operation in accordance with this display state.

[0014] A further example of related art image data correction is described as follows.

[0015] Turning to Fig. 12, a block diagram of an example of a related art LED display is shown. In Fig. 12, 101 is an m-line n-column LED matrix, 107 is a control circuit, 105 is a microprocessor unit (MPU), 106 is a ROM to store correction data, 102 is a common driver circuit, 103 are horizontal driver circuits, 109 are correction circuits to correct image data, and 110 are random access memory (RAM) to temporarily store correction data. The horizontal driver circuits 103, correction circuits 109, and RAM 110 are integrated in LED driver integrated circuits (IC's) 104 (k) provided for each column of the LED matrix ($k=1$ to n).

[0016] First, prior to display illumination, correction data for the $m \times n$ pixels stored in ROM are transferred to a high speed buffers. RAM 110 are used as the high speed buffers. Correction data transfer is accomplished as follows. First, correction data held in ROM 106 are read out by the MPU 105. The MPU 105 sequentially selects LED driver IC's 104 (k) via the address bus 111 and sequentially outputs one columns-worth, or m-pixels, of correction data corresponding to each selected column. The correction data output is input to each LED driver IC 104 (k) via the correction data bus 112 and stored in RAM 110 internal to the LED driver IC 104 (k).

[0017] When LEDs are illuminated, correction data stored in RAM 110 are sequentially read out by correction circuits 109. The value of input image data (IMDATA) is increased or decreased for each pixel based on the correction data to achieve image data correction. Corrected image data are output to the driver circuits 103, and the driver circuits 103 produce driving current for each LED based on the corrected image data.

[0018] However, in the related art LED display described above, a total of $m \times n$ pixels-worth of correction data must be stored in the buffers, or RAM 110, and as display pixel count increases, very large RAM capacity becomes necessary. Further, the operation of correction data read-out from RAM 110 to the correction circuits 109 becomes complicated as the amount of RAM increases. In addition to these problems, both the address bus 111 and the data bus 112 must branch to, and connect with each of the n driver IC's 104 (1 to n) making wiring complex and peripheral circuitry large in area.

[0019] Thus, the object of the present invention reflects consideration of these problems, and is to provide an image display apparatus which can reduce the amount of data stored in the buffers, and can accomplish image data correction with a simple circuit structure.

[0020] The above and further objects and features of the invention will more fully be apparent from the following detailed description with accompanying drawings.

SUMMARY OF THE INVENTION

[0021] An image display apparatus is provided in accordance with that claimed in independent claim 1. An image data correction section thereof can read out the next line of correction data from the correction data memory section while it outputs one line of corrected image data to the horizontal driver section. This prevents any display time lag between lines due to image data correction. In the image display apparatus of the present invention, two stages of interconnected registers are provided as buffer memory, both of which are capable of storing one line of correction data. When the first register outputs one line of correction data, the next line of correction data is read into the second register. Each time output and input of one line of correction data is completed, correction data from the second register can be transferred to the first register. With this system, image data can be corrected with a simple circuit structure.

[0022] The image data correction section reads out one line of correction data from the correction data memory section each time it outputs one line of corrected image data to the horizontal driver section. In this system, the amount of correction data that must be temporarily retained in the image data correction section can be reduced, large amount of memory such as random access memory (RAM) does not need to be used as buffer memory, and image data can be corrected via simple circuit structure.

[0023] In the image display apparatus of the present invention, shift registers can be provided as buffer memory, and correction data can be read via the shift registers by direct sequential shifting one bit at a time. This eliminates the need for data bus line branching to transfer correction data to buffer memory in the correction data memory section, and it also eliminates the need for an address bus to select buffer memory. Therefore, wiring area can be reduced and wiring layout options can be increased.

[0024] In the image display apparatus described above, the second register can be a shift register, and correction data can be read by direct sequential shifting one bit at a time. This eliminates the need for data bus line branching to transfer correction data, and it also eliminates the need for an address bus to select buffer memory.

[0025] The image display apparatus of the present invention uses LEDs as the light emitting devices. In this image display apparatus, LED display peripheral circuit structure can be simplified and the display apparatus can be made compact.

[0026] In the image display apparatus of the present invention the starting address is issued for reading correction data corresponding to the line number determined from a vertical synchronization signal (Vsync) and a horizontal synchronization signal (Hsync).

[0027] Finally, the image display apparatus of the present invention can display images by dividing the en-

tire image into parts. Since the image display apparatus of the present invention can simplify peripheral circuit structure, it is suitable for use in image data units which display part of an entire image, for example, it is suitable for LED units used in large-scale LED displays.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028]

Fig. 1 is a conceptual drawing showing the structural format of an image display apparatus embodiment. Fig. 2 is a block diagram showing a specific example of the image display apparatus shown in Fig. 1.

Fig. 3 is a block diagram showing another specific example of the image display apparatus.

Fig. 4 is a timing diagram showing common source driver and switching circuitry control for the image display apparatus shown in Fig. 3

Fig. 5 is a conceptual drawing showing the structural format of an example image display apparatus which is not an embodiment of the invention.

Fig. 6 is a block diagram showing a specific example of the image display apparatus shown in Fig. 5.

Fig. 7 is a block diagram showing the detailed structure of an electrically erasable programmable ROM (EEPROM) and serial communication interface for the specific example of Fig. 6.

Fig. 8 is a conceptual drawing showing the structural format of the image display apparatus of an embodiment of the present invention.

Fig. 9 is a block diagram showing a specific example of the image display apparatus shown in Fig. 8.

Fig. 10 is a timing diagram showing correction data transmission timing for the image display apparatus shown in Fig. 9.

Fig. 11 is an abbreviated drawing showing the relation between control line number and ROM read-out beginning address for the image display apparatus shown in Fig. 9.

Fig. 12 is a block diagram showing the circuit structure for a related art image display apparatus.

DETAILED DESCRIPTION OF THE INVENTION

[0029] Fig. 1 is a conceptual drawing illustrating an image display apparatus provided with a switching circuit section to discharge accumulated charge in the dot matrix. The display apparatus of Fig. 1 is provided with an LED dot matrix 10, a current source switching circuit 1, a constant current control circuit section 3, and a switching circuit section 2. The display apparatus of Fig. 1 uses LEDs as light emitting devices, but devices other than LEDs may also be used as the light emitting devices.

(1) The LED dot matrix 10 is a plurality of LEDs 4 arranged in an m-line, n-column matrix. The cathode of each LED 4 in each column is connected to a

current line 6. The anode of each LED 4 in each line is connected to a common source line 5.

(2) The current source switching circuit 1 is provided with m-switching circuits which correspond to, and are connected to each respective common source line 5. The current source switching circuit 1 connects a current source to the common source line 5 selected by the address signal for the illumination period specified by the input illumination control signal. This supplies current to the LEDs 4 connected to the selected common source line 5.

(3) The constant current control circuit section 3 is provided with memory circuits to store n-sets of sequentially input pixel level data. The constant current control circuit section 3 drives the current lines with a pixel level width, corresponding to the pixel level data stored in each memory circuit, over the time interval specified by the input illumination control signal.

(4) The switching circuit section 2 floats the opposite end of each common source line over the illumination time interval of the input illumination control signal, and grounds the opposite end of each common source line during the off interval (non-illumination interval) of the input illumination control signal.

[0030] In a display apparatus with the above configuration, on-off switching of the current source switching circuit 1, the constant current control circuit section 3, and the switching circuit section 2 are all performed according to the illumination control signal. During the illumination interval of the illumination control signal, the current source switching circuit 1 and the constant current control circuit section 3 are activated, while the switching circuit section 2 is deactivated (each switch connected to the opposite end of a common source line is off). When activated, the current source switching circuit 1 connects a common source line selected by the input address signal to the current source. At this time, the constant current control circuit section 3 drives the current lines with a pixel level width corresponding to pixel level data stored in each memory circuit. In this manner, LEDs 4 connected to the common source line selected by the address signal are illuminated with the pixel level width corresponding to the associated pixel level data. Further, in the deactivated state, both the current source switching circuit 1 and the constant current control circuit section 3 are deactivated, while the switching circuit section 2 is activated. Consequently, during off intervals indicated by the illumination control signal, charge accumulated by each LED or its associated connections is discharged to ground via each closed switch in the switching circuit section 2. Therefore, each LED and its associated connections do not accumulate charge under these conditions.

[0031] Subsequently, illumination intervals and off intervals are sequentially repeated. LEDs disposed in each line are sequentially illuminated during each illumination

interval, and the desired image is displayed on the LED dot matrix. With this system, charge accumulated by LEDs (or their associated connections) which are not illuminated during an illumination interval, is discharged during the next off interval. Consequently, during the illumination interval, LED illumination can be controlled with each LED and its associated connections always in a discharged state with no unwanted charge build-up.

[0032] Accordingly, the display apparatus of Fig. 1 can obtain sufficient image contrast, and high quality display is possible. This is because illumination control can be accomplished without the effects of charge accumulation.

[0033] Turning to Fig. 2, the following describes a specific configuration of the display apparatus of the present invention. In Fig. 2, items which are the same as those in Fig. 1 are labeled with the same part number.

[0034] As shown in Fig. 2, the current source switching circuit 1 of this specific embodiment comprises a decoder circuit 11 and common source drivers 12. When the illumination control signal is in a digital signal low state (LOW), the decoder circuit 11 controls the common source drivers 12 on or off for current source connection to the common source line 5 selected by the address signal. When the illumination control signal is in a digital signal high state (HIGH), the current source switching circuit 1 controls the common source drivers 12 via the decoder circuit 11 to disconnect all common source lines from the current source.

[0035] When the illumination control signal is LOW, this type of current source switching circuit 1 connects only the common source line 5 of the LED dot matrix 10 selected by the address signal to the current source.

[0036] The constant current control circuit section 3 is provided with a shift register 31, memory circuits 32, a counter 33, data comparitors 34, and a constant current driver section 35. In this type of constant current control circuit section 3, pixel level data are shifted n-times by the shift register in synchronization with a shift clock. Pixel level data corresponding to each of the n-current lines are clocked into, and stored in respective memory circuits 32 in response to a latch clock signal. When the illumination control signal is LOW, the output signal from data comparitors 34 is input to the constant current driver section 35. The data comparitors compare pixel level data with the value output from a counter 33 clocked by a pixel level reference clock used as the counter clock. The constant current driver section 35 controls the flow of constant current in each current line for a driver pulse width interval corresponding to the pixel level data value.

[0037] As described above, the current source switching circuit 1 and the constant current control circuit section 3 perform LED display pixel level control when the illumination control signal is LOW. When the illumination control signal is HIGH, the LED dot matrix is not connected to the current source switching circuit 1 or the constant current control circuit section 3.

[0038] When the illumination control signal is HIGH,

the switching circuit section 2 turns on switches to ground all common source lines 5. When the illumination control signal is LOW, switches are turned off to disconnect (float) all common source lines 5.

[0039] The display apparatus of Fig. 2 configured as described above drives the LED dot matrix 10 with constant current to illuminate prescribed LEDs when the illumination control signal is LOW. When the illumination control signal is HIGH, constant drive of the LED dot matrix 10 is suspended. In this state, accumulated residual charge in each LED of the LED dot matrix 10 and its associated connections is discharged via the switching circuit section 2.

[0040] The embodiment of Fig. 2 described above is organized to drive the LED dot matrix 10 with constant current when the illumination control signal is LOW, and to turn the switching circuit section 2 on when the illumination control signal is HIGH. However, the present invention is not restricted to this system, and control may also be performed with the LOW level and HIGH level reversed.

[0041] Turning to Fig. 3, another embodiment of the image display apparatus of the present invention is shown. Elements of Fig. 3 which are the same as those of Figs. 1 and 2 are labeled with the same part number. The image display apparatus shown in Fig. 3 is provided with a switching decoder circuit 13, which separately controls each switch SW1-6 of the switching circuit section 2. the switching decoder circuit 13 controls each switch SW1-6 of the switching circuit section 2 ON and OFF based on input signals such as the address signal and the illumination control signal. When the illumination control signal is logic HIGH, the switching decoder circuit 13 controls only the switch selected by the address signal ON to ground only the common source line connected to that switch. At this time, all remaining switches not selected by the address signal are OFF, and all remaining common source lines connected to those switches are left floating.

[0042] The timing diagram of Fig. 4 shows display apparatus control for the current source switching circuit 1 common source drivers 12 and for each switch SW1-6 of the switching circuit section. The common lines 1-6 shown in Fig. 4 are the common source lines connected to the corresponding switches SW1-6 of the switching circuit section 2.

[0043] As shown in Fig. 4, when the illumination control signal is logic LOW, the current source switching circuit 1 controls the common source drivers 12 to connect only the common source line 5 selected by the address signal to the current source. Further, when the illumination control signal is logic HIGH, the switching decoder circuit 13 turns only the switch selected by the address signal ON to ground that common source line. For example, when the address signal is 0 and the illumination control signal is LOW, common line 1 is controlled ON, and the current source is connected only to that common source line. At this time, all the switches SW1-6 are controlled OFF.

Next, when the address signal is 0 and the illumination control signal goes HIGH, common line 1 is controlled OFF, in addition only SW1 connected to the other end of common line 1 is controlled ON, and only that common source line is grounded. When an illuminated LED goes to the inactive state (not illuminated), the switching decoder circuit 13 immediately controls the switching circuit section 2 to ground the common source line connected to that LED. This is done to effectively prevent accumulation of charge when an illuminated LED is turned OFF.

[0044] In the manner described above, common source lines 1-6 and switches SW1-6 are selected according to the address signal, and the selected common source lines and switches are controlled ON or OFF by LOW and HIGH logic levels of the illumination control signal. By successive repetition of LED illumination and common source line grounding this image display apparatus displays a prescribed image on the LED dot matrix. In this display apparatus, only the switch connected to the selected common source line is turned ON. Therefore, low level current flow through unselected line LEDs is reliably prevented, and low level illumination of these unselected LEDs can be prevented.

[0045] Fig. 5 is a block diagram showing the overall conceptual structure of an image display apparatus provided with a correction data memory section comprising a read-only first memory bank and a writable second memory bank. The image display apparatus of Fig. 5 is provided with a display section 21 of light emitting devices arrayed in an m-line by n-column matrix, a correction data memory section 26 to store correction data corresponding to each respective light emitting device, and control and driver circuitry to correct input image data based on the correction data and to display an image on the display section 21 using the corrected image data. The control and driver circuitry is provided with a vertical driver section 22, a horizontal driver section 23, image data correction section 24, control section 25, image data input section 27, communication control section 28, and buffer memory 20. In this image display apparatus, image data input to the image data input section 27 are transferred to the control section 25.

[0046] The correction data memory section 26 connected to the control section 25 has a first memory bank and a second memory bank. For example, the correction data memory section 26 may be an EEPROM (non-volatile memory in which data can be electrically erased or re-written). First correction data, such as data to correct brightness variation for each pixel are stored in the first memory bank. Second correction data are stored in the second memory bank.

[0047] In this comparative example which is not part of the claimed invention, brightness variation correction data are used as an example of correction data, but the present invention is not restricted to this type of correction data.

[0048] The image data correction section 24 corrects image data for each pixel input via the image data input

section 27 and the control section 25 according to first correction data or second correction data for each respective pixel input from the control section 25 and buffer memory 20. The image data correction section 24 outputs this corrected data to the horizontal driver section 23 as pixel level data corresponding to each pixel. The buffer memory 20 for this image display apparatus embodiment has (1) through (n) memory units 20 corresponding to each of 1 through n columns.

[0049] The horizontal driver section 23 is provided with n memory units corresponding to each of the n columns. Input pixel level data corresponding to each pixel are stored in memory provided for the column containing that pixel. The horizontal driver section 23 drives a prescribed current line for the pixel level width corresponding to the pixel level data stored in memory in response to a control signal from the control section 25.

[0050] Further, the vertical driver section 22 is provided with m-switching circuits connected to each of the m-common source lines. The vertical driver section 22 connects a current source to a specified common source line according to a control signal from the control section 25.

[0051] As described above, the control section 25 reads first correction data or second correction data from the correction data memory section 26 and stores the data in buffer memory 20. The control section 25 also controls data input-output timing for buffer memory 20 and the image data correction section 24. The control section 25 also controls switching to connect common source lines with the current source in the vertical driver section 22. Finally, the control section 25 controls switching to drive current lines in the horizontal driver section 23. In this manner, the control section 25 sequentially illuminates each pixel in the display section 21 and displays an image corresponding to the input image data on the display section 21.

[0052] In particular, the image display apparatus of this comparative example which is not part of the claimed invention has the following features.

(1) The correction data memory section 26 is provided with a first memory bank containing pre-stored first correction data corresponding to each pixel, and a second re-writable memory bank.

(2) The image display apparatus is provided with a communication control section 28. The communication control section 28 allows writing of second correction data, which are different than first correction data, to the second memory bank, and forbids writing to the first memory bank.

(3) The control section 25 can select either first correction data stored in the first memory bank or second correction data stored in the second memory bank, and store it in buffer memory 20.

[0053] Consistent with these features, the image display apparatus of Fig. 5 can use the re-writable second memory bank to store second correction data, which are

different than first correction data, while avoiding erasure of first correction data retained in the first memory bank. Consequently, it is possible to correct image data depending on requirements by selecting either first correction data or second correction data.

Embodiment (brightness correction data two bank correction control circuit, Fig. 6)

[0054] The following describes an embodiment of the image display apparatus with reference to Fig. 6. The image display apparatus of the present embodiment is provided with an LED dot matrix 41 as the display section, a common driver 42 as the vertical driver section, EEPROM 46 as the correction data memory section, the correction circuit 49 of LED driver IC' s 44 as the image data correction section, the driver section 43 of LED driver IC' s 44 as the horizontal driver section, a command control section 47 and control section 45 as the control section, a serial communication interface 48 as the communication control section, and the shift register 402 and register 401 of LED driver IC' s 44 as the buffer memory.

[0055] The command control section 47 inputs a common source line selection signal, LINE ADR, to the common driver 42 and an illumination control signal, BLANK, to each driver section 43 and correction circuit 49.

[0056] In the present embodiment, the EEPROM 46 comprises, for example, a BANK0, in which correction data are written at the factory at shipping time, and a BANK1, in which the user can write correction data after shipping. The control section 45 selects correction data from either BANK0 or BANK1 in response to a control signal from the serial communication interface 48. In this embodiment, write-protect settings are made to forbid the user from re-writing data to BANK0, in which correction data are written at the factory at shipping time.

[0057] The serial communication interface 48 in this embodiment performs various processing according to commands embedded in received signals. Control of reading and writing to the EEPROM 46 is described below.

[0058] The following details EEPROM 46 structure and the serial communication interface 48 configuration for controlling EEPROM 46 reading and writing. As shown in Fig. 7, the serial communication interface 48 is configured with a write-protect control section 48f comprising an address register 48b, a control register 48e, and AND logic circuits 48c and 48d, in addition to a command control 48a.

[0059] The input signal, RXD, to the serial communication interface 48 includes commands, which instruct data to be written to the EEPROM 46 (write commands), and writable communication data, which are input to the command control section 48a. As shown in Fig. 7, the writable communication data includes starting address data (Start Address in Fig. 7) specifying the location to write data to, and the data to be written (WRITE DATA in Fig. 7).

[0060] When an RXD input signal containing a write command is received by the serial communication interface 48, the command control section 48a outputs command data to remove write-protection (WP set-remove command data) to the control register 48e. The command control section 48a also outputs the highest order bit, A12, of the starting address data to the address register 48b, and a logic 1 to the AND logic circuit 48c. Further, the command control section 48a outputs the writable communication data to the address decoder 46a of the EEPROM 46.

[0061] Here, when the highest order bit, A12, is 0, BANK0 is indicated as the ROM area to write to, and when the highest order bit, A12, is 1, BANK1 is indicated as the ROM area to write to.

[0062] In the present invention, the EEPROM 46 may comprise two or more memory banks. In the case of more than two memory banks, the highest order two or more bits can be used to indicate the applicable memory bank.

[0063] The control register 48e is pre-set to the write-protect mode and normally outputs a logic 0 indicating the write-protect mode to the AND logic circuit 48d. However, when command data (WP set-remove command data) indicating removal of write-protection are input from the command control section 48a, a logic 1 indicating removal of write-protection is output to the AND logic circuit 48d.

[0064] When a logic 1 is input via the address register indicating BANK1, and the control register 48e issues a logic 1 to remove write-protection, the AND logic circuit 48d outputs a logic 1 to AND logic circuit 48c.

[0065] When the command control section 48a issues a logic 1 and a logic 1 is input from AND logic circuit 48d, AND logic circuit 48c outputs a logic 1 to the XWP terminal of the EEPROM 46. At all other times the AND logic circuit 48c outputs a logic 0. When a logic 1 is input to the XWP terminal of the EEPROM 46, write-protection is removed (WP-OFF). When a logic 0 is input to the XWP terminal of the EEPROM 46, write-protection is maintained (WP-ON).

[0066] The XWP terminal is the write-protect terminal of the EEPROM 46 and data writing is made valid or invalid at this terminal. When XWP=0 (LOW), data writing to the EEPROM is invalid and the write-protect mode is set. When XWP=1 (HIGH), data writing to the EEPROM is valid and the write-protect mode is not set.

[0067] Switching between BANK0 and BANK1 at the EEPROM 46 is accomplished by the address decoder 46a based on the highest order bit A12 contained in the writable communication data. Further, memory bank selection for read-out is performed in the same manner as for data writing using the highest order bit A12. Namely, memory bank selection can be performed by the EEPROM 46 address decoder 46a based on the highest order bit A12 contained in the writable communication data, which are input from the command control section 48a.

[0068] In Fig. 7, an example of a 13 bit wide address bus is shown, but memory bank selection by the highest

order bit can be performed in the same manner for more than 13 bits or less than 13 bits.

[0069] In the EEPROM46 and serial communication interface 48 configuration described above, EEPROM 46 BANK0 correction data are always protected, while BANK1 correction data can be re-written according to the RXD signal. Further, either BANK0 or BANK1 can be selected to read correction data from.

[0070] Control of the EEPROM 46 by direct connection of the serial communication interface 48 was described above. However, the EEPROM 46 can be controlled in the same fashion by connection of the serial communication interface 48 to the EEPROM 46 via the intervening control section 45, as shown in Fig. 6. Specifically, each control signal from the serial communication interface 48 to the EEPROM 46 is simply input to the EEPROM 46 via the control section 45 in the same fashion as for direct connection. Correction data read from the EEPROM 46 are branched to the shift registers 402 of the LED driver IC's 44 by the control section 45 connected between the EEPROM 46 and the serial communication interface 48.

[0071] Further, the RXD signal received by the serial communication interface 48 may be input from an external controller (not illustrated). As shown in Fig. 6, data such as correction data read from the EEPROM 46 can be transmitted, for example, to an external controller by the serial communication interface 48 as the TXD signal.

[0072] In the display apparatus embodiment of Fig. 6 described above, image data, the vertical synchronization signal, Vsync, and the horizontal synchronization signal, Hsync, are input to the control section 47 via an image data input section (not illustrated). Input image data are transferred from the command control section 47 to the LED driver IC 44 correction circuits 49. Further, the vertical synchronization signal, Vsync, and the horizontal synchronization signal, Hsync, are input to the control section 45, the correction circuit 49 and driver section 43 of each LED driver IC 44, and the common driver 42.

[0073] The control section 45 controls each element of the display apparatus in synchronization with the input vertical synchronization signal, Vsync, and horizontal synchronization signal, Hsync. Further, correction data read from the EEPROM 46 BANK0 or BANK1 depending on the input signal to the serial communication interface 48, are sequentially transferred to the shift registers 402 according to control section 45 instructions. After one lines-worth of correction data are transferred to the shift registers 402, the data are input to respective correction circuits 49 via corresponding registers 401. Specifically, image data and correction data corresponding to that image data are input to the correction circuits 49.

[0074] Image data input to the correction circuits 49 are corrected by the correction circuits 49 according to the correction data. The result is then taken as the pixel level data, and input to each driver section 43. Based on the corrected image data (pixel level data), prescribed LED lines of the LED dot matrix 41 are illuminated by the common driver 42 and each driver section 43 to display

an image according to the image data.

[0075] In the embodiment of the image display apparatus described above, correction data stored in BANK0 of the EEPROM 46, for example, correction data written at the factory at shipping time, can be retained without erasure. The re-writable BANK1 can be used, for example, by the user to store correction data revised to account for the environment of operation. Depending on requirements, it is possible to select either correction data set to correct the image data.

[0076] Further, in this configuration of the embodiment of the present invention, a single memory device such as an EEPROM can be used instead of providing two memory devices such as a ROM and an EEPROM. Therefore, the structure can be made compact.

[0077] In this embodiment, an EEPROM 46 having a write-protect feature (WP function) was described. Write versus read-only control can be achieved for an EEPROM with no WP function by controlling the output state of the write-enable control signal, XWE, which controls timing for EEPROM writing. For example, for the case of an active LOW write-enable pulse, XWE, when the serial communication interface receives write commands in the write-protect mode, the same write-protect feature can be achieved by setting XWE always to logic HIGH.

[0078] Specifically, the present invention is not restricted to the structure of the embodiment described above. It is sufficient if the system has at least one correction data memory section, and that correction data memory section is provided with a write-protected area and an area which can be written to.

[0079] For image display on a large-scale LED display of the present invention, it is desirable to divide the overall image into parts and implement display on LED units. For example, a large-scale LED display, in which the user has already set the second memory bank for specific operational conditions, may require LED units in one part to be replaced. The second memory bank can be re-written to adjust only for the replaced LED units, and re-adjustment for the user's operational conditions can be accomplished easily.

[0080] Again, the present invention is not restricted to an image display apparatus using light emitting diodes.

[0081] Fig. 8 is a block diagram outlining a image display apparatus embodiment having an image data correction section which reads one line of correction data from the correction data memory section each time it outputs one line of corrected image data. The image display apparatus shown in Fig. 8 is provided with:

- (a) a display section 61 made up of a plurality of light emitting devices arranged in an m-line by n-column matrix;
- (b) a vertical driver section 62 which sequentially selects each line of the display section 61 and sources current to each line;
- (c) a horizontal driver section 63 which supplies driving current to each column of the display section 61

according to image data corresponding to the selected line;

(d) an image data correction section 64 which corrects externally input image data (IMDATA) according to variations in light emitting device characteristics for each pixel, and outputs corrected data to the horizontal driver section 63; and

(e) a correction data memory section 66 which holds correction data for image data correction. Operation of each element of this system is controlled by a control section 65.

[0082] The image data correction section 64 reads correction data (CRDATA) from the correction data memory section 66 via the control section 65, corrects image data (IMDATA) input via the control section 65 based on the correction data, and outputs the corrected image data to the horizontal driver section 63. A total of $m \times n$ pixels of correction data are not read all at once, but rather correction data are read one line (n pixels) at a time in parallel with output of one line of image data.

[0083] For the case of image data for a static image, it is possible to correct the image data without providing any buffer memory at all. However, for the case of image motion, buffer memory which can store one or two lines of correction data is desirable to prevent display time lag between lines. The buffer memory 60 can be configured, for example, as two stages of interconnected registers 601 and 602.

[0084] Correction data reading may proceed, for example, in the following manner. The image data correction section 64 is provided with buffer memory 60 made up of two stages (upper and lower) of interconnected registers 601 and 602. When the first register 601 outputs one line of correction data to the correction circuit 69, the next line of correction data is read into the second register 602. When the first register 601 finishes outputting one line of correction data and the second register 602 finishes reading one line of correction data, the contents of the second register 602 are transferred to the first register 601.

[0085] An array of D-flip-flops for just one display linesworth of data (n -pixels times the bit count for one pixel (a)) can be used, for example, as the first register 601 and the second register 602. To simplify correction data input wiring, it is desirable to connect flip-flops of the second register 602 in a master-slave sequence to form a shift register. In this configuration, correction data input to the flip-flop at the left end of the second register 602 is sequentially transferred (shifted) to the right side in sync with clock (CLK) timing, and data are thus read into the second register 602. Therefore, bus line branching to each column for correction data input is unnecessary, and wiring to supply a clock signal to each flip-flop is all that is required.

[0086] Fig. 9 is a block diagram showing detailed structure of the image display apparatus shown in Fig. 8. First, the configuration of each section is described. An LED

dot matrix 71, which is the display section, is made up of LEDs arranged in an m -line by n -column matrix. The anodes of all LEDs located in each line are connected to one common source line. The cathodes of all LEDs located in each column are connected together on one current line. A common driver 72, which is the vertical driver section, comprises a current switching circuit provided with m -switching circuits and related current source. The common driver 72 supplies current to LEDs connected to a common source line by connecting the common source line to the current source. Driver circuits 73, which are the horizontal driver section, comprise constant current control circuits which control driving current on and off to each column according to the pixel level width of image data output from the correction circuits 79.

[0087] The image data correction section is made up of correction circuits 79, which correct and output sequentially input image data one line at a time, and registers 701 and shift registers 702, which are buffer memory to store correction data. Each register 701 and shift register 702 have flip-flops corresponding to the number of bits for one column of pixels. Further, each flip-flop of register 701 is connected to its corresponding flip-flop in shift register 702. The control section is made up of the control circuit 77 (CTL) and a direct memory access controller (DMAC) 75. ROM 76, which is the correction data memory section comprises memory such as EEPROM. Brightness correction data to correct for brightness differences due to variation in the light emission characteristics of each LED in the LED dot matrix 71 are stored in ROM 76. Correction data are data to control driving current to each LED according to each pixel and each color. Data to control LED illumination time or a combination of illumination time and driving current, instead of driving current alone, are also suitable data.

[0088] A driver circuit 73, correction circuit 79, register 701, and shift register 702 are provided for each column of the LED dot matrix 71, and are contained within an LED driver IC (k) for each column ($k=1$ to n). Shift registers 702 for each column are connected together to allow data shifting. Further, to reduce the number of LED driver IC's, driver circuits, etc. for an appropriate number of columns can be combined into one LED driver IC.

[0089] Writing to, and reading from the correction data ROM 76 can be performed independent from image data transmission via SCI 78, which is a serial communication interface. Writing to the ROM 76 may also be performed by direct connection to the ROM 76 using direct transfer methods, or via various types of interfaces and parallel buses. When data are to be written to the ROM 76 while correction data are being read from the ROM 76, data transfer by the DMAC 75 is interrupted, and data reception through the SCI 78 is given priority. This allows control of competition for ROM 76 access.

[0090] The flow of image data in this type of embodiment proceeds as follows. Image data (IMDATA) are input to the CTL 77 and distributed to the correction circuits 79. After each line of image data is corrected by the cor-

rection circuits 79, it is output to the driver circuits 73.

[0091] Next, the flow of correction data is described with reference to the timing diagram of Fig. 10. For simplification, Fig. 10 illustrates the case of illumination of three common source lines #0 through #2 in that order.

[0092] Line #0 correction data begins to be read into the shift registers 702 when vertical and horizontal image timing data, Vsync and Hsync, are input to the CTL 77. Vsync input to CTL 77 is transferred to the common driver 72 as the LINE ADR signal, and Hsync is transferred to the driver circuits 73 and the correction circuits 79 as the BLANK signal.

(1) First, the CTL 77 inputs into DMAC 75 the starting address (ADDRESS) for reading line #0 correction data from ROM 76. The DMAC 75 writes to ROM 76 via the data input-output bus DIO the starting address for reading, while issuing a write-enable signal XWE to ROM 76. As outlined in Fig. 11, the starting address for read-out from ROM 76 indicates the beginning address of correction data within the ROM memory map corresponding to the selected line. CTL 77 issues the starting address for reading correction data corresponding to the line number determined from Vsync and Hsync.

(2) After writing the starting address for reading, the DMAC 75 reads line #0 correction data from ROM 76 via the data bus DIO while issuing a read-enable signal XOE. The ROM 76 sequentially outputs correction data corresponding to the LOW pulse count on XOE.

(3) Line #0 correction data (CRDATA) read into DMAC 75 are transferred to shift registers 702 within driver IC's 74 (k). Correction data are transferred sequentially into the shift registers 702 by shifting one bit at a time in synchronization with the clock CLK.

[0093] While line #0 correction data are being read into the shift registers 702, registers 701 retain line #2, which is the last line, correction data. Line #2 correction data maintained in registers 701 are output to the driver circuits 73 and line #2 LEDs are illuminated while the correction data are maintained in registers 701.

[0094] When the next Hsync pulse is input, a latch signal (LATCH) is issued from the DMAC 75 to the registers 701, line #0 correction data stored in the shift registers 702 are transmitted to registers 701 all at once, and line #0 LED illumination is started. Subsequently, the starting address for reading line #1 correction data is input from the CTL 77 to the DMAC 75. In the same manner described above, the DMAC 75 reads line #1 correction data from ROM 76 and writes it into the shift registers 702.

[0095] In this manner, while the previous line is being illuminated, input of data to correct each pixel of the next line to be illuminated is completed. Correction data input to shift registers 702 are transmitted to, and retained in registers 701 just before switching illumination from one

line to the next. Based on this retained correction data, the correction circuits 79 correct image data by compensating for brightness variations in each LED of the active display line. By consecutive repetition of these operations, LED brightness correction is achieved over the entire display.

[0096] Incidentally, transfer of correction data into shift registers 702 must be completed within the time for illumination of one display line. Therefore, an image display apparatus like a large screen LED display using LED units without too many image data bits per line is suitable for practical implementation of data transfer via shift registers.

[0097] Here, a serial EEPROM in which data are read-out in serial fashion, was described as the ROM 76. However, an EEPROM with n-bit address and data busses may also be used as the ROM 76. Further, correction data transfer between the DMAC 75 and shift registers 702 was explained via a serial bus, but data transfer may also be performed via parallel bus.

[0098] For the case of a full color LED display, each pixel is made up of three RGB color LEDs. Image data for each respective RGB color can be corrected in the same manner as previously described.

[0099] The embodiments and comparative examples described above were presented to make each characteristic easy to understand. The image display apparatus shown in Figs. 1 and 2 has a switching circuit section to connect light emitting device common source lines to ground to discharge accumulated charge. The image display apparatus shown in Figs. 5 and 6 are configured with a correction data memory section having a first memory bank, which stores first correction data and forbids writing to memory, and a second memory bank which can be written to. In the image display apparatus shown in Figs. 8 and 9, each time one line of corrected image data is output from the image data correction section to the horizontal driver section, the next line of correction data is read from the correction data memory section. However, the most ideal image display apparatus can be realized by an apparatus provided with all of the circuitry described above.

Claims

1. An image display apparatus comprising:

- (a) a display section (61) of a plurality of LEDs arranged in an m-line by n-column matrix;
- (b) a vertical driver section (62) being operable to select each consecutive line of said display section (61) and a source current to each line;
- (c) a horizontal driver section (63) being operable to supply driving current to each column of the display section (61) corresponding to image data for the selected line;
- (d) a correction data memory section (66) being

operable to store correction data to correct externally input image data for an LED characteristic variation of each LED;

(e) an image data correction section (64) being operable to correct externally input image data (IMDATA) according to correction data (CRDATA) stored in said correction data memory section (66); and

(f) a control section (65) which controls each of the features of the display section (61), vertical driver section (62), horizontal driver section (63), and image data correction section (64);

said image data correction section (64) comprising:

a buffer memory (60) being operable to read out one line of correction data from said correction data memory section (66) via said control section (65) each time one line of corrected image data is output to said horizontal driver section (63); and

a correction circuit (69) being operable to receive image data from said control section (65) and correction data from said buffer memory (60) to output corrected image data to said horizontal driver section (63);

characterized in that

said buffer memory (60) is made up of an interconnection of a first register (601) and a second register (602), both of which are capable of storing one line of correction data, wherein said buffer memory (60) is operable to read a next line of correction data into said second register (602) from said correction data memory (66) while said first register (601) outputs one line of correction data to said correction circuit (69), and wherein said buffer memory is further operable to transfer one next line of correction data of said second register (602) to said first register (601) when said second register (602) finishes reading said one next line of correction data.

2. The image display apparatus as recited in claim 1, **characterized in that** said image data correction section (64) being operable to read the next line of correction data from the correction data memory section (66) when said image data correction section (64) outputs a line of corrected image data to the horizontal driver section (63).

3. The image display apparatus as recited in claim 1 or 2, **characterized in that** said second register (602) of said buffer memory (60) is a shift register, and correction data is read directly by shifting consecutively one bit at a time via said second shift register (602).

4. The image display apparatus as recited in any of

claims 1-3, **characterized in that** said image display apparatus is operable to divide the entire image data into parts and said display section (61) is operable to display a part of the image data.

5. The image display apparatus as recited in any of claims 1-4, **characterized in that** the LEDs are of three colours, red, green and blue.

Patentansprüche

1. Bildanzeigevorrichtung, umfassend:

(a) eine Anzeigeeinheit (61) bestehend aus einer Mehrzahl von in einer Matrix aus m Zeilen und n Spalten angeordneten LEDs;

(b) eine vertikale Treibereinheit (62), ausgebildet zur Auswahl jeder aufeinanderfolgenden Zeile der Anzeigeeinheit (61) und eines an jeder Zeile anliegenden Source-Stroms;

(c) eine horizontale Treibereinheit (63), ausgebildet zur Einspeisung eines Treiberstroms in jede Spalte der Anzeigeeinheit (61) entsprechend den Bilddaten für die ausgewählte Zeile;

(d) eine Korrekturdaten-Speichereinheit (66), ausgebildet zum Speichern von Korrekturdaten zur Korrektur extern eingegebener Bilddaten für eine LEDcharakteristische Variation jeder LED;

(e) eine Bilddaten-Korrekturereinheit (64), ausgebildet zur Korrektur extern eingegebener Bilddaten (IMDATA) entsprechend den in der Korrekturdaten-Speichereinheit (66) gespeicherten Korrekturdaten (CRDATA); und

(f) eine Steuereinheit (65), welche jedes der Merkmale der Anzeigeeinheit (61), der vertikalen Treibereinheit (62), der horizontalen Treibereinheit (63) und der Bilddaten-Korrekturereinheit (64) steuert;

wobei die Bilddaten-Korrekturereinheit (64) folgendes umfasst:

einen Pufferspeicher (60), dazu ausgebildet, jedesmal, wenn eine Zeile von korrigierten Bilddaten an die horizontale Treibereinheit (63) ausgegeben wird, eine Korrekturdatenzeile aus der Korrekturdaten-Speichereinheit (66) über die Steuereinheit (65) auszulesen; und

einen Korrekturschaltkreis (69), ausgebildet zum Empfang von Bilddaten von der Steuereinheit (65) und von Korrekturdaten aus dem Pufferspeicher (60) zur Ausgabe von korrigierten Bilddaten an die horizontale Treibereinheit (63);

dadurch gekennzeichnet, dass

der Pufferspeicher (60) aus einer Verschaltung eines ersten Registers (601) mit einem zweiten Re-

gister (602) besteht, welche beide in der Lage sind, eine Zeile von Korrekturdaten zu speichern, wobei der Pufferspeicher (60) dazu ausgebildet ist, eine nächste Zeile von Korrekturdaten aus dem Korrekturdatenspeicher (66) in das zweite Register (602) einzulesen, während das erste Register (601) eine Zeile von Korrekturdaten an den Korrekturschaltkreis (69) ausgibt, und wobei der Pufferspeicher weiterhin dazu ausgebildet ist, eine nächste Zeile von Korrekturdaten des zweiten Registers (602) in das erste Register (601) zu übertragen, wenn das zweite Register (602) das Auslesen einer nächsten Zeile von Korrekturdaten beendet.

2. Bildanzeigevorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Bilddaten-Korrekturereinheit (64) dazu ausgebildet ist, die nächste Zeile von Korrekturdaten aus der Korrekturdaten-Speicher-einheit (66) auszulesen, wenn die Bilddaten-Korrekturereinheit (64) eine Zeile korrigierter Bilddaten an die horizontale Treibereinheit (63) ausgibt.
3. Bildanzeigevorrichtung nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** das zweite Register (602) des Pufferspeichers (60) ein Schieberegister ist und die Korrekturdaten direkt durch aufeinanderfolgendes bitweises Verschieben über das zweite Schieberegister (602) ausgelesen werden.
4. Bildanzeigevorrichtung nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die Bildanzeigevorrichtung dazu ausgebildet ist, die Gesamtmenge der Bilddaten in Teilmengen zu unterteilen, und die Anzeigeeinheit (61) dazu ausgebildet ist, eine Teilmenge der Bilddaten anzuzeigen.
5. Bildanzeigevorrichtung nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** die LEDs dreierlei Farben aufweisen, nämlich rot, grün und blau.

Revendications

1. Appareil d'affichage d'image comprenant:
 - (a) une section d'affichage (61) de plusieurs LED disposées dans une matrice de m lignes par n colonnes;
 - (b) une section d'actionneur vertical (62) permettant de sélectionner chaque ligne consécutive de ladite section d'affichage (61) et un courant source vers chaque ligne;
 - (c) une section d'actionneur horizontal (63) permettant d'envoyer un courant d'actionnement à chaque colonne de la section d'affichage (61) correspondant à des données d'image pour la ligne choisie;

(d) une section de mémoire de données de correction (66) permettant de stocker des données de correction afin de corriger des données d'image entrées extérieurement pour une variation de caractéristique de LED de chaque LED;

(e) une section de correction de données d'image (64) permettant de corriger des données d'image (IMDATA) entrées extérieurement en fonction de données de correction (CRDATA) stockées dans ladite section de mémoire de données de correction (66); et

(f) une section de commande (65) qui commande chacune des caractéristiques de la section d'affichage (61), de la section d'actionneur vertical (62), de la section d'actionneur horizontal (63) et de la section de correction de données d'image (64);

ladite section de correction de données d'image (64) comprenant:

une mémoire tampon (60) permettant de lire une ligne de données de correction depuis ladite section de mémoire de données de correction (66) via ladite section de commande (65) à chaque fois qu'une ligne de données d'image corrigées est émise vers ladite section d'actionneur horizontal (63); et

un circuit de correction (69) permettant de recevoir des données d'image depuis ladite section de commande (65) et des données de correction depuis ladite mémoire tampon (60) afin d'émettre des données d'image corrigées vers ladite section d'actionneur horizontal (63);

caractérisé en ce que:

ladite mémoire tampon (60) est faite d'une interconnexion d'un premier registre (601) et d'un second registre (602), lesquels sont tous deux capables de stocker une ligne de données de correction, dans lequel ladite mémoire tampon (60) permet de lire une ligne suivante de données de correction dans ledit second registre (602) depuis ladite mémoire de données de correction (66) pendant que ledit premier registre (601) émet une ligne de données de correction vers ledit circuit de correction (69), et dans lequel ladite mémoire tampon permet en outre de transférer une ligne suivante de données de correction dudit second registre (602) vers ledit premier registre (601) lorsque ledit second registre (602) finit de lire ladite une ligne suivante de données de correction.

2. Appareil d'affichage d'image selon la revendication 1, **caractérisé en ce que** ladite section de correction de données d'image (64) permet de lire la ligne sui-

vante de données de correction depuis la section de mémoire de données de correction (66) lorsque ladite section de correction de données d'image (64) émet une ligne de données d'image corrigées vers la section d'actionneur horizontal (63).

5

3. Appareil d'affichage d'image selon les revendications 1 ou 2, **caractérisé en ce que** ledit second registre (602) de ladite mémoire tampon (60) est un registre de décalage, et des données de correction sont lues directement en décalant consécutivement un bit à la fois via ledit second registre de décalage (602). 10
4. Appareil d'affichage d'image selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** ledit appareil d'affichage d'image permet de diviser toutes les données d'image en parties et **en ce que** la section d'affichage (61) permet d'afficher une partie des données d'image. 15 20
5. Appareil d'affichage d'image selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** les LED sont de trois couleurs, rouge, vert et bleu. 25

30

35

40

45

50

55

FIG. 1

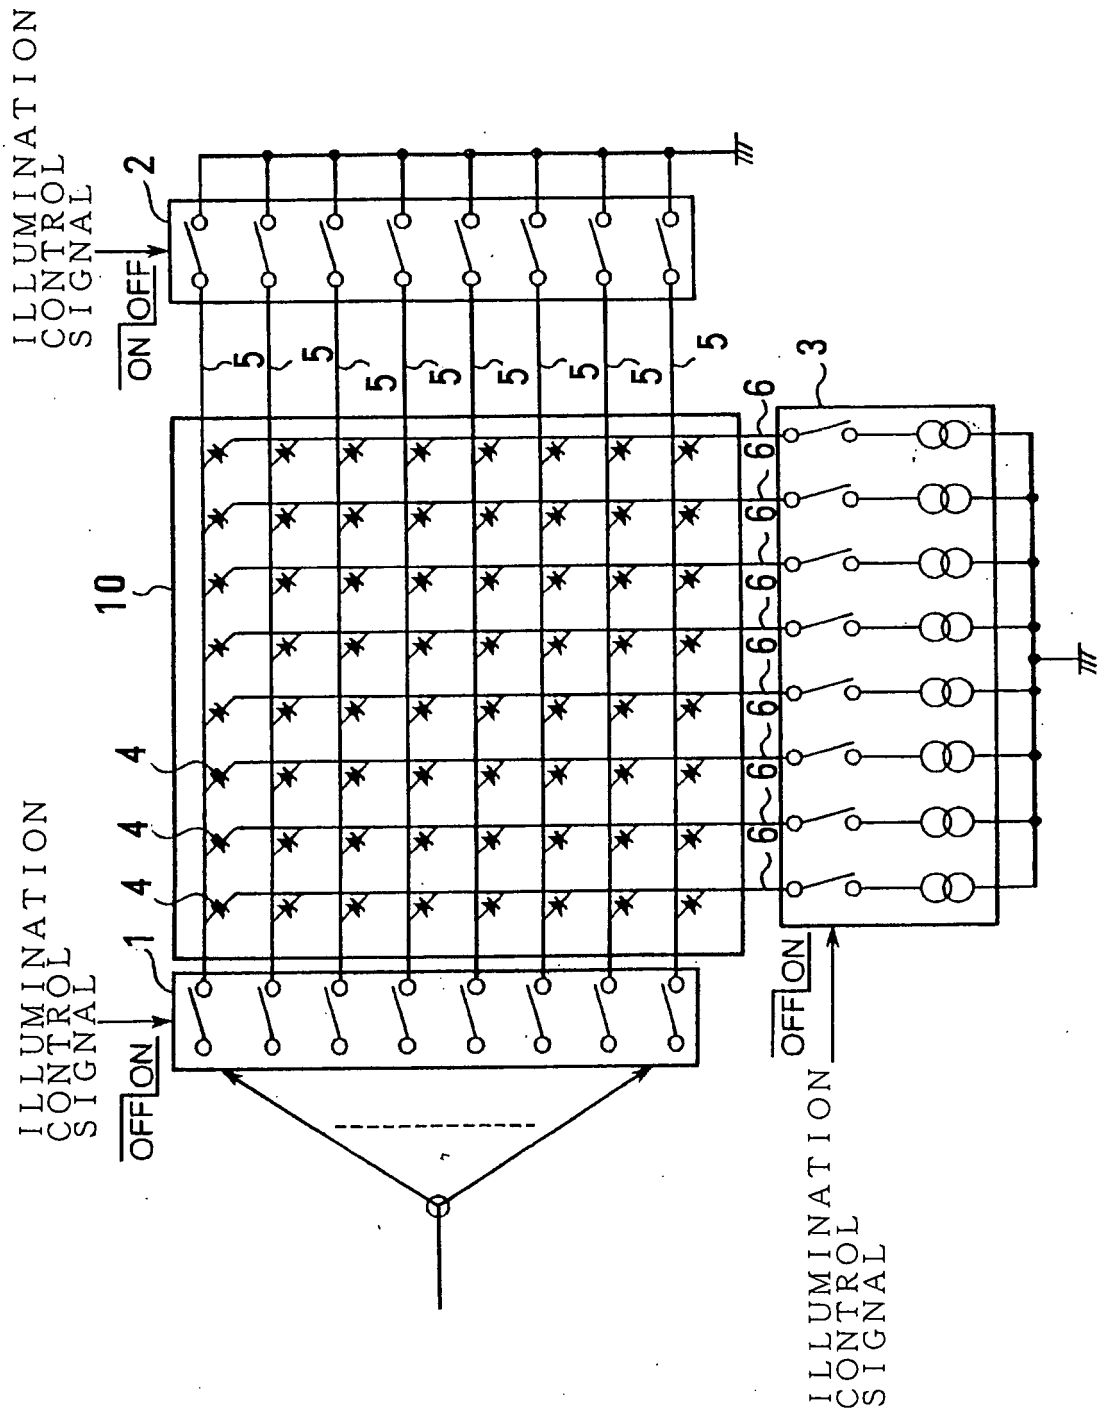


FIG. 2

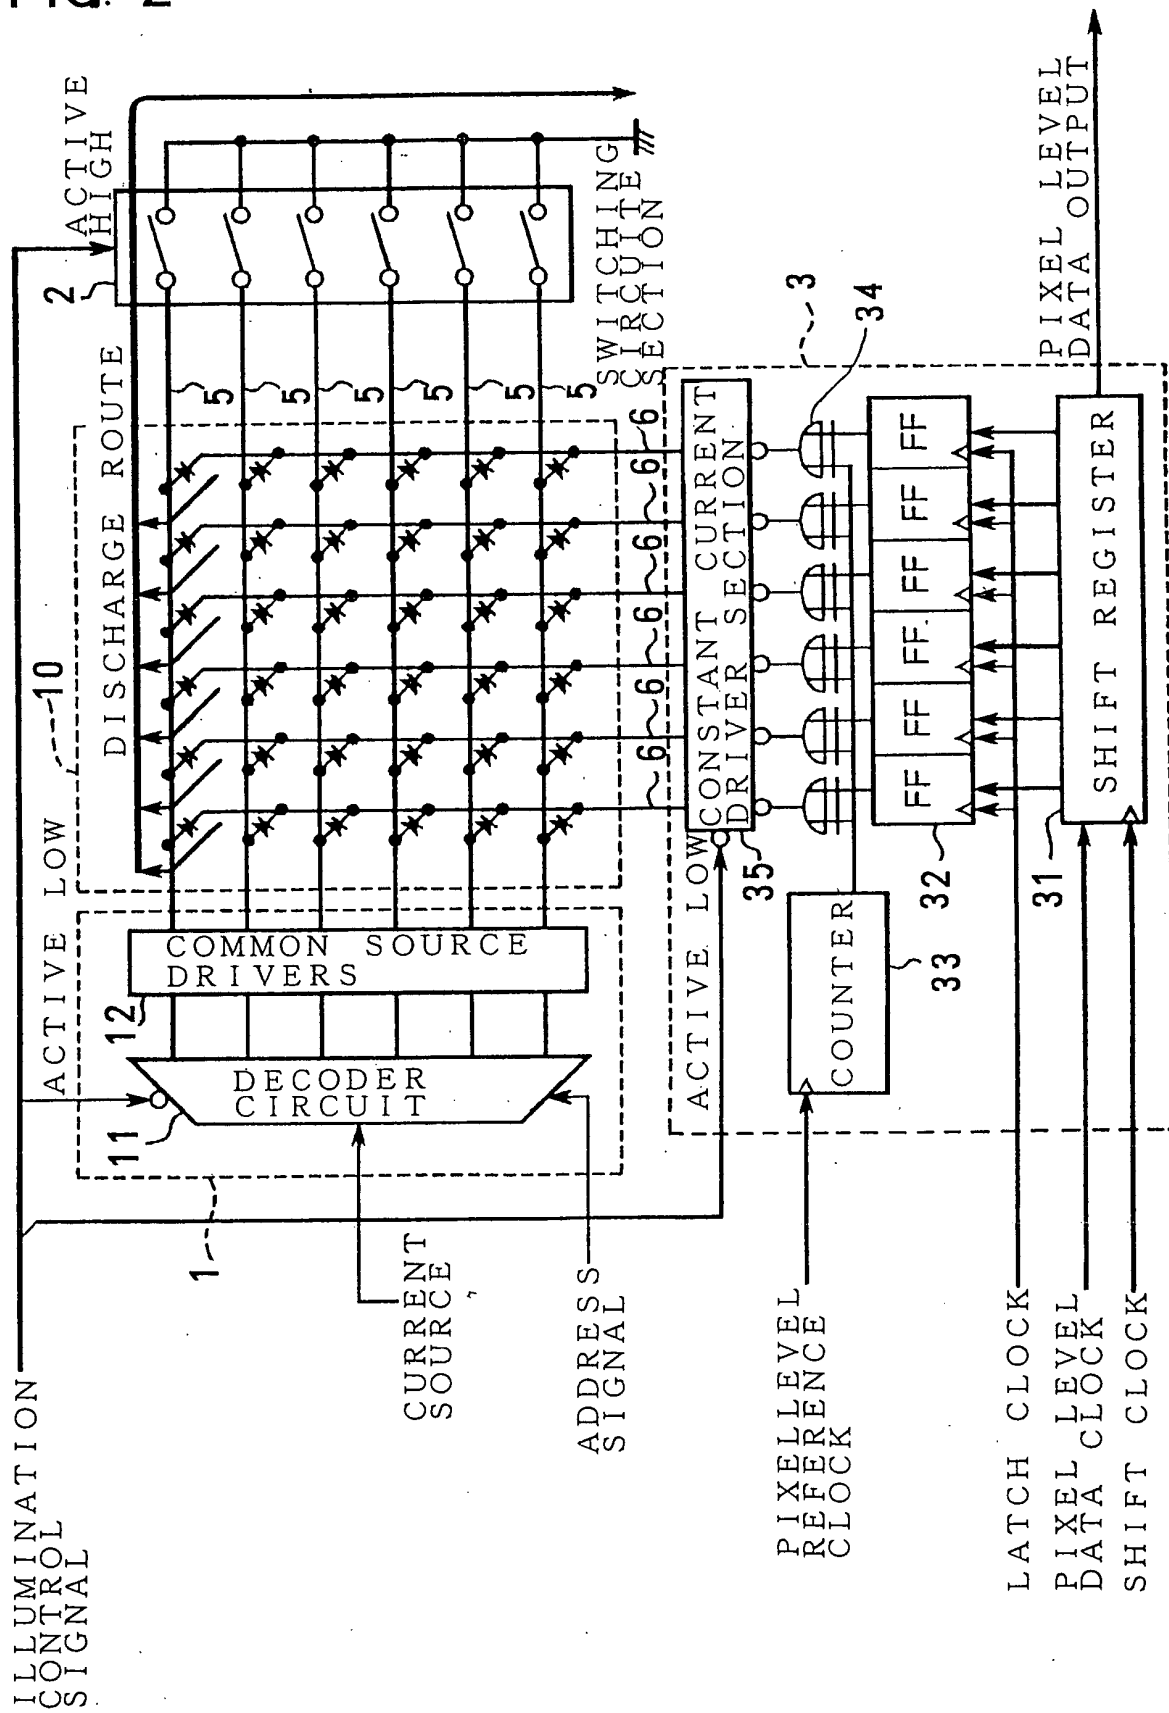


FIG. 3

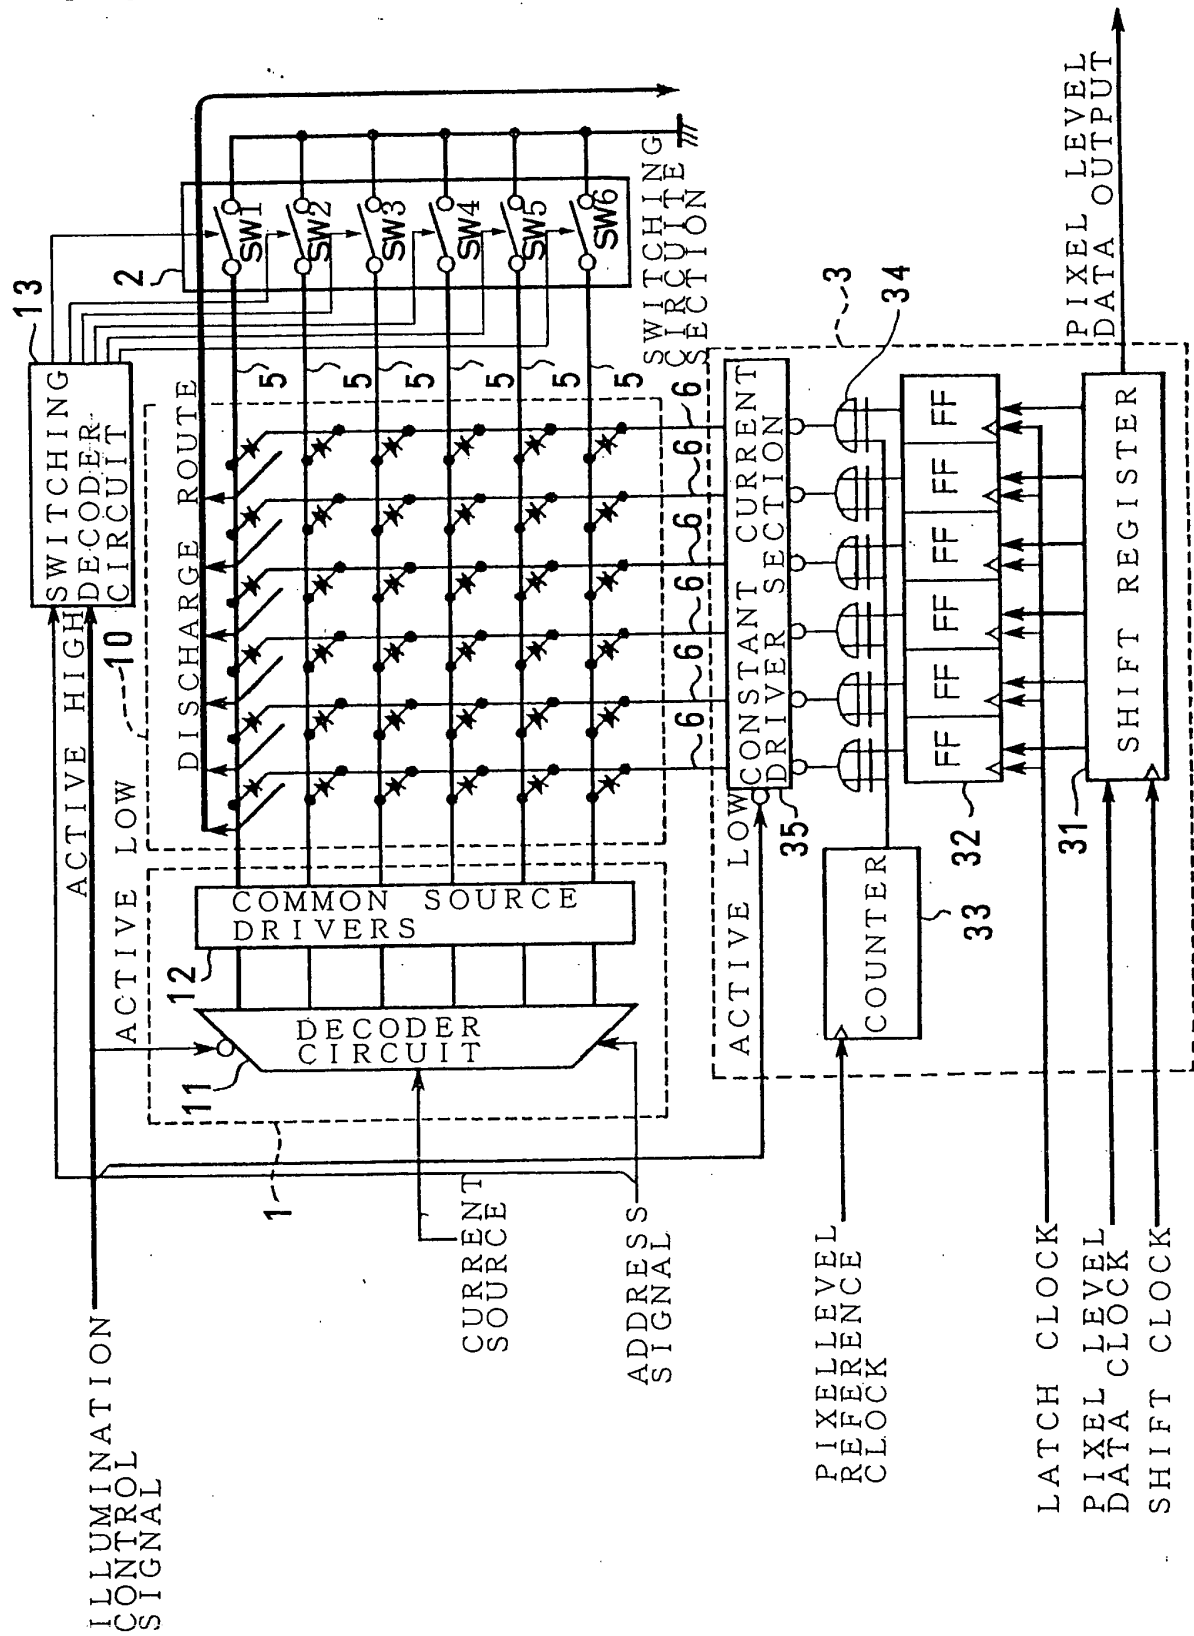


FIG. 4

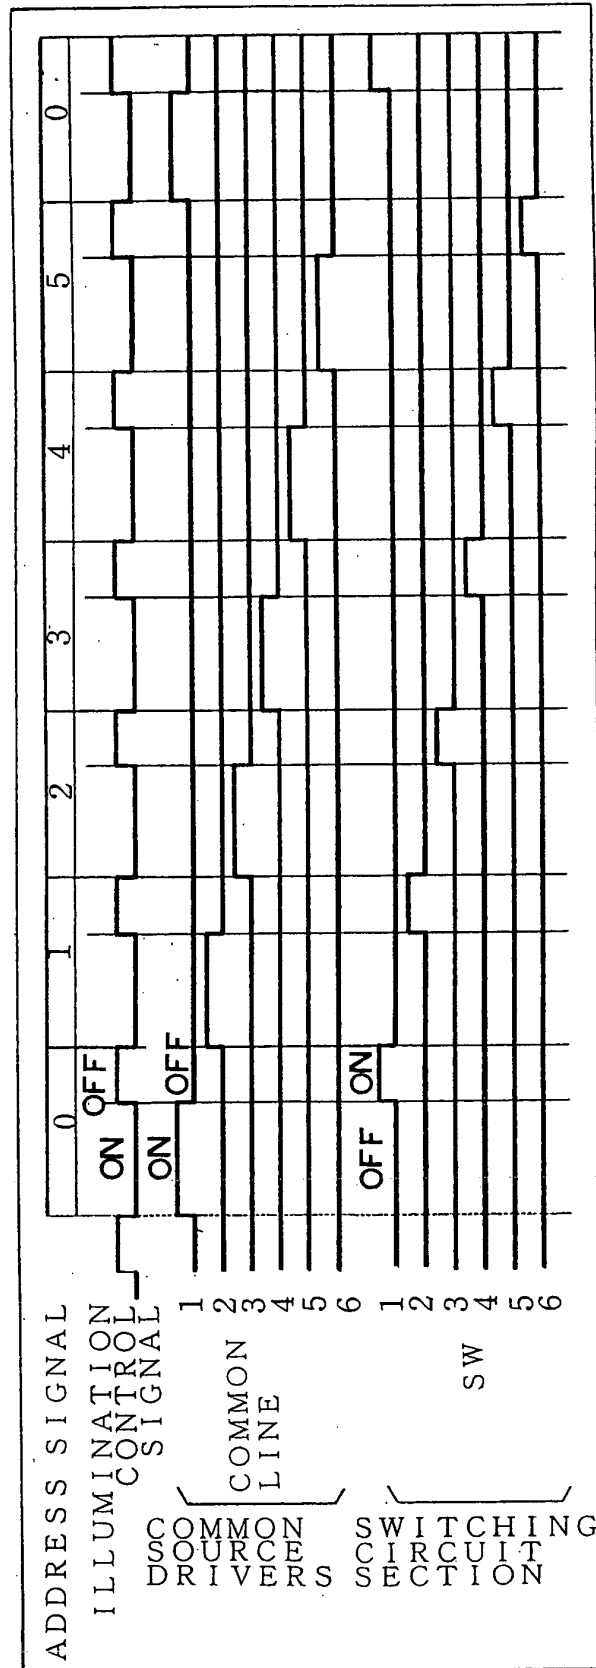


FIG. 5

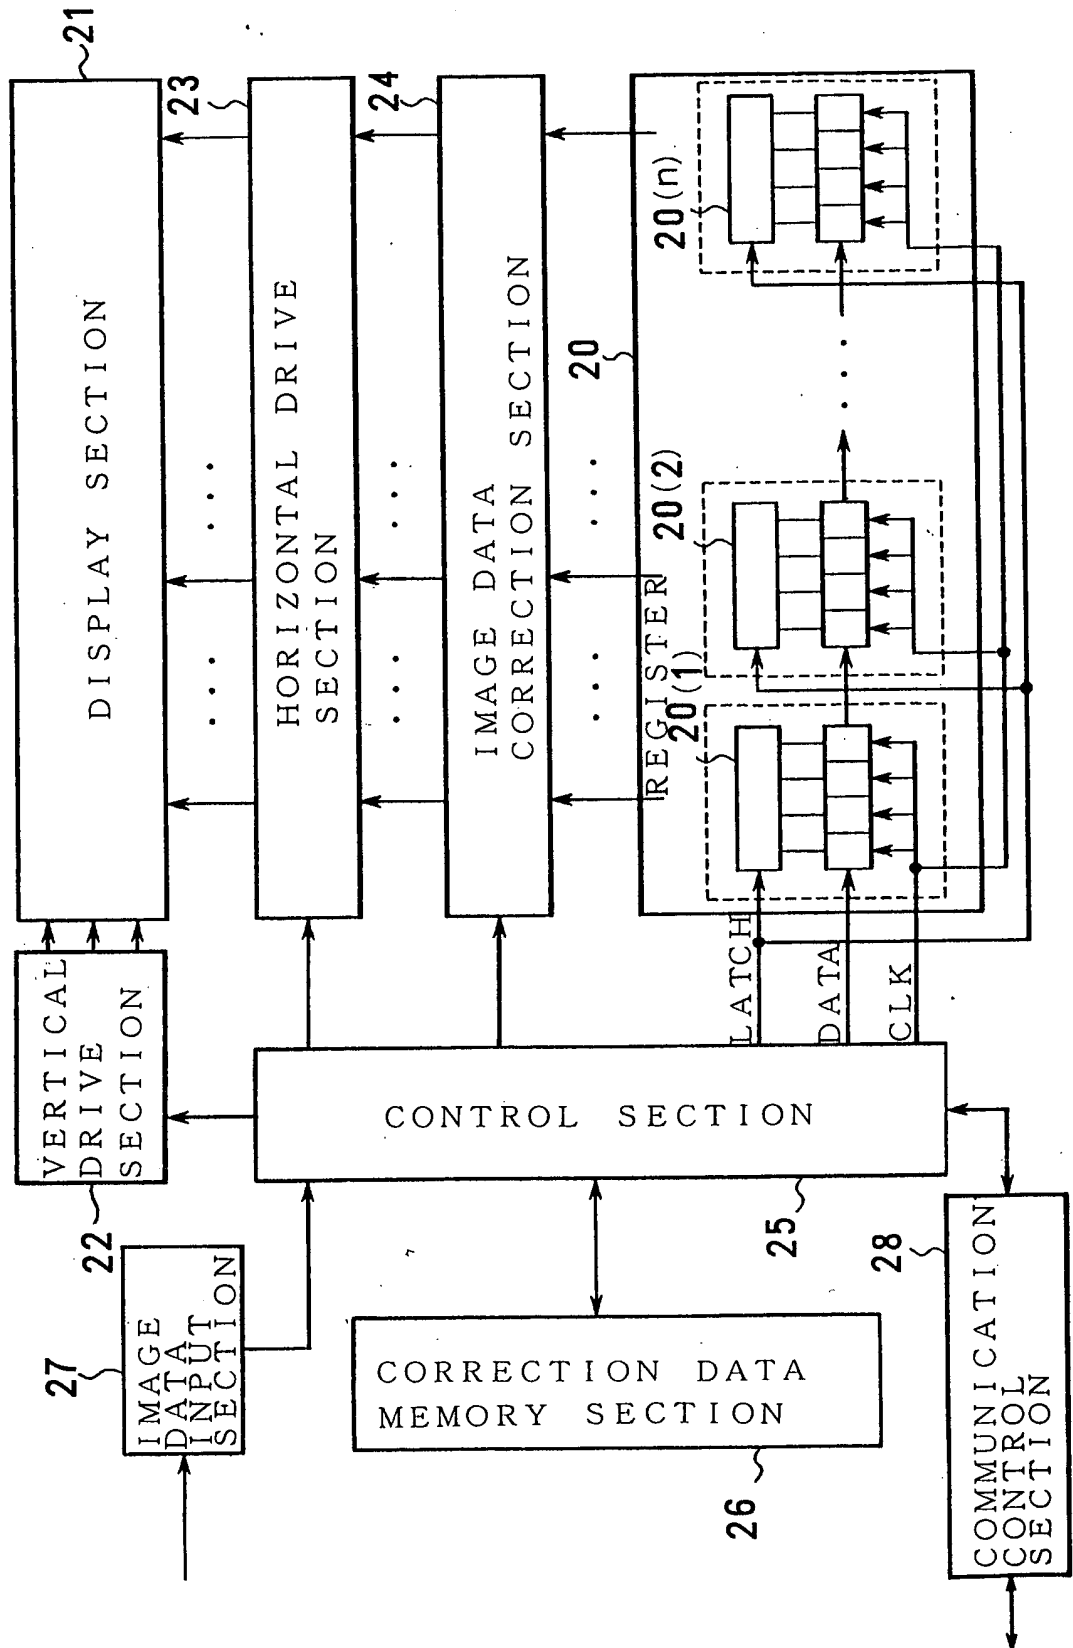


FIG. 6

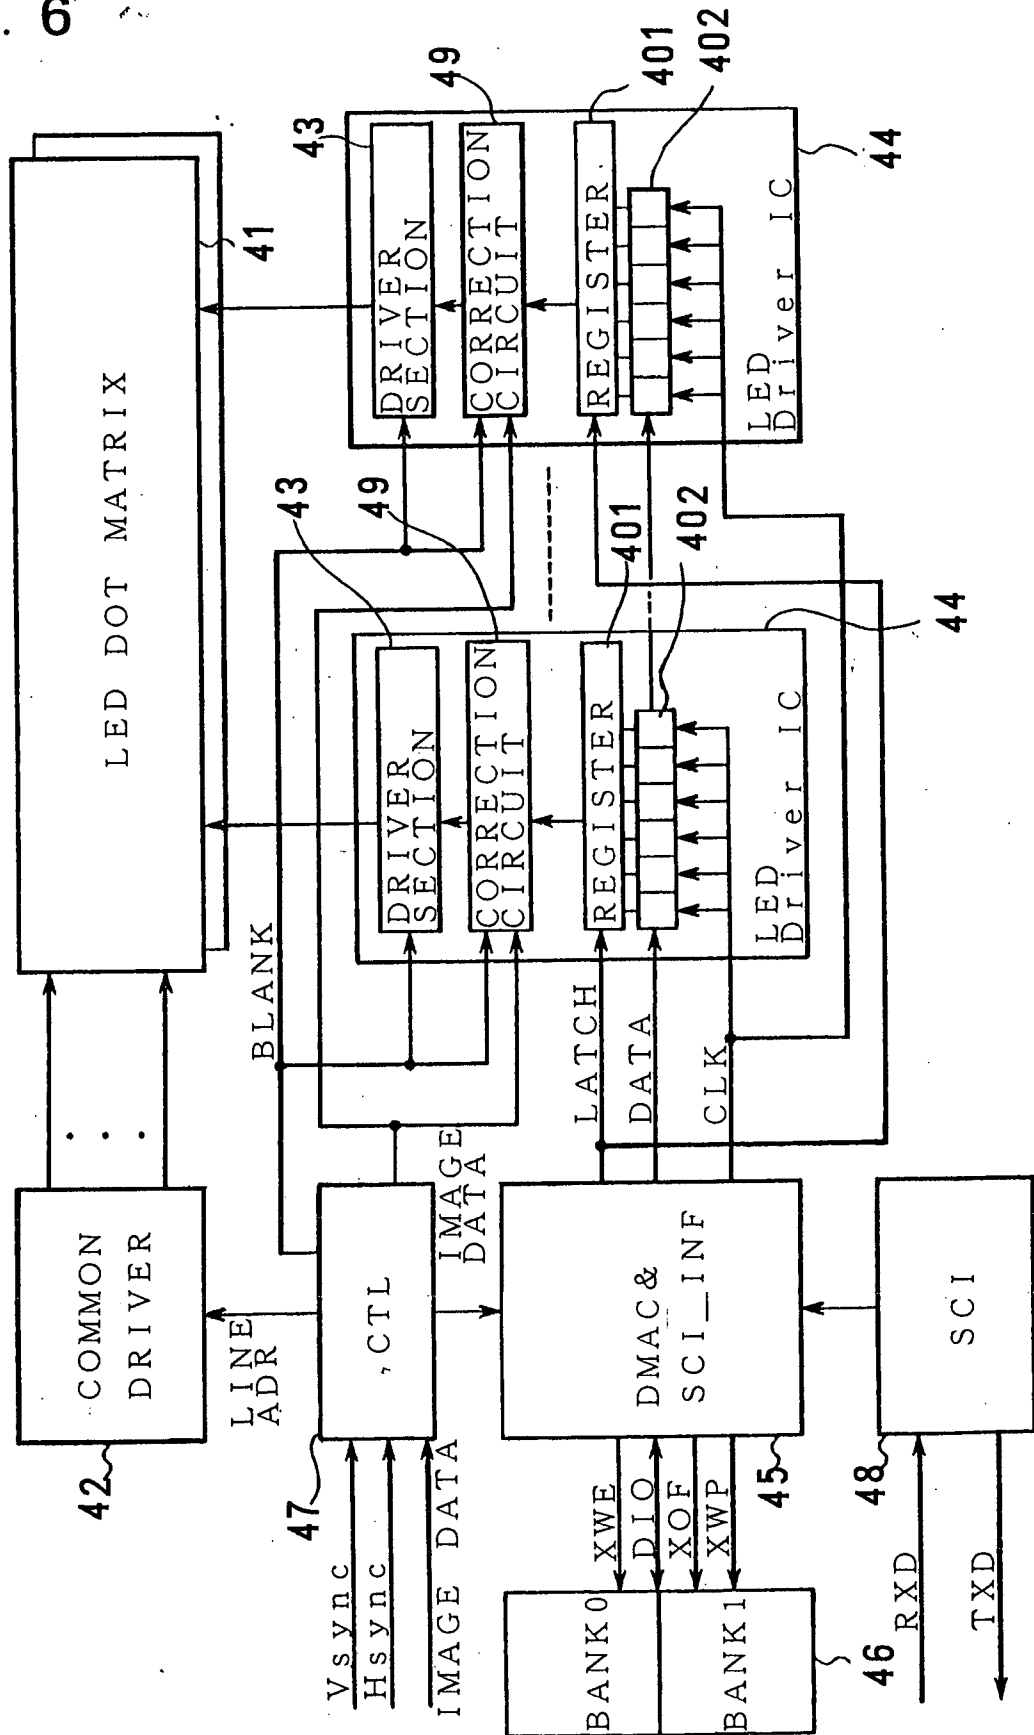


FIG. 7

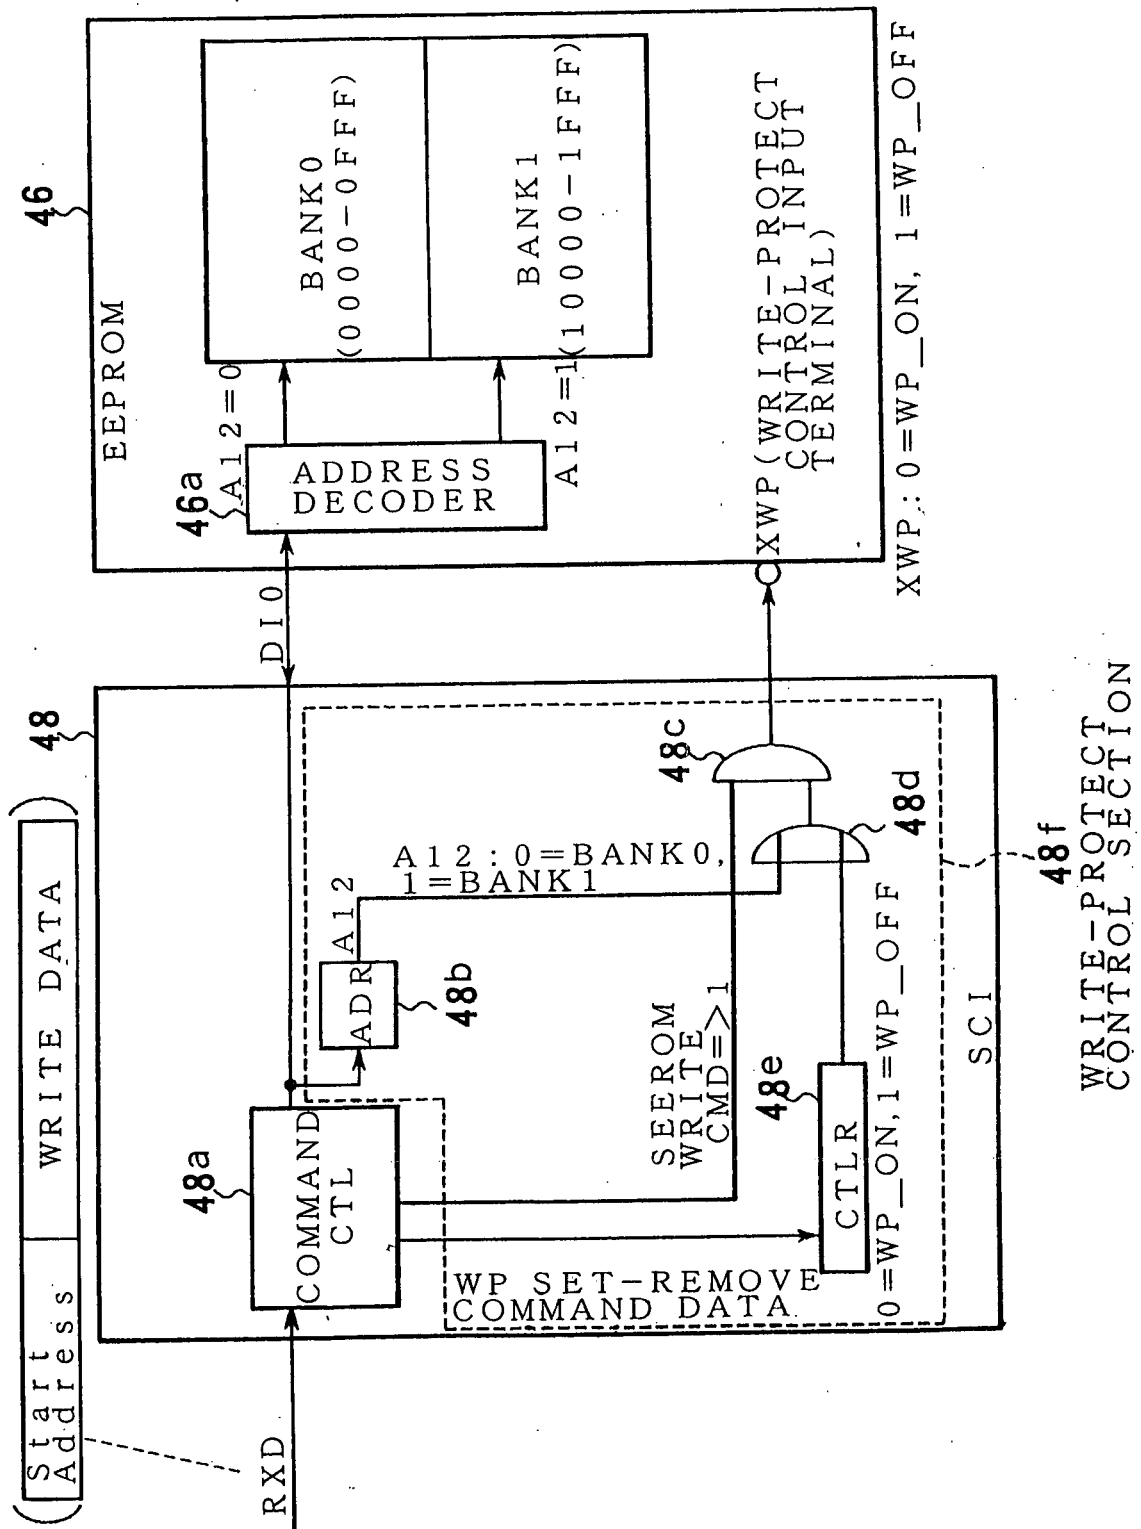


FIG. 8

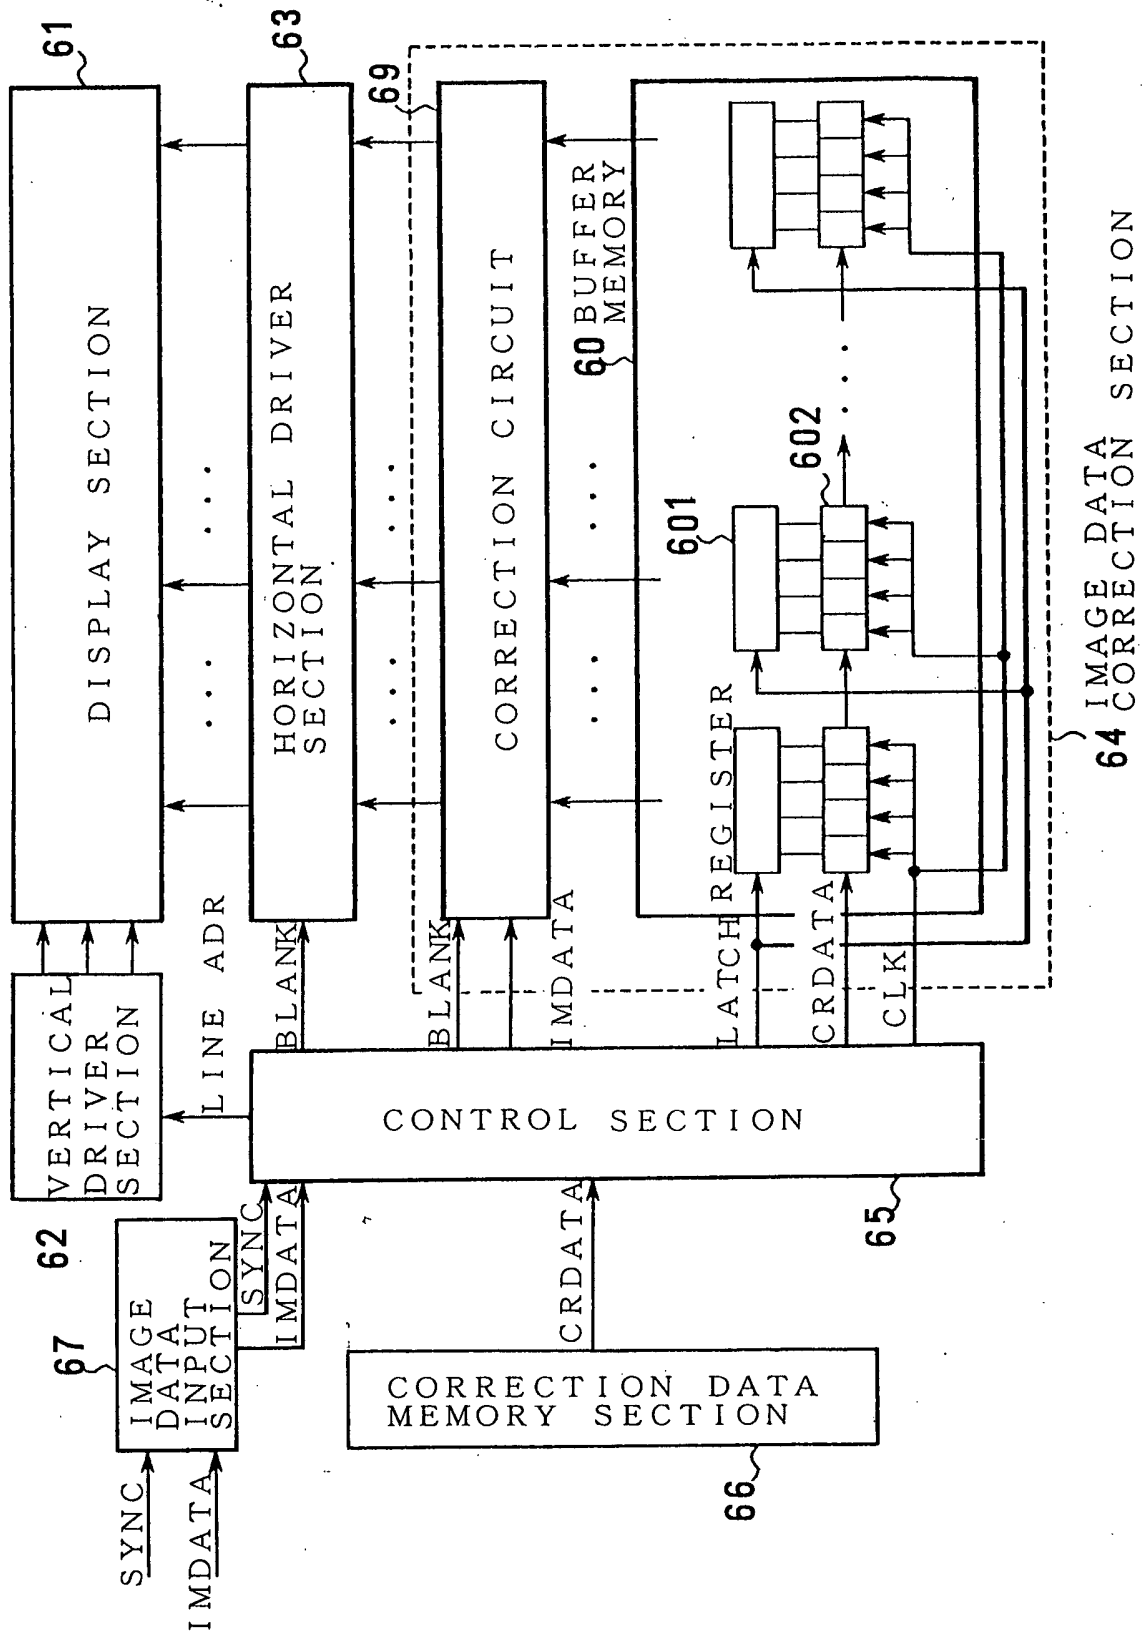


FIG. 9

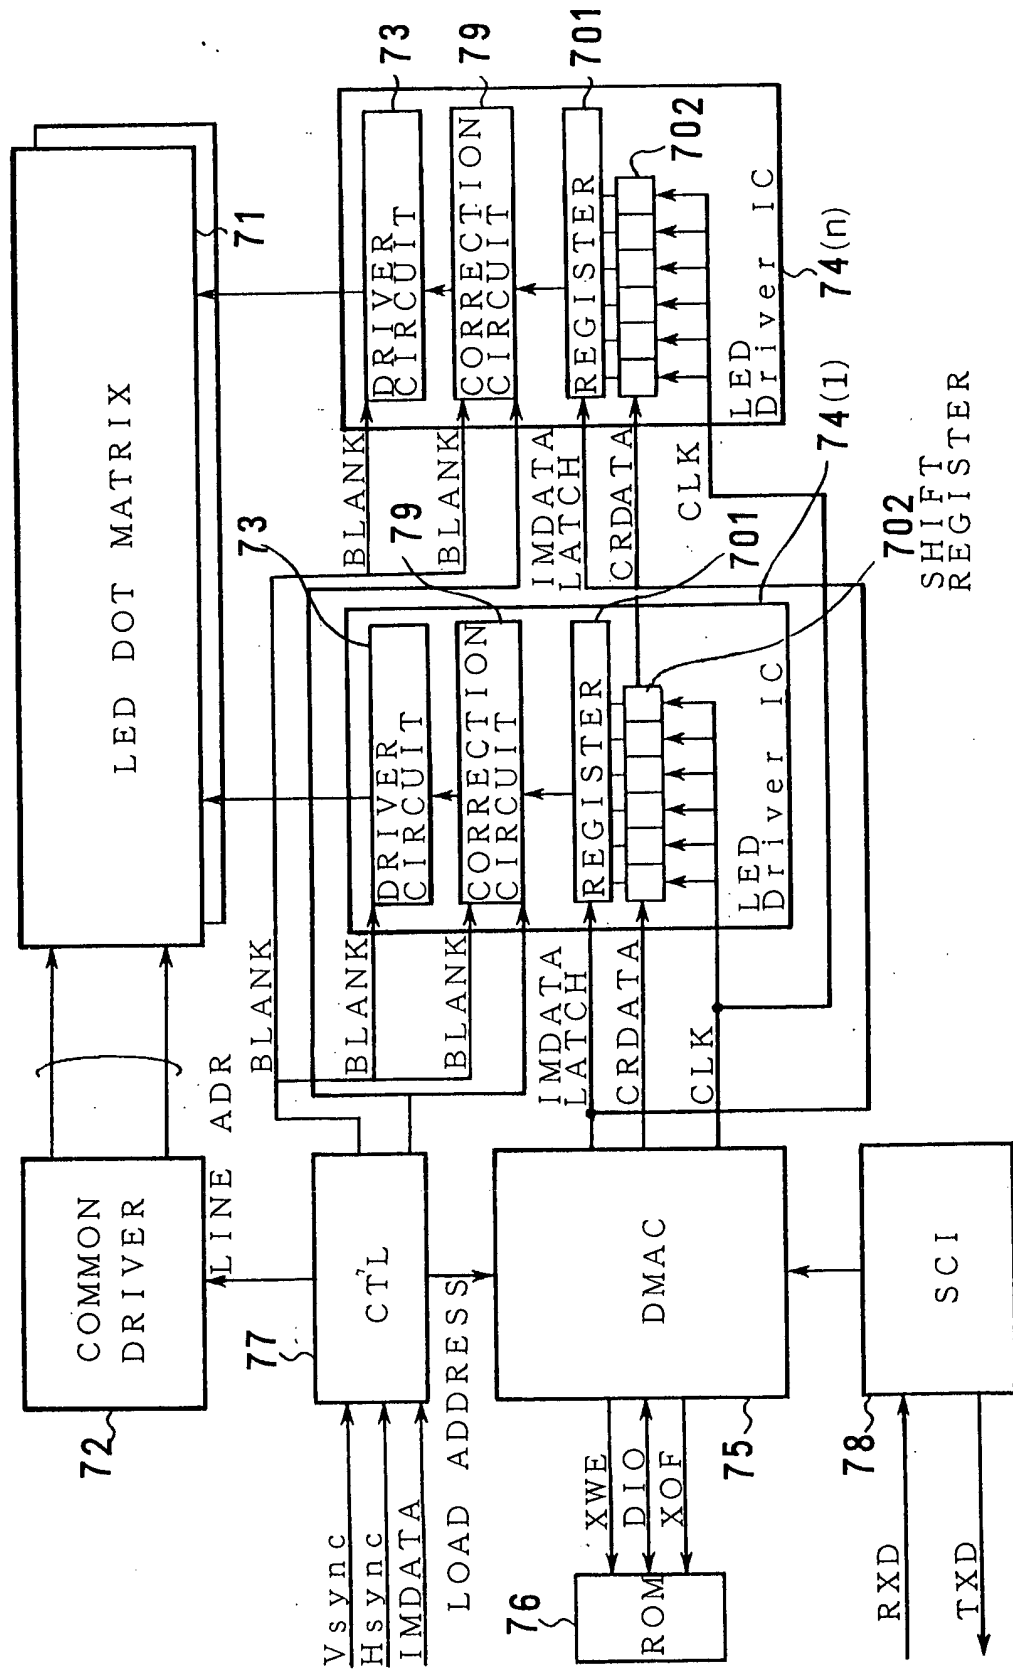


FIG. 10.

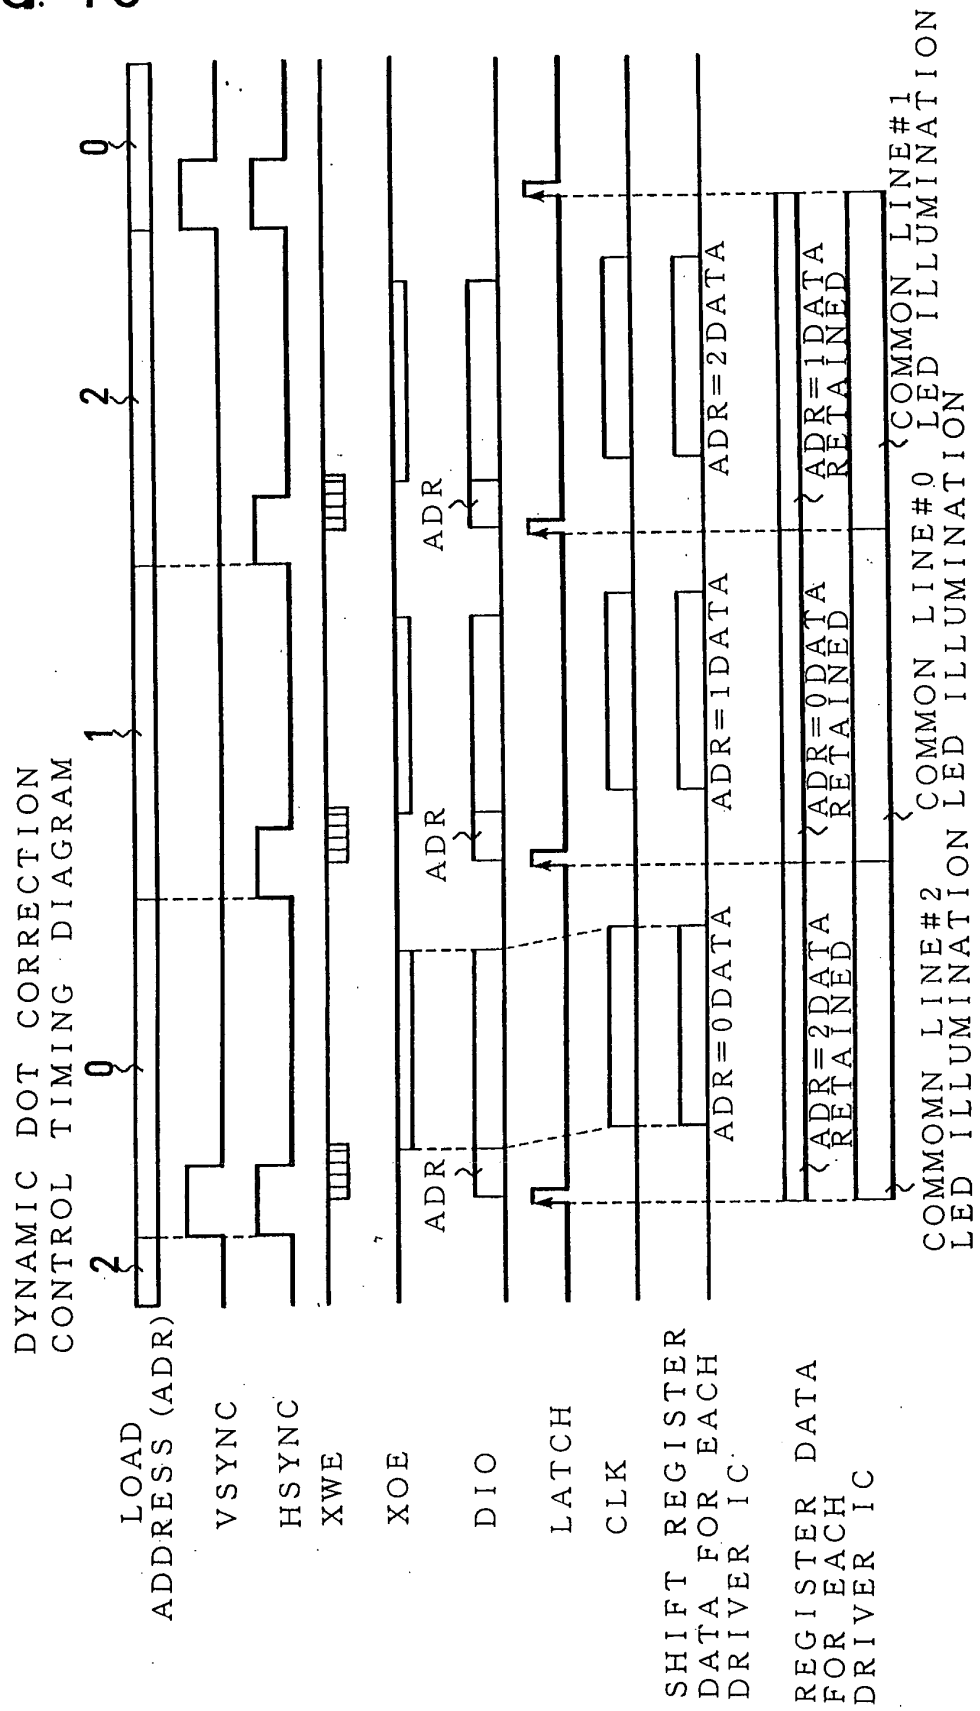


FIG. 11


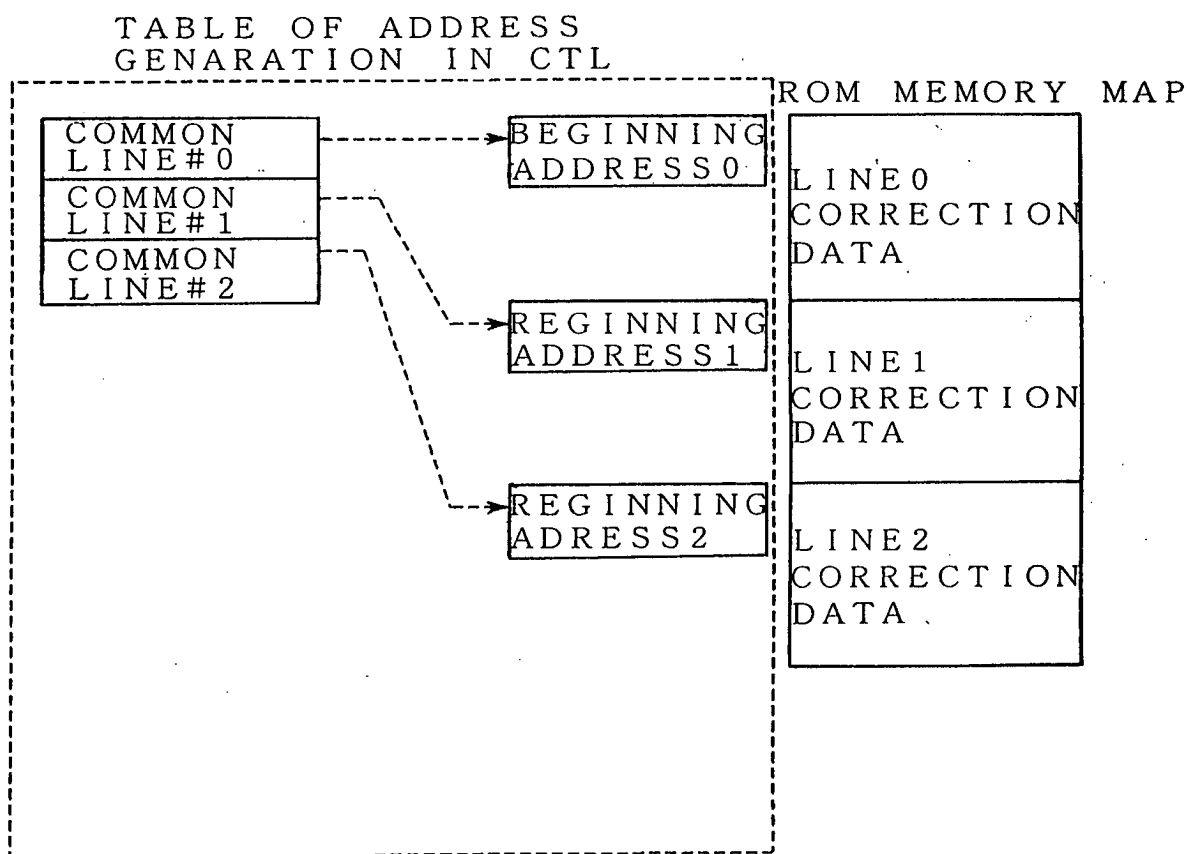


FIG. 12

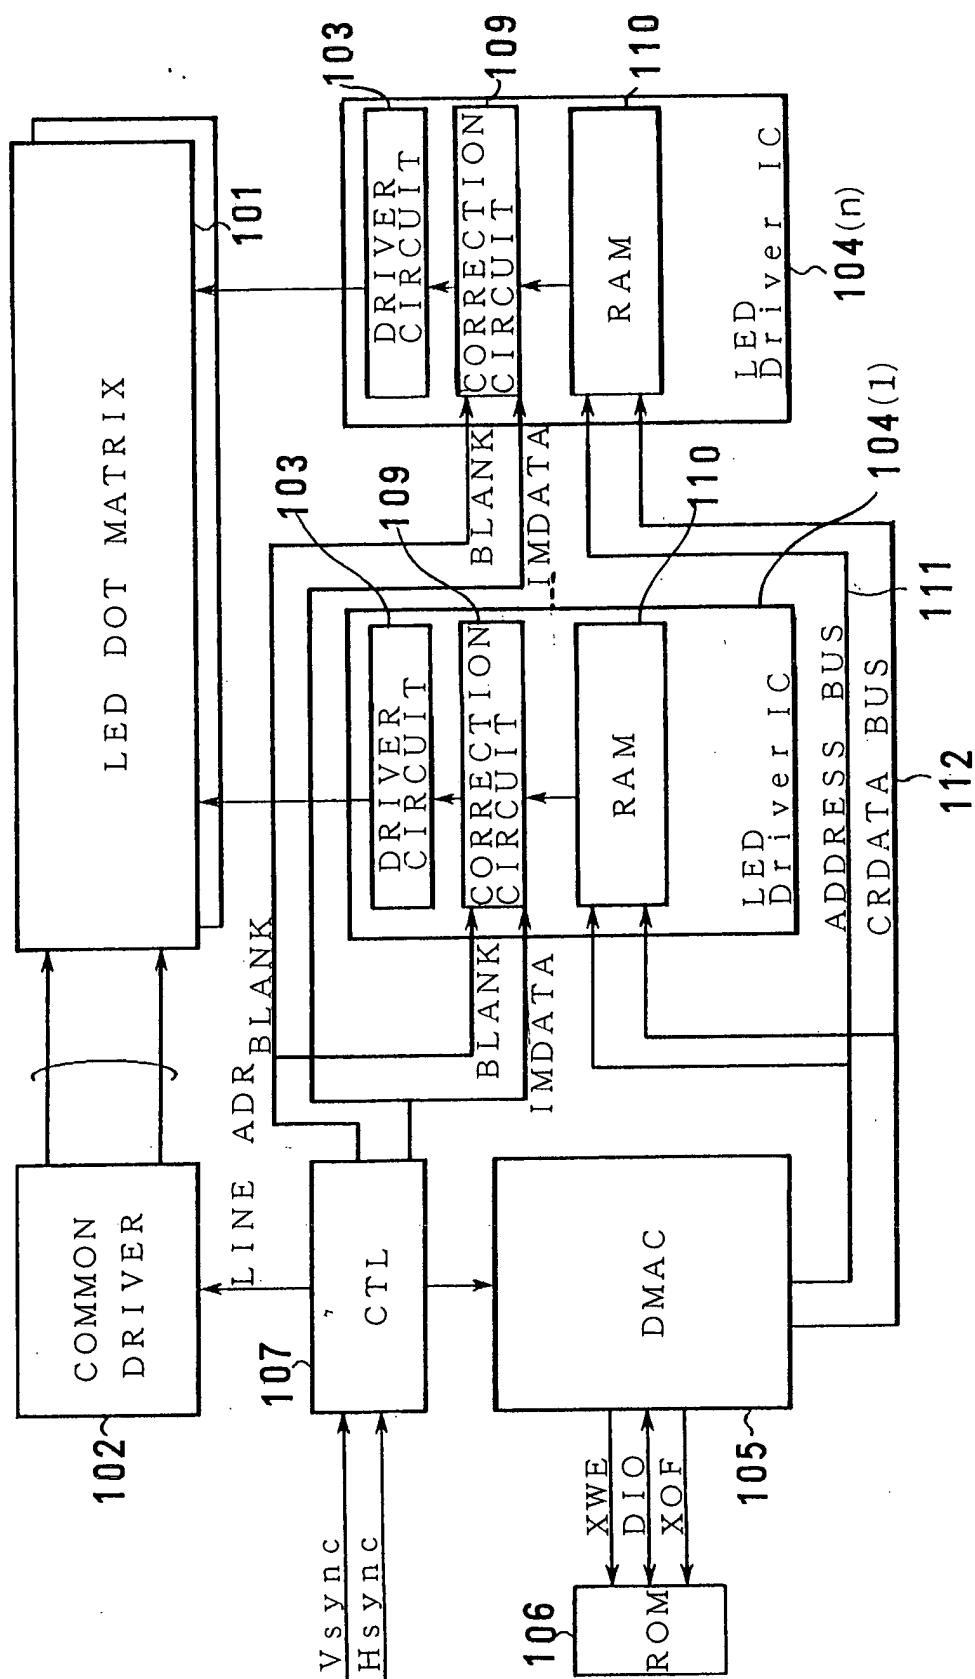

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0702347 A [0012]
- JP 7199861 A [0013]

专利名称(译)	图像显示装置		
公开(公告)号	EP1612764B1	公开(公告)日	2017-10-25
申请号	EP2005012344	申请日	2000-07-05
申请(专利权)人(译)	日亚公司		
当前申请(专利权)人(译)	日亚公司		
[标]发明人	TSUJI RYUHEI		
发明人	TSUJI, RYUHEI		
IPC分类号	G09G3/32 G09G3/20		
CPC分类号	G09G3/32 G09G3/3216 G09G3/3275 G09G3/3283 G09G2300/06 G09G2310/0251 G09G2310/027 G09G2310/061 G09G2320/0285 G09G2320/043 G09G2370/04		
代理机构(译)	SCHUMACHER & WILLSAU		
优先权	1999194551 1999-07-08 JP 1999302493 1999-10-25 JP 1999303134 1999-10-25 JP		
其他公开文献	EP1612764A2 EP1612764A3		
外部链接	Espacenet		

摘要(译)

图像显示装置具有发光装置，驱动电路和开关电路的点阵。点阵是以m行×n列矩阵排列的多个发光器件。垂直驱动器部分（62）选择所述显示部分（61）的每条连续线和每条线的源电流。水平驱动器部分（63）向显示部分（61）的每列提供对应于所选行的图像数据的驱动电流。图像数据校正部分（64）校正每个像素的LED特性变化的外部输入图像数据，并将该图像数据输出到所述水平驱动部分（63）。校正数据存储部分（66）存储校正数据。每当将一行校正图像数据输出到水平驱动器部分（63）时，图像数据校正部分（64）从校正数据存储部分（66）读出一行校正数据。

FIG. 1

