



US008330677B2

(12) **United States Patent**  
**Kim**

(10) **Patent No.:** **US 8,330,677 B2**  
(45) **Date of Patent:** **Dec. 11, 2012**

(54) **ORGANIC ELECTRO-LUMINESCENT DISPLAY DEVICE AND METHOD FOR DRIVING THE SAME**

(75) Inventor: **Kyung Man Kim**, Seoul (KR)

(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 2299 days.

(21) Appl. No.: **11/171,699**

(22) Filed: **Jun. 30, 2005**

(65) **Prior Publication Data**  
US 2006/0066252 A1 Mar. 30, 2006

(30) **Foreign Application Priority Data**  
Sep. 30, 2004 (KR) ..... 10-2004-0077890

(51) **Int. Cl.**  
**G09G 3/30** (2006.01)

(52) **U.S. Cl.** ..... **345/76**

(58) **Field of Classification Search** ..... 345/76-83;  
315/169.3  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

6,204,574 B1 \* 3/2001 Chi ..... 307/66  
6,617,796 B2 \* 9/2003 Sasaki et al. .... 315/169.1

6,750,833 B2 \* 6/2004 Kasai ..... 345/76  
7,202,842 B2 \* 4/2007 Kasai et al. .... 345/78  
7,317,433 B2 \* 1/2008 Chen et al. .... 345/76  
2002/0080133 A1 \* 6/2002 Eu ..... 345/212  
2002/0140659 A1 \* 10/2002 Mikami et al. .... 345/90  
2003/0107565 A1 \* 6/2003 Libsch et al. .... 345/211  
2006/0038758 A1 \* 2/2006 Routley et al. .... 345/81

\* cited by examiner

*Primary Examiner* — Alexander Eisen

(74) *Attorney, Agent, or Firm* — Brinks Hofer Gilson & Lione

(57) **ABSTRACT**

An organic electro-luminescent display device has a gate-source voltage that selectively has a positive polarity and a negative polarity so that deterioration of the switching element is prevented. The display device includes an electro-luminescent element that emits light. The device includes a first switching element for switching a data voltage in response to a scan signal, a second switching element for adjusting the amount of the current supplied to the electro-luminescent element, and a polarity controller for applying a voltage having a value between a minimum value and a maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element.

**16 Claims, 8 Drawing Sheets**

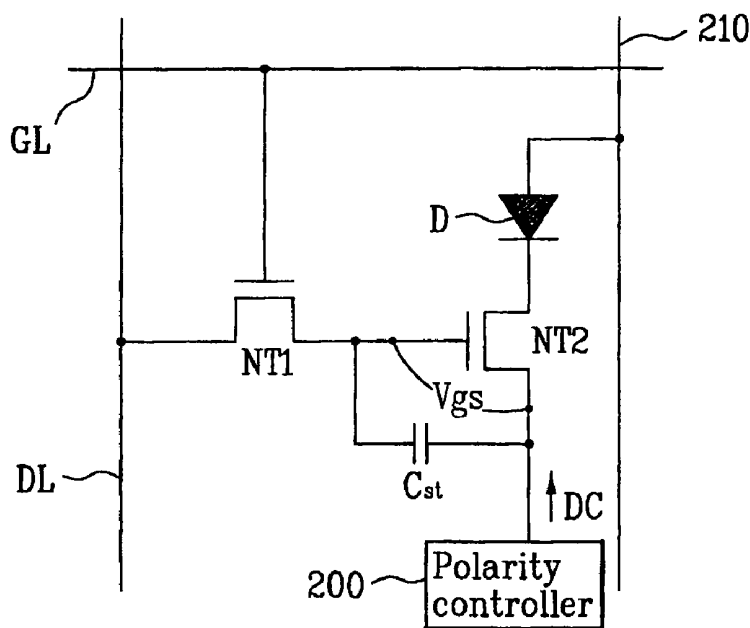


FIG. 1  
Related Art

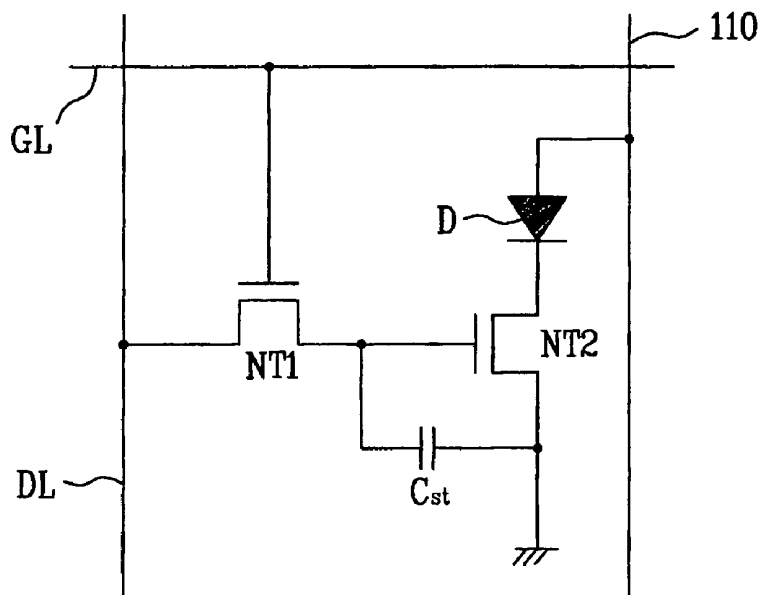


FIG. 2

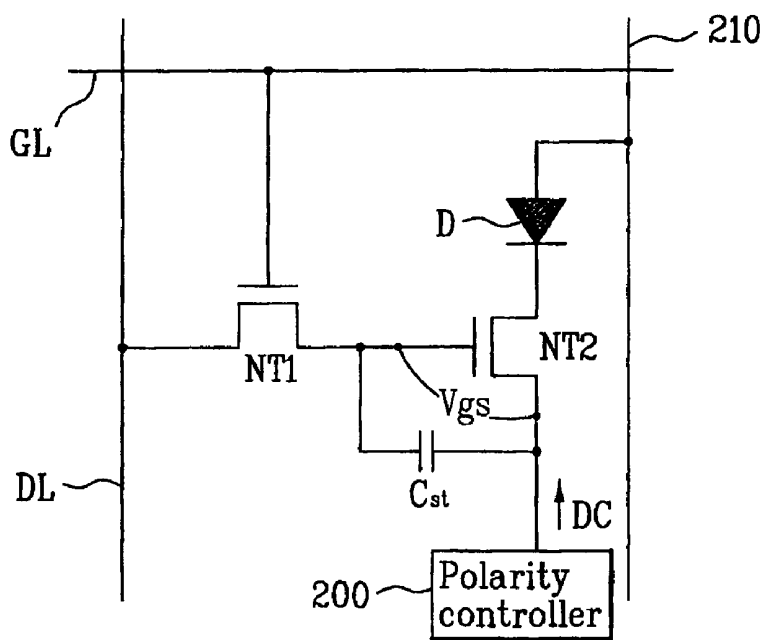


FIG. 3

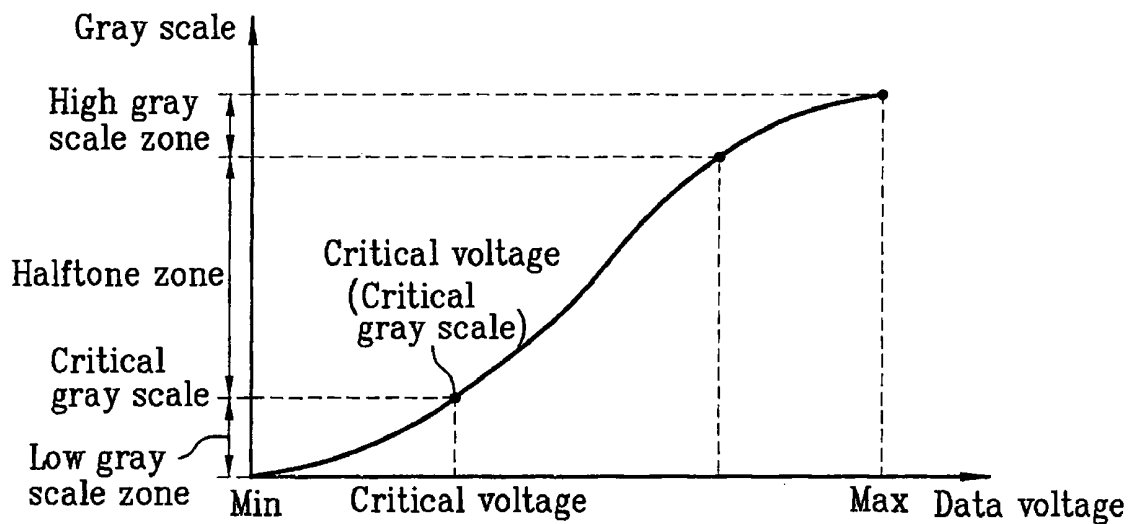


FIG. 4

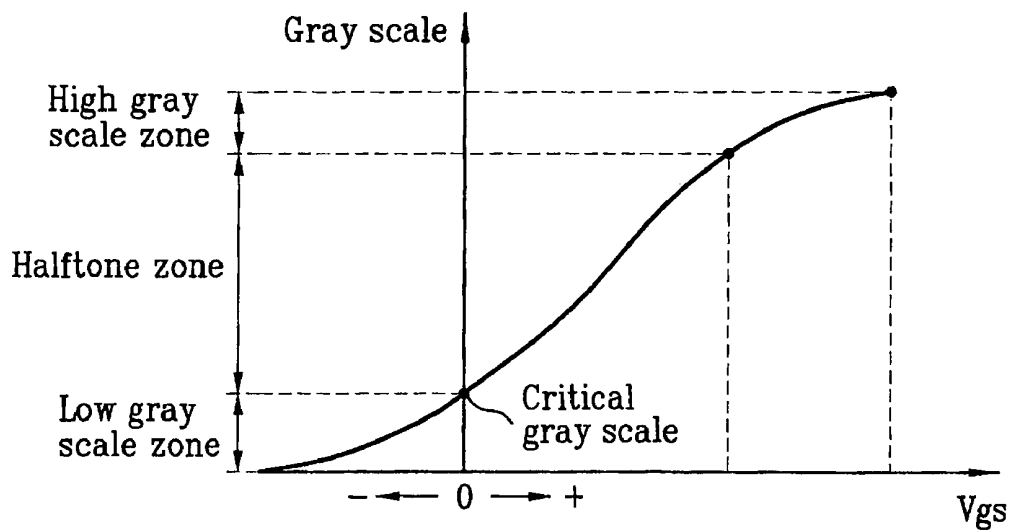


FIG. 5

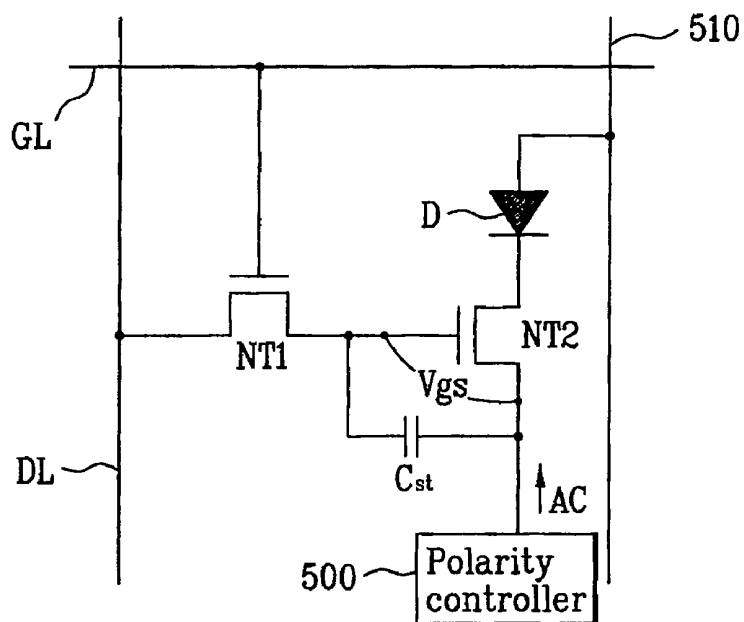


FIG. 6

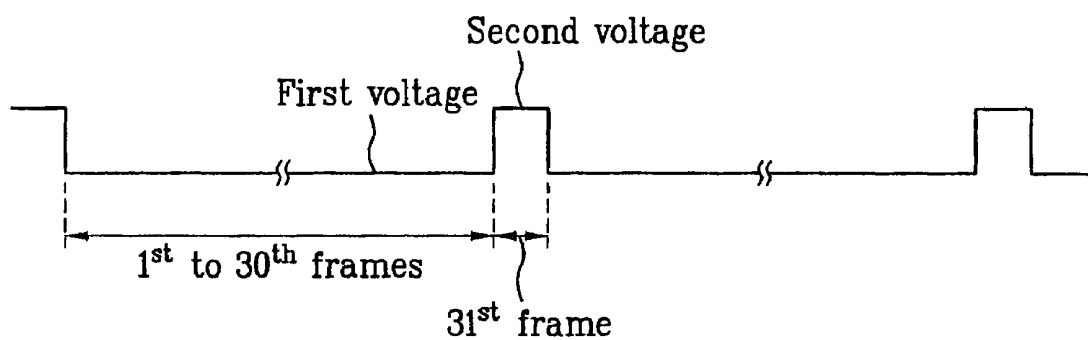


FIG. 7

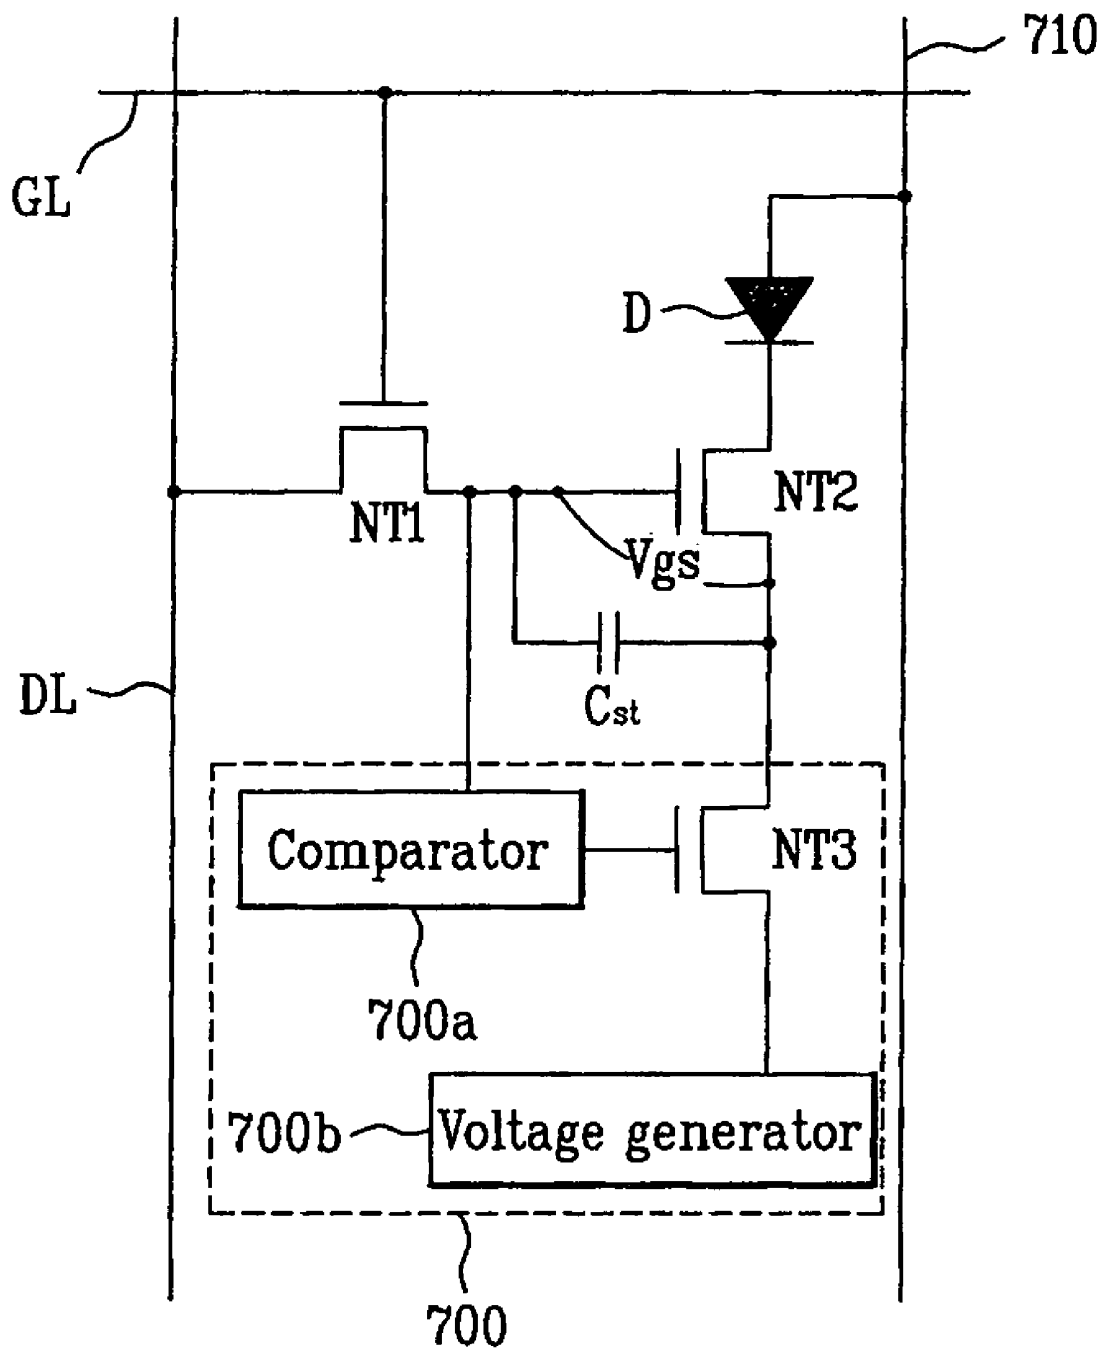


FIG. 8

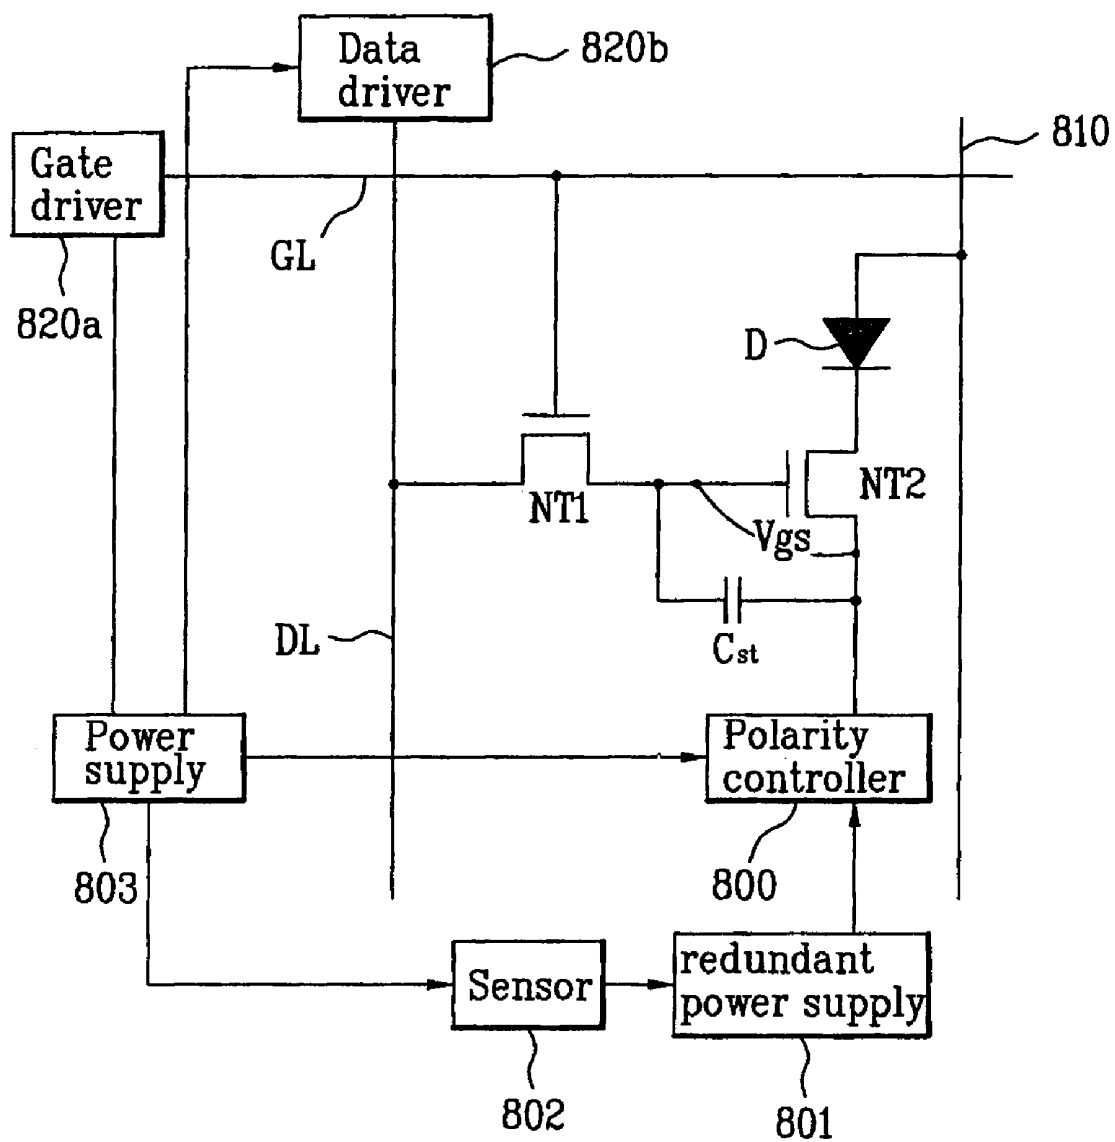


FIG. 9

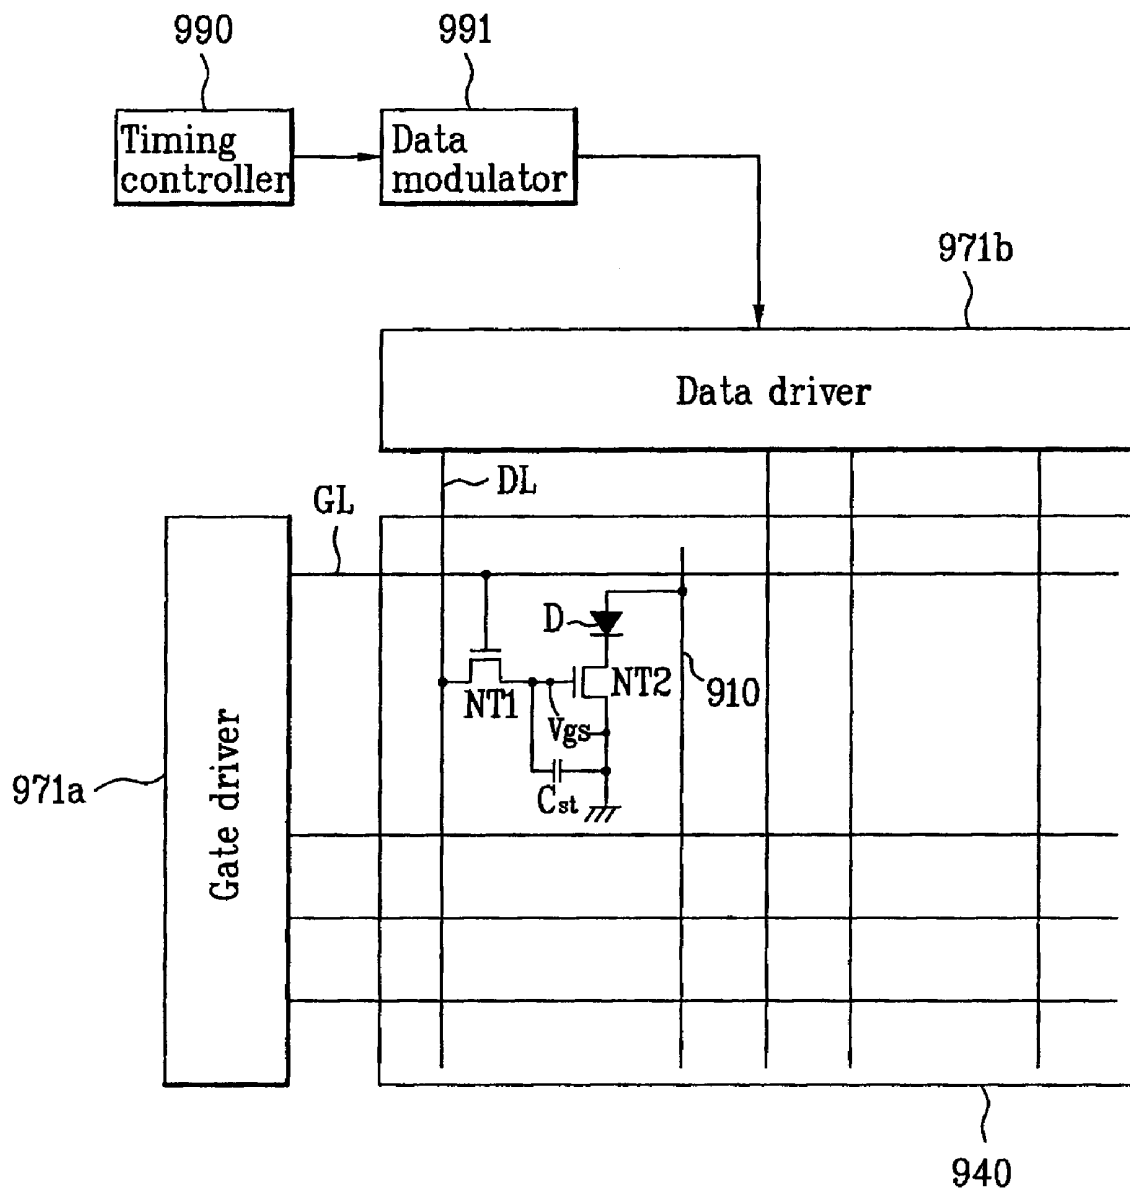


FIG. 10


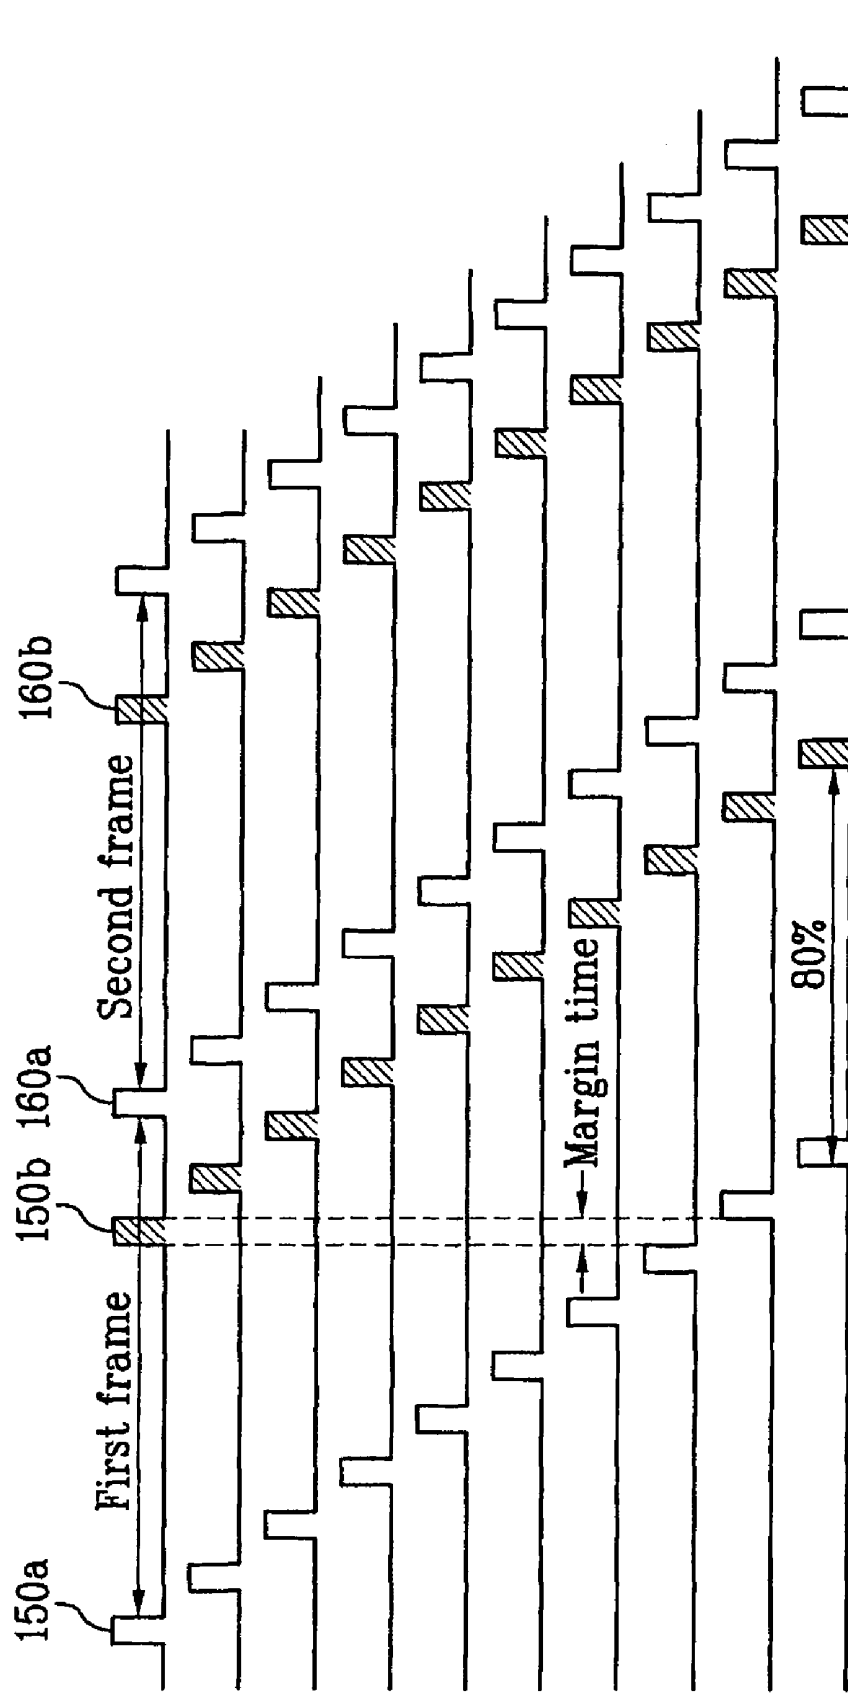


FIG. 11

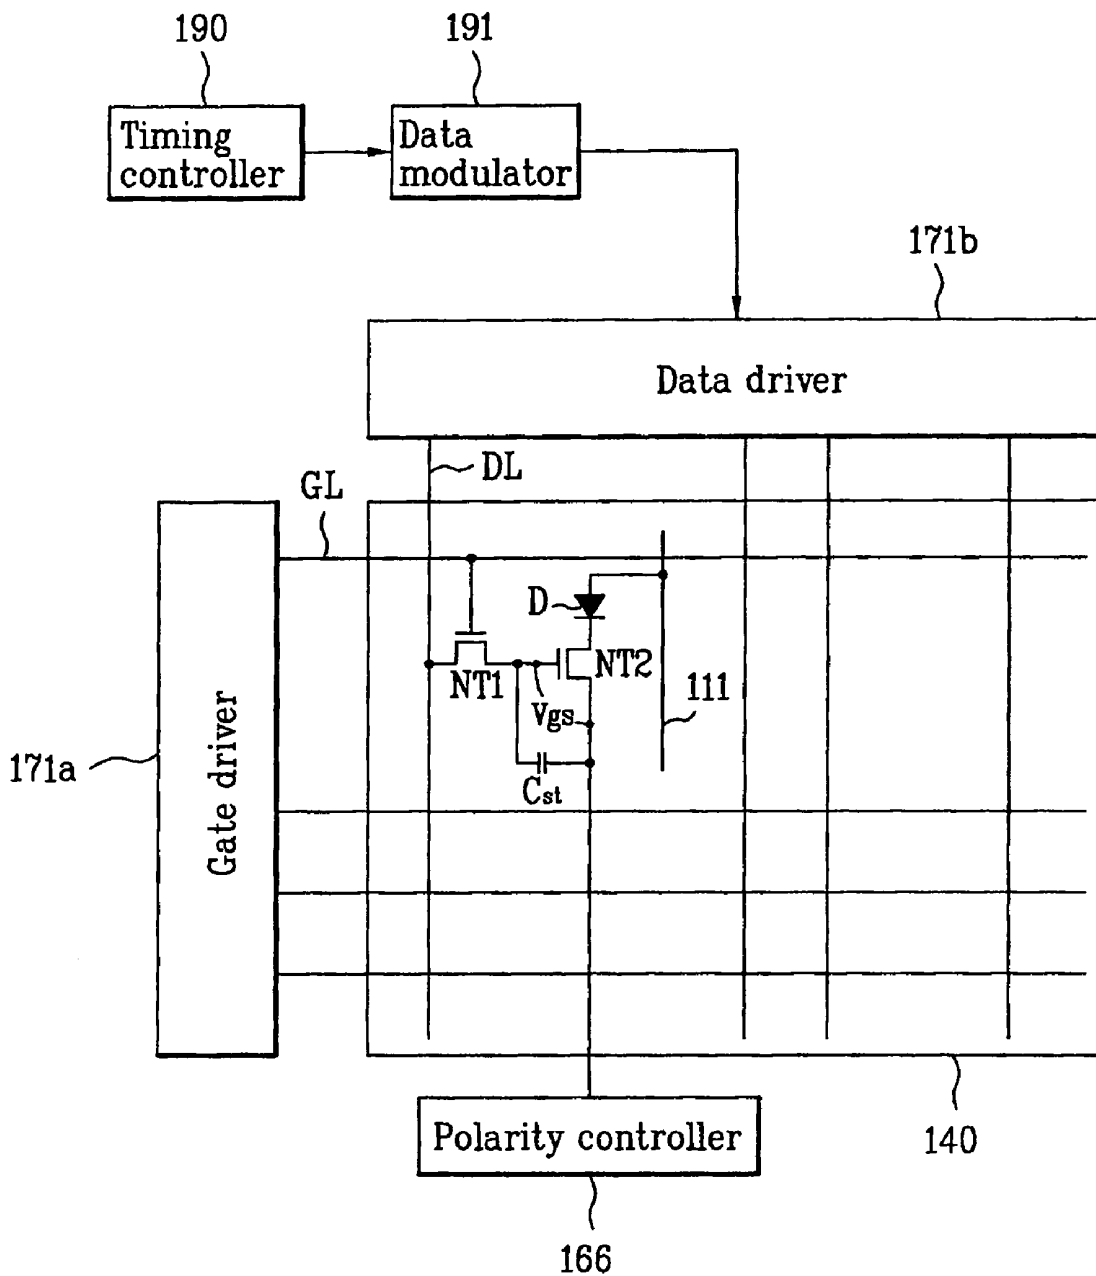

## ORGANIC ELECTRO-LUMINESCENT DISPLAY DEVICE AND METHOD FOR DRIVING THE SAME

This application claims the benefit of Korean Patent Appli- 5  
cation No. P2004-77890, filed on Sep. 30, 2004, which is  
hereby incorporated by reference as if fully set forth herein.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to an organic electro-lumi-  
nescent display device, and more particularly, to an organic  
electro-luminescent display device and a method for driving the  
organic electro-luminescent display device.

#### 2. Discussion of the Related Art

Various flat panel display devices have been developed to  
reduce weight and volume which are disadvantages of a cath-  
ode ray tube. These flat panel display devices may be, for  
example, a liquid crystal display, a field emission display, a  
plasma display panel, an electro-luminescent display, and the  
like.

Research has been actively done for increasing the display  
quality and screen of such flat panel display devices. The  
electro-luminescent display, among them, is a spontaneous  
emission device that emits light by itself. This electro-lumi-  
nescent display displays a video image by electrically excit- 25  
ing fluorescent material using carriers such as electrons and  
holes. Such electro-luminescent displays are roughly classi-  
fied into an inorganic electro-luminescent display device and  
an organic electro-luminescent display device according to  
the type of materials used therein. The organic electro-lumi-  
nescent display device is driven at a low voltage of about 5 to  
20V. The organic electro-luminescent display device can be  
driven at a direct current (DC) low voltage as compared with  
the inorganic electro-luminescent display device which  
requires a high drive voltage of 100 to 200V. The organic  
electro-luminescent display device also has superior charac-  
teristics of a wide viewing angle, a high-speed response, a  
high contrast ratio, etc., so that it can be utilized as a pixel of  
a graphic display, or a pixel of a television image display or  
surface light source. In addition, because the organic electro-  
luminescent display device is thin, light and colorful, it is  
suitable as a next-generation flat panel display.

On the other hand, a passive matrix type driving system 45  
having no separate thin film transistor is mainly used as a  
driving system of the organic electro-luminescent display  
device.

However, the passive matrix type driving system has many  
limiting factors in resolution, power consumption, lifetime, 50  
etc. For this reason, efforts have recently been made to  
research and develop an active matrix type electro-lumi-  
nescent display device for fabrication of a next-generation dis-  
play requiring a high resolution or large screen.

FIG. 1 is a circuit diagram showing a basic pixel structure 55  
of a conventional active matrix type organic electro-lumi-  
nescent display device.

The basic pixel structure of the conventional active matrix  
type organic electro-luminescent display device includes, as  
shown in FIG. 1, a gate line GL arranged in one direction, a  
data line DL arranged perpendicularly to the gate line GL, an  
electro-luminescent element D formed in a pixel defined by  
the gate line GL and the data line DL, a voltage supply line  
110 for supplying a DC voltage to the anode of the electro-  
luminescent element D, a first NMOS transistor NT1 having 65  
a gate terminal connected to the gate line GL and a drain  
terminal connected to the data line DL, a second NMOS

transistor NT2 having a gate terminal connected to the source  
terminal of the first NMOS transistor NT1, a drain terminal  
connected to the cathode of the electro-luminescent element  
D and a source terminal connected to a ground terminal, and  
a capacitor Cst connected between the gate terminal and  
source terminal of the second NMOS transistor NT2.

The first NMOS transistor NT1 is turned on in response to  
a scan signal from the gate line GL to form a current path  
between the source terminal and drain terminal thereof. The  
first NMOS transistor NT1 is also turned off when the voltage  
on the gate line GL is lower than a threshold voltage  $V_{th}$   
thereof. During a turn-on time of the first NMOS transistor  
NT1, a data voltage from the data line DL is applied to the gate  
terminal of the second NMOS transistor NT2 through the  
drain terminal of the first NMOS transistor NT1. When the  
first NMOS transistor NT1 is turned off, the current path  
between the source terminal and drain terminal of the first  
NMOS transistor NT1 is opened, thereby causing the data  
voltage not to be applied to the gate terminal of the second  
NMOS transistor NT2.

The second NMOS transistor NT2 adjusts the amount of  
current flowing between the source terminal and drain termi-  
nal thereof according to the level of the data voltage applied  
to the gate terminal thereof to actuate the electro-luminescent  
element D so as to emit light of an intensity corresponding to  
the data voltage.

The capacitor Cst maintains the data voltage applied to the  
gate terminal of the second NMOS transistor NT2 constantly  
for a period of one frame. The capacitor Cst also maintains  
current applied to the electro-luminescent element D con-  
stantly for the period of one frame.

Meanwhile, the data voltage applied to the gate terminal of  
the second NMOS transistor NT2 always has a constant  
polarity (positive polarity), and the source terminal of the  
second NMOS transistor NT2 is connected to the ground  
terminal. As a result, the gate-source voltage of the second  
NMOS transistor NT2 always has the positive polarity, result-  
ing in a problem in that the threshold voltage of the second  
NMOS transistor NT2 rises continuously toward one polarity  
(positive polarity). The rising of the threshold voltage of the  
second NMOS transistor NT2 causes a reduction in the  
amount of current supplied to the electro-luminescent ele-  
ment D and, in turn, a reduction in brightness of the electro-  
luminescent element D, which leads to a degradation in image  
quality. Therefore, a need exists for providing a driver for the  
electro-luminescent element that eliminates the degradation  
in image quality due to the continuous rise in the threshold  
voltage.

### SUMMARY OF THE INVENTION

An organic electro-luminescent display device may  
include an electro-luminescent element formed in each pixel  
for emitting light according to current supplied thereto; a first  
switching element for switching a data voltage from a data  
line in response to a scan signal from a gate line; a second  
switching element for adjusting the amount of the current  
supplied to the electro-luminescent element according to the  
data voltage switched by the first switching element; and a  
polarity controller for applying a voltage having a value  
between a minimum value and maximum value of the data  
voltage to a source terminal of the second switching element  
to vary a polarity of a gate-source voltage of the second  
switching element according to the data voltage applied to a  
gate terminal of the second switching element.

The organic electro-luminescent display device may  
include an electro-luminescent element formed in each pixel

for emitting light according to current supplied thereto; a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line; a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element; and a polarity controller for applying a pulse voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element, the pulse voltage periodically having a first voltage with a value between a minimum value and maximum value of the data voltage and a second voltage higher than the maximum value of the data voltage.

An organic electro-luminescent display device also may include an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto; a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line; a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element; and a polarity controller for selectively applying a voltage to a source terminal of the second switching element according to the data voltage applied to a gate terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element.

In another example, an organic electro-luminescent display device may include an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto; a data modulator for receiving image data from a timing controller, inserting dummy data between the received image data and outputting the resulting image data; a data driver for generating a data voltage based on the image data and a dummy data voltage based on the dummy data and supplying the generated data voltage and dummy data voltage to a plurality of data lines, the dummy data voltage having an opposite polarity to that of the data voltage; a gate driver for sequentially outputting a first scan pulse synchronized with the data voltage and a second scan pulse synchronized with the dummy data voltage to each gate line on a frame-by-frame basis; a first switching element for switching the data voltage and the dummy data voltage in response to the first scan pulse and the second scan pulse, respectively; and a second switching element formed in each pixel for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage and dummy data voltage switched by the first switching element.

An organic electro-luminescent display device may include an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto; a data modulator for receiving image data from a timing controller, inserting dummy data between the received image data and outputting the resulting image data; a data driver for generating a data voltage based on the image data and a dummy data voltage based on the dummy data and supplying the generated data voltage and dummy data voltage to a plurality of data lines, the dummy data voltage having a value lower than a minimum value of the data voltage; a gate driver for sequentially outputting a first scan pulse synchronized with the data voltage and a second scan pulse synchronized with the dummy data voltage to each gate line on a frame-by-frame basis; a first switching element for switching the data voltage and the dummy data voltage in response to the first scan pulse and the second scan pulse, respectively; a second switching element formed in each pixel for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage and dummy data voltage switched by

the first switching element; and a polarity controller for applying a voltage having a value between the minimum value and a maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage.

A method for driving an organic electro-luminescent display device, where the display device includes an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, may include the act of applying a voltage having a value between a minimum value and maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element.

Another method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, may include the act of applying a pulse voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element, the pulse voltage periodically having a first voltage with a value between a minimum value and maximum value of the data voltage and a second voltage higher than the maximum value of the data voltage.

A method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, may include the act of selectively applying a voltage to a source terminal of the second switching element according to the data voltage applied to a gate terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element.

Another method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, may include the acts of sensing an on/off state of the organic electro-luminescent display device, and applying a voltage to a source terminal of the second switching element, at the moment that both the first switching element and second switching element are turned off as the organic electro-luminescent display device is powered off, to vary a polarity of a gate-source voltage of the second switching element.

A method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, may further include the acts of receiving image data from a timing controller and inserting dummy data between the received image data; outputting a data voltage based on the image data and a dummy data voltage based on the dummy data, the dummy data voltage having an opposite polarity to that of the data voltage; applying a first scan pulse synchronized with the data voltage to a gate terminal of the first switching element to turn on the first switching element so as to apply the data voltage to a gate terminal of the second switching element; and applying a second scan pulse synchronized with the dummy data voltage to the gate terminal of the first switching element to turn on the first switching element so as to apply the dummy data voltage to the gate terminal of the second switching element.

Another method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, also may include the acts of receiving image data from a timing controller and inserting dummy data between the received image data; outputting a data voltage based on the image data and a dummy data voltage based on the dummy data, the dummy data voltage having a value lower than a minimum value of the data voltage; applying a first scan pulse synchronized with the data voltage to a gate terminal of the first switching element to turn on the first switching element so as to apply the data voltage to a gate terminal of the second switching element; applying a second scan pulse synchronized with the dummy data voltage to the gate terminal of the first switching element to turn on the first switching element so as to apply the dummy data voltage to the gate terminal of the second switching element; and applying a voltage having a value between the minimum value and a maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings. It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incor-

porated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIG. 1 is a circuit diagram of a basic pixel structure for a conventional active matrix type organic electro-luminescent display device;

FIG. 2 is a circuit diagram of a basic pixel structure for an organic electro-luminescent display device;

FIG. 3 is a graph illustrating a gamma curve;

FIG. 4 is a graph illustrating a critical gray scale corresponding to a critical voltage in FIG. 3 and a variation in polarity of a gate-source voltage of a second NMOS transistor in FIG. 2;

FIG. 5 is a circuit diagram showing a basic pixel structure of an organic electro-luminescent display device with a polarity controller that applies pulse voltages;

FIG. 6 is a timing diagram of a pulse voltage applied to a source terminal of a second NMOS transistor in FIG. 5;

FIG. 7 is a circuit diagram showing a basic pixel structure of an organic electro-luminescent display device polarity controller that selectively applies a voltage;

FIG. 8 is a view showing the configuration of an organic electro-luminescent display device with a data modulator;

FIG. 9 is a view showing the configuration of an organic electro-luminescent display device with a data modulator;

FIG. 10 is a timing diagram of a first scan pulse and second scan pulse applied to each gate line in FIG. 9; and

FIG. 11 is a view showing the configuration of an organic electro-luminescent display device with a polarity modulator.

#### DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to the examples which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

FIG. 2 is a circuit diagram showing a basic pixel structure of the organic electro-luminescent display device.

The basic pixel structure of the organic electro-luminescent display device may include a gate line GL arranged in one direction and serving to transfer a scan signal from a gate driver (not shown), a data line DL arranged perpendicularly to the gate line GL and serving to transfer a data voltage from a data driver (not shown), an electro-luminescent element D formed in a pixel defined by the gate line GL and the data line DL, a voltage supply line 210 for supplying a DC voltage to the anode of the electro-luminescent element D, a first NMOS transistor NT1 turned on in response to the scan signal from the gate line GL for switching and outputting the data voltage from the data line DL, and a second NMOS transistor NT2 turned on in response to the data voltage outputted from the first NMOS transistor NT1 for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the level of the data voltage and supplying the resulting current to the cathode of the electro-luminescent element D. The basic pixel structure of the organic electro-luminescent display device also may include a capacitor Cst having one end connected to the gate terminal of the second NMOS transistor NT2 and the other end connected to the source terminal of the second NMOS transistor NT2 and serving to maintain the data voltage applied to the gate terminal of the second NMOS transistor NT2 for a period of one frame, and a polarity controller 200 for applying a voltage (referred to hereinafter as a 'critical voltage DC') having a value between the minimum value and maximum value of the data voltage to the source terminal of the second

NMOS transistor NT2 to vary the polarity of a gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 according to the level of the data voltage applied to the gate terminal of the second NMOS transistor NT2.

A detailed description will hereinafter be given of the operation of the organic electro-luminescent display device with the above-stated configuration. The first NMOS transistor NT1 is turned on in response to the scan signal from the gate line GL to switch and output the data voltage from the data line DL. The switched data voltage is applied to the gate terminal of the second NMOS transistor NT2. When the data voltage applied to the gate terminal of the second NMOS transistor NT2 is higher than the critical voltage DC applied to the source terminal of the second NMOS transistor NT2, the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 becomes positive in polarity, so that the second NMOS transistor NT2 is turned on. Conversely, when the data voltage applied to the gate terminal of the second NMOS transistor NT2 is lower than the critical voltage DC applied to the source terminal of the second NMOS transistor NT2, the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 becomes negative in polarity, thereby causing the second NMOS transistor NT2 to be turned off. In this manner, the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 selectively has the positive polarity and the negative polarity depending on the level of the data voltage so that the threshold voltage of the switching element is prevented from rising continuously in one direction and avoiding a degradation of the picture quality of the display.

Therefore, it is possible to prevent the threshold voltage of the second NMOS transistor NT2 from rising toward any one polarity.

Meanwhile, the level of the critical voltage DC has a great effect on a predetermined number of gray scales and the frequency of the negative polarity depends on the data voltage. For this reason, it is important to optimize the level of the critical voltage DC, as will hereinafter be described in more detail.

FIG. 3 illustrates a gamma curve showing that the data voltage has different levels of gray scale according to the level thereof. The gray scale is a shade of gray including white, black and halftone, which is expressed by the level of brightness in a visual sensation. The higher the gray scale, the higher the intensity (brightness) of light emitted from the electro-luminescent element. Conversely, the lower the gray scale, the lower the intensity of light emitted from the electro-luminescent element. In other words, the intensity of light emitted from the electro-luminescent element increases when the data voltage has a higher gray scale, and decreases when the data voltage has a lower gray scale. In particular, the minimum data voltage has a lowest gray scale (black) and the maximum data voltage has a highest gray scale (white). As stated above, the level of the critical voltage DC is set between the minimum value and maximum value of the data voltage. As a result, the data voltage turns the second transistor NT2 on when being higher than the critical voltage DC, and the second transistor NT2 off when being lower than the critical voltage DC. The reason is that the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 becomes positive in polarity when the data voltage is higher than the critical voltage DC, and negative in polarity when the data voltage is lower than the critical voltage DC. Here, the turning-on of the second NMOS transistor NT2 means that the second NMOS transistor NT2 adjusts the amount of current between the source terminal and drain terminal thereof according to the level of the data voltage and supplies the resulting current to the electro-luminescent element D. In contrast, the turning-

off of the second NMOS transistor NT2 means that no current is supplied to the electro-luminescent element D. Namely, this means that the electro-luminescent element D emits no light (this also means the lowest gray scale (black)). In this case, the second NMOS transistor NT2 remains off irrespective of the respective levels of data voltages (data voltages lower than the critical voltage DC), so that the electro-luminescent element D always displays the brightness of the same gray scale (black) in spite of the different levels of the data voltages, which will hereinafter be again described in connection with a critical gray scale corresponding to the critical voltage DC.

FIG. 4 is a graph illustrating a gray scale (referred to hereinafter as a 'critical gray scale') corresponding to the critical voltage DC in FIG. 3 and a variation in polarity of the gate-source voltage  $V_{gs}$  of the second NMOS transistor.

As shown in FIG. 4, because gray scales lower than the critical gray scale corresponding to the critical voltage DC change the polarity of the gate-source voltage  $V_{gs}$  to negative, they all are displayed as the same gray scale (black). In contrast, because gray scales higher than the critical gray scale change the polarity of the gate-source voltage  $V_{gs}$  to positive, they each exhibit their own brightness.

To summarize, data voltages higher than the critical voltage DC are properly displayed as gray scales corresponding to the levels thereof, but data voltages lower than the critical voltage DC are displayed as the same gray scale (black). Thus, as the critical voltage DC is shifted toward the minimum value of the data voltage, the number of gray scales to be expressed is increased, but the frequency of the negative polarity of the gate-source voltage  $V_{gs}$  is relatively reduced. In contrast, as the critical voltage DC is shifted toward the maximum value of the data voltage, the frequency of the negative polarity of the gate-source voltage  $V_{gs}$  is increased, but the number of gray scales to be expressed is relatively reduced.

In an embodiment, the low gray scale zone of the gamma curve is utilized in order to optimize the critical voltage DC with the aforementioned characteristics. That is, the gamma curve shown in FIG. 3 is partitioned into a low gray scale zone where gray scales of dark shades including a black gray scale are distributed, a high gray scale zone where gray scales of bright shades including a white gray scale are distributed, and a halftone zone where gray scales of shades between the gray scales of the low gray scale zone and the gray scales of the high gray scale zone are distributed. A difference in brightness among the gray scales distributed in the low gray scale zone is invisible to the human eye. In other words, all the gray scales distributed in the low gray scale zone are seen as the same brightness (black gray scale) with the naked eye. The low gray scale zone with these characteristics forms about 30% of the entire gray scale zone. Therefore, the polarity of the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2 is driven to negative with respect to data voltages corresponding to the low gray scale zone, and to positive with respect to data voltages corresponding to the other zones. It may be preferable that the critical gray scale is set to a gray scale having a highest level in the low gray scale zone to maximize the frequency of the negative polarity of the gate-source voltage  $V_{gs}$  of the second NMOS transistor NT2. Here, the level of the critical voltage DC which is outputted from the polarity controller 200 is set according to the critical gray scale with the level as described above. Provided that the critical voltage DC is set based on the critical gray scale in this manner, the number of gray scales will be advantageously maintained as it is although all data voltages lower than the critical voltage DC are displayed as the same black gray scale.

In order to obtain the above-stated effect, a polarity controller **200** may output a pulse voltage periodically having the critical voltage DC and a voltage higher than the maximum value of the data voltage, as will hereinafter be described in more detail.

FIG. **5** is a circuit diagram showing a basic pixel structure of an organic electro-luminescent display device with a pulse generator that outputs a second voltage periodically. FIG. **6** is a timing diagram of the pulse voltage applied to a source terminal of a second NMOS transistor in FIG. **5**.

The basic pixel structure of the organic electro-luminescent display device may include, as shown in FIG. **5**, a gate line GL arranged in one direction and serving to transfer a scan signal, a data line DL arranged perpendicularly to the gate line GL and serving to transfer a data voltage, an electro-luminescent element D formed in a pixel defined by the gate line GL and the data line DL, a voltage supply line **510** for supplying a DC voltage to the anode of the electro-luminescent element D, a first NMOS transistor NT1 turned on in response to the scan signal from the gate line GL for switching and outputting the data voltage from the data line DL, and a second NMOS transistor NT2 turned on in response to the data voltage outputted from the first NMOS transistor NT1 for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the level of the data voltage and supplying the resulting current to the cathode of the electro-luminescent element D. The basic pixel structure of the organic electro-luminescent display device also may include a capacitor Cst having one end connected to the gate terminal of the second NMOS transistor NT2 and the other end connected to the source terminal of the second NMOS transistor NT2 and serving to maintain the data voltage applied to the gate terminal of the second NMOS transistor NT2 for a period of one frame, and a polarity controller **500** for applying a pulse voltage AC periodically having a first voltage with a value between the minimum value and maximum value of the data voltage and a second voltage higher than the maximum value of the data voltage to the source terminal of the second NMOS transistor NT2 to vary the polarity of a gate-source voltage Vgs of the second NMOS transistor NT2.

The first voltage is a voltage having the same condition as that of the critical voltage DC as previously described in the earlier example. That is, the first voltage is a voltage corresponding to the critical gray scale having the highest level in the low gray scale zone. The pulse voltage AC has a period set on the basis of a frame. Here, the frame is a period in which one image is displayed on the screen of the organic electro-luminescent display device. The first voltage is applied to the source terminal of the second NMOS transistor NT2 for a period of several ones of a plurality of frames, and the second voltage is applied to the source terminal of the second NMOS transistor NT2 for a period of the remaining frames.

Because the second voltage is higher than the data voltage, black is displayed on the entire screen of the organic electro-luminescent display device for the frame period in which the second voltage is applied to the source terminal of the second NMOS transistor NT2. For this reason, when a larger number of frames among the total frames correspond to the frame period in which the second voltage is applied, screen flickering is liable to occur. Therefore, as shown in FIG. **6**, the first voltage is applied to the source terminal of the second NMOS transistor NT2 for a period of at least thirty frames, and the second voltage is applied to the source terminal of the second NMOS transistor NT2 for a period of one frame.

The operation of the organic electro-luminescent display device with the above-stated configuration for this example

will hereinafter be described in conjunction with the above-stated respective frame periods.

The first voltage is applied to the source terminal of the second NMOS transistor NT2 for the period of the first to thirtieth frames, so that the second NMOS transistor NT2 is operated in the same manner as in the above-stated first embodiment. The characteristics of images are reflected on the screen of the organic electro-luminescent display device as they are.

Thereafter, the second voltage which is higher than the maximum value of the data voltage is applied to the source terminal of the second NMOS transistor NT2 for the period of the thirty-first frame. As a result, because the data voltage which is applied to the gate terminal of the second NMOS transistor NT2 is always lower than the second voltage, the gate-source voltage Vgs of the second NMOS transistor NT2 always remains negative in polarity for the period of the thirty-first frame. Consequently, black is displayed on the entire screen of the organic electro-luminescent display device for the frame period of the thirty-first frame.

Accordingly, for the period of the first to thirtieth frames, the gate-source voltage Vgs of the second NMOS transistor NT2 selectively has the positive polarity and the negative polarity (in the same manner as in the previous embodiment). For the period of the thirty-first frame, the gate-source voltage Vgs of the second NMOS transistor NT2 has the negative polarity.

In another embodiment, periodic screen flickering may occur due to the periodic display of a frame with brightness corresponding to the black gray scale, but the frequency of the negative polarity of the gate-source voltage Vgs may be advantageously increased as compared with that in the previous embodiment.

An organic electro-luminescent display device according to another embodiment will hereinafter be described in detail. FIG. **7** is a circuit diagram showing a basic pixel structure of the organic electro-luminescent display device having a comparator and a voltage generator.

The basic pixel structure of the organic electro-luminescent display device may include a gate line GL arranged in one direction and serving to transfer a scan signal, a data line DL arranged perpendicularly to the gate line GL and serving to transfer a data voltage, an electro-luminescent element D formed in a pixel defined by the gate line GL and the data line DL, a voltage supply line **710** for supplying a DC voltage to the anode of the electro-luminescent element D, a first NMOS transistor NT1 turned on in response to the scan signal from the gate line GL for switching and outputting the data voltage from the data line DL, and a second NMOS transistor NT2 turned on in response to the data voltage outputted from the first NMOS transistor NT1 for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the level of the data voltage and supplying the resulting current to the cathode of the electro-luminescent element D. The basic pixel structure of the organic electro-luminescent display device also may include a capacitor Cst having one end connected to the gate terminal of the second NMOS transistor NT2 and the other end connected to the source terminal of the second NMOS transistor NT2 and serving to maintain the data voltage applied to the gate terminal of the second NMOS transistor NT2 for a period of one frame, and a polarity controller **700** for selectively applying a voltage to the source terminal of the second NMOS transistor NT2 according to the level of the data voltage applied to the gate terminal of the second NMOS transistor NT2 to vary the polarity of a gate-source voltage Vgs of the second NMOS transistor NT2.

The polarity controller **700** includes a comparator **700a** for comparing a gray scale corresponding to the level of the data voltage with a predetermined critical gray scale and outputting a control signal when the gray scale corresponding to the level of the data voltage is lower than the critical gray scale, a voltage generator **700b** for generating a voltage higher than the maximum value of the data voltage, and a third NMOS transistor **NT3** turned on in response to the control signal from the comparator **700a** for applying the voltage from the voltage generator **700b** to the source terminal of the second NMOS transistor **NT2**. Here, the critical gray scale is a gray scale having the same condition as that of the critical gray scale described earlier. That is, the critical gray scale is a gray scale having the highest level in the low gray scale zone.

A detailed description will hereinafter be given of the operation of the organic electro-luminescent display device with the above-stated configuration. The first NMOS transistor **NT1** is turned on in response to the scan signal from the gate line **GL** to switch and output the data voltage from the data line **DL**. The switched data voltage is applied simultaneously to the gate terminal of the second NMOS transistor **NT2** and the comparator **700a**. At this time, the comparator **700a** compares the gray scale corresponding to the level of the data voltage with the predetermined critical gray scale and outputs no control signal when the gray scale corresponding to the level of the data voltage is higher than the critical gray scale. As a result, no voltage is applied to the source terminal of the second NMOS transistor **NT2**, thereby causing the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** to be maintained at the positive polarity. Accordingly, the second NMOS transistor **NT2** is turned on to adjust the amount of current flowing between the source terminal and drain terminal thereof according to the level of the data voltage and supply the resulting current to the cathode of the electro-luminescent element **D**. Thus, the electro-luminescent element **D** emits light of an intensity corresponding to the amount of the current supplied thereto.

On the other hand, when the gray scale corresponding to the level of the data voltage is lower than the critical gray scale, the comparator **700a** outputs the control signal to the gate terminal of the third NMOS transistor **NT3**. Then, the third NMOS transistor **NT3** is turned on in response to the control signal from the comparator **700a** to apply the voltage from the voltage generator **700b** to the source terminal of the second NMOS transistor **NT2**. At this time, because the voltage from the voltage generator **700b** is higher than the maximum value of the data voltage, the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** is maintained at the negative polarity. As a result, the second NMOS transistor **NT2** remains off and thus no current flows between the source terminal and drain terminal of the second NMOS transistor **NT2**. Consequently, the electro-luminescent element **D** emits no light.

A further example of an organic electro-luminescent display device will hereinafter be described in detail with reference to FIG. **8**. The organic electro-luminescent display device may include a gate line **GL** and a data line **DL** arranged to cross each other, a gate driver **820a** for supplying a scan signal to the gate line **GL**, a data driver **820b** for supplying a data voltage to the data line **DL**, an electro-luminescent element **D** formed in a pixel defined by the gate line **GL** and the data line **DL**, a voltage supply line **810** for supplying a DC voltage to the anode of the electro-luminescent element **D**, a first NMOS transistor **NT1** turned on in response to the scan signal from the gate line **GL** for switching and outputting the data voltage from the data line **DL**, and a second NMOS transistor **NT2** turned on in response to the data voltage

outputted from the first NMOS transistor **NT1** for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the level of the data voltage and supplying the resulting current to the cathode of the electro-luminescent element **D**. The organic electro-luminescent display device also may include a capacitor **Cst** having one end connected to the gate terminal of the second NMOS transistor **NT2** and the other end connected to the source terminal of the second NMOS transistor **NT2** and serving to maintain the data voltage applied to the gate terminal of the second NMOS transistor **NT2** for a period of one frame, and a polarity controller **800** for applying a critical voltage having a value between the minimum value and maximum value of the data voltage to the source terminal of the second NMOS transistor **NT2** to vary the polarity of a gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** according to the level of the data voltage applied to the gate terminal of the second NMOS transistor **NT2**. The organic electro-luminescent display device also may include a power supply **803** for supplying the DC voltage to the voltage supply line **810** and supplying a drive voltage to each of the gate driver **820a**, data driver **820b** and polarity controller **800**, a sensor **802** for receiving the drive voltage supplied from the power supply **803**, sensing the supply of no power to the power supply **803** when a power switch is turned off (when the organic electro-luminescent display device is powered off) and outputting a sensing signal as a result of the sensing, and a redundant power supply **801** for supplying the drive voltage to the polarity controller **800** in response to the sensing signal from the sensor **802**. The redundant power supply **801** includes a charger (not shown) for charging itself with the drive voltage from the power supply **803**.

A detailed description will hereinafter be given of the operation of the organic electro-luminescent display device with the above-stated configuration. First, if the user powers on the organic electro-luminescent display device, the power supply **803** is enabled to supply a desired drive voltage to each of the gate driver **820a**, data driver **820b**, polarity controller **800**, redundant power supply **801** and sensor **802**. At this time, because the power supply **803** is enabled (because the organic electro-luminescent display device is powered on), the sensor **802** outputs no sensing signal. As a result, the redundant power supply **801** supplies no drive voltage to the polarity controller **800** and the charger thereof simply functions to charge itself with the drive voltage from the power supply **803**. Meanwhile, in response to the drive voltage from the power supply **803**, the gate driver **820a** outputs the scan signal to the gate line **GL**, the data driver **820b** outputs the data voltage to the data line **DL**, and the polarity controller **800** outputs the critical voltage to the source terminal of the second NMOS transistor **NT2**. The critical voltage is a voltage having the same condition as that of the critical voltage described previously. That is, the critical voltage is a voltage corresponding to the critical gray scale having the highest level in the low gray scale zone. If the power supply **803** is enabled as power is applied to the organic electro-luminescent display device, as stated above, this structure is operated in the same manner as the previous structure. Namely, the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** selectively has the positive polarity and the negative polarity according to the level of the data voltage which is applied to the gate terminal of the second NMOS transistor **NT2**.

On the other hand, if the user powers off the organic electro-luminescent display device (i.e., if the user powers off an associated monitor or TV), the power supply **803** is disabled, so that the gate driver **820a**, data driver **820b** and polarity controller **800** are not operated. Of course, no DC voltage is

supplied to the voltage supply line **810**. As a result, the first NMOS transistor **NT1** and the second NMOS transistor **NT2** are not operated. At this time, the sensor **802** senses the supply of no drive voltage from the power supply **803** and outputs the resulting sensing signal to the redundant power supply **801**. Then, the redundant power supply **801** applies the drive voltage stored in the charger thereof to the polarity controller **800** in response to the sensing signal from the sensor **802**. Then, the polarity controller **800** generates the critical voltage using the drive voltage from the redundant power supply **801** and supplies it to the source terminal of the second NMOS transistor **NT2**. At this time, because no data voltage is applied to the gate terminal of the second NMOS transistor **NT2** (i.e., 0V is applied to the gate terminal of the second NMOS transistor **NT2**), the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** is maintained at the negative polarity. Notably, the redundant power supply **801** maintains the drive voltage as much as the capacity of the charger, so that it transfers the drive voltage to the polarity controller **800** only for a predetermined period of time. In brief, the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** selectively has the positive polarity and the negative polarity according to the level of the data voltage while the organic electro-luminescent display device is powered on, and is maintained at the negative polarity for the predetermined time period under the condition that the organic electro-luminescent display device is powered off.

FIG. 9 shows a configuration of the organic electro-luminescent display device with a data modulator.

The organic electro-luminescent display device has an organic panel **940** including a plurality of gate lines **GL** and a plurality of data lines **DL**, arranged to cross each other, a data modulator **991** for receiving image data from a timing controller **990**, inserting dummy data between the received image data and outputting the resulting image data, a data driver **971b** for receiving the dummy data-inserted image data from the data modulator **991**, generating a positive data voltage based on the received image data and a negative dummy data voltage based on the dummy data and supplying the generated positive data voltage and negative dummy data voltage to the data lines **DL** of the organic panel **940**, and a gate driver **971a** for sequentially outputting a first scan pulse synchronized with the positive data voltage and a second scan pulse synchronized with the negative dummy data voltage to the gate lines **GL** of the organic panel **940** on a frame-by-frame basis. The organic electro-luminescent display device includes further, an electro-luminescent element **D** formed in each pixel of the organic panel **940**, a voltage supply line **910** for supplying a DC voltage to the anode of the electro-luminescent element **D**, a first NMOS transistor **NT1** having a source terminal connected to a ground terminal and serving to switch and output the positive data voltage from a corresponding one of the data lines **DL** in response to the first scan pulse from a corresponding one of the gate lines **GL** and switch and output the negative dummy data voltage from the corresponding data line **DL** in response to the second scan pulse from the corresponding gate line **GL**, a second NMOS transistor **NT2** for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the positive data voltage and negative dummy data voltage from the first NMOS transistor **NT1** and supplying the resulting current to the cathode of the electro-luminescent element **D**, and a capacitor **Cst** having one end connected to the gate terminal of the second NMOS transistor **NT2** and the other end connected to the source terminal of the second NMOS transistor **NT2** and serving to alternately maintain the positive data

voltage and negative dummy data voltage applied to the gate terminal of the second NMOS transistor **NT2** for a period of one frame.

By virtue of this configuration, the polarity of the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** can be periodically changed by periodically applying the positive data voltage and the negative dummy data voltage to the gate terminal of the second NMOS transistor **NT2**.

A detailed description will hereinafter be given of the operation of the organic electro-luminescent display device with the above-stated configuration. First, the data modulator **991** receives image data from the timing controller **990**, inserts dummy data between the received image data and outputs the resulting image data. The data driver **971b** receives the dummy data-inserted image data from the data modulator **991**, generates a positive data voltage based on the received image data and a negative dummy data voltage based on the dummy data and supplies the generated positive data voltage and negative dummy data voltage to the data lines **DL** of the organic panel **940**. The gate driver **971a** generates a first scan pulse synchronously with the positive data voltage and supplies the generated first scan pulse to the gate lines **GL**. The first scan pulse supplied to the corresponding gate line **GL** is applied to the gate terminal of the first NMOS transistor **NT1**. As a result, the first NMOS transistor **NT1** is turned on to switch and apply the positive data voltage synchronized with the first scan pulse from the corresponding data line **DL** to the gate terminal of the second NMOS transistor **NT2**. Then, the second NMOS transistor **NT2** is turned on to generate current corresponding to the positive data voltage between the source terminal and drain terminal thereof and supply the resulting current to the cathode of the electro-luminescent element **D**, so that the electro-luminescent element **D** emits light. At this time, the positive data voltage is maintained in the capacitor **Cst**. Thereafter, before the next frame is started (i.e., before the next first scan pulse indicative of the next frame is outputted), the gate driver **971a** supplies a second scan pulse synchronized with the negative dummy data voltage to the gate lines **GL**. The second scan pulse supplied to the corresponding gate line **GL** is applied to the gate terminal of the first NMOS transistor **NT1**. As a result, the second NMOS transistor **NT2** is turned off, thereby causing the electro-luminescent element **D** to emit no light. At this time, the negative dummy data voltage is maintained in the capacitor **Cst**.

The first scan pulse and the second scan pulse will hereinafter be described in more detail.

FIG. 10 is a timing diagram of the first scan pulse and second scan pulse applied to each gate line in FIG. 9.

The first scan pulse **150a** or **160a** and the second scan pulse **150b** or **160b** are sequentially applied in pair to each gate line **GL** for every frame. The second scan pulse **150b** or **160b** is outputted so as to be placed between the first scan pulses **150a** and **160a** of the adjacent frames. For example, the second scan pulse **150b** of the first frame is outputted so as to be placed between the first scan pulse **150a** of the first frame and the first scan pulse **160a** of the second frame. At this time, if the second scan pulse **150b** of the first frame is placed closer to the first scan pulse **150a** of the first frame, the time interval between the second scan pulse **150b** of the first frame and the first scan pulse **150a** of the first frame becomes smaller (i.e., the sustain time of the first scan pulse **150a** of the first frame becomes shorter), resulting in a reduction in time for which the positive data voltage, applied to the second NMOS transistor **NT2** synchronously with the first scan pulse **150a** of the first frame, is maintained in the capacitor **Cst**. Conversely, if the second scan pulse **150b** of the first frame is placed closer

to the first scan pulse **160a** of the second frame, the time interval between the second scan pulse **150b** of the first frame and the first scan pulse **150a** of the first frame becomes larger (i.e., the sustain time of the first scan pulse **150a** of the first frame becomes longer), resulting in an increase in time for which the positive data voltage, applied to the second NMOS transistor **NT2** synchronously with the first scan pulse **150a** of the first frame, is maintained in the capacitor **Cst**. That is, in order to express an image corresponding to the positive data voltage for the longest time in one frame, it is advantageous to increase the time interval between the first scan pulse **150a** or **160a** and the second scan pulse **150b** or **160b** in one frame. However, the larger the time interval between the first scan pulse **150a** or **160a** and the second scan pulse **150b** or **160b** in one frame, the shorter the distance between the second scan pulse **150b** of the first frame and the first scan pulse **160a** of the second frame, resulting in a reduction in time for which the negative dummy data voltage, applied to the second NMOS transistor **NT2** synchronously with the second scan pulse **150b**, is maintained in the capacitor **Cst**. This means a reduction in time for which the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** can be maintained at the negative polarity. The optimized time interval between the first scan pulse **150a** or **160a** and the second scan pulse **150b** or **160b** in one frame is defined as follows.

Assuming that the time from a falling edge of the first scan pulse **150a** of the first frame to a rising edge of the first scan pulse **160a** of the second frame is **100**, the second scan pulse **150b** of the first frame is outputted at a time of about **80**. Thus, the positive data voltage is applied to the gate terminal of the second NMOS transistor **NT2** in 80% of the period of one frame and the negative dummy data voltage is applied to the gate terminal of the second NMOS transistor **NT2** in the remaining 20%.

At this time, the first scan pulse **150a** or **160a** and second scan pulse **150b** or **160b** applied to the corresponding gate line **GL** may not temporally overlap with the first scan pulses **150a** or **160a** and second scan pulses **150b** or **160b** applied to the remaining gate lines **GL**. To avoid an overlap, the first scan pulses **150a** or **160a** are sequentially applied to the gate lines **GL** with a temporal margin being present therebetween, and the second scan pulses **150b** or **160b** are sequentially applied to the gate lines **GL** at the margin time (blank time) present between the first scan pulses **150a** or **160a**.

In this manner, the polarity of the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** can be periodically changed by applying the positive data voltage to the gate terminal of the second NMOS transistor **NT2** at the application time of the first scan pulse **150a** or **160a** and applying the negative data voltage to the gate terminal of the second NMOS transistor **NT2** at the application time of the second scan pulse **150b** or **160b**.

FIG. 11 shows another possible configuration of the organic electro-luminescent display device. The organic electro-luminescent display device may have an organic panel **140** including a plurality of gate lines **GL** and a plurality of data lines **DL** arranged to cross each other, a data modulator **191** for receiving image data from a timing controller **190**, inserting dummy data between the received image data and outputting the resulting image data, a data driver **171b** for receiving the dummy data-inserted image data from the data modulator **191**, generating a data voltage based on the received image data and a dummy data voltage based on the dummy data, which is lower than the minimum value of the data voltage, and supplying the generated data voltage and dummy data voltage to the data lines **DL** of the organic panel **140**, a gate driver **171a** for sequentially outputting a first scan

pulse synchronized with the data voltage and a second scan pulse synchronized with the dummy data voltage to the gate lines **GL** of the organic panel **140**, an electro-luminescent element **D** formed in a pixel defined by each of the gate lines **GL** and each of the data lines **DL**, and a voltage supply line **111** for supplying a DC voltage to the anode of the electro-luminescent element **D**. The organic electro-luminescent display device may also include a first NMOS transistor **NT1** for switching and outputting the data voltage from a corresponding one of the data lines **DL** in response to the first scan pulse from a corresponding one of the gate lines **GL** and switching and outputting the dummy data voltage from the corresponding data line **DL** in response to the second scan pulse from the corresponding gate line **GL**, a second NMOS transistor **NT2** for adjusting the amount of current flowing between the source terminal and drain terminal thereof according to the data voltage and dummy data voltage from the first NMOS transistor **NT1** and supplying the resulting current to the cathode of the electro-luminescent element **D**, a polarity controller **166** for applying a voltage having a value between the minimum value and maximum value of the data voltage to the source terminal of the second NMOS transistor **NT2** to vary the polarity of a gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** according to the level of the data voltage, and a capacitor **Cst** having one end connected to the gate terminal of the second NMOS transistor **NT2** and the other end connected to the source terminal of the second NMOS transistor **NT2** and serving to maintain the data voltage applied to the gate terminal of the second NMOS transistor **NT2** for a period of one frame.

The voltage from the polarity controller **166** is the same as the critical voltage **DC** as described earlier. The dummy data voltage is substantially **0V**. Accordingly, when the second scan pulse is applied to the first NMOS transistor **NT1**, **0V** is always applied to the gate terminal of the second NMOS transistor **NT2**. As a result, the voltage at the gate terminal of the second NMOS transistor **NT2** is always lower than the voltage at the source terminal of the second NMOS transistor **NT2** to which the voltage from the polarity controller **166** is applied. Consequently, when the second scan pulse is outputted, the gate-source voltage  $V_{gs}$  of the second NMOS transistor **NT2** is always maintained at the negative polarity. On the other hand, when the first scan pulse is applied to the first NMOS transistor **NT1**, the second NMOS transistor **NT2** is operated in the same manner as in the first embodiment. Also, the first scan pulse and the second scan pulse are the same as those in the fifth embodiment.

As apparent from the above description, the organic electro-luminescent display device and the method for driving the same have effects as follows.

Firstly, a critical voltage having a value between the minimum value and maximum value of a data voltage is applied to a source terminal of a switching element to vary the polarity of a gate-source voltage of the switching element according to the level of the data voltage applied to the gate terminal of the switching element, thereby preventing the switching element from being deteriorated.

Secondly, a pulse voltage periodically having the critical voltage and a voltage higher than the maximum value of the data voltage is applied to the source terminal of the switching element to vary the polarity of the gate-source voltage of the switching element on a frame-by-frame basis according to the level of the data voltage applied to the gate terminal of the switching element, thereby preventing the switching element from being deteriorated.

Thirdly, while the organic electro-luminescent display device is powered on, the critical voltage is applied to vary the

polarity of the gate-source voltage of the switching element. In addition, even while the organic electro-luminescent display device is powered off, the critical voltage is applied for a predetermined period of time to maintain the gate-source voltage of the switching element at a negative polarity, thereby preventing the switching element from being deteriorated.

Fourthly, dummy data is inserted between image data, and a positive data voltage based on the image data is applied to the gate terminal of the switching element and a negative dummy data voltage based on the dummy data is periodically applied to the gate terminal of the switching element, to vary the polarity of the gate-source voltage of the switching element, thereby preventing the switching element from being deteriorated.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An organic electro-luminescent display device comprising:

a plurality of pixels, the pixel having an electro-luminescent element that emits light according to an amount of current supplied thereto;

a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line; a second switching element that adjusts the amount of current supplied to the electro-luminescent element according to the data voltage switched by the first switching element; and

a polarity controller that applies a voltage having a value between a minimum value and a maximum value of the data voltage to a source terminal of the second switching element that varies a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element, wherein the voltage from the polarity controller is a direct current (DC) voltage which has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone that is less than 30% of an entire gray scale zone predefined according to data voltages.

2. The organic electro-luminescent display device as set forth in claim 1, further comprising:

a gate driver that provides the scan signal to the gate line; a data driver that provides the data voltage to the data line; a power supply that supplies a drive voltage to each of the gate driver, data driver and polarity controller; a sensor that senses when the power supply does not output the drive voltage and outputs a resulting sensing signal; and

a redundant power supply that supplies the drive voltage to the polarity controller in response to the sensing signal from the sensor.

3. The organic electro-luminescent display device as set forth in claim 2, wherein the redundant power supply includes a charger that charges the redundant power supply with the drive voltage from the power supply.

4. An organic electro-luminescent display device comprising:

a plurality of pixels, the pixels having an electro-luminescent element that emits light according to a current supplied thereto;

a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line; a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element; and

a polarity controller that applies a pulse voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element, the pulse voltage periodically having a first voltage with a value between a minimum value and a maximum value of the data voltage and a second voltage that is higher than the maximum value of the data voltage, wherein the first voltage has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone that is less than 30% of an entire gray scale zone predefined according to data voltages.

5. An organic electro-luminescent display device comprising:

a plurality of pixels, the pixels having an electro-luminescent element that emits light according to an amount of a current supplied thereto;

a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line; a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element; and

a polarity controller that selectively applies a voltage to a source terminal of the second switching element according to the data voltage applied to a gate terminal of the second switching element that varies a polarity of a gate-source voltage of the second switching element; wherein the polarity controller further comprises: a comparator that compares a gray scale corresponding to a level of the data voltage with a predetermined critical gray scale and outputs a control signal only when the gray scale corresponding to the level of the data voltage is lower than the critical gray scale, a voltage generator that generates a voltage, and a third switching element turned on in response to the control signal from the comparator and applies the voltage from the voltage generator to the source terminal of the second switching element;

wherein the critical gray scale has a highest level in a gray scale zone that is less than 30% of an entire gray scale predefined according to data voltages.

6. The organic electro-luminescent display device as set forth in claim 5, wherein the voltage from the voltage generator is a DC voltage higher than a maximum value of the data voltage.

7. An organic electro-luminescent display device comprising:

a plurality of pixels, the pixels having an electro-luminescent element that emits light according to an amount of a current supplied thereto;

a data modulator that receives image data from a timing controller, inserts dummy data between the received image data and outputs the resulting image data;

a data driver that generates a data voltage based on the image data and a dummy data voltage based on the dummy data and supplies the generated data voltage and dummy data voltage to a plurality of data lines, the dummy data voltage having a value lower than a minimum value of the data voltage;

a gate driver that sequentially outputs a first scan pulse synchronized with the data voltage and a second scan pulse synchronized with the dummy data voltage to each gate line on a frame-by-frame basis;

a first switching element that switches the data voltage and the dummy data voltage in response to the first scan pulse and the second scan pulse, respectively;

a second switching element formed in each pixel that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage and dummy data voltage switched by the first switching element; and

a polarity controller that applies a voltage having a value between the minimum value and a maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage, wherein the voltage from the polarity controller has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone less than 30% of a total gray scale zone predefined according to data voltages.

8. The organic electro-luminescent display device as set forth in claim 7, further comprising a capacitor connected between a gate terminal of the second switching element and a source terminal thereof, the capacitor alternately maintaining the data voltage and the dummy data voltage for a period of one frame.

9. The organic electro-luminescent display device as set forth in claim 8, wherein the second scan pulse of an nth frame applied to an arbitrary one of the gate lines is placed between the first scan pulse of the nth frame applied to the arbitrary gate line and the first scan pulse of an (n+1)th frame applied to the arbitrary gate line, the second scan pulse of the nth frame being applied to the arbitrary gate line at a time corresponding to 80% of a time from a falling edge of the first scan pulse of the nth frame to a rising edge of the first scan pulse of the (n+1)th frame.

10. The organic electro-luminescent display device as set forth in claim 9, wherein the first scan pulses corresponding respectively to the gate lines are sequentially applied to the corresponding gate lines with a temporal margin of time being present therebetween, and the second scan pulses corresponding respectively to the gate lines are sequentially applied to the corresponding gate lines at the temporal margin of time present between the first scan pulses.

11. A method for driving an organic electro-luminescent display device, the display device including an electro-luminescent element formed in each pixel for emitting light according to current supplied thereto, a first switching element for switching a data voltage from a data line in response to a scan signal from a gate line, and a second switching element for adjusting the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, the method comprising the step of:

applying a voltage having a value between a minimum value and maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element, wherein the voltage applied to the source terminal of the second switching element has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone less than 30% of total gray scale zone predefined according to data voltages.

12. A method for driving an organic electro-luminescent display device, the display device including a plurality of pixels, the pixels having an electro-luminescent element formed in each pixel that emits light according to current supplied thereto, a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line, and a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, the method comprising:

applying a pulse voltage to a source terminal of the second switching element;

varying a polarity of a gate-source voltage of the second switching element according to the data voltage applied to a gate terminal of the second switching element; and changing the pulse voltage periodically to have a first voltage with a value between a minimum value and maximum value of the data voltage and a second voltage higher than the maximum value of the data voltage, wherein the first voltage has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone less than 30% of a total gray scale zone predefined according to data voltages.

13. A method for driving an organic electro-luminescent display device, the display device including a plurality of pixels, the pixels having an electro-luminescent element that emits light according to an amount of a current supplied thereto, a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line, and a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, the method comprising the step of:

selectively applying a voltage to a source terminal of the second switching element according to the data voltage applied to a gate terminal of the second switching element that varies a polarity of a gate-source voltage of the second switching element;

wherein the step of selectively applying a voltage to a source terminal of the second switching element includes comparing a gray scale corresponding to a level of the data voltage with a predetermined critical gray scale, outputting a control signal only when the gray scale corresponding to the level of the data voltage is lower than the critical gray scale, and applying the voltage to the source terminal of the second switching element in response to the control signal;

wherein the critical gray scale has a highest level in a gray scale zone that is less than 30% of an entire gray scale predefined according to data voltages.

14. The method as set forth in claim 13, wherein the voltage applied to the source terminal of the second switching element is higher than a maximum value of the data voltage.

15. A method for driving an organic electro-luminescent display device, the display device including a plurality of pixels, the pixels having an electro-luminescent element that emits light according to an amount of a current supplied thereto, a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line, and a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, the method comprising:

sensing an on/off state of the organic electro-luminescent display device; and

applying a voltage to a source terminal of the second switching element at the moment that both the first

21

switching element and second switching element are turned off as the organic electro-luminescent display device is powered off, the voltage varies a polarity of a gate-source voltage of the second switching element, wherein the voltage is a direct current (DC) voltage which has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone that is less than 30% of an entire gray scale zone predefined according to data voltages.

16. A method for driving an organic electro-luminescent display device, the display device including a plurality of pixels, the pixels having an electro-luminescent element that emits light according to an amount of a current supplied thereto, a first switching element that switches a data voltage from a data line in response to a scan signal from a gate line, and a second switching element that adjusts the amount of the current supplied to the electro-luminescent element according to the data voltage switched by the first switching element, the method comprising:

- receiving image data from a timing controller;
- inserting dummy data between the received image data, the dummy data having a value lower than a minimum value of the data voltage;

22

outputting a data voltage based on the image data and the dummy data voltage;

applying a first scan pulse synchronized with the data voltage to a gate terminal of the first switching element to turn on the first switching element so as to apply the data voltage to a gate terminal of the second switching element;

applying a second scan pulse synchronized with the dummy data voltage to the gate terminal of the first switching element to turn on the first switching element so as to apply the dummy data voltage to the gate terminal of the second switching element; and

applying a voltage having a value between the minimum value and a maximum value of the data voltage to a source terminal of the second switching element to vary a polarity of a gate-source voltage of the second switching element, wherein the voltage is a direct current (DC) voltage which has the same level as that of a data voltage corresponding to a gray scale having a highest level in a gray scale zone that is less than 30% of an entire gray scale zone predefined according to data voltages.

\* \* \* \* \*

专利名称(译)	有机电致发光显示装置及其驱动方法		
公开(公告)号	<a href="#">US8330677</a>	公开(公告)日	2012-12-11
申请号	US11/171699	申请日	2005-06-30
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG 飞利浦LCD CO., LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO., LTD.		
[标]发明人	KIM KYUNG MAN		
发明人	KIM, KYUNG MAN		
IPC分类号	G09G3/30		
CPC分类号	G09G3/3233 G09G2300/0809 G09G2300/0842 G09G2310/0254 G09G2320/043 G09G2330/021		
代理机构(译)	BRINKS 霍费尔 GILSON & LIONE		
优先权	1020040077890 2004-09-30 KR		
其他公开文献	US20060066252A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

有机电致发光显示装置具有选择性地具有正极性和负极性的栅极 - 源极电压，从而防止了开关元件的劣化。显示装置包括发光的电致发光元件。该装置包括：第一开关元件，用于响应扫描信号切换数据电压；第二开关元件，用于调节提供给电致发光元件的电流；以及极性控制器，用于施加具有介于...之间的值的电压。数据电压的最小值和最大值到第二开关元件的源极端子，以根据施加到第二开关元件的栅极端子的数据电压改变第二开关元件的栅极 - 源极电压的极性。

