



(11) **EP 1 722 675 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
06.08.2008 Bulletin 2008/32

(21) Application number: **05723983.2**

(22) Date of filing: **24.02.2005**

(51) Int Cl.:
A61B 5/00 (2006.01)

(86) International application number:
PCT/US2005/006336

(87) International publication number:
WO 2005/082242 (09.09.2005 Gazette 2005/36)

(54) **OXIMETER AMBIENT LIGHT CANCELLATION**

UMGEBUNGSLICHT-LÖSCHUNG IN EINEM OXIMETER

SUPPRESSION DE LA LUMIERE AMBIANTE PAR OXIMETRE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

(30) Priority: **25.02.2004 US 787854**

(43) Date of publication of application:
22.11.2006 Bulletin 2006/47

(73) Proprietor: **Nellcor Puritan Bennett Incorporated Pleasanton, CA 94588 (US)**

(72) Inventors:
• **PETERSEN, Ethan Castro Valley, CA 94546 (US)**

• **SHEA, William Livermore, CA 94550 (US)**
• **CHEW, Bradford, B. San Ramon, CA 94583 (US)**

(74) Representative: **Grubert, Andreas Baker Botts 41 Lothbury Street London EC2R 7HF (GB)**

(56) References cited:
US-A- 5 096 294 US-A- 5 368 224
US-A- 5 645 060 US-A- 5 846 190
US-A1- 2001 002 206 US-A1- 2003 028 357

EP 1 722 675 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to oximeters, and in particular to techniques for ambient light cancellation in pulse oximeters.

[0002] Pulse oximetry is typically used to measure various blood flow characteristics including, but not limited to, the blood-oxygen saturation of hemoglobin in arterial blood, the volume of individual blood pulsations supplying the tissue, and the rate of blood pulsations corresponding to each heartbeat of a patient. Measurement of these characteristics has been accomplished by use of a non-invasive sensor which scatters light through a portion of the patient's tissue where blood perfuses the tissue, and photoelectrically senses the absorption of light in such tissue. The amount of light absorbed is then used to calculate the amount of blood constituent being measured.

[0003] The light scattered through the tissue is selected to be of one or more wavelengths that are absorbed by the blood in an amount representative of the amount of the blood constituent present in the blood. The amount of transmitted light scattered through the tissue will vary in accordance with the changing amount of blood constituent in the tissue and the related light absorption. For measuring blood oxygen level, such sensors have typically been provided with a light source that is adapted to generate light of at least two different wavelengths, and with photodetectors sensitive to both of those wavelengths, in accordance with known techniques for measuring blood oxygen saturation.

[0004] Known non-invasive sensors include devices that are secured to a portion of the body, such as a finger, an ear or the scalp. In animals and humans, the tissue of these body portions is perfused with blood and the tissue surface is readily accessible to the sensor.

[0005] One problem with oximeter measurements is that in addition to receiving the light that was directed at the tissue, ambient light is also detected by the photodetector. Attempts can be made to block out ambient light, but some amount of ambient light will typically be detected. One particular concern is the light at the power line frequency of fluorescent or other lights, which is 60 Hz in the United States and 50 Hz in Europe and other countries.

[0006] Since a single photodetector is typically used, the light of different wavelengths, such as red and infrared, is time multiplexed. The detected signal must be demultiplexed. The demultiplexing frequency must be high enough so that it is much larger than the pulse rate. However, choosing a demultiplexing frequency is also impacted by the ambient light interference. One issue is the aliasing of harmonics of the AC power line frequency. U.S. Patent No. 5,713,355 discusses a technique of altering the demultiplexing frequency depending upon the amount of ambient interference detected at each frequency.

[0007] U.S. Patent No. 5,885,213 discusses subtract-

ing a dark signal (detected ambient light) from the detected light signal. This is accomplished by leaving both the red and infrared light emitters off, in between turning them on, so that a "dark" signal supposedly composed of the ambient light present can be detected. This can then be subtracted from the desired signal. Other examples of patents dealing with the ambient light issue are U.S. Patent No. 6,385,471, No. 5,846,190 and No. 4,781,195.

[0008] U.S. Patent No. 6,449,501 discusses using a notch filter to filter out line frequency. However, the sampling rate is described as being set to twice the fundamental frequency of the power line interference, leaving higher harmonics of the power line interference as a problem, and it is unclear how the interference can be filtered without filtering the modulation frequency. Another example of a notch filter being used is set forth in U.S. Patent No. 4,802,486, which uses a notch filter for the EKG signal. U.S. Patent No. 2003/0028357 A1 uses a notch filter in a pulse oximeter.

[0009] It is an object of the invention to provide an oximeter and a method of operating an oximeter which is less susceptible to interference. This object can be achieved by the features of the independent claims. Further enhancements are characterized in the dependent claims.

[0010] The present invention provides a pulse oximeter method and apparatus according to claims 1 and 7 of the appended claims which provides (1) a notch filter at a distance between a demodulation frequency and a common multiple of commonly used power line frequencies (50, 60, 100, and 120) and also (2) a demodulation frequency greater than a highest pulse rate of a person and lower than any harmonic of 50, 60, 100, or 120 Hz. The invention thus allows the filtering of a significant source of ambient light interference, while choosing an optimum demodulation frequency that avoids interference from the notch filter or from harmonics of the power line interference.

[0011] In one embodiment, the common multiple is 1200, with the demodulation frequency 30 being between 5 and 20 Hz away from 1200, preferably approximately 1211 in one embodiment.

[0012] In this respect, U.S. Patent No. 5,645,060 discloses alternation of LEDs at a rate of 1200 Hz U.S. Patent No. 5,368,224 discloses a demultiplexer synchronized with the sensor's red and infrared light sources and separating the red and infrared portions of the photodetector output for further processing by the oximeter, the fundamental of the demultiplexer being separated by at about 10-15 Hz from the frequency of the A.C. power supply and harmonics thereof. According to the invention, dark signals, or ambient light, are measured both before and after each of the light emitter wavelengths (red and infrared in one embodiment). Instead of simply subtracting one of the dark levels, the two dark levels are averaged and then subtracted from the detected signal. This compensates for a variation in ambient light during the de-

tected signal, reducing the effect of power line interference or any other low frequency interference.

[0013] In an aspect of the present invention, digital filtering and decimation are done in the digital domain. When there is a change in a gain setting on the front end hardware, or in the LED power, the filters are preloaded to put values in their memory to correspond to an estimate of the settled value of the output at the new gain or power settings. This preloading speeds up when valid data will be available at the output of the filter.

Figure 1 is a block diagram of an oximeter incorporating the present invention.

Figure 2 is a block diagram of a portion of the digital manipulations in one embodiment of the invention, including a notch filter.

Figure 3 is a diagram illustrating the multiple dark levels that are averaged in an embodiment of the invention.

Figure 4 is a diagram illustrating the preloading of the digital filter and decimator according to an embodiment of the present invention.

Overall System

[0014] Fig. 1 illustrates an embodiment of an oximetry system incorporating the present invention. A sensor 10 includes red and infrared LEDs and a photodetector. These are connected by a cable 12 to a board 14. LED drive current is provided by an LED drive interface 16. The received photocurrent from the sensor is provided to an I-V interface 18. The IR and red voltages are then provided to a sigma-delta interface 20 incorporating the present invention. The output of sigma-delta interface 20 is provided to a microcontroller 22. Microcontroller 22 includes flash memory for a program, and EEPROM memory for data. The oximeter also includes a microprocessor chip 24 connected to a flash memory 26. Finally, a clock 28 is used and an interface 30 to a digital calibration in the sensor 10 is provided. A separate host 32 receives the processed information, as well as receiving an analog signal on a line 34 for providing an analog display.

Notch Filter

[0015] Figure 2 shows an analog-to-digital converter 40 which provides a digital signal to be manipulated by microcontroller 22 of Figure 1. The microprocessor would include a demodulator 42, four stages of filter/decimators 44, a low pass filter with a notch 46, as well as other blocks for digital manipulation of the signals and calculation of oxygen saturation as is well known in the art. Only the red channel is shown after the demodulation, but a similar channel is used for the IR signal.

[0016] Notch filter 46 deals with power line interference which, in the United States, comes from lights which operate on 60 Hz or 120 Hz, depending upon the power

requirements. Europe and other areas use 50 Hz and 100 Hz. A common multiple of 50, 60, 100, and 120 Hz is 1200 Hz. The modulation bandwidth is chosen to be higher than the highest possible human pulse rate, preferably higher than 5 Hz. At the same time, it is chosen to be lower than any harmonic of the power line interference signals. Twenty hertz is chosen as a desirable upper limit because a second harmonic of 2450 will alias in at 2025 Hz. In one embodiment, the modulation frequency chosen is 1211.23 Hz. This is 11.23 Hz distant from 1200 Hz. (within a range of 5-20 Hz). Accordingly, in a preferred embodiment, a zero is provided in the notch filter at 11.23 Hz. The low pass filter with notch (46), in one S embodiment, is an 8 pole Bessel filter with a notch at 11.25 Hz.

[0017] The present invention thus provides an effective means of eliminating interference from power line interference, such as the ripple on fluorescent lights which can alias onto the detected signal. Although anti-aliasing filters have been provided in hardware before a demodulator, it is difficult to make these effective, and thus there will be some residual line interference in the detected signal to be dealt with in the digital domain.

Averaging Ambient Dark Levels to Reduce Low Frequency Interference

[0018] Figure 3 illustrates another aspect of the present invention, reducing ambient interference by averaging the ambient dark levels before and after a sampling period to account for low frequency interference from power lines or other sources. Fig. 3 shows a signal at a sampling rate of 2400. The upward sloping line in Fig. 3 is due to 60 Hz power line interference. It is desirable to eliminate the effect of this upward slope (which will be downward on other parts of the 60 Hz (or 50 Hz, etc.) signal).

[0019] Fig. 3 shows a detected signal during different periods of modulation. The detected signal level is illustrated by a line 50. During a first dark period 52, neither the red nor IR LED. are on, allowing a sampling of the dark, or ambient, light. After this sampling, during a time period 54, the red LED is turned on, with signal 50 rising during this period as the red LED comes on to its full intensity. During the time period 56, the detected signal corresponds to the red LED being on.

[0020] After the red LED is turned off and the signal decays during a period 58, a second dark period 60 is sampled.

[0021] Subsequently, the IR LED is turned on during a period 62, and sampled during a period 64. It is turned off and the signal decays during a period 66, with a third dark sample being taken during a period 68. The third dark sample also corresponds to the fast dark period 52, as the process repeats itself.

[0022] As can be seen from Fig. 3, if only one of the dark levels is used, an inaccurate ambient level may be measured if the ambient level is varying, such as due to a low frequency interference. By averaging the dark pe-

riods before and after the sampling period for a particular wavelength, a more accurate measurement of the ambient dark level signal is obtained. For example, the ambient interference during the red modulation period 56 is determined by measuring the dark 1 signal during period 52 and the dark 2 signal during period 60 and averaging these signals. Similarly, for the infrared modulation period 64, the dark 2 signal during period 60 and the dark 3 signal during period 68 are averaged and subtracted from the detected IR signal to eliminate the ambient interference. All of these calculations are done in the digital domain by microcontroller 22 of Fig. 1.

Preloading Decimation and Bessel Filters

[0023] Fig. 4 illustrates another aspect of the present invention where filters and software are preloaded. Before the analog input signal is processed through the sigma-delta modulator and multi-bit analog digital converter, it is typically amplified in a hardware amplifier 84. After processing by the sigma-delta modulator 86 and conversion into digital domain, it is decimated to reduce the sample rate by a decimator 88 and filtered by a Bessel filter 88. A controller 92 pre-loads the memories of the Bessel filter and decimator with an estimate of what the settled value of the output would be. This will significantly reduce the settling time of the filter after a step change in its input. Such a step change in the input can occur from a change in the gain settings of the amplifier 84. Alternately, a step change can be the result of a change in the particular LED being activated, the power of the LED, or other gain settings of the front end hardware. Since the controller 92 would be activating such changes, it will have the knowledge of when to pre-load the filter and decimator with the appropriate values. Although these are shown as blocks in Fig. 4, it is understood that in the preferred embodiment this is done by a software program which functions as controller 92, filter 88 and decimator 90. This preloading of the filter and decimator provides that valid data is available sooner by shortening the settling time.

[0024] As will be understood by those skilled in the art, the present invention may be embodied in other specific forms without departing from the essential characteristics thereof. For example, more than two different wavelengths of light could be used. Alternately, a different demodulation frequency could be chosen. In addition, the notch filtering can be done either before or after other digital processing of the detected signal. Accordingly, the foregoing description is intended to be illustrative, but not limiting, of the scope of the invention which is set forth in the following claims.

Claims

1. A method for operating a pulse oximeter, comprising:

alternately generating light at two wavelengths using a modulation frequency that is a predetermined distance from a common multiple of 50, 60, 100, and 120;
 said predetermined distance being greater than a highest pulse rate of a person and lower than a distance of any harmonic of 50, 60, 100, or 120;
 directing said light at a tissue site;
 detecting a detected light signal scattered off said tissue site;
 notch filtering said detected light signal at a frequency at said common multiple, wherein said modulation frequency is used to alternate between a first period of light of said first wavelength being generated, a dark period of no light being generated, and a second period of light of said second wavelength being generated;
 estimating a first level of ambient light in said detected light signal during said first period by averaging an amount of said detected light signal in said dark periods before and after said first period;
 subtracting said first estimated level of ambient light from said detected first period light signal;
 estimating a second level of ambient light in said detected light signal during said second period by averaging an amount of said detected light signal in said dark periods before and after said second period,
 and
 subtracting said second estimated level of ambient light from said detected second period light signal.

2. The method of claim 1, further comprising:

digitizing said detected light signal to provide a digitized signal; and
 said notch filtering being performed on said digitized signal.

3. The method of claim 1 or 2, wherein said common multiple is 1200.

4. The method according to one of the preceding claims, wherein said predetermined distance is between 5 and 20 hertz.

5. The method according to one of the preceding claims, wherein said predetermined distance is approximately 11 hertz.

6. The method according to one of the preceding claims, wherein said notch filtering is performed by providing a zero in a digital filter at said distance,

7. A pulse oximeter, comprising:

at least one light emitter (10);
 a control circuit (16) for alternately generating light at two wavelengths from said at least one light emitter using a modulation frequency that is a predetermined distance from a common multiple of 50, 60, 100, and 120;
 said predetermined distance being greater than a highest pulse rate of a person and lower than a distance of any harmonic of 50, 60, 100, or 120;
 a detector for detecting a detected light signal scattered off a tissue site;
 a processing circuit for processing said detected light signal, said processing circuit including a notch filter (46) configured to filter said detected light signal at a frequency at said common multiple,
 said control circuit (16) being configured to alternate between a first period of light of said first wavelength being generated, a dark period of no light being generated, and a second period of light of said second wavelength being generated;
 said processing circuit being configured to estimate a first level of ambient light in said detected light signal during said first period by averaging an amount of said detected light signal in said dark periods before and after said first period and to correct said detected light signal during said first period by subtracting said first estimated level of ambient light from said detected light of said first period, and estimate a second level of ambient light in said detected light signal during said second period by averaging an amount of said detected light signal in said dark periods before and after said second period and to correct said detected light signal during said second period by subtracting said second estimated level of ambient light from said detected light of said second period.

8. The pulse oximeter of claim 7, further comprising:

an analog-to-digital converter (40) for digitizing said detected light signal to provide a digitized signal; and
 said notch filter (46) being a digital filter.

9. The pulse oximeter of claim 7 or 8, wherein said common multiple is 1200.

10. The pulse oximeter according to one of the preceding claims 7-9, wherein said predetermined distance is between 5 and 20 hertz.

11. The pulse oximeter according to one of the preceding claims 7-10, wherein said predetermined distance is approximately 11 hertz.

12. The pulse oximeter according to one of the preceding claims 7-11, wherein said notch filter (46) provides a zero in a digital filter at said distance.

Patentansprüche

1. Verfahren zum Betreiben eines Pulsoxymeters, umfassend:

abwechselnd Erzeugen von Licht bei zwei Wellenlängen mittels einer Modulationsfrequenz, die bei einem vorbestimmten Abstand von einem gemeinsamen Vielfachen von 50, 60, 100 und 120 ist;

wobei der vorbestimmte Abstand größer als eine höchste Pulsrate einer Person und niedriger als ein Abstand einer beliebigen Oberwelle von 50, 60, 100 oder 120 ist;

Richten des Lichts auf eine Gewebestelle, Detektieren eines detektierten Lichtsignals, das von der Gewebestelle weg gestreut wird; Kerbfiltern des detektierten Lichtsignals bei einer Frequenz bei dem gemeinsamen Vielfachen, wobei

die Modulationsfrequenz verwendet wird, um zwischen einer ersten Periode von Licht der ersten Wellenlänge, das erzeugt wird, einer Dunkelperiode, wobei kein Licht erzeugt wird, und einer zweiten Periode von Licht der zweiten Wellenlänge, das erzeugt wird, zu wechseln;

Schätzen eines ersten Niveaus von Umgebungslicht im detektierten Lichtsignal während der ersten Periode durch Mittelwertbildung einer Menge des detektierten Lichtsignals in den Dunkelperioden vor und nach der ersten Periode; Subtrahieren des ersten geschätzten Niveaus von Umgebungslicht vom detektierten Lichtsignal der ersten Periode;

Schätzen eines zweiten Niveaus von Umgebungslicht im detektierten Lichtsignal während der zweiten Periode durch Mittelwertbildung einer Menge des detektierten Lichtsignals in den Dunkelperioden vor und nach der zweiten Periode, und

Subtrahieren des zweiten geschätzten Niveaus von Umgebungslicht vom detektierten Lichtsignal der zweiten Periode.

2. Verfahren nach Anspruch 1, ferner umfassend:

Digitalisieren des detektierten Lichtsignals, um ein digitalisiertes Signal bereitzustellen; und wobei das Kerbfiltern bezüglich des digitalisierten Signals durchgeführt wird.

3. Verfahren nach Anspruch 1 oder 2, bei welchem das gemeinsame Vielfache 1200 ist.

4. Verfahren nach einem der vorherigen Ansprüche, bei welchem der vorbestimmte Abstand zwischen 5 und 20 Hertz ist.

5. Verfahren nach einem der vorherigen Ansprüche, bei welchem der vorbestimmte Abstand annähernd 11 Hertz ist.

6. Verfahren nach einem der vorherigen Ansprüche, bei welchem das Kerbfiltern durch Bereitstellen einer Null in einem Digitalfilter bei dem Abstand durchgeführt wird.

7. Pulsoxymeter, umfassend:

zumindest einen Lichtemitter (10);

eine Steuerschaltung (16) zum abwechselnden Erzeugen von Licht bei zwei Wellenlängen von dem zumindest einen Lichtemitter mittels einer Modulationsfrequenz, die bei einem vorbestimmten Abstand von einem gemeinsamen Vielfachen von 50, 60, 100 und 120 ist;

wobei der vorbestimmte Abstand größer als eine höchste Pulsrate einer Person und niedriger als ein Abstand einer beliebigen Oberwelle von 50, 60, 100 oder 120 ist;

einen Detektor zum Detektieren eines detektierten Lichtsignals, das von einer Gewebestelle weg gestreut wird;

eine Verarbeitungsschaltung zum Verarbeiten des detektierten Lichtsignals, wobei die Verarbeitungsschaltung ein Kerbfilter (46) umfasst, das konfiguriert ist, um das detektierte Lichtsignal bei einer Frequenz bei dem gemeinsamen Vielfachen zu filtern,

wobei die Steuerschaltung (16) konfiguriert ist, um zwischen einer ersten Periode von Licht von der ersten Wellenlänge, das erzeugt wird, einer Dunkelperiode, wobei kein Licht erzeugt wird, und einer zweiten Periode von Licht bei der zweiten Wellenlänge, das erzeugt wird, zu wechseln;

wobei die Verarbeitungsschaltung konfiguriert ist, um ein erstes Niveau von Umgebungslicht im detektierten Lichtsignal während der ersten Periode zu schätzen durch Mittelwertbildung einer Menge des detektierten Lichtsignals in den Dunkelperioden vor und nach der ersten Periode, und das detektierte Lichtsignal während der ersten Periode durch Subtrahieren des ersten geschätzten Niveaus von Umgebungslicht vom detektierten Licht der ersten Periode zu korrigieren, und ein zweites Niveau von Umgebungslicht im detektierten Lichtsignal während der zweiten Periode zu schätzen durch Mittelwertbildung einer Menge des detektierten Lichtsignals in den Dunkelperioden vor und nach der zweiten Periode, und das detektierte Lichtsignal

während der zweiten Periode durch Subtrahieren des zweiten geschätzten Niveaus von Umgebungslicht vom detektierten Licht der zweiten Periode zu korrigieren.

8. Pulsoxymeter nach Anspruch 7, ferner umfassend:

einen Analog-Digital-Umsetzer (40) zum Digitalisieren des detektierten Lichtsignals, um ein digitalisiertes Signal bereitzustellen; und wobei das Kerbfilter (46) ein Digitalfilter ist.

9. Pulsoxymeter nach Anspruch 7 oder 8, bei welchem das gemeinsame Vielfache 1200 ist.

10. Pulsoxymeter nach einem der vorherigen Ansprüche 7 bis 9, bei welchem der vorbestimmte Abstand zwischen 5 und 20 Hertz ist.

11. Pulsoxymeter nach einem der vorherigen Ansprüche 7 bis 10, bei welchem der vorbestimmte Abstand annähernd 11 Hertz ist.

12. Pulsoxymeter nach einem der vorherigen Ansprüche 7 bis 11, bei welchem das Kerbfilter (46) eine Null in einem Digitalfilter bei dem Abstand bereitstellt.

30 Revendications

1. Procédé pour faire fonctionner un oxymètre à impulsions, comprenant :

la génération de lumière alternativement à deux longueurs d'onde en utilisant une fréquence de modulation qui est à une distance prédéterminée d'un commun multiple de 50, 60, 100 et 120 ;

ladite distance prédéterminée étant supérieure à un rythme cardiaque le plus élevé d'une personne et inférieure à une distance de n'importe quelle harmonique de 50, 60, 100 ou 120 ; l'orientation de ladite lumière sur un site de tissu ;

la détection d'un signal lumineux diffusé à partir dudit site de tissu ;

le filtrage à bande d'arrêt étroite dudit signal lumineux détecté à une fréquence au niveau dudit commun multiple, dans lequel

ladite fréquence de modulation est utilisée pour alterner entre une première période de lumière de ladite première longueur d'onde qui est générée, une période d'obscurité où aucune lumière n'est générée et une deuxième période de lumière de ladite deuxième longueur d'onde qui est générée ;

l'estimation d'un premier niveau de lumière am-

- biante dans ledit signal lumineux détecté durant ladite première période en faisant la moyenne d'une quantité dudit signal lumineux détecté dans lesdites périodes d'obscurité avant et après ladite première période ;
 la soustraction dudit premier niveau estimé de lumière ambiante dudit signal lumineux détecté de première période ;
 l'estimation d'un deuxième niveau de lumière ambiante dans ledit signal lumineux détecté durant ladite deuxième période en faisant la moyenne d'une quantité dudit signal lumineux détecté dans lesdites périodes d'obscurité avant et après ladite deuxième période,
 et
 la soustraction dudit deuxième niveau estimé de lumière ambiante dudit signal lumineux détecté de deuxième période.
2. Procédé selon la revendication 1, comprenant en outre :
 la numérisation dudit signal lumineux détecté pour fournir un signal numérisé ; et
 ledit filtrage à bande d'arrêt étroite étant effectué sur ledit signal numérisé.
3. Procédé selon la revendication 1 ou 2, dans lequel ledit commun multiple est 1200.
4. Procédé selon l'une des revendications précédentes, dans lequel ladite distance prédéterminée est entre 5 et 20 hertz.
5. Procédé selon l'une des revendications précédentes, dans lequel ladite distance prédéterminée est approximativement de 11 hertz.
6. Procédé selon l'une des revendications précédentes, dans lequel ledit filtrage à bande d'arrêt étroite est effectué en fournissant un zéro dans un filtre numérique à ladite distance.
7. Oxymètre à impulsions comprenant :
 au moins un émetteur de lumière (10) ;
 un circuit de commande (16) pour générer alternativement de la lumière à deux longueurs d'onde à partir dudit au moins un émetteur de lumière en utilisant une fréquence de modulation qui est à une distance prédéterminée d'un commun multiple de 50, 60, 100 et 120 ;
 ladite distance prédéterminée étant supérieure à un rythme cardiaque le plus élevé d'une personne et inférieure à une distance de n'importe quelle harmonique de 50, 60, 100 ou 120 ; un détecteur pour détecter un signal lumineux diffusé à partir d'un site de tissu ;
- un circuit de traitement pour traiter ledit signal lumineux détecté, ledit circuit de traitement comprenant un filtre à bande d'arrêt étroite (46) configuré pour filtrer ledit signal lumineux détecté à une fréquence au niveau dudit commun multiple,
 ledit circuit de commande (16) étant configuré pour alterner entre une première période de lumière de ladite première longueur d'onde qui est générée, une période d'obscurité où aucune lumière n'est générée et une deuxième période de lumière de ladite deuxième longueur d'onde qui est générée ;
 ledit circuit de traitement étant configuré pour estimer un premier niveau de lumière ambiante dans ledit signal lumineux détecté durant ladite première période en faisant la moyenne d'une quantité dudit signal lumineux détecté dans lesdites périodes d'obscurité avant et après ladite première période et pour corriger ledit signal lumineux détecté durant ladite première période en soustrayant ledit premier niveau estimé de lumière ambiante dudit signal lumineux détecté de ladite première période, et estimer un deuxième niveau de lumière ambiante dans ledit signal lumineux détecté durant ladite deuxième période en faisant la moyenne d'une quantité dudit signal lumineux détecté dans lesdites périodes d'obscurité avant et après ladite deuxième période et pour corriger ledit signal lumineux détecté durant ladite deuxième période en soustrayant ledit deuxième niveau estimé de lumière ambiante dudit signal lumineux détecté de ladite deuxième période.
8. Oxymètre à impulsions selon la revendication 7, comprenant en outre :
 un convertisseur analogique-numérique (40) pour numériser ledit signal lumineux détecté pour fournir un signal numérisé ; et
 ledit filtre à bande d'arrêt étroite (46) étant un filtre numérique.
9. Oxymètre à impulsions selon la revendication 7 ou 8, dans lequel ledit commun multiple est 1200.
10. Oxymètre à impulsions l'une des revendications précédentes 7-9, dans lequel ladite distance prédéterminée est entre 5 et 20 hertz.
11. Oxymètre à impulsions l'une des revendications précédentes 7-10, dans lequel ladite distance prédéterminée est approximativement de 11 hertz.
12. Oxymètre à impulsions l'une des revendications précédentes 7-11, dans lequel ledit filtre à bande d'arrêt

étroite (46) fournit un zéro dans un filtre numérique à ladite distance.

5

10

15

20

25

30

35

40

45

50

55

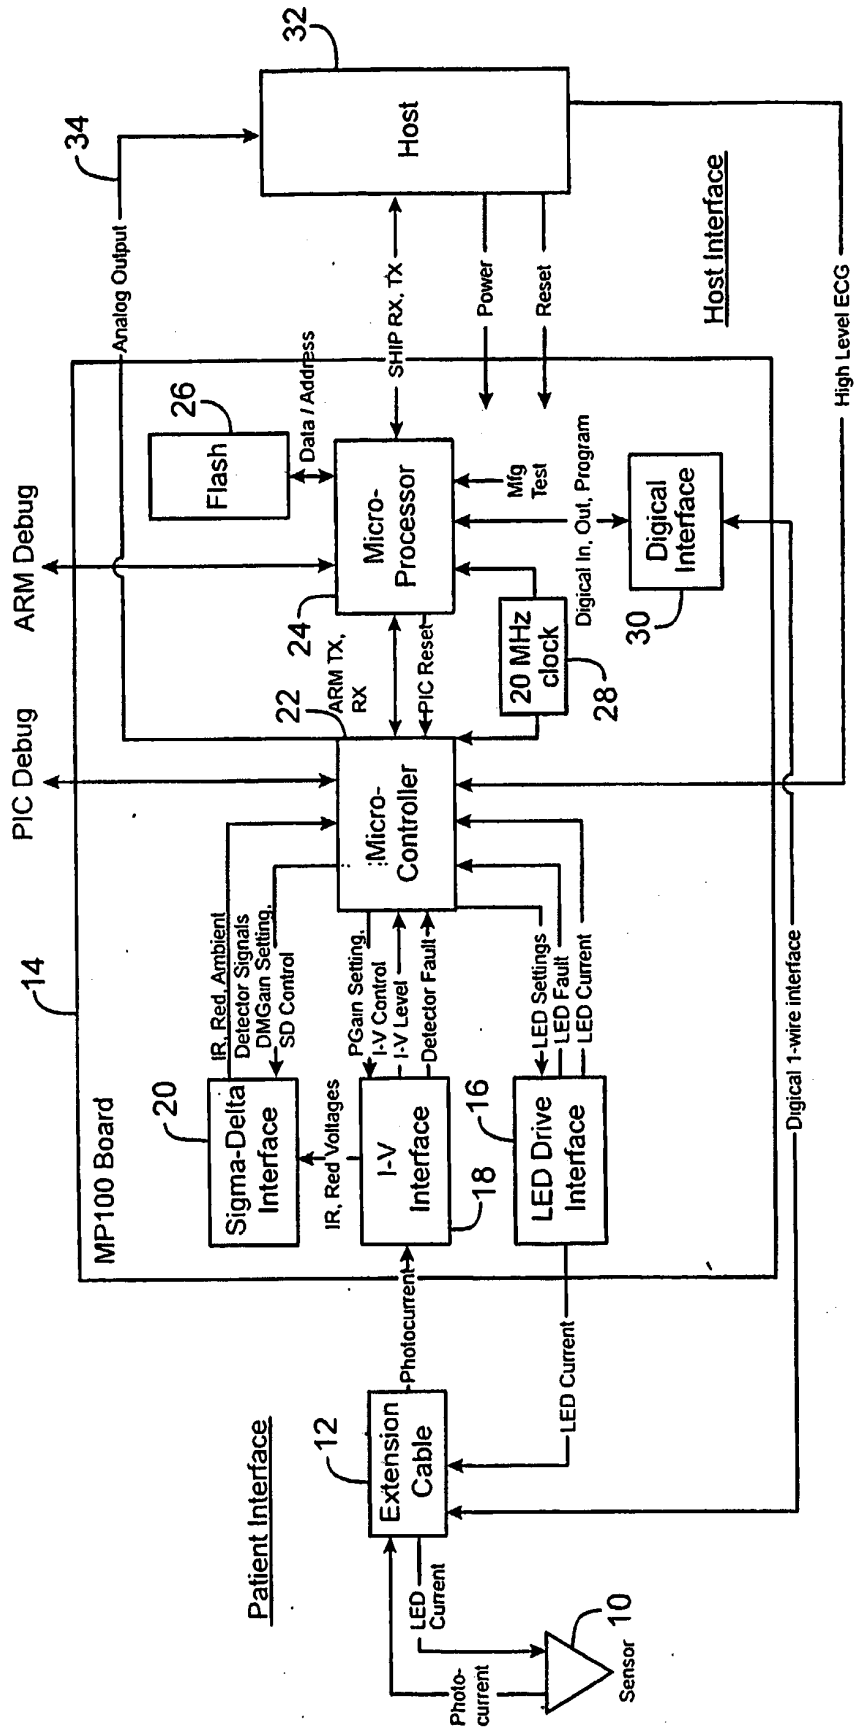


FIG. 1

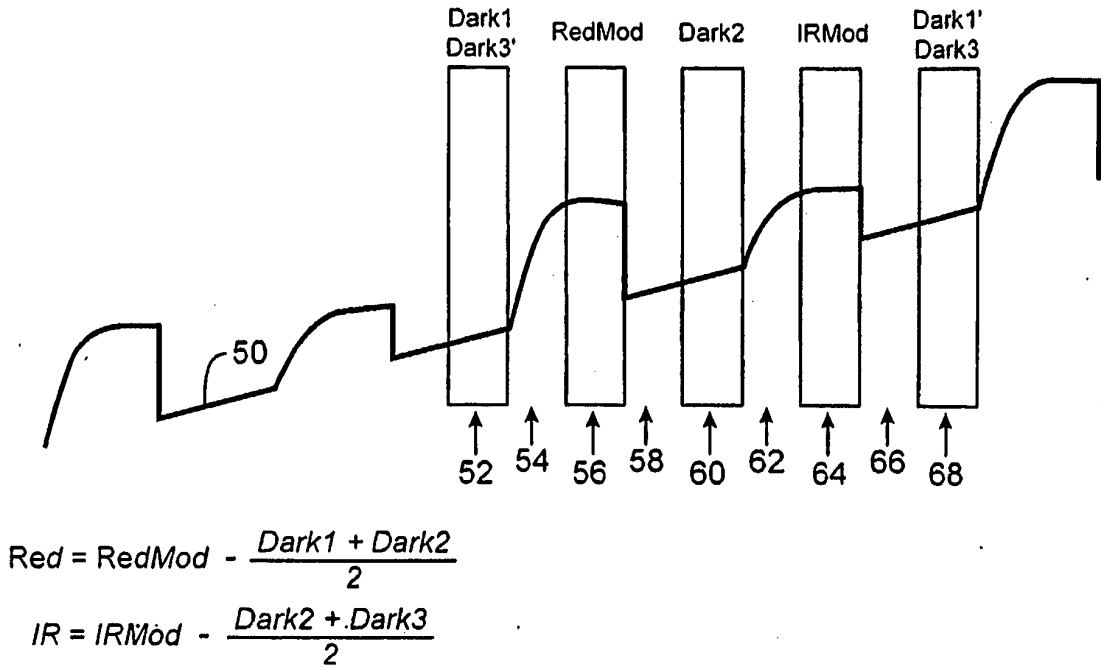


FIG. 3

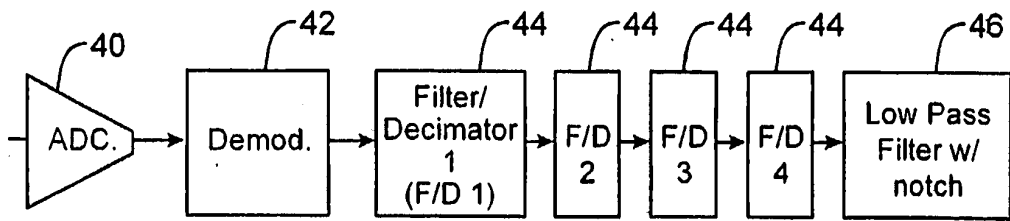


FIG. 2

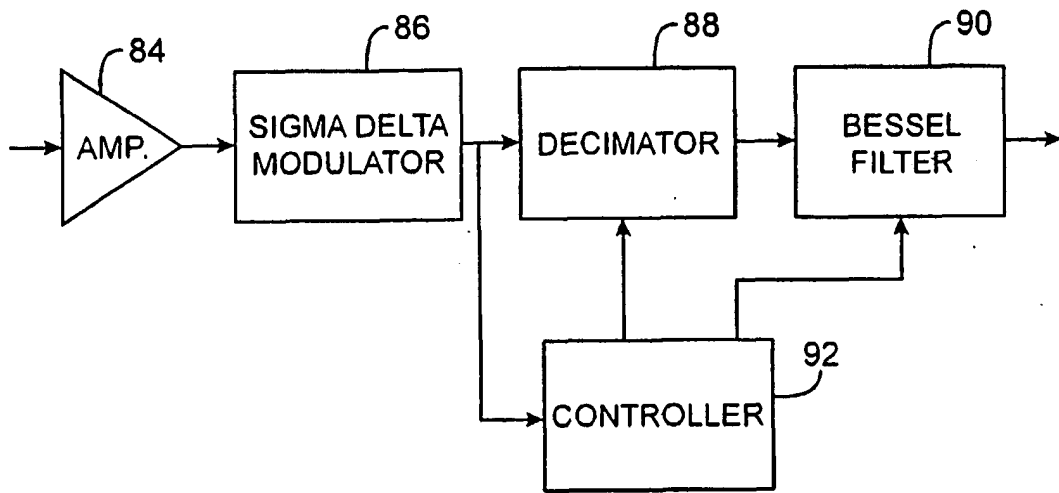


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5713355 A [0006]
- US 5885213 A [0007]
- US 6385471 B [0007]
- US 5846190 A [0007]
- US 4781195 A [0007]
- US 6449501 B [0008]
- US 4802486 A [0008]
- US 20030028357 A1 [0008]
- US 5645060 A [0012]
- US 5368224 A [0012]

专利名称(译)	血氧计环境光消除		
公开(公告)号	EP1722675B1	公开(公告)日	2008-08-06
申请号	EP2005723983	申请日	2005-02-24
[标]申请(专利权)人(译)	内尔科尔普里坦贝内特公司		
申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
当前申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
[标]发明人	PETERSEN ETHAN SHEA WILLIAM CHEW BRADFORD B		
发明人	PETERSEN, ETHAN SHEA, WILLIAM CHEW, BRADFORD, B.		
IPC分类号	A61B5/00 A61B5/024		
CPC分类号	A61B5/14552 A61B5/0205 A61B5/02416 A61B5/14551 A61B5/7203 A61B5/7225 A61B5/7228 A61B5/725 A61B5/7278		
代理机构(译)	GRUBERT , ANDREAS		
优先权	10/787854 2004-02-25 US		
其他公开文献	EP1722675A1		
外部链接	Espacenet		

摘要(译)

一种脉冲血氧计方法和装置，其在调制频率和常用电力线频率（50,60,100和120）的公倍数之间的距离处提供（1）陷波滤波器（46），并且还提供（2）解调频率大于人的最高脉冲率且低于50,60,100或120 Hz的任何谐波，以滤除环境光干扰，同时选择最佳解调频率以避免陷波滤波器或线路谐波的干扰干扰。此外，在每个光发射器波长之前和之后测量用于任何低频干扰（例如电力线干扰）的环境光，然后从检测到的信号中减去环境光的平均值。

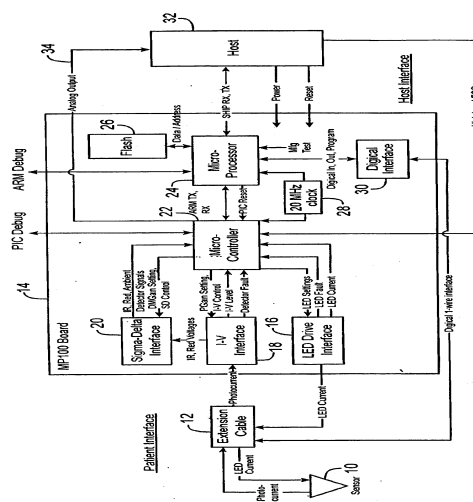


FIG. 1