

(19)



(11)

EP 3 058 867 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

24.08.2016 Bulletin 2016/34

(51) Int Cl.:

A61B 5/00 (2006.01)

H04B 15/00 (2006.01)

G06K 9/00 (2006.01)

A61B 5/042 (2006.01)

A61B 5/0402 (2006.01)

H04B 3/00 (2006.01)

A61B 5/04 (2006.01)

(21) Application number: **16156274.9**

(22) Date of filing: **18.02.2016**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

MA MD

(71) Applicant: **Biosense Webster (Israel) Ltd.**
2066717 Yokneam (IL)

(72) Inventor: **GOVARI, Assaf**
2066717 Yokneam (IL)

(74) Representative: **Carpmaels & Ransford LLP**
One Southampton Row
London WC1B 5HA (GB)

(30) Priority: **19.02.2015 US 201514625755**

(54) **NARROWBAND ANALOG NOISE CANCELLATION**

(57) A method, including receiving an input analog signal containing noise at a specific noise frequency and digitizing the input analog signal to form a digitized signal. The method also includes recovering a first amplitude and a first phase of the noise from the digitized signal, and generating an analog correction signal at the specific

noise frequency. The analog correction signal has a second amplitude equal to the first amplitude and a second phase opposite to the first phase. The method further includes summing the input analog signal with the analog correction signal to generate an output analog signal.

EP 3 058 867 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to noise cancellation, and specifically to cancellation of narrow-band noise such as line pickup.

BACKGROUND OF THE INVENTION

[0002] Line pickup is a type of noise that can be especially troubling when the signals which are affected by the pickup are relatively small. For example, signals such as ECG (electrocardiogram) signals may typically be relatively small compared to the line noise picked up by leads acquiring the signals. Methods for reducing the effects of this type of noise are known in the art.

[0003] U.S. Patent 6,041,250, to dePinto, whose disclosure is incorporated herein by reference, describes an adaptive line noise detection and cancellation system. The system is stated to have, *inter alia*, a baseline wander filter, high and low pass filters, and an adaptive line noise canceler. The system is also stated to be able to identify and remove contamination from an ECG signal.

[0004] U.S. Patent 8,597,196, to Kishi et al., whose disclosure is incorporated herein by reference, describes a cardiac signal processing apparatus which is stated to include a unit for acquiring, from a heartbeat sensor, cardiac signals relating to heartbeats of a subject. The apparatus is also stated to have a low-pass filter for allowing passage of those cardiac signals having a first predetermined frequency or lower, among the cardiac signals, and a higher harmonic noise acquisition unit for acquiring harmonic signals of low-frequency noise by performing high frequency extrapolation on the signals output from the low-pass filter.

[0005] U.S. Patent 8,134,255, to Hatanaka et al., whose disclosure is incorporated herein by reference, describes a noise cancellation circuit. The circuit is stated to have a cancellation signal generation section that generates a cancellation signal which cancels an alternating-current component of a power supply terminal voltage of a digital signal processing circuit section. There is also a synthesis section which synthesizes the generated cancellation signal and a power supply voltage of an analog signal processing circuit section to cancel noise superimposed on the power supply voltage.

[0006] An article titled "FPGA-Based Implementation of an Adaptive Canceller for 50/60-Hz Interference in Electrocardiography," published in IEEE Transactions on Instrumentation and Measurement, Vol. 56, No. 6, December 2007, to Ramos et al., is incorporated herein by reference. The article describes an adaptive canceller which uses an adaptive filter.

[0007] An article titled "Noise removal from ECG Using Modified CSLMS algorithm," published in International Journal of Electronics, Communication & Instrumentation Engineering Research and Development Vol. 4, Is-

sue 3, Jun 2014, to Rehman, et al, is incorporated herein by reference. The article refers to an adaptive filter that "mainly" minimizes the mean squared error between a primary input and a reference input.

[0008] Documents incorporated by reference in the present patent application are to be considered an integral part of the application except that, to the extent that any terms are defined in these incorporated documents in a manner that conflicts with definitions made explicitly or implicitly in the present specification, only the definitions in the present specification should be considered.

SUMMARY OF THE INVENTION

[0009] An embodiment of the present invention provides a method, including:

receiving an input analog signal containing noise at a specific noise frequency;
digitizing the input analog signal to form a digitized signal;
recovering a first amplitude and a first phase of the noise from the digitized signal;
generating an analog correction signal at the specific noise frequency having a second amplitude equal to the first amplitude and a second phase opposite to the first phase; and
summing the input analog signal with the analog correction signal to generate an output analog signal.
Typically the noise consists of line noise, and the specific noise frequency is selected from a 50 Hz frequency and a 60 Hz frequency. The method may include deriving the specific noise frequency from a line signal.
In a disclosed embodiment the method includes recovering the specific noise frequency from the digitized signal.
In a further disclosed embodiment the input analog signal includes an intra-cardiac electrocardiogram (ECG) signal.

[0010] There is further provided, according to an embodiment of the present invention, apparatus, including:

an analog-to-digital (A/D) converter which is coupled to receive an input analog signal containing noise at a specific noise frequency, and to digitize the input analog signal so as to form a digitized signal;
a signal analyzer which is configured to recover a first amplitude and a first phase of the noise from the digitized signal;
an analog signal generator which is configured to generate an analog correction signal at the specific noise frequency having a second amplitude equal to the first amplitude and a second phase opposite to the first phase; and
a summation block which sums the input analog signal with the analog correction signal to generate an

output analog signal.

[0011] The present disclosure will be more fully understood from the following detailed description of the embodiments thereof, taken together with the drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a schematic illustration of a narrowband noise cancellation system, according to an embodiment of the present invention;

Fig. 2 is a schematic block diagram of a noise-cancellation module, according to an embodiment of the present invention; and

Fig. 3 is a flowchart of actions taken by the module, according to an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

OVERVIEW

[0013] Cardiac procedures typically include acquisition of ECG (electrocardiogram) signals. The ECG signals are low amplitude, high impedance analog signals, and so are prone to picking up external signals, such as noise from the line, which act as narrowband noise on the ECG signals. The narrowband noise signals may be significantly larger in amplitude than the ECG signals. While the noise may be reduced by digitizing an incoming noisy ECG signal, identifying a noise signal in the digitized signal, and subtracting the noise signal from the digitized signal, such a process requires a large dynamic range, most of which is taken up by the noise.

[0014] Embodiments of the present invention use a different approach. An input analog signal, containing noise at a specific noise frequency, e.g., noise such as 50 Hz or 60 Hz line noise that is narrowband, is digitized. An amplitude and a phase of the noise are recovered from the digitized signal. In some embodiments the value of the specific noise frequency is also recovered from the digitized signal. The recovered amplitude is used to generate an analog correction signal having the same amplitude as the recovered amplitude, and the same frequency as the noise. However, the phase of the correction signal is set to be opposite to, i.e., 180° out of phase with, the recovered phase.

[0015] The input analog signal and the analog correction signal are summed, so generating an output analog signal from which the narrowband noise has been removed.

[0016] This approach is particularly effective where the level of the narrowband noise is significantly greater than the level of the analog signal, since the large noise signal may enable the amplitude, frequency, and phase of the

noise to be accurately evaluated. For example, in some situations where the noise comprises line noise, the narrowband noise level may be 50 dB or even more compared to the analog signal.

SYSTEM DESCRIPTION

[0017] Reference is now made to Fig. 1, which is a schematic illustration of a narrowband noise cancellation system 20, according to an embodiment of the present invention. System 20 is typically used during a medical procedure on a body organ, and in the description herein the body organ, by way of example, is assumed to comprise the heart, wherein the system is applied to cancel noise on intra-cardiac electrocardiogram (ECG) signals. However, it will be understood that system 20 may be applied to cancel noise on other signals, such as electroencephalograph (EEG) signals.

[0018] For clarity, except where otherwise stated, in the following description the signals affected by noise are assumed to be ECG signals, and the narrowband noise on the signals is assumed to be line noise having a frequency of 50 Hz or 60 Hz. In many cases, the narrowband line noise has the same or a greater magnitude than the levels of the ECG signals.

[0019] The following description assumes that system 20 senses intra-cardiac ECG signals from a heart 22, using a probe 24. A distal end 26 of the probe is assumed to have an electrode 28 for sensing the signals. Typically, probe 24 comprises a catheter which is inserted into the body of a subject 30 during a cardiac procedure performed by a user 32 of system 20. In the description herein user 32 is assumed to be a medical professional.

[0020] System 20 may be controlled by a system processor 40, comprising a processing unit 42 communicating with an ECG module 44. Module 44 in turn comprises a noise-cancellation module 46. Processor 40 may be mounted in a console 50, which comprises operating controls which typically include a pointing device such as a mouse or trackball. Professional 32 uses the pointing device to interact with the processor, which, as described below, may be used to present results produced by system 20 to the professional on a screen 54.

[0021] The screen displays results of analysis and processing of ECG signals by ECG module 44. Typically, the resultant ECG signals are presented on screen 54 in the form of a potential vs. time graph, and a schematic example 60 of such a graph is illustrated in Fig. 1. However, the resultant ECG signals may also be used by processor 40 to derive other results associated with the ECG signals, such as a local activation time (LAT). These results are typically presented on screen 54 in the form of a three-dimensional (3D) map 64 of the internal surface of heart 22.

[0022] Processor 40 uses software stored in a memory of the processor to operate system 20. The software may be downloaded to processor 40 in electronic form, over a network, for example, or it may, alternatively or addi-

tionally, be provided and/or stored on non-transitory tangible media, such as magnetic, optical, or electronic memory.

[0023] Processor 40 typically comprises other modules, such as a probe tracking module, a force module that measures a force on distal end 26, and an ablation module that provides regulated power to electrode 28, or another electrode in the distal end. For simplicity, such modules are not shown in Fig. 1. The Carto® system produced by Biosense Webster, of Diamond Bar, CA, uses such modules.

[0024] Fig. 2 is a schematic block diagram of noise-cancellation module 46, and Fig. 3 is a flowchart of actions taken by the module, according to an embodiment of the present invention. Module 46 may be implemented in hardware, for example as an application-specific integrated circuit (ASIC) and/or as a field-programmable gate array (FPGA). Alternatively module 46 may be at least partially implemented in software. Module 46 typically comprises a low-noise pre-amplifier 80, which is connected to receive signals from electrode 28. While, for simplicity, pre-amplifier 80 is illustrated as being within module 46, there is no necessity that it is so located. Thus, in a disclosed embodiment, pre-amplifier 80 is incorporated into probe 24, and in some embodiments may be incorporated into distal end 26 of the probe.

[0025] The signal received by pre-amplifier 80 is assumed to be a baseband analog signal having a narrowband noise component at a specific frequency. The baseband signal is the ECG signal acquired by electrode 28, upon which has been superimposed line noise of approximately 50 Hz or approximately 60 Hz, corresponding to the narrowband noise component.

[0026] The actions performed by the pre-amplifier correspond to an acquisition step 100 of the flowchart, wherein pre-amplifier acquires a "raw" analog ECG signal.

[0027] The output from pre-amplifier 80 is digitized by an analog-to-digital (A/D) converter 84, corresponding to a digitization step 102 of the flowchart. The digital output from the A/D converter is transferred to a signal analysis block 86.

[0028] The signal analysis block analyzes the digitized signal in order to isolate the narrowband noise component. Typically the analysis comprises performing a Fourier Transform and/or a wavelet transform. The analysis also assumes that an approximate frequency of the narrowband noise is known. The analysis uses the approximate frequency value, assumed to be a nominal value of 50 Hz or 60 Hz, to recover more exactly the specific frequency of the narrowband noise, as well as the amplitude and the phase of the noise.

[0029] An analysis step 104 corresponds to the actions performed by the signal analysis block 86. In some embodiments where the narrowband noise comprises line noise, signal analysis block 86 is configured to derive the specific frequency of the narrowband noise from a coupling to the line.

[0030] The results of the analysis of the digitized signal are passed to an analog signal generator 90. Generator 90 is configured to generate an analog correction signal having the same values of amplitude and frequency as the values of the narrowband noise amplitude and frequency recovered by the signal analysis block. However, the phase of the analog correction signal produced by generator 90 is configured to be opposite to, i.e., 180° out of phase with, the phase of the narrowband noise. The operation of generator 90, generating the analog correction signal, corresponds to the actions performed in a generation step 106 of the flowchart.

[0031] The analog correction signal is transferred to a summation block 94, which is also connected to receive the analog signal output by pre-amplifier 80. Block 94 acts as a mixer, and is configured to sum its two inputs. Because the noise on the output of the pre-amplifier has the same amplitude and frequency, but is opposite in phase to the analog correction signal, summing the two inputs effectively cancels the noise on the incoming analog signal, so that the output signal from block 94 comprises the analog signal with noise removed.

[0032] A final summation step 108 of the flowchart, wherein the output from the summation block is the summation of the two input analog signals, corresponds to the operation of summation block 94.

[0033] While the description above assumes that the input analog signal is an ECG signal that contains narrowband line noise, it will be appreciated that this type of analog signal, and this type of narrowband noise, are purely exemplary. Thus, embodiments of the present invention comprise other types of analog signal, such as EEG (electroencephalograph) signals, as well as other types of narrowband noise, such as narrowband noise generated by alternating magnetic fields.

[0034] It will thus be appreciated that the embodiments described above are cited by way of example, and that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing description and which are not disclosed in the prior art.

Claims

1. A method, comprising:

receiving an input analog signal containing noise at a specific noise frequency;
digitizing the input analog signal to form a digitized signal;
recovering a first amplitude and a first phase of the noise from the digitized signal;
generating an analog correction signal at the

- specific noise frequency having a second amplitude equal to the first amplitude and a second phase opposite to the first phase; and summing the input analog signal with the analog correction signal to generate an output analog signal. 5
2. The method according to claim 1, wherein the noise comprises line noise, and wherein the specific noise frequency is selected from a 50 Hz frequency and a 60 Hz frequency. 10
3. The method according to claim 2, and comprising deriving the specific noise frequency from a line signal. 15
4. The method according to claim 1, and comprising recovering the specific noise frequency from the digitized signal. 20
5. The method according to claim 1, wherein the input analog signal comprises an intra-cardiac electrocardiogram (ECG) signal.
6. Apparatus, comprising: 25
- an analog-to-digital (A/D) converter which is coupled to receive an input analog signal containing noise at a specific noise frequency, and to digitize the input analog signal so as to form a digitized signal; 30
- a signal analyzer which is configured to recover a first amplitude and a first phase of the noise from the digitized signal; 35
- an analog signal generator which is configured to generate an analog correction signal at the specific noise frequency having a second amplitude equal to the first amplitude and a second phase opposite to the first phase; and 40
- a summation block which sums the input analog signal with the analog correction signal to generate an output analog signal.
7. The apparatus according to claim 6, wherein the noise comprises line noise, and wherein the specific noise frequency is selected from a 50 Hz frequency and a 60 Hz frequency. 45
8. The apparatus according to claim 7, wherein the signal analyzer is configured to derive the specific noise frequency from a line signal. 50
9. The apparatus according to claim 6, wherein the signal analyzer is configured to recover the specific noise frequency from the digitized signal. 55
10. The apparatus according to claim 6, wherein the input analog signal comprises an intra-cardiac elec-

trocardiogram (ECG) signal.

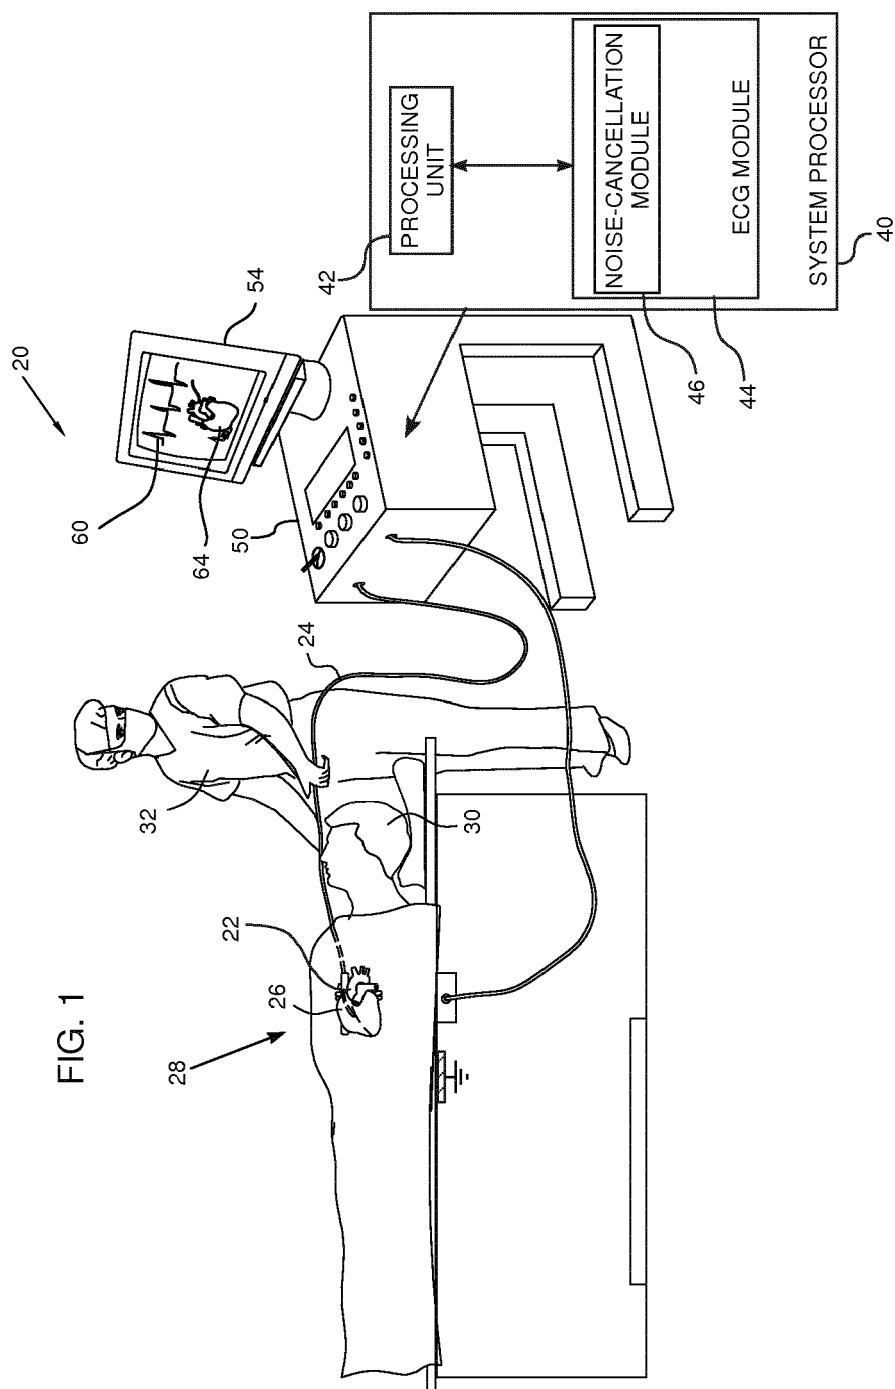
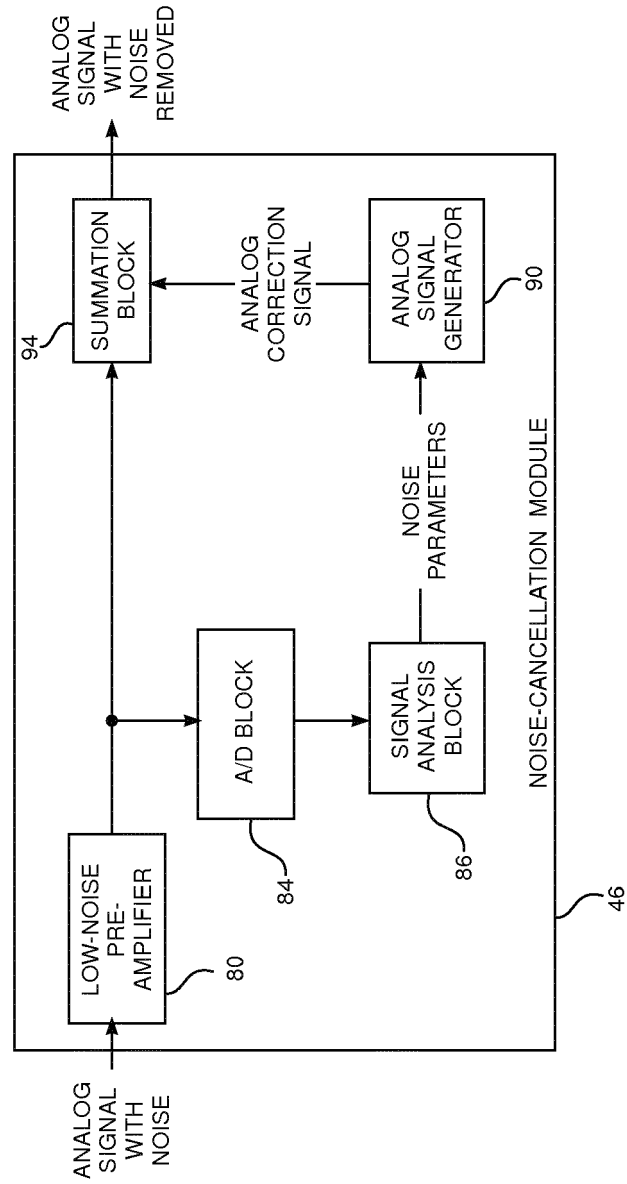


FIG. 2



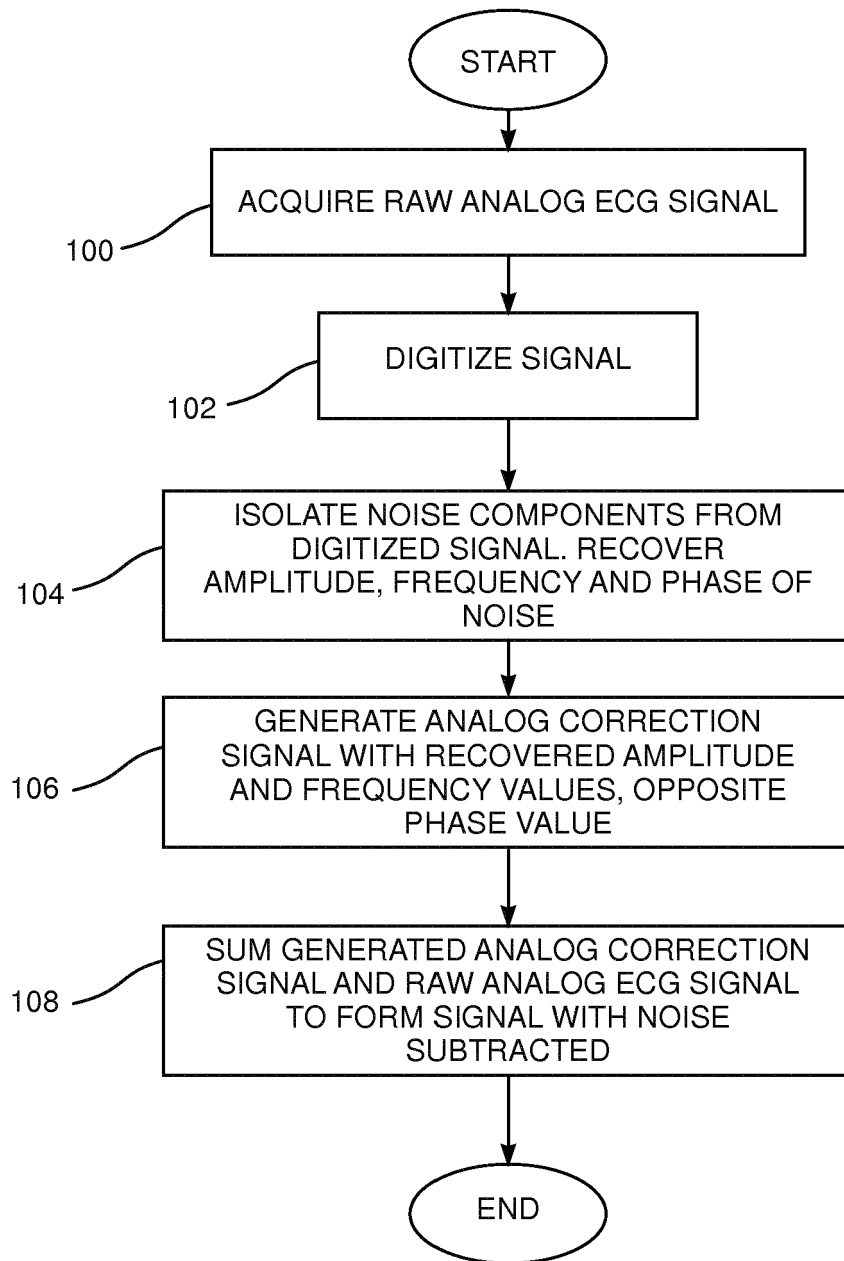


FIG. 3



EUROPEAN SEARCH REPORT

Application Number
EP 16 15 6274

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	WO 98/52463 A1 (QUINTON INSTR [US]; DEPINTO VICTOR M [US]) 26 November 1998 (1998-11-26)	1,2,5-7, 10	INV. A61B5/00 A61B5/0402
Y	* page 3, line 23 - page 4, line 35 * * page 8, lines 1-16; figure 1 * * page 11, line 36 - page 13, line 9; figure 7 * * page 23, line 28 - page 29, line 10; figure 10 * * page 18, line 28 - page 20, line 10 *	3,4,8,9	H04B15/00 H04B3/00 G06K9/00
A	US 2 622 150 A (COULTER WALLACE H ET AL) 16 December 1952 (1952-12-16) * column 1, line 1 - column 4, line 51 *	1-10	ADD. A61B5/04 A61B5/042
A	WO 2012/145571 A1 (DRAEGER MEDICAL SYSTEMS INC [US]; ZHENG LING [US]; CHEN YU [US]) 26 October 2012 (2012-10-26) * abstract * * page 7, line 15 - page 9, line 5; figures 2-4 *	1-10	
A	EP 0 488 410 A1 (TERUMO CORP [JP]) 3 June 1992 (1992-06-03) * column 3, lines 31-50 * * column 7, lines 10-51 *	1-10	TECHNICAL FIELDS SEARCHED (IPC) A61B H04B G06K
Y	US 2011/066052 A1 (MASCARENHAS DINESH LEO [IN]) 17 March 2011 (2011-03-17) * abstract * * paragraphs [0019] - [0023], [0031] *	3,4,8,9	
A	US 5 768 166 A (PALATNIK EUGENE S [US]) 16 June 1998 (1998-06-16) * abstract *	1-10	
----- -/-			
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 July 2016	Examiner Loveniers, Kris
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 15 6274

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	RAFAEL RAMOS ET AL: "FPGA-Based Implementation of an Adaptive Canceller for 50/60-Hz Interference in Electrocardiography", IEEE TRANSACTIONS ON INSTRUMENTATION AND MEASUREMENT, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 56, no. 6, 1 December 2007 (2007-12-01), pages 2633-2640, XP011197814, ISSN: 0018-9456, DOI: 10.1109/TIM.2007.904472 * page 2633 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 July 2016	Examiner Loveniers, Kris
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 15 6274

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-07-2016

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9852463 A1	26-11-1998	AU 7688698 A CA 2290629 A1 EP 0984721 A1 US 5983127 A US 5999845 A US 6041250 A WO 9852463 A1	11-12-1998 26-11-1998 15-03-2000 09-11-1999 07-12-1999 21-03-2000 26-11-1998
US 2622150 A	16-12-1952	NONE	
WO 2012145571 A1	26-10-2012	CN 103813746 A EP 2699149 A1 US 2014039824 A1 WO 2012145571 A1	21-05-2014 26-02-2014 06-02-2014 26-10-2012
EP 0488410 A1	03-06-1992	AU 651634 B2 EP 0488410 A1 JP H057560 A US 5284151 A	28-07-1994 03-06-1992 19-01-1993 08-02-1994
US 2011066052 A1	17-03-2011	CN 102018510 A DE 102010037558 A1 US 2011066052 A1	20-04-2011 17-03-2011 17-03-2011
US 5768166 A	16-06-1998	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6041250 A, dePinto [0003]
- US 8597196 B, Kishi [0004]
- US 8134255 B, Hatanaka [0005]

Non-patent literature cited in the description

- **RAMOS.** FPGA-Based Implementation of an Adaptive Cancellor for 50/60-Hz Interference in Electrocardiography. *IEEE Transactions on Instrumentation and Measurement*, December 2007, vol. 56 (6) [0006]
- **REHMAN.** Noise removal from ECG Using Modified CSLMS algorithm. *International Journal of Electronics, Communication & Instrumentation Engineering Research and Development*, June 2014, vol. 4 (3) [0007]

专利名称(译)	窄带模拟噪声消除		
公开(公告)号	EP3058867A1	公开(公告)日	2016-08-24
申请号	EP2016156274	申请日	2016-02-18
[标]申请(专利权)人(译)	韦伯斯特生物官能(以色列)有限公司		
申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
当前申请(专利权)人(译)	生物传感韦伯斯特 (以色列) LTD.		
[标]发明人	GOVARI ASSAF		
发明人	GOVARI, ASSAF		
IPC分类号	A61B5/00 A61B5/0402 H04B15/00 H04B3/00 G06K9/00 A61B5/04 A61B5/042		
CPC分类号	A61B5/04012 A61B5/0402 A61B5/7203 A61B5/042 A61B2562/18 H03M1/0636 G06K9/0051 H03M1/34 H04B15/005		
优先权	14/625755 2015-02-19 US		
外部链接	Espacenet		

摘要(译)

一种方法，包括接收包含特定噪声频率的噪声的输入模拟信号，并将输入的模拟信号数字化以形成数字化信号。该方法还包括从数字化信号中恢复噪声的第一幅度和第一相位，并产生特定噪声频率的模拟校正信号。模拟校正信号具有等于第一幅度的第二幅度和与第一相位相反的第二相位。该方法还包括将输入模拟信号与模拟校正信号相加以产生输出模拟信号。

