



(19) **United States**

(12) **Patent Application Publication**
KIM

(10) **Pub. No.: US 2008/0259237 A1**

(43) **Pub. Date: Oct. 23, 2008**

(54) **AMORPHOUS SILICON THIN FILM
TRANSISTOR-LIQUID CRYSTAL DISPLAY
DEVICE AND METHOD OF
MANUFACTURING THE SAME**

Publication Classification

(51) **Int. Cl.**
G02F 1/136 (2006.01)
(52) **U.S. Cl.** **349/43**

(76) **Inventor: Dong-Gyu KIM, Yongin-si (KR)**

(57) **ABSTRACT**

Correspondence Address:
F. CHAU & ASSOCIATES, LLC
130 WOODBURY ROAD
WOODBURY, NY 11797 (US)

In an amorphous silicon thin film transistor-liquid crystal display device and a method of manufacturing the same, gate patterns including a gate line and a gate electrode are formed on an insulation substrate having a display region and a driving circuit region on which a plurality of shift resistors are formed. A gate insulating film, active layer patterns and data patterns including source/drain electrodes are formed successively on the substrate. A passivation layer on the substrate has a first contact hole exposing a drain electrode of the display region and second and third contact holes respectively exposing a gate electrode and source/drain electrode of a first transistor of each of the shift resistors. Electrode patterns on the passivation layer include a first electrode connected to the drain electrode of the display region through the first contact hole and a second electrode connecting the gate electrode to the source/drain electrode of the first transistor through the second and third contact holes. The gate driving circuit including the shift resistors and the wirings are integrated on the insulating substrate without an additional process, thereby simplifying the manufacturing process.

(21) **Appl. No.: 12/108,337**

(22) **Filed: Apr. 23, 2008**

Related U.S. Application Data

(62) **Division of application No. 10/293,095, filed on Nov. 13, 2002, now Pat. No. 6,922,217.**

Foreign Application Priority Data

May 28, 2002 (KR) 2002-29664

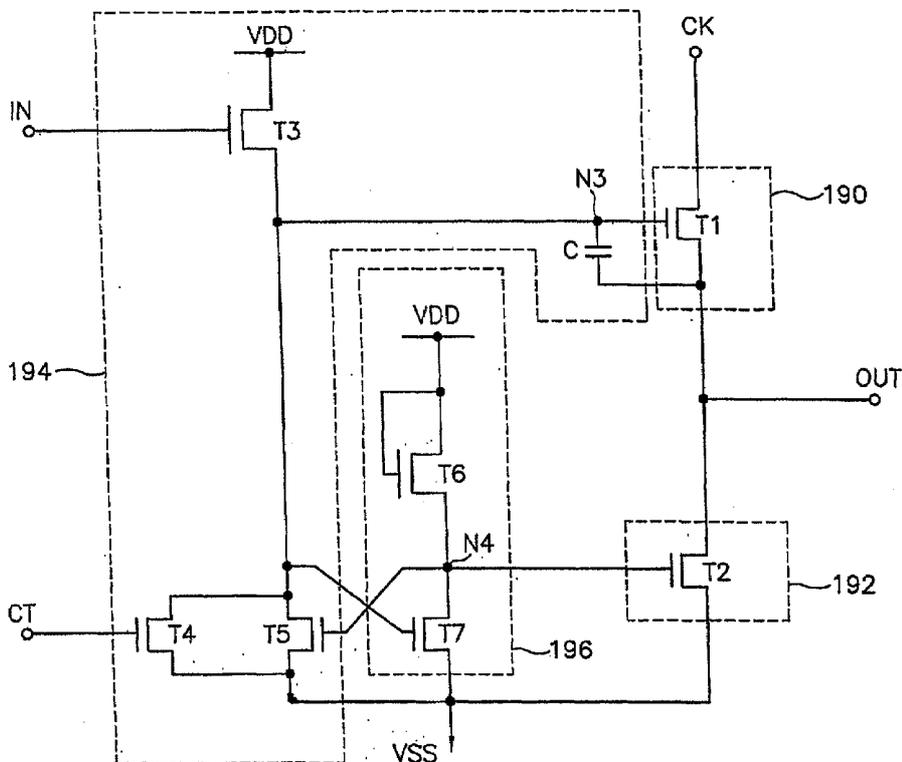


FIG. 1
(PRIOR ART)

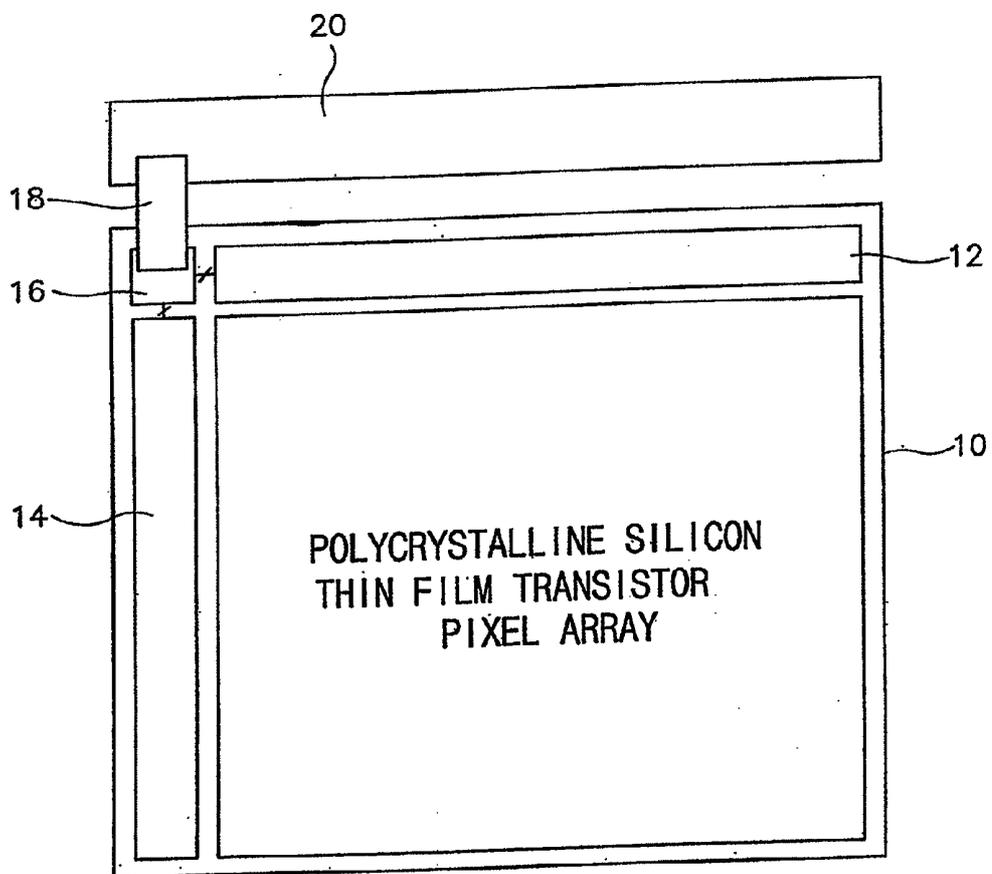
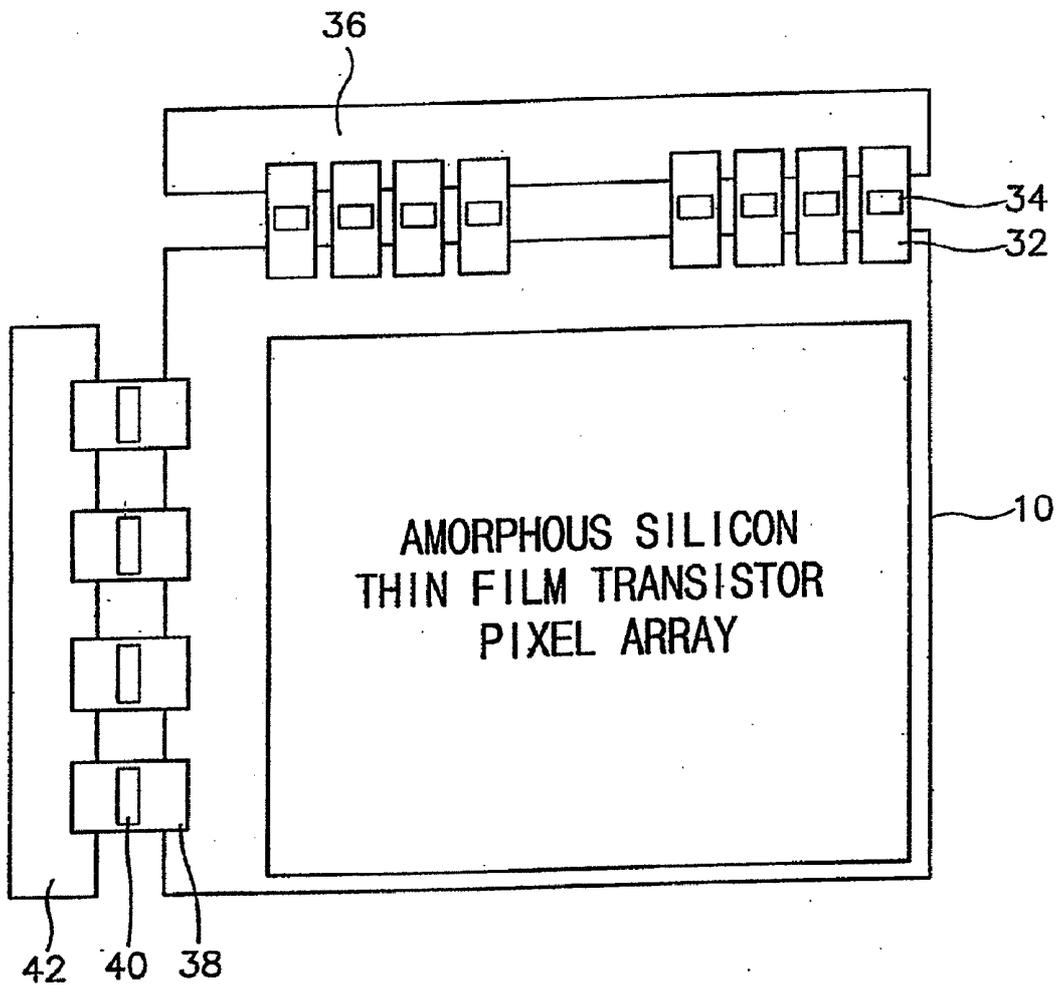


FIG. 2
(PRIOR ART)



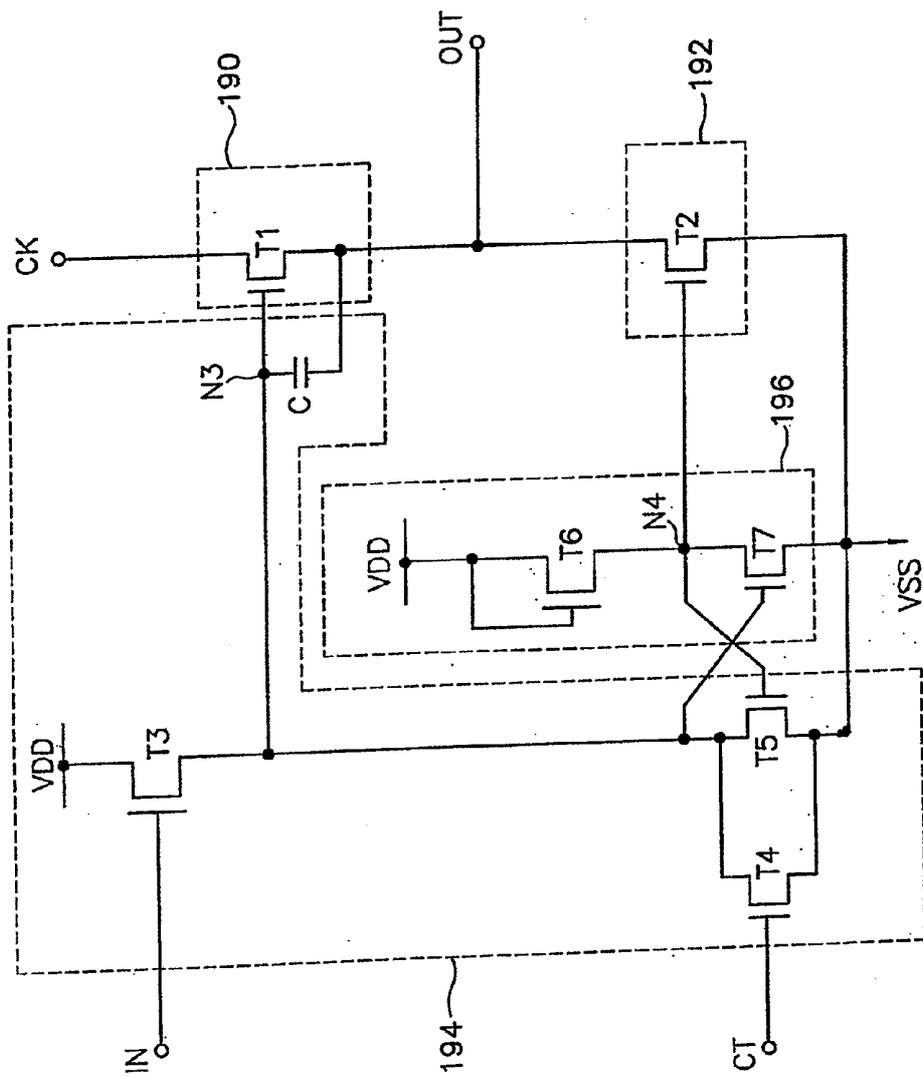


FIG. 3

FIG. 4

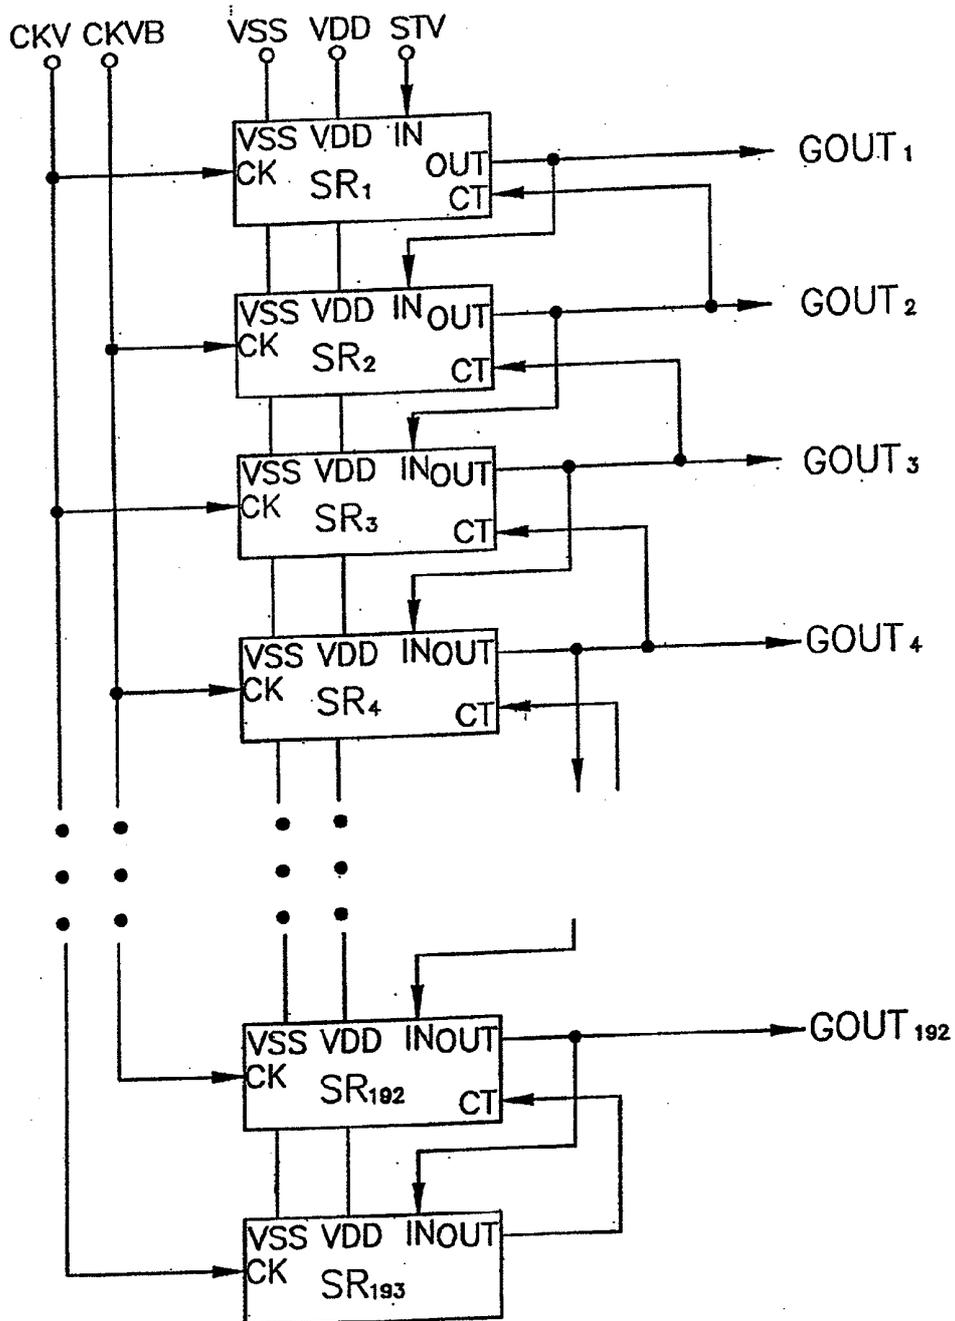


FIG. 5

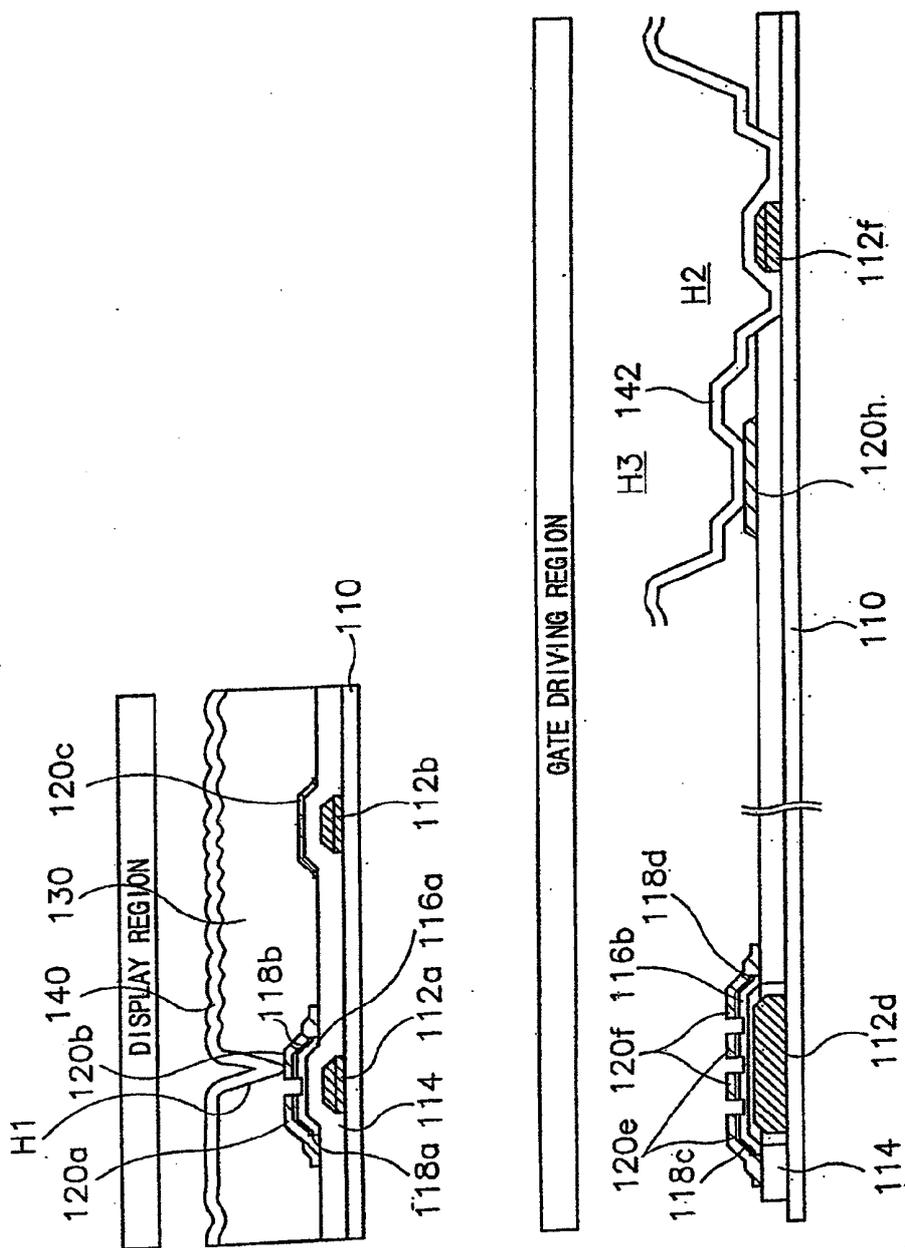


FIG. 6

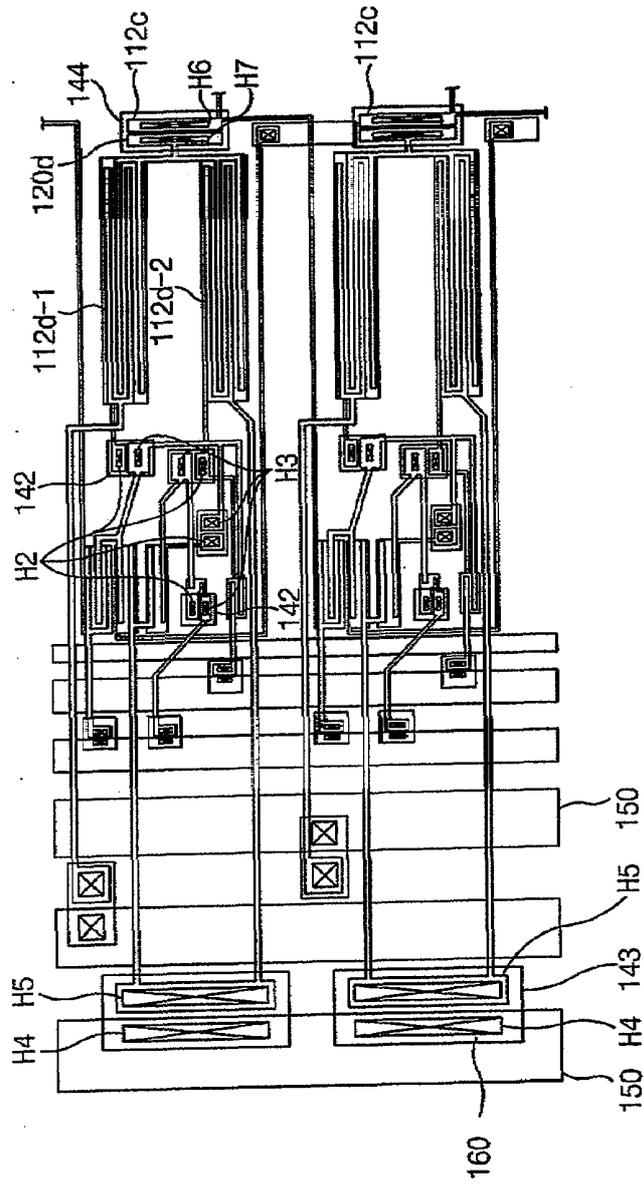


FIG. 7

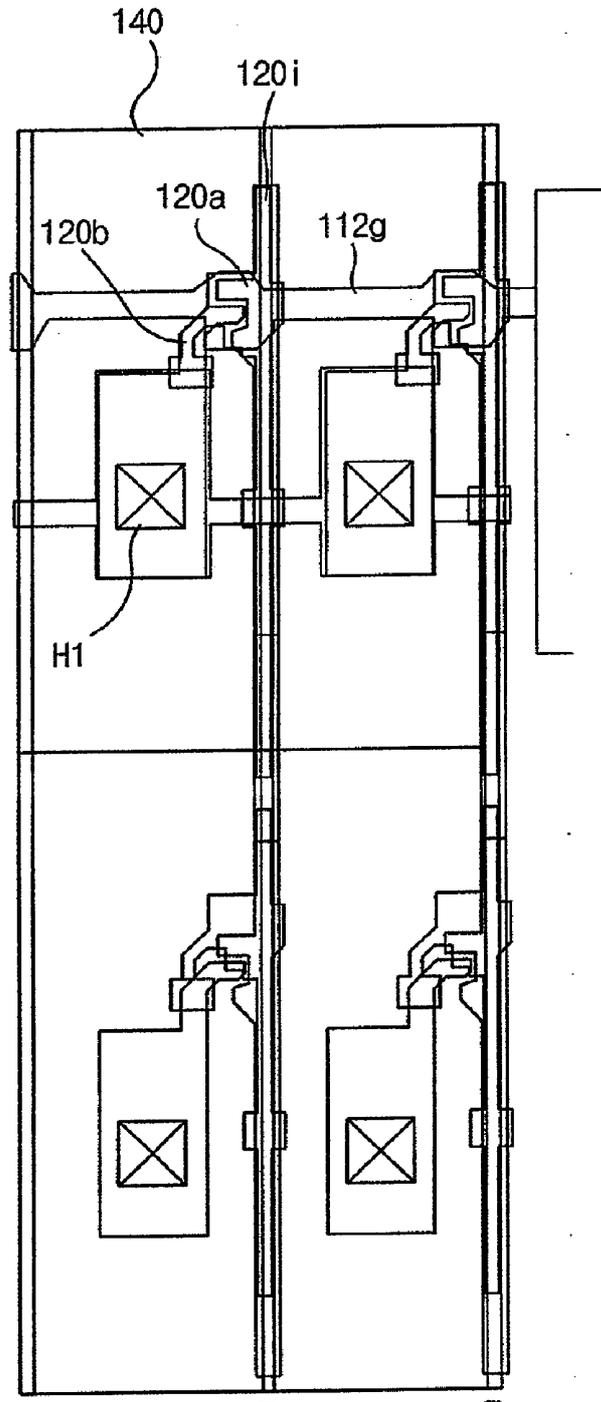


FIG. 8A

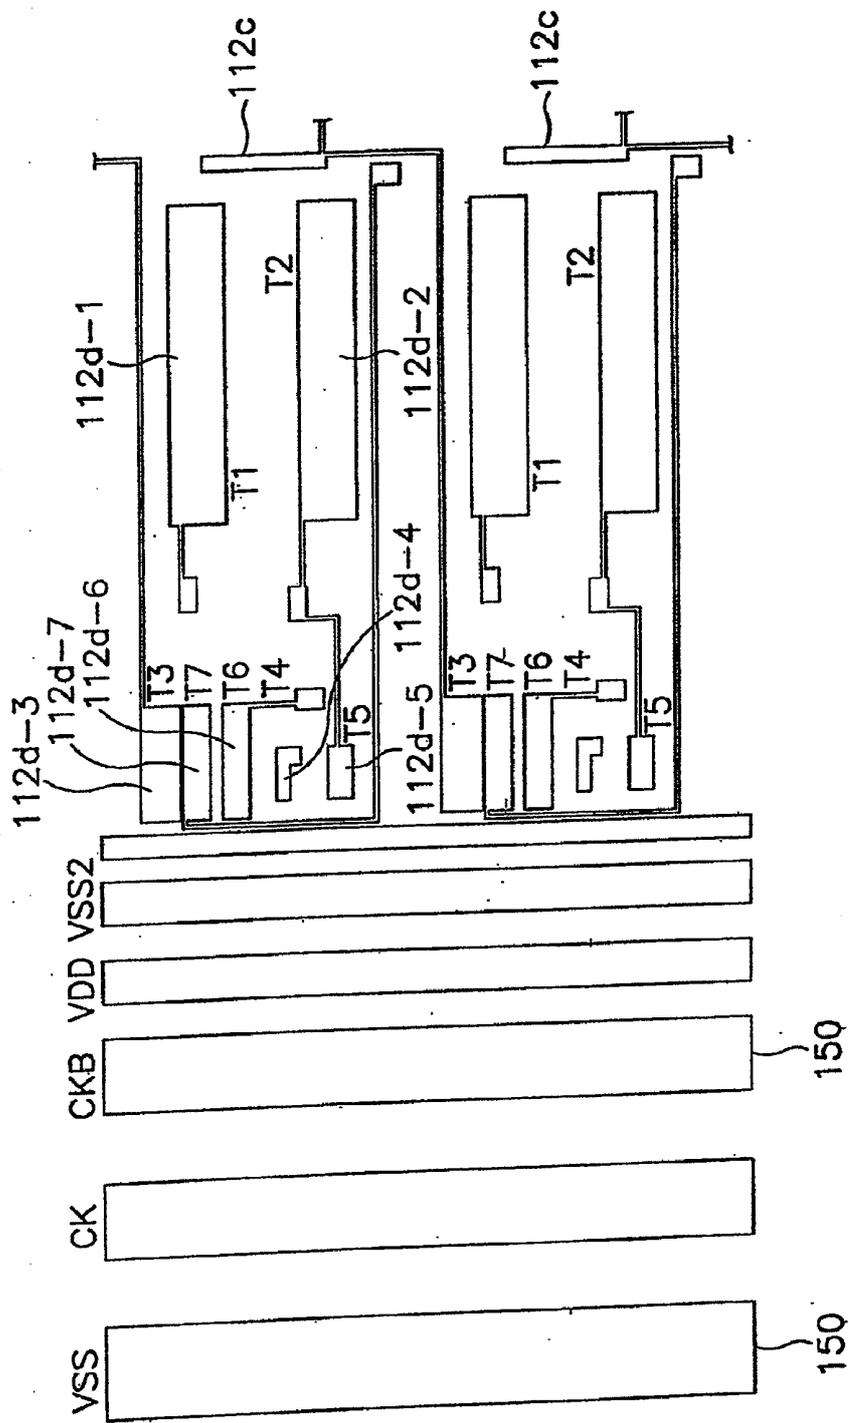


FIG. 8B

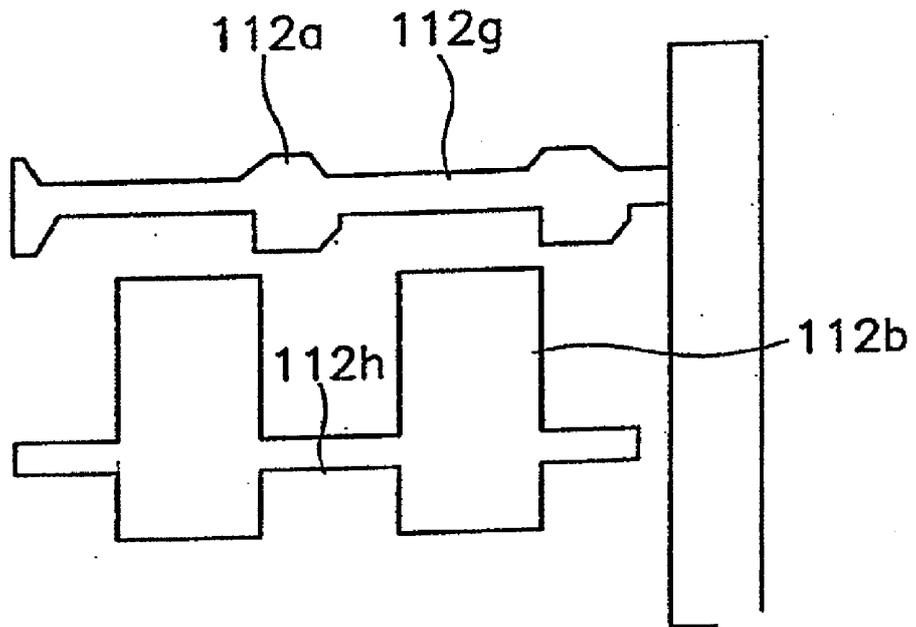


FIG. 9A

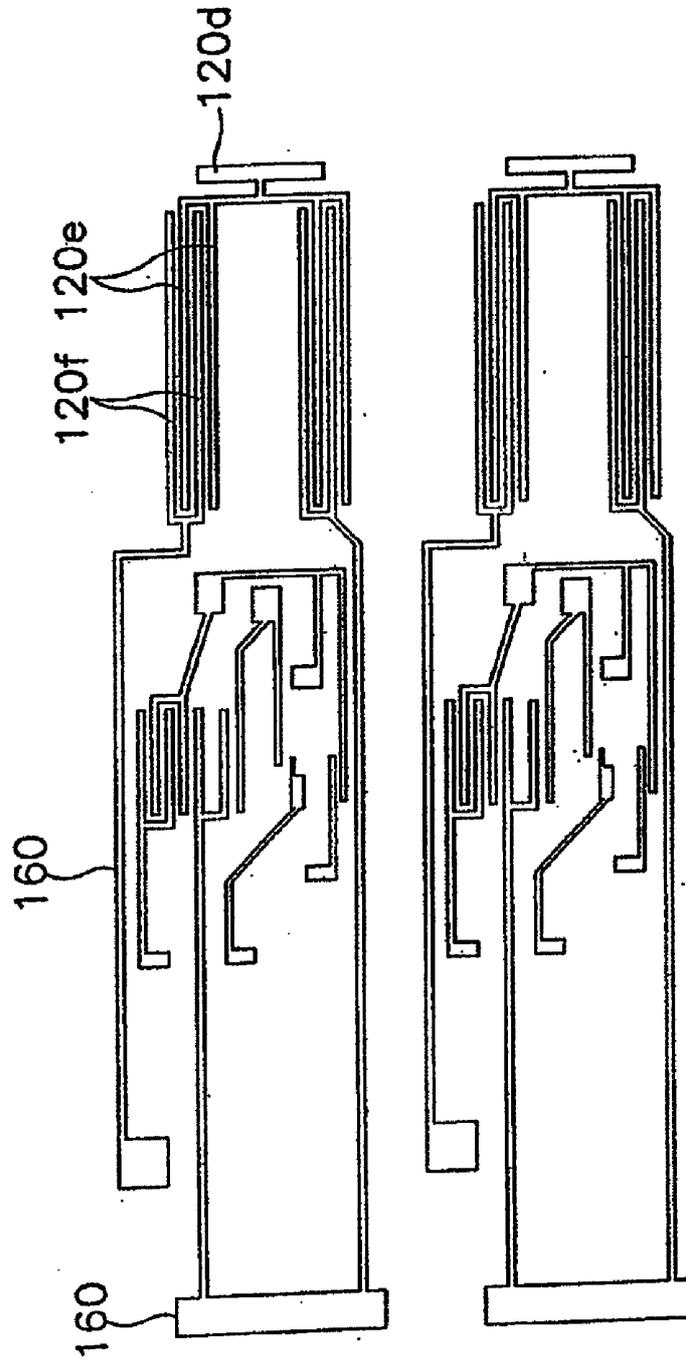


FIG. 10A

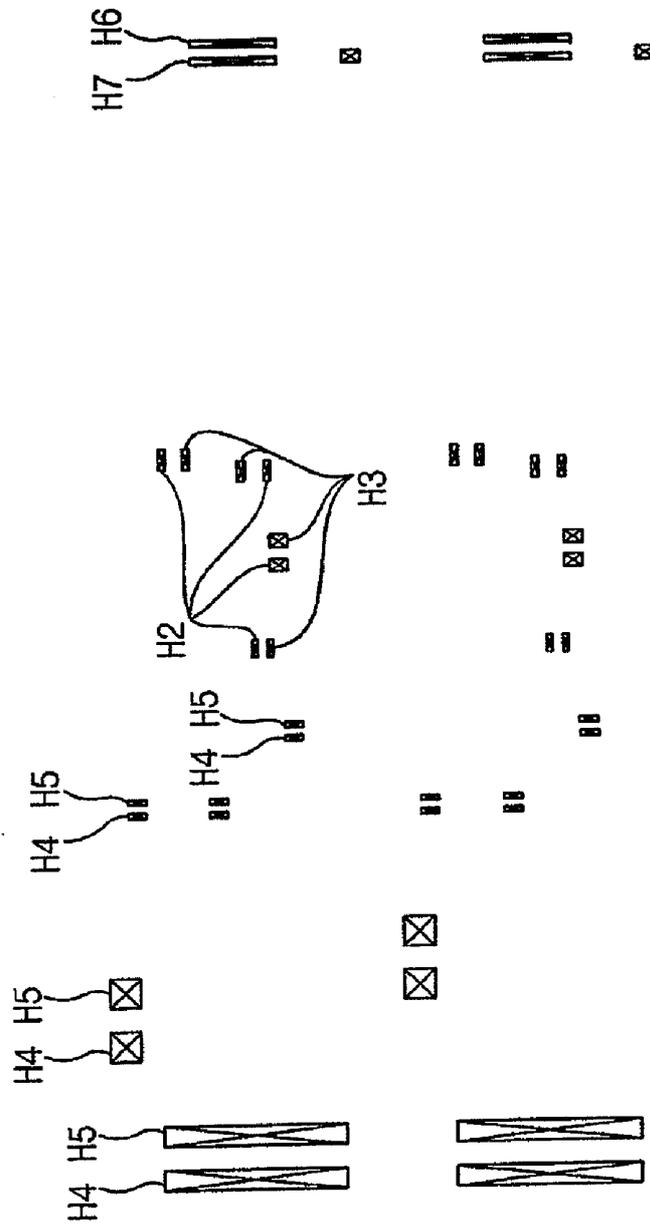
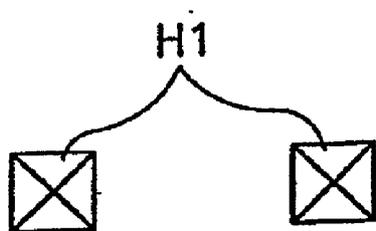
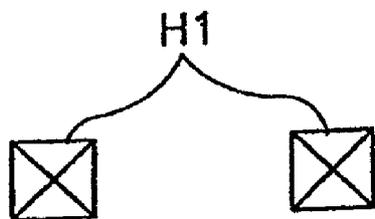


FIG. 10B




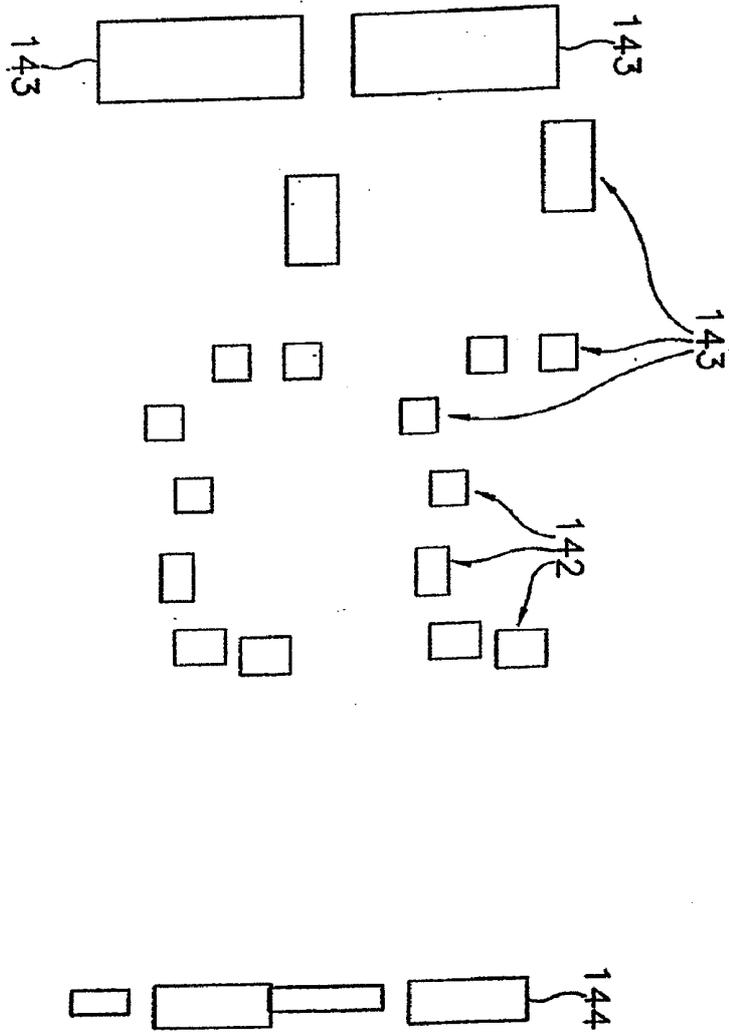


FIG. 11A

FIG. 11B

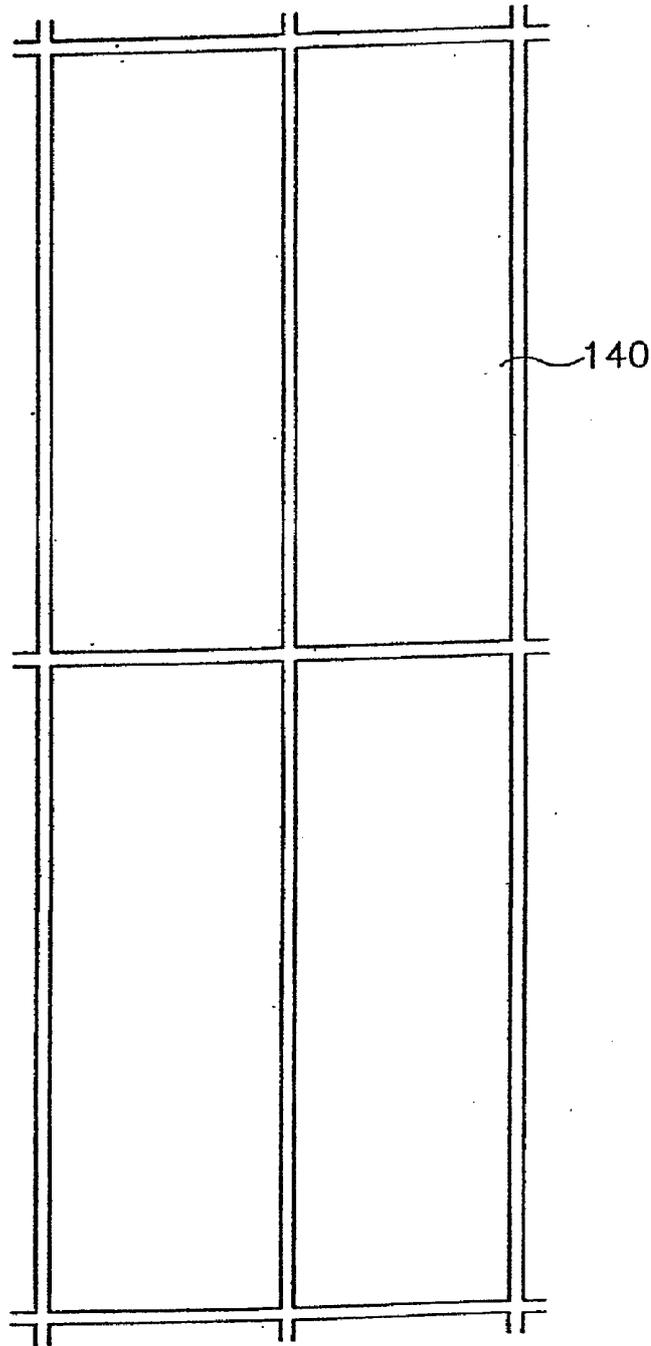

**AMORPHOUS SILICON THIN FILM
TRANSISTOR-LIQUID CRYSTAL DISPLAY
DEVICE AND METHOD OF
MANUFACTURING THE SAME**

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device and a method of manufacturing the same and, more particularly, to an amorphous silicon thin film transistor-liquid crystal display device (TFT-LCD) in which a gate driving circuit is integrated on an amorphous silicon TFT substrate and a method of manufacturing the same.

[0003] 2. Description of the Related Art

[0004] In the information society of these days, electronic display devices are more important as information transmission media and various electronic display devices are widely applied for industrial apparatus or home appliances. Such electronic display devices are being continuously improved to have new-appropriate functions for various demands of the information society.

[0005] In general, electronic display devices display and transmit various pieces of information to users who utilize such information. That is, the electronic display devices convert electric information signals outputted from electronic apparatus into light information signals recognized by users through their eyes.

[0006] In the electronic display devices dividing into an emissive display device and a non-emissive display device, the emissive display device displays light information signals through a light emission phenomena thereof and the non-emissive display device displays the light information signals through a reflection, a scattering or an interference thereof. The emissive display device includes a cathode ray tube (CRT), a plasma display panel (PDP), a light emitting diode (LED) and an electroluminescent display (ELD). The emissive display device is called as an active display device. Also, the non-emissive display device, called as a passive display device, includes a liquid crystal display (LCD), an electrochemical display (ECD) and an electrophoretic image display (EPID).

[0007] The CRT has been used for a television receiver or a monitor of a computer as the display device for a long time since it has a high quality and a low manufacturing cost. The CRT, however, has some disadvantages such as a heavy weight, a large volume and high power dissipation.

[0008] Recently, the demand for a new electronic display devices is greatly increased such as a flat panel display device having excellent characteristics that thin thickness, light weight, low driving voltage and low power consumption. Such flat panel display devices can be manufactured according to the rapidly improved semiconductor technology.

[0009] In the flat panel devices, a liquid crystal display (LCD) device has been widely utilized for various electronic devices because the LCD device has a thin thickness, a low power dissipation and high display quality approximately identical to those of the CRT. Also, the LCD device can be operated under a low driving voltage and can be easily manufactured so that the LCD device is widely used for various electronic apparatuses.

[0010] The LCD comprises two substrates, each of the substrates having an electrode, and a liquid crystal layer interposed therebetween. In the LCD, a voltage is applied to the

electrodes to realign liquid crystal molecules and control an amount of light transmitted through the molecules.

[0011] Among the LCDs, there is mainly used a device including electrodes formed on each of two substrates and a thin film transistor for switching a voltage applied to each of the electrodes. Generally, the thin film transistor is formed on one of the two substrates.

[0012] The LCD device utilizing the thin film transistor in a pixel region is divided into an amorphous type TFT-LCD and a polycrystalline type TFT-LCD. The polycrystalline silicon TFT-LCD device has low consumption power and cost, but the TFT manufacturing process is complicated as compared to that of the amorphous silicon TFT-LCD device. Accordingly, the polycrystalline silicon TFT-LCD is mainly used for a small-sized display such as IMT-2000 mobile phone. The amorphous silicon TFT-LCD is suitable for a large-sized display and has a high yield, so is used for display having a large screen such as a notebook PC, an LCD monitor, a high definition television (HDTV) receiver, etc.

[0013] As shown in FIG. 1, in a polycrystalline silicon TFT-LCD device, a data driving circuit **12** and a gate driving circuit **14** are formed on a glass substrate **10** on which pixel arrays are formed. A terminal **16** is connected to an integrated printed circuit board (PCB) **20** through a film cable **18**. This structure can cut down manufacturing cost and minimize the power loss by integrating the driving circuits.

[0014] However, as shown in FIG. 2, in an amorphous silicon TFT-LCD device, a data driving chip **34** is formed on a flexible PCB **32** by a chip on film (COF) method and a data PCB **36** is connected to a data line terminal of pixel array through the flexible PCB **32**. Further, a gate driving chip **40** is formed on a flexible PCB **38** by the COF method, and a gate PCB **42** is connected to a gate line terminal of pixel array through the flexible PCB **38**.

[0015] A recently suggested method is an integrated PCB technology wherein a gate power supply is mounted on a data PCB to thereby eliminate a gate PCB. In a Korea Patent Laid-Open Publication Number 2000-66493, there is disclosed an LCD module adopting an integrated PCB from which the gate PCB is removed.

[0016] However, even if the integrated PCB is adopted, a flexible PCB on which a gate driving circuit is formed is still used. Accordingly, since a process of assembling a plurality of flexible PCBs on a glass substrate is carried out in the manufacture of amorphous silicon TFT-LCD, an outer lead bonding (OLB) process is more complicated as compared to the polycrystalline silicon TFT-LCD, thereby raising the manufacturing cost.

[0017] Therefore, for the amorphous silicon TFT-LCD, it is demanded a method where the driving circuits and the pixel array are simultaneously formed on the substrate to thereby decrease the number of the assembly process in the same manner of the polycrystalline silicon TFT-LCD.

SUMMARY OF THE INVENTION

[0018] It is an object of the present invention to provide an amorphous silicon TFT-LCD device in which a gate driving circuit is integrated on an amorphous silicon TFT substrate.

[0019] It is another object of the present invention to provide a method of manufacturing an amorphous silicon TFT-LCD device in which a gate driving circuit is integrated on an amorphous silicon TFT substrate.

[0020] To achieve the object of the present invention, there is provided an amorphous silicon TFT-LCD device compris-

ing an insulating substrate including a display region on which a pixel array is formed and a driving circuit region on which a plurality of shift resistors are formed. A gate pattern is formed on the substrate and includes a gate line and a gate electrode. A gate insulating film is formed on the substrate including the gate pattern. An active layer pattern is formed on the gate insulating film and a data pattern is formed on the substrate and the active layer pattern. The data pattern includes a source electrode making contact with a first region of the active layer pattern, a drain electrode making contact with a second region of the active layer pattern and a data line connected to the drain electrode. A passivation layer is formed on the substrate including the data pattern and has a first contact hole exposing the drain electrode of the display region, a second contact hole exposing the gate electrode of a first transistor of each of the shift resistors and a third contact hole exposing the source/drain electrode of the first transistor. An electrode pattern is formed on the passivation layer and includes a first electrode connected to the drain electrode of the display region through the first contact hole and a second electrode connecting the gate electrode and the source/drain electrode of the first transistor to each other through the second and third contact holes.

[0021] Further, the aforementioned object of the present invention can be achieved by an amorphous silicon TFT-LCD device comprising an insulating substrate including a display region on which a plurality of gate lines and a plurality of data lines are formed and a gate driving circuit region. A plurality of shift resistors is formed on the substrate of the gate driving circuit region and includes n number of thin film transistors having a gate electrode and source/drain electrodes. The shift resistors select sequentially a plurality of gate lines. Main wirings are disposed on the substrate of the gate driving circuit region in order to apply a signal to each of the shift resistors and formed of the same layer from a first shift resistor to a last shift resistor. A passivation layer is formed on the substrate including the shift resistors and the main wirings and has a first contact hole partially exposing a data line of the display region, a second contact hole exposing a gate electrode of a first transistor of each of the shift resistors and a third contact hole exposing the source/drain electrode of the first transistor. An electrode pattern is formed on the passivation layer and includes a first electrode connected with the data line of the display region through the first contact hole and a second electrode connecting the gate electrode and the source/drain electrode of the first transistor to each other through the second and third contact holes.

[0022] To achieve another object of the present invention, there is provided a method of manufacturing an amorphous silicon TFT-LCD device. After forming a gate pattern including a gate line and a gate electrode on an insulating substrate having a display region on which a pixel array is formed and a driving circuit region on which a plurality of shift resistors are formed, a gate insulating film is formed on the substrate including the gate pattern. An active layer pattern is formed on the gate insulating film above the gate electrode. A data pattern is formed on the substrate and the active layer pattern. The data pattern includes a source electrode making contact with a first region of the active layer pattern, a drain electrode making contact with a second region of the active layer pattern and a data line connected with the drain electrode. After forming a passivation layer on the substrate including the data pattern, the passivation layer and the gate insulating film are etched to form a first contact hole exposing the drain electrode

of the display region, a second contact hole exposing the gate electrode of a first transistor of each of the shift resistors, and a third contact hole exposing a source/drain electrode of the first transistor. Thereafter, an electrode pattern is formed on the passivation layer. The electrode pattern includes a first electrode connected with the drain electrode of the display region through the first contact hole and a second electrode connecting the gate electrode and the source/drain electrode of the first transistor to each other through the second and third contact holes.

[0023] Also, another object of the present invention can be achieved by a method of manufacturing an amorphous silicon TFT-LCD device wherein a gate pattern is formed. The gate pattern includes a gate line and a gate electrode on an insulating substrate having a display region on which a pixel array is formed and a driving circuit region on which a plurality of shift resistors are formed. After forming a gate insulating film on the substrate including the gate pattern, an active layer pattern and a data pattern on the gate insulating film using one mask are formed. The data pattern includes a source electrode making contact with a first region of the active layer pattern, a drain electrode making contact with a second region of the active layer pattern and a data line connected with the drain electrode. A passivation layer is formed on the substrate including the data pattern. The passivation layer and the gate insulating film are etched to form a first contact hole exposing the drain electrode of the display region, a second contact hole exposing the gate electrode of a first transistor of each of the shift resistors, and a third contact hole exposing a source/drain electrode of the first transistor. Then, an electrode pattern is formed on the passivation layer. The electrode pattern includes a first electrode connected with the drain electrode of the display region through the first contact hole and a second electrode connecting the gate electrode and the source/drain electrode of the first transistor to each other through the second and third contact holes.

[0024] According to an amorphous silicon TFT-LCD device of the present invention, without an additional process, the gate driving circuit including the shift resistors and the wirings is integrated on the insulating substrate on which a pixel array is formed. That is, several layers, which can be comprised of the same material, are formed of the same layer to thereby decrease the number of mask. Further, a conductive film for pixel electrode connects the gate electrode and source/drain electrodes of the first transistor constituting the shift resistors in the gate driving circuit with each other, thereby simplifying the manufacturing process.

[0025] Further, the main wirings for applying a signal to each of the shift resistors are formed of the same layer from the first shift resistor to the last shift resistor, so that the resistance of the main wiring is minimized to increase field effect mobility of the amorphous silicon TFT-LCD.

BRIEF DESCRIPTION OF THE INVENTION

[0026] The above objects and other advantages of the present invention will become more apparent by describing preferred embodiments thereof in detail with reference to the accompanying drawings in which:

[0027] FIG. 1 is a plan view schematically illustrating a conventional polycrystalline silicon TFT-LCD device;

[0028] FIG. 2 is a plan view schematically illustrating a conventional amorphous silicon TFT-LCD device;

[0029] FIG. 3 is a circuit diagram of shift resistors applied to a gate driving circuit region in an amorphous silicon TFT-LCD device according to one embodiment of the present invention;

[0030] FIG. 4 is a block diagram of the shift resistors of FIG. 3;

[0031] FIG. 5 is a cross-sectional view of an amorphous silicon TFT-LCD device in accordance with one embodiment of the present invention;

[0032] FIG. 6 is a plan view illustrating a gate driving circuit region of an amorphous silicon TFT-LCD device according to one embodiment of the present invention;

[0033] FIG. 7 is a plan view illustrating a display region of an amorphous silicon TFT-LCD device according to one embodiment of the present invention; and

[0034] FIGS. 8A to 11B are plan views illustrating a method of manufacturing an amorphous silicon TFT-LCD device in accordance with one embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0035] Hereinafter, a preferred embodiment of the present invention will be described in detail with reference to the accompanying drawings.

[0036] FIG. 3 is a circuit diagram of shift resistors applied to a gate driving circuit region in an amorphous silicon TFT-LCD device according to one embodiment of the present invention. FIG. 4 is a block diagram of the shift resistors in FIG. 3.

[0037] Referring to FIGS. 3 and 4, the gate driving circuit has a plurality of shift resistors ($SR_1, SR_2, \dots, SR_{193}$) connected subordinately. That is, an output terminal (OUT) of each of the shift resistors is connected to an input terminal (IN) of the next shift resistor. The shift resistors have 192 shift resistors ($SR_1 \sim SR_{192}$) corresponding to gate lines and one dummy shift resistor (SR_{193}). Each of the shift resistors has an input terminal (IN), an output terminal (OUT), a control terminal (CT), a clock signal input terminal (CK), a first power source terminal (VSS) and a second power source terminal (VDD).

[0038] A start signal (ST) is inputted to the input terminal (IN) of the first shift resistor (SR_1). The output signal ($GOUT_1 \sim GOUT_{192}$) of each of the shift resistors is connected to the corresponding gate lines, and then, a plurality of gate lines is sequentially selected by the output signal. A first clock signal (CK) is provided to the odd-numbered shift resistors, while a second clock signal (CKB) to the even-numbered shift resistors. The phase of the first clock signal (CK) is reverse to that of the second clock signal (CKB).

[0039] Each of the shift resistors includes a pull-up section 190, a pull-down section 192, a pull-up driving section 194 and a pull-down driving section 196.

[0040] The pull-up section 190 provides a corresponding clock signal of the first and second clock signals to the output terminal (OUT). The pull-down section 192 provides the first power source (VSS) to the output terminal (OUT).

[0041] The pull-up driving section 194 is connected to the input node of the pull-up section 190 such that it responds to the end of the input signal to charge a capacitor for turning on the pull-up section 190 and responds to the end of the output signal of the next shift resistor to discharge the capacitor for turning off the pull-up section 190.

[0042] The pull-down driving section 196 is connected to the input node of the pull-down section 192 such that it responds to the end of the input signal to turn on the pull-down section 192 and responds to the end of the output signal of next shift resistor to turn off the pull-down section 192.

[0043] The pull-up section 190 includes a first driving transistor T1 having a drain connected to the clock signal input terminal CK, a gate connected to a third node N3 and a source connected to the output terminal OUT.

[0044] The pull-down section 192 includes a second driving transistor T2 having a drain connected to the output terminal OUT, a gate connected to a fourth node N4, and a source connected to the clock signal input terminal CK.

[0045] The pull-up driving section 194 includes a capacitor C and three control transistors T3, T4 and T5. The capacitor C is connected between the third node N3 and the output terminal OUT. A third control transistor T3 has a drain connected to the second power source VDD, a gate connected to the input terminal IN and a source connected to the third node N3. A fourth control transistor T4 has a drain connected to the third node N3, a gate connected to the control terminal CT and a source connected to the first power source VSS. A fifth control transistor T5 has a drain connected to the third node N3, a gate connected to the fourth node N4 and a source connected to the first power source VSS.

[0046] The pull-down driving section 196 includes two control transistors T6 and T7. Drain and gate of the sixth control transistor T6 are connected to the second power source VDD in common, while a source to the fourth node N4. The seventh control transistor T7 has a drain connected to the fourth node N7, a gate connected to the third node N3 and a source connected to the first power source VSS.

[0047] FIG. 5 is a cross-section view of the amorphous silicon TFT-LCD device according to one embodiment of the present invention and illustrates a display region and a gate driving circuit region. FIG. 6 is a plan view of the gate driving circuit region, and FIG. 7 is a plan view of the display region.

[0048] Referring to FIGS. 5 to 7, gate patterns 112a, 112b, 112c, 112d, 112e, 112f and 112g are disposed on the display region and the gate driving circuit region of an insulating substrate 110. Each of the gate patterns includes a gate line 112g and a gate electrode branched from the gate line 112g. Also, the gate pattern 112b in the display region is provided as a lower electrode of a storage capacitor. Between the display region and the gate driving circuit region, a gate pad 112c is formed of the same layer as in the gate pattern. The gate pad 112c is connected to one end of the gate line 112g and applies a scanning signal to the gate line 112g by receiving the scanning signal from an external source. Preferably, the gate patterns 112a, 112b, 112c, 112d, 112e, 112f and 112g are formed of a composite film consisting of a chrome (Cr) layer having a thickness of about 500 Å and an aluminum-neodymium (AlNd) having a thickness of about 200 Å.

[0049] A gate insulating film 114 is formed on the entire surface of the substrate 100 including the gate patterns 112a, 112b, 112c, 112d, 112e, 112f and 112g. The gate insulating film 114 preferably has a thickness of about 4500 Å thick and comprises silicon-nitride (SiNx).

[0050] On the gate insulating film 114 of the display region and the gate driving circuit region, there are disposed active layer patterns including first impurity regions 118a and 118c, second impurity regions 118b and 118d, and channel regions 116a and 116b formed between the first impurity regions and the second impurity regions. The channel regions 116a and

116b comprises amorphous silicon and has a thickness of about 200 Å, and the first and second impurity regions **118a**, **118b**, **118c** and **118d** comprises n-type amorphous silicon and have a thickness of about 500 Å.

[0051] Data patterns **120a**, **120b**, **120c**, **120e**, **120f**, **120h** and **120i** are disposed on the active layer patterns. The data patterns includes source electrodes **120a** and **120e** respectively making contact with the first impurity regions **118a** and **118c**, drain electrodes **120b** and **120f** respectively making contact with the second impurity regions **118b** and **118d**, and a data line **120i** connected to the source electrodes **120a** and **120e** and formed perpendicular to the gate line **112g**. Above the capacitor lower electrode **112b**, there is disposed a capacitor upper electrode **120c** comprising the same layer as in the data patterns with the gate insulating film **114** interposed therebetween. On the pad region between the display region and the gate driving circuit region, there is formed a data pad **120d** comprising the same layer as in the data patterns. Preferably, the data patterns **120a**, **120b**, **120c**, **120d**, **120e**, **120f** and **120g** are comprised of chrome (Cr) film having a thickness of about 1500–4000 Å.

[0052] The gate electrode **112d** constituting the thin film transistor of the gate driving circuit region is formed to a box structure and the source/drain electrodes **120e** and **120f** are formed to an interdigital structure having multi-channels. Being spaced apart from each other, the odd-numbered source electrode **120e** and the even-numbered drain electrode **120f** are disposed by turns.

[0053] As shown in FIG. 6, driving transistors (T1 and T2 in FIG. 3) of the shift resistors are disposed on a portion of the gate driving circuit region adjacent to the display region. The driving transistors apply selectively signals of Von and Voff to the gate output terminal. On a part of the gate driving circuit region farthest away from the display region, there are disposed main wirings **150** (VSS, CK, CKB, VDD and VSS2) applying the signal to each of the shift resistors. Control transistors (T3, T4, T5, T6 and T7 in FIG. 3) are disposed between the driving transistor region and the wiring region.

[0054] Typically, in case that a gate output signal is formed using the shift resistors in the large-sized and fine-pitched TFT-LCD device in which a gate-on time is short and a RC delay of the gate line is very long, the resistance of the main wirings applying the signals to each of the shift resistors and the load capacitor should be minimized because the field effect mobility of the amorphous silicon TFT is very low. Accordingly, in the present invention, the first shift resistor to the last shift resistor, which correspond to the main wirings **150**, are formed of the same layer without an additional contact, thereby minimizing the resistance of the main wiring **150**. Particularly, in order to the wiring resistance, the main wirings **150** are formed of a metal film having a lower sheet resistance of the metal films constituting the gate patterns **112a**, **112b**, **112c**, **112d**, **112e**, **112f** and **112g** and the data patterns **120a**, **120b**, **120c**, **120d**, **120e**, **120f** and **120g**. In the present invention, the main wiring **150** is formed of the same layer as in the gate patterns because the gate patterns are comprised of aluminum (Al) and the data patterns are comprised of chrome (Cr).

[0055] Further, branch wirings **160** for connecting the main wiring **150** to the transistor terminals T1 to T7 of each of the shift resistors are formed of a different layer from the main wirings **150**. Accordingly, if the main wirings **150** are formed of the same layer as in the gate pattern, the branch wirings **160** are formed of the same layer as in the data pattern. Also, in

order to reduce the capacitance of the main wirings **150**, it is preferred that a portion of the branch wiring **160s** where the branch wiring **160** and the main wiring **150** cross each other is formed to have a narrow line width.

[0056] On the entire surface of the substrate **110** including the data patterns **120a**, **120b**, **120c**, **120e**, **120f**, **120h** and **120i**, there is formed a passivation layer **130** having a first contact hole H1 exposing the drain electrode **120b** of the display region, a second contact hole H2 exposing a contact gate pattern **112f** in the gate driving circuit region, a third contact hole H3 exposing a contact data pattern **120h** in the gate driving circuit, a fourth contact hole H4 exposing one of the main wirings **150** and a fifth contact hole H5 exposing one of the branch wirings **160**. Also, through the passivation layer **130** of the pad region, there are formed a sixth contact hole H6 exposing the gate pad **112c** and a seventh contact hole H7 exposing the data pad **112d**. The passivation layer **130** is comprised of silicon nitride or a photosensitive organic material. Especially, in a reflection-type LCD having a reflective electrode of uneven-shape for increasing the reflectivity, the passivation layer is formed of a photosensitive organic film having an uneven surface with prominences and recesses.

[0057] The electrode patterns **140**, **142** and **143** are formed on the passivation layer **130** including the first to fifth contact holes H1, H2, H3, H4 and H5. The electrode patterns includes a pixel electrode (or a first electrode) **140** electrically connected with the drain electrode **120b** of the display region, a second electrode **142** electrically connecting the gate pattern **112f** for contact and the data pattern **112h** for contact in the gate driving circuit region through the second and third contact holes H2 and H3, a third electrode **143** electrically connecting the main wiring **150** and the branch wiring **160** in the gate driving circuit region through the fourth and fifth contact holes H4 and H5, and a fourth electrode **144** electrically connecting the gate pad **112c** and the data pad **120d** through the sixth and seventh contact holes H6 and H7. Preferably, the second electrode **142** includes a first pattern connecting the gate electrode and the source/drain electrode of the first transistor constituting the shift resistor to each other, and a second pattern connecting the gate electrode of the second transistor constituting the shift resistor to the source/drain electrodes of the third transistor. In the present embodiment, the second electrode **142** in the contact region and the fourth electrode pattern **144** in the pad region electrically connect a portion of the gate pattern with a portion of the data pattern, so that the second and the fourth electrodes **142** and **144** are regarded as the same kind of contact terminal.

[0058] It is preferred that the fourth and fifth contact holes H4 and H5 are formed to have a line width wider than that of the branch wirings **160** in order to reduce the contact resistance between the third electrode and the main wirings **150** and the branch wirings **160**. Further, the fourth and fifth contact holes H4 and H5 are formed so as to be located in a liquid crystal layer region within a seal line used for attaching the TFT substrate to the color filter substrate or to be located under the seal line, thereby preventing metal corrosion from being caused when the seal line is exposed to an external atmosphere.

[0059] In a transmission type LCD device, the electrode patterns **140** and **142** are formed of a transparent conductive film, e.g., an indium-tin oxide (ITO) film or an indium-zinc oxide (IZO) film. In a reflection type LCD device, the electrode patterns are formed of an opaque conductive film having high reflectivity, e.g., aluminum alloy film or silver film.

[0060] Hereinafter, a method of manufacturing an amorphous silicon TFT-LCD device according to the present invention will be described in detail with reference to the accompanying drawings.

[0061] FIGS. 8A to 11B are plan views explaining a method of manufacturing an amorphous silicon TFT-LCD device according to the present invention. Here, each figure labeled "A" is a plan view illustrating an unit process in a gate driving circuit region, and each figure labeled "B" is a plan view illustrating an unit process in a display region.

[0062] Referring to FIGS. 8A and 8B, a metal film comprising a chrome (Cr) layer having a thickness of about 500 Å and an aluminum-neodymium (AlNd) layer having a thickness of about 2500 Å is deposited on a substrate consisting of an insulating material such as glass, quartz or ceramic. Then, the metal film is patterned through a photolithography process using a first mask, thereby forming gate patterns 112.

[0063] The gate patterns 112 in the display region include a gate line 112g disposed in a first direction (i.e., a horizontal direction), a capacitor lower wiring 112h disposed between the adjacent gate lines 112g to be arranged parallel with the gate line 112g, a capacitor lower electrode 112b overlapped with the capacitor lower wiring and formed in the unit pixel region, and a gate electrode 112a branched from the gate line 112g. When the capacitor lower wiring 112h is formed separately from the gate line 112g as in this embodiment, the load capacitor of the gate output terminal of the shift resistor can be reduced to about $\frac{1}{2} \sim \frac{1}{3}$ in comparison with the front gate structure.

[0064] Between the display region and the gate driving circuit region, there is formed a gate pad 112c comprised of the same layer as in the gate pattern. The gate pad 112c is connected to one end of the gate line 112g and applies a scanning signal received from an external source to the gate line 112g.

[0065] Gate electrodes 112d-1 and 112d-2 of a first driving transistor T1 and a second driving transistor T2 in each of the shift resistors disposed on the gate driving circuit region, have a wider line width than those of the gate electrodes 112d-3, 112d-4, 112d-5, 112d-6 and 112d-7 of a third to a seventh control transistor T3 to T7.

[0066] Also, in order to minimize the wiring resistance, main wirings 159 comprised of the same layer as in the gate pattern 112 are formed on the substrate of the gate driving circuit region. Preferably, the main wirings 150 are formed of the same layer from the corresponding first shift resistor to the corresponding last shift resistor without an additional contact.

[0067] Referring to FIGS. 9A and 9B, after forming the gate patterns 112 and the main wirings 150 as described above, silicon nitride is deposited to a thickness of about 4500 Å by a PECVD method to thereby form a gate insulating film (see reference numerals 114 in FIG. 5).

[0068] Then, the active layer patterns (see reference numerals 116 and 118 in FIG. 5) are formed on the gate insulating film 114 through a photolithography process using a second mask. Specifically, an amorphous silicon film is deposited on the gate insulating film 114 to a thickness of about 2000 Å by PECVD, and an n⁺ doped amorphous silicon film is deposited to a thickness of about 500 Å by PECVD on the amorphous silicon film. Then, through a photolithography process using the second mask, the films are patterned to form the active layer patterns including a channel region 116 comprising the amorphous silicon film and first and second impurity regions

(i.e., source/drain regions) 118 comprising the n⁺ doped amorphous silicon film. Here, the active layer pattern of the first and second driving transistors connected to the output terminal of the gate driving circuit region has a wider line width than those of the active layer pattern of the third to seventh control transistors.

[0069] Then, after depositing a chrome (Cr) film to a thickness of about 1500 Å on the entire surface of the substrate including the active patterns 116 and 118, the chrome film is patterned through a photolithography process using a third mask. As a result, there are formed data patterns 120 including a data line 120i disposed in a second direction perpendicular to the gate line 112g (i.e., a vertical direction), and source/drain electrodes 120a and 120b, which are overlapped with the first and second impurity regions 118a and 118b, respectively. Here, in order to secure sufficient capacity, the drain electrode 120b is formed to be overlapped with the capacitor lower electrode 112i as shown in FIG. 9.

[0070] As shown in FIG. 9A, a data pad 120d adjacent to the gate pad 112c is formed on the gate driving circuit region. The gate pad 112c and the data pad 120d are electrically connected to each other by a contact pattern that will be formed together with a pixel electrode of the display region. Further, on the substrate of the gate driving circuit region, the branch wirings 160 comprised of the same layer as in the data pattern 120 are formed to cross the main wirings 150. In order to reduce the capacitance of the main wirings 150, a portion of the branch wirings 160 where the branch wiring 160 and the main wiring 150 cross each other is formed to have a narrow line width.

[0071] Preferably, the source/drain electrodes 120e and 120f of the first driving transistor T1 and the second driving transistor T2 of each of the shift resistors disposed in the gate driving circuit region are formed to have an interdigital structure. In other words, the even-numbered electrodes 120e are commonly connected to the left-side source pad and the odd-numbered electrodes 120f are commonly connected to the right-side drain pad. The even-numbered electrodes 120e are disposed between the odd-numbered electrodes 120f. The interdigital structure of the source/drain electrodes of the first and second driving transistors T1 and T2 increases the channel width of the driving transistor within the limited area, so that a driving ability of the transistor comprising amorphous silicon can be sufficiently secured.

[0072] Referring to FIGS. 10A and 10B, after forming the data pattern 120 and the branch wirings 160 as described above, a passivation layer 130 is formed on the entire surface of the resultant structure. The passivation layer 130 is formed of an inorganic insulating material such as silicon oxide, silicon nitride or a combination thereof, or a photosensitive organic insulating material.

[0073] Then, the passivation layer 130 is partially etched away through a photolithography process using a fourth mask to thereby form contact holes H1 to H7. That is, there are formed a first contact hole H1 exposing the drain electrode 120b of the display region, a second contact hole H2 exposing the gate pattern 112f for contact in the gate driving circuit region, a third contact hole H3 exposing the data pattern 120h for contact in the gate driving circuit region, a fourth contact hole H4 exposing the main wiring 150 and a fifth contact hole exposing the branch wiring 160. In addition, there are formed sixth and seventh contact holes H6 and H7 exposing the gate pad 112c and the data pad 120d, respectively. The sixth and seventh contact holes H6 and H7 can be classified into the

contact holes exposing the contact gate pattern and the contact holes exposing the contact data pattern, just like the second and third contact holes H2 and H3. Accordingly, the contact holes exposing the gate pad 112c are regarded as one of the second contact holes H2, and the contact holes exposing the data pad 112d are regarded as one of the third contact holes H3.

[0074] A pair of contact holes H2 and H3 formed adjacent to each other is electrically connected to each other by the contact electrode that will be formed together with a pixel electrode formed in the display region.

[0075] In a reflection type LCD device having a reflective electrode of an uneven structure, numerous uneven structures are formed in the surface of the passivation layer 130 during the formation of the contact holes.

[0076] Referring to FIGS. 11A and 11B, after forming the contact holes as mentioned above, a metal film for pixel electrode, e.g., a transparent conductive film such as an ITO film or an IZO film, or an opaque reflective film such as an Al alloy film or a silver film, is deposited on the entire surface of the resultant structure. Then, the metal film is patterned through a photolithography process using a fifth mask, to thereby form the pixel electrode (or the first electrode) 140 electrically connected to the drain electrode 120b through the first contact hole H1 in the display region. In the gate driving circuit region, a second electrode 142 is formed so as to electrically connect the contact gate pattern 112f and the contact data pattern 112h through the second and third contact holes H2 and H3. Also, a third electrode 143 is formed so as to electrically connect one of the main wirings 150 and one of the branch wirings 160 through the fourth and fifth contact holes H4 and H5. In the pad region located between the display region and the gate driving circuit region, a fourth electrode 144 is formed so as to electrically connect the gate pad 112c and the data pad 112d through the sixth and seventh contact holes H6 and H7.

[0077] In the embodiment abovementioned, the amorphous silicon TFT-LCD is manufactured using masks of 5 sheets. However, according to another embodiment of the present invention, the number of the mask used for manufacturing an amorphous silicon TFT-LCD can be decreased down to 4 sheets by simultaneously forming active layer patterns and data patterns using one mask.

[0078] In detail, after forming the gate insulating film, an undoped intrinsic amorphous silicon film and an n-type doped extrinsic amorphous silicon film are successively deposited on the gate insulation film. After a metal film for data patterns is deposited on the entire surface of the extrinsic amorphous silicon film, a positive photosensitive film is coated to a predetermined thickness thereon and then, a mask is arranged above the photosensitive film.

[0079] In the mask, light-shielding regions correspond source, drain and channel regions and light-transmitting regions correspond the other regions. Particularly, the light-transmitting region between the channel region and the source region and the light-transmitting region between the channel region and the drain region have a slit structure. Since light passing through these slits is diffracted, the gap of the slits is controlled narrower than that of the channel region. The ultraviolet rays passing through the slit are diffracted to expose the photosensitive film located on the channel region. At the same time, the exposed photosensitive film of the other region is exposed to the UV rays.

[0080] The exposed photosensitive film is developed to form a photosensitive pattern where a portion corresponding to the channel region is removed to a predetermined depth. When the dry etching process is performed using the photosensitive pattern as an etching mask, the exposed metal film on which no photosensitive film is coated and the underlying extrinsic amorphous silicon film and intrinsic amorphous silicon film are removed away. At this time, the photosensitive film pattern on the channel region is also removed because it has a very thin thickness during the development process.

[0081] Next, the exposed metal film of the channel region and the underlying extrinsic amorphous silicon film are completely removed by selective etching method, while the underlying intrinsic amorphous silicon film is removed to a predetermined depth. Thereafter, the photosensitive film pattern on the source/drain regions is removed to simultaneously form the active patterns and the data patterns including the source/drain electrodes using one mask process.

[0082] According to the present invention as described above, without an additional process, the gate driving circuit including the shift resistors and the wirings is integrated on the insulating substrate on which a pixel array is formed. That is, several layers, which can be comprised of the same material, are formed of the same layer to thereby decrease the number of mask. Further, a conductive film for pixel electrode connects the gate electrode and source/drain electrodes of the first transistor constituting the shift resistors in the gate driving circuit with each other, thereby simplifying the manufacturing process.

[0083] Further, the main wirings for applying signals to the shift resistors are formed of the same layer from the first shift resistor to the last shift resistor, so that the resistance of the main wirings is minimized to increase a field effect of the amorphous silicon TFT-LCD.

[0084] Although the preferred embodiments of the present invention have been described, it is understood that the present invention should not be limited to those preferred embodiments, but various changes and modifications can be made by one skilled in the art within the spirit and scope of the invention as hereinafter claimed.

1-11. (canceled)

12. An amorphous silicon thin film transistor-liquid crystal display device comprising:

an insulating substrate including a display region on which a plurality of gate lines and a plurality of data lines are formed, and a gate driving circuit region;

a plurality of shift registers formed on the substrate of the gate driving circuit region, said shift registers including a number of thin film transistors having a gate electrode and source and drain electrodes, the shift registers for selecting a plurality of the gate lines successively;

main wirings disposed on the substrate of the gate driving circuit region for applying signals to each of the shift registers, the main wirings of the shift registers formed from a single layer;

a passivation layer formed on the substrate including the shift registers and the main wirings, the passivation layer having a first contact hole exposing a portion of the data line of the display region, a second contact hole exposing a gate electrode of a first transistor of each of the shift registers and a third contact hole exposing source and drain electrodes of the first transistor; and

electrode patterns formed on the passivation layer, the electrode patterns including a first electrode connected to the

data line of the display region through the first contact hole and a second electrode connecting the gate electrode and the source and drain electrodes of the first transistor through the second and third contact holes.

13. The device as claimed in claim **12**, further comprising branch wirings disposed on the substrate of the driving circuit region and crossing the main wirings to connect the main wirings to the transistors of each of the shift registers.

14. The device as claimed in claim **13**, wherein a portion of the branch wirings where the branch wirings and the main wirings cross each other have a line width narrower than that of the main wirings.

15. The device as claimed in claim **13**, wherein the main wirings are formed from a different layer from the branch layer.

16. The device as claimed in claim **15**, wherein the main wirings are formed from a same layer as in the gate line, while the branch wiring is formed from a same layer as in the data line.

17. The device as claimed in claim **15**, wherein the main wirings are formed from a same layer as the data line, while the branch wiring is formed from a same layer as in the gate line.

18. The device as claimed in claim **13**, wherein the electrode patterns further include a third electrode connecting one of the main wirings to one of the branch wirings through a fourth contact hole formed on one of the main wirings and a fifth contact hole formed on one of the branch wirings.

19. The device as claimed in claim **18**, wherein the fourth and fifth contact holes have a larger size than the line width of the branch wirings.

20. The device as claimed in claim **12**, wherein a gate electrode of a driving transistor in the driving circuit region has a box structure and source and drain electrodes thereof have an interdigital structure.

21-37. (canceled)

* * * * *

专利名称(译)	非晶硅薄膜晶体管 - 液晶显示器件及其制造方法		
公开(公告)号	US20080259237A1	公开(公告)日	2008-10-23
申请号	US12/108337	申请日	2008-04-23
[标]申请(专利权)人(译)	金东GYU		
申请(专利权)人(译)	金东GYU		
当前申请(专利权)人(译)	三星DISPLAY CO., LTD.		
[标]发明人	KIM DONG GYU		
发明人	KIM, DONG-GYU		
IPC分类号	G02F1/136 G02F1/1368 G02F1/1362 G09F9/00 G09F9/30 G09F9/35 G09G3/36 H01L29/786		
CPC分类号	G02F1/13454 G02F1/13458 G02F1/136227 G02F2001/136295 H01L29/66765 G09G2300/0408 G11C19/28 G02F1/13439 G09G3/3677 G02F1/1368 G02F2201/123 G02F2201/50 G02F2202/103 H01L27/1222 H01L27/124 H01L27/1248 H01L29/78669		
优先权	1020020029664 2002-05-28 KR		
其他公开文献	US8619207		
外部链接	Espacenet USPTO		

摘要(译)

在非晶硅薄膜晶体管 - 液晶显示装置及其制造方法中，包括栅极线和栅电极的栅极图案形成在具有显示区域和驱动电路区域的绝缘基板上，在该绝缘基板上具有多个形成移位电阻器。在基板上依次形成栅极绝缘膜，有源层图案和包括源/漏电极的数据图案。基板上的钝化层具有暴露显示区域的漏电极的第一接触孔以及分别暴露每个移位电阻器的第一晶体管的栅电极和源/漏电极的第二和第三接触孔。钝化层上的电极图案包括通过第一接触孔连接到显示区域的漏电极的第一电极和通过第二和第三接触孔将栅电极连接到第一晶体管的源/漏电极的第二电极。包括移位电阻器和布线的栅极驱动电路集成在绝缘基板上而无需额外的工艺，从而简化了制造工艺。

