

(19)



(11)

EP 1 284 781 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
11.10.2017 Bulletin 2017/41

(51) Int Cl.:
A61N 1/05 (2006.01)

(21) Application number: **01928181.5**

(86) International application number:
PCT/IL2001/000396

(22) Date of filing: **03.05.2001**

(87) International publication number:
WO 2001/082771 (08.11.2001 Gazette 2001/45)

(54) SIGNAL DELIVERY THROUGH THE RIGHT VENTRICULAR SEPTUM

SIGNALÜBERTRAGUNG DURCH DAS RECHTSVENTRIKULARE SEPTUM

ACHEMINEMENT DE SIGNAUX A TRAVERS LA CLOISON INTERVENTRICULAIRE DROITE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

• **MIKA, Yuval**
Closter, NJ 07624 (US)

(30) Priority: **04.05.2000 US 202382 P**

(74) Representative: **Potter Clarkson LLP**
The Belgrave Centre
Talbot Street
Nottingham NG1 5GG (GB)

(43) Date of publication of application:
26.02.2003 Bulletin 2003/09

(73) Proprietor: **IMPULSE DYNAMICS N.V.**
Willemstad, Curaçao (AN)

(56) References cited:
EP-A- 0 503 839 WO-A-00/01443
WO-A-99/06105 WO-A1-98/10832
US-A- 6 006 134 US-B1- 6 292 693

(72) Inventors:
• **SHEMER, Itsik**
34465 Haifa (IL)

EP 1 284 781 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

[0001] The present invention relates generally to invasive devices for treatment of the heart, and specifically to devices for improving cardiac performance.

BACKGROUND OF THE INVENTION

[0002] The heart requires precise coordination of its mechanical and electrical behavior to function optimally. The human body normally regulates cardiac output in response to body needs by changing the heart rate, as during physical exercise, and/or by adapting the stroke volume. Under pathological conditions, however, some of the normal regulatory mechanisms may be damaged. For example, heart tissue damaged due to myocardial infarct typically cannot sustain normal pumping function. Alternatively or additionally, normal electrical signals are not generated, or are impaired in their propagation, such that cardiac output and cardiac efficiency (stroke work divided by oxygen consumption) are correspondingly compromised. Standard pacemakers known in the art are able to control the rate of the heart, e.g., to accelerate the heart rate after detecting bradycardia, but are not able to increase contraction strength over the long-term without producing adverse side-effects.

[0003] PCT Patent Publication WO 97/25098, to Ben-Haim et al., entitled "Electrical muscle controller," and the corresponding US Patent Application 09/101,723, published as US patent 6,317,631, which are assigned to the assignee of the present patent describe methods for modifying the force of contraction of at least a portion of a heart chamber by applying a non-excitatory electric signal to the heart at a delay after electrical activation of the portion. The non-excitatory signal is such as does not induce action potentials in cardiac muscle cells, but rather modifies the cells' response to the activation. In the context of the present patent application, the use of such a non-excitatory signal is referred to as Excitable-Tissue Control (ETC). The non-excitatory signal may be applied in combination with a pacemaker or defibrillator, which applies an excitatory signal (i.e., pacing or defibrillation pulses) to the heart muscle.

[0004] PCT Patent Publication WO 98/10832, to Ben-Haim et al., entitled "Cardiac output enhanced pacemaker," and the corresponding US Patent Application 09/254,900, published as US patent 6,463,324, which are assigned to the assignee of the present patent application, describe a pacemaker that gives cardiac output enhancement. This pacemaker applies both excitatory (pacing) and non-excitatory (ETC) electrical stimulation pulses to the heart. By applying non-excitatory pulses of suitable strength, appropriately timed with respect to the heart's electrical activation, the contraction of selected segments of the heart muscle can be increased or decreased, thus increasing or decreasing the stroke volume

of the heart.

SUMMARY OF THE INVENTION

[0005] It is an object of some aspects of the present invention to provide improved exemplary methods and apparatus for stimulating cardiac tissue. It is a further object of some aspects of the present invention to provide improved exemplary methods and apparatus for enhancing cardiac performance.

[0006] It is still a further object of some aspects of the present invention to provide improved exemplary methods and apparatus for increasing cardiac output.

[0007] As described herein, an electrical cardiac stimulator for improving the performance of the heart of a human subject applies an Excitable-Tissue Control (ETC) signal to the interventricular septum via one or more electrodes passed by catheter into the right ventricle. Preferably, but not necessarily, at least one electrode is screwed or otherwise fixed to the septum, and delivers the ETC signal during a refractory period of excitable tissue of the septum, so as to modify a characteristic of the mechanical behavior thereof.

[0008] Embodiments of the present invention simplify the procedure of applying electrical signals to modulate cardiac contraction. It is known in the art to apply pacing signals to the left ventricle by the difficult procedure of passing a catheter through the coronary veins. It is also known in the art to make an incision in a patient's chest so as to implant pacing electrodes on the heart. It is further known in the art to pace both ventricles via an electrode placed on the interventricular septum, whereby pacing pulses generated by the electrode cause an activation wave to propagate through the septum, through normal conduction pathways of the heart. These prior art techniques differ from preferred embodiments of the present invention in that the prior art is directed towards stimulating one or both ventricles to contract, while these embodiments of the present invention provide means for modulating the mechanical behavior of the septum itself, substantially without inducing new action potentials.

[0009] Typically, each electrode conveys a particular waveform to the septum, which may differ in certain aspects from the waveforms applied to other electrodes. The particular waveform to be applied to each electrode is preferably determined by a control unit, initially under the control of a physician during a calibration period of the unit. Further preferably, the cardiac stimulator (or elements thereof) is implanted in the patient in a manner similar to that used to implant pacemakers or defibrillators known in the art. After the initial calibration period, the unit is generally able to automatically modify the waveforms as needed to maintain a desired level of performance of the stimulator. In many applications, standard pacing, cardioversion, and/or defibrillation capabilities are additionally incorporated into the stimulator.

[0010] In a preferred embodiment, one or more mechanical sensors, e.g., force transducers, strain gauges,

pressure gauges, and/or motion sensors, are positioned in a vicinity of the heart, and are coupled to send mechanical-sensor signals to the control unit indicative of aspects of the heart's functioning. Alternatively or additionally, one or more physiological sensors, e. g., for measuring mixed venous oxygen saturation (SvO₂) or thoracic electrical impedance, send physiological-sensor signals to the control unit. The various sensor signals serve as feedback to enable the control unit to iteratively adjust the ETC signal applied to the septum, so as to cause the sensor signals to converge to desired values. Alternatively or additionally, other sensors, such as sensing electrodes, blood pressure sensors, or flow transducers, are coupled to the heart or elsewhere on the patient's body, and send signals to the control unit which are used in determining modifications to parameters of the energy applied to the heart.

[0011] Further alternatively or additionally, the control unit analyzes the sensor signals to detect an onset of arrhythmia, for example, an ectopic heartbeat. In this case, the control unit preferably modifies or terminates application of the ETC signal responsive to the detection.

[0012] Also disclosed herein is an exemplary method, not part of the invention, for applying a signal to a heart of a human subject, including applying an Excitable-Tissue Control (ETC) signal to a site on the right ventricular septum of the heart.

[0013] Typically, applying the ETC signal includes configuring the signal to be capable of modifying contractility of a portion of the heart. For example, configuring the ETC signal may include configuring the signal to be capable of modifying contractility of the left ventricle of the heart, the septum, or the right ventricle of the heart.

[0014] Preferably, configuring the ETC signal includes configuring the signal to be capable of increasing contractility of the portion of the heart. Alternatively, configuring the ETC signal includes configuring the signal to be capable of decreasing contractility of the portion of the heart. In a preferred embodiment, configuring the ETC signal to be capable of decreasing the contractility includes configuring the signal to be capable of decreasing contractility of the septum.

[0015] For some applications, applying the ETC signal includes applying a series of biphasic pulses. Alternatively or additionally, applying the ETC signal includes applying a series of generally square pulses. Further alternatively or additionally, applying the ETC signal includes applying a series of pulses at a rate greater than about 50 Hz. Still further alternatively or additionally, applying the ETC signal includes applying a series of pulses at a rate less than about 100 Hz.

[0016] Preferably, applying the ETC signal includes applying a series of pulses which are greater than about 8 mA. For some applications, applying the ETC signal includes applying a series of pulses which are greater than about 10 mA.

[0017] Applying the ETC signal may include applying the ETC signal to a site at or adjacent to an intersection

of the septum and the right ventricular free wall.

[0018] In accordance with the invention there is provided an apparatus for applying a signal to a heart of a human subject, as defined by the appended claims.

[0019] The present invention will be more fully understood from the following detailed description of the preferred embodiments thereof, taken together with the drawings, in which :

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Figs. 1A, 1B, and 1C are schematic, sectional illustrations of a heart, showing the placement of electrodes therein, in accordance with preferred embodiments of the present invention; Fig. 2 is a schematic block diagram of a control unit, which generates signals to be applied to the electrodes shown in Figs. 1A, 1B, and/or 1C, in accordance with a preferred embodiment of the present invention; and Figs. 3,4, and 5 are graphs showing experimental results from the application of an ETC signal to an animal heart, in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0021] Fig. 1A is a schematic illustration of cardiac control apparatus 18, which applies electrical energy to improve the performance of the heart 20 of a patient, in accordance with a preferred embodiment of the present invention. Apparatus 18 preferably comprises an implantable or external control unit 90, which applies an ETC signal through a set of one or more electrodes 98 to the heart. (For clarity, connections between control unit 90 and the various electrodes are not shown.)

[0022] Preferably, a catheter 68 is used to convey a screw electrode 65, or other type of electrode, through the right ventricle 30 to a site on the interventricular septum 22 to which the electrode is attached. Alternatively or additionally, a catheter 66 conveys an electrode 69 through the right ventricle to be fixed to the septum, and/or conveys an electrode 67 into the right ventricle, where it is in electrical contact with electrodes 65 and 69 through the blood in the right ventricle. In a preferred embodiment, one or more electrodes are placed at or adjacent to the intersection of the septum and the right ventricular free wall.

[0023] Preferably, at least some of the electrodes have a coating applied thereto which increases the electrodes' capacitance. A preferred coating comprises iridium oxide (IROX). Alternatively or additionally, at least some of the electrodes comprise coils, a mesh, or other means for increasing the effective application area of the ETC signal.

[0024] As described hereinbelow, control unit 90 drives one or more of the electrodes to apply an ETC signal to the septum, so as to modify an aspect of the heart's contractility. For example, the signal may be applied so as

to increase or decrease contractility of the right ventricle, the left ventricle, or the septum. Optionally, the control unit is implanted in the patient's body, and a metal case of the control unit serves as a return electrode for current driven through the electrodes in right ventricle 30.

[0025] Preferably, aspects of ETC signal application are performed in accordance with techniques described in the above-referenced US Patent Applications 09/101,723 and 09/254,900, published as US patent 6,317,631 and US patent 6,463,324. Typically, the ETC signal is applied subsequent to an artificial pacing pulse, as described hereinbelow. Alternatively, the ETC signal is applied responsive to natural electrical activity of the heart, for example, after a designated delay following a detected activation of the atrium. For these applications, it is preferable to use apparatus and methods described in Israel Patent Application 129,257, entitled "Trigger-based regulation of excitable tissue control in the heart," which is assigned to the assignee of the present invention. Control unit 90 is optionally coupled to one or more local sense electrodes 74, which are placed in the right ventricle or elsewhere on or in the heart. Local sense electrodes 74 preferably convey electrical signals to the control unit responsive to cardiac electric activity. Alternatively or additionally, one or more of electrodes 98 and any other electrodes coupled to control unit 90 may also serve as sense electrodes. Optionally, one or more mechanical sensors 70 (e.g., accelerometers, force transducers, strain gauges, or pressure gauges), coupled to the control unit, are placed on the right ventricle or elsewhere on the heart. Alternatively or additionally, one or more supplemental sensors 72 (e.g., blood pressure, thoracic electrical impedance, pH, SvO₂, pCO₂ or pO₂ sensors) are coupled to the control unit and are placed on or in the heart or elsewhere on or in the patient's body. The control unit modifies the energy applied through electrodes 98 responsive to signals from sensors 70 and 72 and local sense electrodes 74, as described hereinbelow.

[0026] The number of electrodes and sensors, as well as the positions thereof, are shown in Fig. 1A by way of example, and other sites on heart 20 or in a vicinity thereof are appropriate for placement of some of the electrodes and sensors in other applications of the present invention.

[0027] Preferably, control unit 90 is implanted in the patient in a manner similar to that used to implant pacemakers or defibrillators known in the art, such that after an initial calibration period, described hereinbelow, the unit is generally able to automatically modify the ETC signal it applies to the heart as needed, so as to maintain a desired level of performance. In many applications, standard pacing, cardioversion, and defibrillation capabilities are additionally incorporated into apparatus 18.

[0028] Figs. 1B and 1C are schematic illustrations of other preferred configurations of cardiac control apparatus 18, in accordance with respective preferred embodiments of the present invention. Fig. 1B shows a catheter 166, which conveys a plurality of electrodes 165, 167,

and 169 to respective sites on the right ventricular septum, while Fig. 1C shows a catheter 266, which conveys a different arrangement of electrodes 265, 267, 269, and 271 to the septum. In another preferred embodiment (not shown), a catheter passes a basket electrode into the right ventricle, so as to apply the ETC signal to the septum as well as to other right ventricular sites. Preferably, but not necessarily, all of the electrodes shown in Figs. 1A, 1B, and 1C are independently controlled by control unit 90.

[0029] Fig. 2 is a schematic block diagram of control unit 90, in accordance with a preferred embodiment of the present invention. Mechanical sensors 70, supplemental sensors 72, local sense electrodes 74, and electrodes 98 are preferably coupled to provide feedback signals to a cardiac function analysis block 80 of control unit 90. The feedback signals generally provide information about various aspects of the heart's performance to block 80, which analyzes the signals and actuates control unit 90 to modify the electrical energy applied to the heart responsive to the analysis. Preferably, the ETC signal is adjusted by the control unit responsive to the feedback signals in order to yield a desired response, e.g., a predetermined blood pressure, blood oxygen level, cardiac output and/or cardiac electrical or motion profile.

[0030] Preferably, block 80 conveys results of its analysis to a "parameter search and tuning" block 84 of control unit 90, which iteratively modifies characteristics of the electrical energy applied to the heart in order to attain a desired response. Preferably, operating parameters of block 84 are entered by a human operator of the control unit using operator controls 71, which typically comprise a keyboard or mouse (not shown) coupled to the control unit. Block 84 typically utilizes multivariate optimization and control methods known in the art in order to cause one or more of the aforementioned mechanical, electrical, chemical and/or other measured parameters to converge to desired values.

[0031] In general, each one of electrodes 98 may convey a particular waveform to heart 20, differing in certain aspects from the waveforms applied by the other electrodes. The particular waveform to be applied by each electrode is determined by control unit 90, preferably under the control of the operator. Aspects of the waveforms which are set by the control unit, and may differ from electrode to electrode, typically include parameters such as time shifts between application of waveforms at different electrodes, waveform shapes, amplitudes, DC offsets, durations, and duty cycles. For example, although the waveforms applied to some or all of electrodes 98 usually comprise a biphasic square wave signal following a natural or applied pacing pulse, other waveforms, such as a sinusoid, a series of monophasic square waves, or a waveform including an exponentially-varying characteristic, could be applied to other electrodes. Generally, the shape, magnitude, and timing of the waveforms are optimized for each patient, using suitable optimization algorithms as are known in the art.

[0032] For the purposes of this embodiment of the present invention, block 84 typically modifies a set of controllable parameters of the ETC signal, responsive to the measured parameters, in accordance with values in a look-up table and/or pre-programmed formulae stored in an electronic memory of control unit 90. The controllable parameters may comprise, for example, ETC signal timing, magnitude and offset. Preferably, the controllable parameters are conveyed by block 84 to a signal generation block 86 of control unit 90, which generates, responsive to the parameters, electrical signals that are applied by electrodes 98 to the heart. Block 86 preferably comprises amplifiers, isolation units, and other standard circuitry known in the art of electrical signal generation.

[0033] In the initial calibration procedure, parameter search and tuning block 84 preferably modifies a characteristic (e.g., timing, magnitude, or shape) of the ETC signal applied through one of electrodes 98, and then determines whether a predetermined cardiac functional response generally improves following the modification. For example, the electrode may be used to sense the duration of the refractory period of heart tissue to which the electrode is coupled, and block 84 may subsequently determine time points during the refractory period which are optimal for application of the ETC signal by that electrode to the tissue. In a series of similar calibration steps, block 84 repeatedly modifies characteristics of the energy applied through each of the electrodes, such that those modifications that improve the response are generally maintained, and modifications that cause it to worsen are typically eliminated or avoided.

[0034] When apparatus 18 is calibrated in the presence of a physician, it is often desirable to have the patient perform increasing levels of exercise (e.g., walk on a treadmill), in order to derive a broader range of operating parameters, which are stored in control unit 90 and can be accessed responsive to signals from the sensors and electrodes coupled to the control unit. Preferably, the calibration procedure is subsequently performed by the physician at intermittent follow-up visits, and/or by unit 90 automatically during regular use of the apparatus (e.g., daily).

[0035] Preferably, during the initial calibration procedure, the locations of one or more of electrodes 98 are varied while the ETC signal is applied therethrough, so as to determine optimum placement of the electrodes. Preferably, methods for measuring the heart's response to the applied signal include electrocardiography, echocardiography, and/or methods having as inputs the outputs of mechanical and supplemental sensors 70 and 72. In subsequent steps, the electrode is moved over an area of the interventricular septum, and the response of the heart is measured. After the physician considers that a sufficient number of sites have been investigated, the electrode is returned to the site yielding the best response. Subsequently, other electrodes are moved according to the same protocol, so as to achieve substantially optimum placement of some or all of the electrodes.

[0036] In a preferred embodiment, the ETC signal is applied in a vicinity of a site where standard pacing pulses are applied. Preferably, the ETC signal is applied through the same electrode as that through which the standard pacing pulse is applied, approximately 1 - 250 ms thereafter. Further preferably, the ETC signal is applied approximately 20 - 250 ms after the pacing pulse.

[0037] Alternatively, the sinoatrial node generates the cardiac rhythm, substantially without artificial pacing. In such modes, local sense electrodes 74 and, optionally, some or all of electrodes 98, convey electrical signals to control unit 90, so as to enable parameter search and tuning block 84 to synchronize the electrical signals applied by electrodes 98 with the natural electrical activity of the heart. It will be understood that although electrodes 74 and 98 are shown for clarity of explanation as separate entities, a single set of electrodes may be used to perform both functions.

[0038] In a preferred embodiment, the ETC signal is applied at one or more sites as a series of pulses, e.g., biphasic square pulses, typically having a frequency between about 50 and 100 Hz. The current applied during each pulse is preferably greater than 8 mA, and, further preferably, greater than 10 mA.

[0039] Most preferably, during calibration and during regular operation of control unit 90, an arrhythmia detection block 82 of control unit 90 receives inputs from sensors 70 and 72 and electrodes 74 and 98, and/or other electrodes and sensors (not shown), and evaluates these inputs to detect imminent or actual cardiac arrhythmia, e.g., an ectopic heartbeat, fibrillation, bradycardia or heart block. Preferably, block 82 employs techniques known in the art for detecting arrhythmias, so that parameter search and tuning block 84 can treat or terminate the arrhythmia by applying, for example, regular pacing pulses or defibrillation pulses.

[0040] Figs. 3, 4, and 5 are graphs showing experimental results obtained during application of an ETC signal to a 30 kg anesthetized pig, in accordance with a preferred embodiment of the present invention. In this experiment, local sense electrodes comprised two stitch electrodes, which were placed at the mid-anterior wall of the left ventricle. The animal was paced in DDD mode at 120 beats per minute through an active fixation screw electrode, placed in the apical third of the right ventricular septum. At 20 ms following the onset of electrical activity as measured by the local sense electrodes, a biphasic electrical signal, composed of a 15 ms, +14 mA pulse immediately followed by a 15 ms, -14 mA pulse, was applied to the septum through the screw electrode implanted therein. In Fig. 3, results are shown following application of the ETC signal between the screw electrode implanted in the septum and a ring electrode in a vicinity thereof. Figs. 4 and 5 show results following application of the ETC signal between the screw electrode and a stitch electrode at the mid-anterior left ventricular free wall.

[0041] In Fig. 3, an increase of approximately 5% in

the measured $d(LVP)/dt$ is seen to begin upon initiation of a 2 minute ETC signal application period. The dP/dt levels gradually return to baseline upon termination of the ETC signal. Figs. 4 and 5 show bipolar ETC application periods lasting over 3 and over 4 minutes, respectively, in which the measured dP/dt increased to approximately 20% above baseline, and remained at this level for the duration of signal application.

[0042] It is believed that at least some of the results displayed in Figs. 3, 4, and 5 derive from a change in contractility of the left ventricle induced by the application of the ETC signal to the interventricular septum.

[0043] It is also believed that similar results can be obtained in humans, *mutatis mutandis*. It is further believed that these embodiments of the present invention can produce, at least to some extent, long-term effects which are likely to alleviate or cure aspects of some common cardiac pathologies, such as congestive heart failure (CHF). These effects are expected to derive from more effective use of the heart muscle, whereby systemic demands on the heart are reduced. Moreover, damage to other organs of the body is reduced, because of the increase in blood perfusion.

[0044] It is believed that other signal application protocols would also be successful in enhancing cardiac performance, in combination with or in the absence of some of the stimulation and sensing protocols described hereinabove. In a preferred embodiment, the ETC signal is applied at a plurality of sites on the interventricular septum, for example, on an anterior and a posterior aspect thereof. Alternatively or additionally, the ETC signal is applied generally simultaneously, or in alternation, at one or more of the following sites: the posterior septum, the anterior septum, the anterior wall of the right ventricle, the free wall of the right ventricle, and the posterior-inferior left ventricular free wall.

[0045] Alternatively or additionally, the ETC signal is applied through the right ventricular septum so as to decrease regional contractility of the heart, preferably using techniques described in one or both of the above-referenced US patent applications. In particular, the ETC signal may be used to decrease septal contractility, which may be appropriate in treating conditions such as idiopathic hypertrophic subaortic stenosis (IHSS). It is believed that reduced septal contractility reduces functional subaortic stenosis, thereby improving left ventricular performance. The scope of the invention is limited by the subject-matter of the appended claims. Preferred embodiments are disclosed in the dependent claims.

Claims

1. Apparatus (18) for applying a signal to a heart (20) of a human subject, comprising:

a set of one or more electrodes (98) coupled to the right ventricular septum (22) of the heart

(20); and
a control unit (90), wherein the control unit (90) is adapted to drive the electrode set with a non-excitatory signal timed for delivery to the septum (22) during a refractory period of excitable tissue of the septum (22) and timed for increasing a contractility of a left ventricle of said heart,

characterized in that the timing being after a delay of 20-250 ms following application of a pacing pulse.

2. Apparatus according to claim 1, wherein the control unit (90) is adapted to generate the non-excitatory signal configured modify contractility of the septum (22).
3. Apparatus according to claim 1, wherein the control unit (90) is adapted to generate the non-excitatory signal configured to modify contractility of the right ventricle (30) of the heart (20).
4. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of biphasic pulses.
5. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of generally square pulses.
6. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of pulses at a rate greater than about 50 Hz.
7. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of pulses at a rate less than about 100 Hz.
8. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of pulses at a rate between about 50 Hz and 100 Hz.
9. Apparatus according to any one of claims 1-3, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of pulses which are greater than about 8 mA.
10. Apparatus according to claim 9, wherein the control unit (90) is adapted to generate the non-excitatory signal in the form of a series of pulses which are greater than about 10 mA.
11. Apparatus according to any one of claims 1-3, wherein the control unit is adapted to generate the

non-excitatory signal suitable for delivery to a site at or adjacent to an intersection of the septum and the right ventricular free wall.

12. Apparatus according to claim 1, wherein the control unit (90) is configured to generate an excitatory pacing signal suitable for delivery to the septum (22), and thereafter to generate the non-excitatory signal during the refractory period of the septum (22).
13. Apparatus according to claim 1, wherein the control unit (90) is configured to drive the electrode set to generate the non-excitatory signal to the septum (22) during the refractory period of the septum following application of an excitatory pacing signal to the heart (20).
14. Apparatus according to claim 1, further comprising one or more local sense electrodes (74), which are configured to be placed in the heart (20), and to convey electrical signals to the control unit (90) responsive to cardiac electrical activity, and wherein the control unit (90) is configured to synchronize the non-excitatory signal with sensed cardiac electrical activity.
15. Apparatus according to claim 14, wherein the control unit (90) is configured to drive the electrode set to provide the non-excitatory signal following the onset of the sensed cardiac electrical activity.
16. Apparatus according to claim 14, wherein the control unit (90) is configured to provide an excitatory pacing signal to the septum (22), and, following the onset of the sensed cardiac electrical activity, to provide the non-excitatory signal to the septum (22).
17. Apparatus according to claim 14, wherein the control unit (90) does not provide a pacing signal to the heart (20).
18. Apparatus according to claim 14, wherein the set of one or more electrodes (98) includes at least one of the one or more local sense electrodes (74).
19. Apparatus according to claim 1, wherein the control unit (90) is further adapted to provide signals comprising at least one of the capabilities selected from the group consisting of: cardioversion capabilities and defibrillation capabilities.
20. Apparatus according to claim 1, wherein the control unit (90) is configured to provide a signal suitable for delivery to a left ventricular free wall.
21. Apparatus according to any preceding claim, wherein the set of electrodes (98) comprises a screw electrode implanted in the septum and a ring electrode

in the vicinity thereof.

Patentansprüche

1. Vorrichtung (18) zum Anlegen eines Signals an ein Herz (20) eines menschlichen Subjekts, Folgendes umfassend:
 - einen Satz aus einer oder mehreren Elektroden (98), gekoppelt mit dem rechten Ventrikelseptum (22) des Herzes (20); und
 - ein Steuergerät (90), wobei das Steuergerät (90) angepasst ist, den Elektrodensatz mit einem nicht exzitatorischen Signal anzutreiben, das zeitlich zum Bereitstellen an das Septum (22) während einer Refraktärzeit von anregbarem Gewebe des Septums (22) angepasst ist und zeitlich angepasst ist, eine Kontraktilität eines linken Ventrikels des Herzes zu erhöhen, **dadurch gekennzeichnet, dass** der Zeitpunkt nach einer Verzögerung von 20-250 ms nach dem Anlegen eines Schrittimulses liegt.
2. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal zu erzeugen, das konfiguriert ist, die Kontraktilität des Septums (22) zu modifizieren.
3. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal zu erzeugen, das konfiguriert ist, die Kontraktilität des rechten Ventrikels (30) des Herzes (20) zu modifizieren.
4. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von biphasischen Impulsen zu erzeugen.
5. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von im Allgemeinen rechteckigen Impulsen zu erzeugen.
6. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von Impulsen mit einer Rate von über etwa 50 Hz zu erzeugen.
7. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von Impulsen mit einer Rate von unter etwa 100 Hz zu erzeugen.
8. Vorrichtung nach einem der Ansprüche 1-3, wobei

- das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von Impulsen mit einer Rate von zwischen etwa 50 Hz und 100 Hz zu erzeugen.
9. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von Impulsen zu erzeugen, die größer sind als etwa 8 mA.
10. Vorrichtung nach Anspruch 9, wobei das Steuergerät (90) angepasst ist, das nicht exzitatorische Signal in der Form einer Reihe von Impulsen zu erzeugen, die größer sind als etwa 10 mA.
11. Vorrichtung nach einem der Ansprüche 1-3, wobei das Steuergerät angepasst ist, das nicht exzitatorische Signal zu erzeugen, das geeignet ist, an eine Stelle an oder nahe einem Schnittpunkt zwischen dem Septum und der freien rechten Ventrikelwand bereitgestellt zu werden.
12. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) konfiguriert ist, ein exzitatorisches Schrittsignal zu erzeugen, das geeignet ist, an das Septum (22) bereitgestellt zu werden, und danach das nicht exzitatorische Signal während der Refraktärzeit des Septums (22) zu erzeugen.
13. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) konfiguriert ist, den Elektrodensatz anzutreiben, um während der Refraktärzeit des Septums nach einem Anlegen eines exzitatorischen Schrittsignals an das Herz (20) das nicht exzitatorische Signal an das Septum (22) zu erzeugen.
14. Vorrichtung nach Anspruch 1, ferner umfassend eine oder mehrere lokale Sensorelektroden (74), die konfiguriert sind, in dem Herz (20) platziert zu werden und als Reaktion auf elektrische Herzaktivität elektrische Signale an das Steuergerät (90) zu übermitteln, und wobei das Steuergerät (90) konfiguriert ist, das nicht exzitatorische Signal mit der erfassten elektrischen Herzaktivität zu synchronisieren.
15. Vorrichtung nach Anspruch 14, wobei das Steuergerät (90) konfiguriert ist, den Elektrodensatz anzutreiben, um das nicht exzitatorische Signal nach dem Beginn der erfassten elektrischen Herzaktivität bereitzustellen.
16. Vorrichtung nach Anspruch 14, wobei das Steuergerät (90) konfiguriert ist, ein exzitatorisches Schrittsignal an das Septum (22) bereitzustellen und nach dem Beginn der erfassten elektrischen Herzaktivität das nicht exzitatorische Signal an das Septum (22) bereitzustellen.
17. Vorrichtung nach Anspruch 14, wobei das Steuergerät (90) kein Schrittsignal an das Herz (20) bereitstellt.
18. Vorrichtung nach Anspruch 14, wobei der Satz aus einer oder mehreren Elektroden (98) wenigstens eine der einen oder der mehreren lokalen Sensorelektroden (74) enthält.
19. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) ferner angepasst ist, Signale bereitzustellen, die wenigstens eine der Fähigkeiten umfassen, ausgewählt aus der Gruppe bestehend aus Kardioversionsfähigkeiten und Defibrillationsfähigkeiten.
20. Vorrichtung nach Anspruch 1, wobei das Steuergerät (90) konfiguriert ist, ein Signal bereitzustellen, das geeignet ist, an eine freie linke Ventrikelwand bereitgestellt zu werden.
21. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei der Satz aus Elektroden (98) eine in das Septum implantierte Schraubenelektrode und eine Ringelektrode in dessen Nähe umfasst.

Revendications

1. Appareil (18) pour appliquer un signal à un coeur (20) d'un sujet humain, comprenant:
- un ensemble d'une ou de plusieurs électrodes (98) couplé au septum ventriculaire droit (22) du coeur (20) ; et
- une unité de commande (90), dans lequel l'unité de commande (90) est adaptée pour piloter l'ensemble d'électrodes avec un signal non excitateur synchronisé pour être délivré au septum (22) pendant une période réfractaire d'un tissu excitable du septum (22) et synchronisé pour augmenter une contractilité d'un ventricule gauche dudit coeur,
- caractérisé en ce que**
- la synchronisation se faisant après un délai de 20 à 250 ms suite à une application d'une impulsion de stimulation.
2. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur configuré pour modifier une contractilité du septum (22).
3. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur configuré pour modifier une contractilité du ventricule droit (30) du coeur (20).
4. Appareil selon l'une quelconque des revendications

- 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions biphasiques.
5. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions généralement carrées. 5
6. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions à une fréquence supérieure à environ 50 Hz. 10
7. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions à une fréquence inférieure à environ 100 Hz. 20
8. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions à une fréquence entre environ 50 Hz et 100 Hz. 25
9. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions qui sont supérieures à environ 8 mA. 30
10. Appareil selon la revendication 9, dans lequel l'unité de commande (90) est adaptée pour générer le signal non excitateur sous forme d'une série d'impulsions qui sont supérieures à environ 10 mA. 35
11. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel l'unité de commande est adaptée pour générer le signal non excitateur approprié pour être délivré à un site au niveau ou adjacent à une intersection du septum et de la paroi libre ventriculaire droite. 40
12. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est configurée pour générer un signal de stimulation excitateur approprié pour être délivré au septum (22), puis pour générer le signal non excitateur pendant la période réfractaire du septum (22). 45
13. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est configurée pour piloter l'ensemble d'électrodes afin de générer le signal non excitateur au septum (22) pendant la période réfractaire du septum suite à une application d'un signal de stimulation excitateur au coeur (20). 50
14. Appareil selon la revendication 1, comprenant en outre une ou plusieurs électrodes de détection locale (74), qui sont configurées pour être placées dans le coeur (20), et pour acheminer des signaux électriques à l'unité de commande (90) en réponse à une activité électrique cardiaque, et dans lequel l'unité de commande (90) est configurée pour synchroniser le signal non excitateur à une activité électrique cardiaque détectée. 55
15. Appareil selon la revendication 14, dans lequel l'unité de commande (90) est configurée pour piloter l'ensemble d'électrodes afin de fournir le signal non excitateur suite au début de l'activité électrique cardiaque détectée. 15
16. Appareil selon la revendication 14, dans lequel l'unité de commande (90) est configurée pour fournir un signal de stimulation excitateur au septum (22), et, suite à l'activité électrique cardiaque détectée, pour fournir le signal non excitateur au septum (22). 20
17. Appareil selon la revendication 14, dans lequel l'unité de commande (90) ne fournit pas de signal de stimulation au coeur (20). 25
18. Appareil selon la revendication 14, dans lequel l'ensemble d'une ou de plusieurs électrodes (98) comporte au moins l'une des une ou plusieurs électrodes de détection locale (74). 30
19. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est en outre adaptée pour fournir des signaux comprenant au moins l'une des capacités choisies dans le groupe constitué : des capacités de cardioversion et des capacités de défibrillation. 35
20. Appareil selon la revendication 1, dans lequel l'unité de commande (90) est configurée pour fournir un signal adapté pour être délivré à une paroi libre ventriculaire gauche. 40
21. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'ensemble d'électrodes (98) comprend une électrode vissée implantée dans le septum et une électrode annulaire à proximité de ce dernier. 45

FIG. 1A

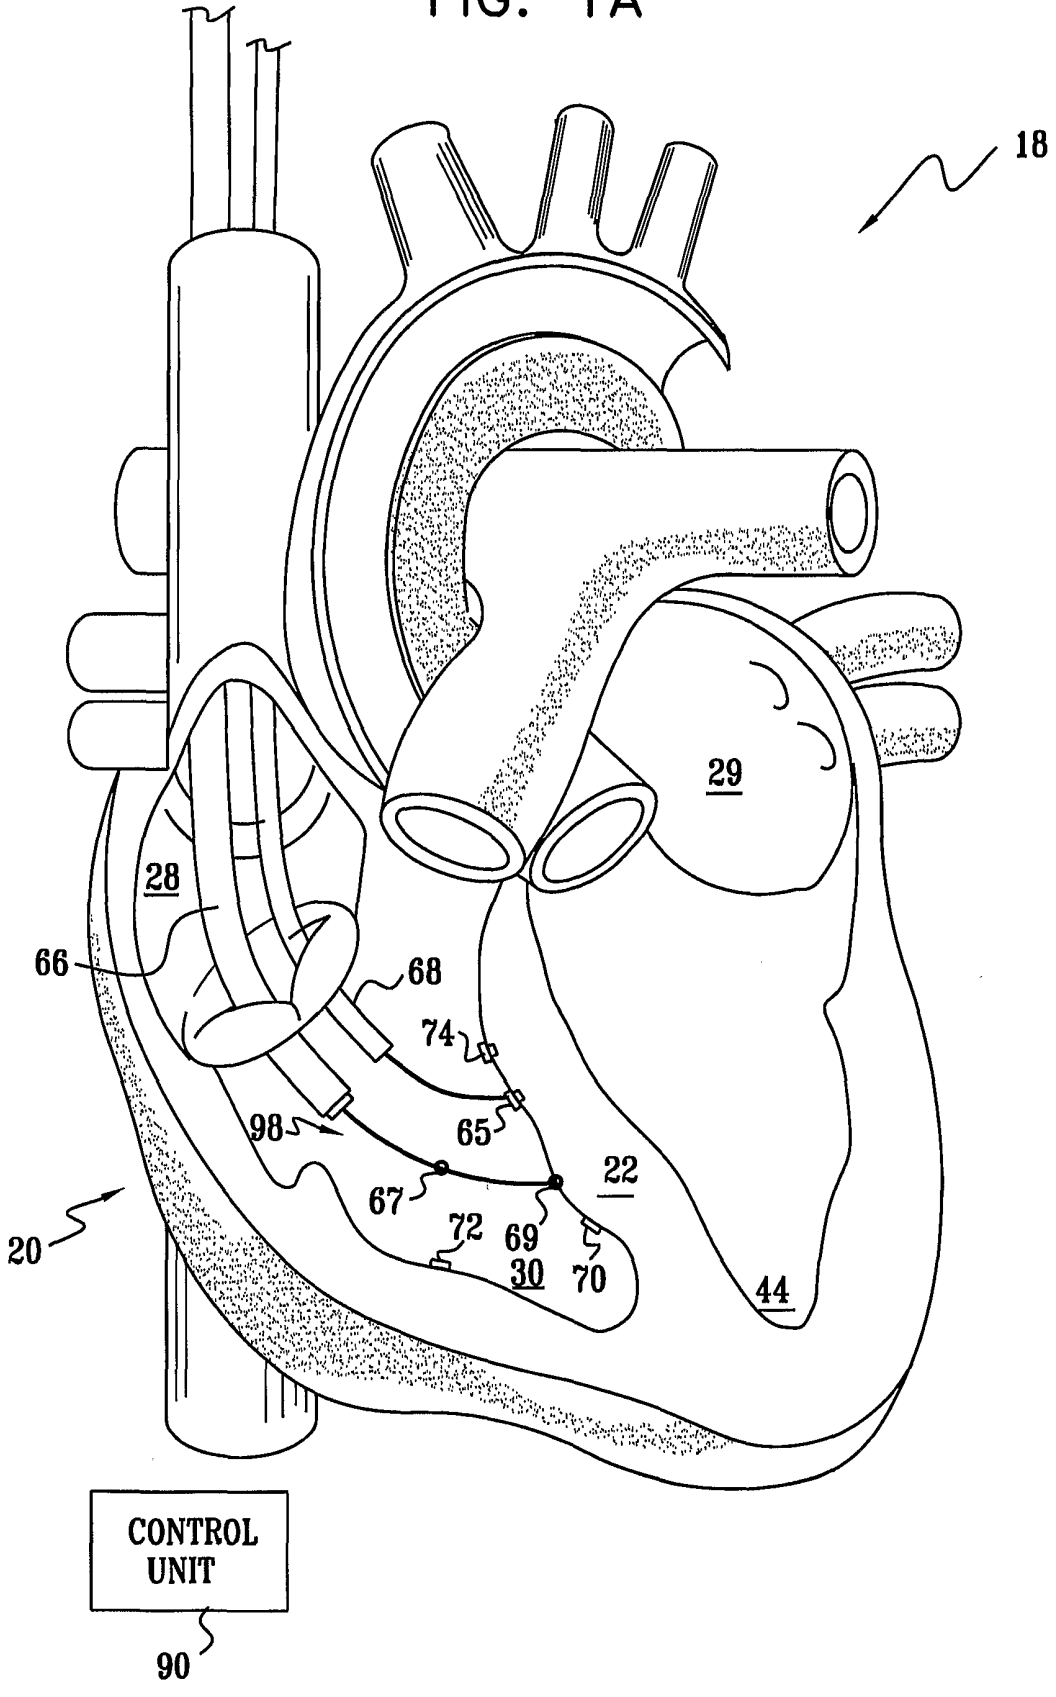


FIG. 1B


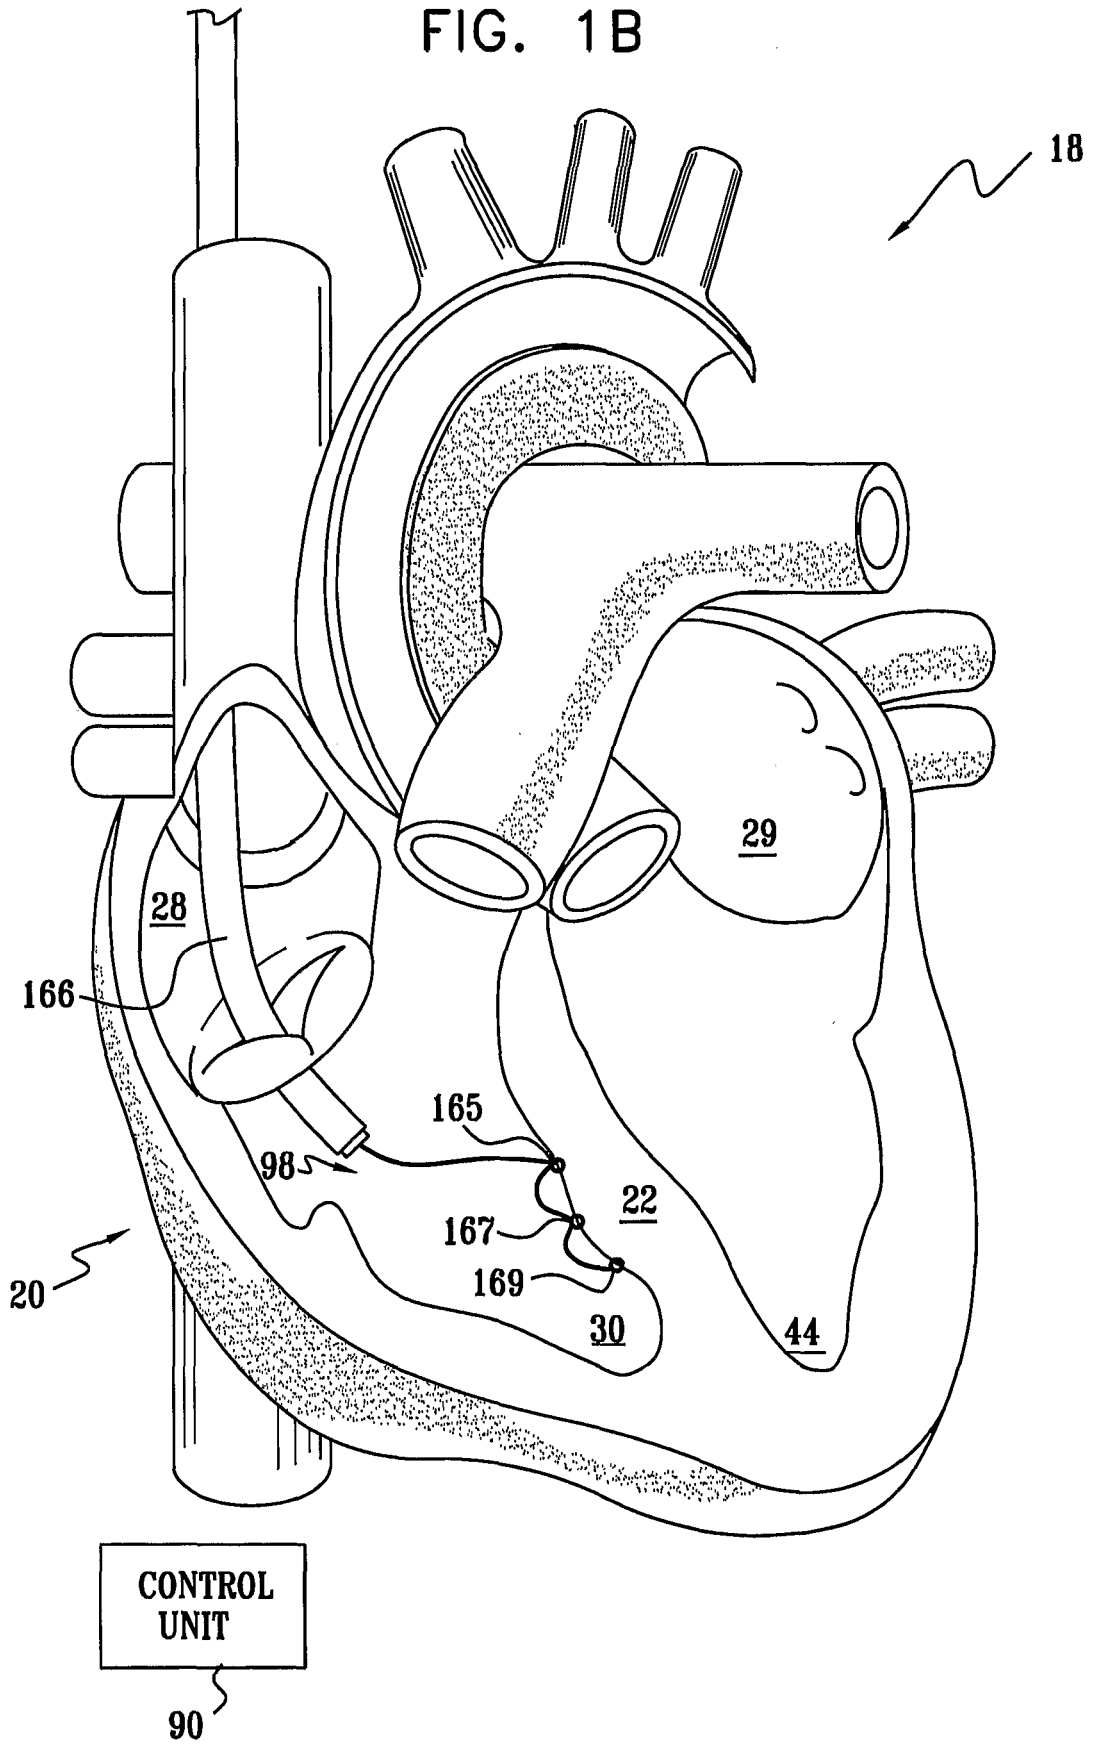


FIG. 1C

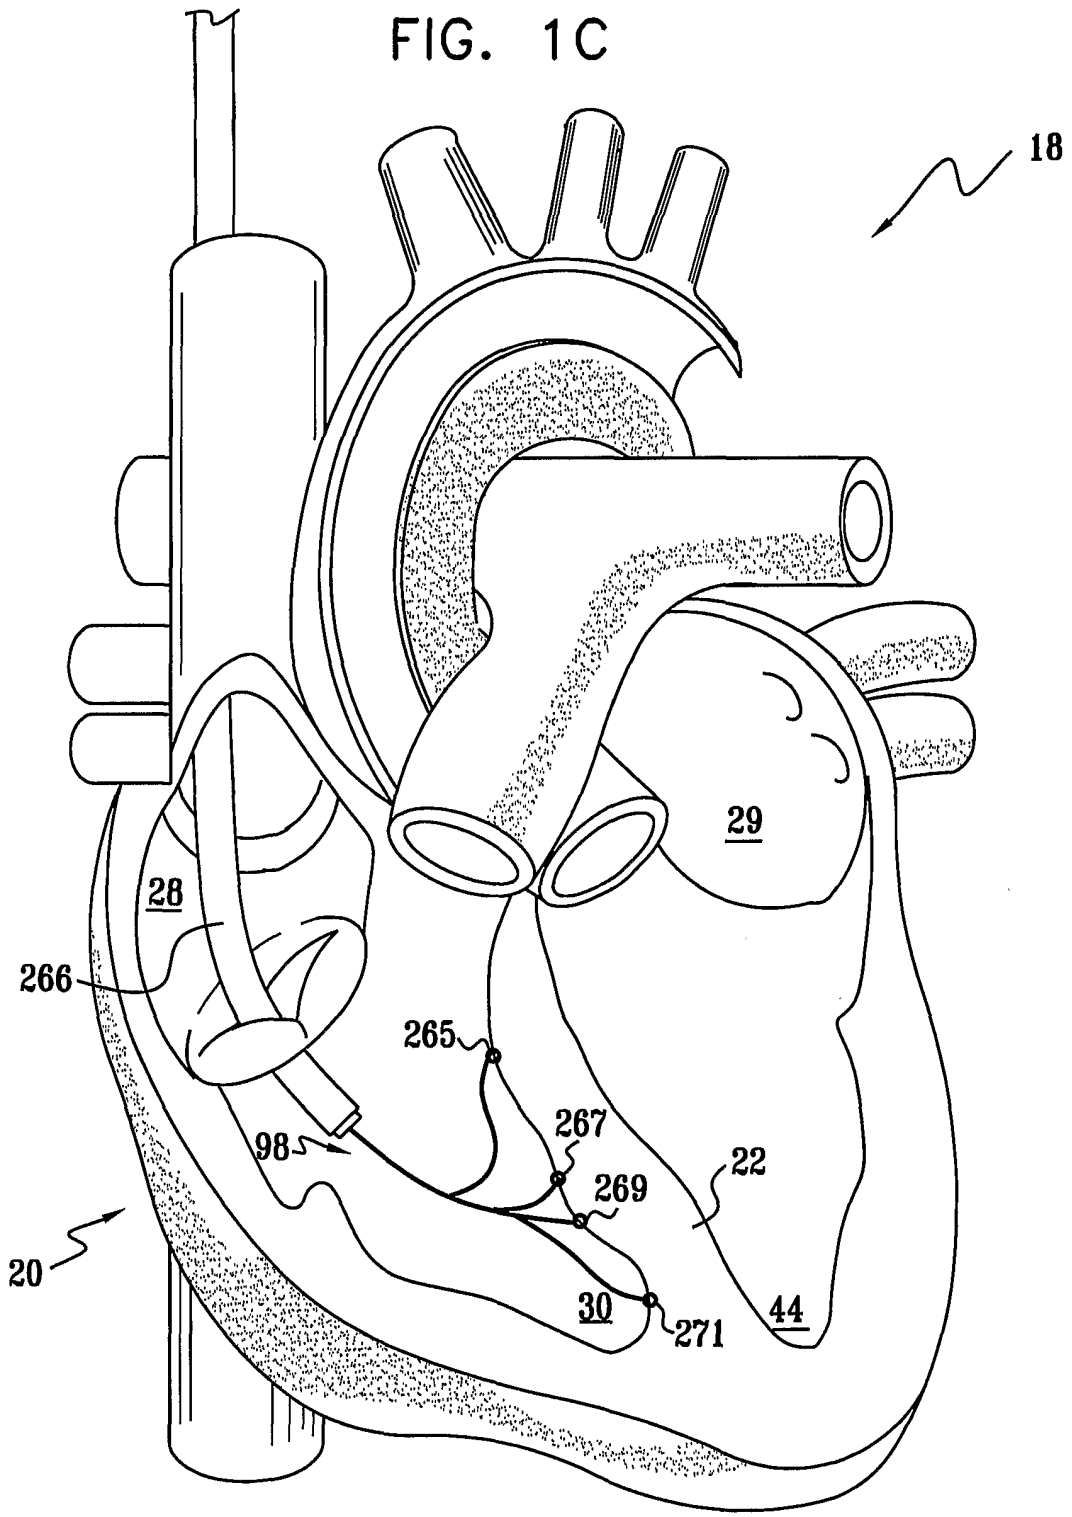

CONTROL
UNIT

90

FIG. 2

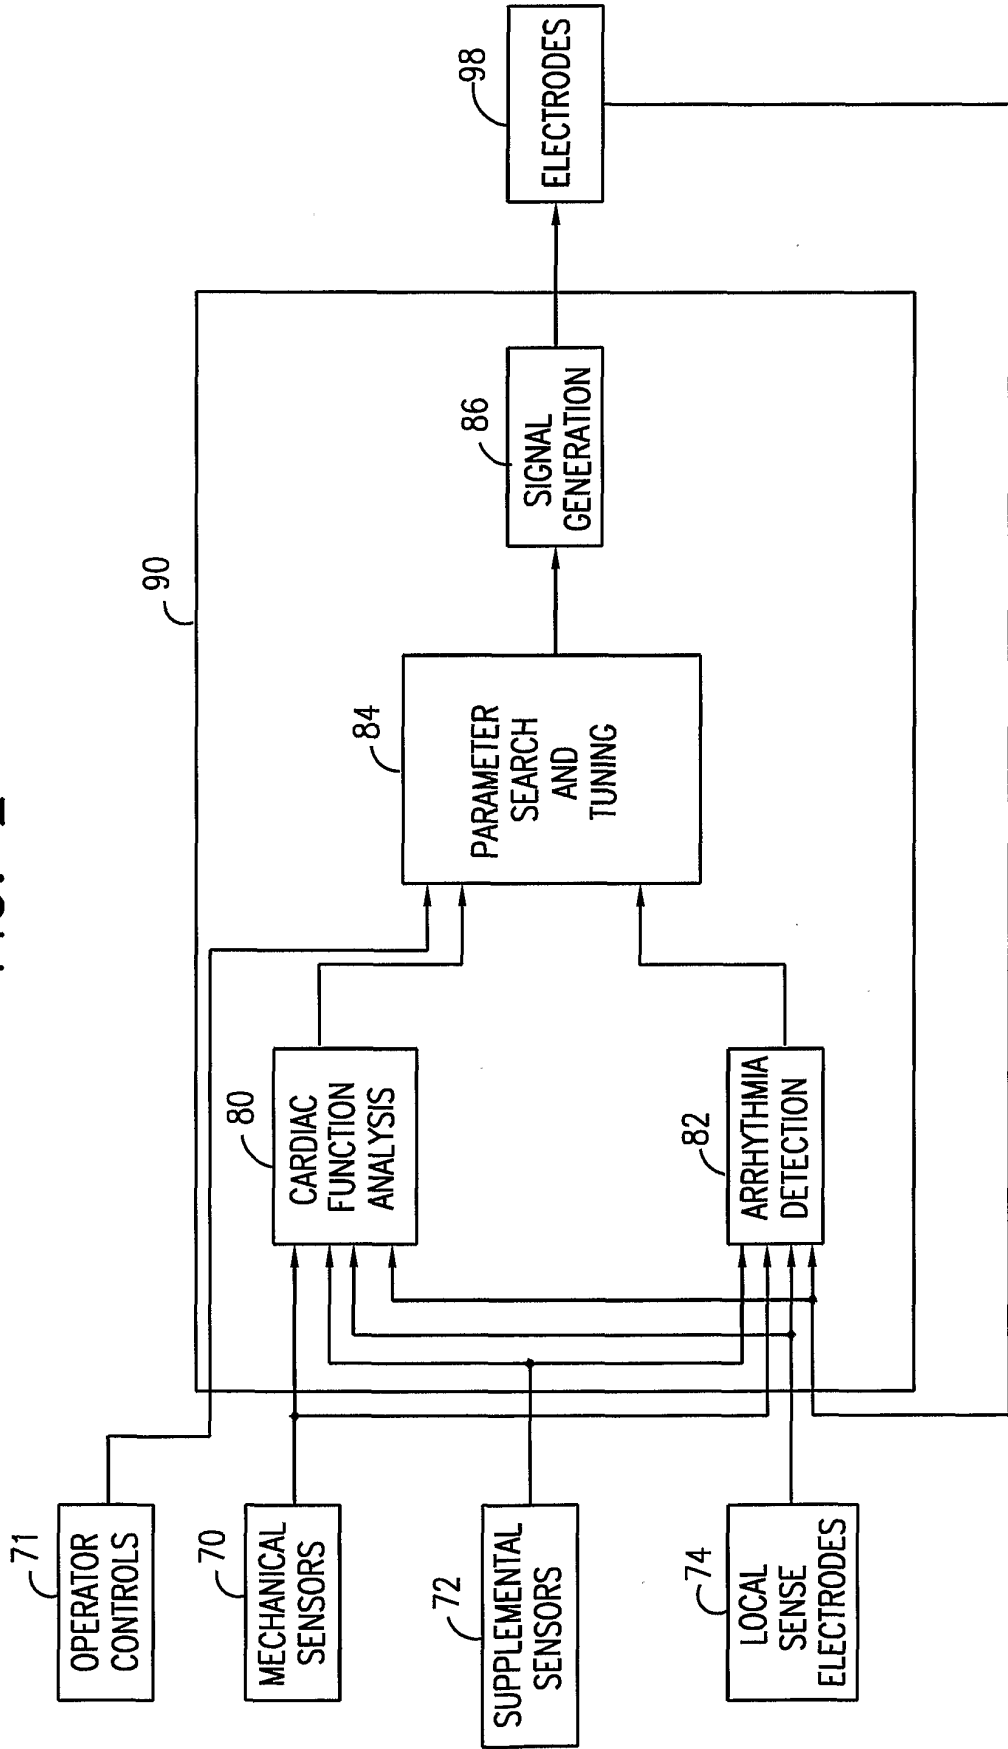


FIG. 3

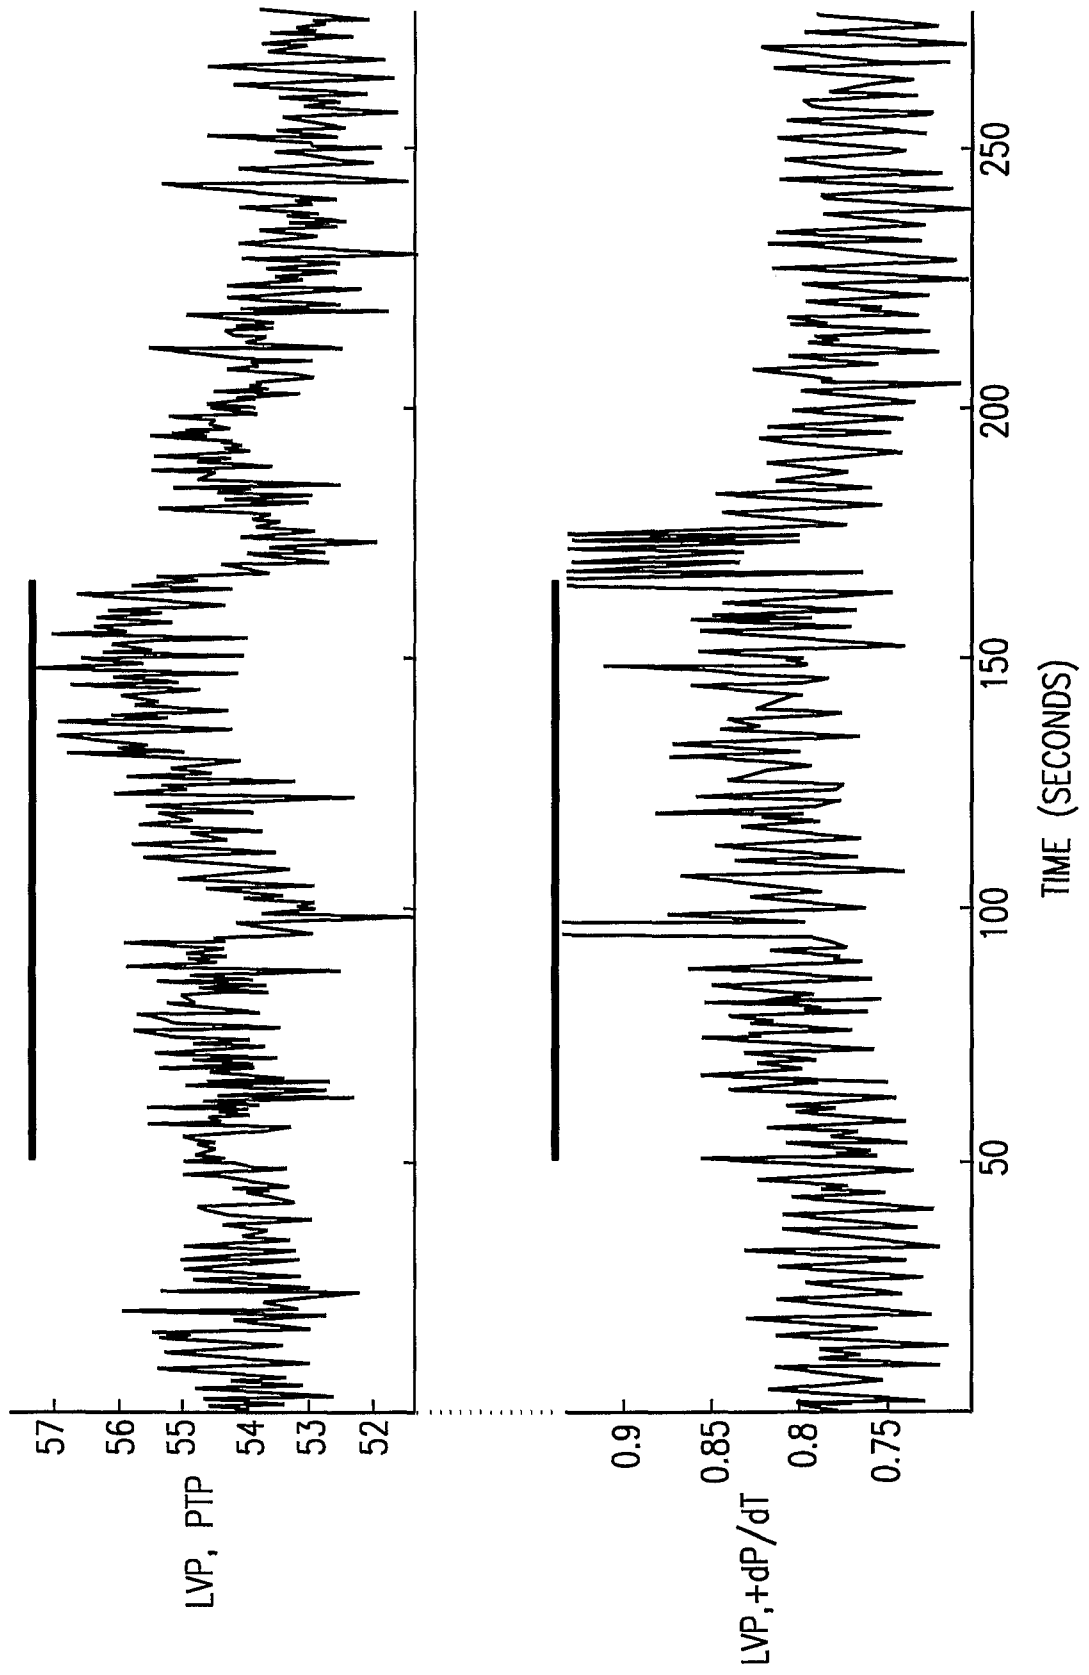


FIG. 4


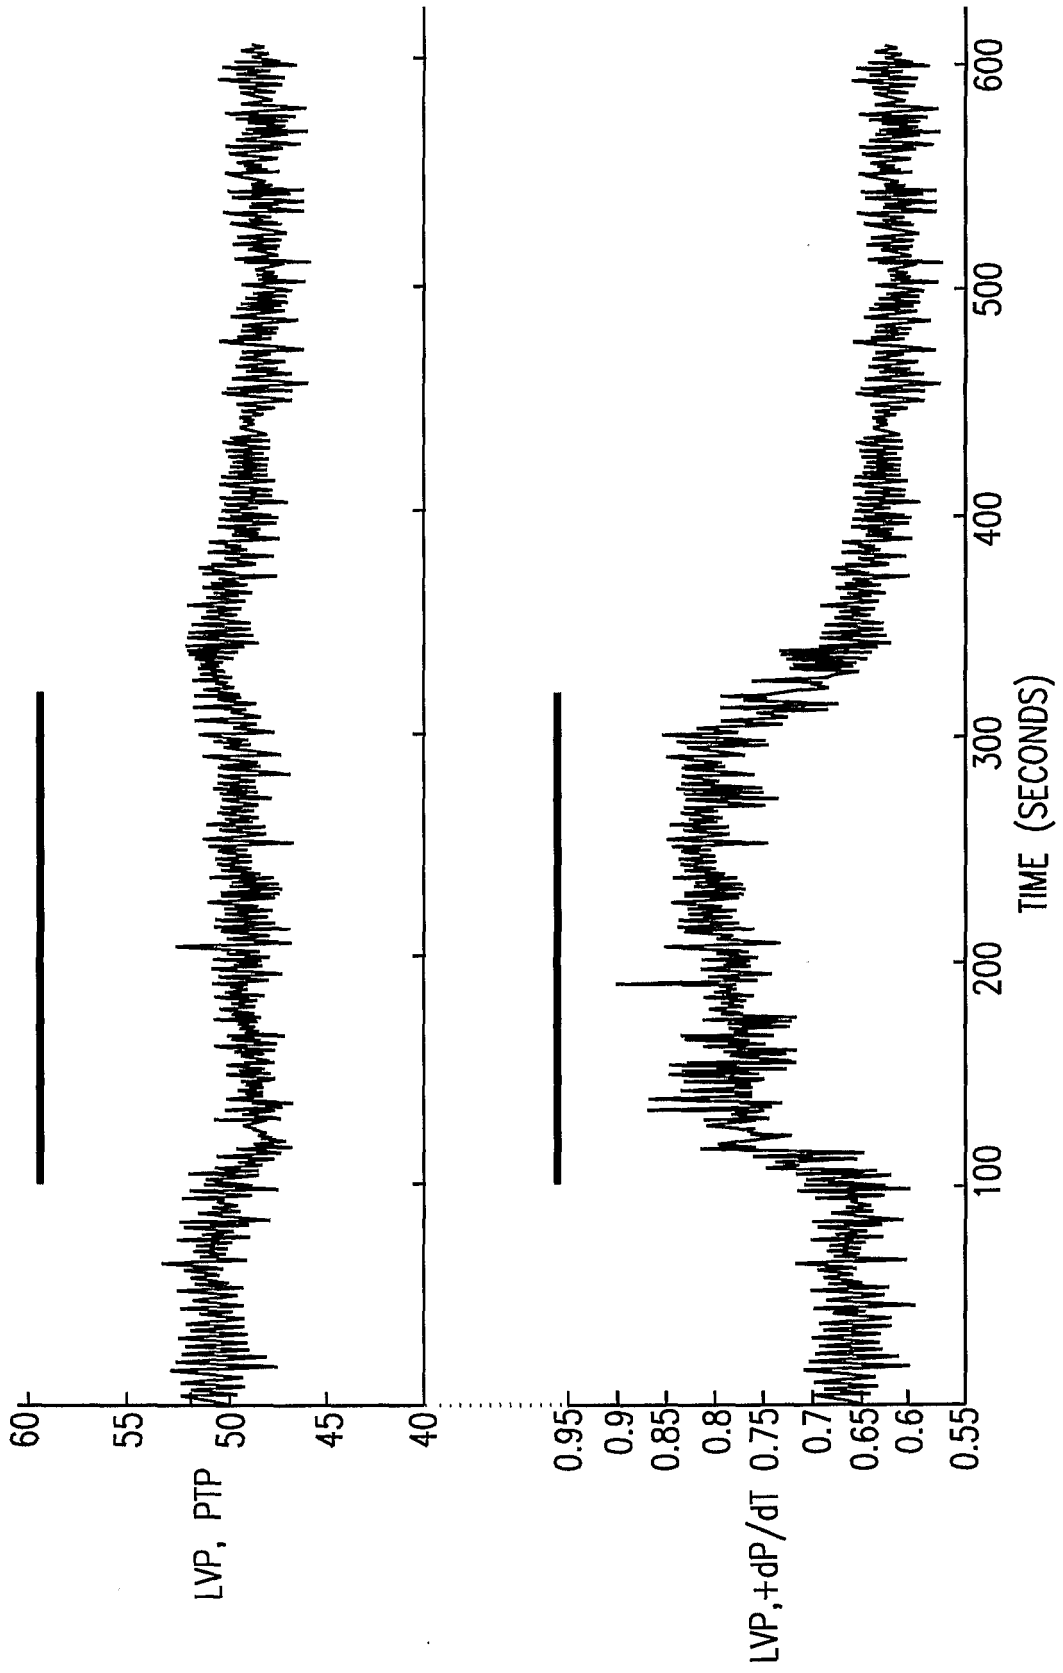


FIG. 5

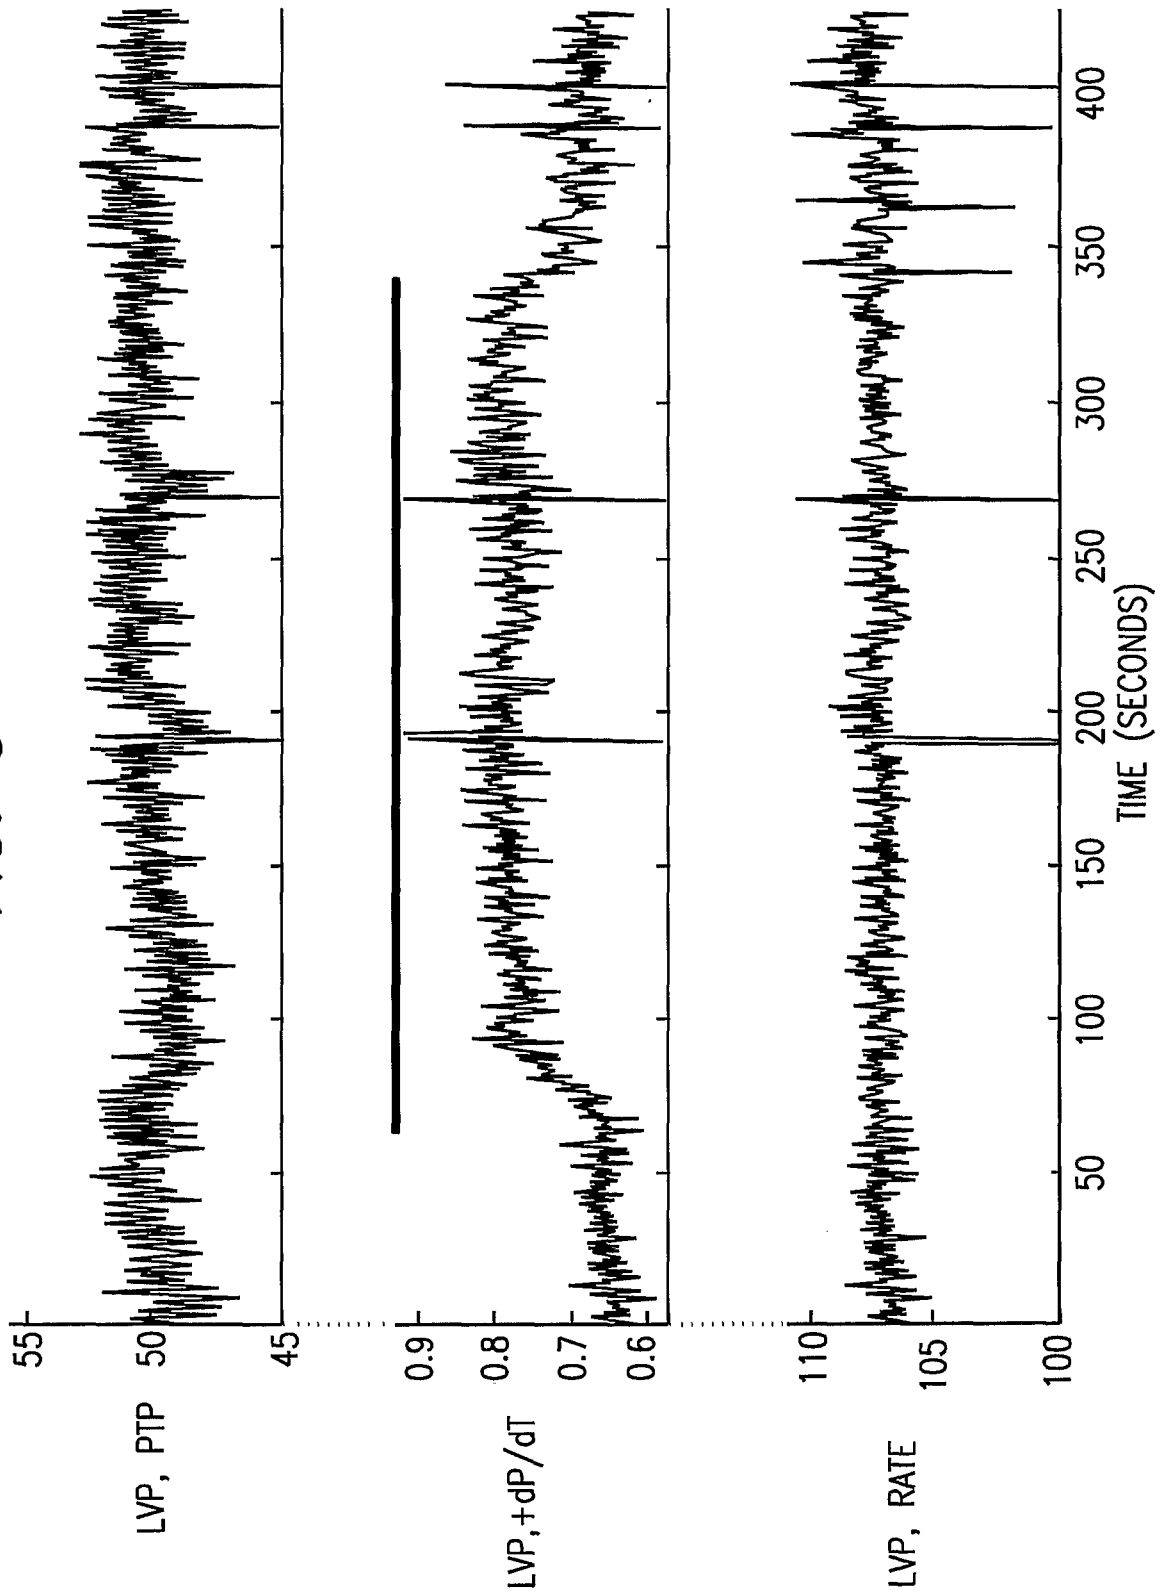

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9725098 A, Ben-Haim [0003]
- US 09101723 B [0003] [0025]
- US 6317631 B [0003] [0025]
- WO 9810832 A, Ben-Haim [0004]
- US 09254900 B [0004] [0025]
- US 6463324 B [0004] [0025]
- IL 129257 [0025]

专利名称(译)	信号通过右心室间隔传递		
公开(公告)号	EP1284781B1	公开(公告)日	2017-10-11
申请号	EP2001928181	申请日	2001-05-03
[标]申请(专利权)人(译)	IMPULSE DYNAMICS		
申请(专利权)人(译)	IMPULSE DYNAMICS N.V.		
当前申请(专利权)人(译)	IMPULSE DYNAMICS N.V.		
[标]发明人	SHEMER ITSIK MIKA YUVAL		
发明人	SHEMER, ITSIK MIKA, YUVAL		
IPC分类号	A61N1/05 A61B5/00 A61B5/0215 A61B5/029 A61B5/042 A61B5/06 A61B17/00 A61B17/02 A61B18/20 A61N1/32 A61N1/36 A61N1/362 A61N1/365 A61N1/368		
CPC分类号	A61B5/0215 A61B5/029 A61B5/0422 A61B5/145 A61B5/6843 A61B5/6852 A61B5/6853 A61B5/6856 A61B5/6858 A61B5/6859 A61B18/20 A61B2017/00243 A61B2017/00247 A61B2017/0243 A61B2018 /00392 A61N1/056 A61N1/3627 A61N1/3628 A61N1/36514 A61N1/36542 A61N1/36557 A61N1/36564 A61N1/36585 A61N1/36842 A61N1/36843		
代理机构(译)	POTTER CLARKSON LLP		
优先权	60/202382 2000-05-04 US		
其他公开文献	EP1284781A2 EP1284781A4		
外部链接	Espacenet		

摘要(译)

提供了一种用于将信号施加到人类对象的心脏的设备。该设备包括一组一个或多个电极，该电极适于耦合到心脏的右心室隔膜。该设备的控制单元适于驱动电极组以将可激发组织控制（ETC）信号施加到隔膜。优选地，控制单元适于将信号配置为能够改变心脏的一部分的收缩性。

