



US 20030202144A1

(19) **United States**(12) **Patent Application Publication****Kim et al.**(10) **Pub. No.: US 2003/0202144 A1**(43) **Pub. Date: Oct. 30, 2003**(54) **LIQUID CRYSTAL DISPLAY HAVING WIDE VIEWING ANGLE****Publication Classification**(51) **Int. Cl.⁷** G02F 1/1337(52) **U.S. Cl.** 349/129(76) Inventors: **Kyeong-Hyeon Kim**, Kyungki-do (KR); **Kye-Hun Lee**, Kyungki-do (KR); **Seung-Beom Park**, Kyungki-do (KR); **Jang-Kun Song**, Seoul (KR)

Correspondence Address:
McGuireWoods LLP
Suite 1800
1750 Tysons Boulevard
McLean, VA 22102 (US)

(21) Appl. No.: **10/404,443**(22) Filed: **Apr. 2, 2003****Related U.S. Application Data**

(62) Division of application No. 09/315,105, filed on May 20, 1999, now Pat. No. 6,567,144.

(30) **Foreign Application Priority Data**

May 20, 1998 (KR) 98-18164

ABSTRACT

Saw-shaped protrusions, which are parallel to each other, are formed on the common electrode and the pixel electrode in two substrates. Protrusions in two substrates are arranged alternately and the bent portions of the saw-shaped protrusions are placed on the line transverse passing through the center of a pixel. Branches extend from the convex point of one saw-shaped protrusion toward the apex to the other saw-shaped protrusion, and another branch extend from the point where the protrusion meets the boundary of the pixel electrode toward the point where the boundary of the pixel electrode and the saw-shaped protrusion make an acute angle. A liquid crystal layer between two electrodes are divided to four regions where the directors of the liquid crystal layer have different angles when a voltage is applied to the electrodes, and then, wide viewing angle is obtained. In most regions, protrusions are formed straight and the protrusions have only obtuse angles at the bent points. Therefore, fast response time is shortened, disclination is removed and luminance increases.

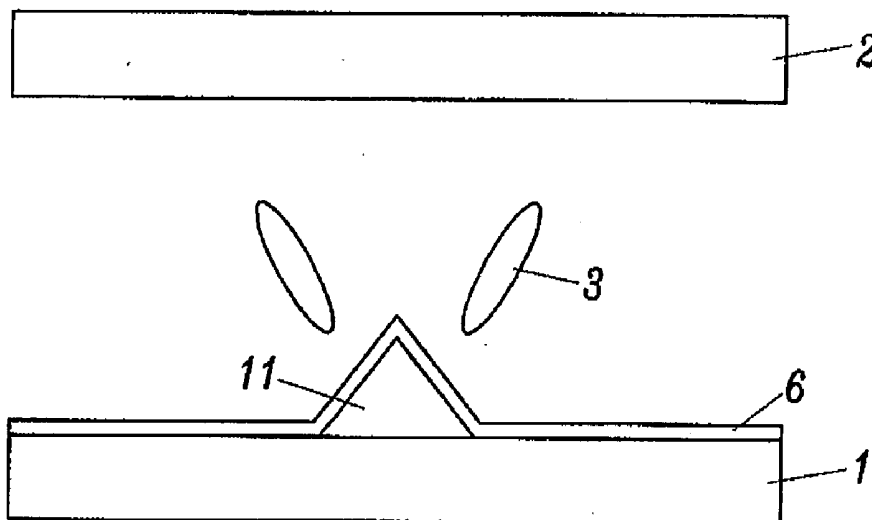


FIG. 1A

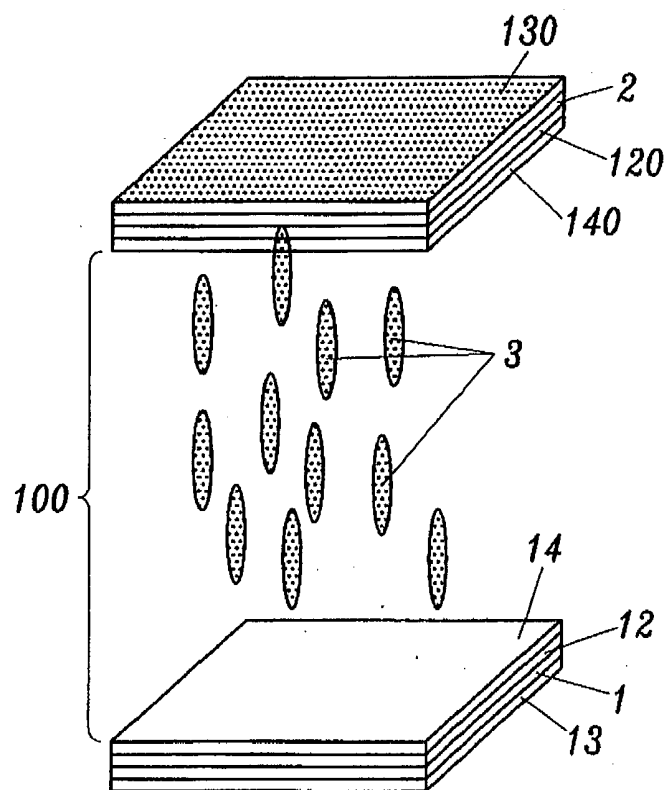


FIG. 1B

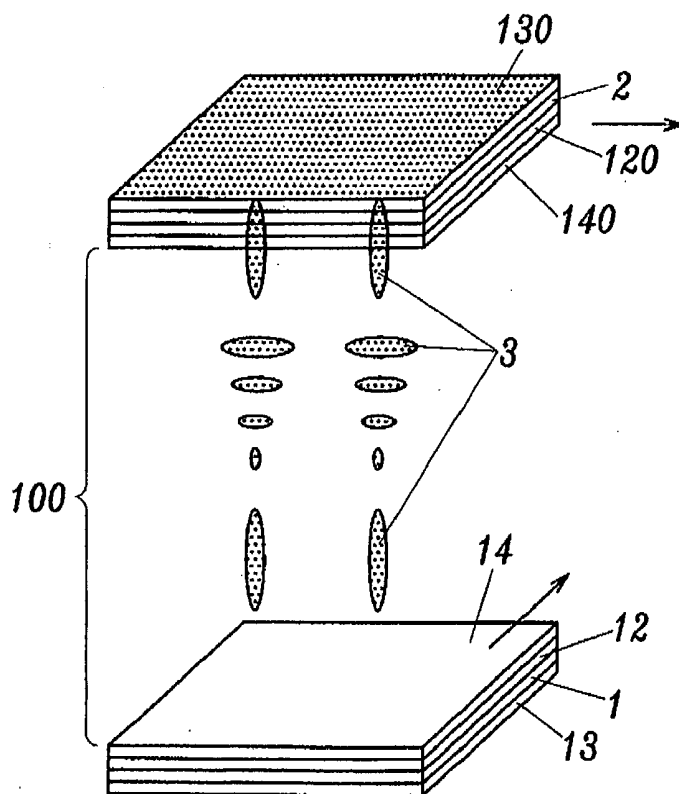


FIG. 2

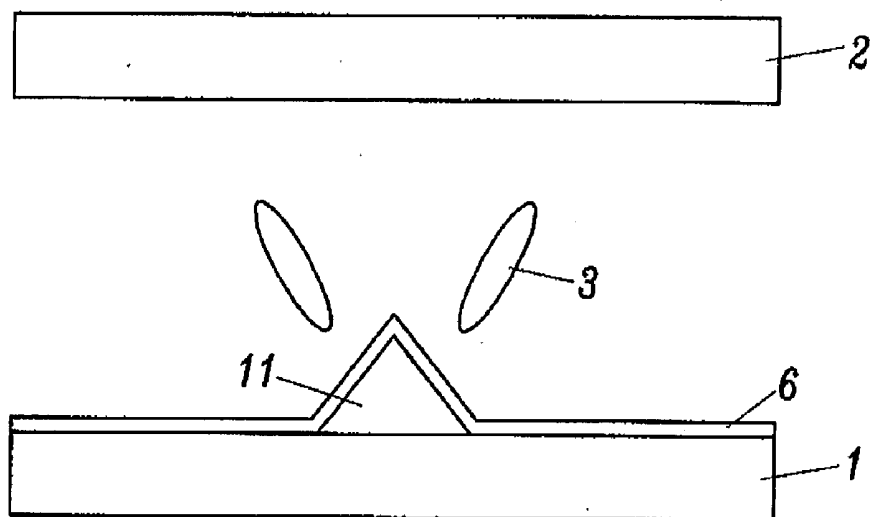


FIG. 3

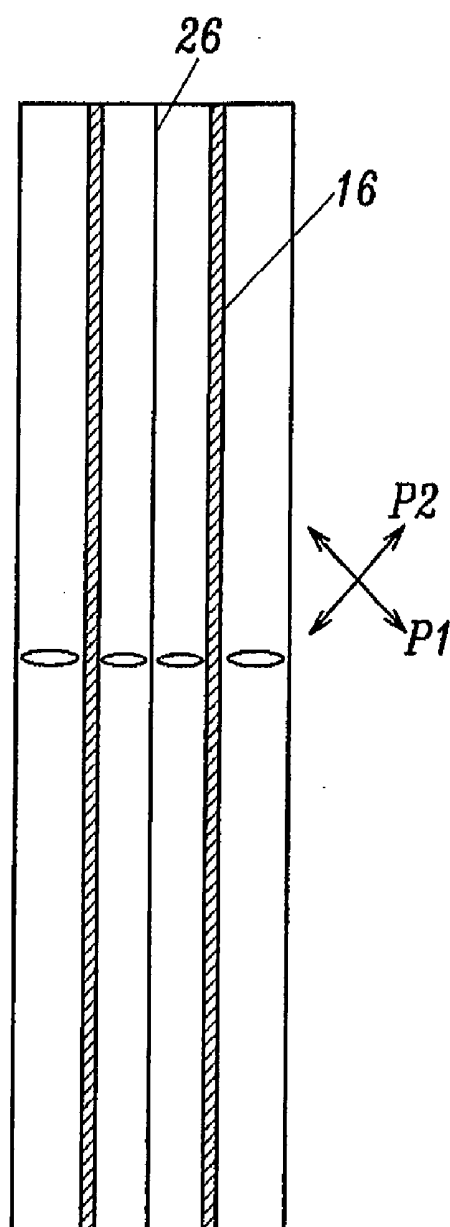


FIG. 4

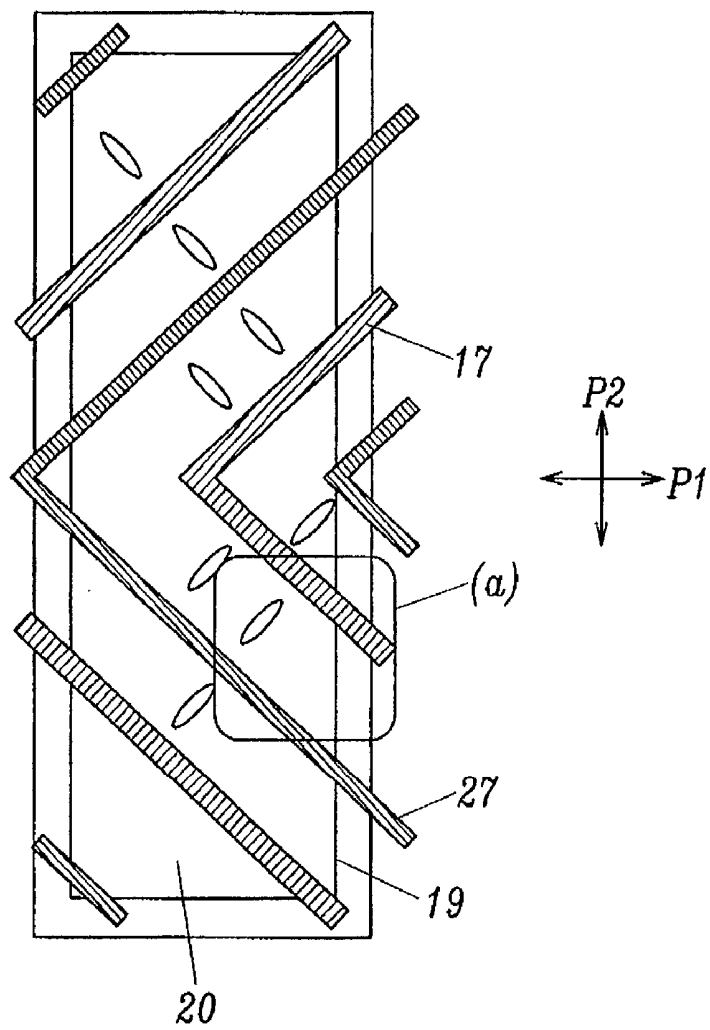


FIG. 5

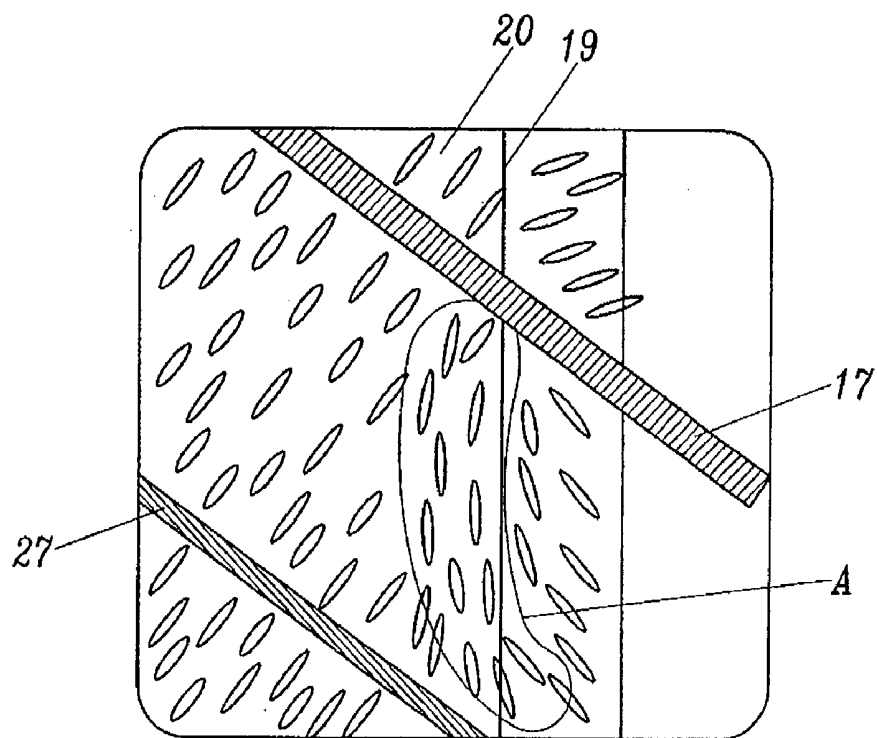


FIG. 6A

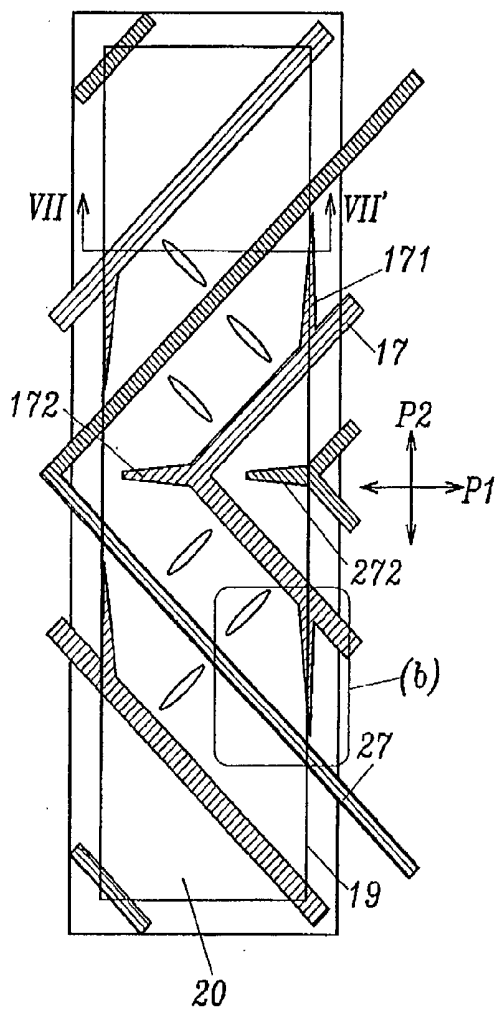


FIG. 6B

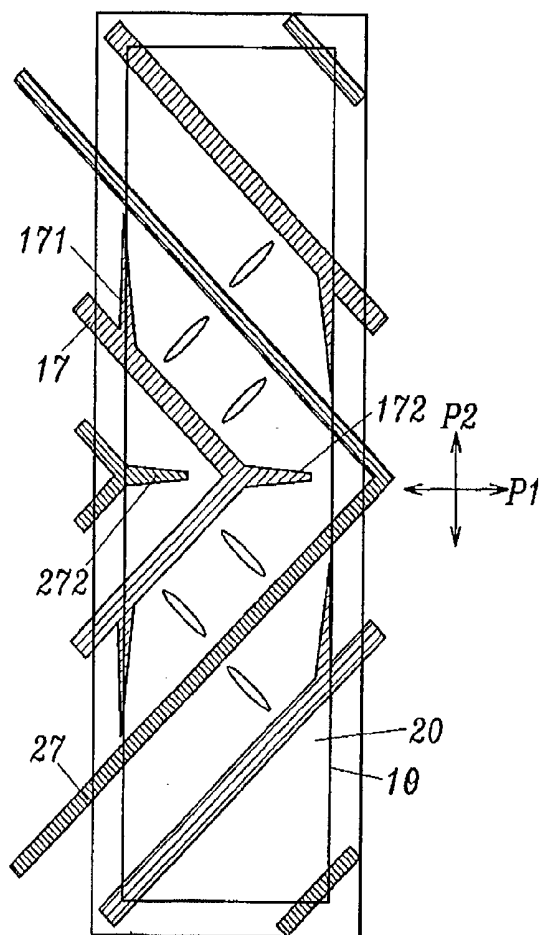


FIG. 7

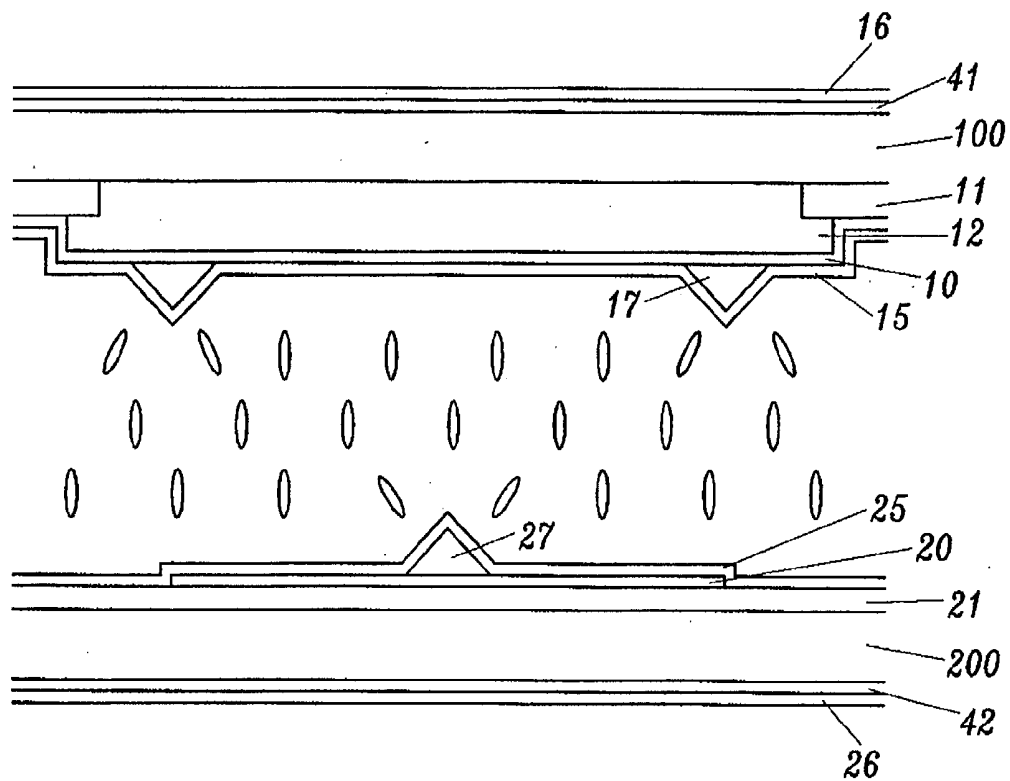


FIG. 8

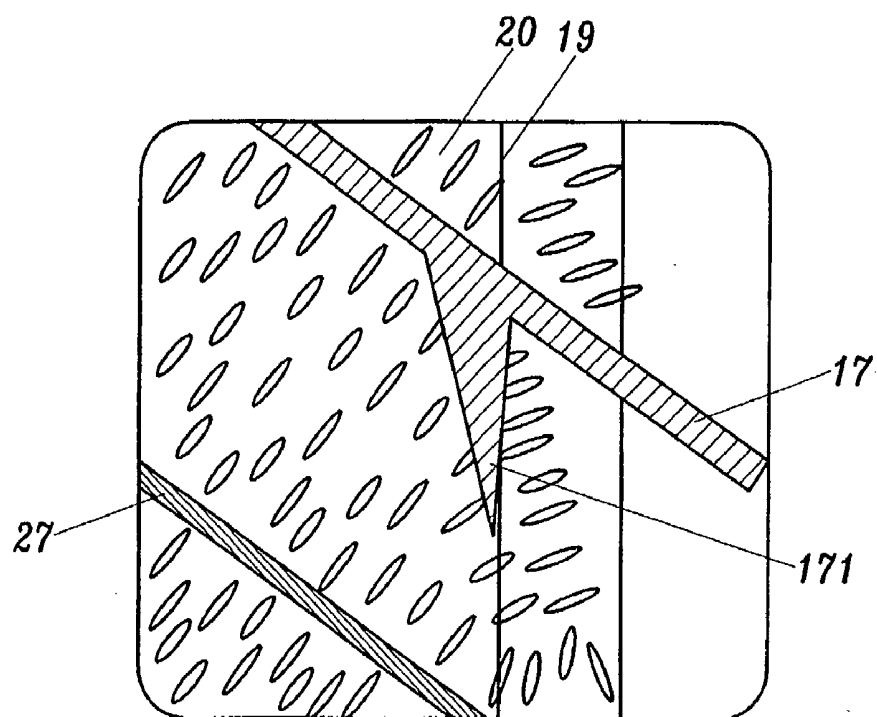


FIG. 9A

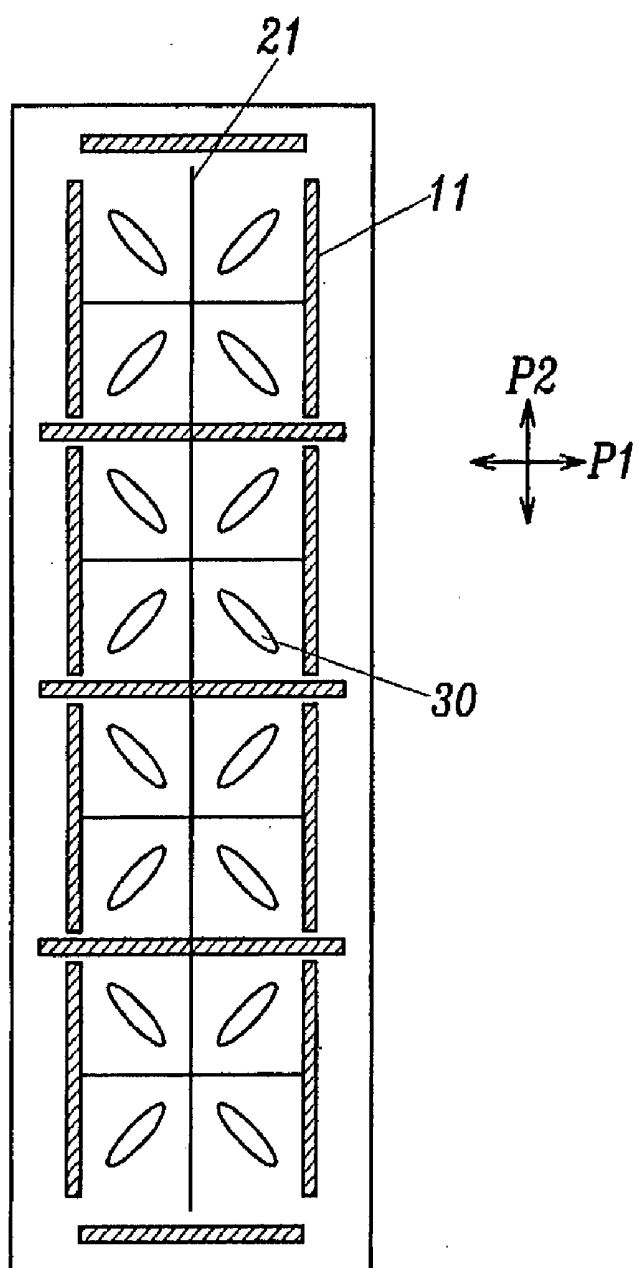


FIG. 9B

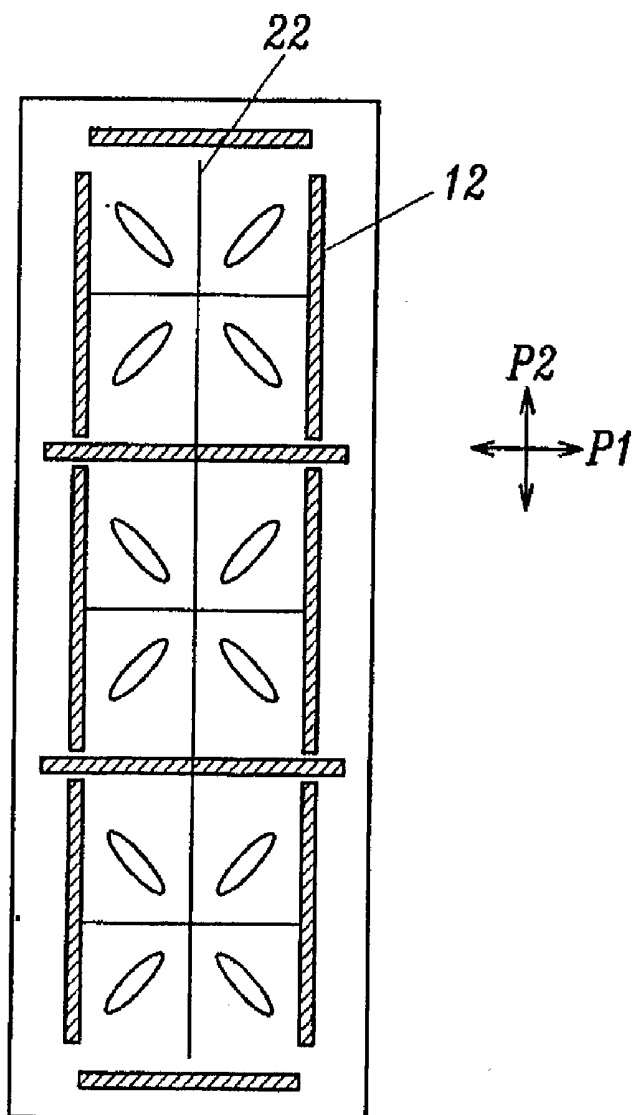


FIG. 10

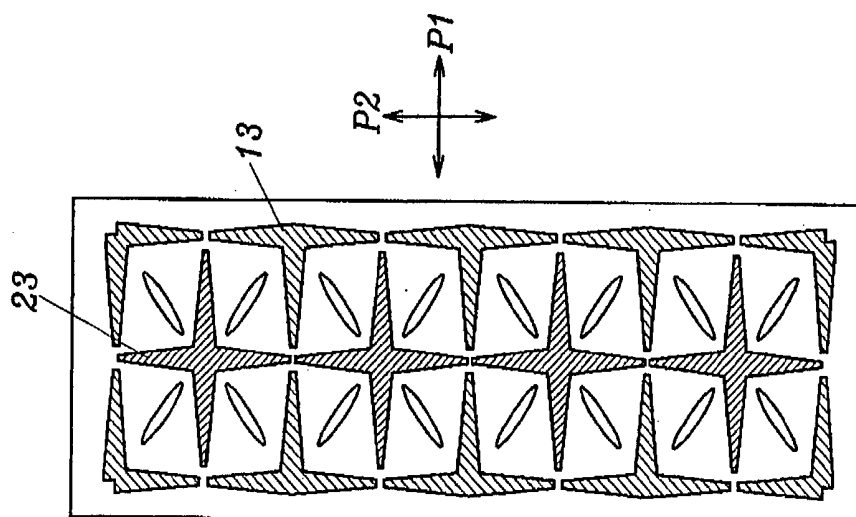


FIG. 11

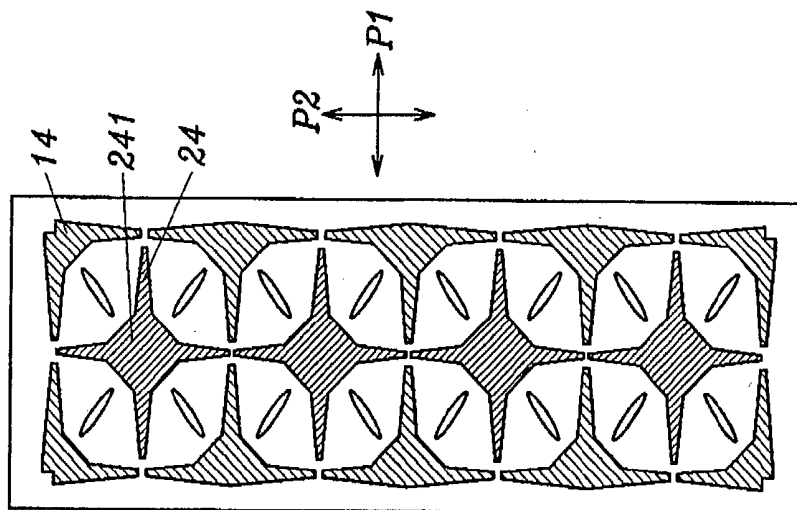


FIG. 12

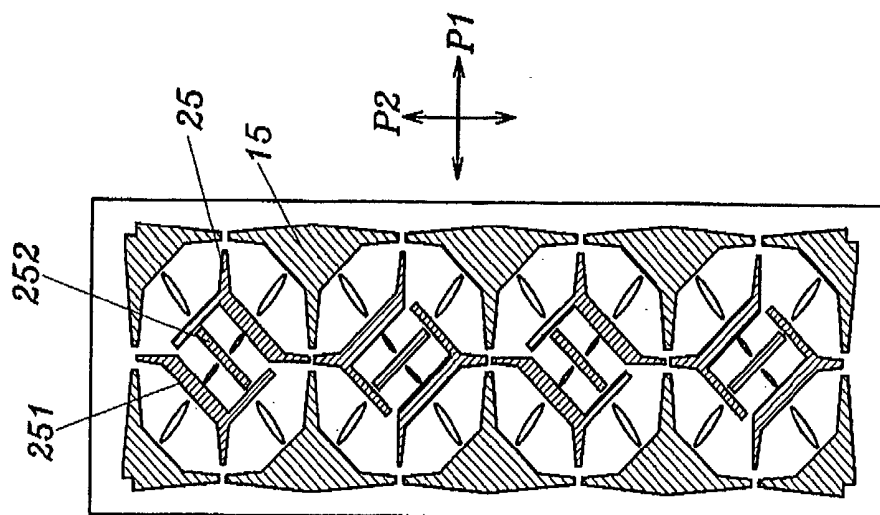


FIG. 13

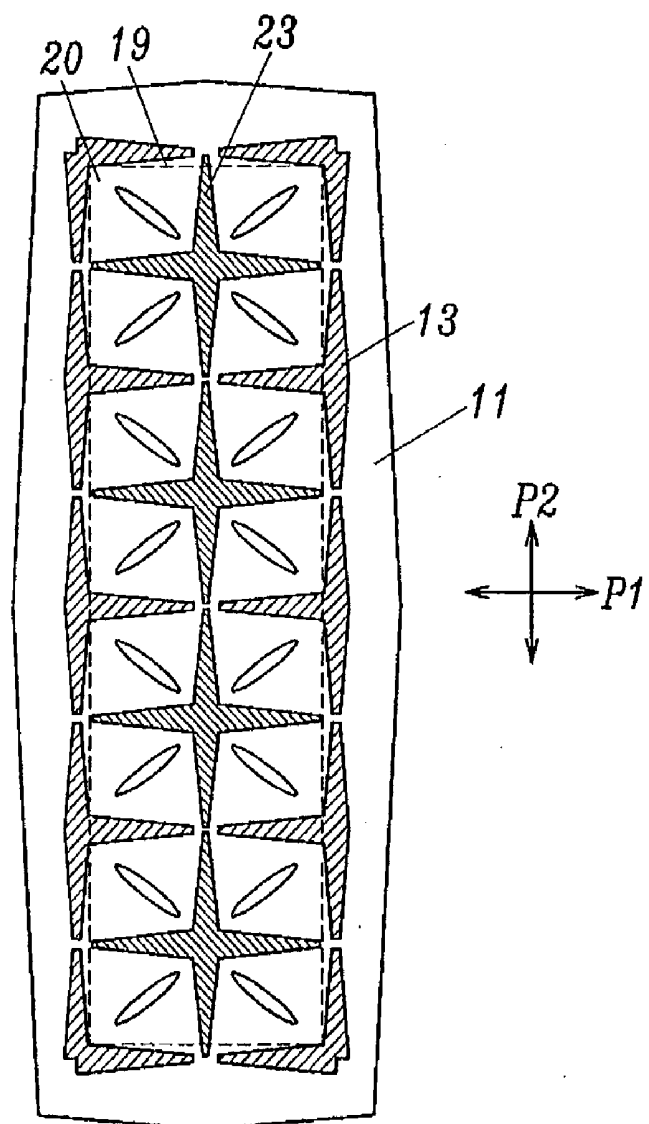


FIG. 14

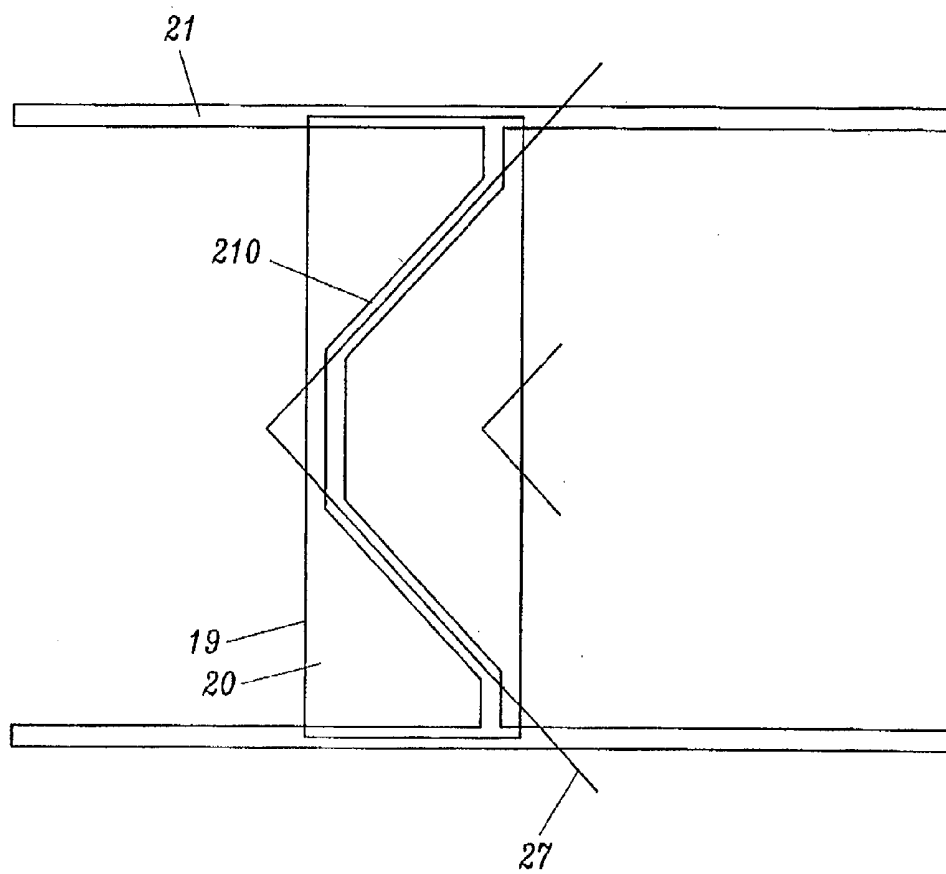


FIG. 15

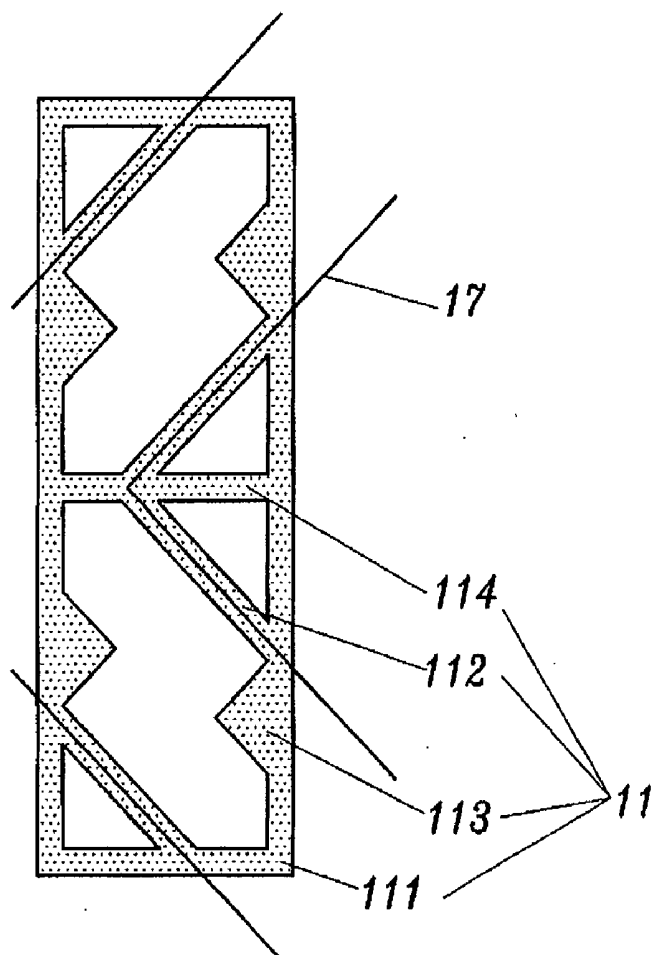


FIG. 16

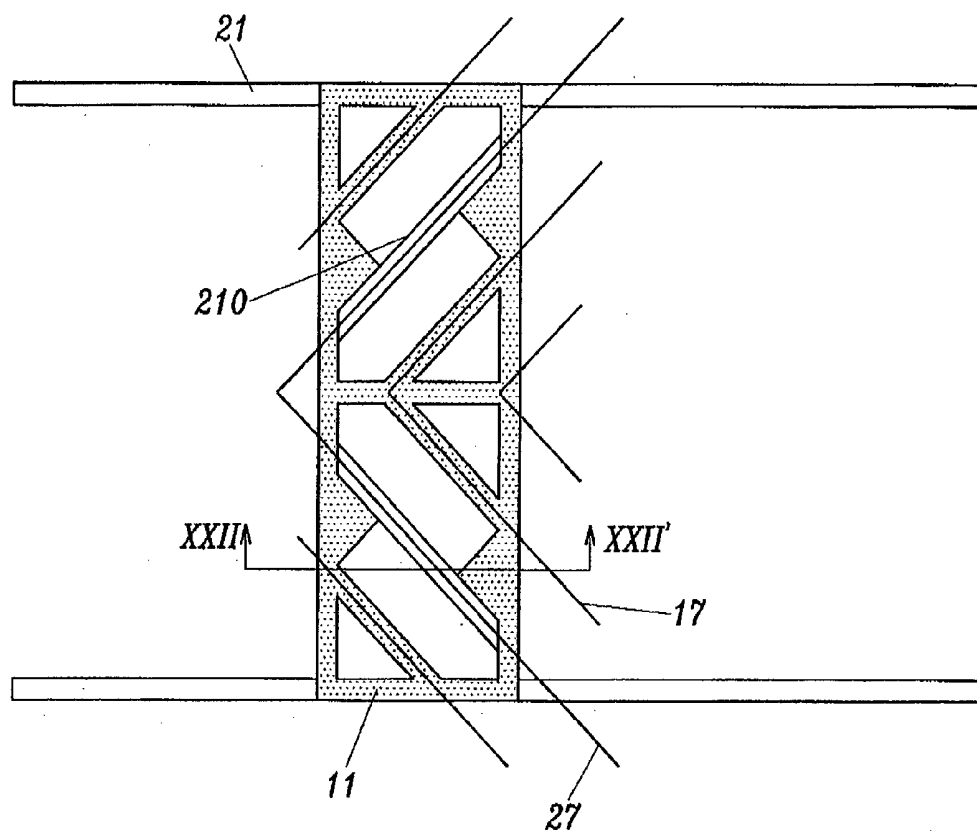


FIG. 17

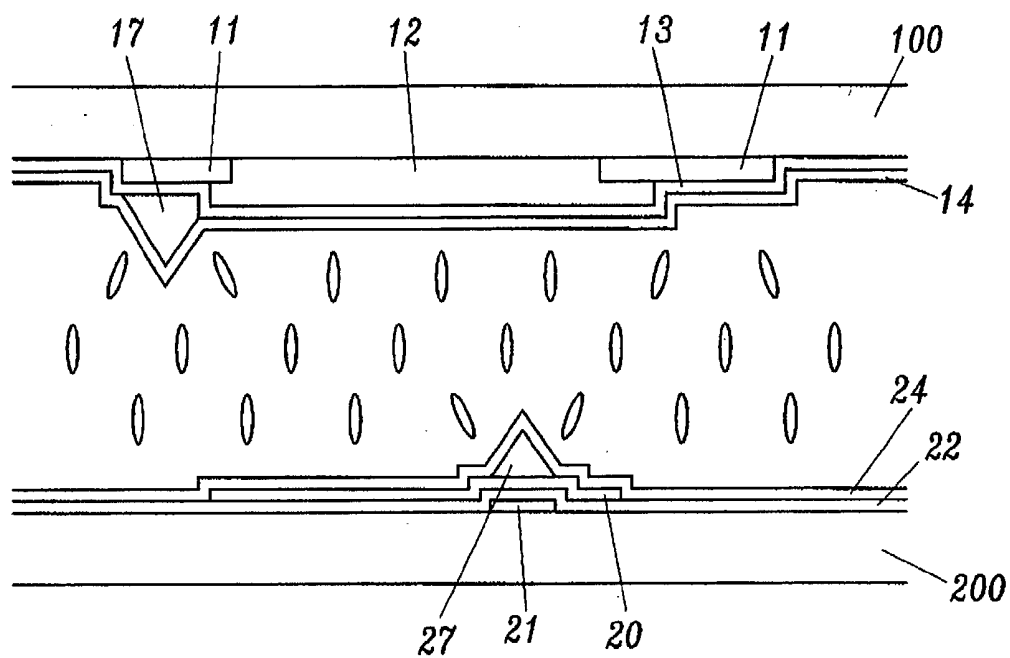


FIG. 18

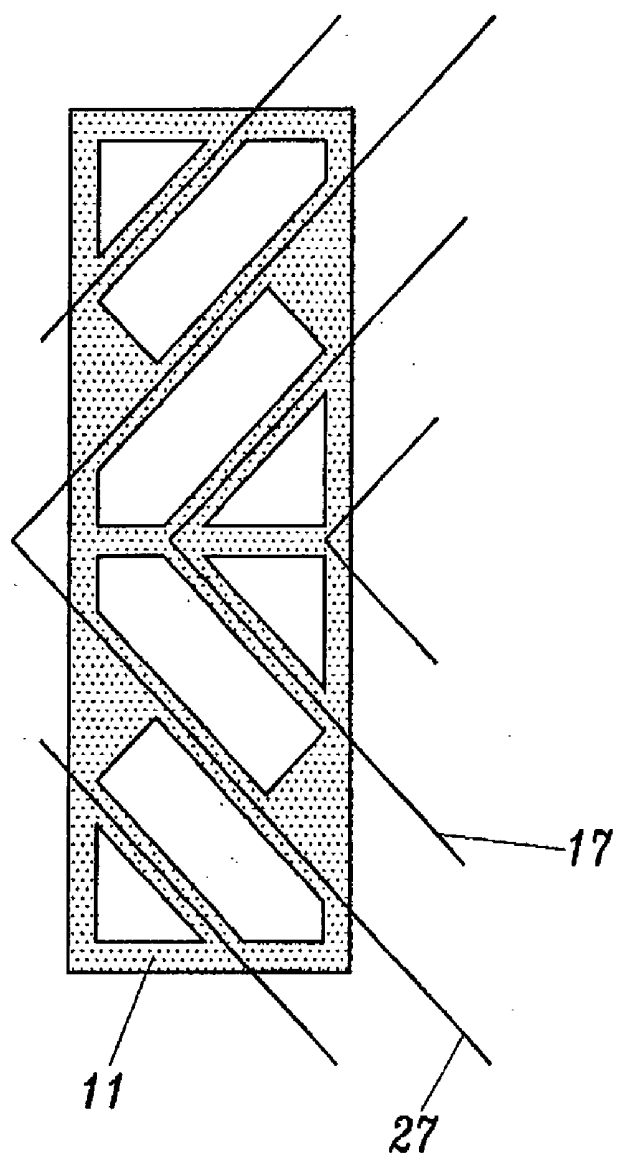


FIG. 19


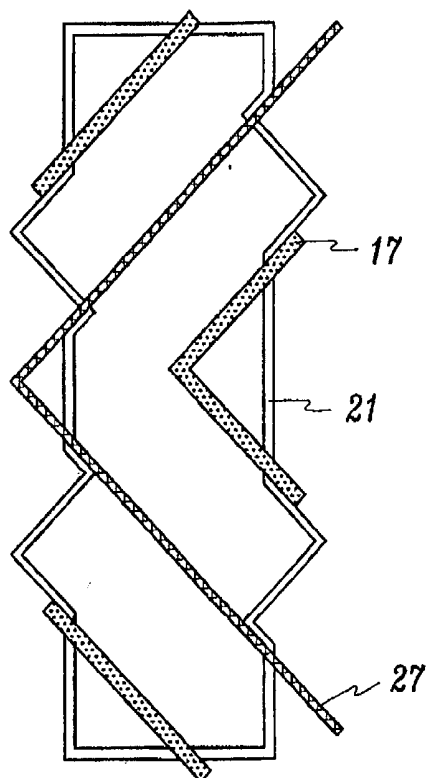


FIG. 20

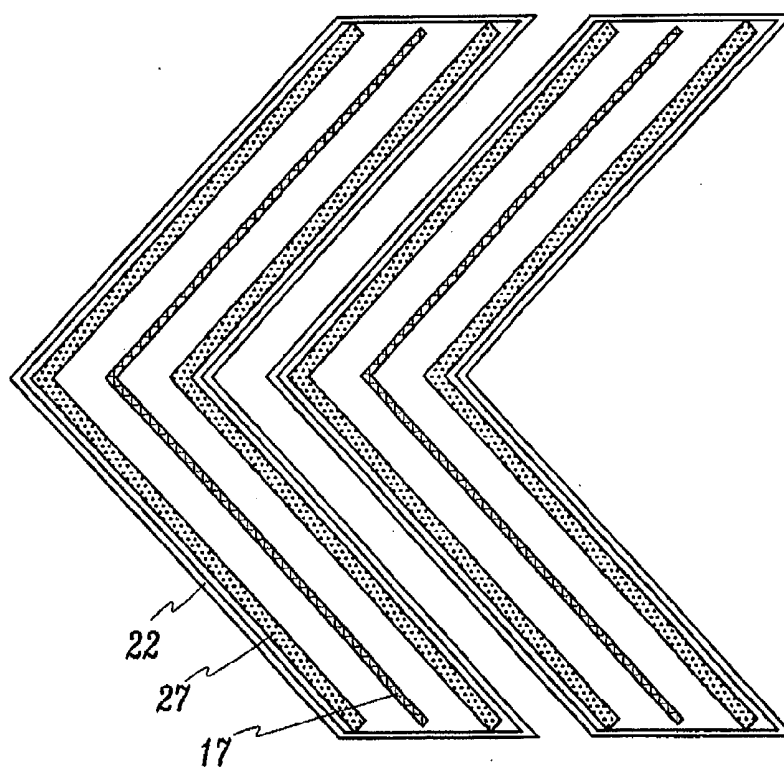

LIQUID CRYSTAL DISPLAY HAVING WIDE VIEWING ANGLE

BACKGROUND OF THE INVENTION

[0001] (a) Field of the Invention

[0002] The present invention relates to a liquid crystal display having wide viewing angle.

[0003] (b) Description of the Related Art

[0004] A liquid crystal display (LCD) includes two substrates and a liquid crystal layer interposed therebetween. The transmittance of the incident light is controlled by the strength of the electric field applied to the liquid crystal layer.

[0005] A vertically aligned twisted nematic (VATN) liquid crystal display has a couple of transparent substrates which have transparent electrodes respectively on their inner surfaces, a liquid crystal layer between two substrates and a couple of polarizers which are attached to the outer surfaces of the substrates respectively. In off state of the LCD, i.e., in the state that the electric field is not applied to the electrodes, the long axes of the liquid crystal molecules are perpendicular to the substrates. On the other hand, in on state of the LCD, i.e., in the state that the sufficient electric field is applied to the electrodes, the long axes of the liquid crystal molecules are parallel to the substrates and twisted spirally with a constant pitch from the inner surface of one substrate to that of the other substrate, and thus the orientation of the long axes of the liquid crystal molecules vary continuously.

[0006] The VATN LCD operating in normally black mode may have an off state which is sufficiently dark because the liquid crystal molecules are aligned perpendicular to the substrates in the off state. Therefore, the contrast ratio is relatively high compared with the conventional TN LCD. However, the viewing angle of the VATN LCD may not be so wide due to the difference between retardation values in various viewing directions.

SUMMARY OF THE INVENTION

[0007] It is therefore an object of the present invention to widen the viewing angle of an LCD.

[0008] These and other objects, features and advantages are provided, according to the present invention, by a liquid crystal display having protrusion patterns on transparent electrodes for forming multi-domains.

[0009] A liquid crystal display, according to the present invention, comprises a first substrate including a common electrode and a first protrusions formed on the common electrode and a second substrate opposite the first substrate, the second substrate including a pixel electrode located at a position corresponding to the common electrode and a second protrusion formed on the pixel electrode, wherein the first and the second protrusions are arranged alternately and a distance between end portions of the first and the second protrusions is less than a distance between remaining portions of the first and the second protrusions. The width of the first and the second protrusions may be in the range of 3-20 μm , and the height of the first and the second protrusions may be in the range of 0.3-3.0 μm .

[0010] A liquid crystal layer having negative dielectric anisotropy may be interposed between the substrates, and alignment layers may be formed on inner surfaces of the substrates respectively.

[0011] A pair of polarizers may be attached to outer surfaces of the substrates, and the polarizing directions of the polarizers are preferably perpendicular to each other.

[0012] Compensation films may be attached between one of the substrates and one of the polarizers attached thereto, and a biaxial or a combination of an a-plate and a c-plate compensation films may be used. The slow axis of the biaxial or the a-plate compensation film is preferably parallel or perpendicular to the polarizing directions of the polarizers.

[0013] The second protrusion may have a saw shape and the first protrusion may include a first portion having a saw shape parallel to the second protrusion and a second portion formed at a position corresponding to the boundary of the pixel electrode where an angle between the second protrusion and the boundary of the pixel electrode is an acute angle. A third protrusion extending from the convex point of the first saw shape portion to the second protrusion may be formed on the common electrode, and a fourth protrusion extending from the convex point of the second saw shape protrusion to the first protrusion may be formed on the pixel electrode. The first portion of the first protrusion and the second protrusion may be bent once in a unit pixel region.

[0014] The first protrusion may form a substantially tetragonal ring, and the second protrusion may be formed at a position corresponding to the center of the tetragonal ring. The first protrusion preferably forms a substantially regular tetragonal ring, and the first protrusion may be broken at midpoint of each side of the tetragon. The second protrusion may have a cross shape. The number of the first and the second protrusions may be equal to or more than one. The polarizing directions of the first and the second polarizers are parallel to transverse and longitudinal directions of the first protrusion respectively.

[0015] Protrusion ratio and luminance increases if a portion of the first protrusion is formed outside of a portion corresponding to the pixel electrode.

[0016] When the first and the second substrates are viewed from the top, a region defined by the first and the second protrusions preferably forms a substantially closed polygon, and angle made by the protrusion on one substrate is preferably an obtuse angle. In addition, a long diagonal in a region defined by the first and the second protrusions is a diagonal substantially perpendicular to the liquid crystal director in the regions while a voltage is applied to the pixel electrode and the common electrode and when the first and the second substrates are viewed from the top.

[0017] A saw shape protrusion may be formed on a pixel electrode and a gate wiring in the thin film transistor (TFT) substrate may overlaps the protrusion. In the color filter substrate, a saw shape protrusion formed on the common electrode and a black matrix overlapping the protrusion may be formed.

[0018] The black matrix may include a portion put across the bent points of the first and the second saw shape protrusion and a triangular portion covering a portion that the first and the second protrusions meet a boundary of the pixel electrode.

[0019] The black matrix may include another portion overlapping the first protrusion instead that the gate wiring overlaps the first protrusion.

[0020] On the other hand, a first and a second saw shape protrusions parallel and alternate to each other are formed on the common electrode and the pixel electrode respectively, and the pixel electrode may have a saw shape which is convex between points where the first and the second protrusions meet the pixel electrode. The angle between the first protrusion and a boundary of the pixel electrode near the saw shape convex portion is preferably equal to or more than 90°.

[0021] The pixel electrode may have a saw shape surrounding the first and the second protrusions.

[0022] By forming protrusions on the transparent electrodes in above-described way, a liquid crystal layer between two electrodes are divided to four regions that the directors of the liquid crystal layer have different angles when a voltage is applied to the electrodes, thereby viewing angle is widened and disclination is removed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIGS. 1A and 1B are schematic diagrams of the alignment of liquid crystal molecules of a VATN LCD respectively in black state and white state according to an embodiment of the present invention.

[0024] FIG. 2 shows the structure of the protrusion and the alignment of the liquid crystal molecules of a VATN LCD according to an embodiment of the present invention.

[0025] FIGS. 3 and 4 are layout views of protrusion patterns for forming multi-domains according to the first and the second embodiments of the present invention.

[0026] FIG. 5 is an enlarged view of portion (a) in FIG. 4.

[0027] FIGS. 6A and 6B are layout views showing two protrusion pattern for forming multi-domains according to the third embodiment of the present invention.

[0028] FIG. 7 is a sectional view of the substrate shown in FIG. 6A taken along the line VII-VII'.

[0029] FIG. 8 is an enlarged view of portion (b) in FIG. 6A.

[0030] FIGS. 9A and 9B are layout views showing two protrusion patterns for forming multi-domains according to the fourth embodiment of the present invention.

[0031] FIGS. 10 to 13 are layout views of protrusion patterns for forming multi-domains according to the fifth to the eighth embodiments of the present invention, respectively.

[0032] FIG. 14 is a layout view of a TFT substrate according to the ninth embodiment of the present invention.

[0033] FIG. 15 is a layout view of a color filter substrate opposite the TFT substrate in FIG. 14 according to the ninth embodiment of the present invention.

[0034] FIG. 16 is a layout view of an LCD having the TFT substrate and the color filter substrate shown in FIGS. 14 and 15 according to the ninth embodiment of the present invention.

[0035] FIG. 17 is a sectional view of the LCD shown in FIG. 16 taken along the line XVII-XVII'.

[0036] FIG. 18 is a layout view of a color filter substrate according to the tenth embodiment of the present invention.

[0037] FIGS. 19 and 20 are layout views of LCDs according to the eleventh and the twelfth embodiments of the present invention respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0038] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the present invention are shown. This invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, the thickness of layers and regions are exaggerated for clarity.

[0039] FIGS. 1A and 1B are schematic diagrams of the alignment of liquid crystal molecules of a VATN LCD respectively in black state and white state according to an embodiment of the present invention.

[0040] As shown in FIGS. 1A and 1B, two glass or quartz substrates 1 and 2 are spaced apart from each other. On the inner surfaces of the substrates 1 and 2, transparent electrodes 12 and 120 made of a transparent conductive material such as ITO (indium tin oxide) or the like are formed respectively, and alignment layers 14 and 140 are formed thereon respectively. Between the substrates 1 and 2, a liquid crystal layer 100 including a chiral nematic liquid crystal having negative dielectric anisotropy is disposed. On the outer surfaces of the substrates 1 and 2, polarizers 13 and 130 are attached. The polarizers 13 and 130 polarize the incident ray on the liquid crystal layer 100 and the rays out of the liquid crystal layer 100 respectively. The polarizing directions of the polarizers 13 and 130 are perpendicular to each other. The alignment layers 14 and 140 may be rubbed or not.

[0041] FIG. 1A shows the off state that the electric field is not applied, where the long molecular axes of the liquid crystal molecules 3 in the liquid crystal layer 100 are aligned perpendicular to the surface of the substrates 1 and 2 by the aligning force of the alignment layers 14 and 140.

[0042] The polarized light by the polarizer 13 attached to the lower substrate 1 passes through the liquid crystal layer 100 without changing its polarization.

[0043] Then, the light is blocked by the analyzer 130 attached to the upper substrate 2 to make a black state.

[0044] FIG. 1B shows the on state that the sufficient electric field is applied to the liquid crystal layer 100 by the electrode 4 and 5, where the liquid crystal molecules 3 in the liquid crystal layer 100 are twisted spirally by 90° from the lower substrate 1 to the upper substrate 2, and the director of the liquid crystal layer 100 varies continuously. However, near the inner surfaces of two substrates 1 and 2, the aligning force of the alignment layers 14 and 140 is larger than the force due to the applied electric field, and the liquid crystal molecules stay vertically aligned.

[0045] The polarized light by the polarizer 13 passes through the liquid crystal layer 100 and its polarization is

rotated by 90° according to the variation of the director of the liquid crystal layer **100**. Therefore, the light passes through the analyzer **130** to make a white state.

[0046] **FIG. 2** shows the structure of the protrusion and the alignment of the liquid crystal molecules of a VATN LCD according to an embodiment of the present invention.

[0047] As shown in **FIG. 2**, a protrusion **11** is formed on a lower substrate **1**, and a homeotropic alignment film **6** is formed thereon. Because the long axes of the liquid crystal molecules tend to be perpendicular to the surface due to the aligning force of the alignment film **6**, in absence of electric field, the directions of the long axes of the liquid crystal molecules **3** near the protrusion **11** are tilted to the direction perpendicular to the surface of the protrusion **11**.

[0048] If the sufficient electric field is applied to the liquid crystal layer, the long axes of the liquid crystal molecules **3** tend to be perpendicular to the field direction since the liquid crystal layer has negative dielectric anisotropy. Then, the liquid crystal molecules **3** are tilted and twisted to parallel to the substrates **1** and **2**. Because the liquid crystal molecules **3** are tilted to the opposite directions in the initial state, the liquid crystal molecules **3** lie along the initially tilted direction, then, the lying directions of the liquid crystal molecules are opposite with respect to the central surface of the protrusion **11**. Therefore, two regions having different tilt directions are formed thereby widening the viewing angle.

[0049] If a protrusion **11** is formed on the substrate **1** and **2** as shown in **FIG. 2**, it is easy to obtain a multi-domain LCD by a simple process than another process such as rubbing. In addition, the relatively small regions having different arrangements of the liquid crystal molecules can be generated, and the regions can have various forms.

[0050] On the other hand, characteristics such as luminance, response time and afterimages, etc., of LCD panels depend considerably on the alignment of liquid crystal molecules. Therefore, the shape of the protrusion pattern is important.

[0051] The protrusion pattern for a multi-domain LCD preferably satisfies the conditions that will now be described.

[0052] First, it is preferable that the number of the domains which have different average axial directions, especially in a pixel, is at least two, and more preferably the number is four. Here, the average axial direction in a domain means the average direction of the long axes of the liquid crystal molecules in the domain.

[0053] Second, it is preferable that the protrusions on the upper and the lower substrates form substantially closed areas and thus substantially closed domains, when viewed from the top. It is because that the texture where the arrangement of the liquid crystal molecules is disordered is generated near the ends of the protrusions, and thus the ends of the protrusions are preferably closely located. Furthermore, the protrusion patterns forming a domain has preferably a rectangular shape.

[0054] Third, the average axial direction of each domain, when viewed from the top, preferably makes $45^\circ \pm 10^\circ$, more preferably 45° with the polarizing directions of the polarizers especially when using crossed polarizers. This is because high luminance is obtained. In addition, it is preferable that

the average axial directions of the adjacent domains are perpendicular to each other. Furthermore, the width of the protrusion and the distance between the protrusions are preferably $3\text{--}20\ \mu\text{m}$ and $5\text{--}20\ \mu\text{m}$. If the width of the protrusion is larger than the former value or the distance between the protrusions is less than the latter value, the aperture ratio is reduced, thereby reducing luminance and transmittance. On the contrary, if the width of the protrusion is less than the former value or the distance between the protrusions is larger than the latter value, the strength of the fringe field becomes weak, thereby increasing response time and generating disordered textures.

[0055] Finally, the boundaries of the protrusions are preferably linear, slowly curved or bent with an obtuse angle in order to make the arrangement of the liquid crystal molecules to be uniform, thereby reducing the response time. In particular, when the protrusions on the lower and upper substrates face each other and form a substantially closed area, it is preferable that the boundaries of the facing portions of the protrusions are preferably linear, slowly curved or bent with an obtuse angle. It is preferable that the width of the protrusion becomes larger as goes from the ends to the center.

[0056] Now, the first embodiment of the present invention will be described with reference to **FIG. 3**. **FIG. 3** shows a single pixel region. Only a protrusion pattern for a multi-domain LCD is illustrated in **FIG. 3**, and other elements such as TFTs, wires, etc., are not illustrated.

[0057] The first embodiment shown in **FIG. 3** satisfies the fourth condition to obtain fast response time.

[0058] A linear protrusion **26** is formed longitudinally in the center of a pixel region of a TFT substrate, and two linear longitudinal protrusions **16** are formed alternately to the protrusion **26** on a color filter substrate. In the LCD having a protrusion pattern shown in **FIG. 3**, the liquid crystal molecules incline in parallel or in antiparallel directions when electric field is generated. That is, the long axes of the liquid crystal molecules are all arranged perpendicular to the direction of protrusions **16** and **26**. Polarizing directions **P1** and **P2** are perpendicular to each other and make an angle of 45° with respect to the extending direction of the protrusions **16** and **26**. This arrangement of the liquid crystal molecules is very stable, and then, the response time is very fast as about 30 ms. However, in this case, only 2 domains are formed, and the viewing angle is not good compared with 4-domain cases.

[0059] A protrusion pattern to solve the above-described problem is the second embodiment of the present invention shown in **FIG. 4**.

[0060] Protrusions **17** formed on a color filter substrate and protrusions **27** formed on a TFT substrate have all saw shapes and the protrusions **17** and **27** are arranged alternately. The bent portions of the saw-shaped protrusions are placed on the transverse line passing through the center of a pixel. The protrusion pattern shown in **FIG. 4** is essentially similar to the protrusion pattern shown in **FIG. 3** except having the bent portions, and, therefore, the response time is short. In addition, the LCD having the protrusion pattern shown in **FIG. 4** has wide viewing angle because the protrusion pattern may form 4 domains in a pixel. Polarizing directions **P1** and **P2** are perpendicular to each other and

make an angle of 45° to the saw-shaped protrusions **17** and **27**, and then, the polarizing directions make an angle of 45° with respect to the directions of the long axes of the liquid crystal molecules.

[0061] In this case, however, the arrangement of liquid crystal molecules falls into disorder near the bent portions of the protrusions **17** and **27**, and disclination is generated near the position where the protrusion **27** meets the boundary of the pixel electrode **20** because the angle therebetween is acute, as shown in **FIG. 5** which is an enlarged layout view of portion (a) of **FIG. 4**. **FIG. 5** shows that the arrangement of the liquid crystal molecules falls into disorder in the region **A**, which causes the decrease of the luminance. Moreover, the disorder of the arrangement may cause the afterimage because the disordered region may move whenever different pixel voltages are applied.

[0062] According to the third embodiment of the present invention shown in **FIGS. 6A and 6B**, the disclination generated in the second embodiment may be removed.

[0063] **FIGS. 6A and 6B** are layout views showing two protrusion pattern for forming multi-domains according to the third embodiment of the present invention. **FIG. 7** is a sectional view of the substrate shown in **FIG. 6A** taken along the line VII-VII'.

[0064] As shown in **FIGS. 6A and 7**, an LCD according to the third embodiment of the present invention includes a lower TFT substrate **200** and an upper color filter substrate **100**. Though it is not shown in the figures, a plurality of gate lines and data lines are formed on the inner surface of the TFT substrate **200**, and in a unit pixel region which is defined by the gate lines and data lines, a pixel electrode **20** and a TFT as a switching element are formed. On the inner surface of the color filter substrate **100** opposite to the TFT substrate **200**, a black matrix pattern **11** which defines a unit pixel region corresponding to the unit pixel region in the TFT substrate is formed, and a color filter **12** is formed therewithin. Protrusions **17** and **27** made of an organic material or the like are formed on the common electrode **10** and the pixel electrode **20**. Vertical alignment films **15** and **25** are formed on the substrates **100** and **200** having protrusions **17** and **27**.

[0065] To the outer surfaces of the substrates **100** and **200**, polarizers **16** and **26** are attached respectively. Polarizing directions **P1** and **P2** of the polarizers **16** and **26** are respectively in transverse and longitudinal directions. Compensation films **41** and **42** are interposed between polarizer **16** and **26** and the substrates **100** and **200** respectively. An a-plate compensation film may be attached to one substrate and a c-plate compensation film may be attached to the other substrate, or two c-plate compensation films may be attached. A biaxial compensation film may be used instead of the uniaxial compensation film, and, in this case, the biaxial compensation film may be attached to only one substrate. The slow axis, which is the direction having a largest refractive index, of the a-plate or biaxial compensation film may be parallel or perpendicular to the polarizing directions.

[0066] The shape of the protrusion pattern is substantially similar to the pattern of the second embodiment. That is, protrusions **17** formed on a color filter substrate and protrusions **27** formed on a TFT substrate have all saw shapes and

the protrusions **17** and **27** are arranged alternately. The bent portions of the saw-shaped protrusions are placed on the line transverse passing through the center of a pixel. Branches **172** and **272** extend from the convex point of one saw-shaped protrusion toward the apex to the other saw-shaped protrusion. A branch **171** of the protrusion **17** extend from the point where the protrusion **17** meets the boundary of the pixel electrode **20** toward the point where the boundary of the pixel electrode **20** and the saw-shaped protrusion **27** make an acute angle. Therefore, the edges of the protrusions formed on the two substrates are close, and the condition that the protrusion has only obtuse angles are satisfied thereby removing the disclination.

[0067] The liquid crystal molecules are tilted and twisted to the direction perpendicular to the protrusions **17** and **27** when the electric field is generated, and the average direction of the liquid crystal molecules in each region defined by the protrusions **17**, **27**, **171**, **172** and **272** makes an angle of 45° with respect to the polarizing directions of the polarizer **16** and **26**.

[0068] The width of the protrusions **17** and **27** is preferably in the range of $3\text{--}20\text{ }\mu\text{m}$. If the width is too narrow, the region where the liquid crystal molecules incline by the protrusion is too small and, therefore, the effect of multi-domains is not sufficiently gained. On the contrary, if the width is too broad, the aperture ratio becomes low.

[0069] The width of the branches **171**, **172** and **272** may gradually decrease from the point connected to the protrusions **17** and **27** to the end of the branches **171**, **172** and **272**.

[0070] The distance between protrusions **17** and **27** is preferably in the range of $5\text{--}20\text{ }\mu\text{m}$, and the height of the protrusions **17** and **27** is preferably in the range of $0.3\text{--}3.0\text{ }\mu\text{m}$.

[0071] The liquid crystal molecules are arranged in order by the branch **171** as shown in **FIG. 8** which is an enlarged layout view of portion (b) of **FIG. 6A**.

[0072] On the other hand, an LCD shown in **FIG. 6B** is substantially similar to the LCD shown in **FIG. 6A** except the direction of the saw-shaped protrusions **17** and **27**. It depends on the pixel structure such as the position of the TFT.

[0073] If the average directions of the long axes of the liquid crystal molecules in adjacent regions defined by the protrusions make a right angle, luminance may increase. This structure is described in the fourth embodiment of the present invention.

[0074] **FIGS. 9A and 9B** are layout views showing two protrusion patterns for forming multi-domains according to the fourth embodiment of the present invention. Only the protrusion pattern is shown in **FIGS. 9A and 9B**.

[0075] First, as shown in **FIG. 9A**, linear protrusions **11** and **21** in both transverse and longitudinal directions are formed alternately on the TFT substrate and the color filter substrate. The protrusions **21** formed on the TFT substrate is noted as bold lines and those **11** on the color filter substrate is noted as hatched bars. When viewed from the top, the liquid crystal molecules in a regular tetragonal shaped region which is defined by the protrusions **11** and **21** are aligned from a bent point of the protrusion of one substrate to a bent point of the protrusion of the other substrate, as

shown in **FIG. 9A**. In adjacent tetragonal regions, the liquid crystal directors make a right angle.

[0076] The protrusion pattern shown in **FIG. 9A** satisfies the first and the second conditions above-described. That is, four regions having different alignment are in a unit pixel region, the protrusions **11** and **21** formed on the upper and the lower substrates are arranged alternately, and the angle made by the protrusion in one substrate is either 90° or 180° , and the liquid crystal directors in adjacent regions make a right angle.

[0077] The polarizing directions **P1** and **P2** of the polarizers may be in transverse and longitudinal directions of the pixel respectively to have an angle of 45° relative to the directors when a sufficient voltage is applied.

[0078] In the LCDs having the protrusion pattern shown in **FIG. 9A**, the liquid crystal molecules are arranged to face each other in each two regions in diagonal directions immediately after the voltage is applied. However, the arrangement of the liquid crystal molecules are changed slowly by the tendency to be parallel to each other, and the liquid crystal molecules stop moving when the arrangement becomes stable. Accordingly, the LCD may show slow response time.

[0079] A protrusion pattern shown in **FIG. 9B** is similar to the protrusion pattern shown in **FIG. 9A**, but the region defined by protrusions has a rectangular shape instead of a right tetragonal shape. In this case, an angle made by the liquid crystal directors in adjacent regions is not exactly 90° , and an angle between the polarizing directions and the extending directions of the protrusions is not exactly 45° . However, in this case, one of the transverse or longitudinal directions is preferred by the liquid crystal molecules because the direction of long axes of the liquid crystal molecules makes a less angle with one of the two directions than with the other. Therefore, the arrangement of the liquid crystal molecules becomes quickly stable, and thus the response time is relatively short than the LCD shown in **FIG. 9A**.

[0080] The region defined by the protrusions may have a tetragonal shape having a long diagonal in a direction substantially perpendicular to the liquid crystal director in the regions to improve the response time by enlarging the width of the protrusions near the bent points. This structure is described in the fifth embodiment of the present invention.

[0081] **FIG. 10** is a layout view of a protrusion pattern for forming multi-domains according to the fifth embodiment of the present invention.

[0082] As shown in **FIG. 10**, shapes of the protrusions **13** and **23** are basically similar to those of the LCD shown in **FIG. 9A** according to the fourth embodiment. That is, the protrusions **13** on the color filter substrate form substantially tetragonal rings, and the protrusions **23** on the TFT substrate have cross shapes whose centers are located at the center of the regions defined by the protrusions **13** which form tetragonal rings. Then, the protrusions on the color filter substrate **100** and on the TFT substrate **200** are arranged alternately in both transverse and longitudinal directions.

[0083] The protrusions **13** and **23** on two substrates are arranged alternately to define substantially closed tetragonal regions. That is, the distance between end portions of the

protrusions **13** and **23** is less than the distance between remaining portions of the protrusions **13** and **23**. It is possible that the edges of the protrusions **13** and **23** on the substrates are connected to each other such that the region defined by the protrusions **13** and **23** form a closed polygon when the substrates are shown from the top. Moreover, though the protrusions **13** on the color filter substrate which form substantially tetragonal ring are broken at the midpoint of each side of the tetragon, it is possible to form the protrusion **13** having a closed tetragonal shape.

[0084] The width of the protrusion **23** decreases as goes from the vertex of the tetragon to the midpoints of the sides of the tetragon, and that of the protrusion **13** decreases as goes from the center of the cross to the edges of the branches of the cross. That is, the protrusion formed on one substrate has an obtuse angle at the bent portion of the protrusion, and the angle made by two protrusions on the different substrates are acute angle when the substrates are viewed from the top. Then, the diagonal substantially perpendicular to the liquid crystal director of the region defined by the protrusions **13** and **23** becomes longer than the diagonal substantially parallel to the liquid crystal director. The ratio of the diagonal perpendicular to the director with respect to the diagonal parallel to the director becomes larger if the width of the protrusions **13** and **23** is more enlarged at the bent point. Since the liquid crystal molecules become more uniformly aligned as the protrusions **13** and **23** are parallel to each other, the response time becomes reduced, as the ratio becomes large. The region defined by the protrusions **13** and **23** is symmetrical with respect to the diagonal perpendicular or parallel to the liquid crystal director.

[0085] The polarizing directions **P1** and **P2** of the polarizers may be in transverse and longitudinal directions of the pixel respectively to have an angle of 45° relative to the directors when a sufficient voltage is applied.

[0086] According to the fifth embodiment, four tetragonal rings formed of the protrusions exist in a unit pixel. However, the number of the rings may vary according to the conditions such as the size of the pixel. Still, to obtain the optimum luminance, the protrusions preferably form regular tetragonal rings.

[0087] The width and the height of the protrusion **13** and **23** are similar to those of the third embodiment. The distance between the bent points of the protrusions **13** and **23** is in the range of 10-50 μm and more preferably in the range of 23-30 μm . However, it depends on the size or the shape of the pixel.

[0088] As in the sixth embodiment shown in **FIG. 11**, protrusions **14** are expanded from the vertex to the center of the tetragon and cross-shaped protrusions **24** are expanded from the center of the cross to the space between the branch of the cross such that the distance between the central portions of the protrusions **14** and **24** are close. That is, the protrusions **14** and **24** have other edges facing each other and parallel to each other, and the region enclosed by the protrusions **14** and **24** is substantially hexagonal. Therefore, the protrusions becomes relatively parallel to each other compared with those shown in **FIG. 10**, and thus the response time is reduced. However, the protrusion **24** has a tetragonal central portion **241** which has considerable area, and the protrusion **14** has a bent portion also having considerable area, thereby decreasing the protrusion ratio.

[0089] To increase the protrusion ratio, the protrusion pattern may be formed as in the seventh embodiment shown in FIG. 12. That is, the central portion 251 of the protrusion 25 is formed to have a tetragonal ring shape, and a linear protrusion 252 is formed in the central portion 251. Then, there are four longish regions formed at the rim and two small longish regions at the center. In this case, the pattern is somewhat complicated, but, high luminance, wide viewing angle and fast response time can be obtained.

[0090] In the meantime, the shape of the protrusions formed on the substrates may be exchanged. That is, according to the fourth to the seventh embodiments of the present invention, the tetragonal ring shaped protrusions are formed on the color filter substrate and the cross-shaped or modified cross-shaped protrusions are formed on the TFT substrate. However, they may be formed on opposite substrates.

[0091] In the fourth to the seventh embodiments of the present invention, aperture ratio and luminance may be improved if some portions of the protrusions in the common electrode are placed outside the pixel region. FIG. 13 is a layout view of an LCD according to the eighth embodiment of the present invention.

[0092] As shown in FIG. 13, a tetragonal ring shaped protrusion 13 formed on a common electrode 10 is placed outside the pixel electrode 20 depicted by a dotted line in FIG. 13 to be shielded by a black matrix 11. The remaining structure is similar to that of the fifth embodiment of the present invention shown FIG. 10.

[0093] In the LCD shown in FIG. 4 according to the second embodiment, disclination may be prevented by a black matrix or a wiring instead of forming branch protrusions.

[0094] FIGS. 14 and 15 are layout views of a color filter substrate and a TFT substrate according to the ninth embodiment respectively.

[0095] As shown in FIG. 14, a portion 210 of a gate line 21 which transmits a scanning signal is formed to have substantially the same shape as one of the protrusions which has the same shapes as those in FIG. 4. That is, the portion 210 of the gate line 21 has a trapezoid shape without the lower side. Then, the portion 210 made of opaque metal blocks the light from the backlight, and, therefore the light leakage or the decrease of luminance can be removed.

[0096] Next, as shown in FIG. 15, a black matrix 11 is formed on the color filter substrate to cover the regions where disclination is generated and the protrusion in the common electrode. The disclination regions are, as described above, the region where the protrusion 27 on the TFT substrate meets the boundary of the pixel electrode 20 and the region where the saw-shaped protrusions 17 and 27 are bent. The black matrix pattern which covers the disclination includes, as shown in FIG. 15, an edge portion 111 surrounding and defining a pixel region, a saw-shaped portion 112 to cover the protrusions 17, a triangular portion 113 to cover the disclination between saw-shaped protrusions 17 and 27 and a center portion 114 put across the pixel region to cover the disclination generated in the bent portion of the protrusions 17 and 27. Then, the light leakage generated by the disclination or the protrusions is prevented by the black matrix 11. Moreover, additional decrease of the protrusion ratio does not occur though the black matrix 11 is

formed to have relatively large area because the region that the black matrix covers may not be used for display.

[0097] FIG. 16 is a layout view of an LCD having the TFT substrate and the color filter substrate shown in FIGS. 14 and 15 according to the ninth embodiment of the present invention. FIG. 17 is a sectional view of the LCD shown in FIG. 16 taken along the line XVII-XVII'.

[0098] As shown in FIGS. 16 and 17, a portion 210 of a gate line 21 is formed on a lower TFT substrate 200. The portion 210 has a trapezoid shape without the lower side. An insulating layer 22 covers the gate line 21, and a pixel electrode 23 is formed thereon. A saw-shaped protrusion 27 over the portion 210 of the gate line 21 is formed using an organic material or the like. A vertical alignment layer 24 is formed thereon.

[0099] On the other hand, a black matrix 11 is formed on an upper color filter substrate 100 to shield the outside of the pixel regions, the protrusion and the disclination regions. In the pixel region within the black matrix 11, a color filter 12 is formed. An ITO common electrode 13 is formed thereon. A protrusion 17 is formed on the common electrode. The protrusion 17 is arranged alternately to the protrusion 27 formed on the lower substrate, and the protrusions 17 and 27 are parallel to each other. A vertical alignment layer 14 is formed to cover the protrusion 17 and the common electrode 10.

[0100] A liquid crystal material layer with negative dielectric anisotropy is interposed between two substrate 100 and 200, and the liquid crystal molecules in most regions are homeotropically aligned to the substrates 100 and 200 by the aligning force of the alignment layers 14 and 24. The liquid crystal molecules near the protrusions 17 and 27 are tilted by the protrusions.

[0101] It is possible to form a gate line as in a conventional LCD and the protrusions formed on the lower substrate is also covered by the black matrix, as shown in FIG. 18 which is a layout view of a color filter substrate according to the tenth embodiment of the present invention.

[0102] A black matrix 11 is formed to define a pixel region and to cover the protrusion 17 to form multi-domain, the disclination between saw-shaped protrusions 17 and 27 and the disclination generated in the bent portion of the protrusions 17 and 27 as in the ninth embodiment. In addition, the black matrix 11 includes another portion to cover the protrusion 27 formed on the lower substrate.

[0103] If the black matrix covers the protrusions and the disclination as in the tenth embodiment, it is not necessary to consider the influence due to the change of the gate line pattern and no additional process step is required.

[0104] Moreover, the shape of the pixel electrode may be changed instead of forming the branch protrusion in the second embodiment.

[0105] As shown in the above, the region where the disclination is generated is the region where the protrusion on the TFT substrate meets the boundary of the pixel electrode. This region is the place where the first condition that the bent angle of the protrusion pattern should be an obtuse angle is not satisfied because the boundary of the pixel electrode is essentially similar to the protrusion. That is, the arrangement of the liquid crystal molecules falls into

disorder, and the disordered arrangement causes the decrease of the luminance and the afterimage.

[0106] Therefore, in the eleventh embodiment of the present invention, the shape of the pixel electrode **21** is changed to make an angle between the protrusion **27** formed in the pixel electrode **21** and the boundary of the pixel electrode **21** to be an obtuse angle. Then, as shown in **FIG. 19**, the pixel electrode **21** has a saw shape which is convex between the protrusions **17** and **27** formed in the common electrode and the pixel electrode respectively.

[0107] In the twelfth embodiment of the present invention, the pixel electrode is formed to have a saw shape surrounding the protrusions as shown in **FIG. 20** which is a layout view of an LCD according to the twelfth embodiment of the present invention.

[0108] Since the pixel electrode **22** is formed to have a saw shape surrounding the protrusions **17** and **27**, the regions where the protrusions **17** and **27** meet the boundary of the pixel electrode are removed thereby removing the disclination.

[0109] In the eleventh and the twelfth embodiments of the present invention, the width and the height of the protrusions and the distance therebetween are similar to those in the third embodiment.

[0110] According to the embodiments of the present invention, multi-domain LCDs are formed using various protrusion patterns to control the arrangement of liquid crystal molecules, therefore wide viewing angle is obtained, disclination is removed and the luminance is increased.

[0111] In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims:

What is claimed is:

1. A liquid crystal display comprising:

a first substrate having an inner surface and an outer surface;

a first electrode on the inner surface of the first substrate;

a first protrusion on the first electrode;

a second substrate opposite the first substrate and having an inner surface and an outer surface;

a second electrode on the inner surface of the second substrate and located at a position corresponding to the first electrode; and

a second protrusion on the second electrode,

wherein boundaries of the first and the second protrusions are linear, curved or bent with an obtuse angle.

2. The liquid crystal display of claim 1, wherein the first and the second protrusions form a substantially closed area.

3. The liquid crystal display of claim 2, wherein the first and the second protrusions forming the substantially closed area are arranged symmetrically.

4. The liquid crystal display of claim 3, wherein the width of the first and the second protrusions becomes larger from ends to centers of the first and the second protrusions.

5. The liquid crystal display of claim 3, wherein width of the first and the second protrusions is 3-20 μm .

6. The liquid crystal display of claim 3, wherein distance between the first and the second protrusions is 5-20 μm .

7. The liquid crystal display of claim 3, further comprising:

a liquid crystal layer interposed between the first and the second substrates and having negative dielectric anisotropy;

a first and a second alignment layers on the first and the second electrodes respectively, the first and the second alignment layers aligning the long axes of liquid crystal molecules in the liquid crystal layer to be perpendicular to the first and the second substrates; and

a first and a second polarizers on the outer surfaces of the first and the second substrates, respectively.

8. The liquid crystal display of claim 7, wherein the polarizing directions of the polarizers are perpendicular to each other.

9. The liquid crystal display of claim 8, wherein the number of average axial directions of domains defined by the first and the second protrusions is four.

10. The liquid crystal display of claim 9, wherein the average axial directions make $45^\circ \pm 10^\circ$ with the polarizing directions of the first and the second polarizers.

11. The liquid crystal display of claim 10, wherein the average axial directions of adjacent domains makes substantially right angle.

12. The liquid crystal display of claim 1, wherein the second protrusion makes an oblique angle with boundaries of the second electrode, and the first protrusion comprises a first portion parallel to the second protrusion and a second portion formed at a position corresponding to the boundary of the second electrode where an angle between the second protrusion and the boundary of the second electrode is an acute angle.

13. The liquid crystal display of claim 12, wherein an angle between the first and the second portions is an obtuse angle.

14. The liquid crystal display of claim 13, wherein the first and the second portions are connected to each other.

15. The liquid crystal display of claim 14, wherein the width of the second portion of the first protrusion decreases as goes from the connection with the first portion to the edge of the second portion.

16. The liquid crystal display of claim 12, further comprising:

a third protrusion formed on the first electrode, wherein the first protrusion has a first bent portion and the third protrusion extending from the convex side of the first bent portion to the second protrusion; and

a fourth protrusion formed on the second electrode, wherein the second protrusion has a second bent portion and the fourth protrusion extending from the convex side of the second bent portion to the first protrusion.

17. The liquid crystal display of claim 16, wherein an angle between the third protrusion and the first portion of the first protrusion and an angle between the fourth protrusion and the second protrusion are obtuse angles.

18. The liquid crystal display of claim 19, wherein the third protrusion is connected to the first portion of the first protrusion, and the fourth protrusion is connected to the second protrusion.

19. The liquid crystal display comprising:

a first substrate having an inner surface and an outer surface;

a first electrode on the inner surface of the first substrate;

a first protrusion on the first electrode;

a second substrate opposite the first substrate and having an inner surface and an outer surface;

a second electrode on the inner surface of the second substrate and located at a position corresponding to the first electrode; and

a second protrusion on the second electrode,

wherein the first and the second protrusions form a substantially closed area.

20. A liquid crystal display comprising:

a first substrate having an inner surface and an outer surface;

a first electrode on the inner surface of the first substrate;

a first protrusion on the first electrode;

a second substrate opposite the first substrate and having an inner surface and an outer surface;

a second electrode on the inner surface of the second substrate and located at a position corresponding to the first electrode; and

a second protrusion on the second electrode,

wherein the width the first and the second protrusions becomes larger from ends to centers of the first and the second protrusions.

21. A panel for a liquid crystal display comprising:

a transparent insulating substrate;

a pixel electrode formed on the substrate;

a saw shape protrusion formed on the pixel electrode; and wires overlapping the protrusion.

22. A panel for a liquid crystal display comprising:

a transparent insulating substrate;

a common electrode formed on the substrate;

a saw-shaped protrusion formed on the common electrode; and

a black matrix overlapping the protrusion.

* * * * *

专利名称(译)	具有宽视角的液晶显示器		
公开(公告)号	US20030202144A1	公开(公告)日	2003-10-30
申请号	US10/404443	申请日	2003-04-02
[标]申请(专利权)人(译)	KIM KYEONG铉 LEE KYE HUN 朴升BEOM SONG JANG KUN		
申请(专利权)人(译)	KIM KYEONG铉 李KYE-HUN 朴升BEOM SONG JANG-KUN		
当前申请(专利权)人(译)	LAM研究公司		
[标]发明人	KIM KYEONG HYEON LEE KYE HUN PARK SEUNG BEOM SONG JANG KUN		
发明人	KIM, KYEONG-HYEON LEE, KYE-HUN PARK, SEUNG-BEOM SONG, JANG-KUN		
IPC分类号	G09F9/30 G02F1/1333 G02F1/1335 G02F1/1337 G02F1/1343		
CPC分类号	G02F1/133707 G02F2001/133776 G02F1/133753		
优先权	1019980018164 1998-05-20 KR		
外部链接	Espacenet USPTO		

摘要(译)

彼此平行的锯齿形突起形成在两个基板中的公共电极和像素电极上。两个基板中的突起交替排列，并且锯齿形突起的弯曲部分放置在穿过像素中心的横向线上。分支从一个锯齿状突起的凸起朝向顶点延伸到另一个锯齿状突起，另一个分支从突起与像素电极的边界相交的点朝向像素电极的边界延伸。并且锯齿形突起形成锐角。两个电极之间的液晶层被分成四个区域，其中当向电极施加电压时液晶层的指向矢具有不同的角度，然后，获得宽视角。在大多数区域中，突起形成为直的，并且突起在弯曲点处仅具有钝角。因此，缩短了快速响应时间，消除了旋错并且亮度增加。

