



(11) **EP 1 169 749 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.05.2010 Bulletin 2010/21

(21) Application number: **00922135.9**

(22) Date of filing: **13.04.2000**

(51) Int Cl.:
G01R 33/28 (2006.01)

(86) International application number:
PCT/US2000/009875

(87) International publication number:
WO 2000/064003 (26.10.2000 Gazette 2000/43)

(54) **MAGNETIC RESONANCE IMAGING GUIDEWIRE PROBE**

SONDE MIT FÜHRUNGSDRAHT FÜR BILDERZEUGUNG MITTELS MAGNETISCHER RESONANZ
SONDE A FIL-GUIDE POUR L'IMAGERIE PAR RESONANCE MAGNETIQUE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **15.04.1999 US 129364 P**
24.03.2000 US 536090 P

(43) Date of publication of application:
09.01.2002 Bulletin 2002/02

(73) Proprietors:
• **Surgi-Vision**
Columbia, MD 21045 (US)
• **The Johns Hopkins University,**
School of Medicine,
Office of Technology Licencing
Baltimore, MD 212002 (US)

(72) Inventors:
• **LARDO, Albert, C.**
Baldwin, MD 21013 (US)
• **YANG, Xiaoming**
Baltimore, MD 21209 (US)
• **ATALAR, Ergin**
Columbia, MD 21045 (US)
• **KARMARKAR, Parag**
Elliott City, MD 21043 (US)
• **McVEIGH, Elliott, R.**
Timonium, MD 21093 (US)

- **HALPERIN, Henry, R.**
Baltimore, MD 21208 (US)
- **McNAMARA, Christine, Enger**
Chelmsford, MA 01824 (US)
- **BOTTOMLEY, Paul, A.**
Columbia, MD 21044 (US)

(74) Representative: **Barton, Matthew Thomas et al**
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)

(56) References cited:
EP-A- 0 466 424 EP-A- 0 673 621
WO-A-00/25672 WO-A-97/35639
WO-A-97/40396 WO-A-98/43318
US-A- 4 960 106 US-A- 5 437 277
US-A- 5 520 644 US-A- 5 546 948
US-A- 5 928 145 US-A- 5 968 052

- **LARDO AC ET AL: "A loopless helical**
intravascular MR imaging antenna"
PROCEEDINGS OF THE INTERNATIONAL
SOCIETY FOR MAGNETIC RESONANCE IN
MEDICINE, ISMRM 8TH SCIENTIFIC MEETING
AND EXHIBITION, 1-7 APRIL 2000, 1 April 2000
(2000-04-01), page 1312, XP002384817

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 169 749 B1

Description

Background of the Invention

Field of the Invention

[0001] This invention relates to the field of radio frequency antennas. More particularly to the use of radio frequency antennas as guidewires used in vivo in conjunction with magnetic resonance imaging techniques.

Description of Related Art

[0002] Magnetic resonance imaging (MRI) is a well known, highly useful technique for imaging matter. It has particular use with imaging the human body or other biological tissue without invasive procedures or exposure to the harmful radiation or chemicals present with x-rays or CT scans. MRI uses changes in the angular momentum or "spin" of atomic nuclei of certain elements to show locations of those elements within matter. In an MRI procedure, a subject is usually inserted into an imaging machine that contains a large static magnetic field generally on the order of 0.2 to 4 Tesla although machines with higher strength fields are being developed and used. This static magnetic field tends to cause the vector of the magnetization of the atomic nuclei placed therein to align with the magnetic field. The subject is then exposed to pulses of radio frequency (RF) energy in the form of a second, oscillating, RF magnetic field having a particular frequency referred to in the art as a resonant or Larmor frequency. This frequency is equal to the rate that the spins rotate or precess.

[0003] This second field is generally oriented so that its magnetic field is oriented in the transverse plane to that of the static magnetic field and is generally significantly smaller. The second field pulls the net magnetism of the atomic nuclei off the axis of the original magnetic field. As the second magnetic field pulses, it pulls the spins off axis. When it is turned off, the spins "relax" back to their position relative to the initial magnetic field. The rate at which the spins relax is dependent on the molecular level environment. During the relaxation step, the precessing magnetization at the Larmor frequency induces a signal voltage that can be detected by antennas tuned to that frequency. The magnetic resonance signal persists for the time it takes for the spin to relax. Since different tissues have different molecular level environments, the differences in relaxation times provides a mechanism for tissue contrast in MRI.

[0004] In order to image the magnetic resonance signal it is necessary to encode the locations of the resonant spins. This is performed by applying pulse of gradient magnetic fields to the main magnetic field in each of the three dimensions. By creating this field, the location of resonant nuclei can be determined because the nuclei will resonate at a different Larmor frequency since the magnetic field they experience differs from their neigh-

bors. The magnetic resonance (MR) image is a representation of the magnetic resonance signal on a display in two or three dimensions. This display usually comprises slices taken on an axis of interest in the subject, or slices in any dimension or combination of dimensions, three-dimensional renderings including computer generated three-dimensional "blow-ups" of two-dimensional slices, or any combination of the previous, but can comprise any display known to the art.

[0005] MR signals are very weak and therefore the antenna's ability to detect them depends on both its size and its proximity to the source of those signals. In order to improve the signal of an MRI, the antenna may be placed near or inside the subject to be imaged. Such improvements can enable valuable increases in resolution sensitivity and reduction of scan time. It may be desirable to have evidence of the MRI antenna itself on the MRI to allow the individual inserting the MRI antenna to direct where it is going and to maneuver it with aid from the MR image. Such a benefit could be useful in medical procedures where MRI is used simultaneously to track the position of an intraluminal device and to evaluate the structures surrounding the lumen. For example, an intravascular catheter could be directed through a vessel using MRI to reach a targeted area of the vessel, and the MRI apparatus could further be used to delineate the intravascular anatomy or nearby tissue to determine whether a particular therapeutic intervention would be required. Using MRI to guide the catheter and using MRI further to map out the relevant anatomy could complement conventional angiographic imaging technology within an interventional radiology or cardiology or minimally invasive imaging suite. Once the catheter is directed to the desired anatomic target under MR guidance, and once the topography or other relevant anatomy of the target lesion is depicted using MRI, the clinician can make decisions about what type of intervention would be indicated, if any, and where the intervention should be delivered.

[0006] Many conventional vascular interventional procedures use X-ray imaging technology in which guidewires and catheters are inserted into a vein or artery and navigated to specific locations in the heart for diagnostic and therapeutic procedures. Conventional X-ray guided vascular interventions, however, suffer from a number of limitations, including: (1) limited anatomical visualization of the body and blood vessels during the examination, (2) limited ability to obtain a cross-sectional view of the target vessel, (3) inability to characterize important pathologic features of atherosclerotic plaques, (4) limited ability to obtain functional information on the state of the related organ, and (5) exposure of the subject to potentially damaging x-ray radiation.

[0007] MRI techniques offer the potential to overcome these deficiencies. However, conventional guidewires are not suitable for use in MRI machines since they contain steel or magnetic materials that can cause significant image artifacts in an MRI machine and can cause injury

to a patient from unintended motion due to effects of the magnetic fields or induced Ohmic heating. Additionally, guidewires made of non-magnetic materials (e.g., polymers) cannot easily be visualized by MRI. Even those antennae which have been fabricated for use inside a human body are not useful for many types of interventional procedures. Many of these devices are simply too large to be sufficiently miniaturized to allow the placement of an interventional device simultaneously with the antenna in a small vessel without causing injury to the subject. Furthermore, many of these devices are not useful as guidewires because the antenna cannot accept the range of interventional tools that are widely used in many types of procedures without removal of the guidewire from the subject during tool transition. This includes, but is not limited to, such tools as balloon catheters for dilatation angioplasties, for stent placements, for drug infusions, and for local vessel therapies such as gene therapies; atherotomes and other devices for plaque resection and debulking; stent placement catheters; drug delivery catheters; intraluminal resecting tools; electrophysiologic mapping instruments; lasers and radio frequency and other ablative instruments. Conventional antennas fail in this regard because they have no method for loading these devices after the antenna has been placed in the subject. The tool must instead be preloaded on the antenna, and then inserted into the subject. If a different tool is needed once the antenna has been inserted, the antenna must be entirely removed, the tool switched, and the antenna reinserted into the subject. This repositioning may require that the antenna be redirected to the lesion with the new tool in place, adding an extra, redundant step with the attendant risks of procedural complications. The more inaccessible the lesion, the greater the potential hazards that a second or subsequent positioning of the antenna may entail. In order to use a range of tools, and be useful for procedures requiring loading of multiple tools during the procedure, it is desirable that the antenna therefore be capable of loading multiple different tools after it has been placed in the subject.

Summary of the Invention

[0008] To solve the guidewire visualization problem, two approaches have been proposed: passive visualization, and active visualization. With the passive visualization approach, the material of the guidewires is modified so that the catheter appears bright or dark on MR images. Unfortunately, in these techniques data acquisition speed is often limited and the position of the guidewire cannot be visualized very accurately as it depends on the signal-to-noise ratio (SNR) of a second remote detector coil (antenna) which may be sub-optimal. In addition, the modification of the material may result in image artifacts distorting the view of neighboring tissue. In the active visualization techniques, the MRI signal is received by an antenna placed at the end of the guidewire that potentially provides high SNR and spatial resolution

in the vicinity of the antenna. These types of probes have also presented problems for clinical applications, since the antennas are often difficult to insert, providing proper shielding from body fluids and tissues has been difficult, and avoiding injury to patients has at times required sub-optimally sized probes to be used.

[0009] It is therefore desired in the art to produce a probe that contains an antenna suitable to receive and enhance MR images, that antenna providing signal that renders it visible on an MR image and suitable for use as a guidewire.

[0010] It is further desired by the art to provide an MRI probe which is constructed of flexible material that has sufficient mechanical properties to be suitable as a guidewire and suitable electrical properties to be an antenna for MRI images rendering it visible on an MR image.

[0011] It is further desired by the art to provide an MRI probe which uses multiple different shaped whip antenna designs to allow specific uses under certain circumstances, and which can be used in a clinical environment

[0012] It is further desired by the art to provide an MRI probe that can act as a guidewire to multiple different interventional tools without having to remove the probe from the body to change between tools.

[0013] EP0673621 discloses a guidewire for use in MRI and which can be inserted in a subject, the guidewire comprising a central conductor, an insulator surrounding the central conductor and a shield surrounding the central conductor and insulator except for an antenna portion extending from the distal end of the shield. The guidewire includes a further insulator surrounding the shield.

[0014] WO97/40396 discloses an MRI antenna in the form of a dipole arranged coaxially with a coaxial cable having a central conductor, insulation over the central conductor and a shield over the insulation.

[0015] US 4 932 411 discloses a catheter for MRI comprising a helical loop coil.

[0016] According to one aspect of the invention there is provided a guidewire probe assembly suitable for receiving magnetic resonance signals from a sample, comprising:

a probe shaft having a distal end and a proximate end, the probe shaft comprising an electrically conductive core of non-magnetic material;
a first insulator around said core;
an electrically conductive shielding around at least part of said insulator; and
a radio frequency antenna attached to said core at the distal end of said probe shaft;
said antenna being visible on a magnetic resonance image, characterised in that the antenna comprises loopless a helical which antenna having a plurality of turns.

[0017] According to another aspect of the invention, there is provided a method of manufacturing a guidewire probe assembly, comprising the steps of:

attaching a first insulator around a non-magnetic conductive core to create a core-insulator assembly; providing an electrically conductive shielding over a proximate portion of said core-insulator assembly; and attaching a radio frequency antenna to a distal portion of said core insulator assembly characterised in that said antenna comprises a loopless helical whip antenna having a plurality of turns.

[0018] Preferably, the MRI probe's antenna is constructed to be flexible and therefore reduce the risk of chamber or vessel perforation.

[0019] The core of non-magnetic material may be made of a super-elastic material, such as Nitinol or any other non-magnetic material whether metallic or non-metallic. The non-magnetic core may include a coating of conductive material which could comprise gold, silver, alternating layers of gold and silver or copper or aluminum, for example. A clip-on connector may be further provided for making an electrical connection to a magnetic resonance scanner, the clip-on connector enabling loading and unloading of interventional devices during a procedure without removal of the probe from the subject.

Brief Description of the Drawings

[0020] Other objects, features, and advantages of the invention will be apparent from the following detailed description of the preferred embodiments as illustrated in the accompanying drawings, in which reference characters refer to the same parts throughout the various views. The drawings are not necessarily to scale, emphasis being placed upon illustrating principles of the invention.

FIG. 1 shows a cross-sectional side and end view illustrating the structure of a guidewire probe with a linear whip antenna.

FIG. 2 shows a cross-sectional side view illustrating the structure of one shielded linear whip antenna.

FIG. 3 shows three potential alternate shapes for a linear whip antenna.

FIG. 4 shows a potential embodiment of the invention wherein the shielding comprises a series of balun circuits.

FIG. 5 shows a cross-sectional side and end view illustrating a guidewire probe according to an embodiment of the invention wherein the antenna whip comprises a combination whip where a helical whip antenna is connected to a linear whip antenna at multiple points.

FIG. 6 shows a guidewire probe with a helical whip antenna electronically connected to a linear whip an-

tenna at a single point.

FIG. 7 shows a guidewire probe comprising a helical whip antenna.

FIG. 8 shows a guidewire probe where a helical whip antenna is placed over a linear whip antenna without making an electrical connection between the two.

FIG. 9 shows a potential guidewire probe where a core is present inside a helical whip antenna.

FIG. 10 shows a representation of the receiving properties of a helical whip antenna.

FIG. 11 shows a potential embodiment of a helical whip antenna where the diameter of the coils decreases from the proximate to the distal end of the helical whip antenna.

FIG. 12 shows a potential embodiment of a helical whip antenna where the diameter of the coils increases from the proximate to the distal end of the helical whip antenna.

FIG. 13 shows a potential embodiment of a helical whip antenna where the diameter of the coils varies along the length of the helical coil antenna.

FIG. 14 shows one potential guidewire probe of the instant invention where the probe shaft decreases in diameter at its distal end.

FIG. 15 shows an embodiment of the invention where a second helical coil is placed around the probe shaft and connected to the shielding.

FIG. 16 shows examples where a second helical coils is used as shielding around various whip antennas.

FIG. 17 shows a snap-on connector. 17A shows the male connector portion and 17B shows the female connector portion.

FIG. 18 shows a clip connector. 18A is in unlocked form and 18B is in locked form.

FIG. 19 shows a screw-lock connector.

FIG. 20 shows a screw style connector. 20A shows the female portion and 20B shows the male portion.

FIGS. 21-23 show alternate connectors whereby there is no direct electric contact between the male and female members of the connector.

FIGS. 24 and 25 show different views of a connector

which use a vice-like connector between the connector portion and the mated connector portion and allow the guidewire to rotate within the connector.

FIG. 26 shows a potential design of an interface box.

FIG. 27 shows a layout of a system wherein the guidewire probe might be used.

FIG. 28 shows a potential embodiment of a helical whip antenna where the spacing between the coils varies along the length of the helical coil antenna.

Detailed Description

[0021] The subject of the invention is also not limited to human beings but can be used on any subject where the use of a guidewire is desired. These include but are not limited to, applications of the probe in the body or portion of the body of any human, non-human animal, or other biological organism, living, deceased or otherwise; applications involving placement of the probe in any fluid, gel, solid, gas, plasma or other state of matter where the use of a guidewire is desired in that matter, placing the probe in the vicinity of a portion of a subject for the purpose of viewing that portion of that subject through the probe's proximity, or guiding a device to within that portion's proximity; the use of a probe to simultaneously guide an interventional device and image the area on which the interventional device is to be used; or any of the previous in any combination.

[0022] The invention is also not limited to a conventional MRI machine used medically but can be used in any type of scanning device that can measure magnetic resonance. Therefore, we use the term MRI machine to apply to any type of machine, device, system, means, or process which allows the detection of magnetic resonance in any type or state of matter, such device being currently known, whether for use on humans, non-human animals, other biological organisms, biological tissues or samples, or inorganic matter. Such an MRI machine may be of any shape and for scanning any size subject or portion of a subject.

[0023] The application of guidewires is also not limited to vascular interventions. Guidewires are commonly used in many non-vascular applications for the placement of various probes and catheters into the gastrointestinal (GI) tract, the biliary duct, the urethra, bladder, ureter and other orifices, punctures, or surgical openings. Systems according to the present invention may be adapted to a plurality of minimally invasive applications. Guidewires according to the present invention may, in certain embodiments, be used for passage into and through the upper airway, trachea and bronchial tree. Examination of these structures using the systems of the present invention may be performed to detect abnormalities of the lungs or tracheobronchial tree, ideally at an early stage for early treatment. As an example, the early

detection of a pre-malignant lesion in the tracheobronchial tree could permit early extirpation before an invasive cancer develops; even if an invasive cancer is detected, it may be possible to detect and treat these lesions at their earliest stages, before lymph node invasion or distant metastasis. Similarly, the systems of the present invention are applicable to any body lumen or body cavity wherein early detection of pre-malignant and malignant disease is desirable. As examples, these systems could be used for the evaluation of the esophagus, stomach and biliary tree to identify neoplasms and to distinguish benign from malignant tissue proliferation. As examples, these systems could be used for the evaluation of the colon and rectum to identify abnormalities and malignancies. These systems could also be used for the evaluation of the male and female urogenital systems, including bladder, urethra, prostate, uterus, cervix and ovary, to identify therein abnormalities and malignancies.

[0024] Further, the diagnostic function of the MRI would be useful in the evaluation of any mucosal malignancy to identify how far through the wall of the effected organ the malignancy has invaded. It is understood in the art that extent of invasiveness into and through the wall, diagnosable by MRI, is an important characteristic of an intraluminal cancer.

[0025] The diagnostic function of the MRI, as the probe is guided to the target tissue, may be combined with therapeutic interventions. For example, a small lesion found within a body lumen using the systems of the present invention may be suitable for localized ablation, wherein the lesion's response to the delivery of radio frequency energy or other ablative energy can be monitored in near real time by the high resolution MRI as disclosed herein.

[0026] The scale of the devices described herein may be dimensionally adaptable to a number of body cavities and lumens traditionally inaccessible to interventional methods known in the prior art. For example, the eustachian tube, the nasal airways and the craniofacial sinuses may all be accessible to a probe designed in accordance with the present disclosure. Using one of these orifices as an entryway into the craniofacial skeleton may permit the diagnosis or evaluation of a variety of otolaryngological and neurological conditions with greater precision than is currently available using whole-patient CT or MRI. As an example, transsphenoid evaluation of intracranial or sellar lesions may be possible. The imaging of these lesions provided by the systems of the present invention may be combined with therapeutic techniques for extirpating or otherwise treating the lesion using minimally invasive technologies. For example, an aneurysm of the Circle of Willis that is identified using high-resolution MRI may be suitable for clipping under MRI guidance using minimally invasive techniques. As another example, a pituitary tumor can be evaluated for its extensiveness using these systems and methods, and its resection can be precisely monitored. Use of these systems may also permit diagnosis of abnormalities in organs considered inaccessible to traditional monitoring methods. For

example, the pancreas may be examined, using an embodiment of the present invention, permitting the early diagnosis of pancreatic lesions. As another example, embodiments of the present invention may be adapted for intracranial use, for the diagnosis of lesions of the central nervous system or for precise anatomic delineation thereof. Ablative techniques may be combined with these diagnostic modalities to permit treatment of abnormalities using embodiments of the present invention to help determine the extent of the pathology and to monitor the effectiveness of the ablation in removing the abnormality. Trigeminal neuralgia is an example of a condition where delineation of the relevant intracranial anatomy is vital for the identification of the neuroanatomical structures to be ablated or treated. MRI using the systems of the present invention may usefully help direct the surgeon to the precise tissues requiring treatment.

[0027] Conventional minimally invasive techniques such as laparoscopy, thoracoscopy, mediastinoscopy, and arthroscopy may all be combined with these systems to permit more accurate identification of target lesions and to monitor therapies directed at the target lesions. MRI guidance according to these systems may be particularly valuable in determining the extensiveness of a lesion that is to be resected or biopsied. For example, in mediastinoscopy, it may be difficult to distinguish between large blood-filled vessels and pathological lymph nodes, the latter being the target for the biopsy being performed. The operator performing the procedure must sample the pathological lymph nodes without damaging the large vessels in the area, an inadvertency that can result in profound, even exsanguinating hemorrhage. MRI guidance according to these systems can not only distinguish among the various types of anatomic structures, but also can map out the extent of lymph node involvement and direct the operator towards those lymph nodes most likely to bear the abnormal tissue being sought. A number of applications will be readily apparent to practitioners of ordinary skill in the art, whereby a conventional endoscopy procedure combined with these systems will permit the diagnostic evaluation of a tissue or organ within a body lumen or a body cavity. The intraperitoneal space, for example, may be usefully evaluated using these systems, with access to this space being provided by laparoscopic instrumentation, and with MRI being used to approach and identify target tissues. Intraperitoneal diagnosis using these systems may be helpful in diagnosis of various retroperitoneal lymphadenopathies, such as those indicative of lymphoma, or such as those indicative of spread from a malignant melanoma of the lower extremity. Other examples may be evident to ordinarily skilled practitioners in the medical arts.

[0028] Combining these systems with other diagnostic modalities may permit better or earlier diagnosis of malignancies. For example, use of contrast agents in addition to the systems described herein may permit identification of tumors on the basis of their abnormal blood flow or metabolism. Contrast agents or other markers

carried by body fluids may permit these systems to be used for diagnosis of abnormal bleeding sites, such as occult gastrointestinal bleeding points or bleeding varices, situations where direct visual inspection of the lesion may have limited diagnostic or therapeutic value.

[0029] It is understood that advances in fabrication of static MRI machines will permit more localized anatomic evaluation of specialized body parts, and further will permit easier access to the patient for interventional techniques. These developments may permit the systems of the present invention to be used as a replacement for various ultrasound-guided techniques such as fertility procedures. In certain embodiments, the present invention may be adapted for screening procedures using probes dimensionally adapted for appropriate bodily orifices. For example, these systems may be useful in identifying and determining extensiveness of gynecological cancers, including cervical cancer, uterine cancer and ovarian cancer. Other applications should become available to practitioners of ordinary skill in the art with no more than routine experimentation.

[0030] The probe of this invention can be described and understood as having multiple different forms of antenna whip and design. Figs. 1 to 3 show probes not embodying the present invention and which comprise a linear whip antenna 106.

[0031] The whip refers to the antenna at the end of the probe which is a whip antenna. In the case of Figs. 1 to 3, the whip comprises a primarily unbent protrusion and is therefore called a linear whip antenna 106. The probe comprises a probe shaft 105 with a distal end 109 and a proximate end 111. The probe shaft can be comprised of multiple layers of different materials including a core 101 having at least one first electrically conducting component, a first insulator/dielectric 102 for providing insulation, a shielding 103 having at least one second conducting component, and an optional second insulator/dielectric 104 as shown in FIG. 2. The linear whip antenna 106 extends from the distal end 109 of the probe shaft 105. It would be understood that a linear whip antenna 106 does not have to be straight but may have a curve or slight hook at the end as is understood in the art to facilitate engagement of the device into complex vessels or other openings (such as ducts etc.) as shown in FIG. 3. The linear whip antenna 106 could be straight or straight and flexible or could be bent to form other non-linear shapes as the probe was twisted through complicated pathways within the subject. A linear whip antenna can comprise a ribbon or paddle shape such as shown in FIG. 16A.

[0032] The core 101 can comprise a super-elastic material such as the Tinel® range of materials (also known as Nitinol or NiTi). Super-elastics generally comprise a titanium-nickel alloy and have many positive attributes for use as a base for the probes of this invention. Super-elastics may be significantly deformed and still return to their original shape. Such deformation and "shape memory" can take place through actions based on changes

in temperature. Super-elastic materials are also known for high biocompatibility and show good properties for use within biological organisms or matter. Super-elastics in the antenna designs of this invention could be of any shape including wire, ribbon, microtubing, sheets or any other form as is known to the art but in one embodiment will comprise Nitinol wire that can be plated with layers of gold-silver-gold, or layers of gold, silver, copper, or aluminum applied either singly or in combination. The core 101 can alternatively comprise different materials, including, but not limited to, MR-compatible stainless steel, other metallic materials that are non-magnetic, non-metallic substances such as carbon, glass fiber, or polymer, that can be plated with a layer of a good RF conductor such as copper, silver, gold, or aluminum either singly or in multiple layers, or any of the previous in any combination. In the case of an aluminum core 101, the surface can be readily oxidized as is known to the art to provide the first insulator/dielectric 102.

[0033] The first insulator/dielectric 102 and the second insulator/dielectric 104, may comprise any insulator/dielectric as is known to the art including any polymer, such as, but not limited to, an elastomeric grade PEBAX, Nylon, Teflon®, polyurethane, fluoroethylene polymer (FEP), or polyvinylidene fluoride (PVDF), or any combination of polymers with appropriate electrical properties. The insulator/dielectric could also comprise aluminum oxide or any other nonpolymeric element or compound as would be understood by one of skill in the art.

[0034] The thickness of the first insulator/dielectric 102 and the second optional insulator/dielectric 104 can be determined so as to control the impedance of the cable formed. The wire can have a uniform impedance throughout the length or the impedance can vary with length, for instance, by having low impedance closer to the proximate end 111 as compared to the distal end 109.

[0035] The shielding layer 103 may comprise any MR-compatible conductive material including, but not limited to, copper plated with silver, copper plated with gold, Nitinol plated with gold, conductive inks, conductive coatings or any of the previous in any combination. The shielding can be in the form of a braid, a mesh, or a continuous tubing such as, but not limited to, a gold-silver-gold plated Nitinol hypotube. The shielding can be continuous or coiled toward the distal end 109 and can extend beyond the distal end 109 of the probe shaft 105 or may be discontinued at the distal end 109 of the probe shaft 105. Discontinuing the shielding can create a stronger signal from the antenna, but may create detrimental effects when the probe is used in a human body.

[0036] To increase the safety and the signal-to-noise ratio of the antenna, the shielding 103 can be added to the probe shaft in the form of a balun circuit as is understood in the art. This reduces the effect of induced currents due to external RF and magnetic fields. The tertiary shielding 451 can be continuous or discontinuous. It can have capacitors connecting the discontinuous sections or it can be connected directly to the primary shielding

461 or connected to the primary shielding 461 with capacitors 471 or by any other method understood in the art, or by a series of balun circuits 139 as shown in FIG. 4.

[0037] In an embodiment of the present invention, a balun circuit is placed on the probe in a tuned form (also known as a bazooka circuit) as is known to the art. This tuned balun circuit could help to increase the SNR performance and reduce the induced currents on the wire during an RF pulse transmission by any external RF coil (such as the transverse magnetic field in an MRI machine). This circuit may also decrease the risk of possible excessive Ohmic heating from the presence of the probe inside the body.

[0038] The second optional insulator/dielectric 104 is desirable over the antenna whip as depicted in FIG. 2 so as not to insert a straight cylindrical segment of bare wire into the patient with direct blood and tissue contact. The problem with this solution, however, is that the optimal length of the whip portion of the device is determined based upon the operating electromagnetic wavelength in vivo which in turn depend upon the effective dielectric constant as experienced by the antenna. For the case of a bare wire loaded in water, this length is approximately 4-12 cm, which represents a reasonable length for in vivo use. The addition of a second insulator/dielectric 104 to the outer surface of the antenna however, decreases the effective dielectric constant, which in turn increases the operating wavelength and thus increases the optimal whip length from 4-12 cm. It is clear that a significantly longer antenna whip may be unsuitable for some in vivo use, an alternative insulated whip design could be desired when the antenna is insulated as is discussed below. In addition, covering the antenna with a second insulator/dielectric 104 increases the diameter of the antenna making it increasingly difficult to insert in small vessels. In one example, the linear whip antenna 106 has the narrowest possible diameter to allow such insertion.

[0039] A typical assembly procedure for an MRI probe can involve the following steps. First, the first insulator/dielectric 102 is attached to a gold-silver-gold plated Nitinol core 101. This can be done by means of extrusion, drawing, a heat shrink tubing, or any other method known to the art. Next, the shielding 103 is loaded on the assembly leaving a portion of the assembly exposed to act as the linear whip antenna 106. This can be done by means of braiding, plating, painting, sputtering, or any other means known to the art. Alternatively, a metallic hypotube can be used instead of braiding to add mechanical stiffness to the probe shaft. Lastly, the second insulator/dielectric 104 is loaded on the probe shaft 105. A connector can then be attached to the proximate end 111 of the probe shaft 105 to facilitate connecting to the interface circuitry to be connected to the MRI scanner. The connector can be any type as is known to the art, or could alternatively be any of the connectors described below. In a further embodiment of the invention, the connector can be replaced by mechanical forming of the proximal tip to enable attachment of a snap-fit connector or by any

other means of connections or termination of the probe as would be known to one of skill in the art. An optional coating of lubricant may further be added to the probe shaft 105 and/or antenna whip to reduce drag.

[0040] It is possible to manufacture the linear whip antenna 106 and probe shaft 105 as a single piece as is described above. Alternatively, the probe shaft 105 and linear whip antenna 106 could be constructed as two separate pieces and attached together by any means known to the art either permanently (including, but not limited to, use of high temperature or cold impact welding, soldering and/or electrically conducting glue or epoxy) or removeably (including, but not limited to, a snap-on or locking connection).

[0041] FIGS. 5, 6, 7 and 9 show embodiments of the invention using a helical whip antenna that obtains through its shape the ability to be the same physical length as a linear whip antenna, while still maintaining the electrical length of a much longer linear whip and therefore having desirable properties even when shielded by a second insulator/dielectric 104. FIGS. 5 and 6 show a combination whip antenna 206 where a helical whip antenna is placed over and electrically joined to a linear whip antenna 101. FIG. 7 shows a guidewire probe with a helical whip antenna 306 where the helical coil 208 comprises the antenna alone. FIG. 9 shows a variation on the helical whip antenna 306 of FIG. 7 that contains a core 215 inside at least some of the coils of the helical coil 208. The core 215 can provide modification to the flexibility of the helical coil whip antenna 306 for insertion into, or navigation inside, a subject. The core 215 can be of non-conducting material including, but not limited to, a polymer, or can be an electrically conducting material. The core 215 will usually be non-magnetic.

[0042] Helically coiling the antenna shortens the physical antenna length while still producing optimum performance. Covering the antenna with an insulator, usually requires increasing the antenna length to obtain optimum performance because the insulator effects the ability of the antenna to detect signal. In this case, coiling the antenna can be used to compensate for this increase in antenna length. That is, a coil of wire can contain a longer piece of wire in a shorter physical form.

[0043] A helical whip antenna has further mechanical advantages over a linear antenna. In particular, a helical whip antenna is flexible and "springy" allowing it to navigate through complicated biological pathways without bending, kinking, or breaking, as opposed to a linear antenna which can have many of these problems since it is narrow and may have poor mechanical properties. Therefore, in one example the helical not embodying the invention whip antenna is placed over a linear antenna, not necessarily to change signal, but to "superimpose" preferred mechanical properties on the linear antenna as exemplified in FIG. 8.

[0044] The helical whip antenna also provides for detection of magnetic resonance in multiple directions. The signal received by a linear antenna is dependent upon

the orientation of the antenna with respect to the main magnetic field as is known to the art. When a linear antenna design becomes bent or changes geometric planes, the sensitivity of the antenna and thus image quality can be degraded, with zero signal detected in some cases.

As diagnostic and therapeutic catheter interventions inherently involve movement of the catheter in planes transverse to the main longitudinal axis of the body, and therefore transverse to the magnetic fields in the MRI machine, an antenna design capable of removing this orientation dependency would be desirable in many cases. The unique physical geometry of the helical whip antenna allows detection of radio frequencies from two orthogonal components of the processing transverse magnetization, which is known as quadrature detection. Quadrature designs are able to create a circularly polarized electric field that results in a 50% reduction in RF power deposition and up to a 40% increase in signal to noise ratio. In addition to these very important advantages, such a design allows the imaging capabilities of the device to be independent of spatial orientation and therefore it can be used in any vessel or other area in the body.

[0045] Helical whip antennas have two distinct and very different operating modes depending upon, as shown in FIG. 10, the physical dimensions of the windings and speed of wave propagation through the medium. When the diameter(D) and spacing(S) between the windings is comparable to the wavelength λ of the RF MRI signal to be detected with the antenna inserted in the subject, ($D\lambda = S\lambda = 1$, where $D\lambda$ = helix diameter, $S\lambda$ = coil spacing), the helical whip antenna operates in an end fire or axial mode, where polarization occurs primarily along the axis of the helix as depicted in FIG. 10(b). This is similar to the operation of the linear antenna. When $D\lambda$ and $S\lambda$ are much smaller than λ , the helical whip antenna is said to operate in normal mode where polarization occurs orthogonal or broadside to the helical axis as shown in FIG. 10(c) and described in equation (1). Since the RF frequencies used in MRI tend to be very long, normal mode operation is the standard for a probe of the present invention.

[0046] FIGS. 5 and 6 show a probe with a helical whip antenna 208 on top of a linear whip antenna 106. This creates a combination whip antenna 206. In one embodiment of the present invention, there can be an electrical connection between the linear whip and the helical whip antenna in one point 213 as shown in FIG. 5 or multiple points as shown in FIG. 6. Alternatively, the connection point could be at the distal end 215 of the linear whip antenna 106 instead of at the proximate end 223 as shown in FIG. 6. This allows for both portions to act as antennas and can produce an antenna with higher SNR without increasing physical size significantly. A thin insulator 210 may be placed between the linear whip antenna 106 and the helical whip antenna 208 in any combination antenna 206. In an example not embodying the present invention (FIG. 8), the helical whip antenna 208 and the

linear whip antenna 106 are not electrically connected to each other. In this embodiment, the helical whip antenna 208 provides beneficial mechanical properties to the linear whip antenna 106. In particular, it can make the linear whip antenna 106 more rugged and more flexible allowing for better mechanical properties within the subject. In FIGS. 5, 6, 7, 8, and 9 the probe shaft 105 can be built similarly to the probe shaft of FIG. 1 and all listed materials for the probe of FIG. 1 are also available for the probe of FIGS. 5, 6, 7, 8, and 9. This type of construction is not limited to these figures. Any probe shaft 105 in any embodiment herein described may be constructed in a similar manner. In assembly, the helical whip antenna 208 will generally be added to a preconstructed probe with a linear whip antenna 106. The addition can either complete the electrical connection to the helical whip antenna 208 or not depending on the desired final probe. Alternatively the probe can be manufactured with the helical whip antenna 208 already attached to the probe in any configuration.

[0047] In FIG. 7, there is no linear whip antenna 106. Moreover, in this embodiment of the present invention, the whip is entirely helically coiled. This configuration can provide advantages in mechanical properties. In particular, the helical whip antenna 306 can be physically shorter or narrower than the combination whip antennas 206 depicted in FIGS. 5, 6, and 8 without significant loss of electrical length. In addition, since the helical whip antenna 306 has no linear portions and is only coiled, it is more flexible than any of the other antennas allowing it to turn sharper corners in the subject. Finally, the helical whip antenna 306 is more deformable than any of the previous antenna designs which makes the antenna less likely to puncture vessel walls. If desired, the flexibility of this antenna can be adjusted by including a core component 217 attached to the distal end 109 of the probe shaft 105 if nonconducting or unattached if conducting, as shown in FIG. 9. Core 217 need not extend to the distal end 415 of the helical whip antenna 306.

[0048] FIGS. 11, 12 and 13 depict alternative embodiments of the helical whip antenna 306 that can be used in place of the whip designs shown in FIGS. 7 and 9. In FIG. 11, the helical whip antenna 306 has been tapered with decreasing diameter towards the distal end 415 to vary the flexibility of the whip such that it is more flexible at the tip to negotiate blood vessels and the like. In FIG. 12, the helical whip antenna 306 is tapered on the proximal end 515 to stiffen the flexibility at the distal end 415. In FIG. 13, the helical whip antenna 306 is tapered at both ends. The taper can be adjusted to provide the desired flexibility gradient. The taper can also repeat at regular intervals (either smoothly or at a sudden transition) or coils of different diameters can be placed anywhere within the length of the helical whip antenna 306. Alternatively, the distal end 109 of the probe shaft 105 can be tapered to improve the transition between the probe shaft 105 and the helical whip antenna 306 as shown in FIG. 14.

[0049] In addition to altering the diameter of the coils in the helical whip antenna 306, the spacing between the coil turns can also be modified. As shown in FIG. 28 the spacing of the coil turns can be closer together at the proximate end 515 and further apart at the distal end 415. This arrangement may allow the construction of a helical whip antenna that has greater electrical length but preserves the desired mechanical properties present in a looser packed coil. Alternatively to FIG. 28, the coil turn spacing could be altered so that the spacing is tighter at the distal end 415 than the proximate end 515, the coil turn spacing could follow any type of regular change from tighter to looser coil turns along its length, or the coil turn spacing could contain coils of random spacing.

[0050] In all of the variations of the designs, the optimum coil length may be preferably calculated or measured as the length that minimizes the real component of the impedance of the antenna as the impedance of the antenna is measured at the point where the shield ends. This length is usually around 0.25 or less times the electromagnetic wavelength of the RF MRI signal in the medium, but other lengths could be used as would be understood by one of skill in the art.

[0051] FIG. 15 shows yet another embodiment of the present invention, a second helical coil 408 is connected to the shielding 103 at point 513 of the probe shaft 105 to concentrate the MRI signal sensitivity to a narrow range. The second helical coil 408 can also be connected to multiple points for multiple different electrical properties as would be understood by one of skill in the art. In further alternative embodiments, the shield 103 is completely or partially replaced by the second helical coil 408 which extends for the length of the shaft, insulated from the core 101 by dielectric 102. These arrangements can be used with any type of whip antenna including, but not limited to, those shown in FIG. 16. In particular, a linear whip antenna 106 as shown in FIG. 16A (which does not form an embodiment of the invention) and 16E, a helical whip antenna 306 with a separation between the outer shield and whip as shown in FIG. 16B, a helical whip antenna 306 without a separation between the outer shield and whip as shown in FIG. 16C or an alternate combination whip with a linear extension 1601 attached to a helical whip antenna 306 as shown in FIG. 16D, as well as with any of the other antenna whip designs and herein disclosed or otherwise known to one of skill in the art, provided that the arrangement falls within the scope of the claims.

[0052] In further embodiments of the invention the second insulator/dielectric 104 is extended over the second helical coil 408 so as to provide protection to the subject from the antenna's interaction with exposed body fluids, tissues, or other portions of the subject as is depicted in FIG. 16E. The second helical coil 408 can also have any alterations of the coil's diameter or turn spacing along the second helical coil's 408 length as have been previously discussed with regards to the helical whip antenna 306.

[0053] The connection between an electronic circuit and the probe is a further important point because a standard RF BNC connector as is known to the art is not well suited for frequent connection and disconnection. In many current procedures where an MRI guidewire would be desired, the tools used as part of those procedures must be changeable without having to remove the guidewire from the subject. In one example, a connector is used to make an electrical connection between the probe and a tuning/matching and decoupling circuit or interface box. This connector connects the interface to the antenna and can be removed and reinstalled as required during an interventional procedure to load and unload other interventional devices. FIGS. 17 through 25 show some examples of connectors which can be used with the present invention and are discussed in detail below.

[0054] FIG. 26 shows an interface box for use between the MRI machine and the guidewire probe assembly of the instant invention. The interface box consists of a shielded box 601 with two compartments 607 and 617, separated by a partition 605. In one example, all components are non-magnetic. The probe attaches to coaxial connector 611 or another mating connector portion designed to attach to the connector portion of the probe. Coaxial connector 611 can be insulated from the interface box 601. The balancing of the dipole 611 is accomplished by capacitor 613 and coil 615. Coil 615 is a short length (5-10 cm) of 1 mm diameter solid-shield, 50 ohm coaxial cable, which is wound into a coil, increasing the inductance of both the center conductor as well as the shield. For the balancing function, it can be important to present a high impedance to current flow in the shielding 103 of the probe near the interface box 601. This high impedance is accomplished by tuning the LC circuit formed by capacitor 613 and the inductance of the shield of coil 615. In practice, capacitor 613 is selected such that the impedance of the network comprising capacitor 613 and coil 615 matches the impedance of the shielding 103 of the probe. The shield portion of the coaxial cable that forms coil 615 can be electrically connected to the partition 605 of the interface box 601 as shown in FIG. 26.

[0055] The center conductor of the coaxial cable that forms the coil 615 feeds through the partition 605 in the interface box 601. The inductance of the center conductor of the coil 615, and capacitor 613, form a tuned circuit that can decouple the probe from the imaging pulses of the MRI machine connected at a coaxial connector 619 (these imaging pulses usually occur at 63.9 MHz). Capacitor 621 can be tuned to maximize probe impedance when PIN diode 623 is turned on during imaging pulses. PIN diode 623 is turned on by a DC level being applied to co-axial connector 619 by the MRI scanner during MRI pulse transmission.

[0056] The probe can be tuned to match the generally 10 to 80 Ohm impedance of the MRI scanner amplifier by the network of inductor 625 and capacitor 627. This tuning can be accomplished by connecting a network an-

alyzer to coaxial connector 617 and varying the value of the capacitor 627 until the measured impedance is the desired impedance at based on the frequency of the imaging pulses (usually 63.9 MHz). These numerical values are given as examples and in no way limit the choice of values that could be chosen in use of the invention.

[0057] The end of the guidewire antenna can contain a connector portion that allows radio frequency signals to propagate from the scanner to the guidewire antenna and vice versa by connecting the connector portion to a mated connector portion. This connector can be a standard BNC connector or one of the special miniaturized connectors shown in FIGS. 17 through 25. The connectors allow for direct insertion of the guidewire into interventional devices such as balloon angioplasty catheter, stent placement devices. For this to be possible, the connector diameter should be no larger than guidewire probe diameter. Standard connector sizes, however, are often larger than the probe diameter and therefore do not allow for rapid exchanging of interventional devices over the guidewire probe. To overcome this difficulty, we show eight different connector configurations. Although many other designs are possible, the most important feature of these designs are that the diameter of the connector portion on the guidewire probe is not significantly larger than the diameter of the guidewire probe.

[0058] The connectors shown in FIGS. 17 through 20, 24, and 25 enable direct electrical contact between the conductors (shield and inner conductor of core) whereas the connectors shown in FIGS. 19-23 have no direct electrical contact.

[0059] FIG. 17 shows a snap-on connector. The connector at FIG. 17A is the male connector portion. Its diameter is smaller or the same size as the diameter of the guidewire probe. FIG. 17B is the female mated connector portion. They are connected to each other with a small amount of pressure in the direction along the length of the connector and removed easily by pulling the connectors apart.

[0060] FIG. 18 shows a clip connector. The male connector portion's 1002 diameter is not larger than the diameter of the guidewire probe. With a clip lock mechanism, 1006, the female mated connector portion 1003 is connected to the male connector portion 1002. The mechanism shown by FIG. 18 enables free rotation of the connector. This enables the user to freely rotate the guidewire while it is connected. 1004 shows a coaxial cable connecting the interface box 1005 to the mated connector portion. FIGS. 24 and 25 show an alternative design of this type of connector wherein a vice-like connection is employed instead of the clip. Again this design allows for the guidewire to rotate freely while it is connected.

[0061] FIG. 19 has the screw 1007 on the female mated connector portion that is an alternative to the clip lock mechanism, 1006 shown in FIG. 18.

[0062] FIG. 20 shows another type of screw connector. FIG. 20A is the female connector portion that is a part of

the guidewire probe. The male mated connector portion shown in FIG. 20B can be connected to a coaxial cable that leads to the interface box.

[0063] One problem with the connectors shown in FIGS. 17 through 20 is difficulty in using in a wet environment. When the connectors are wet or have blood or other body fluids on them, their performance may degrade. Therefore, a connector was designed that can be used in wet environment. The connectors shown in FIGS. 21-23 do not require direct electrical contact between the two connector portions.

[0064] FIG. 21 shows a solenoidal coil 2005 inside both female and male connector portions. The male connector portion snaps in the female mated connector portion 2003 but the electrical wires are not touching each other. The signal is transmitted from one to the other by the coupling of electromagnetic waves.

[0065] FIG. 22 shows a coaxial cable with extended inner conductor 2105 as the mated connector portion 2103 and an opposed solenoidal coil 2107 as the connector portion 2101 on the guidewire probe.

[0066] FIG. 23 shows a loop coil 2305 in both ends of the connector. As in the other, the male connector portion 2301 snaps on the female mated connector portion 2303. The electromagnetic waves are transmitted from one coil to the other enabling connection.

[0067] One further advantage of using these connectors (FIGS. 21-23) are the isolation of the circuits. Any direct current from one connector will not appear on the other.

[0068] FIG. 27 shows one potential layout of a system whereby a guidewire probe could be used. In this figure, the subject 901 is shown within the MRI machine 903. The probe 3005 has been inserted into the subject 901. A display 905 is showing an MRI 907 showing the probe 3005 and the surrounding biological tissue 909. The probe 3005 is connected to the interface box 1005 through a connector 1111 that will allow a doctor (not shown) or another individual or machine to load or unload tools without removing the probe 3005 from the subject 901. The interface box 1005 is connected to the MRI machine 903 allowing the MRI machine 903 to use the probe 3005 as an active antenna in the subject 901.

Claims

1. A guidewire probe assembly suitable for receiving magnetic resonance signals from a sample, comprising:

a probe shaft (105) having a distal end (109) and a proximate end (111), the probe shaft comprising an electrically conductive core (101) of non-magnetic material;
a first insulator (102) around said core;
an electrically conductive shielding (103) around at least part of said insulator; and a radio-frequency antenna (106) attached to said core at the distal end of said probe shaft;

said antenna being visible on a magnetic resonance image, **characterised in that** the antenna comprises a loopless helical whip antenna having a plurality of turns.

2. The guidewire probe assembly of claim 1, further comprising a second insulator (104) around said shielding.
3. The guidewire probe assembly of claim 1 wherein said core (101) of non-magnetic material is fabricated from conductive metal comprising one or more of the group of metals consisting of gold, silver, copper, MR-compatible stainless steel, and aluminium.
4. The guidewire probe assembly of claim 1, wherein said core (101) of non-magnetic material comprises a super-elastic material.
5. The guidewire probe assembly of claim 4 wherein said super-elastic material comprises Nitinol.
6. The assembly of claim 1 or claim 5, wherein said core (101) of non-magnetic material is plated with alternating layers of gold and silver.
7. The guidewire probe assembly of claim 1 or claim 5, wherein said core (101) of non-magnetic material is plated with a plurality of layers of conductive metal, said layers of conductive metal comprising one or more of the group of metals consisting of gold, silver, copper and aluminum.
8. The guidewire probe assembly of claim 1, wherein said core (101) of non-magnetic material comprises a non-metallic material plated with a conductive material.
9. The guidewire probe assembly of claim 8, wherein said core (101) of non-metallic material comprises carbon.
10. The guidewire probe assembly of claim 8, wherein said core (101) of non-magnetic material comprises glass fiber.
11. The guidewire probe assembly of claim 8, wherein said core (101) of non-metallic material comprises a polymer.
12. The guidewire probe assembly of claim 1, wherein an outer surface of said probe shaft is insulated with a biocompatible material or coating.
13. The guidewire probe assembly of claim 12, wherein said antenna is covered by a biocompatible material

or covering.

14. The guidewire probe assembly of claim 1 wherein the diameter of said helical whip antenna varies over the axial length thereof. 5
15. The guidewire probe assembly of claim 14, wherein the diameter of said helical whip antenna is larger at the proximate end of said helical whip antenna than at the distal end of said helical whip antenna. 10
16. The guidewire probe assembly of claim 14, wherein the diameter of said helical whip antenna is larger at the distal end of said helical whip antenna than at the proximate end of said helical whip antenna. 15
17. The guidewire probe assembly of claim 14, wherein said diameter of said helical whip antenna is larger at at least one point between the proximate end and the distal end of said helical whip antenna than it is at at least one of said proximate or said distal end of said helical whip antenna. 20
18. The guidewire probe assembly of claim 14, wherein said diameter of said helical whip antenna is smaller in at least point between the proximate end and the distal end of said helical whip antenna than it is at at least one of said proximate or said distal end of said helical whip antenna. 25
19. The guidewire probe assembly of claim 1, wherein the spacing of said turns varies. 30
20. The guidewire probe assembly of claim 19, wherein the spacing of said turns is greater at the proximate end of said helical coil antenna than at the distal end of said helical coil antenna. 35
21. The guidewire probe assembly of claim 19, wherein the spacing of said turns is greater at the distal end of said helical coil antenna than at the proximate end of said helical coil antenna. 40
22. The guidewire probe assembly of claim 19, wherein the spacing of said turns is greater in at least one point between the proximate end and the distal end of said helical coil antenna than it is at at least one of said distal end of said helical coil antenna or said proximate end of said helical coil antenna. 45
23. The guidewire probe assembly of claim 19, wherein the spacing of said coil turns is less at at least one point between the proximate end and the distal end of said helical coil antenna than it is at at least one of said distal end of said helical coil or said proximate end of said helical coil. 50
24. The guidewire probe assembly of claim 1, wherein

the total diameter of said guidewire probe is between about 0.25 mm -1.0 mm (0.010 - 0.040 inches).

25. The guidewire probe assembly of claim 1, wherein the total diameter of said guidewire probe is between 0.125mm and 12.5mm (between 5/1000 inch and 0.5 inch). 5
26. The guidewire probe assembly of claim 1, wherein said first insulator comprises a low dielectric loss, low dielectric constant material. 10
27. The guidewire probe assembly of claim 1, wherein said guidewire probe assembly is at least partially flexible. 15
28. The guidewire probe assembly of claim 1, wherein said guidewire probe assembly is steerable.
29. The guidewire probe assembly of claim 1, wherein said antenna is flexible.
30. The guidewire probe assembly according to claim 1, further comprising a balun circuit.
31. The guidewire probe assembly of claim 30, wherein said balun circuit comprises a tuned balun circuit.
32. The guidewire probe assembly of claim 1, wherein said shielding comprises a helical coil. 30
33. The guidewire probe assembly of claim 1, wherein said probe shaft is tapered.
34. A method of manufacturing a guidewire probe assembly, comprising the steps of: 35
 - attaching a first insulator (102) around a non-magnetic conductive core (101) to create a core-insulator assembly;
 - providing an electrically conductive shielding (103) onto a proximate portion of said core-insulator assembly; and
 - attaching a radio-frequency antenna (106) to a distal portion of said core-insulator assembly

characterised in that said antenna comprises a loopless helical whip antenna having a plurality of turns. 45
35. The method of manufacturing a guidewire probe assembly according to claim 34, further comprising providing an outer insulator (104) over said antenna, said shielding (103) and said core-insulator assembly. 50
36. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of attaching said first insulator (102) around said non-

magnetic core comprises an extrusion step.

37. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of attaching said first insulator (102) around said non-magnetic core comprises a drawing step. 5
38. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of attaching said first insulator (102) around said non-magnetic core comprises applying a heat-shrink tubing. 10
39. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of providing a shielding (103) onto said proximate portion of said core-insulator assembly comprises the step of applying a braiding. 15
40. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of providing a shielding (103) onto said proximate portion of said core-insulator assembly comprises a painting step. 20
41. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of providing a shielding (103) onto said proximate portion of said core-insulator assembly comprises a plating step. 25
42. The method of manufacturing a guidewire probe assembly according to claim 34, wherein said step of providing a shielding (103) onto said proximate portion of said core-insulator assembly comprises a sputtering step. 30

Patentansprüche

1. Baugruppe aus Sonde und Führungsdraht, die dazu geeignet ist, Magnetresonanzsignale von einer Probe zu empfangen, die Baugruppe umfassend: 40
 - ein Sondenrohr (105) mit einem distalen Ende (109) und einem proximalen Ende (111), wobei das Sondenrohr einen elektrisch leitfähigen Kern (101) aus nichtmagnetischem Material umfasst; 45
 - einen um den Kern herum angeordneten ersten Isolator (102); 50
 - eine um mindestens einen Teil des Isolators herum angeordnete elektrisch leitfähige Abschirmung (103), und
 - eine Hochfrequenzantenne (106), die an dem distalen Ende des Sondenrohrs mit dem Kern verbunden ist; 55
 - wobei die Antenne auf einem Magnetresonanz-

bild sichtbar ist, **dadurch gekennzeichnet, dass** die Antenne eine schleifenlose, spiralförmige Peitschenantenne umfasst, die eine Mehrzahl von Windungen hat.

2. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, des Weiteren umfassend einen um die Abschirmung herum angeordneten zweiten Isolator (104).
3. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Kern (101) aus nichtmagnetischem Material aus leitfähigem Metall hergestellt ist, das eines oder mehrere aus der Gruppe der Metalle umfasst, zu der Gold, Silber, Kupfer, MRkompatibler rostfreier Stahl und Aluminium gehören.
4. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Kern (101) aus nichtmagnetischem Material ein superelastisches Material umfasst.
5. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 4, wobei das superelastische Material Nitinol umfasst.
6. Baugruppe gemäß Anspruch 1 oder Anspruch 5, wobei der Kern (101) aus nichtmagnetischem Material mit abwechselnden Schichten aus Gold und Silber überzogen ist.
7. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1 oder Anspruch 5, wobei der Kern (101) aus nichtmagnetischem Material mit einer Mehrzahl von Schichten aus leitfähigem Material überzogen ist, wobei die Schichten aus leitfähigem Material eines oder mehrere aus der Gruppe von Metallen umfasst, zu der Gold, Silber, Kupfer und Aluminium gehören.
8. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Kern (101) aus nichtmagnetischem Material ein nichtmetallisches Material umfasst, das mit einem leitfähigen Material überzogen ist.
9. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 8, wobei der Kern (101) aus nichtmagnetischem Material Kohlenstoff umfasst.
10. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 8, wobei der Kern (101) aus nichtmagnetischem Material Glasfaser umfasst.
11. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 8, wobei der Kern (101) aus nichtmagnetischem Material ein Polymer umfasst.

12. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei eine äußere Oberfläche des Sondenrohrs mit einem biokompatiblen Material oder einer biokompatiblen Beschichtung isoliert ist.
13. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 12, wobei die Antenne durch ein biokompatibles Material oder eine biokompatible Abdeckung abgedeckt ist.
14. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Durchmesser der spiralförmigen Peitschenantenne über ihre axiale Länge hinweg variiert.
15. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 14, wobei der Durchmesser der spiralförmigen Peitschenantenne am proximalen Ende der spiralförmigen Peitschenantenne größer ist als am distalen Ende der spiralförmigen Peitschenantenne.
16. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 14, wobei der Durchmesser der spiralförmigen Peitschenantenne am distalen Ende der spiralförmigen Peitschenantenne größer ist als am proximalen Ende der spiralförmigen Peitschenantenne.
17. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 14, wobei der Durchmesser der spiralförmigen Peitschenantenne mindestens an einer Stelle zwischen dem proximalen Ende und dem distalen Ende der spiralförmigen Peitschenantenne größer ist als mindestens an einem des proximalen Endes oder des distalen Endes der spiralförmigen Peitschenantenne.
18. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 14, wobei der Durchmesser der spiralförmigen Peitschenantenne mindestens an einer Stelle zwischen dem proximalen Ende und dem distalen Ende der spiralförmigen Peitschenantenne kleiner ist als mindestens an einem des proximalen Endes oder des distalen Endes der spiralförmigen Peitschenantenne.
19. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Abstand der Windungen variiert.
20. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 19, wobei der Abstand der Windungen am proximalen Ende der spiralförmigen Spulenantenne größer ist als am distalen Ende der spiralförmigen Spulenantenne.
21. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 19, wobei der Abstand der Windungen am distalen Ende der spiralförmigen Spulenantenne größer ist als am proximalen Ende der spiralförmigen Spulenantenne.
22. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 19, wobei der Abstand der Windungen mindestens an einer Stelle zwischen dem proximalen Ende und dem distalen Ende der spiralförmigen Spulenantenne größer ist als mindestens an einem des distalen Endes der spiralförmigen Spulenantenne oder des proximalen Endes der spiralförmigen Spulenantenne.
23. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 19, wobei der Abstand der Spulenwindungen mindestens an einer Stelle zwischen dem proximalen Ende und dem distalen Ende der spiralförmigen Spulenantenne kleiner ist als mindestens an einem des distalen Endes der spiralförmigen Spule oder des proximalen Endes der spiralförmigen Spule.
24. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Gesamtdurchmesser der Sonde mit Führungsdraht ungefähr 0,25 mm bis 1,0 mm (0,010 bis 0,040 Zoll) beträgt.
25. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der Gesamtdurchmesser der Sonde mit Führungsdraht ungefähr 0,125 mm bis 12,5 mm (5/1000 bis 0,5 Zoll) beträgt.
26. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei der erste Isolator ein Material mit geringem Dielektrizitätsverlust und geringer Dielektrizitätskonstante umfasst.
27. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei die Baugruppe aus Sonde und Führungsdraht mindestens teilweise flexibel ist.
28. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei die Baugruppe aus Sonde und Führungsdraht lenkbar ist.
29. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei die Antenne flexibel ist.
30. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, des Weiteren umfassend eine Symmetrierschaltung.
31. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 30, wobei die Symmetrierschaltung eine abgestimmte Symmetrierschaltung ist.
32. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei die Abschirmung eine spiralförmige Spule umfasst.

33. Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 1, wobei das Sondenrohr konisch ist.

34. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht, das Verfahren umfassend die folgenden Schritte:

das Befestigen eines ersten Isolators (102) um einen nichtmagnetischen leitfähigen Kern (101) herum, um eine Kern-Isolator-Baugruppe zu erzeugen;
das Bereitstellen einer elektrisch leitfähigen Abschirmung (103) auf einem proximalen Abschnitt der Kern-Isolator-Baugruppe; und
das Befestigen einer Hochfrequenzantenne (106) an einem distalen Abschnitt der Kern-Isolator-Baugruppe, **dadurch gekennzeichnet, dass** die Antenne eine schleifenlose, spiralförmige Peitschenantenne umfasst, die eine Mehrzahl von Windungen hat.

35. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, des Weiteren umfassend das Bereitstellen eines äußeren Isolators (104) über der Antenne, der Abschirmung (103) und der Kern-Isolator-Baugruppe.

36. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Befestigens des ersten Isolators (102) um den nichtmagnetischen Kern herum einen Strangpressschritt umfasst.

37. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Befestigens des ersten Isolators (102) um den nichtmagnetischen Kern herum einen Ziehschritt umfasst.

38. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Befestigens des ersten Isolators (102) um den nichtmagnetischen Kern herum das Anbringen eines Schrumpfschlauchs umfasst.

39. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Bereitstellens einer Abschirmung (103) auf dem proximalen Abschnitt der Kern-Isolator-Baugruppe den Schritt des Anbringens einer Umflechtung umfasst.

40. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Bereitstellens einer Abschirmung (103) auf dem proximalen Abschnitt der Kern-Isolator-Baugruppe einen Anstrichschritt umfasst.

41. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Bereitstellens einer Abschirmung (103) auf dem proximalen Abschnitt der Kern-Isolator-Baugruppe einen Beschichtungsschritt umfasst.

42. Verfahren zur Herstellung einer Baugruppe aus Sonde und Führungsdraht gemäß Anspruch 34, wobei der Schritt des Bereitstellens einer Abschirmung (103) auf dem proximalen Abschnitt der Kern-Isolator-Baugruppe einen Zerstäubungsschritt umfasst.

Revendications

1. Un ensemble sonde à fil guide adapté de façon à recevoir des signaux de résonance magnétique à partir d'un échantillon, comprenant :

une tige de sonde (105) possédant une extrémité distale (109) et une extrémité proximale (111), la tige de sonde comprenant un coeur conducteur d'électricité (101) d'un matériau non magnétique,
un premier isolant (102) autour dudit coeur,
un blindage conducteur d'électricité (103) autour d'au moins une partie dudit isolant et une antenne radiofréquence (106) fixée audit coeur à l'extrémité distale de ladite tige de sonde, ladite antenne étant visible sur une image de résonance magnétique, **caractérisé en ce que** l'antenne comprend une antenne fouet hélicoïdale droite possédant une pluralité de spires.

2. L'ensemble sonde à fil guide selon la Revendication 1, comprenant en outre un deuxième isolant (104) autour dudit blindage.

3. L'ensemble sonde à fil guide selon la Revendication 1, où ledit coeur (101) d'un matériau non magnétique est fabriqué à partir d'un métal conducteur contenant un ou plusieurs métaux du groupe de métaux se composant de or, argent, cuivre, acier inoxydable compatible avec la résonance magnétique et aluminium.

4. L'ensemble sonde à fil guide selon la Revendication 1, où ledit coeur (101) d'un matériau non magnétique contient un matériau super-élastique.

5. L'ensemble sonde à fil guide selon la Revendication 4 où ledit matériau super-élastique contient du Nitinol.

6. L'ensemble selon la Revendication 1 ou 5, où ledit coeur (101) d'un matériau non magnétique est plaqué avec des couches alternées d'or et d'argent.

7. L'ensemble sonde à fil guide selon la Revendication 1 ou 5, où ledit coeur (101) d'un matériau non magnétique est plaqué avec une pluralité de couches de métal conducteur, lesdites couches de métal conducteur contenant un ou plusieurs métaux du groupe de métaux se composant de or, argent, cuivre et aluminium. 5
8. L'ensemble sonde à fil guide selon la Revendication 1, où ledit coeur (101) d'un matériau non magnétique contient un matériau non métallique plaqué avec un matériau conducteur. 10
9. L'ensemble sonde à fil guide selon la Revendication 8, où ledit coeur (101) de matériau non métallique contient du carbone. 15
10. L'ensemble sonde à fil guide selon la Revendication 8, où ledit coeur (101) de matériau non métallique contient de la fibre de verre. 20
11. L'ensemble sonde à fil guide selon la Revendication 8, où ledit coeur (101) de matériau non métallique contient un polymère. 25
12. L'ensemble sonde à fil guide selon la Revendication 1, où une surface extérieure de ladite tige de sonde est isolée avec un matériau ou un revêtement biocompatible. 30
13. L'ensemble sonde à fil guide selon la Revendication 12 où ladite antenne est recouverte d'un matériau ou d'un enrobage biocompatible.
14. L'ensemble sonde à fil guide selon la Revendication 1 où le diamètre de ladite antenne fouet hélicoïdale varie sur sa longueur axiale. 35
15. L'ensemble sonde à fil guide selon la Revendication 14 où le diamètre de ladite antenne fouet hélicoïdale est plus grand à l'extrémité proximale de ladite antenne fouet hélicoïdale qu'à l'extrémité distale de ladite antenne fouet hélicoïdale. 40
16. L'ensemble sonde à fil guide selon la Revendication 14 où le diamètre de ladite antenne fouet hélicoïdale est plus grand à l'extrémité distale de ladite antenne fouet hélicoïdale qu'à l'extrémité proximale de ladite antenne fouet hélicoïdale. 45
17. L'ensemble sonde à fil guide selon la Revendication 14, où ledit diamètre de ladite antenne fouet hélicoïdale est plus grand à au moins un point entre ladite extrémité proximale et ladite extrémité distale de ladite antenne fouet hélicoïdale qu'il n'est à au moins une extrémité de ladite extrémité proximale ou de ladite extrémité distale de ladite antenne fouet hélicoïdale. 50
18. L'ensemble sonde à fil guide selon la Revendication 14, où ledit diamètre de ladite antenne fouet hélicoïdale est plus petit à au moins un point entre l'extrémité proximale et l'extrémité distale de ladite antenne fouet hélicoïdale qu'il n'est à au moins une extrémité de ladite extrémité proximale ou de ladite extrémité distale de ladite antenne fouet hélicoïdale. 55
19. L'ensemble sonde à fil guide selon la Revendication 1 où l'espacement desdites spires varie.
20. L'ensemble sonde à fil guide selon la Revendication 19 où l'espacement desdites spires est plus grand à l'extrémité proximale de ladite antenne à cadre hélicoïdale qu'à l'extrémité distale de ladite antenne à cadre hélicoïdale.
21. L'ensemble sonde à fil guide selon la Revendication 19 où l'espacement desdites spires est plus grand à l'extrémité distale de ladite antenne à cadre hélicoïdale qu'à l'extrémité proximale de ladite antenne à cadre hélicoïdale.
22. L'ensemble sonde à fil guide selon la Revendication 19, où l'espacement desdites spires est plus grand à au moins un point entre l'extrémité proximale et l'extrémité distale de ladite antenne à cadre hélicoïdale qu'il n'est à au moins une extrémité de ladite extrémité distale de ladite antenne à cadre hélicoïdale ou de ladite extrémité proximale de ladite antenne à cadre hélicoïdale.
23. L'ensemble sonde à fil guide selon la Revendication 19, où l'espacement desdites spires de bobine est plus petit à au moins un point entre l'extrémité proximale et l'extrémité distale de ladite antenne à cadre hélicoïdale qu'il n'est à au moins une extrémité de ladite extrémité distale de ladite antenne à cadre hélicoïdale ou de ladite extrémité proximale de ladite antenne à cadre hélicoïdale.
24. L'ensemble sonde à fil guide selon la Revendication 1, où le diamètre total de ladite sonde à fil guide se situe entre environ 0,25 mm et 1,0 mm (0,010 à 0,040 pouce).
25. L'ensemble sonde à fil guide selon la Revendication 1, où le diamètre total de ladite sonde à fil guide se situe entre environ 0,125 mm et 12,5 mm (entre 5/1000 de pouce et 0,5 pouce).
26. L'ensemble sonde à fil guide selon la Revendication 1, où ledit premier isolant contient un matériau à faible constante diélectrique et à faible perte diélectrique.
27. L'ensemble sonde à fil guide selon la Revendication 1, où ledit ensemble sonde à fil guide est au moins

partiellement souple.

28. L'ensemble sonde à fil guide selon la Revendication 1, où ledit ensemble sonde à fil guide est orientable.

29. L'ensemble sonde à fil guide selon la Revendication 1, où ladite antenne est souple.

30. L'ensemble sonde à fil guide selon la Revendication 1, comprenant en outre un circuit symétriseur.

31. L'ensemble sonde à fil guide selon la Revendication 30, où ledit circuit symétriseur comprend un circuit symétriseur accordé.

32. L'ensemble sonde à fil guide selon la Revendication 1, où ledit blindage comprend une bobine hélicoïdale.

33. L'ensemble sonde à fil guide selon la Revendication 1, où ladite tige de sonde est conique.

34. Un procédé de fabrication d'un ensemble sonde à fil guide, comprenant les opérations suivantes :

la fixation d'un premier isolant (102) autour d'un coeur conducteur non magnétique (101) de façon à créer un ensemble isolant-coeur, la fourniture d'un blindage conducteur d'électricité (103) sur une partie proximale dudit ensemble isolant-coeur, et la fixation d'une antenne radiofréquence (106) à une partie distale dudit ensemble isolant-coeur, **caractérisé en ce que** l'antenne comprend une antenne fouet hélicoïdale droite possédant une pluralité de spires.

35. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, comprenant en outre la fourniture d'un isolant extérieur (104) par dessus ladite antenne, ledit blindage (103) et ledit ensemble isolant-coeur.

36. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fixation dudit premier isolant (102) autour dudit coeur non magnétique comprend une opération d'extrusion.

37. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fixation dudit premier isolant (102) autour dudit coeur non magnétique comprend une opération d'étirage.

38. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fixation dudit premier isolant (102) autour dudit


coeur non magnétique comprend l'application d'un tube thermorétractable.

39. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fourniture d'un blindage (103) sur ladite partie proximale dudit ensemble isolant-coeur comprend l'opération d'application d'une gaine tressée.

40. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fourniture d'un blindage (103) sur ladite partie proximale dudit ensemble isolant-coeur comprend une opération de peinture.

41. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fourniture d'un blindage (103) sur ladite partie proximale dudit ensemble isolant-coeur comprend une opération de plaquage.

42. Le procédé de fabrication d'un ensemble sonde à fil guide selon la Revendication 34, où ladite opération de fourniture d'un blindage (103) sur ladite partie proximale dudit ensemble isolant-coeur comprend une opération de pulvérisation.

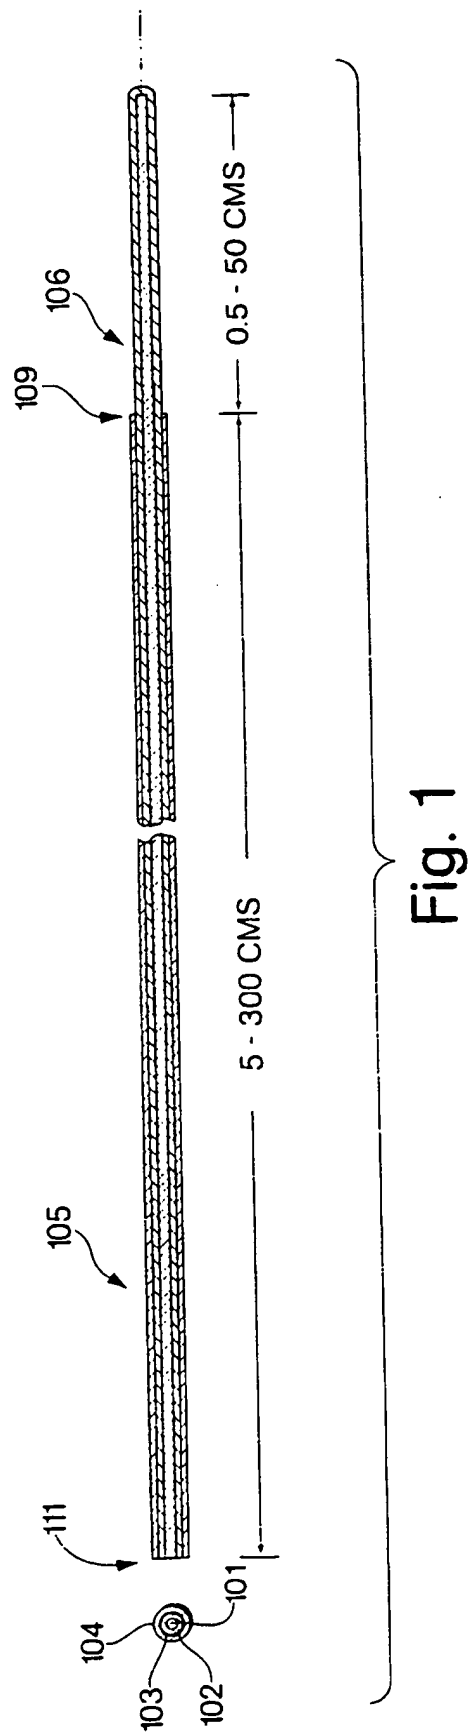

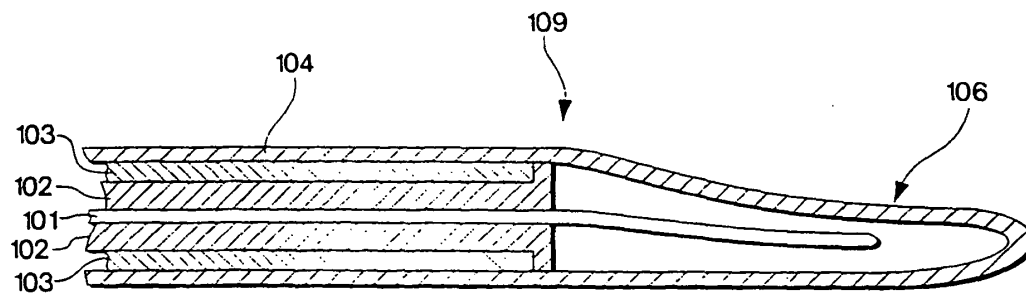


Fig. 2

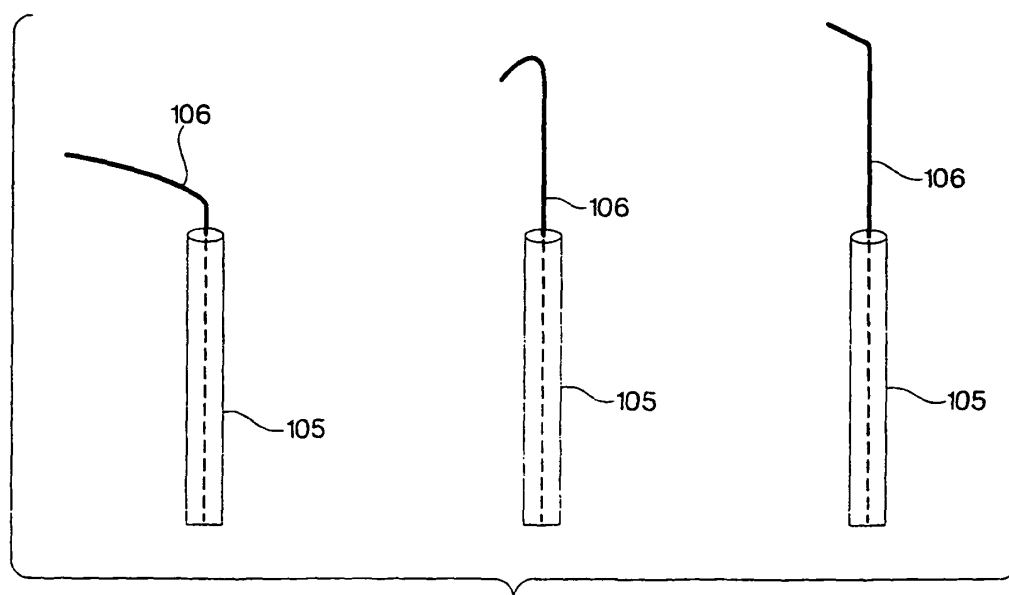


Fig. 3

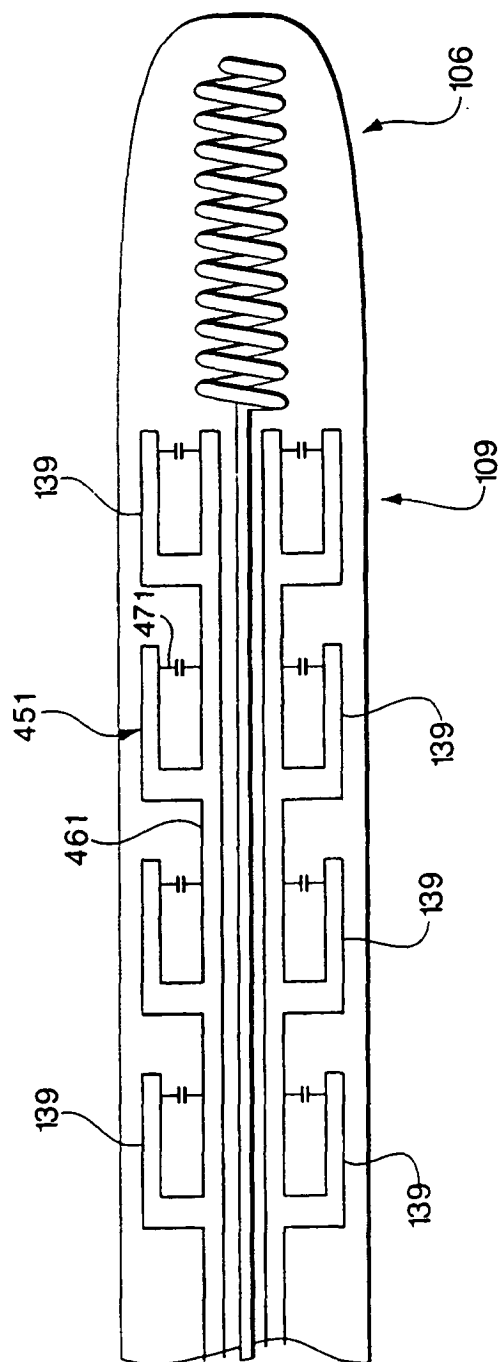


Fig. 4

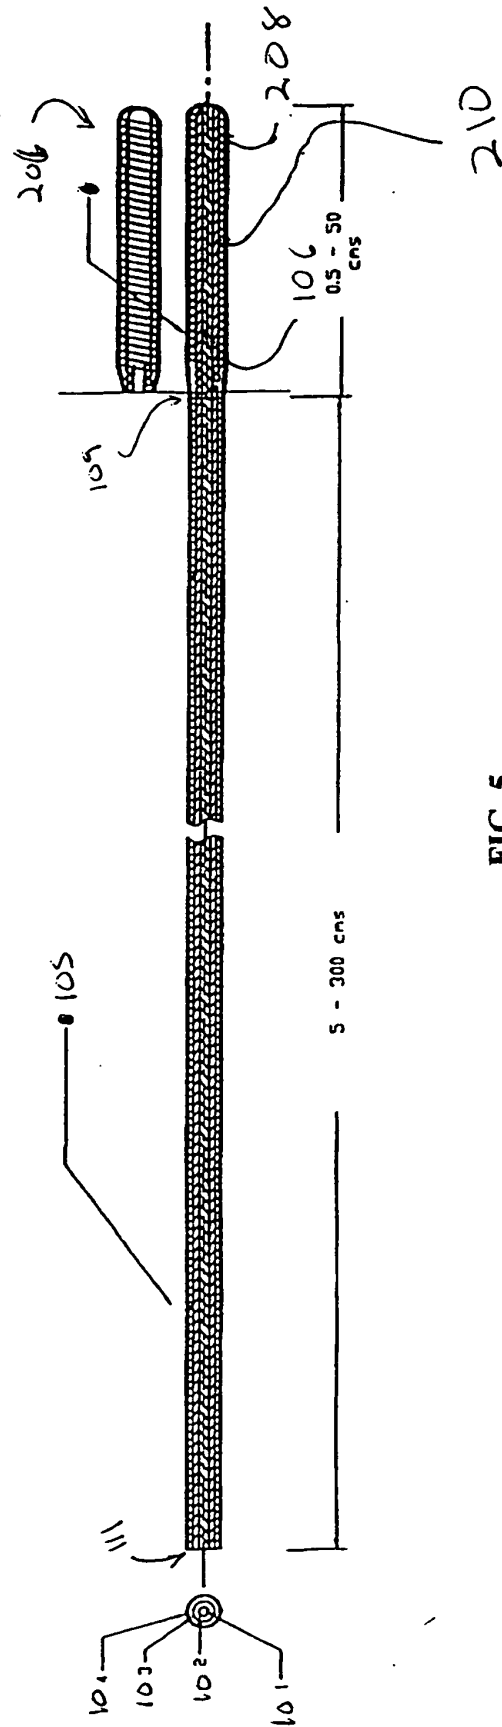


FIG. 5

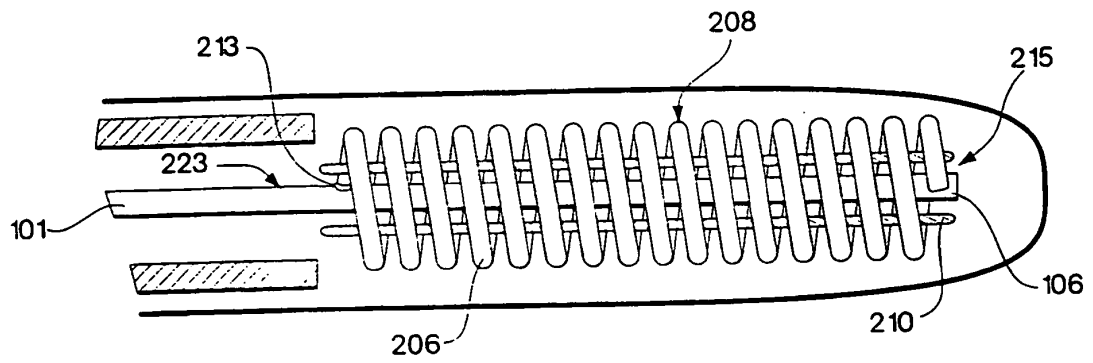


Fig. 6

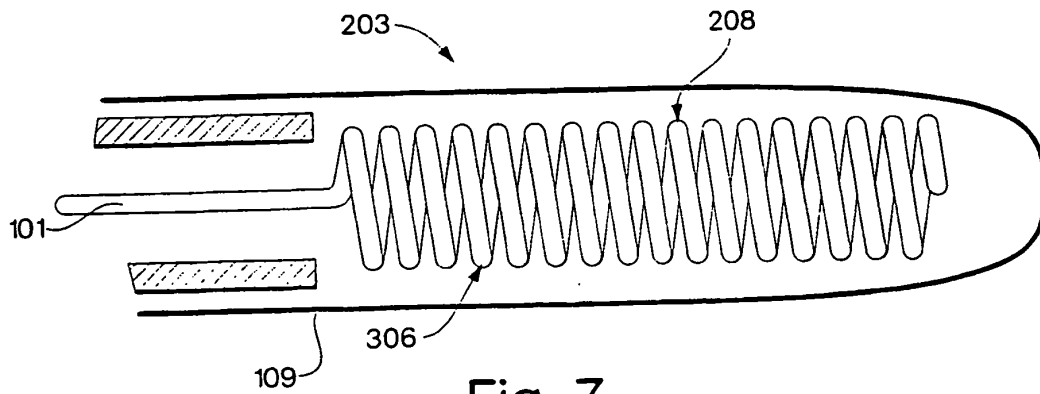


Fig. 7

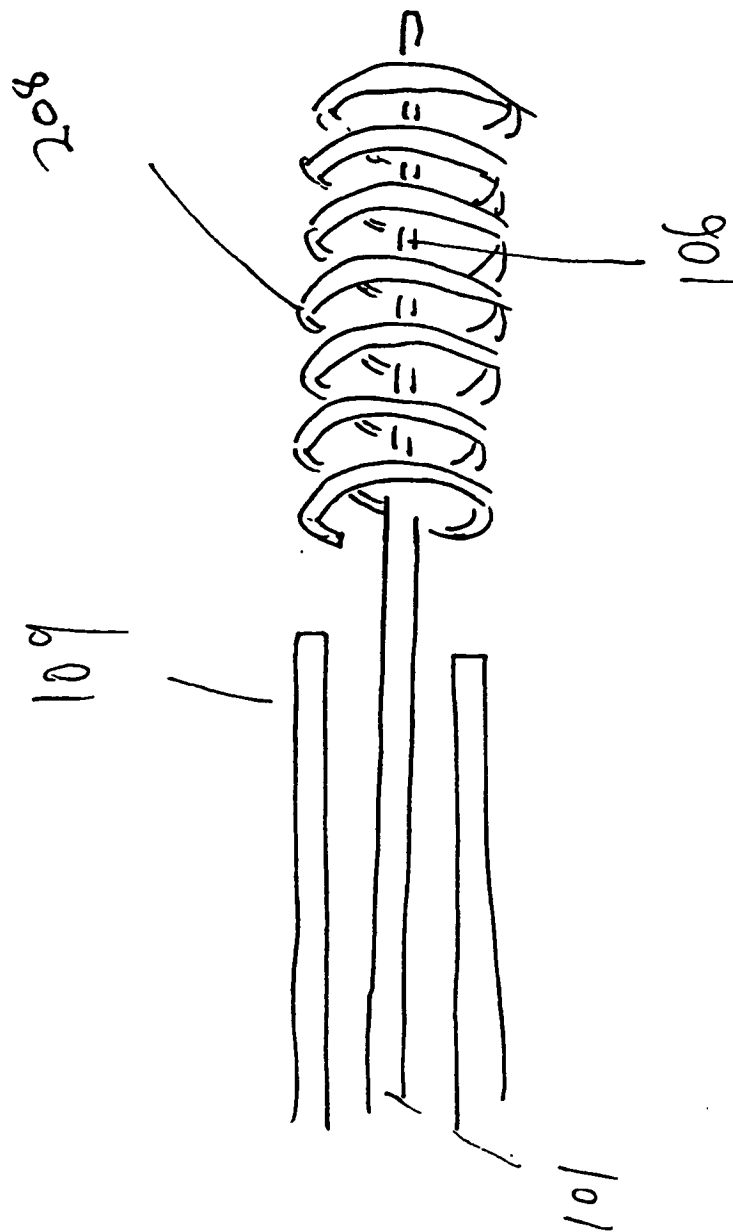


FIG. 8

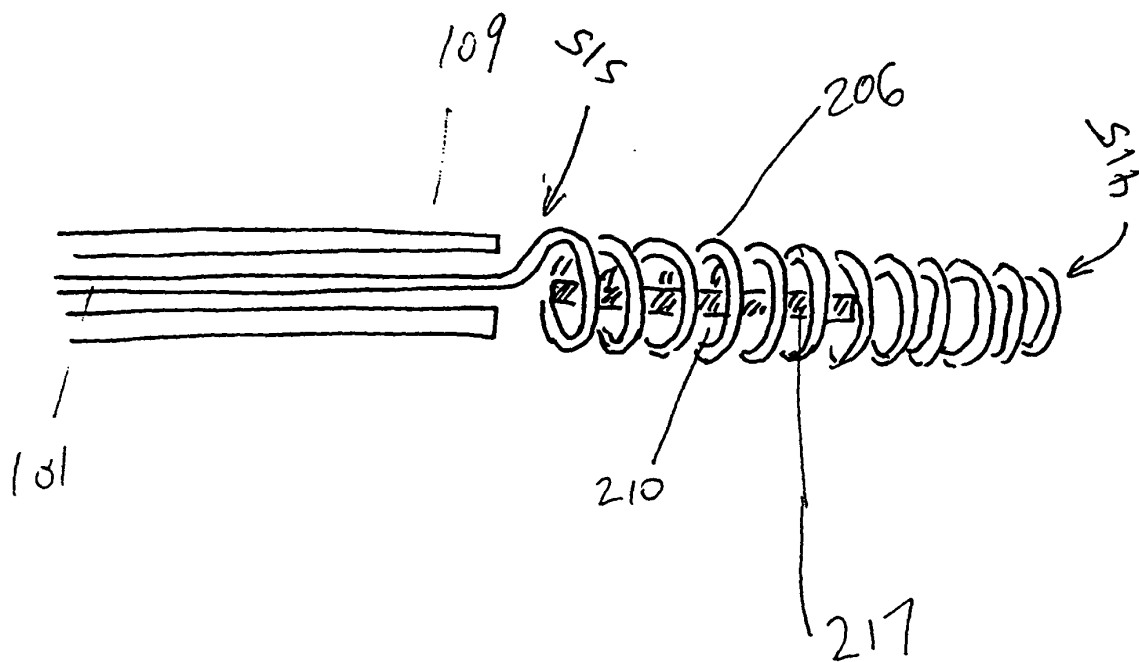
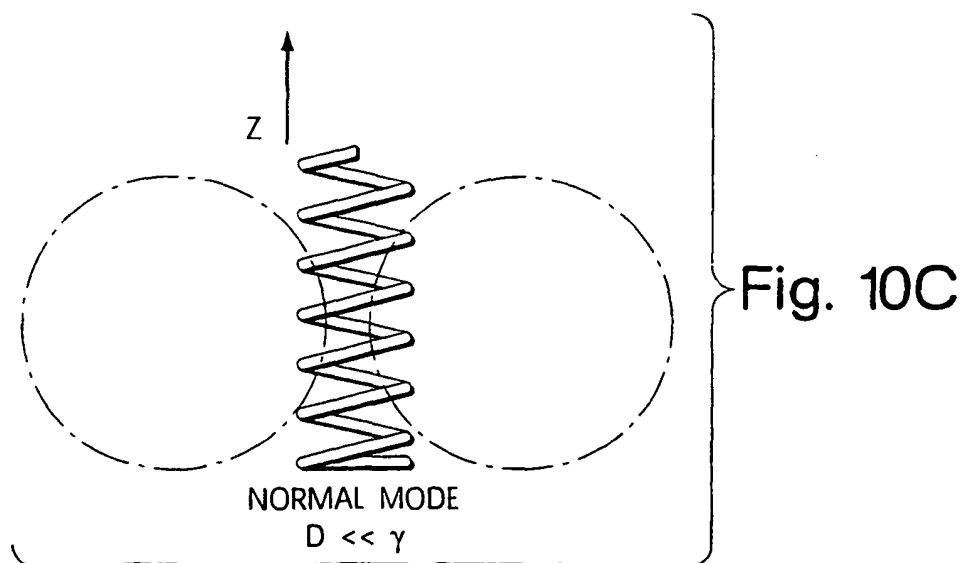
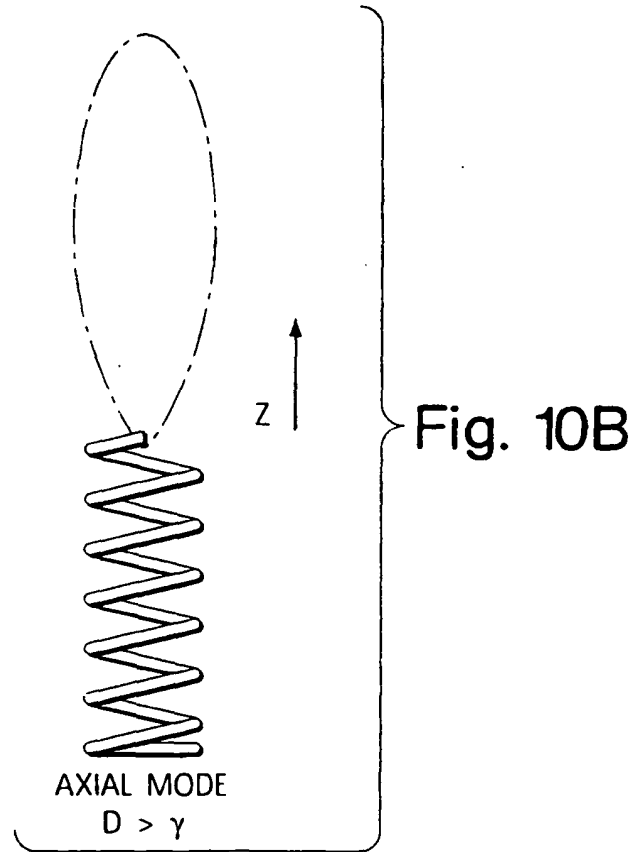
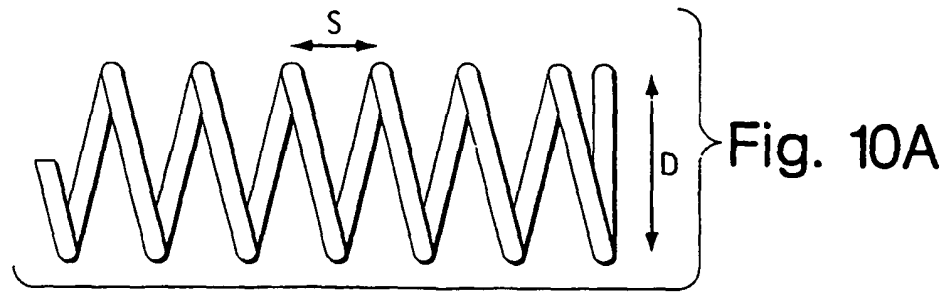


FIG. 9



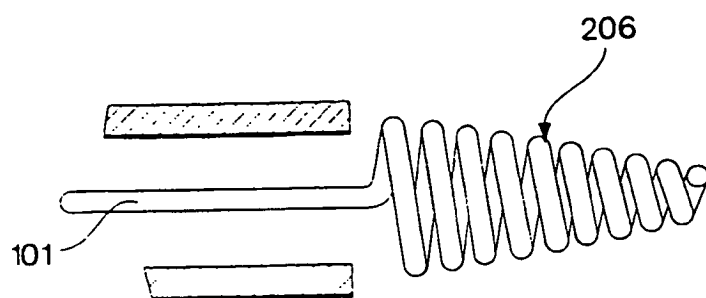


Fig. 11

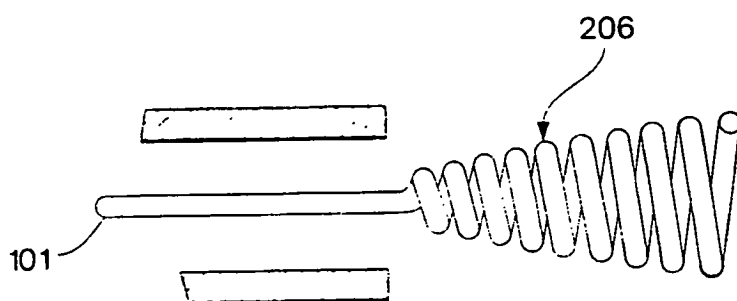


Fig. 12

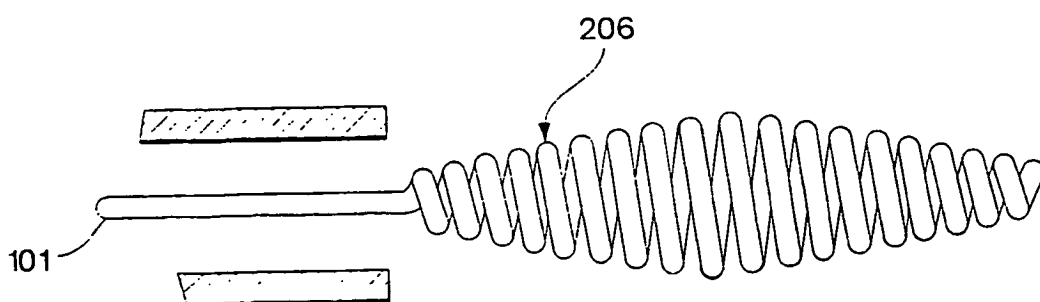


Fig. 13

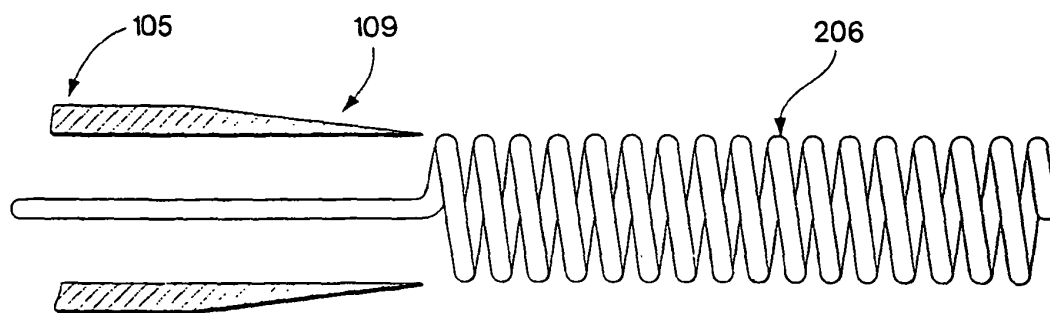


Fig. 14

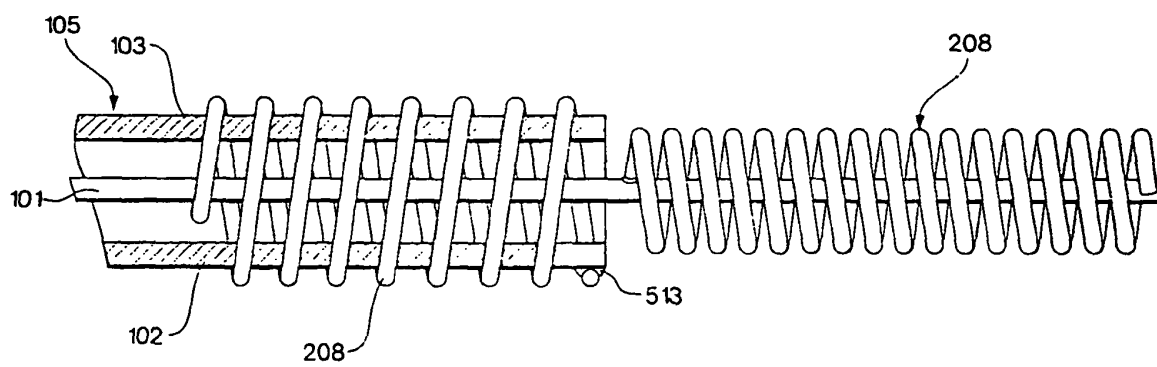


Fig. 15

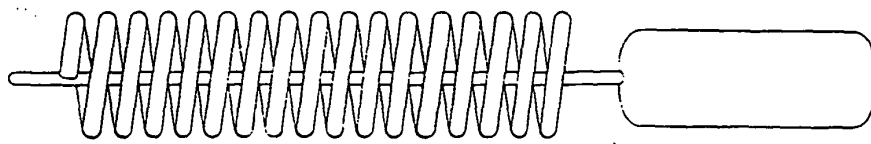


Fig. 16A

106

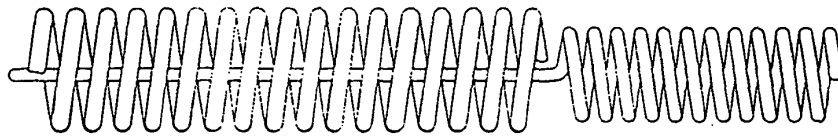


Fig. 16B

306

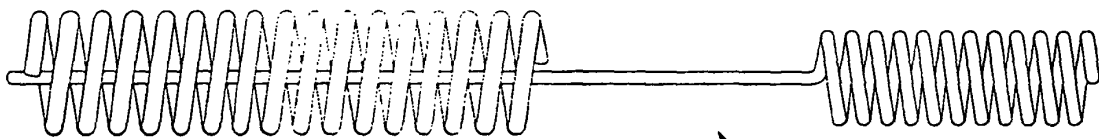


Fig. 16C

306



Fig. 16D

306

1601

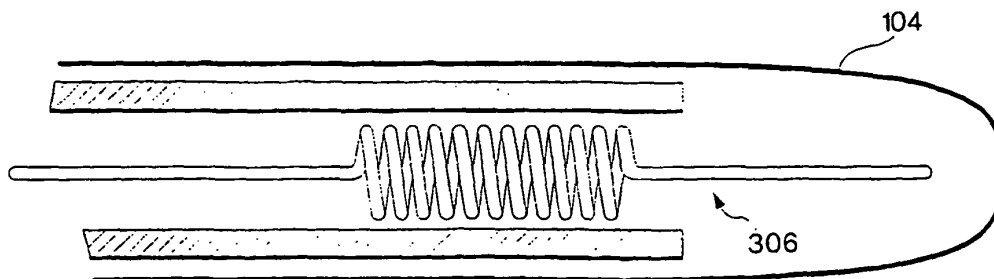


Fig. 16E

306

104

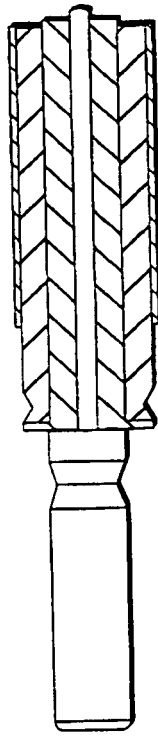


Fig. 17A

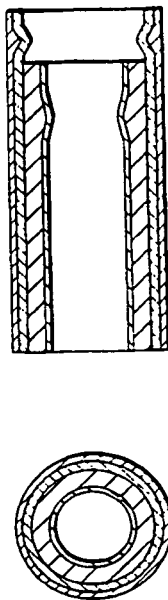


Fig. 17B

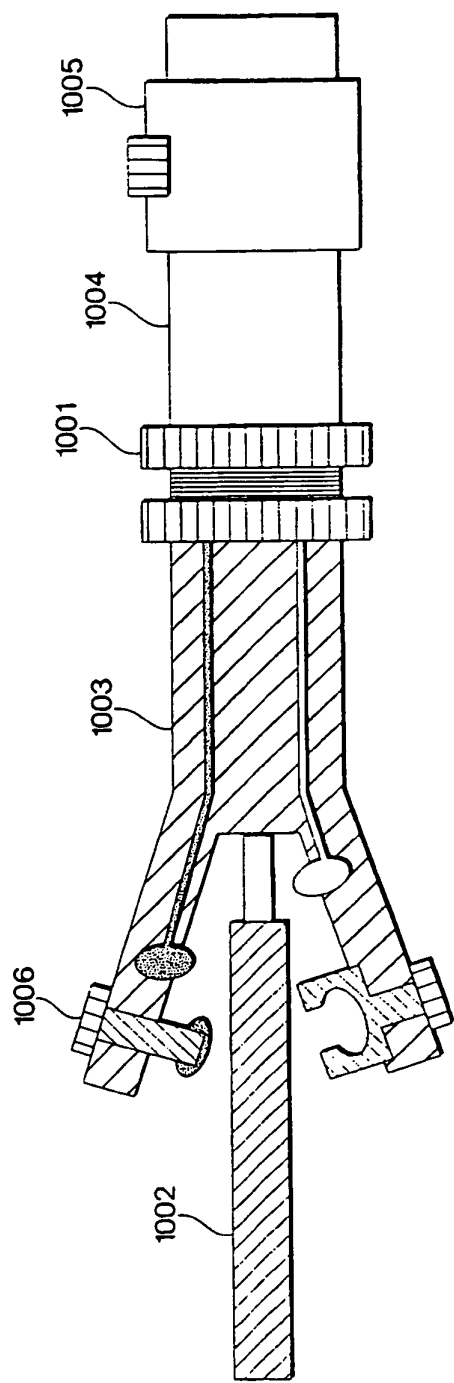


Fig. 18A

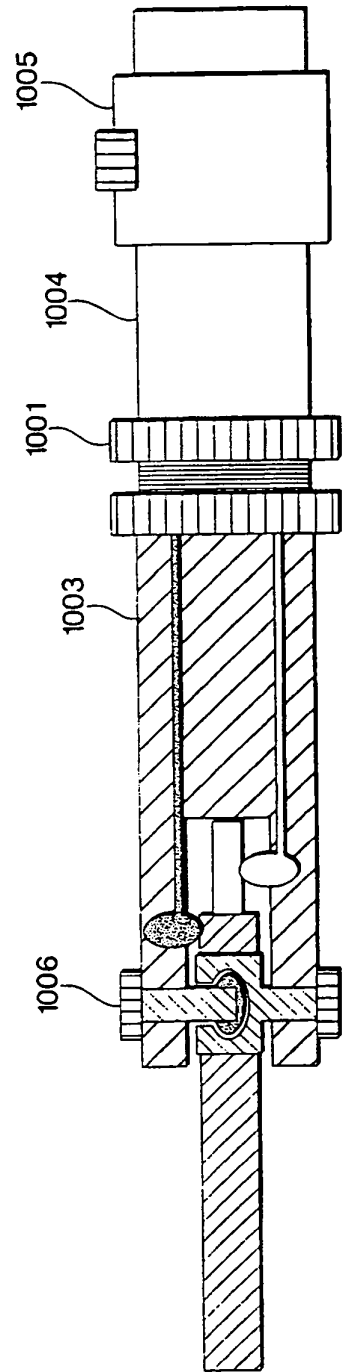


Fig. 18B

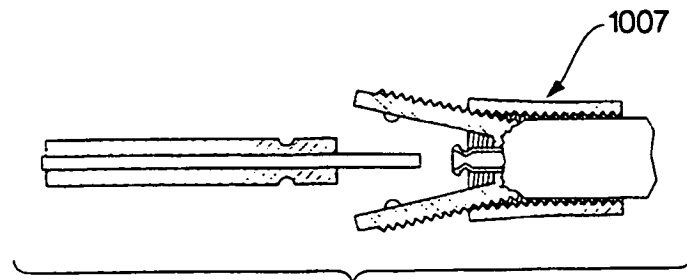


Fig. 19

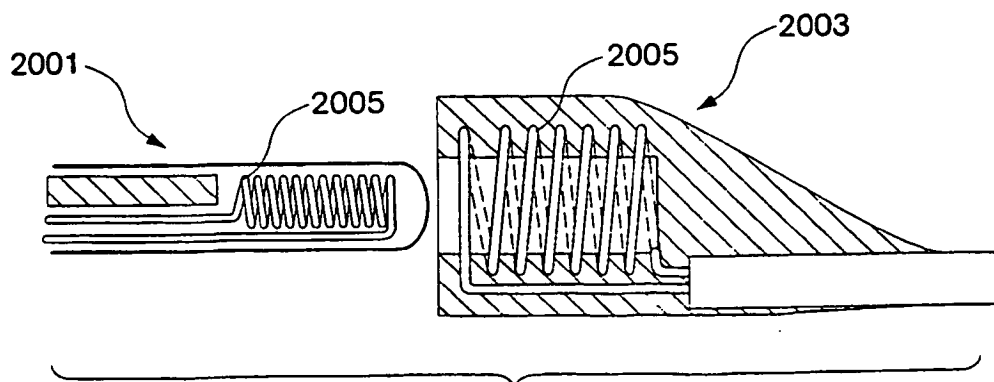

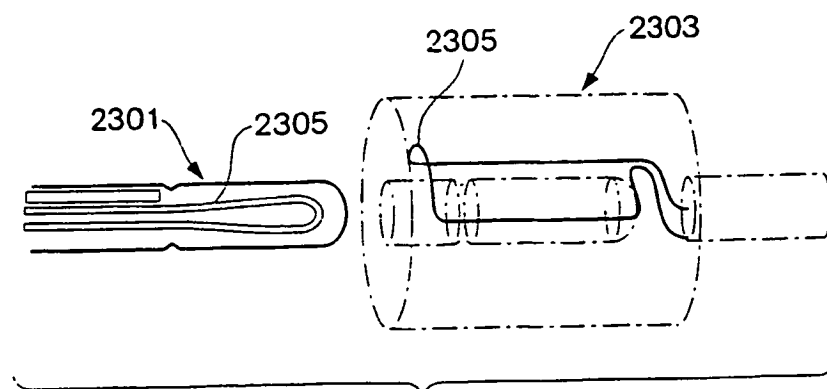
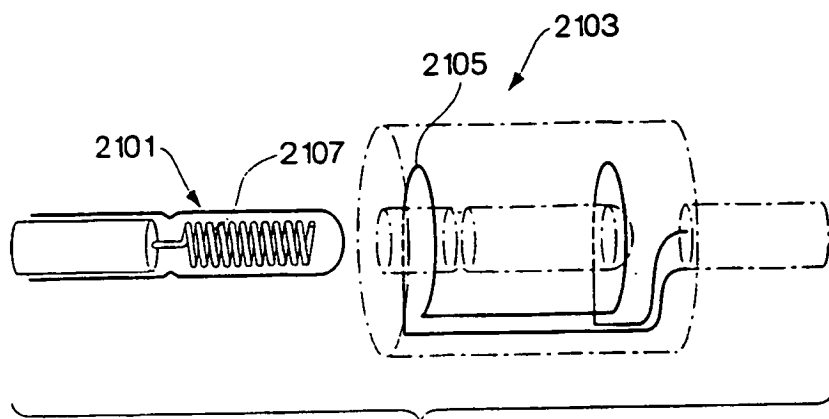


Fig. 21






Fig. 24A

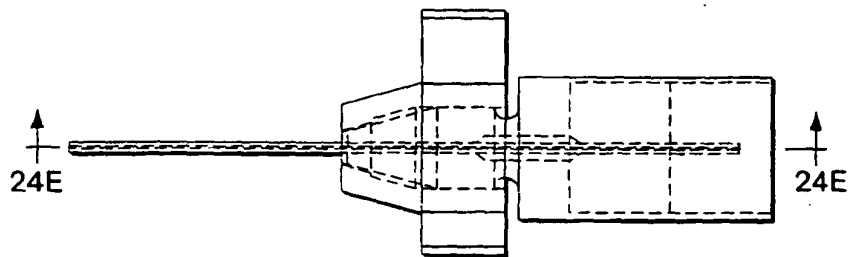


Fig. 24B



Fig. 24C




Fig. 24D

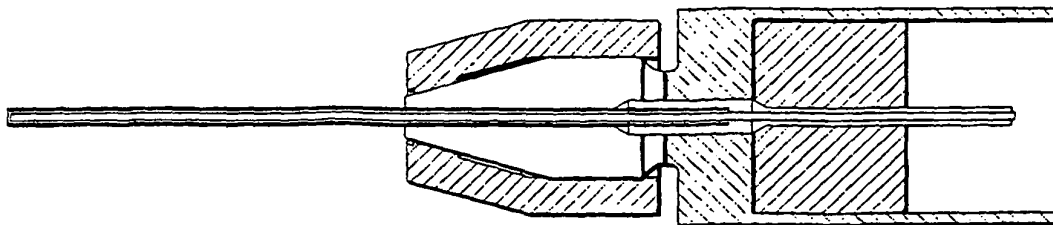


Fig. 24E

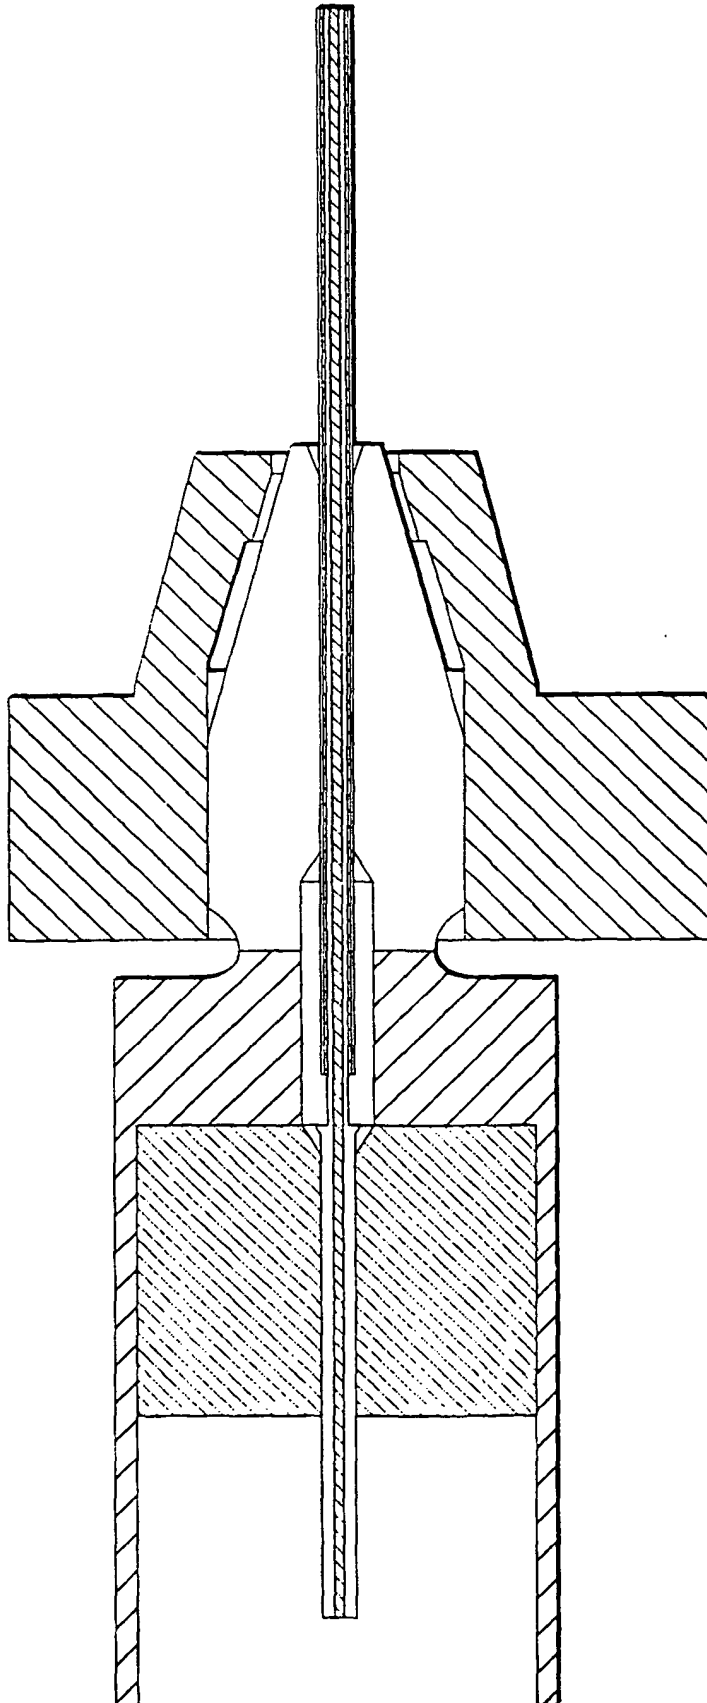


Fig. 25

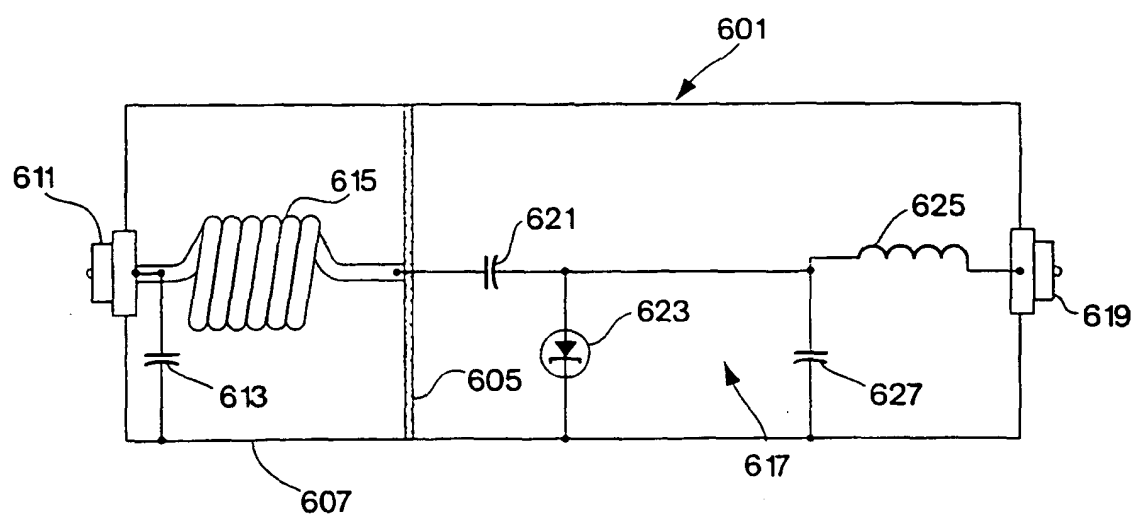


Fig. 26

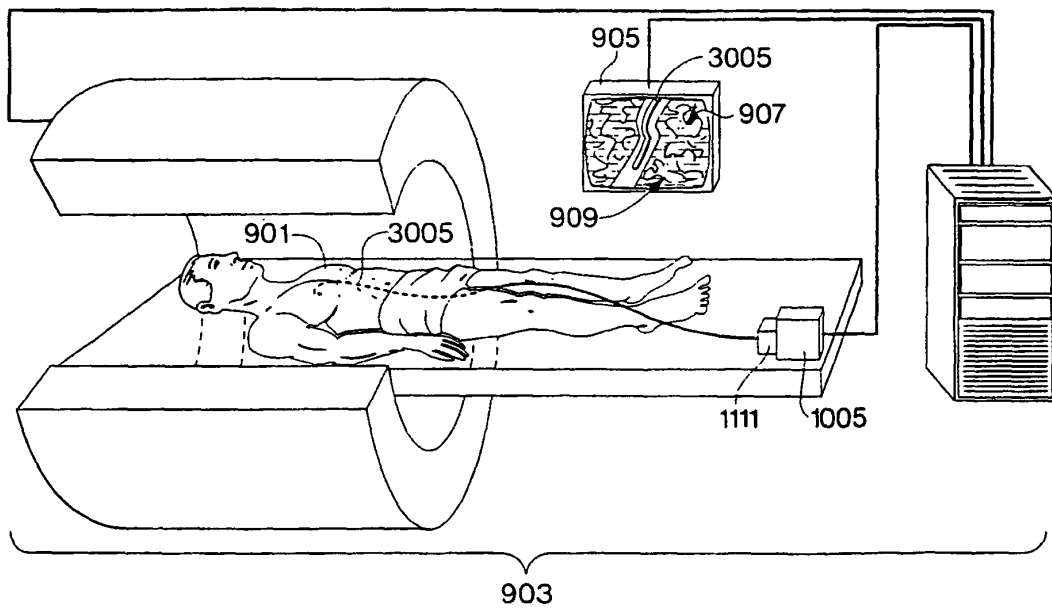


Fig. 27

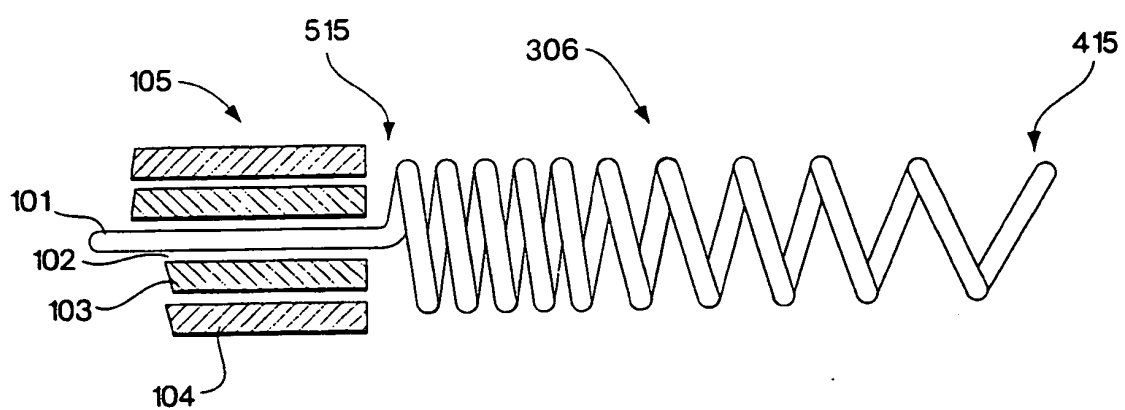


Fig. 28

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0673621 A [0013]
- WO 9740396 A [0014]
- US 4932411 A [0015]

专利名称(译)	磁共振成像导丝探针		
公开(公告)号	EP1169749B1	公开(公告)日	2010-05-26
申请号	EP2000922135	申请日	2000-04-13
[标]申请(专利权)人(译)	SURGIVISION 医疗局TECH许可使用的约翰霍普金斯UNIV学校		
申请(专利权)人(译)	SURGI-VISION 约翰·霍普金斯大学，医学院，技术执照办公室		
当前申请(专利权)人(译)	SURGI-VISION 约翰·霍普金斯大学，医学院，技术执照办公室		
[标]发明人	LARDO ALBERT C YANG XIAOMING ATALAR ERGIN KARMARKAR PARAG MCVEIGH ELLIOTT R HALPERIN HENRY R MCNAMARA CHRISTINE ENGER BOTTOMLEY PAUL A		
发明人	LARDO, ALBERT, C. YANG, XIAOMING ATALAR, ERGIN KARMARKAR, PARAG MCVEIGH, ELLIOTT, R. HALPERIN, HENRY, R. MCNAMARA, CHRISTINE, ENGER BOTTOMLEY, PAUL, A.		
IPC分类号	G01R33/28 A61B5/00 A61B5/055 A61M25/01 G01R33/34 H01Q1/36 H01Q1/40 H01Q1/44 H01Q11/08		
CPC分类号	G01R33/287 G01R33/34084		
优先权	60/129364 1999-04-15 US 09/536090 2000-03-24 US		
其他公开文献	EP1169749A2 EP1169749A4		
外部链接	Espacenet		

摘要(译)

本发明描述了一种用于MRI导丝的系统，方法和装置，其可以在MRI上可见，可以充当天线并从周围主题接收MRI信号，并且可以允许使用多个介入工具而无需移除导丝。来自一个主题。

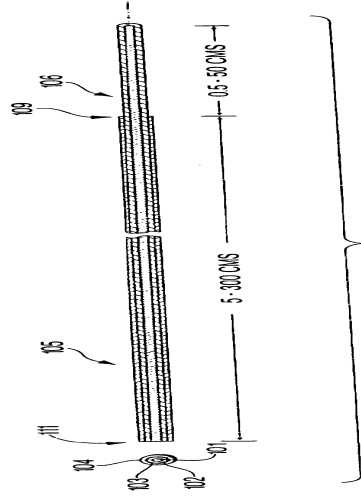


Fig. 1