

(19)



(11)

EP 2 404 548 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
25.03.2020 Bulletin 2020/13

(51) Int Cl.:
A61B 5/00 (2006.01) **A61B 5/024 (2006.01)**
H04B 5/00 (2006.01)

(21) Application number: **11172320.1**

(22) Date of filing: **01.07.2011**

(54) Short range wireless communications

Drahtlose Kurzstreckenkommunikation
 Communications sans fil à courte distance

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **09.07.2010 FI 20105790**

(43) Date of publication of application:
11.01.2012 Bulletin 2012/02

(73) Proprietor: **Polar Electro Oy**
90440 Kempele (FI)

(72) Inventors:
 • **Miettinen, Jari**
90540 Oulu (FI)

• **Kemppainen, Juhani**
90540 Oulu (FI)

(74) Representative: **Kolster Oy Ab**
(Salmisaarenaukio 1)
P.O. Box 204
00181 Helsinki (FI)

(56) References cited:
EP-A1- 2 107 837 **EP-A1- 2 335 563**
WO-A1-2008/088193 **WO-A2-2008/059460**
CN-A- 1 795 814 **US-A1- 2007 202 807**
US-A1- 2009 062 778 **US-A1- 2009 088 089**
US-A1- 2009 182 388 **US-A1- 2009 270 949**

EP 2 404 548 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Field**

[0001] The invention relates to the field of wireless short range communications.

Background

[0002] A transmitter apparatus, such as a heart rate monitor, may communicate information, such as heart activity data, to a receiver apparatus, such as an exercise apparatus, over a wireless link. However, as there may be many transmitter apparatuses present in a gym, for example, it may be problematic to find out which transmitter apparatus wishes to be paired together with a specific receiver apparatus or which pair of a transmitter apparatus and a receiver apparatus should communicate with each other.

[0003] US 2009/182388 discloses an implantable medical device for use in a patient management system. The implantable medical device includes a first non-rechargeable battery configured to power at least the sensor and the processor. In addition, a first communications unit is configured to be powered by the first non-rechargeable battery and includes a wireless transmitter capable of establishing a first communications link with a host computer using an external local receiver, when said first wireless transmitter is within a short-range telemetry communication range of said local receiver, to deliver notification of the significant events to the host computer. The implantable medical device also includes a second rechargeable battery and a second communications unit powered by the second rechargeable battery. The second communications unit is capable of establishing a second communications link with said host computer over a pervasive wireless communications network.

[0004] US 2009270949 relates to systems, devices and methods for accessing an implantable medical device when the security key is not known. The systems, methods and devices help to access an implantable medical device through a back door to permit non-secure communications. The systems, devices, and methods require short range external stimulus to indicate to the implantable medical device that a valid communication is about to be received.

[0005] US 2009062778 relates secure pairing of electronically controlled devices adapted to communicate with each other. Thus, a medical system is provided comprising a first unit and a second unit, the system comprising first means of communication allowing a first group of data types to be transmitted between the first unit and the second unit, the first unit comprising an acoustic transducer having a transducer coil with a plurality of windings, the transducer coil serving as an antenna for wireless signals transmitted between the first and second units.

[0006] WO 2008/059460 discloses a method and a

system for activating a communication device in presence of a field generated by a near field communication (NFC) tag reader in a near field communication (NFC) environment.

[0007] US 2007202807 discloses a method and a system for Bluetooth communication. In the Bluetooth system, a Bluetooth device includes: a Radio Frequency Identification (RFID) reader for reading out RFID information from the RFID Tag within an effective transmission and receiving range and outputting the RFID information; a control unit for activating the RFID reader when a request for Bluetooth connection using the RFID is inputted by a user in a Bluetooth communication mode, extracting the bonding information from the RFID information inputted from the RFID reader, and outputting the bonding information; and a Bluetooth module for receiving the bonding information outputted from the control unit, pairing the first Bluetooth device using the bonding information, and performing Bluetooth communication.

[0008] EP 2107837 discloses a portable apparatus and a counterpart apparatus wherein an induction-based magnetic field is used to communicate an identifier for a pairing process CN 1795814A discloses a medical monitoring device with short-range and long-range transmission capabilities. The intensity of the received short-range signal is monitored, and when it drops below a threshold the data transfer occurs using the long-range communication means.

[0009] WO 2008/088193 discloses a wireless network wherein the wireless stations communicate with each other using a control channel and a data channel which have the same range. The control channel is used for control message transmissions to coordinate the transmissions on the data channel.

[0010] US 2009/008808 A1 discloses a dual mode communication device which utilizes a control channel to exploit diversity, history, and context in advance of establishing a broadband data exchange session on a broadband but shorter range wireless data channel.

Brief description

[0011] According to an aspect of the present invention, there is provided an apparatus as specified in claim 1.

[0012] According to another aspect of the present invention, there is provided a method as specified in claim 9.

[0013] According to yet another aspect of the present invention, there is provided a computer program product embodied on a computer readable distribution medium as specified in claim 10.

[0014] According to yet another aspect of the present invention, there is provided an apparatus as specified in claim 11.

[0015] Preferred embodiments are defined in the dependent claims. In an embodiment, the radio resource indicated with the short-range signal is a reception timing of the radio signal, and the reception control circuitry is

arranged to synchronize the reception circuitry to receive the radio signal at the reception timing determined from the received short-range signal.

[0016] In an embodiment, the reception timing of the short-range signal indicates the reception timing of the radio signal.

[0017] In an embodiment, the short-range signal is a measurement signal carrying information on a measurement, and the reception control circuitry is arranged to receive short range signals at irregular time intervals.

[0018] In an embodiment, the measurement signal is a heart-rate signal and the receiver apparatus is an exercise apparatus configured to process the measurement signal and to provide information on an exercise on the basis of the processed measurement signal.

[0019] In an embodiment, the radio signal carries an identification code that identifies a radio transmitter that transmitted the radio signal, and the reception control circuitry is arranged to identify the radio transmitter from the identification code received in the radio signal associated with the radio resource indicated by the received short range signal and to configure the radio receiver to execute a pairing protocol for a radio connection with said radio transmitter.

[0020] In an embodiment, the short-range receiver is an induction-based receiver and the short range signal is a magnetic signal.

[0021] The reception control circuitry may be arranged to compare a reception timing of a radio signal received through the radio receiver with a reception timing of the short-range signal and to decode the radio signal, if the reception timing of the radio signal relative to the reception timing of the short-range signal matches with a predetermined timing relation.

List of drawings

[0022] Embodiments of the present invention are described below, by way of example only, with reference to the accompanying drawings, in which

Figure 1 illustrates block diagrams of devices according to embodiments of the invention;

Figures 2A and 2B illustrate communication modes according to embodiments of the invention;

Figure 3 illustrates time diagrams related to wireless communication according to an embodiment of the invention;

Figure 4 is a flow diagram of a process for carrying out wireless communication according to an embodiment of the invention; and

Figure 5 illustrates an example of a short range signal pulse that may be used in connection with embodiments of the invention.

Description of embodiments

[0023] The following embodiments are exemplary. Al-

though the specification may refer to "an", "one", or "some" embodiment(s) in several locations, this does not necessarily mean that each such reference is to the same embodiment(s), or that the feature only applies to a single embodiment. Single features of different embodiments may also be combined to provide other embodiments. Furthermore, words "comprising" and "including" should be understood as not limiting the described embodiments to consist of only those features that have been mentioned and such embodiments may contain also features/structures that have not been specifically mentioned.

[0024] Figure 1 illustrates a transmitter apparatus 100 and a receiver apparatus 106. Figure 1 is a simplified block diagram that only shows some elements and functional entities, all being logical units whose implementation may differ from what is shown. The connections shown in Figure 1 are logical connections; the actual physical connections may be different. It is apparent to a person skilled in the art that the described apparatuses 100, 106 may also comprise other functions and structures, e.g. a memory and/or a user interface. It should be appreciated that some functions, structures, and elements, and the actual protocols used for communication may vary in different embodiments of the invention. Therefore, they need not be discussed in more detail here. The specifications of apparatuses 100, 106 develop rapidly. Such a development may require extra changes to the described embodiments. Therefore, all words and expressions should be interpreted broadly and they are intended to illustrate, not to restrict, the embodiments. Although the apparatuses 100, 106 have been depicted as separate single entities, different parts may be implemented in one or more physical or logical entities.

[0025] The term 'transmitter apparatus' 100 may refer to a complete device that a user is capable of carrying around, or to a part of such a device. The complete device 100 may be a heart rate monitor, a heart rate transmitter wearable on the chest of a user, or another personal measurement device, for example a positioning device, a stride sensor or a blood pressure monitor. A part of such a device 100 may be an electronic circuitry implementing or causing the implementation of the described functionalities of the transmitter apparatus 100. The electronic circuit may comprise one or more digital signal processors configurable by software, logic components, standard integrated circuits, and/or application-specific integrated circuits (ASIC).

[0026] The term 'receiver apparatus' 106 may refer to a complete device capable of interacting with the transmitter apparatus 100, or to a part of such a device. The complete device 106 may be a computer, a wearable exercise apparatus, e.g. a wrist computer, a portable computer, a mobile phone, or a health club apparatus, for example. A part of such a device 106 may be an electronic circuit implementing or causing the implementation of the described functionalities of the receiver apparatus 106. The computer may be a personal computer such as

a desktop computer, a laptop computer, or a palmtop computer. The computer may also be a server computer. The computer may store and process heart activity data of numerous persons. The computer may be team-specific, i.e. it is used to process the heart activity data of a certain team. Alternatively, the computer may provide heart activity data storage and analysis services to a wide audience, as a world-wide web (WWW) server over the Internet, for example. If the receiver apparatus 106 is an exercise apparatus, such as a treadmill, the training load may be regulated, a diary may be stored, etc. by utilizing the communication to be described later on.

[0027] The transmitter apparatus 100 comprises a wireless transmission circuitry comprising two communication devices: a short range transmitter 102 and a radio transmitter 104, wherein at least one of the short range transmitter 102 and the radio transmitter 104 may be provided with reception functionalities as well. The short range transmitter 102 and the radio transmitter 104 may be provided as separate logical and physical entities realized by separate circuits comprised in the wireless transmission circuitry, or they may be physically in the same circuit. The short range transmitter 102 may comprise a digital to analog converter converting a digital transmission signal into analog waveforms, and an analog transmission circuitry including at least one amplifier arranged to amplify the analog transmission signal, at least one filter filtering the analog transmission signal to mitigate undesired signal components, optionally at least one frequency converter configured to frequency-convert the transmission signal, and an antenna radiating the transmission signal into an air interface. In an embodiment, the antenna is typically based on a coil structure enabling inductive signal transmission used in the short-range transmission.

[0028] The radio transmitter 104 may comprise a digital-to-analog converter converting a digital transmission signal into analog waveforms, and an analog transmission circuitry including at least one amplifier arranged to amplify the analog transmission signal, at least one filter filtering the analog transmission signal to mitigate undesired signal components, at least one frequency converter configured to frequency-convert the transmission signal into a radio frequency, and an antenna radiating the transmission signal into an air interface. The antenna may be different from the antenna comprised in the short range transmitter 102. When the radio transmitter 104 is equipped with reception capabilities, the radio transmitter 104 is a radio transceiver comprising a reception circuitry including said radio antenna, at least one amplifier arranged to amplify an analog reception signal received through the antenna, at least one filter filtering the analog reception signal to mitigate undesired signal components, at least one frequency converter configured to frequency-convert the reception signal from the radio frequency into a baseband or to an intermediate frequency, and an analog-to-digital converter converting the analog reception signal into a digital form for digital signal

processing and data recovery.

[0029] The receiver apparatus 106 comprises a wireless reception circuitry comprising a short range receiver 108 and a radio receiver 110, wherein at least one of the short range receiver 108 and the radio receiver 110 may be provided with transmission functionalities as well. The short range receiver 108 and the radio receiver 110 may be provided as separate logical and physical entities realized by separate circuits comprised in the wireless reception circuitry, or they may be physically in the same circuit. The short range receiver 108 may comprise an analog reception circuitry including an antenna and at least one amplifier arranged to amplify an analog reception signal received through the antenna, at least one filter filtering the analog reception signal to mitigate undesired signal components, optionally at least one frequency converter configured to frequency-convert the reception signal to the baseband, and an analog-to-digital converter converting the analog reception signal into a digital form for digital signal processing and data recovery. In an embodiment, the antenna is typically based on a coil structure enabling a reception of magnetic signal.

[0030] The short-range signal transmission and reception are described in detail in US patent 5,611,346, which is hereby incorporated as reference. The short-range signal, such as that based on inductive transmission, may include identification structures, such as sub-pulses, which can be used for associating the short-range signal with an ad-hoc measurement, such as a heart rate measurement. Thus, each short-range signal can be received independent on each other at any time instant and identified correctly.

[0031] The radio receiver 110 may comprise an analog reception circuitry including a radio antenna, at least one amplifier arranged to amplify an analog reception signal received through the radio antenna, at least one filter filtering the analog reception signal to mitigate undesired signal components, at least one frequency converter configured to frequency-convert the reception signal from the radio frequency into a baseband or to an intermediate frequency, and an analog-to-digital converter converting the analog reception signal into a digital form for digital signal processing and data recovery. When the radio receiver 110 is equipped with transmission capabilities, the radio receiver 110 is a radio transceiver comprising additionally a digital-to-analog converter converting a digital transmission signal into analog waveforms, and an analog transmission circuitry including at least one amplifier arranged to amplify the analog transmission signal, at least one filter filtering the analog transmission signal to mitigate undesired signal components, at least one frequency converter configured to frequency-convert the transmission signal into the radio frequency, and said radio antenna radiating the transmission signal into the air interface.

[0032] In an embodiment, the radio communication devices 104 and 110 are configured to provide a bidirectional radio communication link. To define the short range

communication devices 102, 108, their wireless communication range (or a coverage area) is shorter than the wireless communication range of the radio communication devices 104, 110. The short range communication devices 102 and 108 may be configured to utilize a communication method based on magnetic induction, and the induction-based transmitters are used in the embodiments described herein. However, the short range communication devices 102 and 108 may alternatively use another wireless communication method having a short communication range, e.g. radio transmission where the communication is based on near-field radio transmissions in a near field of radio frequency antennas, and a near field communication (NFC) technology.

[0033] In the embodiments of the present invention, two different wireless communication technologies are used: a short range communication technology utilizing a magnetic field, for example, and a radio-based technology utilizing electric (radio frequency) radiation. A difference between these two communication technologies is that the short range communication technology has a shorter wireless communication range than the radio communication technology. In other words, the difference between the two wireless communication technologies is signal attenuation as a function of the length of a signal propagation path. When using the induction-based communication technology as the short range communication technology, the signal level is inversely proportional to the third power of the length of the signal propagation path, whereas in a typical radio-based technology, the signal level is inversely proportional to the second power of the length of the signal propagation path. A typical coverage of the induction-based communication is of the order of human dimensions, i.e. about 1.5 meters. This results in a dramatic difference in the wireless communication range. This property causes that in a typical environment, e.g. a gym, a room, or outdoors, the receiver apparatus may receive numerous radio transmissions but only a single short range transmission, and this fact may be used to recognize the transmitter apparatus 100 with which the receiver apparatus 106 should communicate.

[0034] The short range transmitter 102 may be a kilohertz-range inductive transmitter, a passive radio-frequency identification tag, or a NFC transmitter, for example. Correspondingly, the short range receiver 108 may be a kilohertz-range inductive receiver, a radio-frequency identification tag reader, or a NFC receiver, for example. The kilohertz-range transmission may operate at 5-kilohertz frequency, for example. Higher frequencies, such as those exceeding 200 kilohertz, may also be possible. In an embodiment, the kilohertz-range includes 125 kilohertz. NFC as a term may refer to a short-range high frequency wireless communication technology which enables communication over about a 10-centimeter distance.

[0035] The radio transceiver 104, 110 may be a proprietary transceiver, or a Bluetooth transceiver, for ex-

ample. Emerging ultra low power Bluetooth technology may be used, as its expected use cases include heart rate monitoring. The proprietary radio transmission may operate at 2.4-gigahertz frequency, for example.

[0036] The transmitter apparatus 100 further comprises a transmission control circuitry 103 configured to control the transmissions in the short range transmission circuitry 102 and in the radio transmission circuitry 102. Similarly, the receiver apparatus 106 further comprises a reception control circuitry 109 configured to control the short range reception circuitry 102 and the radio reception circuitry 102. The communication control circuitries 103, 109 may be realized by one or more digital signal processors configurable by one or more computer programs stored in one or more memory units accessible by the communication control circuitries 103, 109, or they may be ASIC (Application-Specific Integrated Circuit) implementations. Functionalities of the communication control circuitries 103, 109 may be distributed to the transmission/reception circuitries 102, 104, 108, 110, or dedicated control circuitries 103, 109 as shown in Figure 1 may be provided.

[0037] According to an embodiment of the invention, the transmission control circuitry 103 is configured to cause, i.e. control, the short-range transmitter 102 to transmit a short-range signal 118 indicating to the receiver apparatus 106 a radio resource used for transmission of a radio signal 114. Then, the transmission control circuitry 103 causes, i.e. controls, the radio transmitter 104 to transmit the radio signal 114 in the radio resource indicated with the short-range signal 118. In the receiver apparatus 106, the reception control circuitry 109 is configured to detect reception of the short-range signal 118 in the short-range receiver, to determine from the received short-range signal 118 the radio resource 120 for the radio signal 114, and to control the radio receiver 108 to receive the radio signal 114 in the radio resource 120 determined from the short-range signal 118 and to decode data carried by received radio signal 114.

[0038] In practice, the short-range communication signal 118 is used to identify the transmitter apparatus 100 so as to enable the receiver apparatus 106 to receive and decode a correct radio signal 114. As mentioned above, the receiver apparatus 106 may receive numerous radio signals from different transmitter apparatuses but, typically, it receives a single or only a few short range signals 118 because of the short wireless communication range of the short range signal 118. In any case, the number of short range signals received by the receiver apparatus 106 is less than the number of radio signals received by the receiver apparatus 106, which speeds up recognition of the correct transmitter apparatus 100. In an embodiment, the radio signal 114 transmitted in the radio resource indicated by the short range signal 118 is a Bluetooth inquiry signal used in a pairing procedure 122 of a Bluetooth connection, and the receiver apparatus 106 may detect the correct inquiry signal on the basis of the short range signal indicating in which radio re-

source the inquiry signal is received. Accordingly, the pairing procedure 122 is facilitated. Upon completion of the pairing procedure, information may be exchanged 124 between the transmitter 100 and receiver 106 apparatuses over the established Bluetooth connection.

[0039] In an embodiment, the radio transceiver 104, 110 is a Bluetooth-based transceiver, such as Bluetooth Low Energy (BLE).

[0040] In an embodiment, the radio transceiver 104, 110 is an ANT transceiver originally introduced by Dynastream Innovations.

[0041] In an embodiment, the radio transceiver 104, 110 is a Zigbee transceiver based on IEEE 802.15.4 standard or its derivative.

[0042] In an embodiment, the radio transceiver 104, 110 is a WiFi transceiver based on IEEE 802.11x standard.

[0043] In an embodiment of the invention, the radio transceiver 104, 110 comprises at least two transceivers selected from the group comprising: Bluetooth or its derivatives, ANT or its derivatives, Zigbee or its derivatives, WiFi or its derivatives.

[0044] Figures 2A and 2B illustrate embodiments describing the wireless communication between the transmitter and receiver apparatuses 100, 106 in two operational environments. The transmitter apparatus 100 and the receiver apparatus 106 together form a wireless communication system according to an embodiment of the invention.

[0045] Referring to Figure 2A let us consider a scenario where the transmitter apparatus 100 is a heart rate transmitter 202 worn by the user 200, and the receiver apparatus 106 is another personal exercise apparatus 204 also worn by the user. In this example, the receiver apparatus 106 is a wrist computer 204. As both apparatuses 202, 204 are carried by the user, the apparatuses 202, 204 may be configured to pair with each other so as to transfer data over the radio communication link, e.g. a Bluetooth link. In order to enable the wrist computer 204 to identify the heart rate transmitter 202 in an initial pairing, for example, the short range communication link 118 is used. Accordingly, the transmission control circuitry 103 of the heart rate transmitter 202 causes the short range transmitter 102 of the heart rate transmitter 202 to transmit a short range signal 118 comprising information on a radio resource in which the radio signal will be transmitted from the heart rate transmitter 202. The radio resource indicated by the short range signal 118 may include at least one of the following: a time resource (reception time instant and optionally duration of a reception time window), frequency resource (a radio channel/frequency index), a spreading code resource, a frequency hopping pattern index (particularly for Bluetooth), or any other radio resource used for transmitting the radio signal. Additionally, the short range signal may carry an identification code of the transmitter apparatus, e.g. a MAC (Medium Access Control) address. The short range signal 118 may carry a plurality of different types of

above-mentioned radio resource information, e.g. a frequency channel index and a transmission timing of the radio signal. The information on the radio resource may be encoded into the short range signal 118, and the short range signal 118 may carry the radio resource index in its waveform structure.

[0046] In an embodiment where the radio resource is the time resource, duration or offset between transmission timings of the short range signal 118 and the radio signal 114 may be fixed and, thus, the short range signal 118 inherently indicates the transmission timing for the radio signal 114 without needing to carry any data encoded into the waveform of the short range signal 118. In other words, the transmission timing of the short range signal 118 indicates the radio resource of the radio signal 114 in such an embodiment.

[0047] The short range receiver circuitry 108 of the wrist computer 204 detects the short range signal 118 transmitted by the transmitter apparatus. The reception control circuitry 109 determines the radio resource from the received short range signal 118. Then, the reception control circuitry 109 tunes the radio receiver circuitry 110 to receive in the determined radio resource. When the determined radio resource is a time resource, the reception control circuitry 109 configures the radio receiver to receive the radio signal 114 at the determined timing. When the determined radio resource is a time resource, the reception control circuitry 109 configures the radio receiver to tune into the determined frequency and/or adapt to a determined frequency-hopping pattern. When the determined radio resource is a spreading code resource, the reception control circuitry 109 configures a correlator of the radio receiver monitor for a spreading code sequence determined from the received short range signal. Similarly, the reception control circuitry 109 configures the radio receiver for other types of radio resources determined from the short range signal.

[0048] The transmission control circuitry 103 of the heart rate transmitter 202 then causes the radio transmitter 104 to carry out the radio transmission 114 in the radio resource indicated in the short range signal 118, and the radio receiver 110 of the wrist computer 204 tuned by the reception control circuitry 109 to the radio resource 120 is able to receive the radio transmission 114 on the basis of the information determined from the received short range signal 118. The transmitted radio signal 114 may contain an identification code of the radio transmitter 104 and/or any control information used in a pairing procedure. As a consequence, the wrist computer 204 is able to execute the pairing procedure 122, wherein the pairing may include exchange of information 122 between the radio transceiver circuitries of the heart rate transmitter 202 and the wrist computer 204. Upon completion of the pairing 122, heart rate information or other information may be transmitted 124 from the heart rate transmitter 202 to the wrist computer 204 over the paired radio link. Such information may then be displayed or played back to the user 200 through the user interface

of the wrist computer 204. The user interface of the wrist computer may comprise a display, a loudspeaker, a keypad comprising one or more buttons, a touch sensitive display, etc. Control information 124 configuring the operation of the heart rate transmitter 202 may be transmitted from the wrist computer 204 to the heart rate transmitter 202.

[0049] In the embodiment of Figure 2A, the short range transmitter 102 and the short range receiver 108 may be switched off upon completed pairing so as to reduce power consumption. Accordingly, in response to detecting completed pairing for the radio connection, the transmission control circuitry 103 is configured to cause the shutdown of the short range transmitter 102. Similarly, in response to detecting completed pairing for the radio connection, the reception control circuitry 109 is configured to cause the shutdown of the short range receiver 108.

[0050] In an embodiment, the reception control circuitry 109 of the receiver apparatus 106 is configured to shut down the radio receiver 110 and activate it upon detection of the short range signal 118 and tuning the radio receiver to the radio resource determined from the short range signal. Upon reception of the radio signal 114 in the radio resource, the reception control circuitry 109 may again shut down the radio receiver 110 to reduce power consumption of the receiver apparatus 106. This embodiment is especially useful, when the receiver apparatus 204 is battery-operated.

[0051] In the embodiment of Figure 2B, the transmitter apparatus 100 is the heart rate transmitter 202, and the receiver apparatus 106 may be an exercise apparatus, such as a treadmill, an exercise bike, a rowing machine, or a cross trainer provided at a gym.

[0052] In an embodiment, the receiver apparatus 106 is comprised in an exercise computer of an exercise apparatus. In this embodiment, the short range transmitter of the heart rate transmitter 202 is controlled by the transmission control circuitry 103 to transmit the short range signal 118 indicating the radio resource for the radio signal 114, as described above.

[0053] In an embodiment, the heart rate information is transmitted in the radio signal 114 in the radio resource indicated by the short range signal 118. In this case, the heart rate transmitter 202 is configured to transmit payload data, such as heart rate information in the radio signal 114 and in the radio resource indicated by the short range signal 118. The radio transmitter may be configured to operate in a connectionless advertising mode, for example. The transmission control circuitry 103 of the heart rate transmitter 202 causes its wireless transmission circuitry to transmit repeatedly a signal sequence comprising first the short range signal 118 indicating the radio resource for the radio signal 114 and, thereafter, the radio signal 114 carrying the payload data in the radio resource indicated by the short range signal 118. Upon reception of the short range signal(s) 118 through the short range receiver 108, the reception control circuitry 109 tunes its radio receiver 110 to the radio resource(s)

determined from the short range signal(s) 118 and receives and decodes the payload data from the radio signals 114 received by the radio receiver 110 in the determined radio resources. The decoded payload data may then be further processed and displayed to the user.

[0054] In an embodiment, the reception control circuitry 109 is configured to maintain the radio receiver 110 active all the time and tune the radio receiver 110 to the radio resource determined from the received short range signal. This embodiment may be applied to cases, where the receiver apparatus 110 is connected to mains and when there is practically limitless power supply.

[0055] In the embodiment of Figure 2A, the transmission of the measurement data, e.g. heart rate information, may be communicated in a connected state upon establishment of the paired connection, while in the embodiment of Figure 2B, the measurement data may be transmitted in a connectionless state, e.g. when the transmitter apparatus is in an advertising state. In order to support both operation environments of Figures 2A and 2B, the transmitter apparatus 202 may be configured to transmit the payload data as described in connection with Figure 2B until the pairing procedure is triggered or completed. As a consequence, the communication mode according to the embodiment of Figure 2B is enabled by default, and the communication mode may be switched to the communication mode of the embodiment of Figure 2A upon completion of the pairing procedure. Then, the transmitter apparatus 100, 202 may be configured to carry out the transmission of the payload data without indicating the radio resources in the short range signal, as the radio signal may carry an identifier of the transmitter apparatus 100, 202 enabling the identification of the correct transmitter, or the correct transmitter apparatus may be determined in another manner without the short range signals, e.g. through radio communications synchronized between the transmitter 202 and the receiver 204, 106.

[0056] The embodiment of Figure 2B may also be used when the receiver apparatus 106 is the wrist computer 204 or another personal exercise apparatus. The communication mode of Figure 2B may be triggered by disconnection and failed reestablishment of the paired link. In other words, when the paired radio connection is terminated abruptly, i.e. in an uncontrolled manner, the transmission control circuitry 103 of the transmitter apparatus 100, 202 detects the disconnection and configures the short range transmitter 102 to start transmit the short range signal indicating the radio resource for the transmitted radio signal and the radio transmitter 104 to transmit the heart rate information (or another information) in the radio resource. Similarly, the reception control circuitry 109 of the receiver apparatus 106, 204 detects the disconnection and configures the short range receiver 108 to receive short range signals, determine the radio resources from the received short range signals, and tune the radio receiver 110 receive the radio signals in the radio resources. As a consequence, upon failed radio

connection, the communication may be continued in a connectionless communication mode where the short range link is used to point out the radio resources in which the radio communication is carried out. In an embodiment, the radio transmissions carry the payload data in the connectionless mode. In another embodiment, the transmitter apparatus 100, 202 buffers the payload data upon disconnection, controls the radio transmitter 104 to transmit pairing data in the radio resources until the new pairing is successfully completed and, then, starts transmitting the data stored in the buffers.

[0057] It should be noted that both the embodiments of Figures 2A and 2B are both applicable to any implementation of the receiver apparatus 106, 204. In other words, the embodiment of Figure 2B may be used when the receiver apparatus 106, 204 is comprised in a personal exercise apparatus, and the embodiment of Figure 2A may be used when the receiver apparatus 106, 204 is comprised in a non-personal exercise apparatus.

[0058] Figure 3 illustrates physical layer communication in an embodiment where the radio resource indicated with the short range signal is a time resource. In more detail, a time between the transmission of the short range signal and the transmission of the radio signal is fixed, i.e. the transmission timing of the short range signal indicates the transmission timing of the radio signal. Similarly for the receiver apparatus 106, 204, a reception timing of the short range signal triggers the reception timing for the reception of the radio signal. In the three graphs of Figure 3, the horizontal axis denotes time and the vertical axis denotes amplitude or another metric proportional to the signal power. The upmost graph illustrates transmissions of the short range and radio signals from the transmitter apparatus 100, 202, the middle graph illustrates interference, i.e. radio transmissions of other transmitter apparatuses that may be received by the receiver apparatus 106, 204, and the bottom graph illustrates the actual reception of the receiver apparatus 106, 204. Referring to the topmost graph, the transmission control circuitry 103 of the transmitter apparatus 100, 202 causes the short range transmitter 102 to transmit a first short range signal 300A at a given transmission timing from its short range transmitter. As the time interval 304A between the transmission timings of the short range signal and the radio signal is fixed, e.g. 100 ms, the transmission control circuitry 103 waits for the fixed time duration and, then, causes the radio transmitter 104 to transmit a first radio signal 302A.

[0059] As seen from the middle and the bottom graphs of Figure 3, the receiver apparatus 106, 204 may receive two other radio transmissions 320, 322 quite close to the first radio signal 302A, and it should determine which one of the signals is transmitted by the correct transmitter apparatus 100, 202. The short range receiver of the receiver apparatus 106, 204 receives the short range signal 300B from the transmitter apparatus 100, 202 and, as the fixed time interval between the timings 304B of the short range signal and the radio signal is known also to

the reception control circuitry 109 of the receiver apparatus 106, 204, the reception control circuitry 109 of the receiver apparatus 106, 204 configures its radio receiver 110 to receive the first radio signal in a time interval 306, wherein at least the start time for the radio reception is computed from the reception timing of the short range signal 300B by adding the known fixed time interval 304B to it. In this embodiment, the reception control circuitry 109 may comprise or be connected to a timer to count the fixed time duration from the detection of the reception of the short range signal.

[0060] In an embodiment, the reception control circuitry 109 of the receiver apparatus 106, 204 activates the radio receiver 110 to receive on a physical layer for the duration of the first radio signal 302A, i.e. for the duration of the time interval 306 and, upon expiry of the time interval 306, the reception control circuitry 109 deactivates the radio receiver to save power. The duration 306 may include guard periods so that the actual duration 306 starts before the radio signal 302A, 312B and ends after the radio signal 302A, 312A. The duration of a guard time may vary from microseconds to tens of milliseconds.

[0061] In another embodiment, the reception control circuitry 109 keeps radio receiver of the receiver apparatus active all the time, i.e. it receives all the radio signals 320, 322, 302B. Then, the reception control circuitry 109 may determine which one of the radio signals is received at the correct time instant 304B after the reception of the first short range signal 300B. As the interference signals 320, 322 are received either too early (signal 320) or too late (signal 322) with respect to the reception timing of the first short range signal 300B, they are discarded, and the radio signal 302B received after the determined time interval 304B after the reception of the first short range signal 300B is selected for decoding.

[0062] Similarly, the transmission control circuitry may cause the short range transmitter 104 to transmit a second short range signal 310A, wait for the fixed time duration 314A and, then, transmit a second radio signal 312A. Again, the receiver apparatus 106, 204 may be able to receive also interfering radio transmissions 324, 326, but on the basis of the reception timing of the short range signal 310B and the known time interval 314B between the reception timing of the short range signal 310B and the radio signal 312B, the reception control circuitry 109 is able to configure its radio receiver 110 to receive the radio signal during the appropriate time interval 316 and to decode a correct radio signal.

[0063] In the embodiment of Figure 3, the radio resource indicated with the short range signal is timing. Then, the radio receiver 110 may be configured to scan, at the determined reception timing, all the frequencies known to be used by a radio protocol the radio receiver 110 supports. The same applies to other radio resources that are not indicated with the short range signal but that are used for transmitting the radio signal, i.e. the radio receiver 110 may be configured to scan all or some of the frequency-hopping patterns, spreading code se-

quences etc. possibly used by the radio transmitter 104. The more different types of radio resources are indicated by the short range signal, the less resources need to be scanned by the radio receiver 110.

[0064] When there are multiple transmitter apparatuses 100, 202 according to embodiments of the present invention close to the receiver apparatus 106, 204, the receiver apparatus 106, 204 may receive multiple short range signals. In such a case, the strong attenuation of the short range signal may be used to determine the transmitter apparatus 100, 202 that is closest to the receiver apparatus 106, 204. Figure 5 illustrates an example of a short range signal pulse. As conventional, the short range signal pulse comprises a rising edge, a peak edge, and a fall time, as illustrated in Figure 5. Figure 5 illustrates also a noise level. The closer the transmitter apparatus is to the receiver apparatus 106, 204, the stronger is the signal pulse with respect to the noise level (the noise level is on a lower level in Figure 5), and the longer is the pulse duration seen by the receiver apparatus 106, 204. Similarly, the greater is the distance between the transmitter apparatus and the receiver apparatus 106, 204, the weaker is the signal pulse with respect to the noise level (the noise level is on a higher level in Figure 5), and the shorter is the pulse duration seen by the receiver apparatus 106, 204. In other words, the shorter is the distance between the transmitter and the receiver, the more the receiver receives the rising and falling edges of the short range signal pulse. For example, for a 5 kHz inductive transmission of 5 ms duration, the receiver sees the pulse to have 5 to 8 ms duration, depending on the distance between the transmitter and the receiver (5 ms to the shorter distance and 8 ms to the longer distance). According to an embodiment, the reception control circuitry 109 of the receiver apparatus 106, 204 may determine the correct transmitter apparatus by computing the pulse duration for every short range signal received by the short range receiver 108, and select the short range signal that is determined to have the largest pulse duration. Then, the reception control circuitry 109 of the receiver apparatus 106, 204 is configured to determine the radio resource from the selected short range signal and tune the radio receiver 110 to that radio resource.

[0065] When the radio resource is encoded as an index into the pulse duration, the reception control circuitry 109 may compare the pulse duration of the received short range signal with reference lengths denoting the radio resource indices and determine the difference between the pulse duration of the received short range signal and the radio resource index it indicates. Then, the short range signal having the highest difference with respect to the radio resource index it indicates is selected as the correct short range signal. For example, let us consider a case where a frequency channel 37 is denoted by pulse duration of 9 ms, frequency channel 38 is denoted by pulse duration of 13 ms, and frequency channel 39 is denoted by pulse duration of 17 ms. The receiver may

see the 9 ms transmission as having duration between 9 and 12 ms, 13 ms transmission as having duration between 13 and 16 ms, and 17 ms transmission as having duration between 17 and 20 ms. For example, if the short range receiver 108 of the receiver apparatus 106, 204 receives an 18 ms pulse and a 15 ms pulse, the reception control circuitry 109 may select channel 38 for the radio reception, because the 15 ms pulse is 2 ms longer than the reference duration (15 ms - 13 ms = 2 ms), while the 18 ms pulse is only 1 ms longer than the reference duration (18 ms - 17 ms = 1 ms), thereby indicating that the transmitter apparatus transmitting the 18 ms pulse has a greater distance to the receiver apparatus 106, 204 than the transmitter apparatus transmitting the 15 ms pulse. Accordingly, the reception control circuitry 109 tunes its radio receiver to channel 38 to receive the payload data and/or pairing information.

[0066] When the radio resource indicated by the short range signal is a time resource, when the time duration between the short range signal and the radio signal is fixed, and when a plurality of transmitter apparatuses close to the receiver apparatus 106, 204 are arranged to transmit the signals periodically with the same periodic cycle, it is possible that the two transmissions collide. As mentioned above, in an embodiment the transmitter apparatus is a measurement apparatus (the heart rate transmitter) comprising a measurement processing circuitry configured to execute measurement signal processing. According to an embodiment, the transmission of the short range signal is triggered by occurrence of a determined event in the measurement. When the event in the measurement occurs irregularly, it inherently induces the same irregularity to the transmission of the short range signal and, thus, avoids continued collisions between two (or more) transmitter apparatuses. When the measurement apparatus is a biometric sensor, e.g. the heart rate transmitter described above, the triggering event may be detection of a determined event in biometric measurement data. For example, when the measurement apparatus is the heart rate measurement apparatus, the determined event in the biometric measurement data may be the detection of an R waveform (or another waveform) in a measured ECG (electrocardiogram) signal. Detection of the R waveform triggers the transmission control circuitry 103 to cause the short range transmitter 102 to transmit the short range signal indicating the radio resource. Meanwhile, the measurement processing circuitry may process the measured signal by computing at least one of the following parameters: cardiovascular data such as heart rate information, heart beat interval (e.g. RR interval) heart rate variability data, energy expenditure data. Then, the computed parameters are encoded for radio transmission and transmitted from the radio transmitter 104 in the radio resource indicated in the short range signal. The receiver apparatus 106, 204 receives the parameters from the radio transmission, as described above, decodes the parameters and processes them into exercise-related data that may

be provided to the user in order provide the user with information related to an exercise or to control the execution of the exercise. To enable the irregular transmission/reception timings, the reception control circuitry 109 may be configured to cause the short range receiver 108 to receive short range signals asynchronously, e.g. the short range receiver may constantly monitor for the short range signals. The same analogy applies when the transmitter apparatus is comprised in a stride sensor comprising an acceleration sensor and the measurement processing circuitry. The transmission of the short range signal from the stride sensor to the receiver apparatus may be triggered by the detection of a determined event in the measured acceleration information, .e.g. detection of a determined acceleration waveform arising from a step, for example. With respect to other measurement devices, e.g. a positioning device, the short range transmissions may be pseudo-randomized in time on the basis of a determined random or pseudo-random sequence defining transmission timings for the short range transmissions.

[0067] In an embodiment, the short-range signal is a measurement signal carrying information on the measurement. The short range signal may be transmitted upon detection of the determined event in the measurement and, thus, the reception of the short range signal indicates, in addition to the radio resource, occurrence of the event in the measurement. For example, the receiver apparatus may compute RR intervals from time duration between reception timings of consecutive short range signal pulses.

[0068] Let us now consider a general wireless communication procedure according to an embodiment of the invention with respect to a flow diagram of Figure 4. The process may be carried out in a wireless communication apparatus, e.g. above-mentioned transmitter or receiver apparatus. The process is started in block 400. In block 402, communication of a short-range signal indicating a radio resource used for transmission of a radio signal is triggered. When the wireless communication apparatus carrying out the process is the transmitter apparatus 100, 202, block 402 includes transmission of the short range signal. On the other hand, when the wireless communication apparatus carrying out the process is the receiver apparatus 106, 204, block 402 includes reception of the short range signal. By definition, the radio signal has a longer wireless communication range than the wireless communication range of the short-range signal. In block 404, communication of the radio signal in the radio resource indicated with the short-range signal is triggered. When the wireless communication apparatus carrying out the process is the transmitter apparatus 100, 202, block 404 includes transmission of the radio signal. On the other hand, when the wireless communication apparatus carrying out the process is the receiver apparatus 106, 204, block 402 includes reception of the radio signal. In block 406, it is determined whether or not to carry out another transmission. With respect to the transmitter ap-

paratus 100, 202, the determination may be based on at least one of the following: availability of transmission data in transmission buffers, whether or not to attempt to pair with the receiver apparatus, and disconnection in the paired connection. With respect to the transmitter apparatus, the determination may be based on the decision, whether or not to configure the short range receiver for reception of the short range signals. The decision may be based on at least one of (un)successful pairing, and disconnection of the paired connection. If it is determined in block 406 that another transmission is to be carried out, the process returns to block 402. On the other hand, if it is determined in block 406 that another transmission is not to be carried out, the process ends in block 408. The termination of the process may include switching off the short range transmitter/receiver and/or switching off both short range and radio transmitters/receivers.

[0069] The process of Figure 4 may be carried out in the communication control circuitry 103, 109 of the wireless communication device 100, 202, 106, 204 according to an embodiment of the invention. The process may be defined by a computer program product stored in a computer-readable medium. The transmission medium may be a transitory or a non-transitory transmission medium. The computer program may be in source code form, object code form, or in some intermediate form. The computer-readable medium may be a carrier which may be any entity or device capable of carrying the program. Such carriers include a record medium, computer memory, read-only memory, electrical carrier signal, telecommunications signal, and software distribution package, for example. Depending on the processing power needed, the computer program may be executed in a single electronic digital processing unit or it may be distributed amongst a number of processing units.

[0070] As used in this application, the term 'circuitry' refers to all of the following: (a) hardware-only circuit implementations, such as implementations in only analog and/or digital circuitry, and (b) to combinations of circuits and software (and/or firmware), such as (as applicable): (i) a combination of processor(s) or (ii) portions of processor(s)/software including digital signal processor(s), software, and memory(ies) that work together to cause an apparatus to perform various functions, and (c) to circuits, such as a microprocessor(s) or a portion of a microprocessor(s), that require software or firmware for operation, even if the software or firmware is not physically present. This definition of 'circuitry' applies to all uses of this term in this application. As a further example, as used in this application, the term "circuitry" would also cover an implementation of merely a processor (or multiple processors) or portion of a processor and its (or their) accompanying software and/or firmware. The term "circuitry" would also cover, for example and if applicable to the particular element, a baseband integrated circuit or applications processor integrated circuit for a mobile phone or a similar integrated circuit in server, a cellular network device, or other network device.

[0071] It will be obvious to a person skilled in the art that, as technology advances, the inventive concept can be implemented in various ways. The invention and its embodiments are not limited to the examples described above but may vary within the scope of the claims.

Claims

1. An apparatus (100) comprising a transmission control circuitry (103) configured to control a short-range transmitter (102) and a radio transmitter (104) operationally connectable to the transmission control circuitry (103), the radio transmitter (104) having a longer wireless transmission range than a wireless transmission range of the short-range transmitter (102), **characterized in that** the transmission control circuitry (103) is configured to cause the short-range transmitter (102) to transmit a short-range signal (118) indicating to a receiver apparatus (106, 204) receiving the short-range signal (118) a radio resource in which the apparatus shall transmit and the receiver apparatus shall receive a radio signal (114), and to cause the radio transmitter (104) to transmit the radio signal (114) in the radio resource indicated with the short-range signal (118).
2. The apparatus of claim 1, wherein the radio resource indicated with the short-range signal is a transmission timing (306) of the radio signal, wherein the transmission control circuitry (103) is arranged to cause the transmission of the radio signal at the transmission timing (306) indicated in the short-range signal.
3. The apparatus of claim 1 or 2, wherein a transmission timing of the short-range signal indicates the transmission timing of the radio signal.
4. The apparatus of claim 3, wherein there is fixed time interval between the transmission timing of the short-range signal and the transmission timing of the radio signal.
5. The apparatus of any preceding claim 1 to 4, wherein the short-range signal (118) is a measurement signal carrying information on a measurement, and wherein the apparatus further comprises a measurement processing circuitry configured to execute measurement signal processing at irregular time intervals, wherein the execution of the measurement causes the measurement processing circuitry to generate measurement data which triggers said transmission of the short-range signal, thereby causing irregular transmission timings for said short-range signals.
6. The apparatus of claim 5, wherein the measurement signal is a heart-rate signal and wherein the transmitter apparatus is a heart-rate transmitter (202).
7. The apparatus of any preceding claim 1 to 6, wherein the radio signal carries an identification code that identifies the radio transmitter (104) and that is used for initiating a pairing protocol for a radio connection, and wherein the transmission control circuitry (103) is configured to control the radio transmitter (104) to initiate the pairing protocol with a radio receiver (106, 204) apparatus after transmitting the identification code.
8. The apparatus of any preceding claim 1 to 7, wherein the short-range transmitter is an induction-based transmitter and the short range signal is a magnetic signal.
9. A method, comprising:
 - causing (402), in a wireless communication apparatus (100, 106, 202, 204), communication of a short-range signal (118) indicating a radio resource in which the wireless communication apparatus shall transmit and a receiver apparatus shall receive a radio signal (114), wherein the radio signal (114) has a longer wireless communication range than a wireless communication range of the short-range signal (118), **characterized by**
 - causing (404), in the wireless communication apparatus communication of the radio signal (114) in the radio resource indicated with the short-range signal (118).
10. A computer program product embodied on a distribution medium and comprising program instructions which, when loaded into an apparatus according to claim 1, execute the method of claim 9.
11. An apparatus (106) comprising:
 - a reception control circuitry (109) configured to control a short-range receiver (108) and a radio receiver (110) both operationally connectable to the reception control circuitry (109), wherein the reception control circuitry (109) is configured to detect reception of a short-range signal (118) in the short-range receiver (108) from a transmitter apparatus (100), **characterized in that** the reception control circuitry is further configured to determine from the received short-range signal a radio resource in which the transmitter apparatus transmits a radio signal (114), and to cause the radio receiver to receive the radio signal (114) in the radio resource determined from the short-range signal and to decode data carried by received radio signal.

Patentansprüche

1. Vorrichtung (100), die eine Übertragungssteuerschaltung (103), die dazu ausgelegt ist, einen Kurzbereichssender (102) zu steuern, und einen Funksender (104), der mit der Übertragungssteuerschaltung (103) wirkverbinderbar ist, umfasst, wobei der Funksender (104) einen längeren Drahtlosübertragungsbereich hat als ein Drahtlosübertragungsbereich des Kurzbereichssenders (102),
dadurch gekennzeichnet, dass die Übertragungssteuerschaltung (103) dazu ausgelegt ist, den Kurzbereichssender (102) zu veranlassen, ein Kurzbereichssignal (118) zu übertragen, das einer Empfangsvorrichtung (106, 204), die das Kurzbereichssignal (118) empfängt, eine Funkressource anzeigt, in der die Vorrichtung ein Funksignal (114) übertragen und die Empfangsvorrichtung dieses empfangen soll, und den Funksender (104) zu veranlassen, das Funksignal (114) in der mit dem Kurzbereichssignal (118) angezeigten Funkressource zu übertragen.
2. Vorrichtung nach Anspruch 1, wobei die mit dem Kurzbereichssignal angezeigte Funkressource ein Übertragungszeitpunkt (306) des Funksignals ist, wobei die Übertragungssteuerschaltung (103) angeordnet ist, die Übertragung des Funksignals zu dem im Kurzbereichssignal angezeigten Übertragungszeitpunkt (306) zu veranlassen.
3. Vorrichtung nach Anspruch 1 oder 2, wobei ein Übertragungszeitpunkt des Kurzbereichssignals den Übertragungszeitpunkt des Funksignals anzeigt.
4. Vorrichtung nach Anspruch 3, wobei zwischen dem Übertragungszeitpunkt des Kurzbereichssignals und dem Übertragungszeitpunkt des Funksignals ein festes Zeitintervall besteht.
5. Vorrichtung nach einem der vorhergehenden Ansprüche 1 bis 4, wobei das Kurzbereichssignal (118) ein Messsignal ist, das Informationen zu einer Messung enthält, und wobei die Vorrichtung ferner eine Messungsverarbeitungsschaltung umfasst, die dazu ausgelegt ist, in unregelmäßigen Zeitintervallen eine Messsignalverarbeitung auszuführen, wobei die Ausführung der Messung die Messungsverarbeitungsschaltung veranlasst, Messdaten zu erzeugen, was die Übertragung des Kurzbereichssignals auslöst, wodurch unregelmäßige Übertragungszeitpunkte für die Kurzbereichssignale veranlasst werden.
6. Vorrichtung nach Anspruch 5, wobei das Messsignal ein Herzfrequenzsignal ist und wobei die Sendevorrichtung ein Herzfrequenzsender (202) ist.
7. Vorrichtung nach einem der vorhergehenden Ansprüche 1 bis 6, wobei das Funksignal einen Identifikationscode enthält, der den Funksender (104) identifiziert und der zum Initiieren eines Paarungsprotokolls für eine Funkverbindung verwendet wird, und wobei die Übertragungssteuerschaltung (103) dazu ausgelegt ist, den Funksender (104) derart zu steuern, dass er das Paarungsprotokoll nach Übertragen des Identifikationscodes mit einer Funkempfänger(106, 204)-Vorrichtung initiiert.
8. Vorrichtung nach einem der Ansprüche 1 bis 7, wobei der Kurzbereichssender ein induktionsbasierter Sender ist und das Kurzbereichssignal ein magnetisches Signal ist.
9. Verfahren, das Folgendes umfasst:
 Veranlassen (402) der Kommunikation eines Kurzbereichssignals (118) in einer Drahtloskommunikationsvorrichtung (100, 106, 202, 204), das eine Funkressource anzeigt, in der die Drahtloskommunikationsvorrichtung ein Funksignal (114) übertragen und eine Empfangsvorrichtung dieses empfangen soll, wobei das Funksignal (114) einen längeren Drahtloskommunikationsbereich hat als ein Drahtloskommunikationsbereich des Kurzbereichssignals (118), **gekennzeichnet durch**
 Veranlassen (404) der Kommunikation des Funksignals (114) in der mit dem Kurzbereichssignal (118) angezeigten Funkressource in der Drahtloskommunikationsvorrichtung.
10. Computerprogrammprodukt, das auf einem Verteilungsmedium enthalten ist und Programmanweisungen umfasst, die, wenn sie in eine Vorrichtung nach Anspruch 1 geladen werden, das Verfahren nach Anspruch 9 ausführen.
11. Vorrichtung (106), die Folgendes umfasst:
 eine Empfangssteuerschaltung (109), die dazu ausgelegt ist, einen Kurzbereichsempfänger (108) und einen Funkempfänger (110), die beide mit der Empfangssteuerschaltung (109) wirkverbinderbar sind, zu steuern, wobei die Empfangssteuerschaltung (109) dazu ausgelegt ist, den Empfang eines Kurzbereichssignals (118) im Kurzbereichsempfänger (108) von einer Sendevorrichtung (100) zu detektieren, **dadurch gekennzeichnet, dass** die Empfangssteuerschaltung ferner dazu ausgelegt ist, anhand des empfangenen Kurzbereichssignals eine Funkressource zu bestimmen, in der die Sendevorrichtung ein Funksignal (114) überträgt, und den Funkempfänger zu veranlassen, das Funksignal (114) in der anhand des Kurzbereichssignals bestimmten Funkressource zu empfangen und Daten, die im empfangenen Funksignal enthalten sind, zu

decodieren.

Revendications

1. Appareil (100) qui comprend des éléments de circuit de commande d'émission (103) configurés pour commander un émetteur à courte portée (102) et un émetteur radio (104) qui peuvent être connectés de manière fonctionnelle aux éléments de circuit de commande d'émission (103), dans lequel l'émetteur radio (104) a une plage d'émission sans fil plus longue qu'une plage d'émission sans fil de l'émetteur à courte portée (102),
caractérisé en ce que les éléments de circuit de commande d'émission (103) sont configurés pour amener l'émetteur à courte portée (102) à émettre un signal à courte portée (118) qui indique à un appareil de réception (106, 204) qui reçoit le signal à courte portée (118) une ressource radio dans laquelle l'appareil devra émettre et l'appareil de réception devra recevoir un signal radio (114), et pour amener l'émetteur radio (104) à émettre le signal radio (114) dans la ressource radio indiquée par le signal à courte portée (118).
2. Appareil selon la revendication 1, dans lequel la ressource radio indiquée par le signal à courte portée est une synchronisation d'émission (306) du signal radio, dans lequel les éléments de circuit de commande d'émission (103) sont agencés pour effectuer l'émission du signal radio selon la synchronisation d'émission (306) indiquée dans le signal à courte portée.
3. Appareil selon la revendication 1 ou 2, dans lequel une synchronisation d'émission du signal à courte portée indique la synchronisation d'émission du signal radio.
4. Appareil selon la revendication 3, dans lequel il y a un intervalle de temps fixe entre la synchronisation d'émission du signal à courte portée et la synchronisation d'émission du signal radio.
5. Appareil selon l'une quelconque des revendications 1 à 4 précédentes, dans lequel le signal à courte portée (118) est un signal de mesure qui transporte des informations concernant une mesure, et dans lequel l'appareil comprend en outre des éléments de circuit de traitement de mesure configurés pour exécuter un traitement de signal de mesure à des intervalles de temps irréguliers, dans lequel l'exécution de la mesure amène les éléments de circuit de traitement de mesure à générer des données de mesure qui déclenchent ladite émission du signal à courte portée, ce qui entraîne des synchronisations d'émission irrégulières pour lesdits signaux à courte portée.
6. Appareil selon la revendication 5, dans lequel le signal de mesure est un signal de rythme cardiaque et dans lequel l'appareil d'émission est un émetteur de rythme cardiaque (202).
7. Appareil selon l'une quelconque des revendications 1 à 6 précédentes, dans lequel le signal radio transporte un code d'identification qui identifie l'émetteur radio (104) et qui est utilisé pour lancer un protocole d'appariement pour une connexion radio, et dans lequel les éléments de circuit de commande d'émission (103) sont configurés pour commander l'émetteur radio (104) pour lancer le protocole d'appariement avec un appareil de réception radio (106, 204) après l'émission du code d'identification.
8. Appareil selon l'une quelconque des revendications 1 à 7 précédentes, dans lequel l'émetteur à courte portée est un émetteur basé sur l'induction et le signal à courte portée est un signal magnétique.
9. Procédé, qui comprend :
 le lancement (402), dans un appareil de communication sans fil (100, 106, 202, 204), de la communication d'un signal à courte portée (118) qui indique une ressource radio dans laquelle l'appareil de communication sans fil devra émettre et un appareil de réception devra recevoir un signal radio (114), dans lequel le signal radio (114) a une plage de communication sans fil plus longue qu'une plage de communication sans fil du signal à courte portée (118), **caractérisé par** le lancement (404), dans l'appareil de communication sans fil, de la communication du signal radio (114) dans la ressource radio indiquée par le signal à courte portée (118).
10. Produit-programme d'ordinateur mis en œuvre sur un support de distribution et qui comprend des instructions de programme qui, lorsqu'elles sont chargées dans un appareil selon la revendication 1, exécutent le procédé selon la revendication 9.
11. Appareil (106) qui comprend :
 des éléments de circuit de commande de réception (109) configurés pour commander un récepteur à courte portée (108) et un récepteur radio (110) qui peuvent être connectés tous deux de manière fonctionnelle aux éléments de circuit de commande de réception (109), dans lequel les éléments de circuit de commande de réception (109) sont configurés pour détecter la réception d'un signal à courte portée (118) dans le récepteur à courte portée (108) qui provient d'un appareil d'émission (100), **caractérisé en ce que** les éléments de circuit de commande de réception sont en outre configurés pour déterminer à partir du signal à courte portée reçu une ressource

radio dans laquelle l'appareil d'émission émet un signal radio (114), et pour amener le récepteur radio à recevoir le signal radio (114) dans la ressource radio déterminée à partir du signal à courte portée et pour décoder les données transportées par le signal radio reçu. 5

10

15

20

25

30

35

40

45

50

55

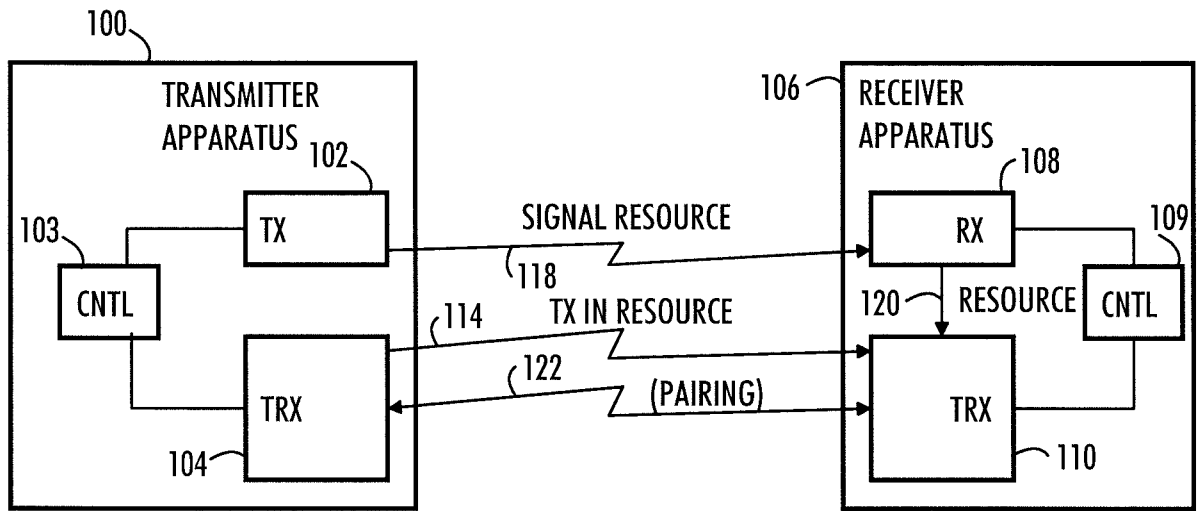


FIG. 1

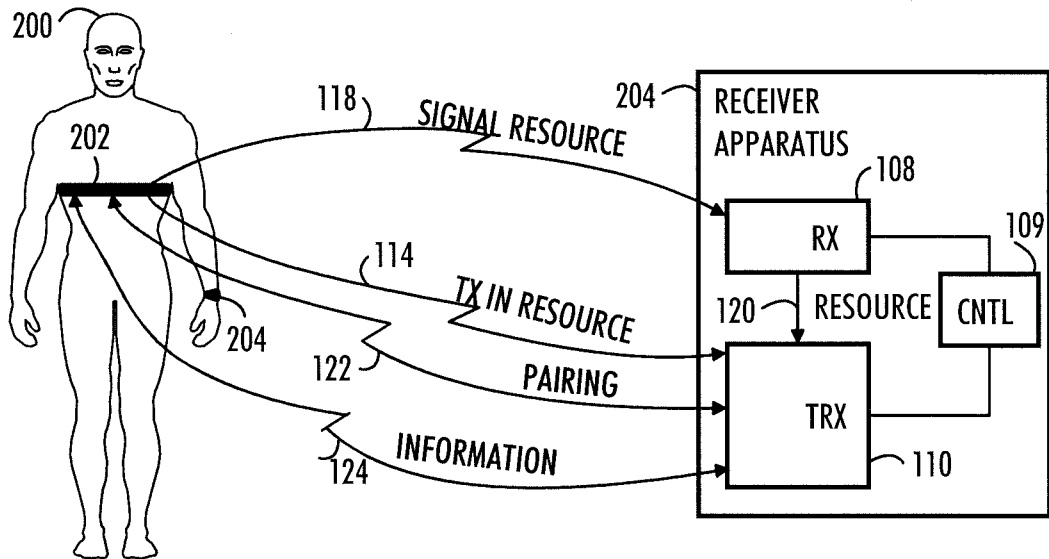


FIG. 2A

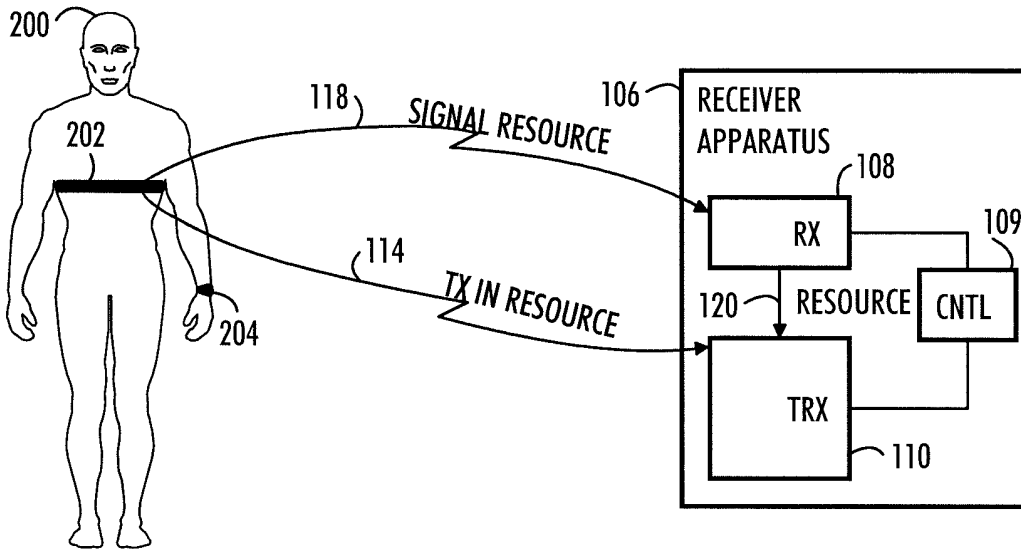


FIG. 2B

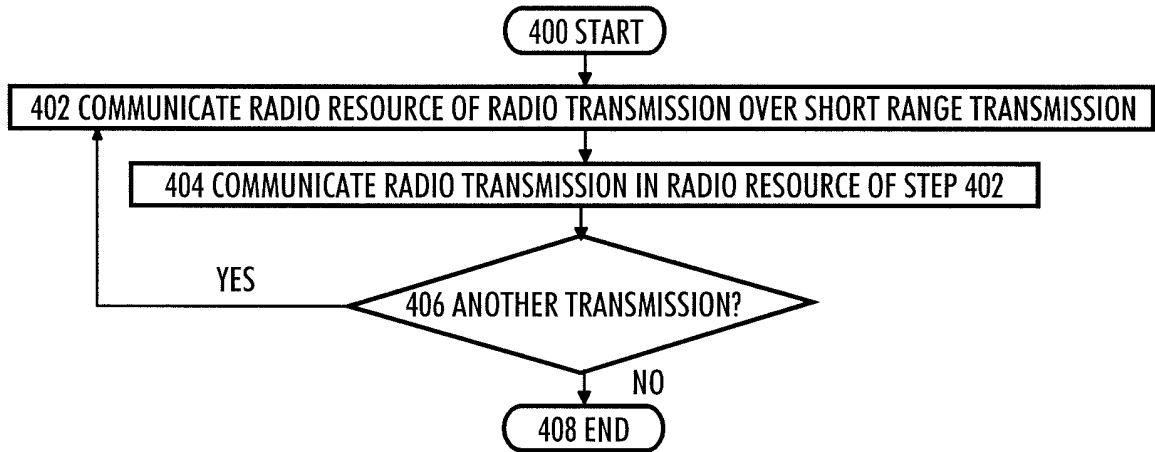


FIG. 4

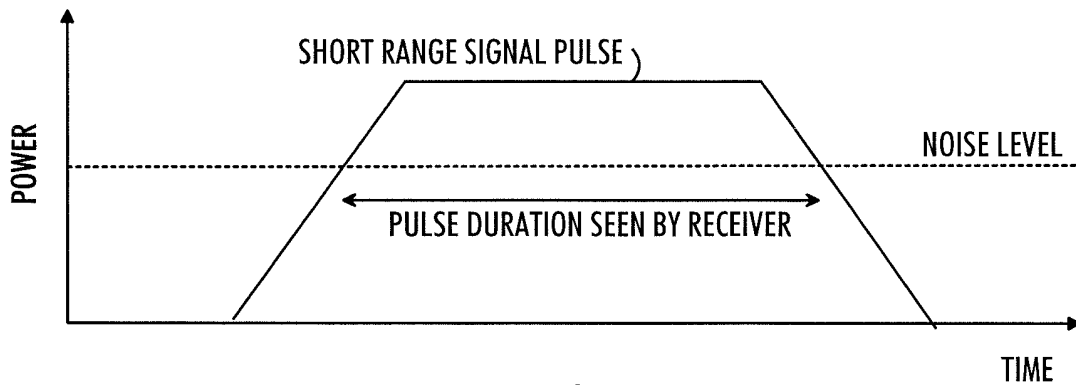


FIG. 5

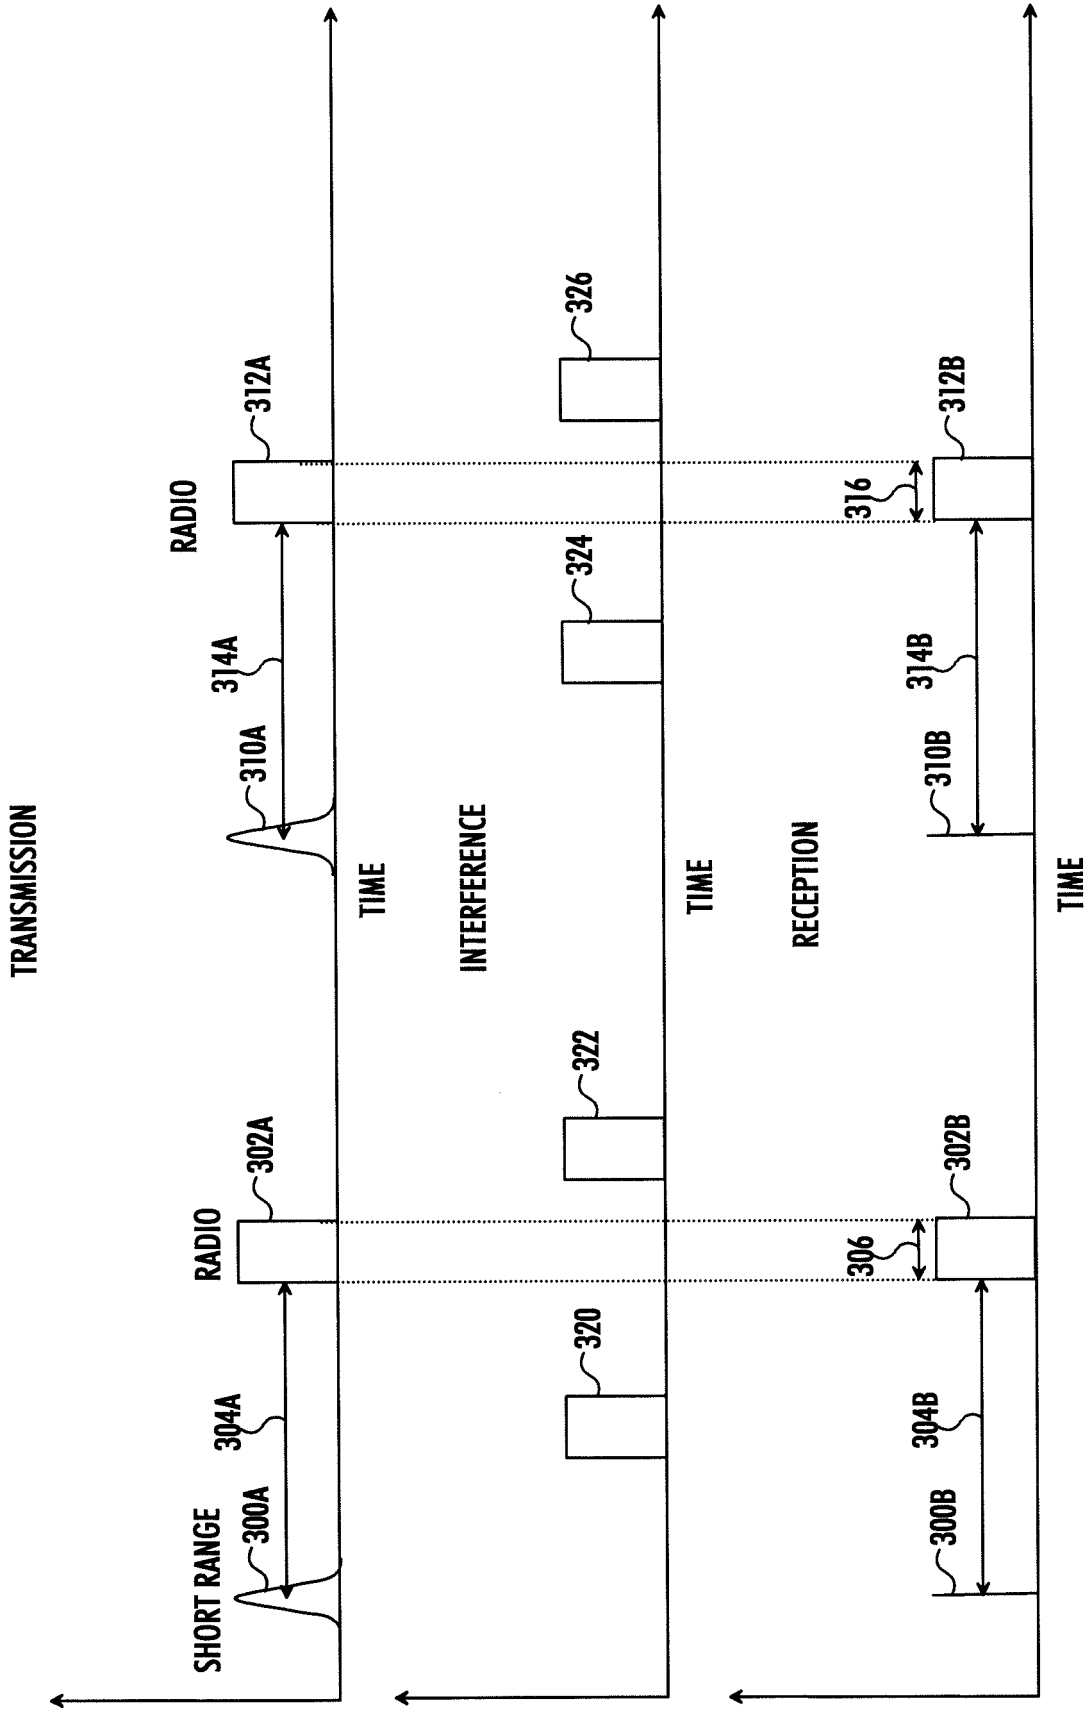


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2009182388 A [0003]
- US 2009270949 A [0004]
- US 2009062778 A [0005]
- WO 2008059460 A [0006]
- US 2007202807 A [0007]
- EP 2107837 A [0008]
- CN 1795814 A [0008]
- WO 2008088193 A [0009]
- US 2009008808 A1 [0010]
- US 5611346 A [0030]

专利名称(译)	无线短距离通讯		
公开(公告)号	EP2404548B1	公开(公告)日	2020-03-25
申请号	EP2011172320	申请日	2011-07-01
[标]申请(专利权)人(译)	博能电子公司		
申请(专利权)人(译)	Polar Electro Oy公司		
当前申请(专利权)人(译)	Polar Electro Oy公司		
[标]发明人	MIETTINEN JARI KEMPPAINEN JUHANI		
发明人	MIETTINEN, JARI KEMPPAINEN, JUHANI		
IPC分类号	A61B5/00 A61B5/024 H04B5/00		
CPC分类号	A61B5/0006 A61B5/02438 A61B5/7285 H04B5/0075		
代理机构(译)	KOLSTER OY AB		
优先权	2010005790 2010-07-09 FI		
其他公开文献	EP2404548A1		
外部链接	Espacenet		

摘要(译)

该文献提出了一种利用两种无线通信方案的组合的无线通信方案：短距离通信方案和具有比短距离通信方案的无线传输范围更长的无线传输范围的无线电通信方案。短距离信号用于指示将用于发送无线电信号的无线电资源，然后在由短距离信号指示的无线电资源中传送该无线电信号。

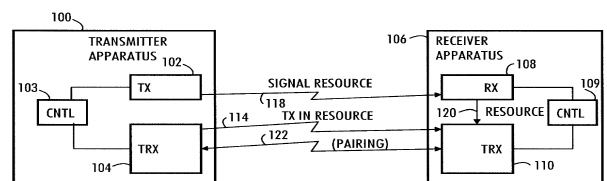


FIG. 1

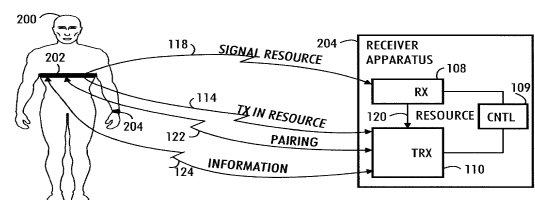


FIG. 2A