

(19)



(11)

EP 3 111 835 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.06.2020 Bulletin 2020/23

(51) Int Cl.:
A61B 5/04 (2006.01) A61B 5/00 (2006.01)

(21) Application number: **15174610.4**

(22) Date of filing: **30.06.2015**

(54) SENSING DEVICE WITH ARRAY OF MICROELECTRODES

ERFASSUNGSVORRICHTUNG MIT MIKROELEKTRODENARRAY

DISPOSITIF DE DÉTECTION À RÉSEAU DE MICROÉLECTRODES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
04.01.2017 Bulletin 2017/01

(73) Proprietors:
• **IMEC VZW**
3001 Leuven (BE)
• **Katholieke Universiteit Leuven**
3000 Leuven (BE)

(72) Inventors:
• **Raducanu, Bogdan**
3001 Leuven (BE)
• **Mitra, Srinjoy**
3001 Leuven (BE)
• **Yazicioglu, Refet Firat**
3001 Leuven (BE)

(74) Representative: **Patent Department IMEC**
IMEC vzw
Patent Department
Kapeldreef 75
3001 Leuven (BE)

(56) References cited:
WO-A2-2012/018631 US-A1- 2009 292 336

- **JONATHAN VIVENTI ET AL: "Flexible, foldable, actively multiplexed, high-density electrode array for mapping brain activity in vivo", NATURE NEUROSCIENCE, vol. 14, no. 12, 13 November 2011 (2011-11-13), pages 1599-1605, XP055139539, ISSN: 1097-6256, DOI: 10.1038/nn.2973**
- **DION KHODAGHOLY ET AL: "In vivo recordings of brain activity using organic transistors", NATURE COMMUNICATIONS, vol. 4, 12 March 2013 (2013-03-12), page 1575, XP055216287, DOI: 10.1038/ncomms2573**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 111 835 B1

Description**Technical Field**

5 **[0001]** This invention relates generally to the field of biosensors, and more specifically to sensing devices comprising an array of microelectrodes for the analysis of tissue and/or neuroscience experimentation.

Background

10 **[0002]** Devices with microelectrode arrays for bio-sensing purposes have an important role in the areas of diagnostic such brain monitoring or in-vitro cell monitoring. Known microelectrode sensing arrays may include, for example, neural probes, which are used to measure neural activity at one or more sites of the brain.

15 **[0003]** Known neural probes comprise a probe base and a shank, the shank extending from the base for insertion into a portion of the brain. Typically, electrodes are disposed along the length of the shank, each electrode being adapted to measure a voltage, corresponding to neural activity, in the immediate vicinity of the electrode. In use, the probe base is typically positioned on the outside of the brain and comprises base circuitry suitable for recording voltages present at the electrodes of the shank. The base circuitry may further comprise further processing circuitry, for example, a filter or digitization circuitry.

20 **[0004]** A neural probe will usually comprise shank wires positioned in the shank and connecting an electrode to the base circuitry. As the width of the shank is preferably extremely narrow, to reduce potential damage to the brain, there is a maximum limit on the number of shank wires that may be in a shank. This is due to the physical limitations in positioning shank wires, the difficulty in fabricating sufficiently small shank wires and possible complications due to capacitive coupling between closely spaced shank wires.

25 **[0005]** It is clear that a limitation on shank wires induces a proportional limit on the allowable number of electrodes that may be permitted on the available area for the electrodes. However, it is desirable to allow the electrode area to have an increased number of electrodes in order to acquire more information from regions near to that electrode area. A similar problem arises when implementing a very high density two-dimensional microelectrode arrays which can be conceived as rows of one-dimensional shank. A microelectrode array of this kind, with very limited space between the rows, will also have limited number of wires to carry the signal to a base area placed outside the array.

30 **[0006]** Document "Flexible, foldable, actively multiplexed, high-density electrode array for mapping brain activity in vivo", by Jonathan Viventi et al, Nature Neuroscience, vol 14, no 12, 13 November 2011, describes a 360-channel high-density active electrode array composed of 720 silicon nanomembrane transistors, in which the active matrix circuit design contains two transistors per unit cell. Document "In vivo recordings of brain activity using organic transistors", by Dion Khodagholy et al, Nature Communications, vol 4, 12 March 2013, describes stereoelectroencephalography and electrocorticography (ECoG) probes containing both organic electrochemical transistors (OECTs) and electrodes made from PEDOT: PSS.

Summary

40 **[0007]** The present invention is set out in the appended claims. The embodiments, examples or aspects according to the present description which do not fall within the scope of said claims are provided for illustrative purposes only and do not form part of the present invention.

45 **[0008]** According to an exemplary embodiment, there is provided a sensing device comprising: an output area having an output circuit comprising an integrator adapted to integrate a received current so as to generate an output voltage corresponding to the received current; an electrode area comprising: an electrode comprising an exposed, electrically conductive, surface area and electrode circuitry connected to the exposed surface area, wherein the electrode circuitry comprises a voltage-to-current transducer adapted to produce a wire current corresponding to a voltage present at the exposed surface area; and a connecting wire electrically connecting the electrode circuitry to the output circuit, wherein the current received by the output circuit is the wire current.

50 **[0009]** According to an exemplary embodiment, there is provided a sensing device adapted to detect a voltage level in a site of biological tissue. A voltage level at an exposed surface area of an electrode placed at a desired site of the biological tissue (e.g. a brain or a heart) is converted to a current level by electrode circuitry, before being passed along a connecting wire to output circuitry located in an output area of the voltage sensing apparatus. The output circuitry comprises means for converting the wire current along the connecting wire back into an output voltage, such that the output voltage produced by the output circuitry corresponds to the voltage detected by the associated electrode.

55 **[0010]** An exposed surface area of an electrode may, for example, be in electrical contact with a portion of biological tissue (e.g. a brain, a heart, a liver, lungs, muscles etc.) so as to measure a voltage present in that portion. It will be understood that an exposed surface area of the electrode measures or conducts a voltage in the immediate vicinity of

the exposed surface area.

[0011] According to an exemplary embodiment, the voltage measured at the exposed surface area of the electrode (a detected voltage) is converted into a corresponding (e.g. proportional) current by electrode circuitry, comprising a transducer, connected to the exposed surface area. The current is passed along a connected wire connected at a first end to the electrode circuitry and at a second end to the output circuitry, positioned in an output area of the output circuitry.

[0012] According to an exemplary embodiment, the output circuitry is adapted to convert the current along the connecting wire to an output voltage corresponding (e.g. proportional) to the voltage at the electrode. Such output circuitry comprises an integrator adapted to integrate the current along the connecting wire so as to generate the output voltage. The integrator may, in at least one embodiment, comprise a capacitor and/or a transistor and/or an operational amplifier.

[0013] According to an exemplary embodiment, the integrator advantageously reduces high frequency noise by averaging the current over time. Integrating the current in this manner thereby reduces the need for pre-filtering of the signal (i.e. at the electrode circuitry), at least partially avoiding the need for filtering circuitry at the electrode to thereby reduce power consumption and the area required for circuitry at the electrode (i.e. the required footprint of the electrode). Reduced power consumption at the electrode reduces the heat dissipation at the said electrode, thereby reducing the temperature that proximate biological tissue is heated. A reduced electrode area allows for miniaturization of electrode circuitry thereby reducing the size of the voltage sensing apparatus. Furthermore, a reduced electrode area permits an increased number of electrodes to be positioned within a given area.

[0014] According to an exemplary embodiment, a gain of the detected voltage is applied based on at least the integration time of the integrator, thereby also allowing the advantageous dynamic adjusting of gain to be effected (for example by changing the integration time).

[0015] In exemplary embodiments, there may be a plurality of connecting wires each carrying a wire current to be integrated at an associated output circuitry. In such embodiments, it may be understood that each connecting wire is held at substantially the same voltage with differing current levels (corresponding to different detected voltages). This advantageously allows cross-talk due to capacitive coupling between two or more connecting wires to be reduced.

[0016] Due to the reduction in capacitive coupling, a sensing device according to an exemplary embodiment may thereby allow for the provision of connecting wires placed more closely together than in previous or conventional voltage sensing apparatus. This may allow for an increased number of connecting wires (and hence electrodes) in the electrode area of a voltage sensing apparatus.

[0017] Using a current mode transmission according to an embodiment allows for the reduction and/or mitigation of the effects caused by the electrical resistance of the connecting wires in the electrode area. This has the effect of improving the accuracy of the readout and increasing the available bandwidth of the voltage sensing apparatus compared to a typical voltage transmission. Eliminating such adverse effects caused by the connecting wire allows for miniaturization of the said wire size, reducing the size of the connecting wire(s) and/or allowing for increased wire density.

[0018] According to an exemplary embodiment, the voltage-to-current transducer comprises a field-effect transistor having a gate, a drain and a source, wherein: the gate of the transistor is connected to the exposed surface area; one of the drain or the source of the transistor is held at a first predetermined voltage level, such that a voltage at the gate of the transistor causes a corresponding wire current to flow at the other one of the drain or the source of the transistor. It should be understood that the gate of the transistor need not be directly connected to the exposed surface area, but may be connected via additional circuit components, for example a decoupling capacitor.

[0019] Hence there may be provided a single-transistor transducer, which offers several advantages in terms of low power consumption and footprint (i.e. the area that the electrode circuitry takes up). The above suggested configuration allows isolation of the exposed surface area, such that the voltage detected is not influenced by a load resistance of the electrode or output circuitry.

[0020] An exemplary integrator may comprise an integrating capacitor having a first and second plate, the integrating capacitor being arranged so that the wire current is integrated at the first plate of the integrating capacitor to thereby generate an output voltage at the first plate, and the second plate of the integrating capacitor is held at a ground voltage; and a controllable reset switch connected between the first plate of the integrating capacitor and the second plate so as to controllably reset the output voltage.

[0021] According to an embodiment, the wire current may be integrated in the output circuitry at a first plate of an integrating capacitor, the second plate of the integrating capacitor being connected to a ground voltage. Integrating the wire current at the first plate allows the voltage across the capacitor to increase over time. To reset the capacitor (i.e. bring the first plate back to a ground voltage) a reset switch may span between the two plates of the capacitor, and when active, may cause the first plate of the capacitor to be grounded.

[0022] Optionally, the electrode further comprises a high-pass filter connected between the exposed surface area and the electrode circuitry. Preferably, the high-pass filter is a passive high-pass filter.

[0023] Provision of a high pass filter prior to the electrode circuitry limits the very low frequency artifacts, such as low frequency noise or DC biasing, that may saturate the electrode circuitry.

[0024] The electrode circuitry may further comprise an electrode buffer transistor adapted to buffer the current produced

by the voltage-to-current transducer.

[0025] According to an exemplary embodiment, the wire current may be buffered through an electrode buffer transistor before being provided to the connecting wire. Buffering the wire current ensures separation between the electrode circuitry (for example, the voltage-to-current transducer) and possible voltage ripples present at the output of the electrode circuitry caused by the changing state of the switches. Furthermore, such an arrangement (alternatively named a cascade) provides improved input-output isolation, higher input impedance and a higher frequency bandwidth. According to an exemplary embodiment, this advantageously results in improving the fidelity, linearity and performance of the sensing apparatus.

[0026] In one exemplary embodiment, the electrode area comprises a plurality of electrodes, the plurality of electrodes being divided into at least two sets of electrodes, each set of electrodes comprising at least two electrodes; and a plurality of connecting wires, each connecting wire being associated with a single set of electrodes and connectable to each electrode in that set of electrodes, wherein the wire current from each electrode in a set of electrodes is multiplexed using time-division multiplexing onto the associated connecting wire.

[0027] According to an exemplary embodiment, there may be provided a plurality of connecting wires, each connecting wire having a plurality of wire currents multiplexed thereon. Multiplexing in such a manner allows a plurality of electrodes to be associated with a single connecting wire, such that the total number of connecting wires in the electrode area may be reduced relative to a normal or conventional voltage sensing apparatus (where each connecting wire is associated with a single electrode). Similarly, an increased number of electrodes may be provided when the number of connecting wires is limited.

[0028] Time-division multiplexing may introduce high-frequency noise, for example noise fold-back or aliasing. This is advantageously mitigated by the present invention through provision of the integrator in the output circuitry, which permits reduction of such high-frequency noise. In such an exemplary embodiment, the output area optionally comprises a plurality of output circuits, each output circuit being connected to a different connecting wire.

[0029] In comparison to the known prior art, wherein each electrode is associated with a respective connecting wire and a respective output circuit, connection of an output circuit to a plurality of electrodes (via a connecting wire) provides several advantages. By way of example, one advantage is that the overall size of the output circuit associated with any given electrode has less constraint (i.e. the footprint of each output circuit may be made larger), allowing larger components to be used for limiting noise, for example, thermal noise.

[0030] Furthermore, each output circuit may comprise a plurality of sampling circuits, each sampling circuit being associated with a different electrode from the set of electrodes associated with the connected connecting wire, wherein each sampling circuit is adapted to sample and hold the output voltage corresponding to the associated electrode.

[0031] According to an exemplary embodiment, there may be the same number of sampling circuits in connection with a given connecting wire (via further output circuitry) as there are electrodes, such that each sampling circuit may be associated with a single, different, electrode. Each sampling circuit may be controlled to only sample the voltage at the integrator (i.e. the output voltage) when the said voltage at the integrator corresponds to the voltage detected at the electrode associated with the respective sampling circuit. The arrangement of sampling circuits may otherwise be thought to demultiplex the output voltage provided by the integrator.

[0032] In one exemplary embodiment, the electrode circuitry of each electrode optionally comprises: an output node at which the wire current is defined; a first controllable switch adapted to selectively connect the output node to the connecting wire; and a second controllable switch adapted to selectively connect the output node to a node held at a second predetermined voltage level. Optionally, the output node is always connected to the connecting wire or the node held at the second predetermined voltage level or both. In other words, the voltage-to-current transducer is never turned off, which at least partially eliminates issues concerning settling time.

[0033] The output circuit(s) may further comprise a wire buffer transistor and/or additional circuit components adapted to maintain the connecting wire at the second predetermined voltage level.

[0034] Maintaining the same voltage level at the connecting wire as at the node held at a second predetermined voltage level, such that the output of the electrode circuitry is switched between the same two voltage levels, at least partially avoids any possible switching noise (in the output circuitry for example) back propagating along the connecting wire to the electrode circuitry.

[0035] According to an embodiment, the electrode area optionally further comprises: a first plurality of control lines, each control line connected to control a respective first controllable switch in a single electrode from each set of different electrodes; and a second plurality of control lines, each control line connected to control a respective second controllable switch in a single electrode from each set of different electrodes. Thus, rather than each controllable switch of each electrode being controlled individually, a plurality of controllable switches of electrodes in different sets may be controlled in parallel. In other words, voltages detected by electrodes in different sets may be measured in parallel. This advantageously allows a reduced number of control lines and hence a reduced number of wires required in the electrode area, permitting the size or width of the electrode area to be reducible.

[0036] In one exemplary embodiment the electrode area comprises at least one connecting wire, each connecting

wire being connectable to no fewer than 2 unique electrodes. There may be a total of no less than 2 electrodes divided into sets of at least 2 electrodes each, each set of electrodes being connected to a different connecting wire.

[0037] The electrodes may be grouped in sets comprising any number of electrodes, for example, sets comprising at least 2 electrodes, for example, 8 or more electrodes per set, for example, 24 or more electrodes per set. It is noted that, although preferable, the number of electrodes in each set need not be the same, such that each set of electrodes may comprise a different number of electrodes.

[0038] In one or more further exemplary embodiments, the number of control lines is proportional to the number of electrodes in any given set. For example, if each set of electrodes comprises 8 electrodes, there may be a multiple of 8 number of control lines (e.g. 16 control lines). Each control line may, for example, be adapted to control a respective switch of a respective electrode in each set (i.e. a single control line may control more than one electrode in different sets).

[0039] By way of example, each electrode may have a limited length, width and/or diameter of no more than 50 μ m, for example, no more than 25 μ m, for example no more than 10 μ m. In other words, the footprint (i.e. the amount of surface area that the exposed surface area of a given electrode takes up) of each electrode is limited to a maximum predetermined area.

[0040] According to at least one embodiment, there may be provided a neural probe comprising a probe base and a shank directly coupled to the base. The electrode area may be formed in the shank, and the output area may be formed in the probe base. At least one electrode may be positioned on the exterior of the shank to permit the exposed surface area to be exposed. Connecting wires may run up the shank to connect the at least one electrode to the output circuitry positioned in the probe base.

[0041] The shank may be understood to be a narrow structure or protrusion adapted to be inserted into the brain to permit the detection of at least one voltage in the vicinity of the shank. By way of example only, the shank may be no more 250 μ m thick, for example no more than 150 μ m thick and advantageously no more than 50 μ m thick.

[0042] It would be advantageous to have a thin shank, as the smaller the thickness of the shank the lower the chances of damaging biological tissue, such as the brain in which the shank is inserted.

[0043] In another embodiment, there may be provided a biosensor comprising a flexible membrane; wherein the electrode area is formed on the flexible membrane. Such a flexible membrane may be positioned, for example, on an external surface of the brain so as to detect at least one voltage present at an exterior surface of the brain. An exemplary flexible membrane may comprise at least one of: polyester, polyimide and/or metallic foil.

Brief description of the drawings

[0044] Examples will now be described in detail, with reference to the accompanying drawings, in which:

Figure 1 illustrates a sensing device according to a first exemplary embodiment.

Figure 2 illustrates a schematic of an electrical circuit of a portion of a sensing device according to an exemplary embodiment.

Figure 3 depicts a schematic of an electrical circuit of a sensing device according to another embodiment.

Figure 4 illustrates an exemplary timing diagram for the electrical circuit of a sensing device according to an embodiment.

Figure 5 depicts a sensing device according to another exemplary embodiment.

Figure 6 depicts a sensing device according to still another exemplary embodiment.

Detailed description of the preferred embodiments

[0045] In some exemplary embodiments described herein, the sensing device may be embodied as a neural probe. However, it will be clear to the skilled person that other sensing device embodiments may be implemented and useful for other types of in-vivo or in-vitro biological sensors (for example, a sensor comprising a flexible substrate upon which a plurality of electrodes of an electrode area is mounted).

[0046] **Figure 1** is illustrative of a sensing device **1** according to a first embodiment. The sensing device **1** comprises a shank portion, or electrode area, **120** and a base portion, or output circuitry area, **140** coupled together. Disposed along the shank is a plurality of electrodes, comprising at least a first electrode **122**. Each electrode is at least partially exposed to the exterior of the shank **120**. In the present embodiment, each electrode is associated with and electrically connected to a different base circuit positioned in the base **140**. By way of example, the first electrode **122** is connected to a first base circuit **142**. According to an exemplary embodiment the sensing device **1** may be a neural probe.

[0047] According to an embodiment, each electrode in the shank is connected to its respective base circuit in the base by a respective shank wire. For example, first electrode **122** is connected to the first base circuit **142** by way of a first connecting wire **124**.

[0048] As indicated by the dashed lines, Figure 1 is not necessarily to scale, and the shank **120** may rather be of an

arbitrary length and width relative to the base **140**.

[0049] Turning to **Figure 2**, a representative schematic of a portion of the sensing device **1** according to an exemplary embodiment is shown. Specifically, there is identified the first electrode **122** connected to the first base circuit **142** by the first connecting wire **124**.

[0050] The electrode **122** comprises an exposed surface area **212** and electrode circuitry **214** connected together. The exposed surface area **212** comprises an electrically conductive contact (for example, a metal electrode) that, in use, is in contact with, for example, a portion of the region or tissue of interest so as to measure a voltage present in or at the said region. This measured, input voltage **V_{in}** is subsequently passed to the electrode circuitry. According to an exemplary embodiment, said region of interest is, for example, a portion of the brain.

[0051] In other words, the exposed surface area is positioned on the exterior surface of the shank **120**. The electrode circuitry may be positioned beneath the exposed surface area, such that, in embodiments, the maximum footprint or area that the electrode circuitry may take up is bounded or defined by the size of the exposed surface area.

[0052] The electrode circuitry comprises a voltage-to-current transducer **214**, adapted to convert the voltage detected by the exposed surface area **212** (the input voltage **V_{in}**) to a wire current **I_{wire}**. This wire current is passed along the first connecting wire **124** to the first base circuit **142**. The first base circuit integrates the wire current **I_{wire}** so as to generate an output voltage **V_{out}** corresponding (e.g. proportional) to the input voltage **V_{in}**.

[0053] In the present embodiment, the voltage-to-current transducer comprises a field-effect transistor **216** (for example, a MOSFET), having a drain, a source and a gate. According to an exemplary embodiment, the field-effect transistor **216** is a P channel field-effect transistor. The gate of the field-effect transistor **216** is connected to the exposed surface area **212**, such that the voltage detected by the exposed surface area **V_{in}** is applied to the gate of the field effect transistor **216**. In some embodiments, additional biasing circuits may be used to maintain the transistor at a suitable operating point (e.g. a quiescent point).

[0054] The source of the field effect transistor **216** is connected to a first node **218** held at a first predetermined voltage level **V₁**. It will be readily understood that as the voltage at the gate **V_{in}** varies (according, for example, to a varying voltage level in the brain) so the current permitted to flow between the source and the drain of the transistor will vary. Accordingly, a wire current **I_{wire}** corresponding to the voltage at the gate of the field effect transistor **216** (and thereby the voltage in a portion of the brain) may be generated.

[0055] In general, the wire current (i.e. the output of the voltage-to-current transducer) may be thought to be a combination of a continuous wire current (DC) and alternating wire current (AC), i.e. $I_{wire} = I_{wireDC} + i_{wireAC}$. I_{wireDC} may be determined by a biasing circuit (if present) connected to the gate of the voltage-to-current transducer. The alternating current (i_{wireAC}) is dependent upon a transconductance gain (g_m) of the voltage-to-current transducer and the voltage detected by the exposed surface area **V_{in}**. This transconductance gain may, for example, be at least partially dependent on the biasing circuit.

[0056] The AC wire current i_{wireAC} output by the voltage-to-current transducer may be modeled as:

$$i_{wireAC} = V_{in} \times g_m \quad (1)$$

[0057] The first base circuit of the first embodiment comprises an integrator **242** adapted to perform the integration of a wire current **I_{wire}** received from the first connecting wire **124** so as to generate an output voltage **V_{out}** corresponding to the wire current **I_{wire}** (and thereby the input voltage **V_{in}**).

[0058] According to an embodiment, the integrator **242** comprises an integrating capacitor **247** having a first plate **248** and a second plate **249**. The first plate **248** is connected to receive the wire current **I_{wire}** and the second plate **249** is held at a constant ground voltage supplied at a ground node **244**. Provision of the wire current **I_{wire}** to the first plate **248** between an initial, first point in time to and a later, second point in time t_1 induces a build-up of charge (**Q**) at the first plate in accordance with the following equation:

$$Q(t) = \int_{t_0}^{t_1} I_{wire}(t)dt + Q(t_0) \quad (2)$$

where $Q(t_0)$ is the initial charge at the first plate.

[0059] This may be further simplified under the assumption that the initial charge at the first plate is zero and the wire current may be modeled as a constant value:

$$Q = I_{wire} \times t \quad (3)$$

wherein t is the difference in seconds between the later point in time t_1 and the initial point in time t_0 (i.e. an integration time t during which the current is integrated at the first plate of the capacitor).

[0060] There is a known relationship between capacitance of the integrating capacitor C , charge at the first plate of the integrating capacitor Q and voltage **V_{out}** across the integrating capacitor (i.e. $Q = V_{out} \times C$). Thus the voltage across the integrating capacitor **247** (output voltage, V_{out}) changes over time in accordance with:

$$V_{out}(t) = \frac{1}{C} \int_{t_0}^{t_1} I_{wire}(t) dt + V_{out}(t_0) \quad (4)$$

[0061] This may likewise be simplified, assuming that the initial charge at the first plate is zero (i.e. voltage across the capacitor is also zero) and the wire current is a constant value, as:

$$V_{out} = I_{wire} \times \frac{t}{C} = (V_{in} g_m + I_{wireDC}) \times \frac{t}{C} \quad (5)$$

[0062] Thus it can be readily seen that a voltage **V_{out}** across the integrating capacitor **247** may be induced by the provision of a current to a first plate **248** of that integrating capacitor. It will be understood, therefore, that wire currents **I_{wire}** of different magnitude cause a different output voltage **V_{out}**. Assuming that the continuous wire current I_{wireDC} is constant (i.e. the voltage-to-current transducer is biased at the same voltage) so the alternating wire current I_{wire} may be thought to control the output voltage.

[0063] It will be readily apparent that, disregarding the typically constant DC biasing component I_{wireDC} , there is a voltage gain (A) induced by the circuitry (i.e. gain is applied to the voltage **V_{in}** detected at the exposed surface area):

[0064] Thus it will be seen that the gain of the circuitry in the sensing device may be adjusted by altering the integration time t that the first plate **248** of the capacitor **247** is exposed to the wire current **I_{wire}**. In one exemplary embodiment, the integration time is sufficiently small to permit sampling of voltage output signals at a frequency high enough to capture the complete bandwidth of the signal of interest. By way of example, an exemplary integration time might be chosen that allows detection of signals having a frequency of no more than 20kHz, for example, at least 40kHz.

[0065] The gain A is dependent on the capacitance of the integrating capacitor **247**, thus an integrating capacitor having a lower capacitance may advantageously provide a higher gain. That being said, a lower value of capacitance of the integrating capacitor increases the noise and therefore decreases the accuracy of the output voltage (due to Johnson-Nyquist Noise or thermal noise). Thus a compromise may have to be made between achieving sufficient gain, and acceptable signal-to-noise ratio.

[0066] By way of example, the gain A of the circuitry may be adjusted to be no less than 1, for example 10, for example, 20. A higher gain value (for example, greater than 10) advantageously reduces the performance constraint of optional subsequent amplification stages.

The integrating circuit may be otherwise thought to behave as a low pass circuit, attenuating signals of frequencies above $1/t$. In embodiments t is chosen to maximize attenuation of typically unwanted high frequency noise, while the, typically more useful low frequency, signal passes unaffected.

[0067] The above equations 1-6 are merely representative models of the ideal circuit for the sake of clarity, and do not take into account, for example, any possible source impedance (e.g. of the electrode circuitry) and assume a linear charging of the capacitor. It will be readily understood by the skilled person that additional circuits may be present in order to correct for such non idealities and/or insure proper continuous current (DC) biasing of the circuit without departing from the scope of the invention.

[0068] There may be provided a reset switch **246** connected across the plates **248**, **249** of the capacitor **247** so as to selectively connect the first plate **248** to the ground node **244**. This essentially resets the first plate, bringing the output voltage to a ground voltage; that is bringing the capacitor back to a 'zero initial conditions' state. It will be understood that this permits sampling of the output voltage **V_{out}** to be taken, as the switch may successively connect and disconnect the first plate of the capacitor to the second plate (and hence to a ground voltage).

[0069] A representative schematic of a portion of a sensing device according to a second embodiment is shown in **Figure 3**. In this second embodiment, there is shown a plurality of electrodes (for example, first electrode **310** and second electrode **320**) each adapted to measure a voltage, for example, in a respective portion of the brain.

[0070] Each electrode may produce a respective wire current (first wire current I_{wb1} , and second wire current I_{wb2}). These wire currents are multiplexed, using the preferred method of time division multiplexing, onto a connecting wire **330** to produce a multiplexed wire current I_{mux} . This multiplexed wire current I_{mux} is passed by the connecting wire **330** to base circuitry **340** for further processing.

[0071] It will be readily understood that although only two electrodes are identified in the present embodiment, any number of electrodes (for example, 8 electrodes or 16 electrodes or more) may be multiplexed onto a single connecting wire without departing from the scope of the invention.

[0072] The features and characteristics of the first electrode **310** shall be hereafter described. The second electrode **320** (and any further electrode not shown) are configured in substantially the same arrangement and shall be not described for the purposes of conciseness and clarity.

[0073] Similar to the electrode described with reference to the first embodiment, the first electrode **310** comprises both an electrically conductive exposed surface area **311** and a voltage-to-current transducer **314**. The voltage-to-current transducer **314** is adapted to generate a current corresponding to a voltage detected at the exposed surface area **311**, and may be embodied as previously described with reference to the previous voltage-to-current transducer **214**.

[0074] Disposed between the exposed surface area **311** and the voltage-to-current transducer **314** is a high pass filter **312, 313**. The high pass filter **312, 313** is embodied as a standard passive first-order high pass filter having a filter capacitor **312** and a filter resistor **313** connected at one end to a filter node **3184** held at a voltage level V_b , to bias the circuit at a proper DC point. Provision of the high pass filter advantageously permits reduction of the very low frequency artifacts (i.e. low frequency noise or DC biasing) that may saturate the electrode circuitry, for example the voltage-to-current transducer **314**.

[0075] In exemplary embodiments, the capacitance of the filter capacitor **312** is extremely small (e.g. $<1\text{pf}$), but the resistance of the filter resistor sufficiently large (e.g. $>1\text{G}\Omega$) so as to achieve a relatively low corner frequency of the high-pass filter. In one exemplary embodiment, this corner frequency is less than 10Hz, in other embodiments, the corner frequency of the high pass filter is less than 1Hz.

[0076] Positioned to receive current produced by the voltage-to-current transducer **314** is an electrode buffer transistor **315** adapted to buffer the said current to output a buffered wire current I_{wb1} . According to an embodiment, where the voltage-to-current transducer comprises a field-effect transistor, the voltage-to-current transducer **314** and the electrode buffer transistor **315** may be thought to form a cascode configuration. Buffering the current produced by the voltage-to-current transducer increases the input impedance of the amplifier, and/or reduces the coupling between the said input of the amplifier and/or increases the bandwidth. According to an exemplary embodiment, the voltage gain through the buffer transistor is extremely high, but the current gain is close to unity (i.e. approximately 1), such that the buffered wire current I_{wb1} may be considered identical to the unbuffered wire current I_{wb1} , and may be referred to exchangeably.

[0077] In order to multiplex the first wire current I_{wb1} produced by the voltage-to-current transducer **314** (and subsequently buffered by the electrode buffer transistor **315**) a first switch **316** may selectively provide the current to the connecting wire **330**. Thus, the first switch controls the supply of the first wire current I_{wb1} produced by the first electrode to the shank wire **330**. Similarly, a first switch of the second electrode controls the supply of a second wire current I_{wb2} respectively produced by the second electrode to the connecting wire **330**. Multiplexing a plurality of wire currents produced by a respective plurality of electrodes permits a single connecting wire (e.g. connecting wire **330**) to a multiplexed current I_{mux} to base circuitry to pass information regarding the plurality of electrodes.

[0078] There may be provided a second switch **317** in the electrode circuitry, the second switch being adapted to selectively connect the output of the buffer transistor to a second node **3182** held at a second predetermined voltage level. This allows the voltage-to-current transducer **314** to never be completely turned off, but merely switched between the integrator **342** and the second node **3182**, advantageously permitting a reduction in settling time of the transducer **314**. Accordingly, this allows the time-division multiplexing to be performed at an increased speed, as the voltage on the connecting wire does not need to slew.

[0079] According to an exemplary embodiment, to improve the settling time of the transducer **314**, the connecting wire is held at the second predetermined voltage level. This may be performed by a wire buffer transistor **341** positioned in the base circuitry **340**. Holding the connecting wire at the second predetermined voltage level ensures that the output of the electrode circuitry is only switchable between two nodes held at the same voltage level, thus reducing the settling time and preventing any switching ripple to affect the previous stages of the circuit (for example, the voltage-to-current transducer).

[0080] Optionally, the difference between the first predetermined voltage level and the second predetermined voltage level (i.e. the voltage difference between the first node **3181** and the second node **3182**) is very small, which results a reduction in power consumption.

[0081] The operation of the first switch **316** is controlled by a first control voltage V_{con1} , and the operation of the second switch **317** is controlled by a second control voltage. Similarly, the operation of the second electrode **320** is controlled by a respective pair of a third control voltage V_{con3} and a fourth control voltage V_{con4} . It will be apparent that the third and fourth control voltages respectively control a first and second switch of the second electrode **320**.

[0082] The features and operation of base circuitry **340** associated with the plurality of electrodes comprising a first electrode **310** and second electrode **320** shall be elucidated in the following paragraphs.

[0083] Base circuitry **340** comprises a wire buffer transistor **341**, which operation has been previously described, and an integrator **342**. Integrator **342** comprises the same features (that is integrating capacitor **344** and reset switch **345**)

and operates in the same manner as the integrator **242** described with reference to the first embodiment. For the sake of clarity, it is noted that in the present embodiment the reset switch of the integrator **342** is controlled by a reset voltage V_{reset} . However, for the purposes of conciseness the operation of the integrator **342** shall not be further discussed, as it largely similar to the integrator **242** of the first embodiment.

[0084] The base circuitry **340** further comprises a plurality of sampling circuits **350**, **360**. In the present embodiment, the base circuitry **340** comprises a first sampling circuit **350** and a second sampling circuit **360**. Each sampling circuit is associated with a different electrode (for example, the first sampling circuit **350** is associated with the first electrode **310**). It will be appreciated that in preferable embodiments there is an equal number of sampling circuits associated with any given connecting wire (and hence integrator) as there are electrodes associated with that same connecting wire.

[0085] Sampling circuitry is used to sample-and-hold a value of the voltage output V_{out} by the integrator **342**. Thus a plurality of voltage values, each corresponding to a voltage detected by a respective electrode, may be held or stored at the plurality of sampling circuits.

[0086] A first embodiment of a sampling circuit shall be described with reference to the first sampling circuit **350**. The second sampling circuit **360** and any further sampling circuits (not shown) typically comprises the same features and operate in the same manner.

[0087] The first sampling circuit comprises a sampling switch **351** controlled by a first sampling switch voltage V_{ss1} . The sampling circuitry further comprises a sampling capacitor **352** and an output buffer **353**. The sampling switch **351** selectively connects a first plate of the sampling capacitor to the voltage output V_{out} by the integrator **342**. The second plate of the sampling capacitor **352** is held at a ground voltage such that when the sampling switch is connected, the voltage across the sampling capacitor is matched to the output voltage V_{out} . The first plate of the capacitor **352** is also connected to an output buffer **353** having a high input impedance, such that upon disconnecting the first plate of the sampling capacitor from the output voltage, the voltage across the sampling capacitor **352** remains at the output voltage V_{out} . The output buffer **353** buffers the voltage across the capacitor to generate a first sampling output voltage V_{s1} . Such an output buffer **353** may, for example, be a known operational amplifier or transistor buffer.

[0088] It is readily understandable that the respective sampling switches of the sampling circuits may be selectively switched so as to demultiplex the voltage output V_{out} into a plurality of sampling output voltages V_{s1} , V_{s2} , each corresponding to a voltage detected by an exposed surface area V_{in1} , V_{in2} of a respective electrode **310**, **320**.

[0089] The second sampling circuit operates in the same manner as the first, and is controlled by a respective second sampling switch voltage V_{ss2} to output a second sampling output voltage V_{s2} .

[0090] According to an exemplary embodiment, The sensing device may comprise any number of connecting wires, each connecting wire being associated with a set of two or more electrodes, and base circuitry comprising a respective set of two or more sampling circuits. According to an exemplary embodiment, each connecting wire is connectable to at least eight electrodes, for example at least sixteen electrodes.

[0091] An exemplary operation of the electrical circuit according to the second embodiment may be described with reference to the timing diagram exhibited in **Figure 4**.

[0092] Figure 4 identifies a first control sequence **420** to sample a first sampling voltage V_{s2} from a voltage V_{in} detected at the first electrode **310**. Initially, the output of the first electrode is disconnected from the connecting wire **330** (V_{con1} is low), but is connected to the second node **3182** held at a first predetermined voltage level (V_{con2} is high). When a sample of the voltage V_{in} is desired, the output of the first electrode is connected to the connecting wire **330** (V_{con1} goes high) and is subsequently disconnected from the second node **3182** (V_{con2} goes low). After a predetermined period of time (i.e. after the desired integration time t has elapsed), the output of the first electrode is reconnected to the second node **3182** (V_{con2} goes high) and is subsequently disconnected from the connecting wire **330** (V_{con1} goes low). It can be readily seen that during the time in which the output of the first electrode is connected to the connecting wire, so the output voltage V_{out} (held across the integrating capacitor **344**) increases.

[0093] To sample this output voltage the first sampling switch voltage is pulsed such that the voltage across the first sampling capacitor **352** is matched to the output voltage V_{out} . Subsequently, the voltage across the integrating capacitor **344** (the output voltage V_{out}) is reset by connecting then disconnecting the reset switch **345** (pulsing V_{reset}).

[0094] According to an exemplary embodiment, it may be preferable for at least one of the second node **3182** or the connecting wire **330** to always be connected to the output of the electrode. Similarly, for an arbitrary electrode, it may be preferable for the output of the arbitrary electrode to be connected to its associated connecting wire or its associated node held at a second predetermined voltage. In other words, the timing of the first switch **316** and second switch **317** overlap, such that at least one of the first switch **316** and second switch **317** is always closed.

[0095] An identical sequence (second control sequence **430**) is performed to sample a second sampling voltage V_{s2} from a voltage detected at the second electrode **320**. In other words, the output of the second electrode is switched from connecting to a node held at the first predetermined voltage to the connecting wire (V_{con3} goes high, V_{con4} goes low). After a predetermined period of time (the integration time t), this switching procedure is reversed (V_{con4} goes high, V_{con3} goes low). The output voltage is sampled at the second sampling circuit (V_{ss2} pulses), and the voltage across the integrating capacitor **344** is reset (V_{reset} pulses).

[0096] According to an embodiment, each electrode and associated sampling circuit sequentially undergoes a respective control sequence to sample a sampling output voltage associated with each electrode. In particular embodiments, the cycle of sequential control sequences is continuously repeated so as to continuously sample and measure voltages at respective electrodes.

[0097] Figure 5 depicts a sensing device 5 according to another exemplary embodiment. The sensing device 5 comprises a shank portion, or electrode area, 501 and a base portion, or output circuitry area 502. Positioned in the base 502 is base, or output circuit, electronics 504. Positioned in the shank is a first set 506 of electrodes and a second set 507 of electrodes. Each set of electrodes is connected to a respective base circuit 510, 530 in the base electronics 504 by a respective connecting wire 509a, 509b. Thus each electrode in the same set of electrodes is connected to the same base circuit, and electrodes in different sets are connected to different base circuits.

[0098] The base electronics further comprises control circuitry 520. The control circuitry is adapted to provide at least one control signal to each electrode in each set of electrodes. Any single control signal is only provided to a single electrode in any given set, but may be shared between electrodes in different sets. This advantageously allows a reduction in the number of control lines required in the electrode area (e.g. the shank).

[0099] For example, in the present embodiment a first control signal 508 is provided to a group of electrodes 505 comprising a first electrode from the first set 506 and a first electrode from the second set 507.

[0100] It will be understood that if each set of electrodes comprises N electrodes (for example, the first set of electrode 506 comprises N electrodes when N=5) then there must be provided at least N control signals to control a single electrode from each of the sets.

[0101] In other embodiments, each electrode may receive more than one control signal (i.e. each electrode may require M control signals), for example, to control at least a first and second switch (in which case M=2). In such an embodiment there may, for example, be a plurality of sets of electrodes, each set of electrodes comprising N electrodes and each set of electrodes being associated with a different connecting wire. There may be provided a plurality of control signals equal to the number of control signals an electrode needs multiplied by the number of electrodes in a single set (i.e. M x N). Thus control signals may be shared between two or more sets of electrodes.

[0102] According to an embodiment, the sensing device as herein described may be used to perform studies, for example, both in vivo and/or in vitro.

[0103] Various other modifications will be readily apparent to those skilled in the art. For example, a skilled person would be able to substitute the above embodied P channel field-effect transistor with other suitable transducers (e.g. an N channel field effect transistor, an FET, a MOSFET, and/or a PNP/NPN transistor).

[0104] Figure 6 depicts an exemplary embodiment of a sensing device comprising multiple microelectrode sensing arrays combined to form a high density microelectrode array for in-vitro biological activity recording. According to an embodiment, multiple rows of electrodes are organized in a manner to form a two dimensional array of electrode, e.g. multiple "shanks" are placed in a column.

[0105] The sensing device comprises an electrode (or shank) area 120 and an output circuitry (or base) area 140. The electrode area comprises at least one electrode 122 connected to an output circuit 142 of the output circuitry area 140 via a respective connecting wire 124. There are indicated (in dotted lines) optional further electrodes of the electrode area and corresponding optional output circuits of the output area. It will be readily understood by the skilled person that any number of electrodes and/or output circuits may be provided within such a sensing device.

[0106] Such a sensing device may be used, for example, for in-vitro recording of cultured cells. This arrangement is advantageous in embodiments where the post-processing electronics (circuits in the 'base' or output circuitry area 140) can only be placed on the edge of the array, and there is a constrain of bringing out a large number of analog signals from the electrodes on a limited number of wires to the corresponding processing circuit of the output circuit area 140, and there is a need for multiplexing multiple current-mode signals on a single line.

[0107] Further exemplary embodiments of the sensing device will be described in the following.

[0108] According to another embodiment, there is provided a deep brain implant or neural probe comprising at least one electrode each having an exposed surface area positioned on a shaft. Each electrode comprises electrode circuitry adapted to convert a voltage present at the exposed surface area to a shank current. The neural probe comprises base circuitry, which is adapted to integrate a received current to generate an output voltage. The current received by the base circuitry is the shank current, passed to the base circuitry by a shank wire.

[0109] According to another embodiment, there is provided a neural probe comprising: a probe base comprising base circuitry; and a shank connected to the probe base, the shank comprising: an electrode comprising an exposed, electrically conductive, surface area and electrode circuitry connected to the exposed surface area, wherein the electrode circuitry comprises a voltage-to-current transducer adapted to produce a shank current corresponding to a voltage present at the exposed surface area; and a shank wire electrically connecting the electrode circuitry to the base circuitry, wherein the base circuitry comprises an integrator adapted to integrate the shank current so as to generate an output voltage corresponding to the shank current.

Claims

1. A sensing device (1) comprising:

an output area (140) having an output circuit (142) comprising an integrator (242) adapted to integrate a received current so as to generate an output voltage (V_{out}) corresponding to the received current;
 an electrode area (120) for bio-sensing purposes comprising:

an electrode (122) comprising an exposed, electrically conductive, surface area (212) and electrode circuitry (214) connected to the exposed surface area, wherein the electrode circuitry comprises a voltage-to-current transducer adapted to produce a wire current (I_{wire}) corresponding to a voltage present at the exposed surface area; and
 a connecting wire (124) electrically connecting the electrode circuitry to the output circuit,

wherein the current received by the output circuit is the wire current.

2. A sensing device according to claim 1, wherein the voltage-to-current transducer comprises a field-effect transistor (216) having a gate, a drain and a source, wherein:

the gate of the transistor is connected to the exposed surface area;
 one of the drain or the source of the transistor is held at a first predetermined voltage level, such that a voltage at the gate of the transistor causes a corresponding shunt current to flow at the other one of the drain or the source of the transistor.

3. A sensing device according to any preceding claim, wherein the integrator (242) comprises:

an integrating capacitor (247) having a first and second plate, the integrating capacitor being arranged so that the wire current is integrated at the first plate (248) of the integrating capacitor to thereby generate an output voltage at the first plate, and the second plate (249) of the integrating capacitor is held at a ground voltage; and
 a controllable reset switch (246) connected between the first plate of the integrating capacitor and the second plate so as to controllably reset the output voltage.

4. A sensing device according to any preceding claim, wherein the electrode further comprises a high-pass filter (312, 313) connected between the exposed surface area and the electrode circuitry.

5. A sensing device according to any preceding claim, wherein the electrode circuitry further comprises an electrode buffer transistor (315) adapted to buffer the current produced by the voltage-to-current transducer.

6. A sensing device according to any preceding claim, wherein the electrode area comprises:

a plurality of electrodes, the plurality of electrodes being divided into at least two sets of electrodes (506, 507), each set of electrodes comprising at least two electrodes; and
 a plurality of connecting wires (509a, 509b), each connecting wire being associated with a single set of electrodes and connectable to each electrode in that set of electrodes,
 wherein the wire current from each electrode in a set of electrodes is multiplexed using time-division multiplexing onto the associated connecting wire.

7. A sensing device according to claim 6, wherein the output area comprises a plurality of output circuits, each output circuit being connected to a different connecting wire.

8. A sensing device according to claim 7, wherein each output circuit comprises a plurality of sampling circuits (350, 360), each sampling circuit being associated with a different electrode from the set of electrodes associated with the connecting wire connected to the respective output circuit, wherein each sampling circuit is adapted to sample and hold the output voltage corresponding to the associated electrode.

9. A sensing device according to claims 7 or 8, wherein the electrode circuitry of each electrode comprises:

an output node at which the connecting current is defined;

a first controllable switch adapted to selectively connect the output node to the connecting wire; and
a second controllable switch adapted to selectively connect the output node to a node held at a second predetermined voltage level.

10. A sensing device according to claim 9, wherein the output node is always connected to the connecting wire or the node held at the second predetermined voltage level or both.

11. A sensing device according to claims 9 or 10, wherein each output circuit comprises a wire buffer transistor and/or other circuit components adapted to maintain the connecting wire at the second predetermined voltage level.

12. A sensing device according to any of claims 9 to 11, wherein the electrode area further comprises:

a first plurality of control lines, each control line connected to control a respective first controllable switch in a single electrode from each set of different electrodes; and

a second plurality of control lines, each control line connected to control a respective second controllable switch in a single electrode from each set of different electrodes.

13. A sensing device according to any preceding claim, wherein the sensing device is a neural probe comprising a probe base and a shank connected to the probe base and wherein the output area is formed in the probe base and the electrode area is formed in the shank.

14. A biosensor apparatus or system comprising a sensing device according to any preceding claim.

15. A biosensor apparatus or system according to claim 14, wherein the biosensor apparatus or system further comprises a flexible membrane and wherein the electrode area of the sensing device is formed on the flexible membrane.

Patentansprüche

1. Sensorvorrichtung (1), umfassend:

einen Ausgabebereich (140), der einen Ausgabeschaltkreis (142) hat, umfassend einen Integrator (242), adaptiert, um einen empfangenen Strom zu integrieren, um eine Ausgangsspannung (Vout) zu erzeugen, die dem empfangenen Strom entspricht;

einen Elektrodenbereich (120) zu Bio-Sensorik-Zwecken, umfassend:

eine Elektrode (122), umfassend einen offenliegenden, elektrisch leitfähigen Oberflächenbereich (212) und einen Elektrodenschaltkreis (214), verbunden mit dem offenliegenden Oberflächenbereich, wobei der Elektrodenschaltkreis einen Spannung-zu-Strom-Wandler umfasst, adaptiert, um einen Drahtstrom (Iwire) zu produzieren, der einer Spannung entspricht, die an dem offenliegenden Oberflächenbereich präsent ist; und einen Verbindungsdraht (124), der den Elektrodenschaltkreis elektrisch mit dem Ausgabeschaltkreis verbindet,

wobei der Strom, empfangen mittels des Ausgabeschaltkreises, der Drahtstrom ist.

2. Sensorvorrichtung nach Anspruch 1, wobei der Spannung-zu-Strom-Wandler einen Feldeffekt-Transistor (216) umfasst, der ein Gate, ein Drain und eine Quelle hat, wobei:

das Gate des Transistors mit dem offenliegenden Oberflächenbereich verbunden ist;
eines aus dem Drain oder der Quelle des Transistors auf einem ersten vorbestimmten Spannungslevel gehalten wird, sodass eine Spannung an dem Gate des Transistors einen entsprechenden Schaffstrom veranlasst, zu dem anderen aus dem Drain oder der Quelle des Transistors zu fließen.

3. Sensorvorrichtung nach einem der vorstehenden Ansprüche, wobei der Integrator (242) umfasst:

einen integrierenden Kondensator (247), der eine erste und eine zweite Platte hat, wobei der integrierende Kondensator angeordnet ist, sodass der Drahtstrom an der ersten Platte (248) des integrierenden Kondensators integriert wird, um dadurch eine Ausgangsspannung an der ersten Platte zu erzeugen, und wobei die zweite

Platte (249) des integrierenden Kondensators auf einer Grundspannung gehalten wird; und einen steuerbaren Rücksetz-Schalter (246), verbunden zwischen der ersten Platte des integrierenden Kondensators und der zweiten Platte, um die Ausgabespannung steuerbar zurückzusetzen.

- 5 4. Sensorvorrichtung nach einem der vorstehenden Ansprüche, wobei die Elektrode weiter einen Hochpass-Filter (312, 313) umfasst, verbunden zwischen dem offenliegenden Oberflächenbereich und dem Elektrodenschaltkreis.
5. Sensorvorrichtung nach einem der vorstehenden Ansprüche, wobei der Elektrodenschaltkreis weiter einen Elektrodenspuffer-Transistor (315) umfasst, adaptiert, um den Strom zu puffern, der mittels des Spannung-zu-Strom-Wandlers produziert wird.
10
6. Sensorvorrichtung nach einem der vorstehenden Ansprüche, wobei der Elektrodenbereich umfasst:

eine Vielzahl von Elektroden, wobei die Vielzahl von Elektroden unterteilt ist in mindestens zwei Sätze von
15 Elektroden (506, 507), wobei jeder Satz von Elektroden mindestens zwei Elektroden umfasst; und
eine Vielzahl von Verbindungsdrähten (509a, 509b), wobei jeder Verbindungsdraht mit einem einzigen Satz
von Elektroden assoziiert ist und verbindbar mit jeder Elektrode in diesem Satz von Elektroden,
wobei der Drahtstrom von jeder Elektrode in einem Satz von Elektroden multiplexed wird unter Verwendung
von Zeiteinteilungsmultiplexen auf dem assoziierten Verbindungsdraht.
20
7. Sensorvorrichtung nach Anspruch 6, wobei der Ausgabebereich eine Vielzahl von Ausgabeschaltkreisen umfasst,
wobei jeder Ausgabeschaltkreis mit einem verschiedenen Verbindungsdraht verbunden ist.
8. Sensorvorrichtung nach Anspruch 7, wobei jeder Ausgabeschaltkreis eine Vielzahl von Abtastschaltkreisen (350,
25 360) umfasst, wobei jeder Abtastschaltkreis mit einer verschiedenen Elektrode aus dem Satz von Elektroden assoziiert ist, der mit dem Verbindungsdraht assoziiert ist, der mit dem entsprechenden Ausgabeschaltkreis verbunden ist, wobei jeder Abtastschaltkreis adaptiert ist, um die Ausgabespannung abzutasten und zu halten, die der assoziierten Elektrode entspricht.
- 30 9. Sensorvorrichtung nach Ansprüchen 7 oder 8, wobei der Elektrodenschaltkreis von jeder Elektrode umfasst:

einen Ausgabeknoten, an dem der Verbindungsstrom definiert ist;
einen ersten steuerbaren Schalter, adaptiert, um selektiv den Ausgabeknoten mit dem Verbindungsdraht zu
verbinden; und
35 einen zweiten steuerbaren Schalter, adaptiert, um selektiv den Ausgabeknoten mit einem Knoten zu verbinden, der auf einem zweiten vorbestimmten Spannungslevel gehalten wird.
10. Sensorvorrichtung nach Anspruch 9, wobei der Ausgabeknoten immer mit dem Verbindungsdraht verbunden ist oder der Knoten auf dem zweiten vorbestimmten Spannungslevel gehalten wird oder beides.
40
11. Sensorvorrichtung nach Ansprüchen 9 oder 10, wobei jeder Ausgabeschaltkreis einen Drahtpuffer-Transistor umfasst und/oder andere Schaltkreiskomponenten, adaptiert, um den Verbindungsdraht auf dem zweiten vorbestimmten Spannungslevel zu halten.
- 45 12. Sensorvorrichtung nach einem der Ansprüche 9 bis 11, wobei der Elektrodenbereich weiter umfasst:

eine erste Vielzahl von Steuerleitungen, wobei jede Steuerleitung verbunden ist, um einen entsprechenden ersten steuerbaren Schalter in einer einzelnen Elektrode aus jedem Satz von verschiedenen Elektroden zu steuern; und
50 eine zweite Vielzahl von Steuerleitungen, wobei jede Steuerleitung verbunden ist, um einen entsprechenden zweiten steuerbaren Schalter in einer einzelnen Elektrode aus jedem Satz von verschiedenen Elektroden zu steuern.
13. Sensorvorrichtung nach einem der vorstehenden Ansprüche, wobei die Sensorvorrichtung eine Neuralsonde ist, umfassend eine Sondenhalterung und einen Schaft, verbunden mit der Sondenhalterung, und wobei der Ausgabebereich in der Sondenhalterung gebildet ist und der Elektrodenbereich in dem Schaft gebildet ist.
55
14. Bio-Sensor-Gerät oder -system, umfassend eine Sensorvorrichtung nach einem der vorstehenden Ansprüche.

15. Bio-Sensor-Gerät oder -system nach Anspruch 14, wobei das Bio-Sensor-Gerät oder -system weiter eine flexible Membran umfasst und wobei der Elektrodenbereich der Sensorvorrichtung auf der flexiblen Membran gebildet ist.

5 Revendications

1. Dispositif de détection (1) comprenant :

une zone de sortie (140) ayant un circuit de sortie (142) comprenant un intégrateur (242) adapté pour intégrer un courant reçu de manière à générer une tension de sortie (Vout) correspondant au courant reçu ;
une zone d'électrode (120) à des fins de bio-détection comprenant :

une électrode (122) comprenant une surface exposée électriquement conductrice (212) et des circuits d'électrode (214) connectés à la surface exposée, dans lequel le circuit d'électrode comprend un transducteur tension-courant adapté pour produire un courant de fil (Iwire) correspondant à une tension présente au niveau de la surface exposée ; et
un fil de connexion (124) connectant électriquement les circuits d'électrode au circuit de sortie,

dans lequel le courant reçu par le circuit de sortie est le courant de fil.

2. Dispositif de détection selon la revendication 1, dans lequel le transducteur tension-courant comprend un transistor à effet de champ (216) ayant une grille, un drain et une source, dans lequel :

la grille du transistor est connectée à la surface exposée ;
l'un du drain ou de la source du transistor est maintenu à un premier niveau de tension prédéterminé, de sorte qu'une tension au niveau de la grille du transistor amène un courant de tige correspondant à circuler au niveau de l'autre du drain ou de la source du transistor.

3. Dispositif de détection selon l'une quelconque des revendications précédentes, dans lequel l'intégrateur (242) comprend :

un condensateur d'intégration (247) ayant des première et seconde plaques, le condensateur d'intégration étant agencé de sorte que le courant de fil soit intégré au niveau de la première plaque (248) du condensateur d'intégration pour ainsi générer une tension de sortie au niveau de la première plaque, et la seconde plaque (249) du condensateur d'intégration est maintenue à une tension de masse ; et
un commutateur de réinitialisation pouvant être commandé (246) connecté entre la première plaque du condensateur d'intégration et la seconde plaque de manière à réinitialiser d'une manière pouvant être commandée la tension de sortie.

4. Dispositif de détection selon l'une quelconque des revendications précédentes, dans lequel l'électrode comprend en outre un filtre passe-haut (312, 313) connecté entre la surface exposée et les circuits d'électrode.

5. Dispositif de détection selon l'une quelconque des revendications précédentes, dans lequel les circuits d'électrode comprennent en outre un transistor tampon d'électrode (315) adapté pour tamponner le courant produit par le transducteur tension-courant.

6. Dispositif de détection selon l'une quelconque des revendications précédentes, dans lequel la zone d'électrode comprend :

une pluralité d'électrodes, la pluralité d'électrodes étant divisée en au moins deux ensembles d'électrodes (506, 507), chaque ensemble d'électrodes comprenant au moins deux électrodes ; et
une pluralité de fils de connexion (509a, 509b), chaque fil de connexion étant associé à un ensemble unique d'électrodes et pouvant être connecté à chaque électrode de cet ensemble d'électrodes,
dans lequel le courant de fil à partir de chaque électrode dans un ensemble d'électrodes est multiplexé en utilisant un multiplexage temporel sur le fil de connexion associé.

7. Dispositif de détection selon la revendication 6, dans lequel la zone de sortie comprend une pluralité de circuits de sortie, chaque circuit de sortie étant connecté à un fil de connexion différent.

8. Dispositif de détection selon la revendication 7, dans lequel chaque circuit de sortie comprend une pluralité de circuits d'échantillonnage (350, 360), chaque circuit d'échantillonnage étant associé à une électrode différente de l'ensemble d'électrodes associé au fil de connexion connecté au circuit de sortie respectif, dans lequel chaque circuit d'échantillonnage est adapté pour échantillonner et maintenir la tension de sortie correspondant à l'électrode associée.
9. Dispositif de détection selon les revendications 7 ou 8, dans lequel les circuits d'électrode de chaque électrode comprennent :
 - un nœud de sortie au niveau duquel le courant de connexion est défini ;
 - un premier commutateur pouvant être commandé adapté pour connecter sélectivement le nœud de sortie au fil de connexion ; et
 - un second commutateur pouvant être commandé adapté pour connecter sélectivement le nœud de sortie à un nœud maintenu à un second niveau de tension prédéterminé.
10. Dispositif de détection selon la revendication 9, dans lequel le nœud de sortie est toujours connecté au fil de connexion ou au nœud maintenu au second niveau de tension prédéterminé ou aux deux.
11. Dispositif de détection selon les revendications 9 ou 10, dans lequel chaque circuit de sortie comprend un transistor tampon de fil et/ou d'autres composants de circuit adaptés pour maintenir le fil de connexion au second niveau de tension prédéterminé.
12. Dispositif de détection selon l'une quelconque des revendications 9 à 11, dans lequel la zone d'électrode comprend en outre :
 - une première pluralité de lignes de commande, chaque ligne de commande étant connectée pour commander un premier commutateur pouvant être commandé respectif dans une électrode unique à partir de chaque ensemble d'électrodes différentes ; et
 - une seconde pluralité de lignes de commande, chaque ligne de commande étant connectée pour commander un second commutateur pouvant être commandé respectif dans une électrode unique à partir de chaque ensemble d'électrodes différentes.
13. Dispositif de détection selon l'une quelconque des revendications précédentes, dans lequel le dispositif de détection est une sonde neurale comprenant une base de sonde et une tige connectée à la base de sonde et dans lequel la zone de sortie est formée dans la base de sonde et la zone d'électrode est formée dans la tige.
14. Appareil ou système de biocapteur comprenant un dispositif de détection selon l'une quelconque des revendications précédentes.
15. Appareil ou système de biocapteur selon la revendication 14, dans lequel l'appareil ou le système de biocapteur comprend en outre une membrane flexible et dans lequel la zone d'électrode du dispositif de détection est formée sur la membrane flexible.

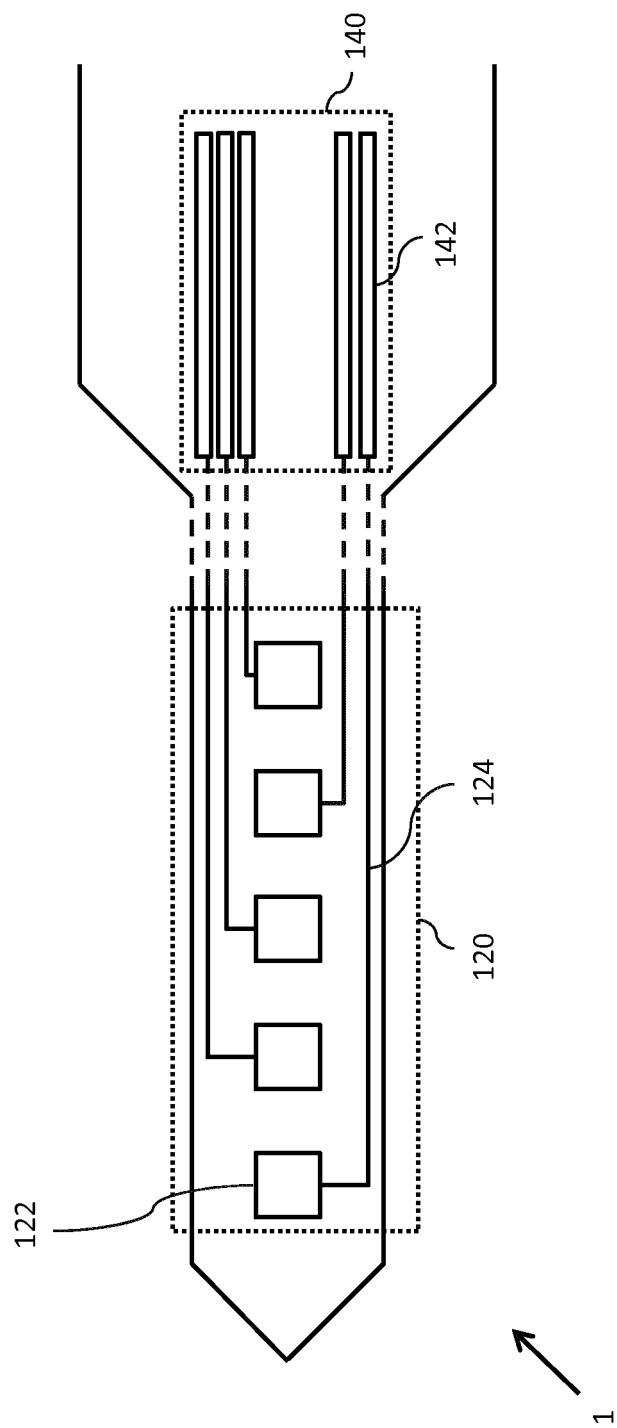


Fig. 1

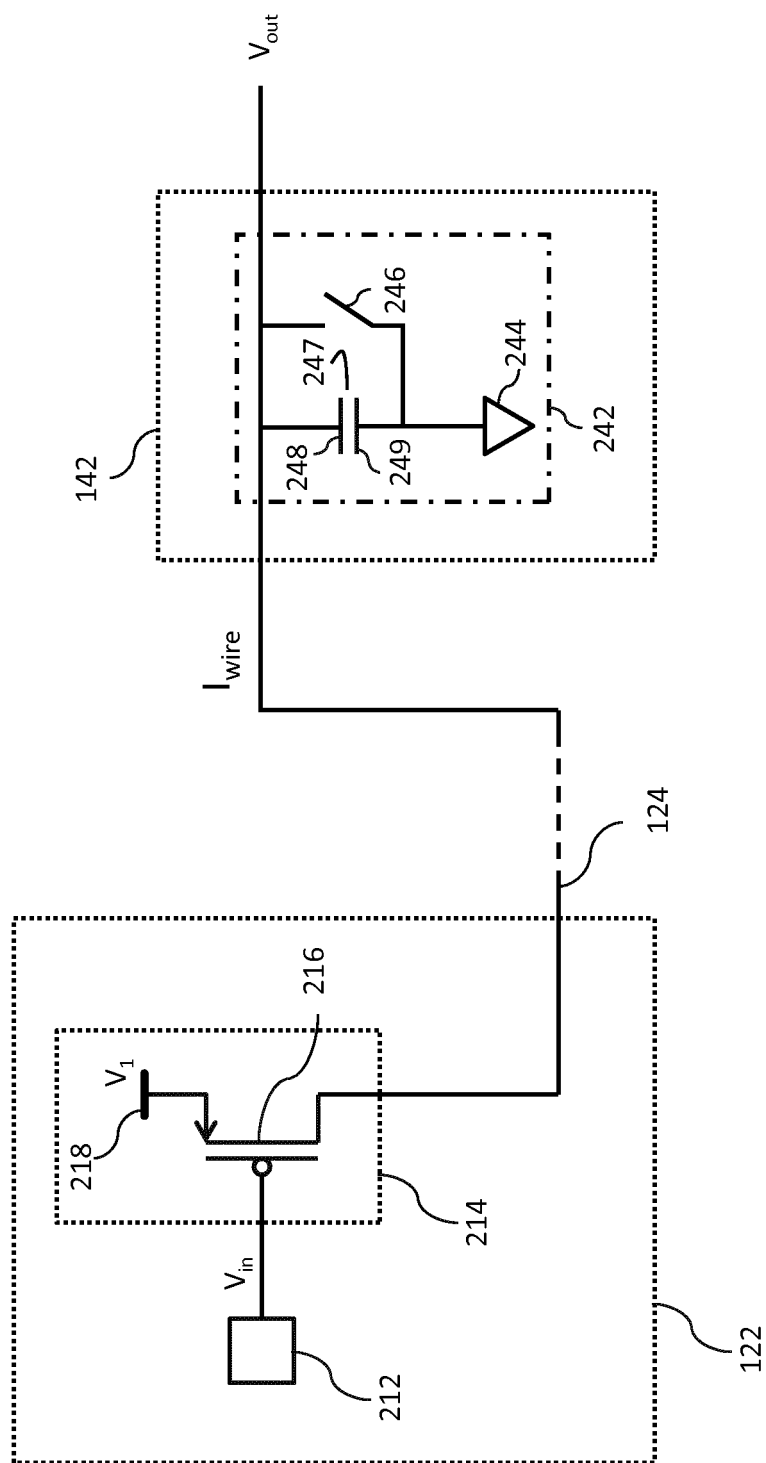


Fig.2

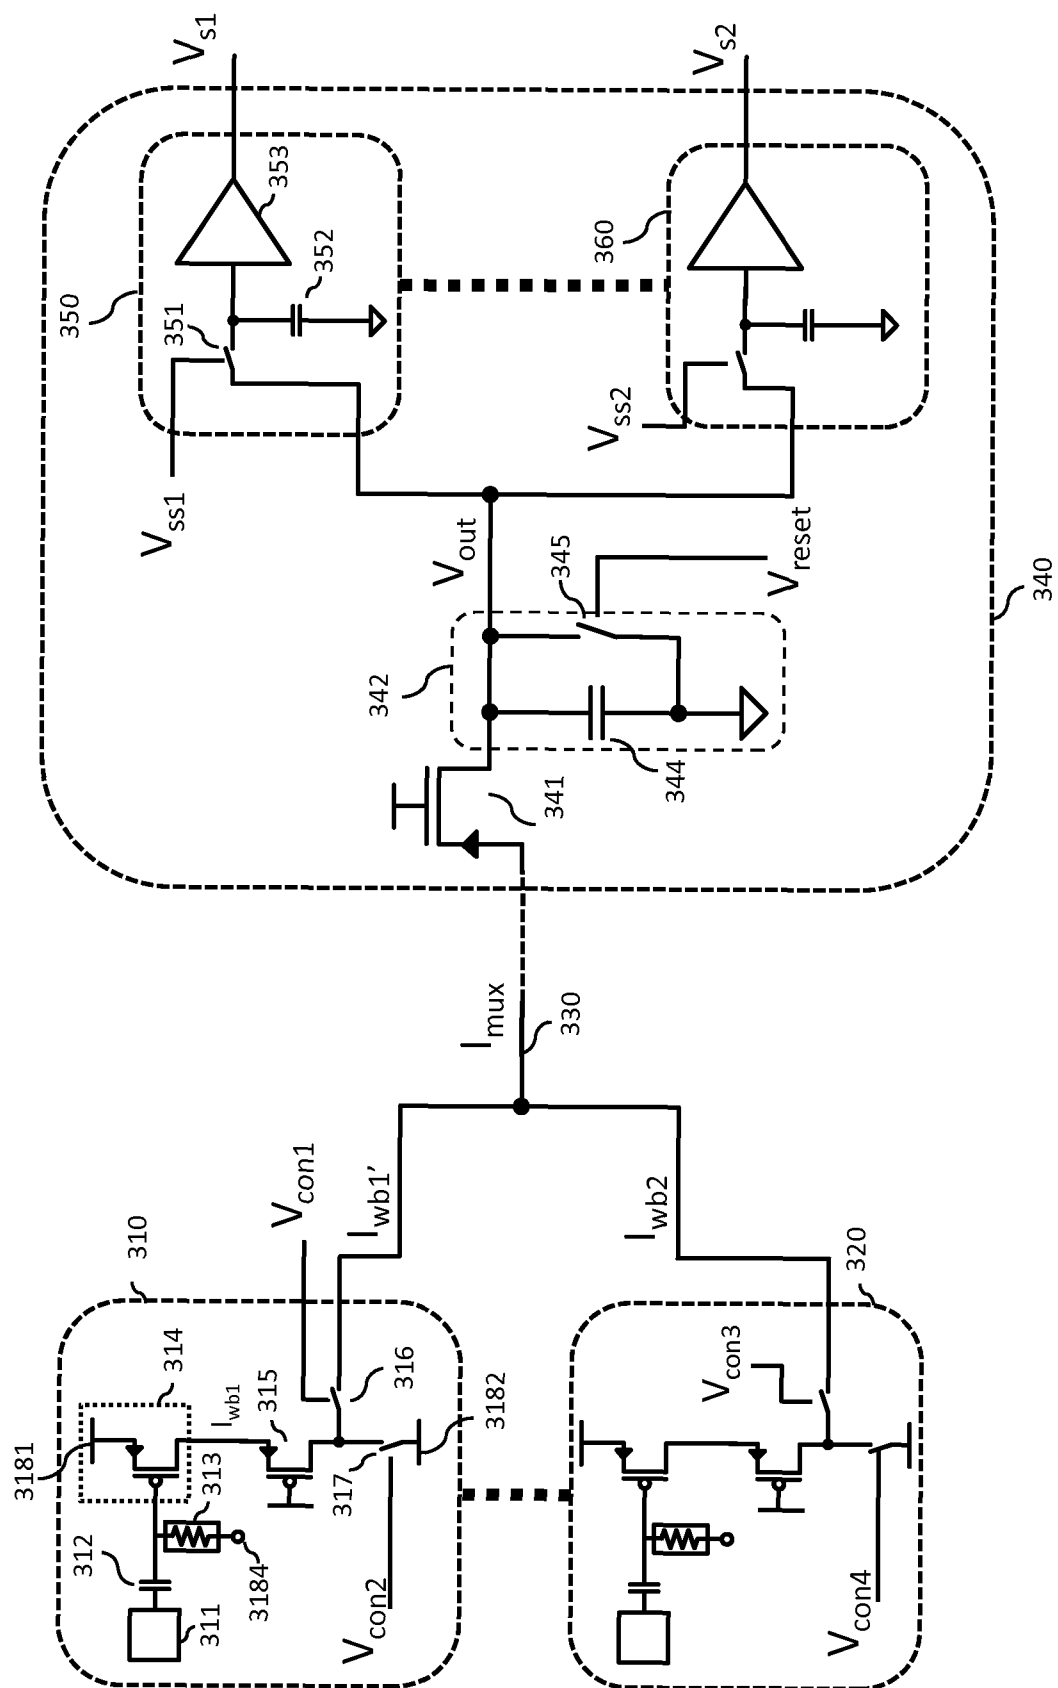


Fig. 3

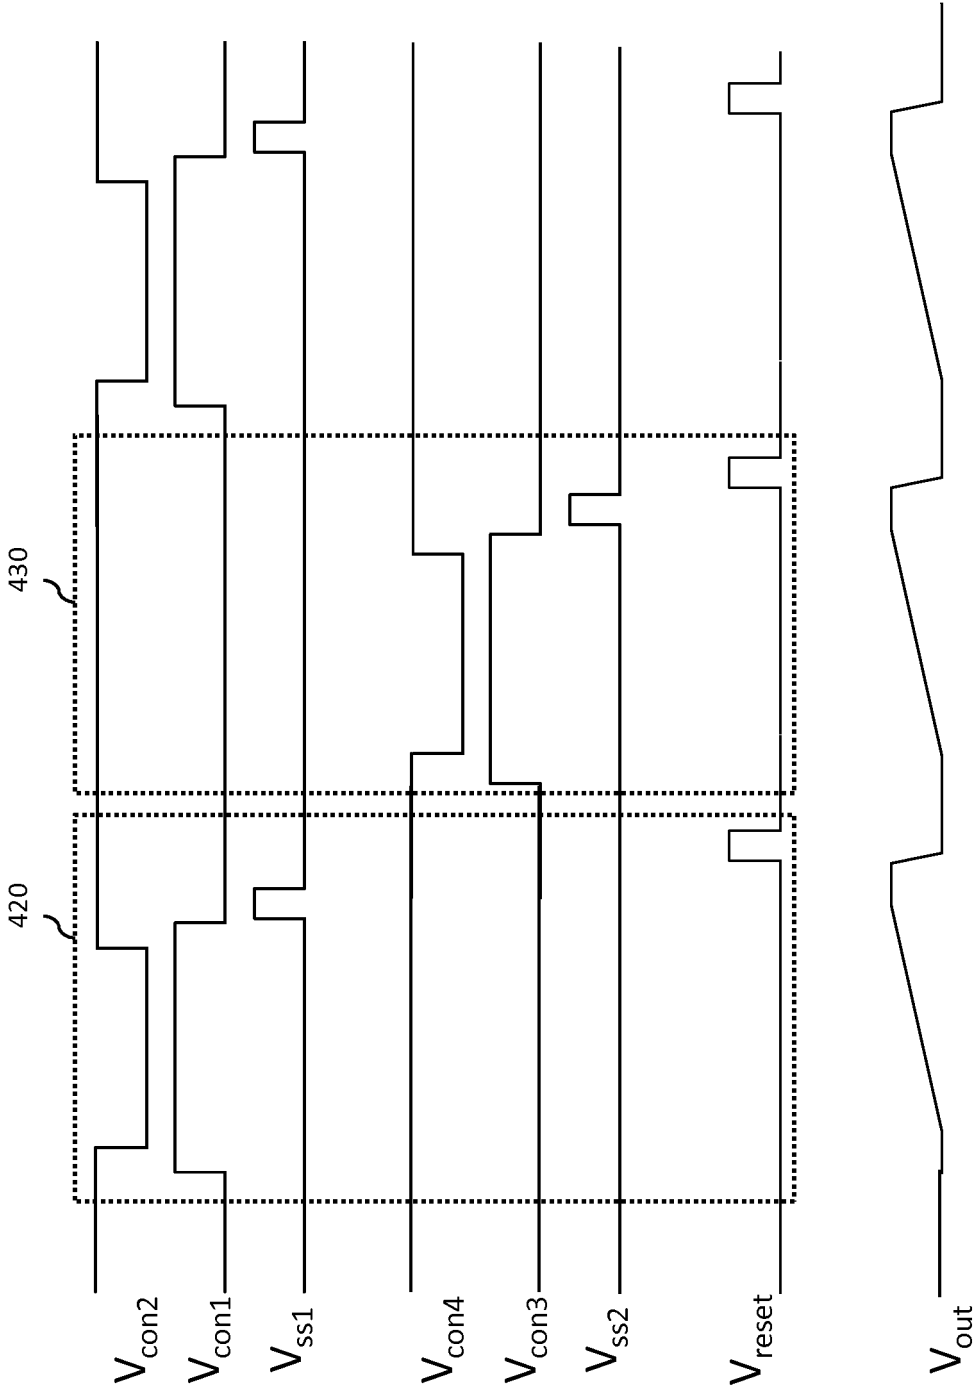


Fig. 4

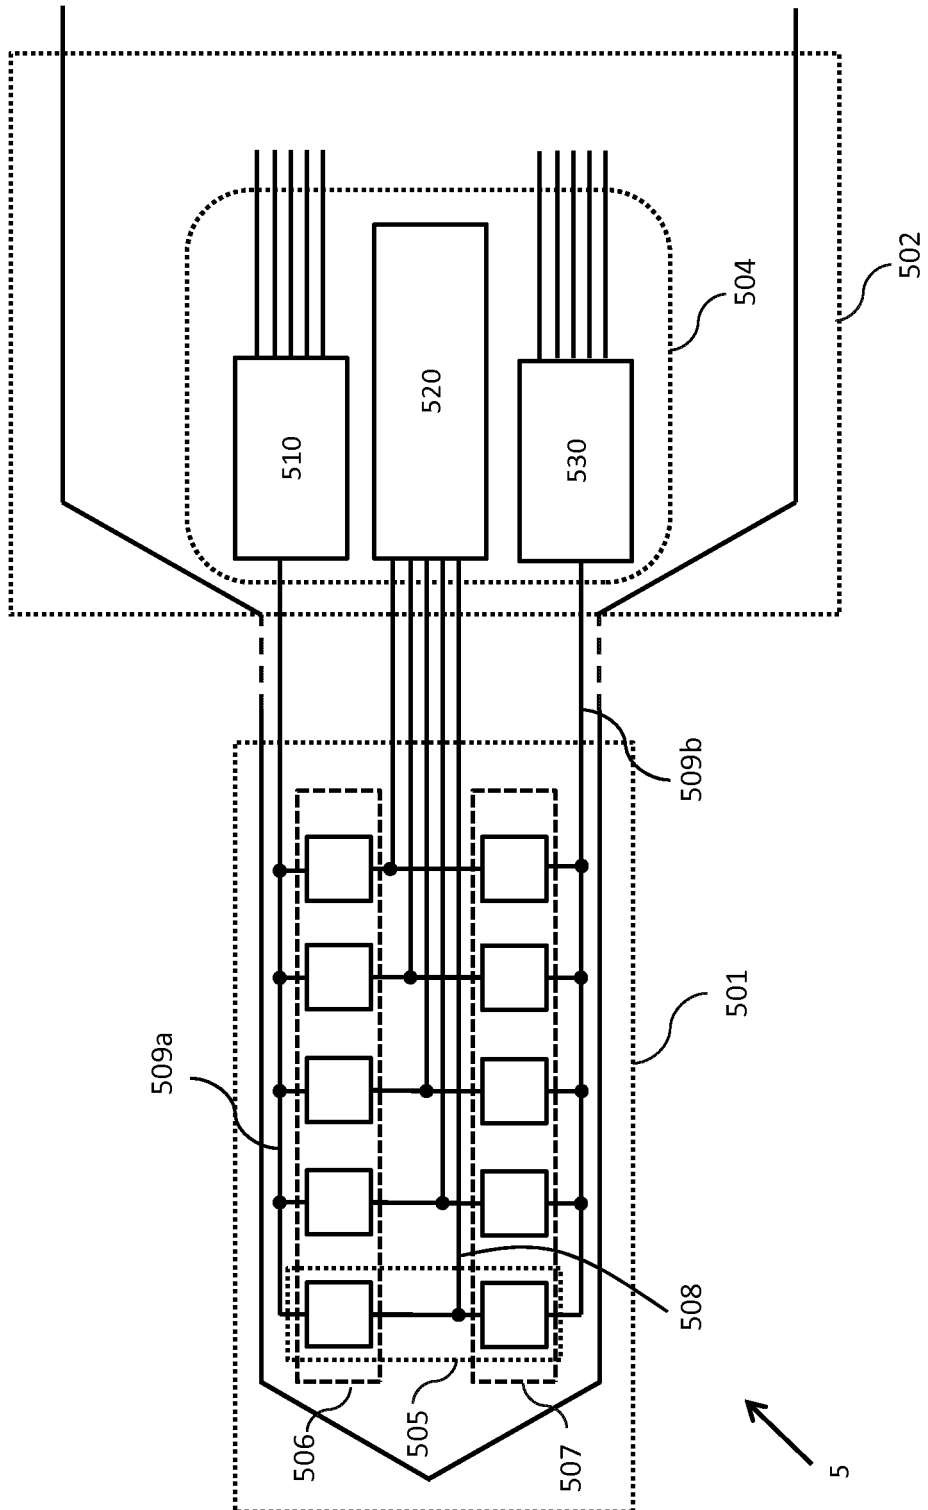


Fig. 5

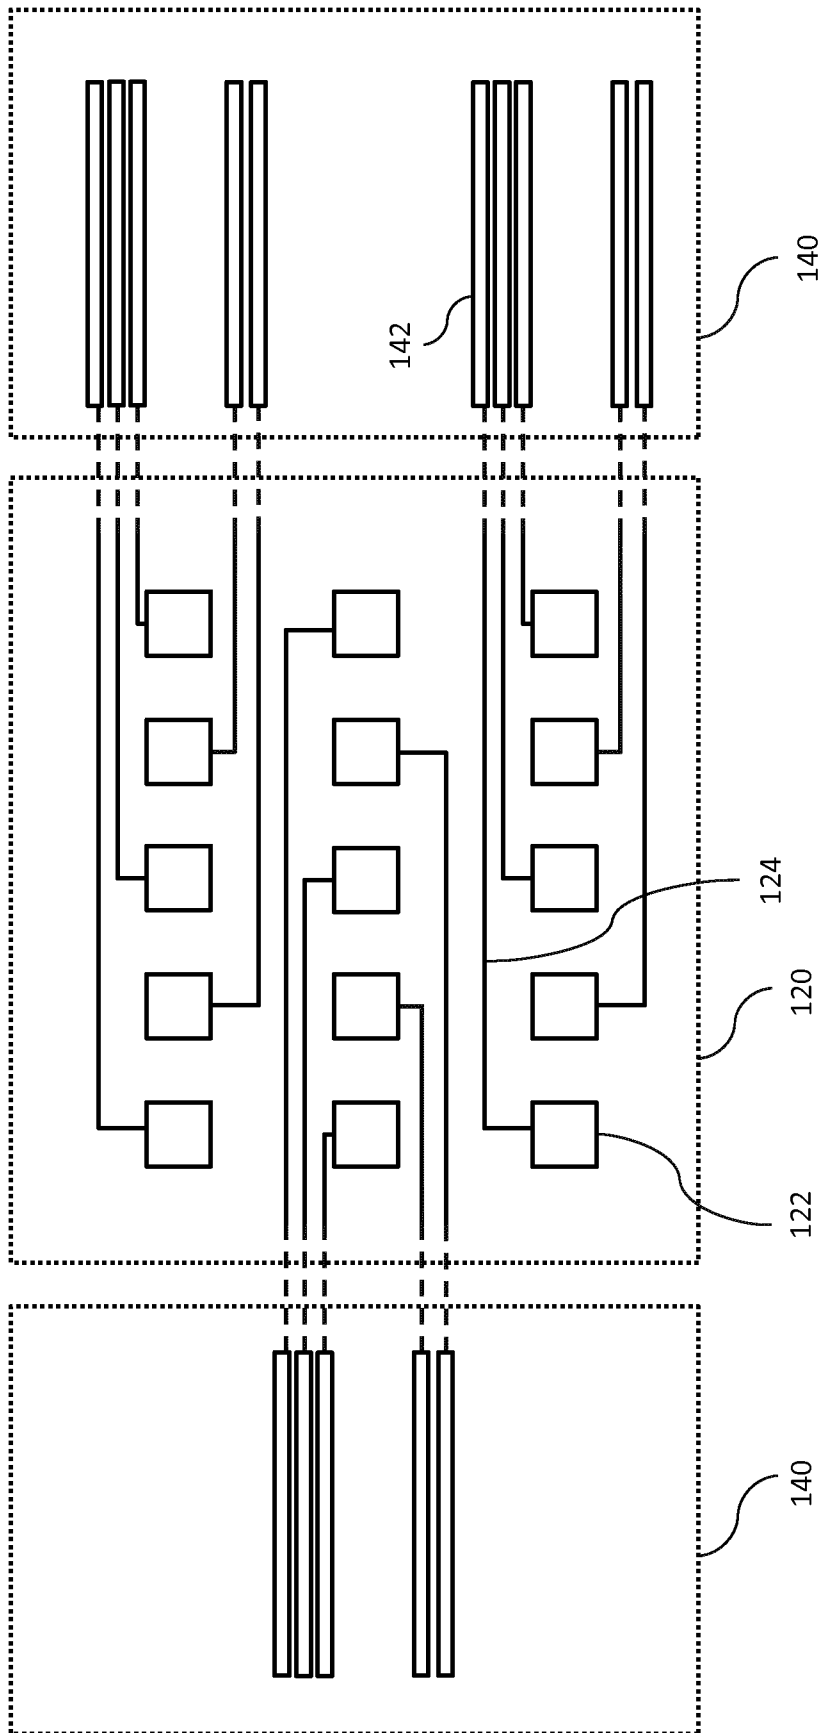


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **JONATHAN VIVENTI et al.** Flexible, foldable, actively multiplexed, high-density electrode array for mapping brain activity in vivo. *Nature Neuroscience*, 13 November 2011, vol. 14 [0006]
- **DION KHODAGHOLY et al.** In vivo recordings of brain activity using organic transistors. *Nature Communications*, 12 March 2013, vol. 4 [0006]

专利名称(译)	微电极阵列检测装置		
公开(公告)号	EP3111835B1	公开(公告)日	2020-06-03
申请号	EP2015174610	申请日	2015-06-30
[标]申请(专利权)人(译)	校际微电子中心 天主教鲁汶大学		
申请(专利权)人(译)	IMEC VZW 鲁汶大学		
当前申请(专利权)人(译)	IMEC VZW 鲁汶大学		
[标]发明人	RADUCANU BOGDAN MITRA SRINJOY YAZICIOGLU REFET FIRAT		
发明人	RADUCANU, BOGDAN MITRA, SRINJOY YAZICIOGLU, REFET FIRAT		
IPC分类号	A61B5/04 A61B5/00		
CPC分类号	A61B5/04001 A61B5/4076 A61B5/6868 A61B5/7225 A61B2562/043 A61N1/0529 A61N1/0551 A61B5/0478		
其他公开文献	EP3111835A1		
外部链接	Espacenet		

摘要(译)

一种感测装置，包括：具有输出电路的输出区域，该输出电路包括适于对接收到的电流进行积分以生成与接收到的电流相对应的输出电压的积分器；电极区域，包括：电极，其包括暴露的导电表面区域；和连接至该暴露表面区域的电极电路，其中，该电极电路包括电压-电流转换器，该电压-电流转换器适于产生对应于存在于其上的电压的线电流。暴露的表面积；连接线将电极电路与输出电路电连接，其中输出电路接收的电流为线电流。

