



US010565943B2

(12) **United States Patent**  
**Xing et al.**

(10) **Patent No.:** **US 10,565,943 B2**  
(45) **Date of Patent:** **Feb. 18, 2020**

(54) **DEVICE AND METHOD FOR REDUCING POWER CONSUMPTION OF LIQUID CRYSTAL DISPLAY, AND LIQUID CRYSTAL DISPLAY**

(71) Applicant: **WUHAN CHINA STAR OPTOELECTRONICS TECHNOLOGY CO., LTD**, Wuhan, Hubei (CN)

(72) Inventors: **Zhenzhou Xing**, Hubei (CN); **Qingcheng Zuo**, Hubei (CN)

(73) Assignee: **Wuhan China Star Optoelectronics Technology Co., Ltd.**, Wuhan, Hubei (CN)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 157 days.

(21) Appl. No.: **15/563,238**

(22) PCT Filed: **Jul. 17, 2017**

(86) PCT No.: **PCT/CN2017/093220**

§ 371 (c)(1),

(2) Date: **Sep. 29, 2017**

(87) PCT Pub. No.: **WO2019/000505**

PCT Pub. Date: **Jan. 3, 2019**

(65) **Prior Publication Data**

US 2018/0374433 A1 Dec. 27, 2018

(30) **Foreign Application Priority Data**

Jun. 27, 2017 (CN) ..... 2017 1 0511363

(51) **Int. Cl.**  
**G09G 3/36** (2006.01)

(52) **U.S. Cl.**  
CPC ... **G09G 3/3607** (2013.01); **G09G 2320/0626** (2013.01); **G09G 2320/0666** (2013.01); **G09G 2330/023** (2013.01)

(58) **Field of Classification Search**  
None  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2017/0263195 A1\* 9/2017 Itoi ..... G09G 3/3426  
2017/0329399 A1\* 11/2017 Azam ..... G06F 3/013

(Continued)

**FOREIGN PATENT DOCUMENTS**

CN 101385071 A 3/2009  
CN 101676982 A 3/2010

(Continued)

*Primary Examiner* — Benjamin C Lee



*Assistant Examiner* — Emily J Frank

(74) *Attorney, Agent, or Firm* — Mintz Levin Cohn Ferris Glovsky and Popeo, P.C.; Steven M. Jensen

(57) **ABSTRACT**

The present disclosure provides a device for reducing power consumption of a liquid crystal display, which includes: a screen area acquisition module for acquiring a first screen area being viewed and a second screen area not being viewed while a viewer watches a screen of the liquid crystal display; and a dynamic backlight control module for performing a dynamic backlight control adjustment on the second screen area. The present disclosure also discloses a method for reducing power consumption of the power consumption reduction device and a liquid crystal display having device. The present disclosure realizes intelligently partitioning dynamic backlight control to the screen of the liquid crystal display and also reduces the power consumption.

**5 Claims, 3 Drawing Sheets**

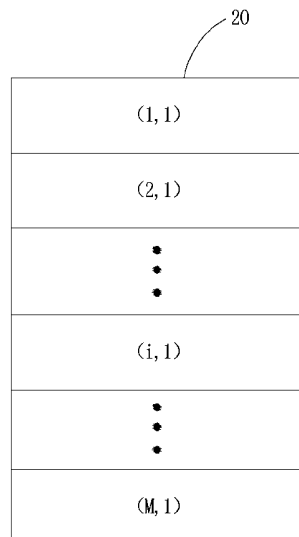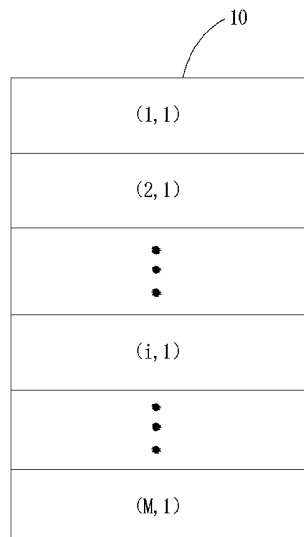

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2018/0096660 A1\* 4/2018 Liu ..... G09G 3/2003  
2018/0188803 A1\* 7/2018 Sharma ..... G06F 3/013

FOREIGN PATENT DOCUMENTS

CN 103035209 A 4/2013  
CN 104484043 A 4/2015  
CN 106531073 A 3/2017  
CN 106531123 A 3/2017  
JP 2013-037076 A 2/2013

\* cited by examiner

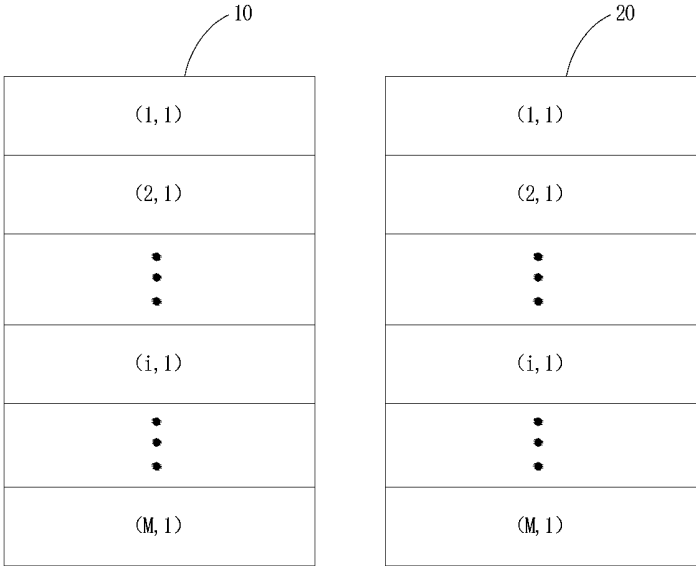


FIG. 1

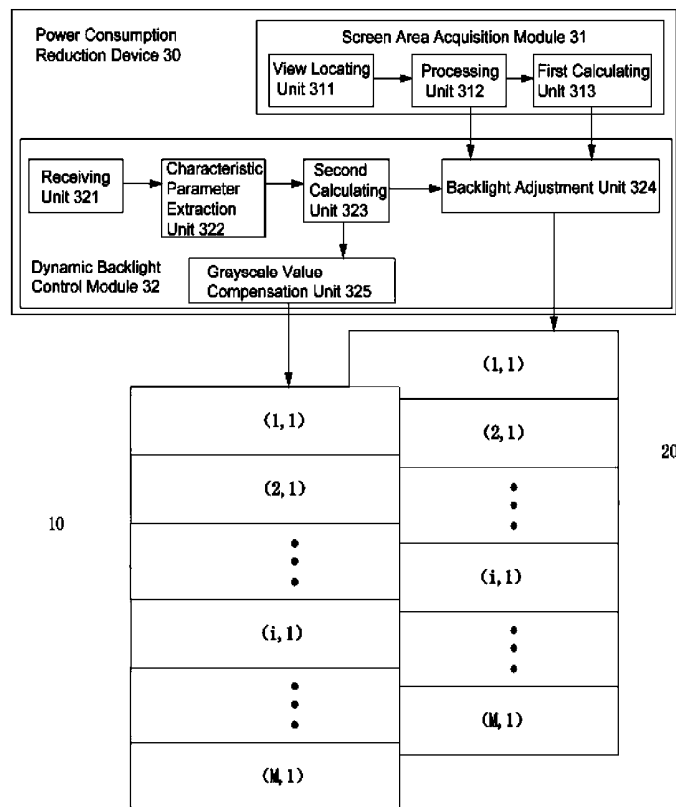


FIG. 2

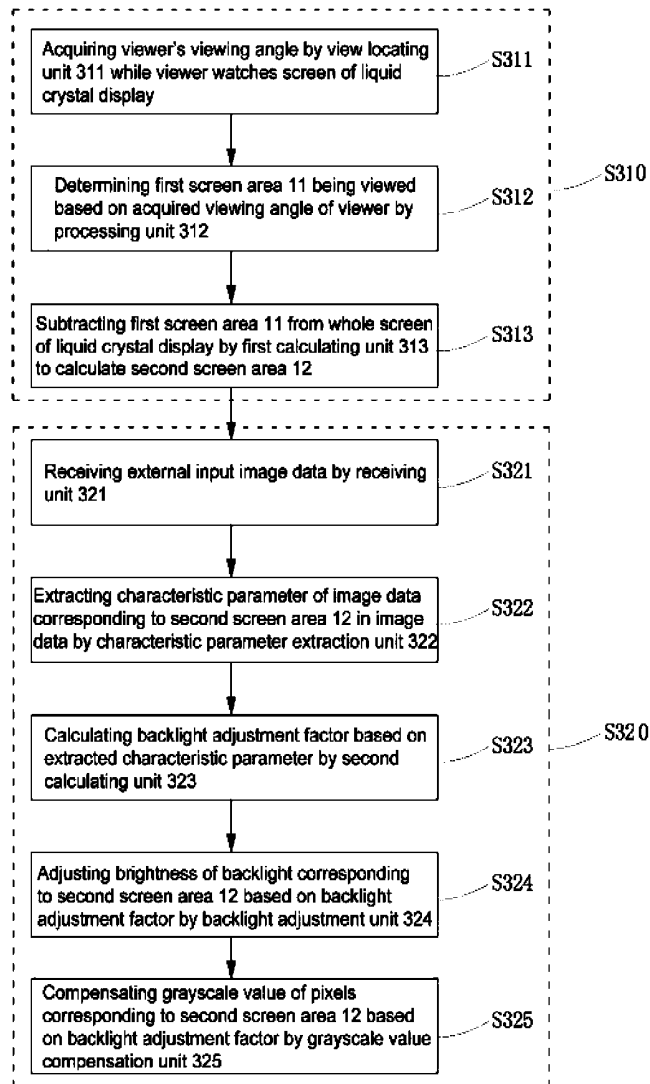


FIG. 3

**DEVICE AND METHOD FOR REDUCING  
POWER CONSUMPTION OF LIQUID  
CRYSTAL DISPLAY, AND LIQUID CRYSTAL  
DISPLAY**

CROSS REFERENCE TO RELATED  
APPLICATION

This application is a national stage entry, filed under 35 U.S.C. § 371, of International Application No. PCT/CN2017/093220, filed on Jul. 17, 2017, which claims benefit of and priority to Chinese Patent Application No. N 201710511363.5, filed on Jun. 27, 2017, the entire contents of which applications are incorporated herein by reference.

TECHNICAL FIELD

The present disclosure belongs to the technical field of a liquid crystal display, and in particular, relates to a device and a method for reducing power consumption reduction of a liquid crystal display, and a liquid crystal display.

BACKGROUND ART

With the development of photoelectric and semiconductor technologies, it also promotes the rapid development of a flat panel display (FPD). Among various flat panel displays, a liquid crystal display (LCD) has been applied to all aspects of life since it has many advantages, such as high space utilization efficiency, low power consumption, zero radiation, low electromagnetic interference and so on.

In an LCD, a backlight has a power consumption occupying 70% to 80% of the total power consumption of the LCD. As the intelligent terminal gets thinner and thinner, a capacity of built-in batteries thereof also gets smaller and smaller, and thus how to make the intelligent terminal to save more power becomes a consistent goal in the industry.

Content Adaptive Backlight Control (CABC) is a technique for adjusting backlight brightness to save backlight power consumption, and its principle is to detect an average brightness of a picture displayed on a liquid crystal display, to adaptively reduce the backlight brightness of the liquid crystal display based on the detected average brightness, and meanwhile to increase a grayscale value of the picture displayed on the liquid crystal display, thereby compensating the displayed picture the brightness of reduced due to the decreasing of the backlight brightness.

However, in the prior art, a content adaptive backlight control adjustment is performed on the backlight corresponding to the whole screen of the liquid crystal display, but it is impossible to perform the content adaptive backlight control adjustment on a specific area, for example, a screen area not viewed by the viewer.

SUMMARY

In order to solve the above problem existing in the prior arts, an object of the present disclosure is to provide a device and a method for reducing power consumption reduction of a liquid crystal display for implementing intelligently partitioning dynamic backlight control, and a liquid crystal display.

According to an aspect of the present disclosure, a device for reducing power consumption of a liquid crystal display is provided, which includes a screen area acquisition module for acquiring a first screen area being viewed and a second screen area not being viewed while a viewer watches a

screen of the liquid crystal display, and a dynamic backlight control module for performing a dynamic backlight control adjustment on the second screen area.

Furthermore, the screen area acquisition module includes a view locating unit for acquiring a viewing angle of eyes of the viewer while the viewer watches the screen of the liquid crystal display, a processing unit for determining the first screen area being viewed based on the acquired viewing angle of eyes of the viewer, and a first calculating unit for subtracting the first screen area by the screen of the liquid crystal display to calculate the second screen area.

Furthermore, the dynamic backlight control module includes a receiving unit for receiving externally input image data, a characteristic parameter extraction unit for extracting a characteristic parameter of the image data corresponding to the second screen area in the image data, a second calculating unit for calculating a backlight adjustment factor based on the extracted characteristic parameter, a backlight adjustment unit for adjusting brightness of the backlight corresponding to the second screen area based on the backlight adjustment factor, and a grayscale value compensation unit for compensating a grayscale value of pixels corresponding to the second screen area based on the backlight adjustment factor.

According to another aspect of the present disclosure, a liquid crystal display including the above device is provided.

According to yet another aspect of the present disclosure, a method for reducing power consumption of the liquid crystal display is provided, which includes acquiring a first screen area being viewed and a second screen area not being viewed while a viewer watches a screen of the liquid crystal display, and performing a dynamic backlight control adjustment on the second screen area.

Further, the acquiring of the first screen area being viewed and the second screen area not being viewed while the viewer watches the screen of the liquid crystal display specifically includes acquiring a viewing angle of eyes of the viewer while the viewer watches the screen of the liquid crystal display, determining the first screen area being viewed based on the acquired viewing angle of eyes of the viewer, and subtracting the first screen area by the screen of the liquid crystal display to obtain the second screen area.

Further, the performing of the dynamic backlight control adjustment on the second screen area specifically includes receiving externally input image data, extracting a characteristic parameter of the image data corresponding to the second screen area in the image data, calculating a backlight adjustment factor based on the extracted characteristic parameter, adjusting brightness of the backlight corresponding to the second screen area based on the backlight adjustment factor, and compensating a grayscale value of pixels corresponding to the second screen area based on the backlight adjustment factor.

The present disclosure has such an advantageous effect that the device and method for reducing power consumption of the liquid crystal display realizes intelligently partitioning dynamic backlight control to the screen of the liquid crystal display and also reduces the power consumption.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects, features and advantages of embodiments of the present disclosure will become more apparent from the following description of the embodiments, taken in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic view of region partition of a liquid crystal panel and a backlight module according to an embodiment of the present disclosure;

FIG. 2 is a schematic structural view of a liquid crystal display according to an embodiment of the present disclosure; and

FIG. 3 is a flow diagram of a method for reducing power consumption of a liquid crystal display according to an embodiment of the present disclosure.

#### DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Embodiments of the present disclosure will be described in detail below by referring to the accompanying drawings. However, the present disclosure can be implemented in many different forms, and should not be construed to be limited to detailed description set forth herein. Instead, these embodiments are provided for explaining the principle and actual application of the present disclosure, so that other skilled in the art can understand various embodiments and amendments which are suitable for specific intended applications of the present disclosure.

FIG. 1 is a schematic view of region partition of a liquid crystal panel and a backlight module according to an embodiment of the present disclosure. In FIG. 1, a left portion represents a region partition view of the liquid crystal panel, and a right portion represents a region partition view of the backlight module.

Referring to FIG. 1, a liquid crystal panel **10** is partitioned into  $M \times 1$  rectangular panel partitions  $(1, 1), \dots, (M, 1)$  in a column direction, and a backlight module **20** is partitioned into  $M \times 1$  rectangular backlight partitions  $(1, 1), \dots, (M, 1)$  in the column direction, wherein a rectangular panel partition  $(i, 1)$  corresponds to a rectangular backlight partition  $(i, 1)$ , and  $1 \leq i \leq M$ .

Here, only one region partition method of the liquid crystal panel **10** and the backlight module **20** is illustrated, but the present disclosure is not limited hereto. For example, the liquid crystal panel **10** and the backlight module **20** can be divided into  $1 \times N$  partitions in a row direction, wherein a rectangular panel partition  $(1, j)$  corresponds to a rectangular backlight partition  $(1, j)$ , and  $1 \leq j \leq N$ ; or the liquid crystal panel **10** and the backlight module **20** can be divided into  $M \times N$  partitions in column and row directions by array dividing, wherein a rectangular panel partition  $(i, j)$  corresponds to a rectangular backlight partition  $(i, j)$ , and  $1 \leq i \leq M$  and  $1 \leq j \leq N$ .

FIG. 2 is a schematic structural view of a liquid crystal display according to an embodiment of the present disclosure.

Referring to FIG. 2, the liquid crystal display according to an embodiment of the present disclosure includes a liquid crystal panel **10**, a backlight module **20** and a power consumption reduction device **30**.

In particular, when a viewer watches a screen of the liquid crystal display, he/she cannot watch the whole screen, but only can watch a partial screen area of the whole screen due to limitation of viewing angle of eyes. In this case, a backlight dynamic adjustment is performed on a screen area not being viewed by the eyes of the viewer rather than the screen area being viewed by the eyes of the viewer, which can dynamically adjust and control the backlight of the screen more intelligently and can reduce power consumption as well. The specific description is presented as follows.

The power consumption reduction device **30** includes a screen area acquisition module **31** and a dynamic backlight control module **32**.

The screen area acquisition module **31** is configured to acquire a first screen area **11** being viewed by the viewer and a second screen area **12** not being viewed by the viewer while the viewer watches a screen of the liquid crystal display. The dynamic backlight control module **32** is configured to perform a dynamic backlight control adjustment only on the second screen area **12**, but not to perform the dynamic backlight control adjustment on the first screen area **11**.

Referring to FIG. 2 again, the screen area acquisition module **31** includes a view locating unit **311**, a processing unit **312** and a first calculating unit **313**.

The view locating unit **311** is configured to acquire a viewing angle of eyes of the viewer (also referred to as "viewing angle of the viewer") while the viewer watches the screen of the liquid crystal display. In the present embodiment, the view locating unit **311** can include a camera and a biosensor, and can acquire the viewing angle of eyes while the viewer watches the liquid crystal display through the camera and the biosensor, but the present disclosure is not limited hereto.

The processing unit **312** is configured to determine the first screen area **11** being viewed based on the acquired viewing angle of eyes of the viewer. Here, the processing unit **312** can determine the area covered by the viewing angle on the screen based on the viewing angle of eyes of the viewer, and thus determine the first screen area **11**. In the present embodiment, assuming that the viewing angle of the eyes of the viewer covers a rectangular panel partition  $(1, 1)$ , a rectangular backlight partition  $(1, 1)$ , a rectangular panel partition  $(2, 1)$  and a rectangular backlight partition  $(2, 1)$ , thus in the present embodiment, the first screen area **11** includes the rectangular panel partition  $(1, 1)$ , the rectangular backlight partition  $(1, 1)$ , the rectangular panel partition  $(2, 1)$  and the rectangular backlight partition  $(2, 1)$ , but the present disclosure is not limited hereto.

The first calculating unit **313** is configured to subtract the first screen area **11** by the whole screen of the liquid crystal display to calculate the second screen area **12**. That is to say, the rectangular panel partitions and the rectangular backlight partitions that are not covered by the viewing angle of the eyes of the viewer are the second screen area **12**, and thus in the present embodiment, the second screen area **12** includes a rectangular panel partition  $(3, 1), \dots$ , a rectangular panel partition  $(M, 1)$ , and a rectangular backlight partition  $(3, 1), \dots$ , and a rectangular backlight partition  $(M, 1)$ , but the present disclosure is not limited hereto.

The dynamic backlight control module **32** includes a receiving unit **321**, a characteristic parameter extraction unit **322**, a second calculating unit **323**, a backlight adjustment unit **324** and a grayscale value compensation unit **325**.

The receiving unit **321** is configured to receive externally input image data. Here, the externally input image data is provided for all the pixels in the whole liquid crystal panel **10**. The image data may be RGB values input, for example.

The characteristic parameter extraction unit **322** is configured to extract a characteristic parameter of the image data corresponding to the second screen area **12** in the image data. As another embodiment of the present disclosure, the characteristic parameter extraction unit **322** can also be configured to extract a characteristic parameter of the image data (that is, the input entire image data).

The second calculating unit **323** is configured to calculate a backlight adjustment factor based on the extracted characteristic parameter.

The backlight adjustment unit **324** is configured to adjust brightness of the backlight corresponding to the second screen area **12** based on the backlight adjustment factor. Here, the backlight adjustment unit **324** can also be configured to receive a feedback signal provided by the processing unit **312**, wherein the feedback signal includes a signal to not perform backlight brightness adjustment on the first screen area **11**. Particularly, the backlight adjustment unit **324** adjusts a duty ratio of a PWM signal provided to a light source (e.g., an LED) of the rectangular backlight partition **(3, 1)**, . . . , rectangular backlight partition **(M, 1)** of the second screen area **12** based on the backlight adjustment factor, so as to adjust and reduce the brightness of the light source, thereby realizing the brightness adjustment of the backlight corresponding to the second screen area **12**.

The grayscale value compensation unit **325** is configured to compensate a grayscale value of pixels corresponding to the second screen area **12** based on the backlight adjustment factor. In specific, the grayscale value compensation unit **325** compensates a grayscale value of pixels corresponding to the rectangular panel partition **(3, 1)**, . . . , rectangular panel partition **(M, 1)** of the second screen area **12** based on the backlight adjustment factor.

For example, the backlight adjustment unit **324** adjusts the light source of the rectangular backlight partition **(3, 1)**, . . . , rectangular backlight partition **(M, 1)** of the second screen area **12** based on the backlight adjustment factor to reduce the brightness of the light source by 30%. Accordingly, the grayscale value compensation unit **325** compensates the grayscale value of the pixels of the rectangular panel partition **(3, 1)**, . . . , rectangular panel partition **(M, 1)** of the second screen area **12** to increase the grayscale value by 30%. Thus, the brightness of the light source is reduced without changing the brightness of the display image in the second screen area, thereby reducing power consumption.

FIG. 3 is a flow diagram of a method for reducing power consumption of a liquid crystal display according to an embodiment of the present disclosure.

Referring to FIGS. 2 and 3, the method for reducing power consumption of the liquid crystal display according to an embodiment of the present disclosure includes Steps **S310** and **S320**.

In specific, in Step **S310**, the screen area acquisition module **31** acquires a first screen area **11** being viewed by the viewer and a second screen area **12** not being viewed by the viewer.

The specific method of realizing Step **S310** includes the followings.

In Step **S311**, the view locating unit **311** acquires a viewing angle of eyes of the viewer while the viewer watches the screen of the liquid crystal display. In addition, in Step **S311**, the view locating unit **311** can include a camera and a biosensor, and can acquire the viewing angle of eyes while the viewer watches the liquid crystal display through the camera and the biosensor.

In Step **S312**, the processing unit **312** determines the first screen area **11** being viewed based on the acquired viewing angle of eyes of the viewer. In addition, in Step **S312**, the processing unit **312** can determine the area covered by the viewing angle on the screen based on the viewing angle of eyes of the viewer, and thus determine the first screen area **11**. Assuming that the viewing angle of the eyes of the viewer covers a rectangular panel partition **(1, 1)**, a rectan-

gular backlight partition **(1,1)**, a rectangular panel partition **(2, 1)** and a rectangular backlight partition **(2, 1)**, and thus in Step **S312**, the first screen area **11** includes the rectangular panel partition **(1, 1)**, the rectangular backlight partition **(1,1)**, the rectangular panel partition **(2, 1)** and the rectangular backlight partition **(2, 1)**.

In Step **S313**, the first calculating unit **313** subtracts the first screen area **11** from the whole screen of the liquid crystal display to calculate the second screen area **12**. That is to say, in Step **S313**, the rectangular panel partitions and the rectangular backlight partitions that are not covered by the viewing angle of eyes of the viewer are the second screen area **12**, that is, the second screen area **12** includes a rectangular panel partition **(3, 1)**, . . . , a rectangular panel partition **(M, 1)**, and a rectangular backlight partition **(3, 1)**, . . . , and a rectangular backlight partition **(M, 1)**.

In Step **S320**, a dynamic backlight control module **32** only performs a dynamic backlight control adjustment on the second screen area **12**.

The specific method of realizing Step **S320** includes the followings.

In Step **S321**, the receiving unit **321** receives externally input image data. In addition, in Step **S321**, the externally input image data is provided for all the pixels in the whole liquid crystal panel **10**, wherein the image data may be input RGB values, for example.

In Step **S322**, the characteristic parameter extraction unit **322** extracts a characteristic parameter of the image data corresponding to the second screen area **12** in the image data. As another alternative step of step **S322**, the characteristic parameter extraction unit **322** can also extract a characteristic parameter of the image data (that is, the input entire image data).

In Step **S323**, the second calculating unit **323** calculates a backlight adjustment factor based on the extracted characteristic parameter.

In Step **S324**, the backlight adjustment unit **324** adjusts the brightness of the backlight corresponding to the second screen area **12** based on the backlight adjustment factor. In addition, in Step **S324**, the backlight adjustment unit **324** can also receive a feedback signal provided by the processing unit **312** and the first calculating unit **313**, wherein the feedback signal includes a signal to perform backlight brightness adjustment on the second screen area **12** and a signal to not perform backlight brightness adjustment on the first screen area **11**. Further, the backlight adjustment unit **324** adjusts a duty ratio of a PWM signal provided to a light source (e.g., LED) of the rectangular backlight partition **(3, 1)**, . . . , rectangular backlight partition **(M, 1)** of the second screen area **12** based on the backlight adjustment factor, so as to adjust and reduce the brightness of the light source, thereby realizing the brightness adjustment of the backlight corresponding to the second screen area **12**.

In Step **S325**, the grayscale value compensation unit **325** compensates a grayscale value of pixels corresponding to the second screen area **12** based on the backlight adjustment factor. In addition, in Step **S325**, the grayscale value compensation unit **325** compensates a grayscale value of pixels corresponding to the rectangular panel partition **(3, 1)**, . . . , rectangular panel partition **(M, 1)** of the second screen area **12** based on the backlight adjustment factor.

In the power consumption reduction method of the liquid crystal display according to the embodiment of the present disclosure, the backlight adjustment unit **324** adjusts the light source of the rectangular backlight partition **(3, 1)**, . . . , rectangular backlight partition **(M, 1)** of the second screen area **12** based on the backlight adjustment

factor to reduce the brightness of the light source by 30%. Accordingly, the grayscale value compensation unit 325 compensates the grayscale value of pixels of the rectangular panel partition (3, 1), . . . , rectangular panel partition (M, 1) of the second screen area 12 to increase the grayscale value by 30%. Thus, the brightness of the light source is reduced without changing the brightness of the display image in the second screen area, thereby reducing power consumption.

In conclusion, the device and method for reducing power consumption of the liquid crystal display according to the embodiment of the present disclosure realize intelligently partitioning dynamic backlight control to the screen of the liquid crystal display and also reduce the power consumption.

Although the present invention is described with reference to the special exemplary embodiments, while those skilled in the art will understand that various changes in form and details may be made therein without departing from the spirit and scope of the disclosure as defined by the appended claims and its equivalents.

What is claimed is:

1. A device for reducing power consumption of a liquid crystal display, comprising a memory configured to store program instructions and a processor configured to execute the program instructions, the program instructions when executed configured to:

- acquire a first screen area being viewed and a second screen area not being viewed while a viewer watches a screen of the liquid crystal display;
- perform a dynamic backlight control adjustment on the second screen area;
- receive externally input image data;
- extract a characteristic parameter of the image data corresponding to the second screen area in the image data;
- calculate a backlight adjustment factor based on the extracted characteristic parameter;
- adjust brightness of the backlight corresponding to the second screen area based on the backlight adjustment factor; and
- compensate a grayscale value of pixels corresponding to the second screen area based on the backlight adjustment factor.

2. The device of claim 1, wherein, to acquire the first screen area, the program instructions are further configured to:

- acquire a viewing angle of eyes of the viewer while the viewer watches the screen of the liquid crystal display;
- determine the first screen area being viewed based on the acquired viewing angle of eyes of the viewer; and
- subtract the first screen area from the screen of the liquid crystal display to calculate the second screen area.

3. A liquid crystal display, comprising the device of claim 1.

4. A method for reducing power consumption of a liquid crystal display, comprising:

- acquiring a first screen area being viewed and a second screen area not being viewed while a viewer watches a screen of the liquid crystal display;
- performing a dynamic backlight control adjustment on the second screen area;
- receiving externally input image data;
- extracting a characteristic parameter of the image data corresponding to the second screen area in the image data;
- calculating a backlight adjustment factor based on the extracted characteristic parameter;
- adjusting brightness of the backlight corresponding to the second screen area based on the backlight adjustment factor; and
- compensating a grayscale value of pixels corresponding to the second screen area based on the backlight adjustment factor.

5. The method of claim 4, wherein the acquiring of the first screen area being viewed and the second screen area not being viewed while the viewer watches the screen of the liquid crystal display comprises:

- acquiring a viewing angle of eyes of the viewer while the viewer watches the screen of the liquid crystal display;
- determining the first screen area being viewed based on the acquired viewing angle of eyes of the viewer; and
- subtracting the first screen area from the screen of the liquid crystal display to obtain the second screen area.

\* \* \* \* \*

专利名称(译)	降低液晶显示器功耗的装置和方法，以及液晶显示器		
公开(公告)号	<a href="#">US10565943</a>	公开(公告)日	2020-02-18
申请号	US15/563238	申请日	2017-07-17
[标]申请(专利权)人(译)	武汉华星光电技术有限公司		
申请(专利权)人(译)	中国武汉恒星光电科技有限公司.		
当前申请(专利权)人(译)	中国武汉恒星光电科技有限公司.		
[标]发明人	XING ZHENZHOU ZUO QINGCHENG		
发明人	XING, ZHENZHOU ZUO, QINGCHENG		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3607 G09G2320/0666 G09G2320/0626 G09G2330/023 G09G3/342 G09G2320/0261 G09G2320/028 G09G2320/0686 G09G2330/021 G09G2354/00 G09G2360/16		
代理人(译)	JENSEN, 史蒂芬M.		
审查员(译)	LEE, BENJAMINÇ		
优先权	201710511363.5 2017-06-27 CN		
其他公开文献	US20180374433A1		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

本发明提供一种降低液晶显示器功耗的装置，包括：屏幕面积获取模块，用于获取观看者观看液晶屏幕时正在观看的第一屏幕区域和未观看的第二屏幕区域 显示；动态背光控制模块，用于在第二屏幕区域上进行动态背光控制调整。本公开还公开了一种用于减少功耗减小装置的功耗的方法以及具有该装置的液晶显示器。本公开实现了将动态背光控制智能地划分到液晶显示器的屏幕，并且还降低了功耗。

