



US009117417B2

(12) **United States Patent**
Dunn et al.

(10) **Patent No.:** **US 9,117,417 B2**
(45) **Date of Patent:** ***Aug. 25, 2015**

(54) **REDUNDANT POWER/CONTROL SYSTEM
FOR LIQUID CRYSTAL DISPLAYS**

2320/041 (2013.01); G09G 2320/08 (2013.01);
G09G 2330/08 (2013.01); G09G 2360/14
(2013.01)

(71) Applicant: **American Panel Corporation**,
Alpharetta, GA (US)

(58) **Field of Classification Search**

CPC . G09G 3/3406; G09G 3/3413; G09G 3/3611;
G09G 3/3648; G09G 2330/02; G09G
2330/021; G09G 2330/028
USPC 345/87, 102, 211, 212
See application file for complete search history.

(72) Inventors: **William Dunn**, Alpharetta, GA (US);
Ken Mahdi, Alpharetta, GA (US)

(73) Assignee: **American Panel Corporation**,
Alpharetta, GA (US)

(56) **References Cited**

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

U.S. PATENT DOCUMENTS

7,502,950	B1 *	3/2009	Brands	345/211
8,704,751	B2 *	4/2014	Dunn et al.	345/102
2008/0024480	A1 *	1/2008	Jee et al.	345/212
2008/0045275	A1 *	2/2008	Le	455/572
2008/0068293	A1 *	3/2008	Ishii	345/3.1
2009/0153464	A1 *	6/2009	Furukawa et al.	345/102

* cited by examiner

(21) Appl. No.: **14/258,347**

(22) Filed: **Apr. 22, 2014**

(65) **Prior Publication Data**

US 2014/0313237 A1 Oct. 23, 2014

Primary Examiner — Regina Liang

(74) Attorney, Agent, or Firm — Standley Law Group LLP

Related U.S. Application Data

(63) Continuation of application No. 13/080,354, filed on
Apr. 5, 2011, now Pat. No. 8,704,751.

(60) Provisional application No. 61/321,084, filed on Apr.
5, 2010.

(51) **Int. Cl.**
G09G 3/36 (2006.01)


G09G 3/34 (2006.01)

(52) **U.S. Cl.**
CPC **G09G 3/3648** (2013.01); **G09G 3/3406**
(2013.01); **G09G 3/3611** (2013.01); **G09G**

(57) **ABSTRACT**

A system for powering and controlling an LED-backlit liquid crystal display (LCD) where redundancy is used to provide two independent paths from a pair of power supplies to the LED backlight. Further, two independent paths are also used from a pair of power supplies to the LCD. If any one of the paths were to fail or begin to degrade in performance, the system contains monitoring circuits which can direct another path to be used by the system. Two separate control circuits for the LCD may be used so that either one may be used to control the LCD if one were to fail. Two separate temperature sensors and luminance sensors may also be used to increase the durability of the system.

20 Claims, 3 Drawing Sheets

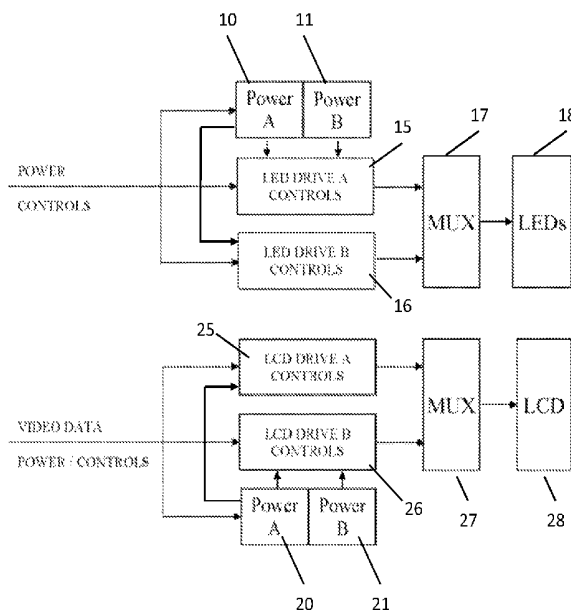

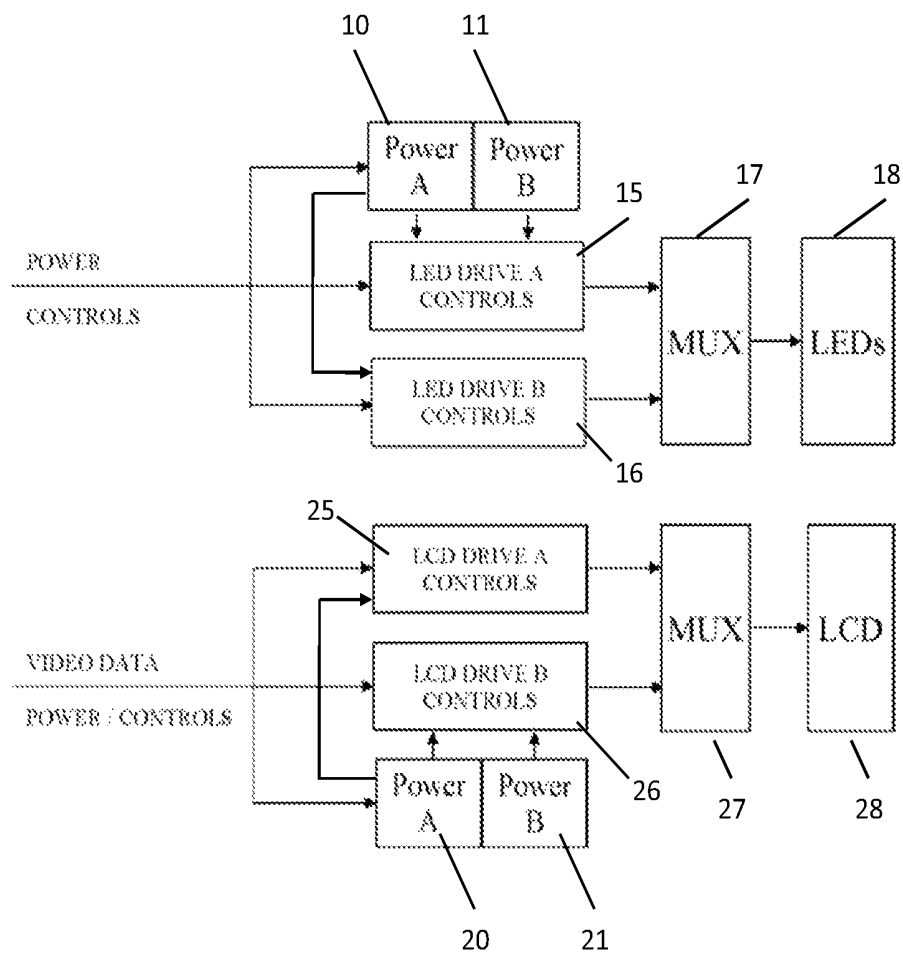


FIGURE 1

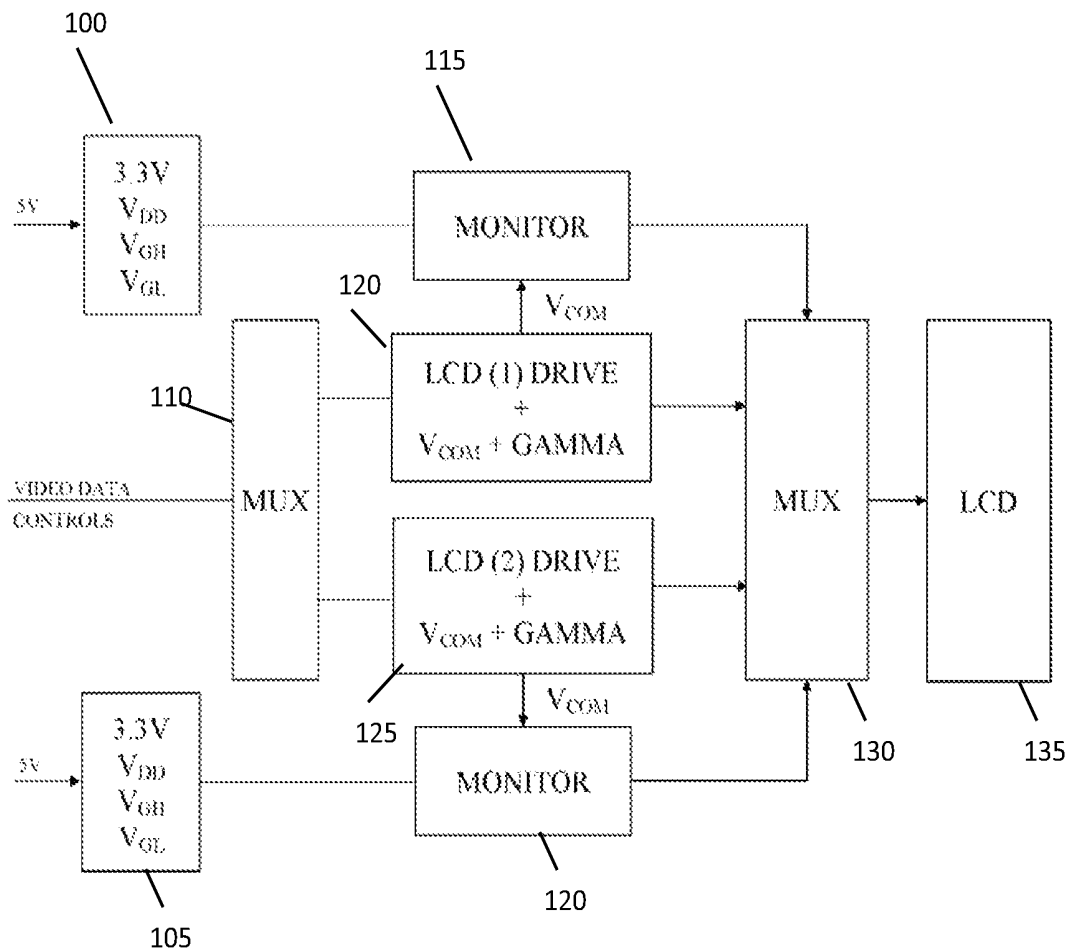


FIGURE 2

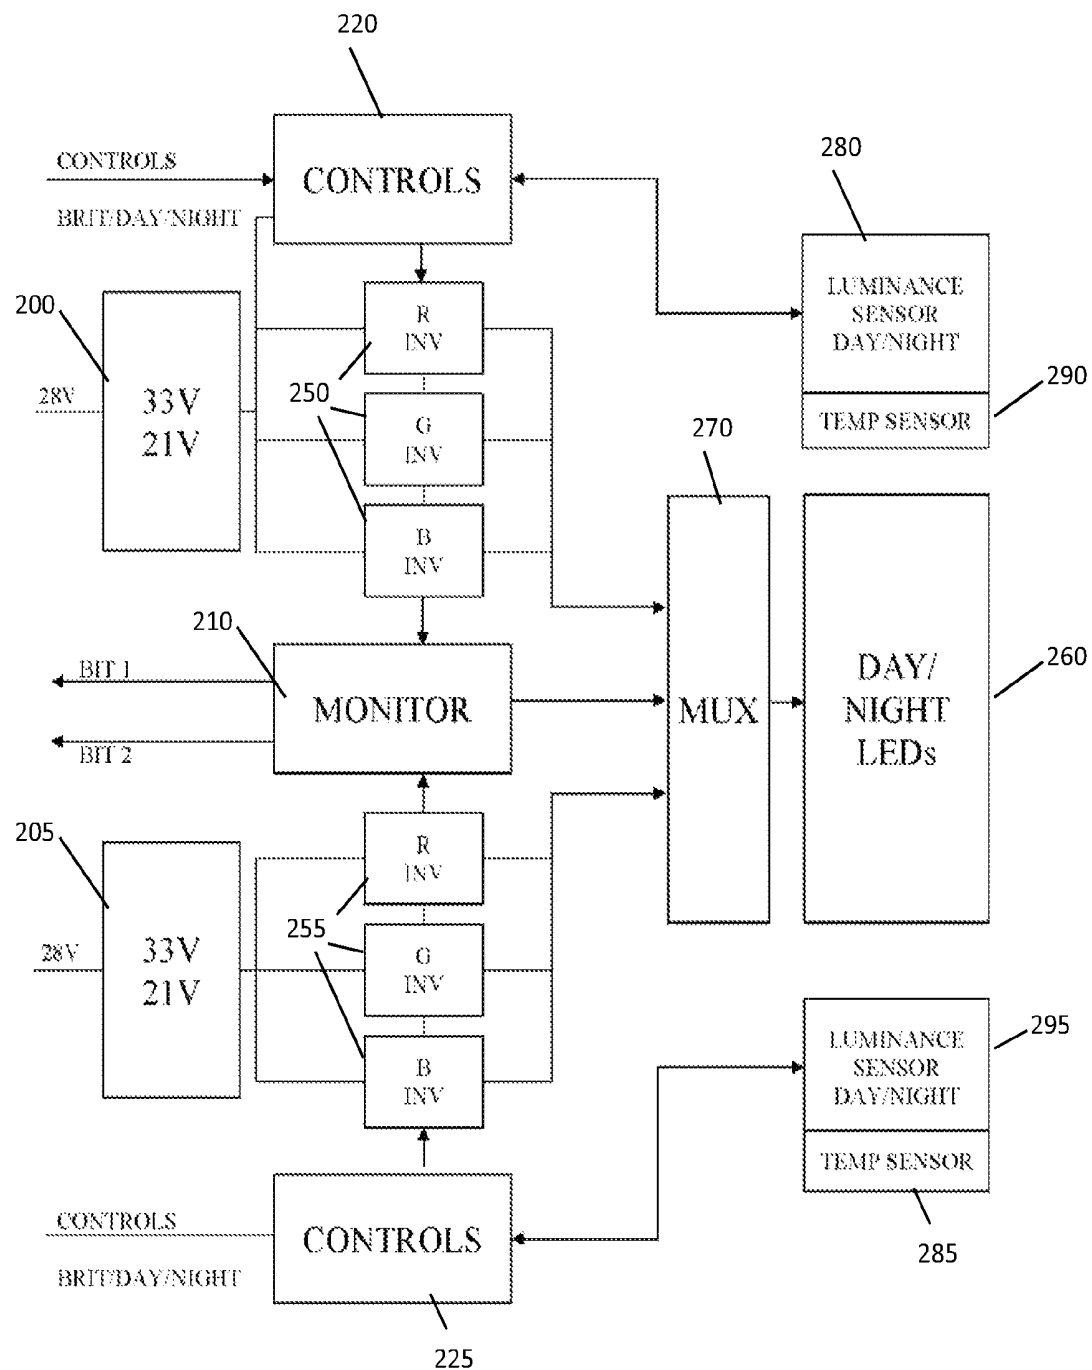


FIGURE 3

REDUNDANT POWER/CONTROL SYSTEM FOR LIQUID CRYSTAL DISPLAYS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. application Ser. No. 13/080,354 filed on Apr. 5, 2011, now U.S. Pat. No. 8,704,751 issued Apr. 22, 2014, which is a non-provisional application of U.S. Application No. 61/321,084 filed on Apr. 5, 2010. All aforementioned applications are hereby incorporated by reference in their entirety as if fully cited herein.

TECHNICAL FIELD

Disclosed embodiments relate generally to a redundant control system architecture for a liquid crystal display device.

BACKGROUND OF THE ART

Liquid Crystal Displays (LCDs) contain several layers which work in combination to create a viewable image. A backlight is used to generate the rays of light that pass through what is commonly referred to as the LCD stack, which typically contains several layers that perform either basic or enhanced functions. The most fundamental layer within the LCD stack is the liquid crystal material, which may be actively configured in response to an applied voltage/charge in order to pass or block a certain amount of light which is originating from the backlight. The layer of liquid crystal material is divided into many small regions which are typically referred to as pixels. For full-color displays these pixels are further divided into independently-controllable regions of red, green and blue subpixels, where the red subpixel has a red color filter, blue subpixel has a blue color filter, and green subpixel has a green color filter.

The light which is passing through each subpixel typically originates as "white" (or broadband) light from the backlight, although in general this light is far from being uniform across the visible spectrum. The subpixel color filters allow each subpixel to transmit a certain amount of each color (red, green or blue). When viewed from a distance, the three subpixels appear as one composite pixel and by electrically controlling the amount of light which passes through each subpixel, the composite pixel can produce a very wide range of different colors due to the effective mixing of light from the red, green, and blue subpixels.

Currently, the common and preferable illumination source for LCD backlight assemblies is light emitting diodes (LEDs). Environmental concerns, small space requirements, lower energy consumption, and long lifetime are some of the reasons that the LCD industry is beginning the widespread usage of LEDs for backlights.

LCDs are becoming popular for not only home entertainment purposes, but are now being used as informational/advertising displays in both indoor and outdoor locations. When used for information/advertising purposes, the displays may remain 'on' for extended periods of time and thus would see much more use than a traditional home theatre use. Further, when displays are used in areas where the ambient light level is fairly high (especially outdoors or in aircraft cockpits) the displays must be very bright in order to maintain adequate picture brightness. When used for extended periods of time and/or outdoors, durability of the components can become an issue.

Modern LCD devices have become more sophisticated and now use a plurality of sensors and logic to maintain optimal

performance. As is readily apparent, an LCD will not function satisfactorily without an appropriate and properly-functioning control system. The backlight is also essential for proper functioning as the image or data displayed on the liquid crystal layer may only be viewed while the backlight is providing proper illumination to the liquid crystal stack. If the backlight system should fail completely or operate at a less than optimal level, then the LCD will not perform satisfactorily. While this may be a simple inconvenience when LCDs are used for entertainment purposes, when used for information or data displays this can be very costly. For example, LCDs are now being used in aircraft cockpits as well as the instrument panels or display(s) in ground vehicles and marine equipment. In these applications, when there is a failure within the control system, the LCD may no longer display the important information for the vehicle/aircraft and controls may cease to operate. These situations can be undesirable not only to the passengers of the vehicle/aircraft, but also other soldiers/team members who are counting on this part of the mission.

Some control systems have a limited life span, and eventually their performance may suffer. Some systems may quickly fail simply due to a manufacturing defect or may fail due to shock/forces applied to the aircraft or ground vehicle. Currently when this occurs, the entire LCD device must be manually replaced. This is expensive, and is often time consuming. Alternatively, the LCD device could be removed from the display housing, and the degraded or faulty system elements could be manually replaced. This is typically even more costly, and involves extensive manual labor. In currently known units, this also requires virtual complete disassembly of the LCD to gain access to the electronics. This complete disassembly is not only labor intensive, but must be performed in a clean room environment and involves the handling of expensive, delicate, and fragile components that can be easily damaged or destroyed, even with the use of expensive specialized tools, equipment, fixtures, and facilities.

Thus, there exists a need for a more durable and dependable control system for an LCD so that failures can be accounted for and vehicles/aircraft can complete a mission and/or return safely to base.

SUMMARY

Exemplary embodiments provide a power and control system for an LCD device where redundancy is used to create a system that is robust and can continue operations even upon a failure in the control system, power module, sensors, or other electronic assembly within.

Arbiter logic is used to constantly monitor any deviation in operating power supplies or logic control signals. The preferred embodiments provide two independent paths for signals and power to flow to the LCD and LED backlight thereby any failure or deviation in these signals that prevents the display from working properly can be eliminated.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 shows an electrical block diagram of an embodiment for the overall system architecture of a redundant power/control system.

FIG. 2 shows an electrical block diagram of an embodiment for a redundant LCD power/control system.

FIG. 3 shows an electrical block diagram of an embodiment for a redundant backlight power/control system.

DETAILED DESCRIPTION

FIG. 1 shows an electrical block diagram of an embodiment for the overall system architecture of a redundant

power/control system. In this embodiment, there are dual redundant paths of required DC power and associated control signals for the LCD **28** and the LED backlight **18**. For the backlight section of this embodiment, two independent power supplies **10** and **11** may provide power to the LED controls and drive circuitry. There may be two independent circuits **15** and **16** for driving and controlling the LEDs. The back-end circuitry and components may provide the control signals and power for the LED drive controls **15** and **16** as well as the power supplies **10** and **11**.

For the LCD section of this embodiment, two independent power supplies **20** and **21** may provide power to the LCD controls **28** and drive circuitry **27**. There are two independent circuits **25** and **26** for driving and controlling the LCD. The back-end circuitry and components may provide the source controls/power and video data for the LCD drive controls **25** and **26** as well as the power supplies **20** and **21**.

The two independent paths for the LED backlight **18** and LCD **28** are multiplexed (see MUX **17** and **27** respectively) to provide one set of inputs to the LEDs **18** and LCD **28**. The control signals to the multiplexers **17** and **27** may be provided through Arbiter logic which may be constantly monitoring any deviation in operating power supplies or logic control signals. This scheme provides two independent paths for signals and power to flow to the LCD **28** and LEDs **18** such that any failure or deviation in one path allows the assembly to switch to the alternative path.

It should be noted that the diagram in FIG. **1** is simplified to simply provide an outline of the overall system architecture. Additional details on the LCD controls and the LED backlight controls are provided in FIGS. **2** and **3** respectively.

FIG. **2** shows an electrical block diagram of an embodiment for a redundant LCD power/control system. This embodiment provides two independent paths for video data, controls, and power to the LCD. Two sets of power supplies **100** and **105** may be used to generate the LCD power (for example $3.3V$, V_{DD} , V_{GH} , and V_{GL}). The power supplies **100** and **105** are monitored continuously by monitoring circuitry **115** and **120** respectively for any deviation or loss. Arbitration logic may be used to select the appropriate set for the associated LCD drive and gamma control. In addition, there are two sets of LCD control circuits (drive, V_{com} , and Gamma generation circuits) **120** and **125** that are monitored continuously. The arbitration logic may be used to select the appropriate set to be channeled to the LCD **135** via the multiplex logic contained within the multiplexer **130**. The video data may also be multiplexed and channeled appropriately by a multiplexer **110** prior to being sent to the circuits **120** and **125**.

It should be noted that although two separate monitoring circuits **115** and **120** are shown, some embodiments may combine these into a single circuit for monitoring the electrical communication from the power supplies **100** and **105** as well as the communications from the LCD control circuits **120** and **125**.

FIG. **3** shows an electrical block diagram of an embodiment for a redundant backlight power/control system. A first power supply **200** is in electrical communication with a power inverter **250** while a second power supply **205** is in electrical communication with a second power inverter **255**. Both power inverters **250** and **255** are in electrical communication with monitoring circuitry **210** which continuously analyzes the signals coming from the power inverters **250** and **255** to determine if one or more components have failed or started to malfunction. The monitoring circuitry **210** may determine if the signal has unexpected deviations or stops altogether and may switch from one set of power supply/power inverter/control circuit to the other. This switch can

take place in a matter of milliseconds, providing little to no interruption of the display performance.

The controlling signals for the LED backlight are sent to a first control circuit **220** which also accepts input from a first temperature sensor **290** and first luminance sensor **280**. Accordingly, the controlling signals for the LED backlight are also sent to a second control circuit **225** which also accepts input from a second temperature sensor **285** and second luminance sensor **295**. The output signals from the power inverters **250** and **255** as well as the output signal from the monitoring circuitry **210** may be multiplexed with multiplexer **270**, and then sent to the LEDs **260**.

It should be noted that in embodiments used for night operations, there may actually be two sets of LEDs (one for daytime and one for nighttime operations). This is certainly not required but this embodiment can be used if both daytime and nighttime LEDs are being used.

It should also be mentioned that although shown as a RGB setup, there are many methods for generating white light for the backlight and any method could be used with the embodiments herein. Some embodiments may use several colored LEDs in any combination to create the color white. Sometimes this may be done with a pair of LEDs consisting of a red-green and a red-blue LED that combine to create white. Some embodiments may only use white LEDs for the backlight.

As shown herein, the overall system architecture shown in FIG. **1** may use the LCD control system shown in FIG. **2** or may use other designs. Similarly, the overall system architecture shown in FIG. **1** may use the backlight control system shown in FIG. **3** or may use other designs. It should also be noted that the voltages shown in the Figures are only for illustration and should not be used to limit the exemplary embodiments to such voltages.

Having shown and described preferred embodiments of the invention, those skilled in the art will realize that many variations and modifications may be made to affect the described embodiments and still be within the scope of the claimed invention. Additionally, many of the elements indicated above may be altered or replaced by different elements which will provide the same result and fall within the spirit of the exemplary embodiments. It is the intention, therefore, to limit the invention only as indicated by the scope of the claims.

What is claimed is:

1. A control and power system for an LED backlight, the system comprising:

- a first power supply accepting a power input;
- a second power supply accepting a power input;
- a first LED control circuit accepting backlight control signals and in electrical communication with the first and second power supplies;
- a second LED control circuit accepting backlight control signals and in electrical communication with the first and second power supplies; and
- a multiplexer in electrical communication with each one of the following: the first and second LED control circuits and the LED backlight.

2. The system of claim 1 further comprising:

- a monitoring circuit in electrical communication with the first and second power supply and first and second LED control circuit.

3. The system of claim 2 wherein:

- the monitoring circuit is adapted to analyze the signals from the first and second power supply to determine if the signal has been interrupted.

5

4. The system of claim 2 wherein:
the monitoring circuit is adapted to instruct the multiplexer
as to which LED control circuit signal to send to the LED
backlight.
5. The system of claim 2 further comprising: 5
a first luminance sensor in electrical communication with
the first LED control circuit; and
a second luminance sensor in electrical communication
with the second LED control circuit.
6. The system of claim 5 wherein: 10
the monitoring circuit is adapted to analyze the signals
from the first and second luminance sensors to deter-
mine if the signal has been interrupted.
7. The system of claim 6 further comprising: 15
a first temperature sensor in electrical communication with
the first LED control circuit; and
a second temperature sensor in electrical communication
with the second LED control circuit.
8. The system of claim 7 wherein: 20
the monitoring circuit is adapted to analyze the signals
from the first and second temperature sensors to deter-
mine if the signal has been interrupted.
9. A control and power system for a liquid crystal display
(LCD), the system comprising: 25
a first power supply accepting a power input;
a second power supply accepting a power input;
a first LCD control circuit accepting video data and in
electrical communication with the first and second
power supplies;
a second LCD control circuit accepting video data and in 30
electrical communication with the first and second
power supplies; and
a first multiplexer in electrical communication with each
one of the following: the first and second LCD control
circuits and the LCD. 35
10. The system of claim 9 further comprising:
a second multiplexer which multiplexes the incoming
video data before sending it to the first and second LCD
control circuits.
11. The system of claim 10 further comprising: 40
a first monitoring circuit in electrical communication with
the first power supply, first LCD control circuit, and the
first multiplexer.
12. The system of claim 11 further comprising: 45
a second monitoring circuit in electrical communication
with the second power supply, second LCD control cir-
cuit, and the first multiplexer.
13. The system of claim 12 wherein: 50
the first and second monitoring circuits are adapted to
analyze the electrical signals from the power supplies
and control circuits to determine if an electrical commu-
nication has been interrupted.
14. The system of claim 13 wherein: 55
the first and second monitoring circuits are further adapted
to instruct the first multiplexer as to which power supply
and associated control circuit signals to send to the LCD.
15. A control and power system for an LED-backlit liquid
crystal display (LCD), the system comprising:
a first power supply in electrical communication with a first
power inverter;

6

- a second power supply in electrical communication with a
second power inverter;
a first LED control circuit accepting backlight control sig-
nals and in electrical communication with the first power
inverter;
a second LED control circuit accepting backlight control
signals and in electrical communication with the second
power inverter;
a first multiplexer in electrical communication with each
one of the following: the first and second power inverters
and the LED backlight;
an LED control and power monitoring circuit in electrical
communication with the first and second power inverters
and the first multiplexer and adapted to analyze the
electrical communications from the first and second
power inverters and direct the first multiplexer to send
one of the electrical communications to the LED back-
light.
16. The system of claim 15 further comprising:
a third power supply accepting a power input;
a fourth power supply accepting a power input;
a first LCD monitoring circuit in electrical communication
with the third power supply;
a second LCD monitoring circuit in electrical communica-
tion with the fourth power supply;
a second multiplexer accepting video data;
a first LCD control circuit in electrical communication
with the second multiplexer and first LCD monitoring
circuit;
a second LCD control circuit in electrical communication
with the second multiplexer and second LCD monitor-
ing circuit; and
a third multiplexer in electrical communication with each
one of the following: the first and second LCD control
circuits and the first and second LCD monitoring cir-
cuits.
17. The system of claim 16 wherein:
the first LCD monitoring circuit is adapted to analyze the
electrical communications from the third power supply
and first LCD control circuit; and
the second LCD monitoring circuit is adapted to analyze
the electrical communications from the fourth power
supply and second LCD control circuit.
18. The system of claim 17 wherein:
the first and second LCD monitoring circuits are further
adapted to direct the third multiplexer to communicate
either the electrical communication from the first LCD
control circuit or second LCD control circuit to the LCD.
19. The system of claim 15 further comprising:
a first luminance sensor in electrical communication with
the first LED control circuit; and
a second luminance sensor in electrical communication
with the second LED control circuit.
20. The system of claim 15 further comprising:
a first temperature sensor in electrical communication with
the first LED control circuit; and
a second temperature sensor in electrical communication
with the second LED control circuit.

* * * * *

专利名称(译)	用于液晶显示器的冗余电源/控制系统		
公开(公告)号	US9117417	公开(公告)日	2015-08-25
申请号	US14/258347	申请日	2014-04-22
申请(专利权)人(译)	AMERICAN面板有限公司		
当前申请(专利权)人(译)	AMERICAN面板有限公司		
[标]发明人	DUNN WILLIAM MAHDI KEN		
发明人	DUNN, WILLIAM MAHDI, KEN		
IPC分类号	G09G3/36 G09G3/34		
CPC分类号	G09G3/3648 G09G3/3406 G09G3/3611 G09G2320/041 G09G2320/08 G09G2330/08 G09G2360/14 G09G3/3607 G09G2310/0237		
优先权	13/080354 2014-04-22 US 61/321084 2010-04-05 US		
其他公开文献	US20140313237A1		
外部链接	Espacenet USPTO		

摘要(译)

一种用于为LED背光液晶显示器 (LCD) 供电和控制的系统，其中冗余用于提供从一对电源到LED背光的两个独立路径。此外，还从一对电源到LCD使用两个独立的路径。如果任何一条路径发生故障或性能开始下降，则系统包含监视电路，该监视电路可指示系统使用的另一条路径。可以使用用于LCD的两个单独的控制电路，使得如果一个失败则可以使用任一个控制LCD。还可以使用两个单独的温度传感器和亮度传感器来增加系统的耐用性。

