



(11) **EP 2 234 093 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
16.05.2012 Bulletin 2012/20

(51) Int Cl.:
G09G 3/32^(2006.01)

(21) Application number: **10157704.7**

(22) Date of filing: **25.03.2010**

(54) **Organic Light Emitting Display Device**

Organische lichtemittierende Anzeigevorrichtung

Dispositif à affichage électroluminescent organique

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **26.03.2009 KR 20090025841**

(43) Date of publication of application:
29.09.2010 Bulletin 2010/39

(73) Proprietor: **Samsung Mobile Display Co., Ltd.
Yongin-city, Gyunggi-do 446-711 (KR)**

(72) Inventors:
• **CHOI, Sang-Moo
Gyunggi-Do 446-711 (KR)**

• **KANG, Chul-Kyu
Gyunggi-Do 446-711 (KR)**
• **KIM, Keum-Nam
Gyunggi-Do 446-711 (KR)**

(74) Representative: **Walaski, Jan Filip et al
Venner Shipley LLP
200 Aldersgate
London
EC1A 4HD (GB)**

(56) References cited:
EP-A2- 2 192 571 CA-A1- 2 557 713

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 234 093 B1

Description

[0001] The present invention relates to organic light emitting display devices.

[0002] Recently, various flat panel display devices capable of reducing weight and volume, which are disadvantages of cathode ray tubes, have been developed. Among the flat panel display devices, there are liquid crystal display devices, field emission display devices, plasma display panels, and organic light emitting display devices, etc.

[0003] Among the above discussed flat panel display devices, the organic light emitting display devices display images using organic light emitting diodes that generate light by the recombination of electrons and holes. Organic light emitting display devices are driven at low power consumption, with rapid response speed.

[0004] FIG. 1 is a schematic circuit diagram showing a conventional pixel of an organic light emitting display device. In FIG. 1, the transistors included in the pixel are NMOS transistors.

[0005] Referring to FIG. 1, the pixel 4 of the conventional organic light emitting display device includes a pixel circuit 2 that is coupled to an organic light emitting diode OLED, a data line Dm, and a scan line Sn to control the organic light emitting diode OLED.

[0006] The anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit 2, and the cathode electrode of the organic light emitting diode OLED is coupled to a second power supply ELVSS. The organic light emitting diode OLED generates light having a brightness (e.g., a predetermined brightness) corresponding to the current supplied from the pixel circuit 2.

[0007] The pixel circuit 2 controls the amount of current supplied to the organic light emitting diode OLED according to the data signal supplied to the data line Dm and a scan signal supplied to the scan line Sn. To this end, the pixel circuit 2 includes a second transistor M2 (i.e., a driving transistor) coupled between a first power supply ELVDD and the organic light emitting diode OLED, a first transistor M1 coupled between the second transistor M2, the data line Dm, and the scan line Sn, and a storage capacitor Cst that is coupled between the gate electrode and a first electrode of the second transistor M2.

[0008] The gate electrode of the first transistor M1 is coupled to the scan line Sn, and a first electrode of the first transistor M1 is coupled to the data line Dm. A second electrode of the first transistor M1 is coupled to one terminal of the storage capacitor Cst. Here, the first electrode of the first transistor M1 is either a source electrode or a drain electrode, and the second electrode of the first transistor M1 is an electrode other than the electrode of the first electrode. For example, if the first electrode is the source electrode, the second electrode is the drain electrode. When the scan signal is supplied to the scan line Sn, the first transistor M1 coupled between the scan line Sn and the data line Dm is turned on to supply the data signal supplied from the data line Dm to the storage capacitor Cst. Thus, the storage capacitor Cst is charged with a voltage corresponding to the data signal.

[0009] The gate electrode of the second transistor M2 is coupled to one terminal of the storage capacitor Cst, and the first electrode is coupled to the first power supply ELVDD. The second electrode of the second transistor M2 is coupled to the other terminal of the storage capacitor Cst and is also coupled to the anode electrode of the organic light emitting diode OLED. The second transistor M2 controls the amount of current flowing from the first power supply ELVDD to the second power supply ELVSS via the organic light emitting diode OLED in accordance with the voltage stored in the storage capacitor Cst.

[0010] One terminal of the storage capacitor Cst is coupled to the gate electrode of the second transistor M2, and the other terminal of the storage capacitor Cst is coupled to the anode electrode of the organic light emitting diode OLED. The storage capacitor Cst is charged with the voltage corresponding to the data signal.

[0011] A conventional pixel 4 as described above supplies a current corresponding to the voltage charged in the storage capacitor Cst to the organic light emitting diode OLED, thereby displaying an image having a brightness (e.g., a predetermined brightness). However, an issue with this conventional organic light emitting display device is that it cannot display an image having a uniform brightness due to the deviation of the threshold voltage of the second transistor M2.

[0012] Actually, when the threshold voltage of the second transistors M2 are different in the respective pixels 4, the respective pixels 4 generate light having different brightness corresponding to the same data signal, and the conventional organic light emitting display device cannot display an image having a uniform brightness.

[0013] EP 2 192 571 discloses an organic light emitting display device that has a circuit arrangement in Figure 6 that is similar to the arrangement shown in Figure 5 of the present application, without a capacitor connected between nodes N1 and N3.

[0014] Embodiments of the invention provide an organic light emitting display device that compensates for variations of the threshold voltage of driving transistors.

[0015] According to the present invention, an organic light emitting display device includes a scan driver for sequentially supplying scan signals to a plurality of scan lines; a data driver for supplying an initial voltage during a first portion of a period when the scan signals are supplied to the scan lines, and for supplying data signals during a second portion of the period other than the first portion of the period; and pixels at respective crossings of the scan lines and the data

lines, wherein one of the pixels at an i^{th} (i is a natural number) horizontal line includes an organic light emitting diode having a cathode electrode coupled to a second power supply; a first transistor for controlling a current flowing from a first power supply to the second power supply via the organic light emitting diode; a second transistor coupled between a data line of the data lines and a second node, and is configured to be turned on when a scan signal of the scan signals is supplied to an i^{th} scan line; a third transistor coupled between a first node coupled to the gate electrode of the first transistor and the second node, and is configured to maintain a turn-off state when the second transistor is turned on; a fourth transistor coupled between the first node and a reference power supply, and is configured to be turned on when the scan signal is supplied to the i^{th} scan line; a first capacitor coupled between the second node and an anode electrode of the organic light emitting diode; and a second capacitor coupled between the first node and the anode electrode of the organic light emitting diode.

[0016] In some embodiments, the initial voltage is adapted to have a higher voltage than a voltage of the data signal. The reference voltage may have a voltage adapted to turn off the first transistor. The third transistor may be configured to be turned on when the scan signal is supplied to an $i+1^{\text{th}}$ scan line. The scan driver may be configured sequentially to supply emission control signals to emission control lines substantially parallel to the scan lines. The emission control signal supplied to an i^{th} emission control line may overlap the scan signal supplied to the i^{th} scan line, and may have a voltage adapted to turn off the third transistor. The gate electrode of the third transistor may be coupled to the i^{th} emission control line.

[0017] With the organic light emitting display device according to various embodiments of the present invention, the threshold voltage of the driving transistor is substantially compensated, thus displaying an image having a substantially uniform brightness.

[0018] The accompanying drawings, together with the specification, illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the present invention.

FIG. 1 is a schematic circuit diagram showing a conventional pixel of an organic light emitting display device;

FIG. 2 is a schematic block diagram showing an organic light emitting display device according to an embodiment of the present invention;

FIG. 3 is a schematic circuit diagram showing a pixel according to an embodiment of the present invention;

FIG. 4 is a waveform timing diagram showing a method for driving the pixel of FIG. 3;

FIG. 5 is a schematic circuit diagram showing a pixel according to another embodiment of the invention; and

FIG. 6 is a waveform timing diagram showing a method for driving the pixel of FIG. 5.

[0019] In the following detailed description, only certain exemplary embodiments of the present invention are shown and described, by way of illustration. As those skilled in the art would recognize, the invention may be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. Also, in the context of the present application, when an element is referred to as being coupled to another element, it can be directly coupled to the another element or be indirectly coupled to the another element with one or more intervening elements interposed therebetween. Like reference numerals designate like elements throughout the specification.

[0020] Hereinafter, exemplary embodiments of the present invention, proposed so that a person having ordinary skill in the art can easily carry out the present invention, will be described in more detail with reference to the accompanying FIG. 2 to FIG. 6.

[0021] FIG. 2 is a schematic block diagram showing an organic light emitting display device according to an exemplary embodiment of the present invention.

[0022] Referring to FIG. 2, the organic light emitting display device according to the exemplary embodiment of the present invention includes pixels 140 positioned to be coupled to scan lines S1 to S $n+1$ and data lines D1 to D m , a scan driver 110 that drives the scan lines S1 to S $n+1$, a data driver 120 that drives the data lines D1 to D m , and a timing controller 150 that controls the scan driver 110 and the data driver 120.

[0023] The scan driver 110 receives a scan driving control signal SCS from the timing controller 150. The scan driver 110 supplied with the scan driving control signal SCS generates scan signals, and sequentially supplies the generated scan signals to the scan lines S1 to S $n+1$.

[0024] The data driver 120 receives a data driving control signal DCS from the timing controller 150. The data driver 120 supplied with the data driving control signal DCS supplies an initial voltage during a first part of the period when the scan signals are supplied and supplies the data signals during a second part of the period other than the first part. Here, the initial voltage is set to be higher than the voltage of the data signals.

[0025] The timing controller 150 generates the data driving control signal DCS and the scan driving control signal SCS corresponding to synchronization signals supplied from an external source. The data driving control signal DCS generated by the timing controller 150 is supplied to the data driver 120, and the scan driving control signal SCS generated by the timing controller 150 is supplied to the scan driver 110. The timing controller 150 supplies data Data, which is supplied from the external source, to the data driver 120.

[0026] The pixel unit 130 receives a first voltage ELVDD, a second voltage ELVSS, and a reference voltage Vref from the external source, and supplies them to the respective pixels 140. The respective pixels 140 supplied with the first power ELVDD, the second voltage ELVSS, and the reference voltage Vref generate light in accordance with the data signal.

[0027] Here, the first power supply ELVDD is set to have a higher voltage than the second power supply ELVSS to supply a current (e.g., a predetermined current) to the organic light emitting diode OLED. The reference voltage Vref has a voltage adapted to turn off the driving transistor.

[0028] In addition, the pixel 140 positioned at an i^{th} (i is a natural number) horizontal line is coupled to an i^{th} scan line and an $i+1^{\text{th}}$ scan line. The pixel 140 includes a plurality of NMOS-type transistors and supplies the current, which is compensated for variations of the threshold voltage of the driving transistor, to the organic light emitting diode OLED.

[0029] FIG. 3 is a schematic circuit diagram showing a pixel according to an embodiment of the present invention. For convenience of explanation, FIG. 3 shows the pixel 140 positioned on a n^{th} horizontal line and coupled to an m^{th} data line Dm.

[0030] Referring to FIG. 3, the pixel 140 according to the exemplary embodiment of the present invention includes a pixel circuit 142 that is coupled to an organic light emitting diode OLED, the m^{th} data line Dm, n^{th} scan line Sn, and $n+1^{\text{th}}$ scan line Sn+1 to control the organic light emitting diode OLED.

[0031] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit 142, and a cathode electrode of the organic light emitting diode OLED is coupled to the second power supply ELVSS. The organic light emitting diode OLED generates light having a brightness (e.g., a predetermined brightness) corresponding to the current supplied from the pixel circuit 142.

[0032] The pixel circuit 142 is charged with a voltage corresponding to a data signal supplied to the m^{th} data line Dm when the scan signal is supplied to the n^{th} scan line Sn, and corresponding to the threshold voltage of a first transistor M1 (that is, a driving transistor), and supplies the current corresponding to the charged voltage when the scan signal is supplied to the $n+1^{\text{th}}$ scan line Sn+1 to the organic light emitting diode OLED. To this end, the pixel circuit 142 includes first to fourth transistors M1 to M4, a first capacitor C1, and a second capacitor C2.

[0033] A gate electrode of the first transistor M1 is coupled to a first node N1, and a first electrode of the first transistor M1 is coupled to a first power supply ELVDD. A second electrode of the first transistor M1 is coupled to the anode electrode of the organic light emitting diode OLED (i.e., to a third node N3). The first transistor M1 controls the amount of current supplied from the first power supply ELVDD to the second power supply ELVSS via the organic light emitting diode OLED in accordance with the voltage applied to the first node N1.

[0034] A gate electrode of the second transistor M2 is coupled to the n^{th} scan line Sn, and a first electrode of the second transistor M2 is coupled to the m^{th} data line Dm. A second electrode of the second transistor M2 is coupled to a second node N2. The second transistor M2 is turned on when the scan signal is supplied to the n^{th} scan line Sn to couple (e.g., to conductively couple) the data line Dm to the second node N2.

[0035] A gate electrode of the third transistor M3 is coupled to the $n+1^{\text{th}}$ scan line Sn+1, and a first electrode of the third transistor M3 is coupled to the second node N2. A second electrode of the third transistor M3 is coupled to the first node N1 (that is, the gate electrode of the first transistor M1). The third transistor M3 is turned on when the scan signal is supplied to the $n+1^{\text{th}}$ scan line Sn+1 to couple (e.g., to conductively couple) the first node N1 to the second node N2. Meanwhile, the third transistor M3 maintains a turn-off state when the second transistor M2 is turned on.

[0036] A gate electrode of the fourth transistor M4 is coupled to the n^{th} scan line Sn, and a first electrode of the fourth transistor M4 is coupled to the reference voltage Vref. A second electrode of the fourth transistor M4 is coupled to the first node N1. The fourth transistor M4 is turned on when the scan signal is supplied to the n^{th} scan line Sn to supply the voltage of the reference voltage Vref to the first node N1.

[0037] The first capacitor C1 is coupled between the second node N2 and a third node N3 (that is, the anode electrode of the organic light emitting diode OLED). Thus, the first capacitor C1 is charged with the voltage corresponding to the data signal when the second transistor M2 is in a turn-on state.

[0038] The second capacitor C2 is coupled between the first node N1 and the third node N3 (that is, the anode electrode of the organic light emitting diode OLED). Thus, the second capacitor C2 is charged with the voltage corresponding to the threshold voltage of the first transistor M1.

[0039] FIG. 4 is a waveform timing diagram showing a method for driving the pixel of FIG. 3.

[0040] Describing the operation process of the pixel 140 in detail by combining FIGS. 3 and 4, the scan signal is first supplied to the n^{th} scan line Sn, and an initial voltage Vint is supplied to the m^{th} data line Dm during a first period of the period when the scan signal is supplied.

[0041] When the scan signal is supplied to the scan line Sn, the second transistor M2 and the fourth transistor M4 are turned on. When the fourth transistor M4 is turned on, the voltage of the reference power supply Vref is supplied to the first node N1. Here, the voltage of the reference power supply Vref has a low voltage, which maintains the first transistor M1 in a turn-off state. When the first transistor M1 is turned off, the current is not supplied to the organic light emitting diode OLED, and accordingly, the organic light emitting diode OLED is in a turn-off state.

[0042] When the second transistor M2 is turned on, the initial voltage Vint from the mth data line Dm is supplied to the second node N2. In this case, both terminals of the first capacitor C1 are set to the initial voltage Vint and the voltage applied to the anode electrode of the organic light emitting diode OLED at the time of turn-off.

[0043] Thereafter, the data signal is supplied to the mth data line Dm during a second period, and accordingly, the voltage of the second node N2 falls from the initial voltage Vint to the voltage of the data signal Vdata. If the voltage of the second node N2 falls, the voltage of the third node N3 also falls by a coupling phenomenon of the first capacitor C1. Here, the first transistor M1 is turned on, and the voltage of the third node N3 rises to the voltage obtained by subtracting the threshold voltage of the first transistor M1 from the voltage of the reference power supply Vref. To this end, the voltage of the reference power supply Vref is set so that the voltage of the third node N3 falls to a lower voltage than the voltage of the reference power supply Vref when the data signal is supplied.

[0044] When the voltage of the third node N3 rises to the voltage obtained by subtracting the threshold voltage of the first transistor M1 from the voltage of the reference power supply Vref, the second capacitor C2 is charged with the threshold voltage of the first transistor M1. Here, the first capacitor C1 is charged with the voltage obtained by the equation Vdata - Vref + Vth(M1). Here, Vdata represents the voltage of the data signal.

[0045] Thereafter, the supply of the scan signal to the nth scan line Sn stops, and the second transistor M2 and the fourth transistor M4 are turned off. The scan signal is supplied to the n+1th scan line Sn+1, so the third transistor M3 is turned on. When the third transistor M3 is turned on, the first node N1 and the second node N2 are coupled (e.g., conductively coupled) to each other. Then, the voltage stored in the first capacitor C1 and the second capacitor C2 are shared and averaged. In this case, the voltage finally applied to the first node and the second node N2 are shown in equation 1:

[Equation 1]

$$V_{N1,N2} = (C1 \times Vdata + C2 \times Vref) / (C1 + C2)$$

[0046] The voltage of the third node N3 is set as shown in equation 2:

[Equation 2]

$$V_{N3} = Vref - V^{th}(M1)$$

[0047] When the voltages of the nodes N1, N2, and N3 are set as shown in equations 1 and 2, a gate-source voltage Vgs of the first transistor M1 is shown in equation 3:

[Equation 3]

$$Vgs = (C1 \times Vdata + C2 \times Vref) / (C1 + C2) - Vref + V^{th}(M1)$$

[0048] When the gate-source voltage Vgs of the first transistor M1 is as shown in equation 3, the current flowing through the organic light emitting diode OLED is as shown in equation 4:

[Equation 4]

$$\begin{aligned} I_{oled} &= \beta(Vgs - V^{th}(M1))^2 \\ &= \beta \{ (C1 \times Vdata + C2 \times Vref) / (C1 + C2) - Vref + V^{th}(M1) - V^{th}(M1) \}^2 \\ &= \beta \{ (C1 \times Vdata + C2 \times Vref) / (C1 + C2) - Vref \}^2 \end{aligned}$$

[0049] Referring to equation 4, the current flowing through the organic light emitting diode OLED is determined irrespective (or substantially independent) of the threshold voltage of the first transistor M1. Therefore, in an embodiment of the present invention, an image having a substantially uniform brightness can be displayed.

[0050] FIG. 5 is a schematic circuit diagram showing a pixel according to another embodiment of the present invention. When describing FIG. 5, portions having the same structure and/or function as FIG. 3 will be given with the same reference numerals and the detailed description thereof will be omitted.

[0051] Referring to FIG. 5, the pixel 140' is coupled to an emission control line En. Here, the emission control lines are formed for each horizontal line to be substantially parallel to the scan lines S1 to Sn. An emission control signal supplied to an i^{th} (i is a natural number) emission control line Ei is supplied to overlap in time with the scan signal supplied to an i^{th} scan line Si, as shown in FIG. 6.

[0052] Meanwhile, the scan signals sequentially supplied to the scan lines S1 to Sn have a voltage (for example, having a high polarity) that turns on the corresponding transistors, and the emission control signals supplied to the emission control lines E1 to En have a voltage (for example, having a low polarity) that turns off the corresponding transistors.

[0053] A gate electrode of the third transistor M3' included in the pixel circuit 142' is coupled to the emission control line En, and a first electrode of the third transistor M3' is coupled to the second node N2. A second electrode of the third transistor M3 is coupled to the first node N1.

[0054] The operation process of the pixel 140' as described above is substantially the same as that of the pixel shown in FIG. 3, except that the third transistor M3' is controlled by the emission control signal. Therefore, the detailed operation process thereof will not be provided again.

[0055] While the present invention has been described in connection with certain exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangement included within the scope of the appended claims. For example, the pixel circuits could be implemented as NMOS or PMOS transistors, with appropriate changes to the connections and signal waveforms.

Claims

1. An organic light emitting display device, comprising:

a scan driver for sequentially supplying scan signals to a plurality of scan lines;
 a data driver adapted to supply an initial voltage to a plurality of data lines, during a first part of a period when the scan signals are supplied to the scan lines, and adapted to supply data signals during a second part of the period other than the first part of the period; and
 pixels at respective crossings of the scan lines and the data lines, wherein one of the pixels at an i^{th} (i is a natural number) horizontal line comprises:
 an organic light emitting diode having a first electrode coupled to a second power supply;
 a first transistor (M1) for controlling a current flowing from a first power supply to the second power supply via the organic light emitting diode;
characterized in that said one of the pixels at an i^{th} horizontal line further comprises :
 a second transistor (M2) coupled between one of the data lines and a second node (N2), the second transistor configured to be turned on when the scan signal (Sn) is supplied to an i^{th} scan line;
 a third transistor (M3) coupled between a first node (N1) coupled to the gate electrode of the first transistor and the second node, the third transistor configured to maintain a turned-off state when the second transistor is turned on;
 a fourth transistor (M4) coupled between the first node and a reference power supply, the fourth transistor configured to be turned on when the scan signal is supplied to the i^{th} scan line;
 a first capacitor (C1) coupled between the second node and a second electrode of the organic light emitting diode; and
 a second capacitor (C2) coupled between the first node and the second electrode of the organic light emitting diode.

2. The organic light emitting display device as claimed in claim 1, wherein the initial voltage is higher than a voltage of the data signal.

3. The organic light emitting display device as claimed in claim 1 or 2, wherein the reference power supply is configured to supply a voltage (Vref) for turning off the first transistor.

4. The organic light emitting display device as claimed in any one of the preceding claims, wherein the third transistor (M3) is configured to be turned on when the scan signal is supplied to an $i+1^{\text{th}}$ scan line.

5. The organic light emitting display device as claimed in any one of the claims 1 to 3, wherein the scan driver is configured sequentially to supply emission control signals to a plurality of emission control lines substantially parallel to the scan lines.
- 5 6. The organic light emitting display device as claimed in claim 5, wherein the emission control signal supplied to an i^{th} emission control line overlaps the scan signal supplied to the i^{th} scan line, and has a voltage for turning off the third transistor (M3').
7. The organic light emitting display device as claimed in claim 6, wherein a gate electrode of the third transistor is coupled to the i^{th} emission control line.

Patentansprüche

- 15 1. Organische Leuchtanzeigevorrichtung, umfassend:

einen Abtasttreiber, um einer Mehrzahl von Abtastzeilen sequentiell Abtastsignale bereitzustellen;
 einen Datentreiber, der dafür ausgelegt ist, während eines ersten Abschnitts eines Zeitraums, in dem die Abtastsignale den Abtastzeilen bereitgestellt werden, einer Mehrzahl von Datenzeilen eine Initialspannung bereitzustellen, und während eines zweiten Abschnitts des Zeitraums, der sich vom ersten Abschnitt des Zeitraums unterscheidet, Datensignale bereitzustellen; und
 Pixel an entsprechenden Schnittstellen der Abtastzeilen und der Datenzeilen,
 wobei eines der Pixel an einer i -ten (i ist eine natürliche Zahl) horizontalen Zeile Folgendes umfasst:

- 25 eine organische Leuchtdiode mit einer ersten Elektrode, die mit einer zweiten Stromversorgung verbunden ist;
 einen ersten Transistor (M1) zum Steuern eines Stroms, der von einer ersten Stromversorgung über die organische Leuchtdiode zur zweiten Stromversorgung fließt;
dadurch gekennzeichnet, dass das eine der Pixel an einer i -ten horizontalen Zeile ferner Folgendes umfasst:
- 30 einen zweiten Transistor (M2), der zwischen eine der Datenzeilen und einen zweiten Knoten (N2) geschaltet ist, wobei der zweite Transistor so gestaltet ist, dass er eingeschaltet wird, wenn das Abtastsignal (S_n) einer i -ten Abtastzeile bereitgestellt wird;
- 35 einen dritten Transistor (M3), der zwischen einen mit der Gateelektrode des ersten Transistors verbundenen ersten Knoten (N1) und den zweiten Knoten geschaltet ist, wobei der dritte Transistor so gestaltet ist, dass er einen Aus-Zustand aufrechterhält, wenn der zweite Transistor eingeschaltet ist;
- 40 einen vierten Transistor (M4), der zwischen den ersten Knoten und eine Referenzstromversorgung geschaltet ist, wobei der vierte Transistor so gestaltet ist, dass er eingeschaltet wird, wenn das Abtastsignal der i -ten Abtastzeile bereitgestellt wird;
- einen ersten Kondensator (C1), der zwischen den zweiten Knoten und eine zweite Elektrode der organischen Leuchtdiode geschaltet ist; und
- 45 einen zweiten Kondensator (C2), der zwischen den ersten Knoten und die zweite Elektrode der organischen Leuchtdiode geschaltet ist.

2. Organische Leuchtanzeigevorrichtung nach Anspruch 1, wobei die Initialspannung höher als eine Spannung des Datensignals ist.
- 50 3. Organische Leuchtanzeigevorrichtung nach Anspruch 1 oder 2, wobei die Referenzstromversorgung so gestaltet ist, dass sie eine Spannung (V_{ref}) zum Ausschalten des ersten Transistors bereitstellt.
4. Organische Leuchtanzeigevorrichtung nach einem der vorherigen Ansprüche, wobei der dritte Transistor (M3) so gestaltet ist, dass er eingeschaltet wird, wenn das Abtastsignal einer $i + 1$ -ten Abtastzeile bereitgestellt wird.
- 55 5. Organische Leuchtanzeigevorrichtung nach einem der Ansprüche 1 bis 3, wobei der Abtasttreiber so gestaltet ist, dass er einer Mehrzahl von Ausgabesteuerungszeilen, die im Wesentlichen parallel zu den Abtastzeilen sind, sequentiell Ausgabesteuerungssignale bereitstellt.

6. Organische Leuchtanzeigevorrichtung nach Anspruch 5, wobei das einer i-ten Ausgabesteuerungszeile bereitgestellte Ausgabesteuerungssignal das der i-ten Abtastzeile bereitgestellte Abtastsignal überlagert und eine Spannung zum Ausschalten des dritten Transistors (M3') aufweist.

7. Organische Leuchtanzeigevorrichtung nach Anspruch 6, wobei eine Gateelektrode des dritten Transistors mit der i-ten Ausgabesteuerungszeile verbunden ist.

Revendications

1. Dispositif d'affichage électroluminescent organique, comprenant :

un circuit d'attaque de balayage destiné à fournir de manière séquentielle des signaux de balayage à une pluralité de lignes de balayage,
un circuit d'attaque de données conçu pour fournir une tension initiale à une pluralité de lignes de données, pendant une première partie d'une période au cours de laquelle les signaux de balayage sont fournis aux lignes de balayage, et conçu pour fournir des signaux de données pendant une deuxième partie de la période autre que la première partie de la période ; et
des pixels au niveau de croisements respectifs des lignes de balayage et des lignes de données, dans lequel l'un des pixels au niveau d'une i^{ème} ligne horizontale (i est un entier naturel) comprend :

une diode électroluminescente organique ayant une première électrode couplée à un deuxième bloc d'alimentation ;

un premier transistor (M1) destiné à commander un courant circulant d'un premier bloc d'alimentation vers le deuxième bloc d'alimentation à travers la diode électroluminescente organique ; **caractérisé en ce que** ledit un des pixels au niveau d'une i^{ème} ligne horizontale comprend en outre :

un deuxième transistor (M2) couplé entre l'une des lignes de données et un deuxième noeud (N2), le deuxième transistor étant configuré pour être mis sous tension lorsque le signal de balayage (Sn) est fourni à une i^{ème} ligne de balayage ;

un troisième transistor (M3) couplé entre un premier noeud (N1) couplé à l'électrode de grille du premier transistor et un deuxième noeud, le troisième transistor étant configuré pour maintenir un état de mise hors tension lorsque le deuxième transistor est sous tension ;

un quatrième transistor (M4) couplé entre le premier noeud et un bloc d'alimentation de référence, le quatrième transistor étant configuré pour être mis sous tension lorsque le signal de balayage est fourni à la i^{ème} ligne de balayage ;

un premier condensateur (C1) couplé entre le deuxième noeud et une deuxième électrode de la diode électroluminescente organique ; et

un deuxième condensateur (C2) couplé entre le premier noeud et la deuxième électrode de la diode électroluminescente organique.

2. Dispositif d'affichage électroluminescent organique tel que revendiqué dans la revendication 1, dans lequel la tension initiale est supérieure à une tension du signal de données.

3. Dispositif d'affichage électroluminescent organique tel que revendiqué dans la revendication 1 ou 2, dans lequel le bloc d'alimentation de référence est configuré pour fournir une tension (Vref) pour mettre hors tension le premier transistor.

4. Dispositif d'affichage électroluminescent organique tel que revendiqué dans l'une quelconque des revendications précédentes, dans lequel le troisième transistor (M3) est configuré pour être mis sous tension lorsque le signal de balayage est fourni à une (i+1)^{ème} ligne de balayage.

5. Dispositif d'affichage électroluminescent organique tel que revendiqué dans l'une quelconque des revendications 1 à 3, dans lequel le circuit d'attaque de balayage est configuré pour fournir de manière séquentielle des signaux de commande d'émission à une pluralité de lignes de commande d'émission sensiblement parallèles aux lignes de balayage.

6. Dispositif d'affichage électroluminescent organique tel que revendiqué dans la revendication 5, dans lequel le signal

de commande d'émission fourni à une $i^{\text{ème}}$ ligne de commande d'émission chevauche le signal de balayage fourni à la $i^{\text{ème}}$ ligne de balayage, et a une tension permettant de mettre hors tension le troisième transistor (M3').

7. Dispositif d'affichage électroluminescent organique tel que revendiqué dans la revendication 6, dans lequel une électrode de grille du troisième transistor est couplée à la $i^{\text{ème}}$ ligne de commande d'émission.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1
(PRIOR ART)

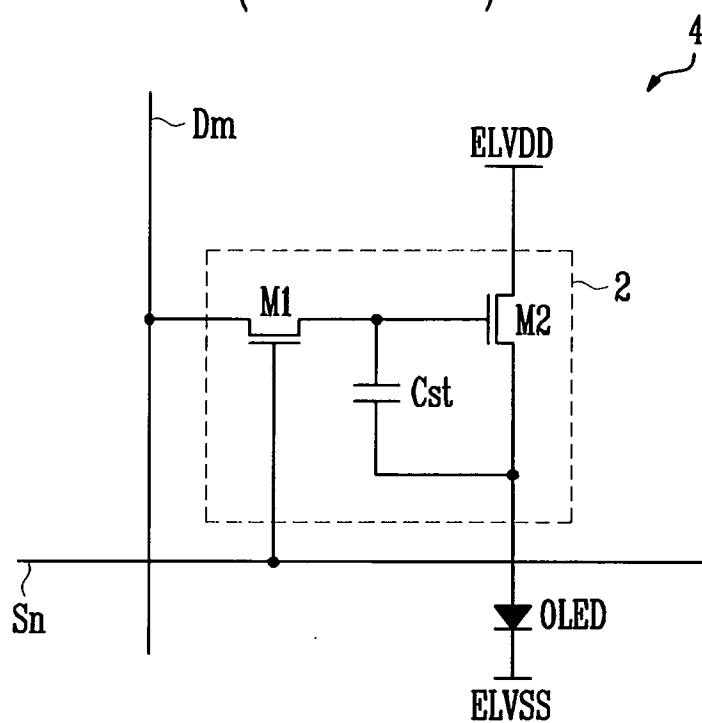


FIG. 3

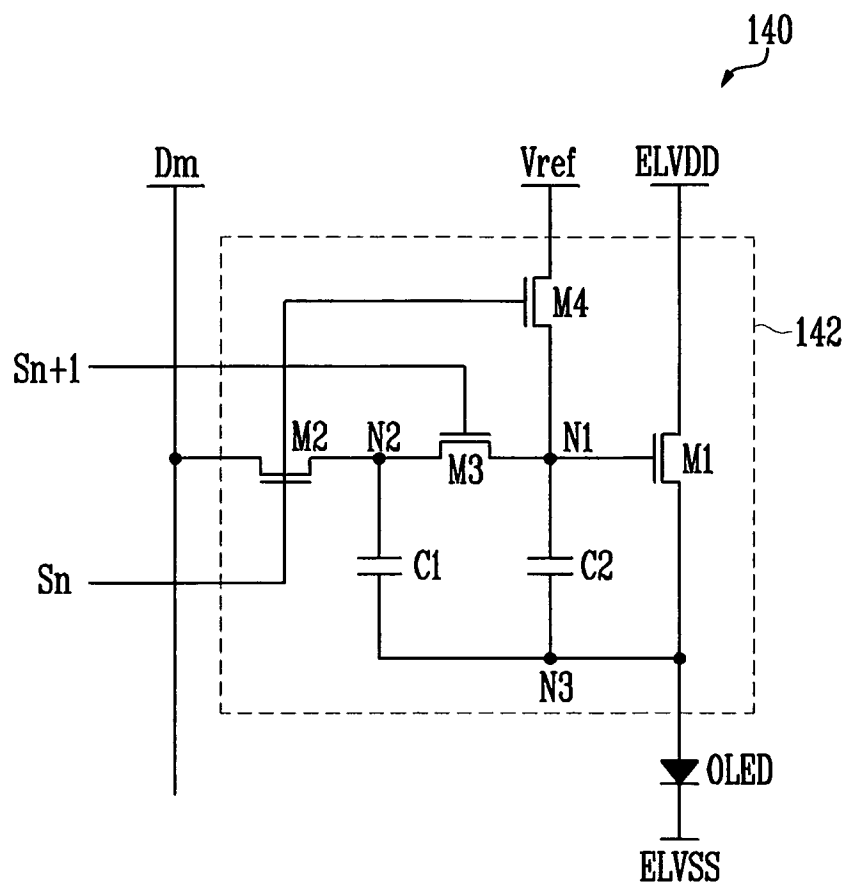


FIG. 2

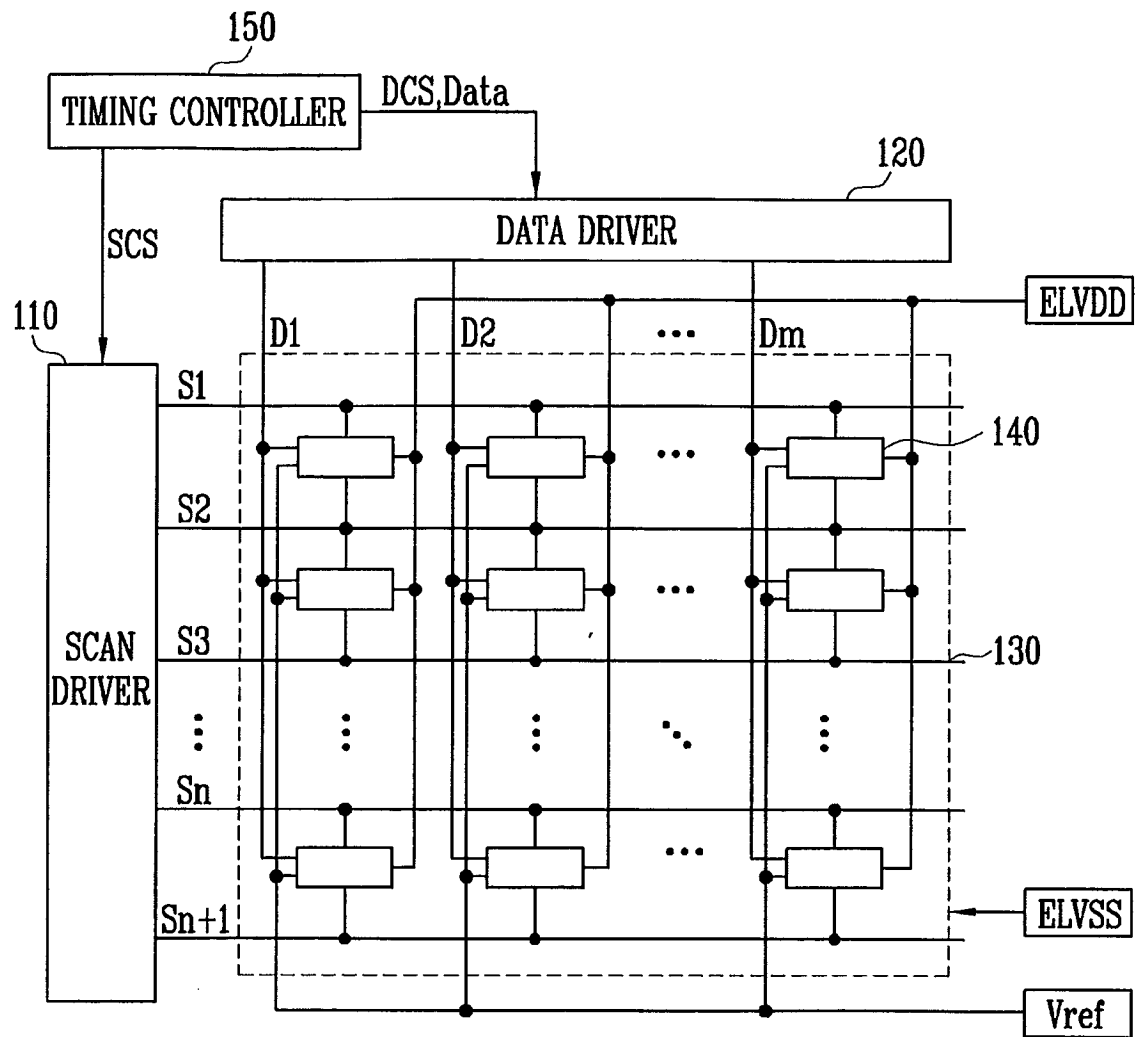


FIG. 4

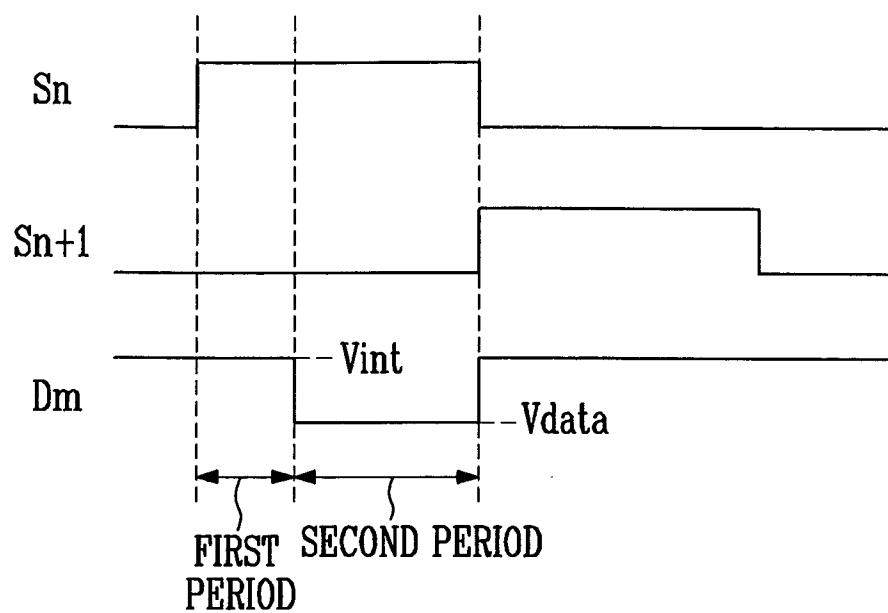


FIG. 5


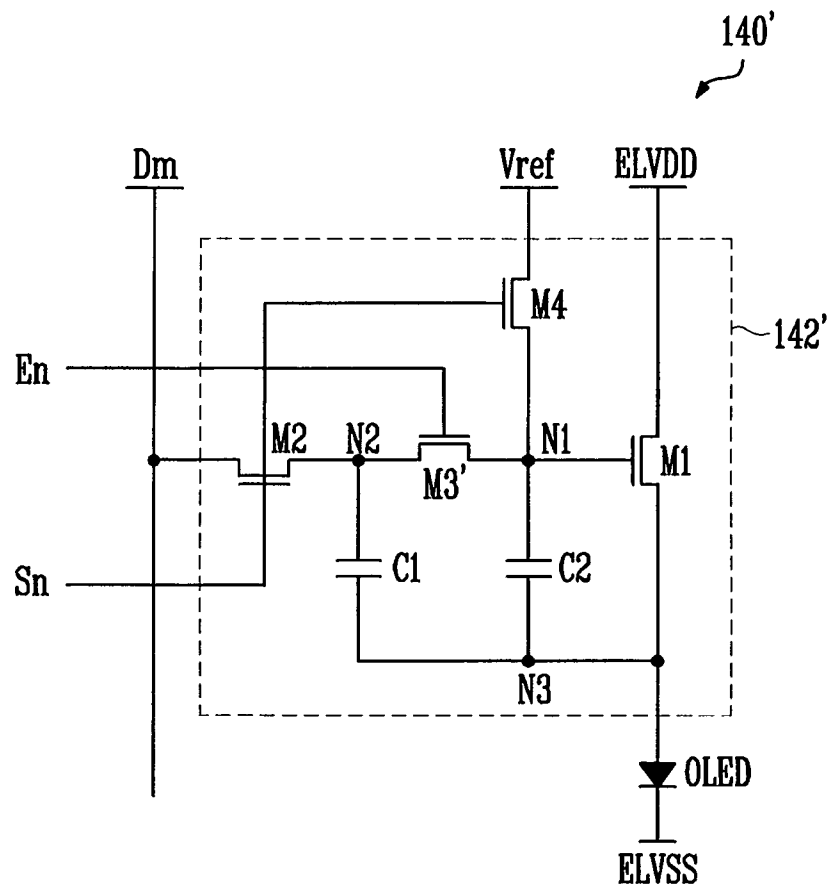


FIG. 6

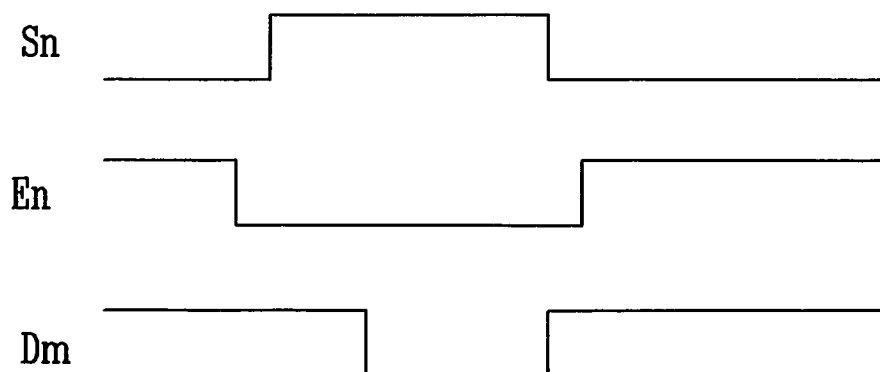

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2192571 A [0013]

专利名称(译)	有机发光显示装置		
公开(公告)号	EP2234093B1	公开(公告)日	2012-05-16
申请号	EP2010157704	申请日	2010-03-25
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星移动显示器有限公司.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHOI SANG MOO KANG CHUL KYU KIM KEUM NAM		
发明人	CHOI, SANG-MOO KANG, CHUL-KYU KIM, KEUM-NAM		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3233 G09G2300/0819 G09G2300/0852 G09G2320/0233 G09G2320/043		
优先权	1020090025841 2009-03-26 KR		
其他公开文献	EP2234093A1		
外部链接	Espacenet		

摘要(译)

有机发光显示装置补偿驱动晶体管的阈值电压的变化。扫描驱动器和数据驱动器驱动多个像素。像素包括有机发光二极管，四个晶体管和两个电容器。第一晶体管控制到有机发光二极管的电流。第二和第三晶体管耦合在来自数据驱动器的数据线和第一晶体管的栅极之间。第四晶体管耦合在参考电源和第一晶体管的栅极之间。两个电容器耦合在有机发光二极管和第三晶体管的相应电极之间。

[Equation 1]

$$V_{N1,N2} = (C1 \times V_{data} + C2 \times V_{ref}) / (C1 + C2)$$