



(11) **EP 3 001 479 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
18.12.2019 Bulletin 2019/51

(51) Int Cl.:
H01L 51/52 (2006.01) H01L 27/32 (2006.01)

(21) Application number: **15187299.1**

(22) Date of filing: **29.09.2015**

(54) **ORGANIC LIGHT-EMITTING DISPLAY DEVICE**

ORGANISCHE LICHEMITTIERENDE ANZEIGEVORRICHTUNG

DISPOSITIF A AFFICHAGE ELECTROLUMINESCENT ORGANIQUE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **29.09.2014 KR 20140130103**

(43) Date of publication of application:
30.03.2016 Bulletin 2016/13

(73) Proprietor: **LG Display Co., Ltd.**
Yeongdeungpo-gu
Seoul
150-721 (KR)

(72) Inventor: **HAN, Myungwoo**
Seoul 05404 (KR)

(74) Representative: **Viering, Jentschura & Partner mbB**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(56) References cited:
US-A1- 2002 180 371 US-A1- 2008 079 360
US-A1- 2013 299 789

EP 3 001 479 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority of Korean Patent Application No. 10-2014-0130103 filed on September 29, 2014, in the Korean Intellectual Property Office.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present disclosure relates to an organic light-emitting display (OLED) device, and more particularly to an OLED device with improved production yields and reliability by eliminating the possibility that a portion of an adhesive layer used for attaching an upper substrate to a lower substrate is not attached on the substrates in a bezel area.

Description of the Related Art

[0003] An organic light-emitting display device (OLED) is capable of producing light on its own and thus does not require an additional light source, as in a liquid crystal display device (LCD). Therefore, an OLED device can be made lighter and thinner. Further, an OLED device has advantages in that it is driven with low voltage to consume less power and realizes better colors. Also, an OLED device has a fast response time, a wide viewing angle and a high contrast ratio (CR). For these reasons, an OLED device is currently under development as the next generation display device.

[0004] FIG. 1 a schematic cross-sectional view of a plurality of OLED devices disposed between mother substrates in the related art. FIG. 1 shows a first OLED device PA1 and a second OLED device PA2 when a lower mother substrate 190 is attached to an upper mother substrate 195. Although two OLED devices (PA1 and PA2) are defined on the lower mother substrate 190 in FIG. 1 for convenience of illustration, the number of the OLED devices defined on the lower mother substrate 190 is not limited to two.

[0005] In the related art, an OLED device is manufactured in such a manner that a plurality of thin-film transistors 120, a plurality of organic light-emitting elements 140, etc. are disposed between the lower mother substrate 190 and the upper mother substrate 195. The lower mother substrate 190 is attached to the upper mother substrate 195, and then the mother substrates are divided into individual organic light-emitting devices.

[0006] Referring to FIG. 1, the plurality of thin-film transistors 120 are disposed in a display area DA of the lower mother substrate 190. A gate insulating layer 131, an interlayer insulating layer 132 and a planarization layer 133 are disposed in the display area DA during the manufacturing process of disposing the thin-film transistor

120.

[0007] The plurality of organic light-emitting elements 140 are disposed on the planarization layer 133. A bank layer 134 is disposed around the plurality of organic light-emitting elements 140. In a bezel area BA, a variety of lines 160 and/or circuitry necessary for driving the display area DA may be disposed. In the bezel area BA, ends of the planarization layer 133 and the bank layer 134 have a tapered shape. Further, there is a step difference between the bezel area BA and the display area DA, which is approximately equal to the sum of the thickness of the planarization layer 133 and the thickness of the bank layer 134.

[0008] In addition, an encapsulation layer 135 for protecting the organic light-emitting element 140 from moisture and oxygen is disposed on the organic light-emitting element 140. When a plurality of OLED devices are manufactured simultaneously by using a set of mother substrates, the position of a cut line CUT along which one OLED device is separated from another is determined between adjacent bezel areas BAs. In addition, a buffer region is disposed closely to the cut line CUT in the bezel area BA. The buffer region is configured to absorb physical impacts, such as shocks or vibrations, generated when the cut line CUT is cut by a cutter or a laser. Therefore, no conductive lines or circuitry are disposed in the buffer region.

[0009] The upper mother substrate 195 is attached to the lower mother substrate 190 by an adhesive layer 170. However, in the bezel area BA of each of the first OLED device PA1 and the second OLED device PA2, there exists an unwanted space due to the step difference. Accordingly, the adhesive layer 170 may not be sufficiently filled up in the unwanted space or may not be securely attached to the upper mother substrate 195 and/or the lower mother substrate 190 at the boundary between the bezel area BA of the first OLED device PA1 and the bezel area BA of the second OLED device PA2. As a result, a space S where the adhesive layer is not properly attached on the substrates may be created in the bezel areas BA as shown in FIG. 1.

[0010] Due to the space S (which is an unwanted space) created in the bezel areas BA when the upper mother substrate 195 is attached to the lower mother substrate 190, pressure applied to the cut line CUT may result in bending or vibrations on the upper mother substrate 195 and the lower mother substrate 190. Shocks or physical impact may occur at this time and may be delivered to the conductive lines 160 and/or the circuitry disposed in the bezel area BA. If such impacts are applied to the bezel area BA, cracks or other types of damage may occur in various components including a variety of lines and insulating layers. Once cracks or damage occur in one component, it can very easily lead to cracks or damage in other components. Even if no cracks occur during the process of attaching the adhesive layer 170, cracks or damage may occur during other processes of cutting the set of mother substrates into individual OLED

devices, such as a process of laser cutting or a process of mechanical scribing, in which strong energy is exerted on the upper mother substrate 195. Therefore, crack may still occur in the lines 160 or other components.

[0011] In addition, in the existing manufacturing process of an OLED device according to the related art, an additional process may be performed after the set of mother substrates has been cut into individual OLED devices. For example, a process of attaching a polarizing plate or a process of applying a protective film onto the upper substrate or the lower substrate using a roller may be performed. During such processes, cracks may occur in the lines 160 or insulating layers due to generated pressure. In addition, pressure is exerted on the lower substrate during a process of attaching a polarizing plate, whereby cracks may occur in the lines 160 or the insulating layers. Accordingly, cracks occur in the line 160 or the insulating layers due to the space S created in the bezel area BA, deteriorating the production yields and reliability of an OLED device.

[0012] As described above, in the OLED device according to the related art, there exists the space S where the adhesive layer 170 is not attached on the lower substrate. Accordingly, the adhesive layer 170 and the lower substrate may peel off or otherwise not be attached properly, and the lower substrate may not be securely attached to the upper substrate. Therefore, delamination or process failure may be caused during subsequent processes. In addition, moisture or oxygen may permeate through the space S from a side surface of an OLED device, deteriorating the lifespan and reliability of the OLED device.

[0013] US 2008/0079360 describes a light-emitting device including a substrate, a plurality of light-emitting elements which are arranged on the substrate, each having two electrodes with a light-emitting layer interposed therebetween, an insulating film which is formed on the substrate and insulates the two electrodes from each other, a peripheral layer which is formed on the substrate and is located outside the insulating film, and a sealing layer which is formed on the substrate and covers the plurality of light-emitting elements and the insulating film, wherein the sealing layer is formed of a single-layer or a plural-layer thin film, and wherein, in the single-layer or the plural-layer thin film, an end of a thin film having the largest thickness is interposed between the insulating film and the peripheral layer.

[0014] US 2002/0180371 describes a display device having a first electrode formed over a first substrate, a first insulating film formed so as to cover an end of the first electrode, a light-emitting organic compound film over the first electrode and in contact with a side face of the first insulating film, a second electrode formed over the light-emitting organic compound film, a second insulating film formed over a periphery of the first substrate; an adhesive layer formed on the second insulating film, a second substrate in contact with the adhesive layer, and a light-emitting element including the light-emitting

organic compound film interposed between the first electrode and the second electrode, wherein the first insulating film and the second insulating film include a same material.

[0015] US 2013/0299789 describes a light-emitting device including a first flexible substrate having a first surface and a second surface opposite to the first surface, a transistor over the first surface, a planarization layer over the transistor, a light-emitting element over the planarization layer, the light-emitting element being electrically connected to the transistor, an adhesive layer over the light-emitting element, the adhesive layer being in contact with the planarization layer, and a second flexible substrate over the adhesive layer, the second surface having a third surface and a fourth surface opposite to the third surface, wherein the adhesive layer is in contact with the third surface, and wherein a first distance from the second surface to an interface between the planarization layer and the adhesive layer is 0.8 to 1.2 times as large as a second distance from the fourth surface to the interface.

SUMMARY

[0016] The inventors of the present disclosure have devised an OLED device having a novel structure for solving the above-described problems associated with the OLED devices according to the related art.

[0017] In view of the above, an object of the present disclosure is to provide an OLED device capable of minimizing a space where an adhesive layer is not attached on a substrate due to a step difference of an encapsulation layer.

[0018] Another object of the present disclosure is to provide an OLED device capable of reducing cracks occurring in lines during a process of attaching an upper substrate to a lower substrate and suppressing a substrate from being peeled off, by minimizing a space where an adhesive layer is not attached on a substrate.

[0019] It should be noted that objects of the present disclosure are not limited to the above-described object, and other objects of the present disclosure will be apparent to those skilled in the art from the following descriptions.

[0020] According to an aspect of the present disclosure, there is provided an organic light-emitting display (OLED) device according to claim 1.

[0021] Preferred embodiments are described in the dependent claims.

[0022] It should be noted that effects of the present disclosure are not limited to those described above and other effects of the present disclosure will be apparent to those skilled in the art from the following descriptions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The above and other aspects, features and other advantages of the present disclosure will be more

clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 a schematic cross-sectional view of a plurality of OLED devices disposed between mother substrates in the related art.

FIG. 2 is a schematic plan view for illustrating areas on a low substrate of an OLED device according to an exemplary embodiment of the present invention; FIG. 3 is a schematic cross-sectional view of the OLED device according to an exemplary embodiment of the present invention, taken along line III - III' of FIG. 2;

FIG. 4 is a schematic cross-sectional plan view of an OLED device according to another exemplary embodiment of the present invention;

FIG. 5 is a schematic cross-sectional plan view of an OLED device according to another exemplary embodiment of the present invention;

FIG. 6 is a schematic cross-sectional plan view of an OLED device according to a comparative example; and

FIG. 7 is a schematic cross-sectional plan view of an OLED device according to another exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] Advantages and features of the present disclosure and methods to achieve them will become apparent from the descriptions of exemplary embodiments herein below with reference to the accompanying drawings. However, the present disclosure is not limited to exemplary embodiments disclosed herein but may be implemented in various different ways. The exemplary embodiments are provided for making the disclosure of the present disclosure thorough and for fully conveying the scope of the present disclosure to those skilled in the art. It is to be noted that the scope of the present disclosure is defined only by the claims.

[0025] The figures, dimensions, ratios, angles, numbers of elements given in the drawings are merely illustrative and are not limiting. Like reference numerals denote like elements throughout the descriptions. Further, in describing the present disclosure, descriptions on well-known technologies may be omitted in order not to obscure the gist of the present disclosure. It is to be noticed that the terms "comprising," "having," "including" and so on, used in the description and claims, should not be interpreted as being restricted to the means listed thereafter unless specifically stated otherwise. Where an indefinite or definite article is used when referring to a singular noun, e.g. "a," "an," "the," this includes a plural of that noun unless specifically stated otherwise.

[0026] In describing elements, they are interpreted as including error margins even without explicit statements.

[0027] In describing positional relationship, such as "an element A on an element B," "an element A above an element B," "an element A below an element B;" and "an element A next to an element B," another element C may be disposed between the elements A and B unless the term "directly" or "immediately" is explicitly used.

[0028] As used herein, a phrase "an element A on an element B" refers to that the element A may be disposed directly on the element B and/or the element A may be disposed indirectly on the element B via another element C.

[0029] The terms first, second, third and the like in the descriptions and in the claims are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. These terms are used to merely distinguish one element from another. Accordingly, as used herein, a first element may be a second element within the technical idea of the present disclosure.

[0030] Like reference numerals denote like elements throughout the descriptions.

[0031] The drawings are not to scale and the relative dimensions of various elements in the drawings are depicted schematically and not necessarily to scale.

[0032] Features of various exemplary embodiments of the present disclosure may be combined partially or totally. As will be clearly appreciated by those skilled in the art, technically various interactions and operations are possible. Various exemplary embodiments can be practiced individually or in combination.

[0033] Hereinafter, exemplary embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0034] FIG. 2 is a schematic plan view for illustrating areas on a lower substrate of an OLED device according to an exemplary embodiment of the present disclosure. FIG. 3 is a schematic cross-sectional view of the OLED device according to an exemplary embodiment of the present disclosure, taken along the line III - III' of FIG. 2. FIGS. 2 and 3 show an OLED device 200 after attaching an upper mother substrate to a lower mother substrate to cut them along a cut line CUT. All the components of the OLED devices according to the embodiments of the present invention are operatively coupled and configured.

[0035] Referring to FIGS. 2 and 3, the OLED device 200 includes a lower substrate 210, a thin-film transistor 220, an organic light-emitting element 240, a transparent encapsulation unit 235, an adhesive layer 270 and an upper substrate 215. In the following descriptions, one thin-film transistor 220 and one organic light-emitting element 240 will be described for convenience of illustration. However, more than one thin-film transistor and more than one organic light-emitting element 240 may be employed.

[0036] The OLED device 200 according to an exemplary embodiment of the present disclosure is of a top emission type in which light generated from the organic

light-emitting layer 240 is emitted via the upper substrate 215. FIG. 3 shows only one sub-pixel region in a display area DA for the sake of simplicity.

[0037] The lower substrate 210 supports thereon a variety of elements of the OLED device 200. The lower substrate 210 is made of an insulative material that is suitable for being subjected to semiconductor deposition processes and supporting the thin-film transistor 220 and the organic light-emitting element 240 disposed on the lower substrate 210. Specifically, the lower substrate 210 may be made of a material having flexibility, e.g., flexible plastic, glass, polyimide, and the like.

[0038] For the lower substrate 210 made of a material having flexibility, it is desirable to dispose a back plate 218 for supporting the lower substrate 210. The back plate 218 acts as a protective film.

[0039] Referring to FIG. 2, the lower substrate 210 of the OLED device 200 includes a display area DA, a bezel area BA and a pad area TA. The display area DA refers to an area of the OLED device 200 where an image is displayed. The bezel area BA refers to an area of the OLED device 200 where no image is displayed and lines 260 and/or circuitry are disposed. The bezel area BA surrounds the display area DA. The pad area TA refers to an area of the OLED device 200 where a pad unit is disposed. An integrated circuit may be disposed in the pad area TA or a flexible printed circuit board may be connected to the pad area TA. The pad area TA may be disposed on a side of the bezel area BA.

[0040] Referring to FIG. 3, in the display area DA of the lower substrate 210, a thin-film transistor 220 is disposed, which includes an active layer 221, a gate electrode 222, a source electrode 223 and a drain electrode 224. Specifically, the active layer 221 is formed on the lower substrate 210. A gate insulating layer 231 for insulating the active layer 221 from the electrode 222 is formed on the active layer 221. The gate electrode 222 is formed on the gate insulating layer 231 above the active layer 221. An interlayer insulating layer 232 is formed over the gate electrode 222 and the gate insulating layer 231. The source electrode 223 and the drain electrode 224 are formed on the interlayer insulating layer 232. The source electrode 223 and the drain electrode 224 are electrically connected to the active layer 221. Herein, for convenience of illustration, only one of thin-film transistors of the OLED device 200 is illustrated, which is connected to the anode 241. In addition, although the thin-film transistor 220 has a coplanar structure herein, an inverted staggered thin-film transistor may also be used. Further, additional multi-buffer layers may be disposed between the lower substrate 210 and the thin-film transistor 220. The multi-buffer layers may be four layers formed by alternately stacking silicon nitride SiN_x and silicon oxide SiO_x .

[0041] A planarization layer 233 is disposed on the thin-film transistor 220. The planarization layer 233 planarizes the area above the thin-film transistor 220. The planarization layer 233 includes a contact hole for

electrically connecting the thin-film transistor 220 to the anode 241 of the organic light-emitting element 240. To amplify the luminous intensity, lens-like features may be patterned on a portion of the planarization layer 233 where the anode 241 is disposed.

[0042] The organic light-emitting element 240 is disposed on the planarization layer 233. The organic light-emitting element 240 includes the anode 241 formed on the planarization layer 233 to be electrically connected to the thin-film transistor 220, an organic light-emitting layer 242 formed on the anode 241, and a cathode 243 formed on the organic light-emitting layer 242. Since the OLED device 200 is of a top emission type, the anode 241 may include a reflective layer 244 for reflecting light generated from the organic light-emitting layer 242 toward the upper substrate 215 and a transparent conductive layer 245 for injecting holes into the organic light-emitting layer 242. Although the anode 241 includes the reflective layer 244 in FIG. 3, the anode 241 may include the transparent conductive layer 245 only and the reflective layer 244 may be formed separated from the anode 241.

[0043] The organic light-emitting layer 242 is an organic layer for emitting light of a particular color and may be one of red, green, blue and white organic light-emitting layer. The organic light-emitting layer 242 may be formed on the entire display area DA of the lower substrate 210, which is the case of the white organic light-emitting layer 242. Although the thickness of the organic light-emitting element 240 is exaggerated in FIG. 3 for the sake of clarity, the organic light-emitting element 240 is actually much thinner than the adhesive layer 270. That is, the thickness as illustrated in the figures is merely for describing the features of the present disclosure and the present disclosure is not limited by the figures. In some embodiments, for the white organic light-emitting layer 242, a color filter or color refiner may be formed above the organic light-emitting element 240.

[0044] A bank layer 234 is disposed over the anode 241 and the passivation layer 233. The bank layer 234 defines a sub-pixel region by separating adjacent sub-pixel regions in the display area DA. In addition, the bank layer 234 may define a pixel region including a plurality of sub-pixel regions. The bank layer 234 is extended from the display area DA to a portion of the bezel area BA.

[0045] The conductive lines 260 are disposed in the bezel area BA of the lower substrate 210. The lines 260 are electrically connected to the thin-film transistor 220 or the organic light-emitting element 240 formed in the display area DA to deliver signals. The lines 260 may be made of the same material as one of various conductive elements formed in the display area DA. The lines 250 may be made of, but is not limited to, the same material as the source electrode 223, the gate electrode 222 and/or the anode 241 as shown in FIG. 3. For example, in the bezel area BA, a gate electrode driving unit may be formed that is made of the same material as the source electrode 223 and the gate electrode 222 to apply a driv-

ing signal to the gate electrode 222. In addition, on the planarization layer 233 above the gate electrode driving unit, a connecting unit 265 that is made of the same material as the anode 241 and applies ground voltage VSS to the cathode 243 may be formed to be connected to a ground voltage line 261.

[0046] In FIG. 3, the gate insulating layer 231, the interlayer insulating layer 232, the planarization layer 233 and the bank layer 234 are all formed in the bezel area BA. However, some of the gate insulating layer 231, the interlayer insulating layer 232, the planarization layer 233 and the bank layer 234 may be selectively formed in the bezel BA.

[0047] In order to protect the organic light-emitting element 240 in the display area DA from moisture and oxygen, the transparent encapsulation unit 235 is disposed in the display area DA and the bezel area BA. In addition, the transparent encapsulation unit 235 is configured to transmit light generated from the organic light-emitting element 240.

[0048] Referring to FIG. 3, the transparent encapsulation unit 235 at least includes a transparent first encapsulation layer 235a, a transparent first particle cover layer 235b, also called first cover layer 235b, and a transparent second encapsulation layer 235c. Furthermore, it is possible to include an additional transparent third encapsulation layer, an additional transparent second particle cover layer, and an additional transparent fourth encapsulation layer on the transparent encapsulation unit 235. But it is not limited thereto. Use of such additional layers depends upon the product to be manufactured and the desired encapsulation and/or particle coverage to be achieved.

[0049] The first encapsulation layer 235a and the second encapsulation layer 235c of the transparent encapsulation unit 235 can be made of a transparent inorganic substance. For example, the transparent inorganic substance may include silicon nitride (SiN_x), silicon oxide (SiO_x), aluminum oxide (Al_xO_y), etc.

[0050] The first particle cover layer 235b of the transparent encapsulation unit 235 can be made of a flowable, transparent organic substance. For example, the transparent organic substance may include an epoxy resin, an acryl resin, silicon oxycarbide (SiOC), etc.

[0051] The first particle cover layer 235b is disposed between the first encapsulation layer 235a and the second encapsulation layer 235c. The first particle cover layer 235b can fill cracks caused by foreign matter generated between the first encapsulation layer 235a and the second encapsulation layer 235c. In particular, cracks caused by foreign matter in the first encapsulation layer 235a or the second encapsulation layer 235c may result in defects in the transparent encapsulation unit 235. The first particle cover layer fills the cracks to reduce defects in the transparent encapsulation unit 235.

[0052] Referring to FIG. 3 again, in order to solve or address the problem relating to the poor attachment discussed above with respect to FIG. 1, a first buffer layer

235d for reducing step difference, which is made of the same material as the first particle cover layer 235b, is disposed in the bezel area BA adjacent to a cut line CUT. The first buffer layer 235d is configured to reduce an area between the upper substrate 215 and the lower substrate 215 at the bezel area BA such that the adhesive layer 270 fills up the reduced area at the bezel area BA. That is, the first buffer layer 235d is configured to reduce a gap difference of the display area DA and the bezel area BA. The first buffer layer 235d is configured to absorb shocks, impacts, vibrations, etc. generated when a cutter or a laser performs a cutting operation along the cut line CUT. The first buffer layer 235d is configured to help maintain a cell gap between the lower substrate 210 and the upper substrate 215. By forming the first buffer layer 235d, the space where the adhesive layer is not attached on the substrate in the bezel area BA can be reduced. Accordingly, with this configuration, the problem relating to the poor attachment can be improved.

[0053] The first encapsulation layer 235a and the second encapsulation layer 235c of the transparent encapsulation unit 235 seal the first particle cover layer 235b in the bezel area BA. Since the first particle cover layer 235b cannot effectively suppress moisture permeation, moisture and oxygen may permeate through the first particle cover layer 235b to result in defects in the organic light-emitting element 240. With the configuration according to an exemplary embodiment of the present disclosure, the first particle cover layer 235b is sealed by the first encapsulation layer 235 and the second encapsulation layer 235, so that the moisture and oxygen permeation path via the first particle cover layer 132 can be eliminated.

[0054] The first encapsulation layer 235a comes in direct contact with the second encapsulation layer 235c between the first particle cover layer 235b and the first buffer layer 235d, so that the first particle cover layer 235b is separated from the first buffer layer 235d. In addition, to ensure the separation between the first particle cover layer 235b and the first buffer layer 235d, the first particle cover layer 235b is spaced apart from the first buffer layer 235d by a predetermined distance.

[0055] Like the first particle cover layer 235b, the buffer layer 235d cannot effectively suppress moisture permeation, and thus moisture and oxygen may permeate through the buffer layer 235d. However, as the first particle cover layer 235b and the buffer layer 235d are separated and spaced apart from each other by the first encapsulation layer 235a and the second encapsulation layer 235c, the first particle cover layer 235b is sealed. Accordingly, moisture permeation path from the first buffer layer 235d to the first particle cover layer 235b can be eliminated. With the configuration according to an exemplary embodiment, the space where the adhesive layer is not attached on the substrate is reduced so that the problem relating to the poor attachment is solved, and the path via which moisture and oxygen permeate from the first buffer layer 235d to the first particle cover layer

235b can be eliminated or at least significantly minimized.

[0056] For example, the width W of a contact surface where the first encapsulation layer 235a meets the second encapsulation layer is determined depending on the distance by which the first buffer layer 235d is spaced apart from the first particle cover layer 235b.

[0057] In order to effectively disconnect the physical contact between the first particle cover layer 235b and the buffer layer 235d, the width W of the contact surface where the first particle cover layer 235b meets the buffer layer 235d is for example, at least $50\ \mu\text{m}$. If the width W of the contact surface is less than $50\ \mu\text{m}$, the first particle cover layer 235b and the first buffer layer 235d may be connected to each other to result in defects.

[0058] For example, the width W of the contact surface of the first encapsulation layer 235a and the second encapsulation layer 235c is equal to or less than $200\ \mu\text{m}$. If the width W of the contact surface is greater than $200\ \mu\text{m}$, a space with a step difference becomes larger, so that the problem relating to the poor attachment cannot be effectively solved.

[0059] Accordingly, the width W of the contact surface where the first encapsulation layer 235a meets the second encapsulation layer 235c may be between $50\ \mu\text{m}$ and $200\ \mu\text{m}$, but not limited thereto. With the configuration according to an exemplary embodiment, it is possible to suppress defects occurring when the first particle cover layer 235d is connected to the first buffer layer 235d and also to solve the problem relating to the poor attachment or poor adhesion.

[0060] Further, in the OLED device 200 according to an exemplary embodiment of the present disclosure, the first buffer layer 235d can be formed together with the first particle cover layer 235 in the same process by simply modifying the mask for foaming the first particle cover layer 235, without an additional process.

[0061] According to an exemplary embodiment of the present disclosure, the OLED device 200 includes the display area DA including the thin-film transistor 220 and the organic light-emitting element 240 formed on the lower substrate 210 and the bezel area BA surrounding the display area DA. In addition, the first encapsulation layer 235a is formed on the organic light-emitting element 240 such that it covers the display area DA and the bezel area BA. On the first encapsulation layer 235a, the first particle cover layer 235b covers the display area DA and at least a portion of the bezel area BA adjacent to the display area DA. Further, the first buffer layer 235d covering at least another portion of the bezel area BA is formed on the first encapsulation layer 235a. On the first particle cover layer 235b and the first buffer layer 235d, the second encapsulation layer 235c covering the display area DA and the bezel area BA is formed. The first particle cover layer 235b is spaced apart from the first buffer layer 235d by a certain distance. The first encapsulation layer 235a and the second encapsulation layer 235c may come in contact with each other at the contact surface where the first particle cover layer 235b is spaced apart

from the first buffer layer 235d by a predetermined distance, to thereby reduce the area of a space where the adhesive layer is not attached on the substrate.

[0062] The adhesive layer 270 is made of an adhesive material for attaching the upper substrate 215 to the lower substrate 210. Specifically, the adhesive layer 270 supports the transparent encapsulation layer 235 disposed on the upper substrate 215 and the lower substrate 210. The adhesive layer 270 may seal the organic light-emitting element 240 formed on the lower substrate 210 to protect the organic light-emitting element 240 from moisture and oxygen coming from outside the OLED device 200. That is, the adhesive layer 270 is configured to sufficiently fill the space between the transparent encapsulation unit 235 and the upper substrate 215 in the display area DA and the bezel area BA.

[0063] The adhesive layer 270 may be made of a variety of materials such as an optical clear adhesive (OCA) film, a liquid optical clear resin (OCR), etc. or combinations thereof. The adhesive material may have thermosetting or pressure-sensitive properties.

[0064] For example, the adhesive layer 270 of the OLED device 200 according to an exemplary embodiment of the present disclosure has a particular thermosetting property. The thermosetting property provides an advantage in that the adhesive layer 270 can flow well for a time period while it is cured under high temperature, so that it can effectively fill the area in the bezel area BA over the buffer layer 235d.

[0065] The adhesive layer 270 can have a thickness of less than $20\ \mu\text{m}$. The space where the adhesive layer is not attached on the substrate, as discussed above, occurs more easily and largely as the thickness of the adhesive layer 270 is smaller. This is because the adhesive layer 270 with a thickness less than $20\ \mu\text{m}$ cannot sufficiently fill the space in case of the related art as explained above. In contrast, in the OLED device 200 according to an exemplary embodiment of the present disclosure, the first buffer layer 235d is disposed in the bezel area BA to suppress the space where the adhesive layer is not attached on the substrate, even with the adhesive layer 270 with a thickness of less than $20\ \mu\text{m}$.

[0066] The upper substrate 215 is disposed to face the lower substrate 210 and supports thereon a variety of elements of the OLED device 200. The upper substrate 215 may be made of a flexible material and may be made of the same material as the lower substrate 210. Although the lower substrate 210 includes the display area DA and the bezel area BA herein, the upper substrate 215 may also have a display area and a bezel area similarly to the lower substrate 210.

[0067] The upper substrate 215 may be made of one of copolyester thermoplastic elastomer (COP), cycoolefin copolymer (COC) and polycarbonate (PC) which can suppress moisture permeation via the front surface of the display area DA. In addition, the upper substrate 215 has optically isotropic properties for improving image quality of the display area DA.

[0068] The upper substrate 215 may be made of the same material as the lower substrate 210. If the upper substrate 215 is made of polyimide, multi-buffer layers may be further disposed between the upper substrate 215 and the adhesive layer 270. The multi-buffer layers may be four layers formed by alternately stacking silicon nitride SiN_x and silicon oxide SiO_x. Such buffer layers are necessary because polyimide cannot effectively suppress moisture permeation, although it is suitable for forming various insulating layers and metal lines. Accordingly, an additional element for suppressing moisture permeation via the front surface, such as multi-buffer layers, is necessary. Additionally, if the upper substrate 215 is made of polyimide, a touch sensor, a temperature sensor, an optical sensor, etc., may be disposed on the upper substrate 215.

[0069] FIG. 4 is a schematic cross-sectional view of an OLED device according to another exemplary embodiment of the present disclosure. Referring to FIG. 4, the bezel area BA of the OLED device 400 includes a first buffer layer for reducing step difference 235d and a second buffer layer for reducing step difference 435. The second buffer layer 435 is disposed under the first encapsulation layer 235a. Further, the first buffer layer 235d is on the second buffer layer 435. With this configuration, the space where the adhesive layer is not attached on the substrate in the bezel area BA can be reduced by the first buffer layer 235d and the second buffer layer 435. In particular, it is possible to suppress the space where the adhesive layer is not attached on the substrate, even with the adhesive layer 270 with a thickness of less than 20 μm. The second buffer layer 435 is configured to further reduce the area between the upper substrate 215 and the lower substrate 210 at the bezel area BA.

[0070] The second buffer layer for reducing step difference 435 of the OLED device 400 according to another exemplary embodiment of the present disclosure is made of the same material as a bank layer 234. Accordingly, the second buffer layer 435 can be formed together with the bank layer 234 in the same process by simply changing the mask, without requiring an additional process. In some embodiments, the second buffer layer 435 may be made of the same material as the planarization layer 233, and may be formed together with the planarization layer 233 in the same process by simply changing the mask, without requiring an additional process.

[0071] The second buffer layer 435 has a flat surface and has a larger width than the first buffer layer 235d. As the second buffer layer 435 is wider than the first buffer layer 235d, the first buffer layer 235d does not easily flow down along the tapered shape of the second buffer layer 435. In particular, if the adhesive layer 270 is made of a thermosetting resin which flows well, it is desirable to make the surface on which the first buffer layer 235d is formed flat.

[0072] The other elements of the OLED device 400, other than those described above, are or can be substantially identical to those of the OLED device 200; and,

therefore, will not be described to avoid redundancy.

[0073] FIG. 5 is a schematic cross-sectional view of an OLED device according to the other exemplary embodiment of the present disclosure. Referring to FIG. 5, in a bezel area BA of an OLED device 500, a first buffer layer for reducing step difference 235d, a second buffer layer for reducing step difference 435 and a third buffer layer for reducing step difference 535 are disposed. The second buffer layer 435 is disposed on the third buffer layer 535. The first buffer 235d and the second buffer layer 435 are on the third buffer layer 535. With this configuration, the space where the adhesive layer is not attached on the substrate in the bezel area BA can be further reduced by the first buffer layer 235d, the second buffer layer 435 and the third buffer layer 535. In particular, it is possible to significantly suppress the space where the adhesive layer is not attached on the substrate, even with the adhesive layer 270 with a thickness of less than 20 μm.

[0074] The third buffer layer 535 for reducing step difference of the OLED device 500 according to the other exemplary embodiment of the present disclosure is made of the same material as the planarization layer 233. The second buffer layer 435 is made of the same material as the bank layer 234. Accordingly, the second buffer layer 435 and the third buffer layer 535 can be formed together with the planarization layer 233 and the bank layer 234, respectively, in the same processes by simply changing the masks, without requiring an additional process.

[0075] The third buffer layer 535 may have a larger width than that of the second buffer layer 435. As the third buffer layer 535 is wider than the second buffer layer 435, the first buffer layer 235d does not easily flow down along the tapered shape of the third buffer layer 535.

[0076] The other elements of the OLED device 500, other than those described above, are or can be substantially identical to those of the OLED device 400 described above; and, therefore, will not be described to avoid redundancy.

[0077] FIG. 6 is a cross-sectional view of an OLED device according to a comparative example. Referring to FIG. 6, in a bezel area BA of an OLED device 600, a first buffer layer for reducing step difference 635 is formed on a second encapsulation layer 235c. With this configuration, almost the whole space where the adhesive layer is not attached on the substrate in the bezel area BA can be filled with the first buffer layer 635. In particular, it is possible to suppress the space where the adhesive layer is not attached on the substrate, even with the adhesive layer 270 with a thickness of less than 10 μm.

[0078] The first buffer layer for reducing step difference 635 of the OLED device 600 according to the comparative example is made of the same material as the first particle cover layer 235b. In particular, as almost the whole space is filled with the first buffer layer 635, the adhesive layer 270 made of a thermosetting resin or a pressure-sensitive material can be used. In addition, the thickness of the adhesive layer 270 may be less than 5 μm.

[0079] The other elements of the OLED device 600, other than those described above, are or can be substantially identical to those of the OLED device 400 described above; and, therefore, will not be described to avoid redundancy.

[0080] FIG. 7 is a cross-sectional view of an OLED device according to another exemplary embodiment of the present disclosure. Referring to FIG. 7, a touch sensing unit 750 is disposed on an upper substrate 215 of an OLED device 700. Multi-buffer layers 736 are disposed under the upper substrate 215. The multi-buffer layers 736 act as layers for protecting the touch sensing unit 750 and the organic light-emitting element 240 from the moisture and oxygen permeating via the upper substrate 215. The multi-buffer layers 736 are formed in the display area DA and the bezel area BA under the upper substrate 215.

[0081] The touch sensing unit 750 is disposed under the upper substrate 215. Specifically, the touch sensing unit 750 is disposed on the bottom surface of the multi-buffer layers 736 under the upper substrate 215. The touch sensing unit 750 includes touch sensing electrodes 751 disposed in the display area DA and touch lines 752 disposed in the bezel area BA. The touch lines 752 deliver touch sensing signals from the touch sensing electrodes 751. The touch sensing unit 750 may be formed below the upper substrate 215 as shown in FIG. 7. In that case, in the OLED device 700 according to another exemplary embodiment of the present disclosure, an in-cell type touch screen panel can be implemented.

[0082] An overcoat layer 737 may be disposed under the touch sensing unit 750. The overcoat layer 737 planarizes the area below the touch sensing unit 750 and is formed in the display area DA and the bezel area BA between the upper substrate 215 and the adhesive layer 270. The overcoat layer 737 may be made of the same material as the planarization layer 233.

[0083] Then, as shown in FIG. 7, a polarizing plate 738 is disposed on the top surface of the upper substrate 215. The polarizing plate 738 is an element for minimizing reflections of external light by reflective material of the OLED device 700 and may be disposed on the top surface of the upper substrate 215. The polarizing plate 738 is an optional element and thus may not be included in the OLED 700. Instead of the polarizing plate 738, another element for reducing reflections of external light may be included in the OLED device 700 or one of existing elements of the OLED device 700 may be altered.

[0084] The other elements of the OLED device 700, other than those described above, are or can be substantially identical to those of the OLED device 200 described above; and, therefore, will not be described to avoid redundancy.

[0085] The exemplary embodiments of the present disclosure can also be described as follows:

An organic light-emitting display device comprises a display area including a thin-film transistor and an organic light-emitting element on a lower substrate; a bezel area

configured to surround the display area; a transparent encapsulation unit including at least a first encapsulation layer, a first particle cover layer and a second encapsulation layer; and a first buffer layer, wherein the first encapsulation layer, on the organic light-emitting element, covers the display area and the bezel area, wherein the first particle cover layer, on the first encapsulation layer, covers the display area and at least a portion of the bezel area adjacent to the display area, wherein the first buffer layer, apart from the first particle cover layer, on the first encapsulation layer, covers at least another portion of the bezel area, wherein the second encapsulation layer, which covers the first particle cover layer and the first buffer layer, is in contact with the first encapsulation layer at a contact surface between the first particle cover layer and the first buffer layer.

[0086] A width of the contact surface may be determined by a distance between the first buffer layer and the first particle cover layer.

[0087] The width of the contact surface may be equal to or less than 200 μm .

[0088] The width of the contact surface may be equal to or greater than 50 μm .

[0089] The organic light-emitting display device may further comprise an upper substrate facing the lower substrate and an adhesive layer between the lower substrate and the upper substrate, wherein the first buffer layer is configured to reduce an area between the upper substrate and the lower substrate at the bezel area such that the adhesive layer fills up the reduced area at the bezel area.

[0090] The first buffer layer may be made of the same material as the first particle cover layer.

[0091] The first buffer layer may be configured to absorb physical impacts generated when the lower substrate and the upper substrate are cut.

[0092] The organic light-emitting display device may further comprise a second buffer layer under the first buffer layer and configured to further reduce the area between the upper substrate and the lower substrate at the bezel area, and the second buffer layer may be made of a same material as a bank layer.

[0093] The second buffer layer may have a flat top surface.

[0094] The first buffer layer may be overlapped with the second buffer layer and a width of the second buffer layer may be wider than a width of the first buffer layer.

[0095] The organic light-emitting display device may further comprise a third buffer layer under the second buffer layer, and the third buffer layer may be made of a same material as a planarization layer and may be configured to further reduce the area between the upper substrate and the lower substrate at the bezel area.

[0096] The second buffer layer may be overlapped with the third buffer layer and a width of the third buffer layer may be wider than the width of the second buffer layer.

[0097] The first encapsulation layer and the second encapsulation layer may be made of an inorganic sub-

stance and the first particle cover layer and the first buffer layer may be made of an organic substance.

[0098] The organic light-emitting display device may further comprise an upper substrate facing the lower substrate, and the organic light-emitting display device may be a top emission type in which light generated in the organic light-emitting element is emitted via the upper substrate.

[0099] A thickness of the adhesive layer may be equal to or less than 20 μm.

[0100] Thus far, exemplary embodiments of the present disclosure have been described in detail with reference to the accompanying drawings. However, the present disclosure is not limited to the exemplary embodiments, and modifications and variations can be made thereto without departing from the technical idea of the present disclosure. Accordingly, the exemplary embodiments described herein are merely illustrative and are not intended to limit the scope of the present disclosure. The technical idea of the present disclosure is not limited by the exemplary embodiments. The scope of protection sought by the present disclosure is defined by the appended claims.

Claims

1. An organic light-emitting display device (200) comprising:

- a lower substrate (210);
- an upper substrate (215) facing the lower substrate (210);
- an adhesive layer (270) between the lower substrate (210) and the upper substrate (215),
- a display area (DA) including a thin-film transistor (220) and an organic light-emitting element (240) on the lower substrate (210);
- a bezel area (BA) configured to surround the display area (DA);
- a transparent encapsulation unit (235) including at least a first encapsulation layer (235a), a first cover layer (235b) and a second encapsulation layer (235c); and
- a first buffer layer (235d), wherein the first buffer layer (235d) is configured to reduce the space between the upper substrate (215) and the lower substrate (210) at the bezel area (BA) such that the adhesive layer (270) fills up the reduced space at the bezel area (BA),
- wherein the first encapsulation layer (235a) is formed on the organic light-emitting element (240) and covers the display area (DA) and the bezel area (BA),
- wherein the first cover layer (235b) is formed on the first encapsulation layer (235a) and covers the display area (DA) and at least a portion of the bezel area (BA) adjacent to the display area

(DA),

wherein the first buffer layer (235d) is formed laterally spaced apart from the first cover layer (235b) and on the first encapsulation layer (235a) and is further formed to cover at least another portion of the bezel area (BA), the at least another portion being spaced apart from the portion of the bezel area (BA) covered by the first cover layer (235b), and

wherein the second encapsulation layer (235c), which covers the first cover layer (235b) and the first buffer layer (235d), is in contact with the first encapsulation layer (235a) at a contact surface of the first encapsulation layer (235a) and the second encapsulation layer (235c) between the first cover layer (235b) and the first buffer layer (235d), and

wherein the first buffer layer (235d) is made of the same material as the first cover layer (235b), wherein the adhesive layer (270) is configured to fill the space between the transparent encapsulation unit (235) and the upper substrate (215) in the display area (DA) and the bezel area (BA).

2. The organic light-emitting display device (200) of claim 1, wherein the first cover layer (235b) is spaced apart from the first buffer layer (235d) by a predetermined distance, and wherein the width (W) of the contact surface is the predetermined distance.

3. The organic light-emitting display device (200) of claim 2, wherein the width (W) of the contact surface is equal to or less than 200 μm.

4. The organic light-emitting display device (200) of claim 3, wherein the width (W) of the contact surface is equal to or greater than 50 μm.

5. The organic light-emitting display device (500) of claim 4, further comprising a planarization layer (233) on the thin-film transistor (220), an anode (241) of the organic light emitting element (240) on the planarization layer (233), a bank layer (234) on the anode (241) and the planarization layer (233) and defining a sub-pixel region by separating adjacent sub-pixel regions in the display area (DA), and a second buffer layer (435) under the first buffer layer (235d) and configured to further reduce the space between the upper substrate (215) and the lower substrate (210) at the bezel area (BA), the second buffer layer being made of the same material as the bank layer (234).

6. The organic light-emitting display device (500) of claim 5, wherein the second buffer layer (435) has a flat top surface.

7. The organic light-emitting display device (500) of

claim 5 or 6, wherein the first buffer layer (235d) overlaps the second buffer layer (435) and the width of the second buffer layer (435) is wider than the width of the first buffer layer (235d).

8. The organic light-emitting display device (500) of any one of claims 5 to 7, further comprising a third buffer layer (535) under the second buffer layer (435), wherein the third buffer layer is made of the same material as the planarization layer (233) and is configured to further reduce the space between the upper substrate (215) and the lower substrate (210) at the bezel area (BA).
9. The organic light-emitting display device (500) of claim 8, wherein the second buffer layer (435) overlaps the third buffer layer (535) and the width of the third buffer layer (535) is wider than the width of the second buffer layer (435).
10. The organic light-emitting display device (200) of any one of claims 1 to 9, wherein the first encapsulation layer (235a) and the second encapsulation layer (235c) are made of an inorganic substance, and the first cover layer (235b) and the first buffer layer (235d) are made of an organic substance.
11. The organic light-emitting display device (200) of any one of claims 1 to 4, wherein the organic light-emitting display device is a top emission type in which light generated in the organic light-emitting element (240) is emitted via the upper substrate (215).
12. The organic light-emitting display device (200) of any one of claims 1 to 9, wherein the thickness of the adhesive layer (270) is equal to or less than 20 μm .

Patentansprüche

1. Organische lichtemittierende Anzeigevorrichtung (200), aufweisend:
- ein unteres Substrat (210),
 - ein oberes Substrat (215), das dem unteren Substrat (210) zugewandt ist,
 - eine Klebstoffschicht (270) zwischen dem unteren Substrat (210) und dem oberen Substrat (215),
 - einen Anzeigebereich (DA) mit einem Dünnschichttransistor (220) und einem organischen lichtemittierenden Element (240) auf dem unteren Substrat (210);
 - einen Einfassungsbereich (BA), der konfiguriert ist, um den Anzeigebereich (DA) zu umgeben;
 - eine transparente Verkapselungseinheit (235) mit mindestens einer ersten Verkapselungsschicht (235a), einer ersten Deckschicht (235b)

und einer zweiten Verkapselungsschicht (235c); und

eine erste Pufferschicht (235d), wobei die erste Pufferschicht (235d) konfiguriert ist, um den Raum zwischen dem oberen Substrat (215) und dem unteren Substrat (210) an dem Einfassungsbereich (BA) derart zu reduzieren, dass die Klebstoffschicht (270) den reduzierten Raum an dem Einfassungsbereich (BA) ausfüllt, wobei die erste Verkapselungsschicht (235a) auf dem organischen lichtemittierenden Element (240) ausgebildet ist, und den Anzeigebereich (DA) und den Einfassungsbereich (BA) bedeckt,

wobei die erste Deckschicht (235b) auf der ersten Verkapselungsschicht (235a) ausgebildet ist und den Anzeigebereich (DA) und mindestens einen zu dem Anzeigebereich (DA) benachbarten Teil des Einfassungsbereichs (BA) bedeckt,

wobei die erste Pufferschicht (235d) seitlich beabstandet von der ersten Deckschicht (235b) und auf der ersten Verkapselungsschicht (235a) ausgebildet ist und ferner ausgebildet ist, um mindestens einen anderen Teil des Einfassungsbereichs (BA) zu bedecken, wobei der mindestens eine andere Teil von dem Teil des Einfassungsbereichs (BA) beabstandet ist, der von der ersten Deckschicht (235b) bedeckt ist, und

wobei die zweite Verkapselungsschicht (235c), die die erste Deckschicht (235b) und die erste Pufferschicht (235d) bedeckt, mit der ersten Verkapselungsschicht (235a) an einer Kontaktfläche der ersten Verkapselungsschicht (235a) und der zweiten Verkapselungsschicht (235c) zwischen der ersten Deckschicht (235b) und der ersten Pufferschicht (235d) in Kontakt ist, und wobei die erste Pufferschicht (235d) aus dem gleichen Material wie die erste Deckschicht (235b) hergestellt ist, wobei die Klebstoffschicht (270) konfiguriert ist, um den Raum zwischen der transparenten Verkapselungseinheit (235) und dem oberen Substrat (215) in dem Anzeigebereich (DA) und dem Einfassungsbereich (BA) auszufüllen.

2. Die organische lichtemittierende Anzeigevorrichtung (200) nach Anspruch 1, wobei die erste Deckschicht (235b) von der ersten Pufferschicht (235d) um einen vorbestimmten Abstand beabstandet ist, und wobei die Breite (W) der Kontaktfläche der vorbestimmte Abstand ist.
3. Die organische lichtemittierende Anzeigevorrichtung (200) nach Anspruch 2, wobei die Breite (W) der Kontaktfläche gleich oder mehr als 200 μm beträgt.

4. Die organische lichtemittierende Anzeigevorrichtung (200) nach Anspruch 3, wobei die Breite (W) der Kontaktfläche gleich oder weniger als 50 μm beträgt.
5. Die organische lichtemittierende Anzeigevorrichtung (500) nach Anspruch 4, ferner aufweisend eine Planarisierungsschicht (233) auf dem Dünnschichttransistor (220), eine Anode (241) des organischen lichtemittierenden Elements (240) auf der Planarisierungsschicht (233), eine Bankschicht (234) auf der Anode (241) und auf der Planarisierungsschicht (233), die durch Trennen von benachbarten Subpixelbereichen in dem Anzeigebereich (DA) einen Subpixelbereich definiert, und eine zweite Pufferschicht (435) unter der ersten Pufferschicht (235d), die konfiguriert ist, den Raum zwischen dem oberen Substrat (215) und dem unteren Substrat (210) an dem Einfassungsbereich (BA) weiter zu reduzieren, wobei die zweite Pufferschicht aus dem gleichen Material wie die Bankschicht (234) hergestellt ist.
6. Die organische lichtemittierende Anzeigevorrichtung (500) nach Anspruch 5, wobei die zweite Pufferschicht (435) eine flache obere Oberfläche aufweist.
7. Die organische lichtemittierende Anzeigevorrichtung (500) nach Anspruch 5 oder 6, wobei die erste Pufferschicht (235d) die zweite Pufferschicht (435) überlappt und die Breite der zweiten Pufferschicht (435) breiter ist als die Breite der ersten Pufferschicht (235d).
8. Die organische lichtemittierende Anzeigevorrichtung (500) nach einem der Ansprüche 5 bis 7, ferner aufweisend eine dritte Pufferschicht (535) unter der zweiten Pufferschicht (435), wobei die dritte Pufferschicht aus dem gleichen Material wie die Planarisierungsschicht (233) hergestellt ist und konfiguriert ist, den Raum zwischen dem oberen Substrat (215) und dem unteren Substrat (210) an dem Einfassungsbereich (BA) weiter zu reduzieren.
9. Die organische lichtemittierende Anzeigevorrichtung (500) nach Anspruch 8, wobei die zweite Pufferschicht (435) die dritte Pufferschicht (535) überlappt und die Breite der dritten Pufferschicht (535) breiter ist als die Breite der zweiten Pufferschicht (435).
10. Die organische lichtemittierende Anzeigevorrichtung (200) nach einem der Ansprüche 1 bis 9, wobei die erste Verkapselungsschicht (235a) und die zweite Verkapselungsschicht (235c) aus einer anorganischen Substanz hergestellt sind, und die erste Deckschicht (235b) und die erste Pufferschicht (235d) aus

einer organischen Substanz hergestellt sind.

11. Die organische lichtemittierende Anzeigevorrichtung (200) nach einem der Ansprüche 1 bis 4, wobei die organische lichtemittierende Anzeigevorrichtung vom Top-Emissionstyp ist, in dem Licht, das in dem organischen lichtemittierenden Element (240) erzeugt wird, durch das obere Substrat (215) emittiert wird.
12. Die organische lichtemittierende Anzeigevorrichtung (200) nach einem der Ansprüche 1 bis 9, wobei die Dicke der Klebstoffschicht (270) gleich oder weniger als 20 μm beträgt.

Revendications

1. Dispositif d'affichage électroluminescent organique (200) comprenant :

un substrat inférieur (210) ;
 un substrat supérieur (215) qui fait face au substrat inférieur (210) ;
 une couche adhésive (270) entre le substrat inférieur (210) et le substrat supérieur (215),
 une zone d'affichage (DA) comprenant un transistor à couches minces (220) et un élément électroluminescent organique (240) sur le substrat inférieur (210) ;
 une zone d'encadrement (BA) configurée pour entourer la zone d'affichage (DA) ;
 une unité encapsulation transparente (235) comprenant au moins une première couche encapsulation (235a), une première couche couverture (235b) et une seconde couche encapsulation (235c) ; et
 une première couche tampon (235d), où la première couche tampon (235d) est configurée pour réduire l'espace entre le substrat supérieur (215) et le substrat inférieur (210) au niveau de la zone d'encadrement (BA), de telle sorte que la couche adhésive (270) remplisse l'espace réduit au niveau de la zone d'encadrement (BA), où la première couche encapsulation (235a) est formée sur l'élément électroluminescent organique (240) et couvre la zone d'affichage (DA) et la zone d'encadrement (BA), où la première couche couverture (235b) est formée sur la première couche encapsulation (235a) et couvre la zone d'affichage (DA) et une partie au moins de la zone d'encadrement (BA) adjacente à la zone d'affichage (DA), où la première couche tampon (235d) est formée espacée latéralement de la première couche couverture (235b) et sur la première couche encapsulation (235a), et est formée en outre pour couvrir une autre partie au moins de la zone

- d'encadrement (BA), la ou les autres parties étant espacées de la partie de la zone d'encadrement (BA) couverte par la première couche couverture (235b), et
- où la seconde couche encapsulation (235c), qui couvre la première couche couverture (235b) et la première couche tampon (235d), est en contact avec la première couche encapsulation (235a) au niveau d'une surface de contact de la première couche encapsulation (235a) et de la seconde couche encapsulation (235c) entre la première couche couverture (235b) et la première couche tampon (235d), et
- où la première couche tampon (235d) est réalisée dans le même matériau que celui de la première couche couverture (235b), où la couche adhésive (270) est configurée afin de remplir l'espace entre l'unité encapsulation transparente (235) et le substrat supérieur (215) dans la zone d'affichage (DA) et la zone d'encadrement (BA).
- 2.** Dispositif d'affichage électroluminescent organique (200) selon la revendication 1 :
- où la première couche couverture (235b) est espacée de la première couche tampon (235d) d'une distance prédéterminée, et
- où la largeur (W) de la surface de contact est la distance prédéterminée.
- 3.** Dispositif d'affichage électroluminescent organique (200) selon la revendication 2, où la largeur (W) de la surface de contact est égale ou inférieure à 200 μm .
- 4.** Dispositif d'affichage électroluminescent organique (200) selon la revendication 3, où la largeur (W) de la surface de contact est égale ou supérieure à 50 μm .
- 5.** Dispositif d'affichage électroluminescent organique (500) selon la revendication 4 :
- comprenant en outre une couche planarisation (233) sur le transistor à couches minces (220), une anode (241) de l'élément électroluminescent organique (240) sur la couche planarisation (233), une couche rangée (234) sur l'anode (241) et la couche planarisation (233), et définissant une région de pixel secondaire en séparant des régions de pixels secondaires adjacentes dans la zone d'affichage (DA), et une deuxième couche tampon (435) sous la première couche tampon (235d), et configurée pour réduire davantage l'espace entre le substrat supérieur (215) et le substrat inférieur (210) au niveau de la zone d'encadrement (BA), la deuxième couche tampon étant réalisée dans le même matériau que celui de la couche rangée (234).
- 6.** Dispositif d'affichage électroluminescent organique (500) selon la revendication 5, où la deuxième couche tampon (435) présente une surface supérieure plate.
- 7.** Dispositif d'affichage électroluminescent organique (500) selon la revendication 5 ou 6, où la première couche tampon (235d) chevauche la deuxième couche tampon (435), et la largeur de la deuxième couche tampon (435) est plus large que la largeur de la première couche tampon (235d).
- 8.** Dispositif d'affichage électroluminescent organique (500) selon l'une quelconque des revendications 5 à 7, comprenant en outre une troisième couche tampon (535) sous la deuxième couche tampon (435), où la troisième couche tampon est réalisée dans le même matériau que celui de la couche planarisation (233), et est configurée pour réduire davantage l'espace entre le substrat supérieur (215) et le substrat inférieur (210) au niveau de la zone d'encadrement (BA).
- 9.** Dispositif d'affichage électroluminescent organique (500) selon la revendication 8, où la deuxième couche tampon (435) chevauche la troisième couche tampon (535), et la largeur de la troisième couche tampon (535) est plus large que la largeur de la deuxième couche tampon (435).
- 10.** Dispositif d'affichage électroluminescent organique (200) selon l'une quelconque des revendications 1 à 9, où la première couche encapsulation (235a) et la seconde couche encapsulation (235c) sont réalisées dans une substance inorganique, et la première couche couverture (235b) et la première couche tampon (235d) sont réalisées dans une substance organique.
- 11.** Dispositif d'affichage électroluminescent organique (200) selon l'une quelconque des revendications 1 à 4, où le dispositif d'affichage électroluminescent organique est du type à émission par le haut dans lequel la lumière générée dans l'élément électroluminescent organique (240) est émise par l'intermédiaire du substrat supérieur (215).
- 12.** Dispositif d'affichage électroluminescent organique (200) selon l'une quelconque des revendications 1 à 9, où l'épaisseur de la couche adhésive (270) est égale ou inférieure à 20 μm .

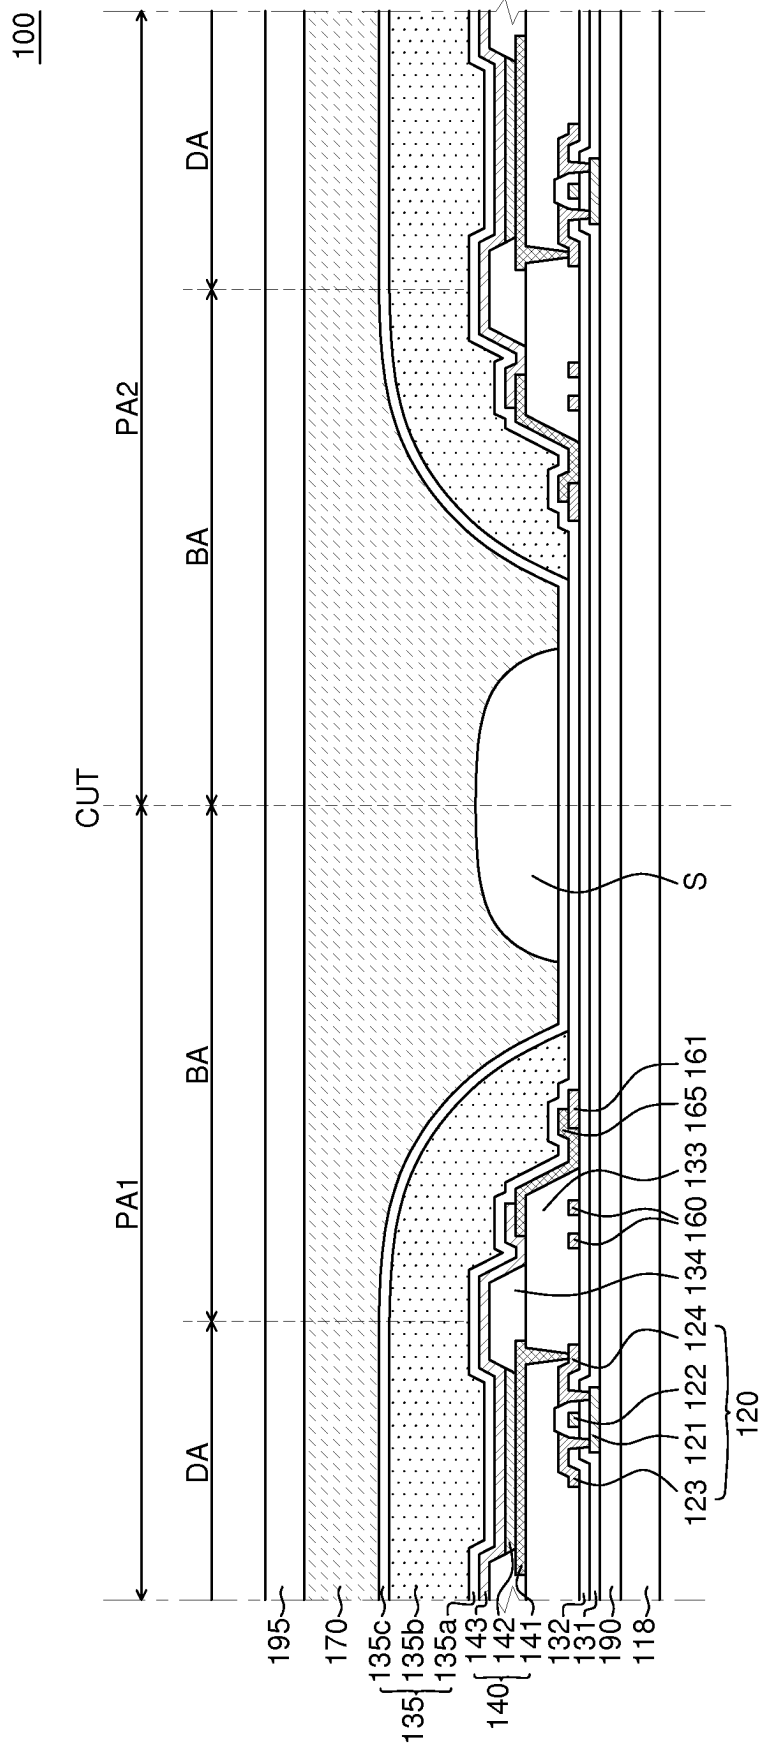


FIG. 1

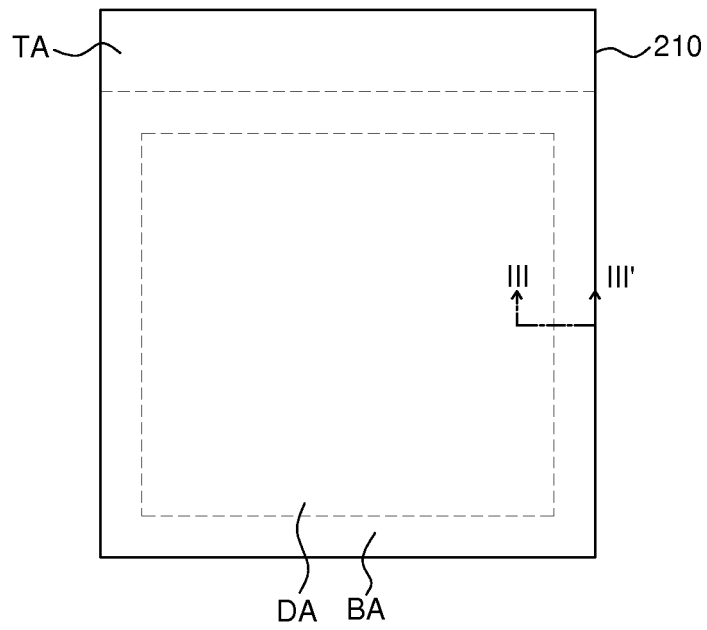


FIG. 2

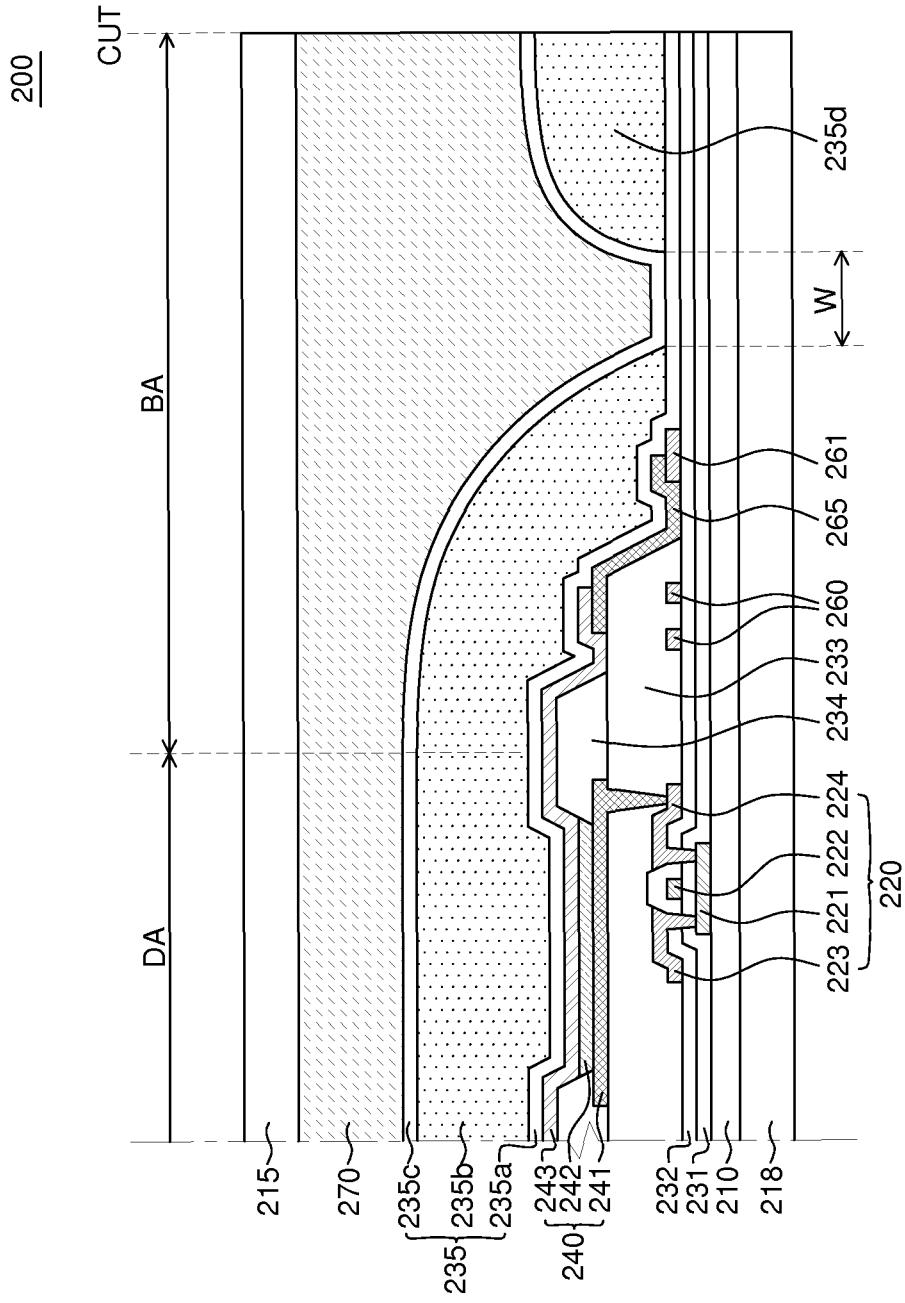


FIG. 3

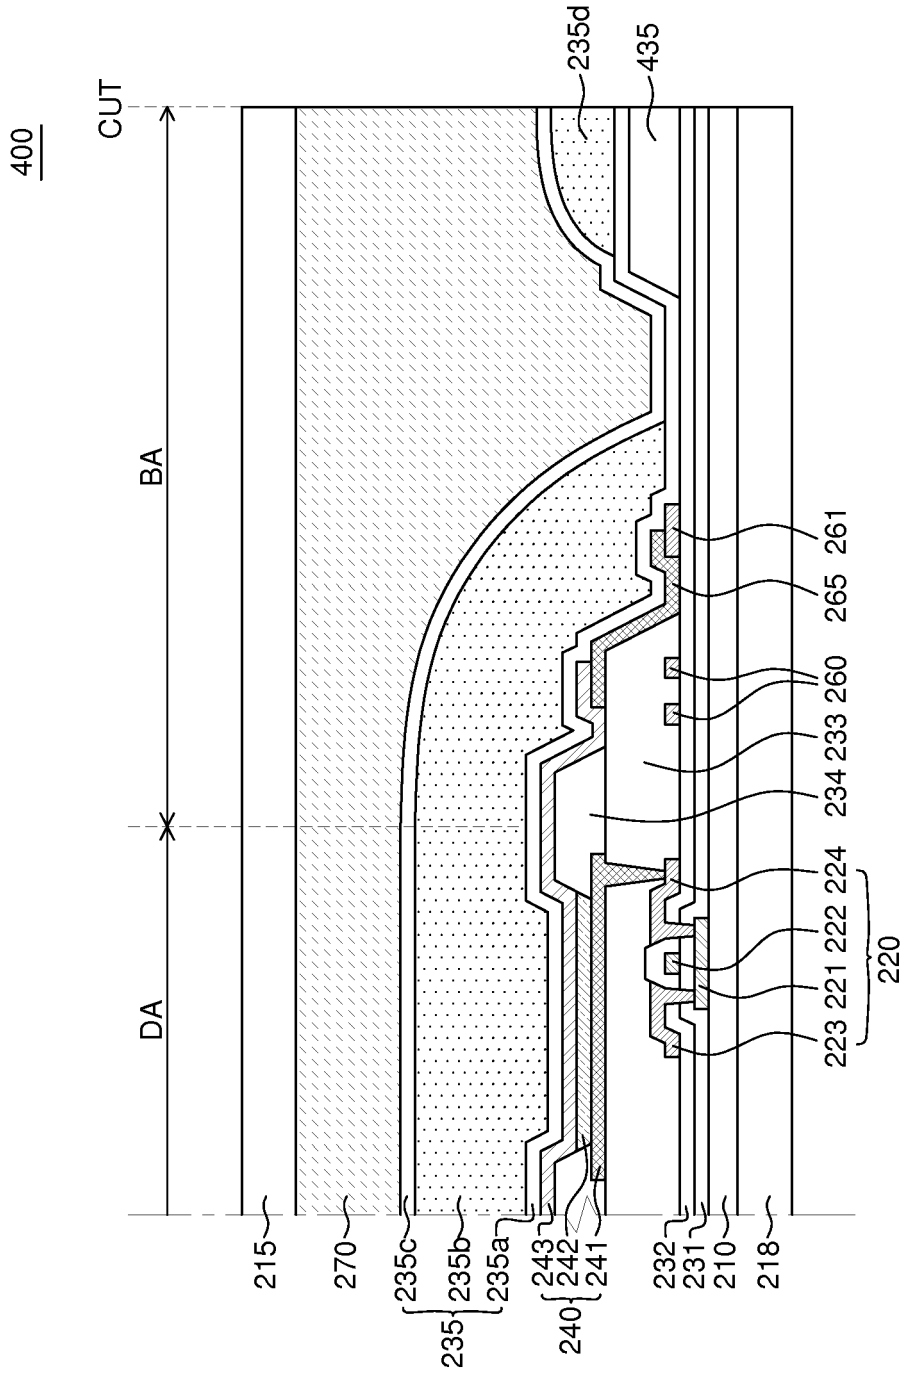


FIG. 4

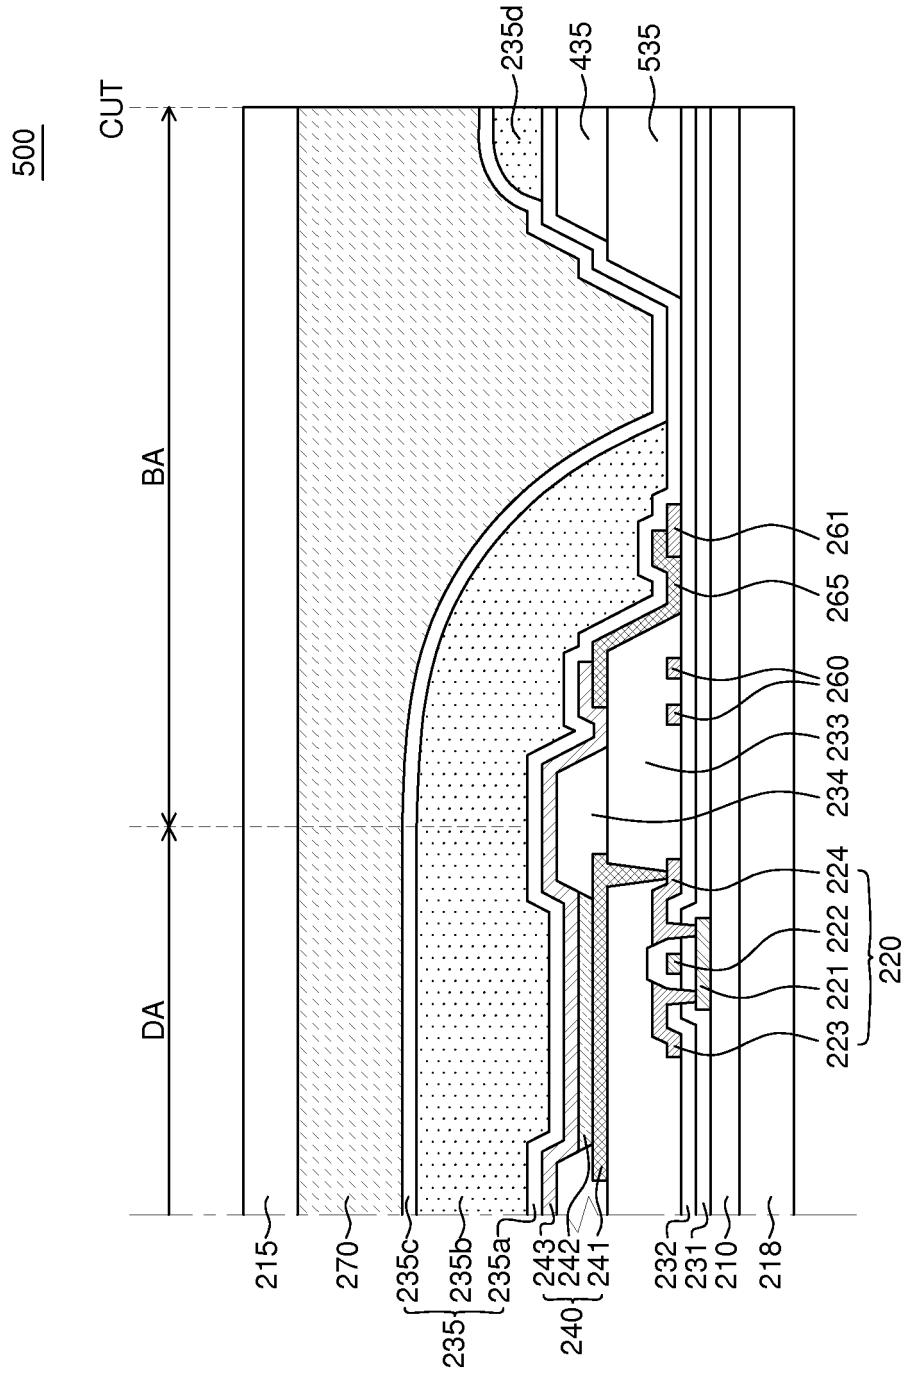


FIG. 5

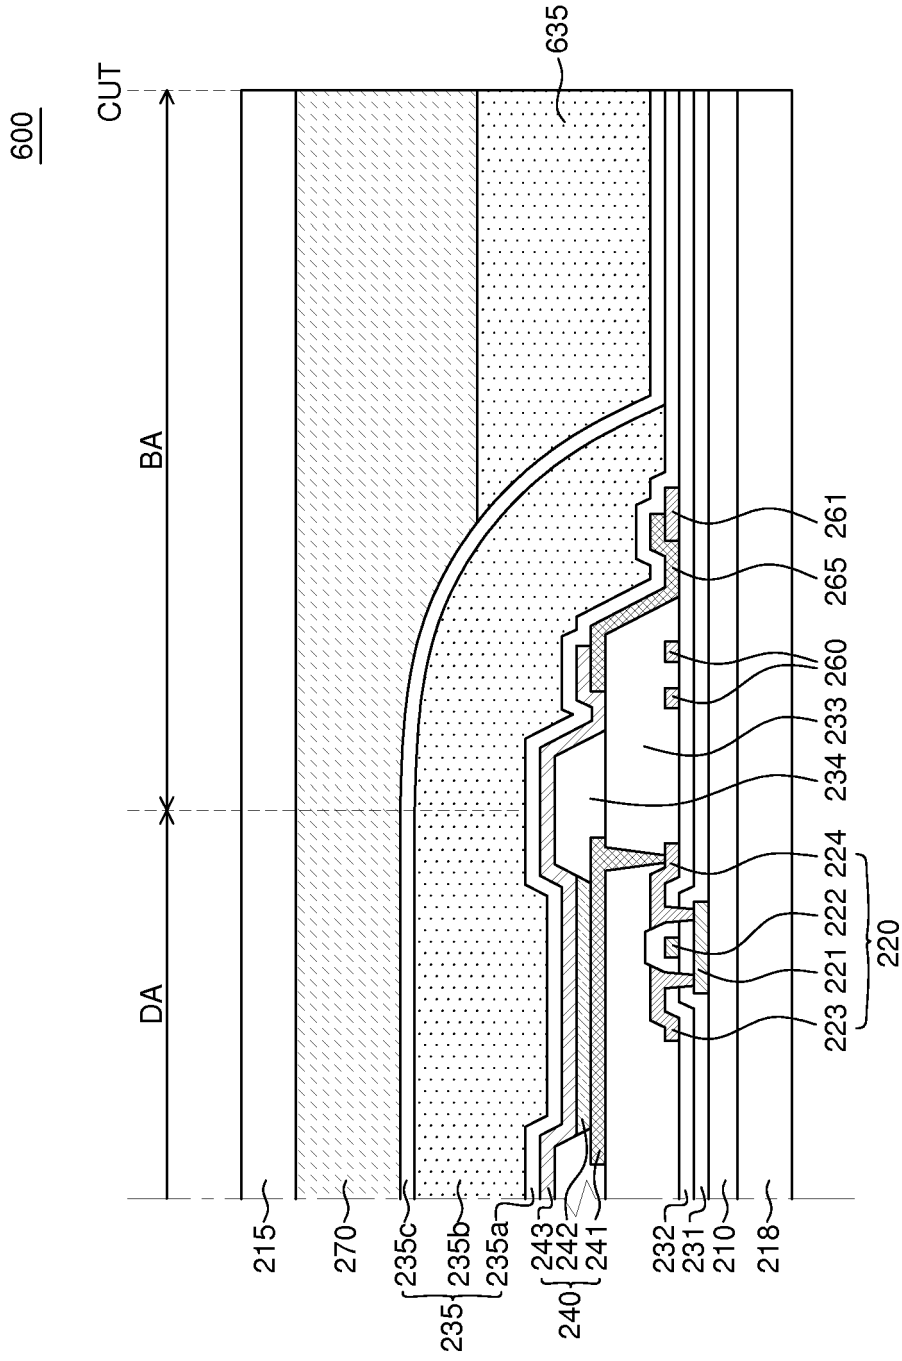


FIG. 6

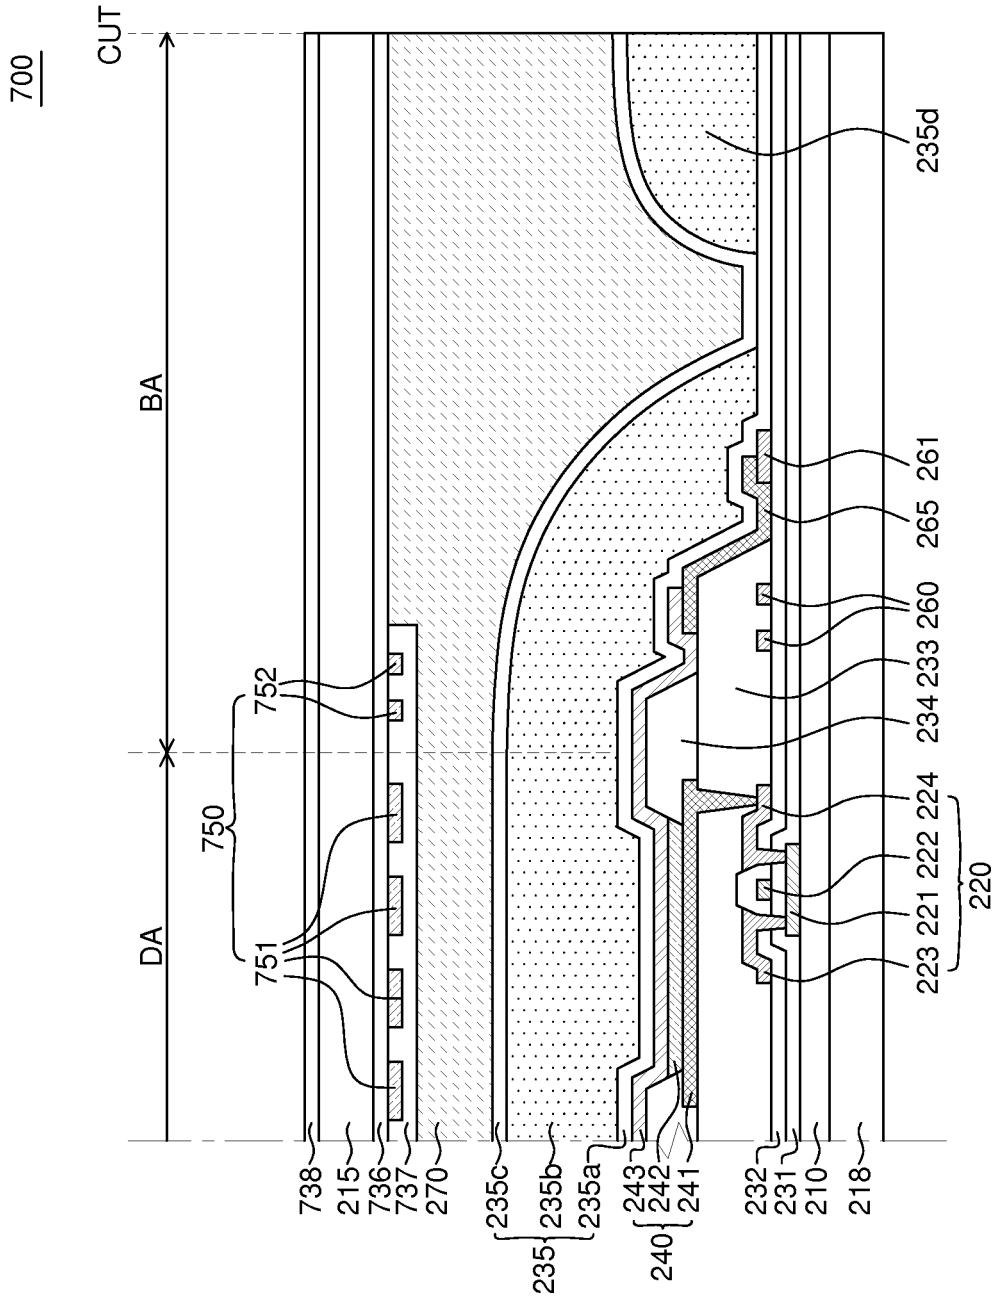


FIG. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020140130103 [0001]
- US 20080079360 A [0013]
- US 20020180371 A [0014]
- US 20130299789 A [0015]

专利名称(译)	有机发光显示装置		
公开(公告)号	EP3001479B1	公开(公告)日	2019-12-18
申请号	EP2015187299	申请日	2015-09-29
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	HAN MYUNGWOO		
发明人	HAN, MYUNGWOO		
IPC分类号	H01L51/52 H01L27/32		
CPC分类号	H01L51/5253 H01L27/3244 H01L27/3246 H01L51/5246 H01L2251/566 H01L27/3248 H01L2251/301 H01L2251/5315 H01L2251/558		
优先权	1020140130103 2014-09-29 KR		
其他公开文献	EP3001479A1		
外部链接	Espacenet		

摘要(译)

提供了一种有机发光显示装置 (200)。该装置包括显示区域 (DA)，该显示区域在下基板 (210) 上包括有机发光元件 (240)。围绕显示区域的边框区域 (BA)；透明封装单元 (235)，其至少包括第一封装层 (235a)，第一粒子覆盖层 (235b) 和第二封装层 (235c)；第一缓冲层 (235d)。第一封装层 (235a) 覆盖显示区域 (DA) 和边框区域 (BA)。第一粒子覆盖层 (235b) 覆盖显示区域 (DA) 和与显示区域相邻的边框区域 (BA) 的至少一部分。除了第一颗粒覆盖层 (235b) 之外，第一缓冲层 (235d) 覆盖边框区域 (BA) 的至少另一部分。覆盖第一粒子覆盖层 (235b) 和第一缓冲层 (235d) 的第二封装层 (235c) 在第一粒子覆盖层 (235b) 之间的接触表面处与第一封装层 (235a) 接触。) 和第一缓冲层 (235d)。

