



US009504429B1

(12) **United States Patent**
Minkoff

(10) **Patent No.:** **US 9,504,429 B1**
(45) **Date of Patent:** **Nov. 29, 2016**

(54) **APPARATUS FOR CONTROLLING THE
OPERATION OF AN MRI SYSTEM**

(71) Applicant: **Fonar Corporation**, Melville, NY (US)

(72) Inventor: **Lawrence A. Minkoff**, Lattingtown,
NY (US)

(73) Assignee: **Fonar Corporation**, Melville, NY (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/926,275**

(22) Filed: **Jun. 25, 2013**

Related U.S. Application Data

(60) Provisional application No. 61/665,547, filed on Jun.
28, 2012.

(51) **Int. Cl.**

A61B 5/055 (2006.01)
A61B 5/00 (2006.01)
G01R 33/567 (2006.01)
G01R 33/36 (2006.01)

(52) **U.S. Cl.**

CPC **A61B 5/7285** (2013.01); **A61B 5/0006**
(2013.01); **A61B 5/055** (2013.01); **G01R**
33/3692 (2013.01); **G01R 33/5673** (2013.01)

(58) **Field of Classification Search**

CPC .. A61B 5/055; A61B 5/0006; A61B 5/7285;
G01R 33/3692; G01R 33/5616; G01R
33/56375; G01R 33/56383; G01R 33/5673;
H04L 29/12943; H04L 61/6072; H04W
76/021; H04W 76/023; H04W 84/18
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,903,704 A * 2/1990 Van Eggermond et al. . 600/413
6,032,069 A * 2/2000 Elgavish et al. 600/413

6,052,614 A * 4/2000 Morris et al. 600/509
7,590,439 B2 * 9/2009 Raridan A61B 5/14552
600/344
8,433,382 B2 * 4/2013 Li A61B 5/0261
600/310
2002/0049389 A1 * 4/2002 Abreu 600/558
2006/0226841 A1 * 10/2006 Boskamp et al. 324/322
2006/0241392 A1 * 10/2006 Feinstein et al. 600/422
2010/0046443 A1 * 2/2010 Jia et al. 370/329
2010/0087729 A1 * 4/2010 Takizawa et al. 600/413
2010/0113902 A1 * 5/2010 Hete et al. 600/323
2011/0074409 A1 * 3/2011 Stoughton et al. 324/307
2014/0171783 A1 * 6/2014 Schmidt et al. 600/413

FOREIGN PATENT DOCUMENTS

WO WO 0064335 A1 * 11/2000

* cited by examiner


Primary Examiner — Ruth S Smith

(74) *Attorney, Agent, or Firm* — Lerner, David,
Littenberg, Krumholz & Mentlik, LLP

(57) **ABSTRACT**

An MRI system is provided that includes a physiological sensor used for gating the MRI system and an MRI control terminal wirelessly connected to the sensor. The physiological sensor is used to monitor a physiological parameter of a user, such as pressure pulse, and communicate data regarding the monitored physiological parameter to the MRI control terminal. The MRI control terminal processes the data received from the physiological sensor and determines whether a triggering condition on the data is met. When it is determined that the triggering condition is met, the MRI control terminal initiates the acquisition of a data set. The acquisition of the data set involves initiating a pre-programmed pulse sequence and acquiring RF signals emitted from the patient's tissue as a result of the execution of the pre-programmed pulse sequence.

15 Claims, 9 Drawing Sheets

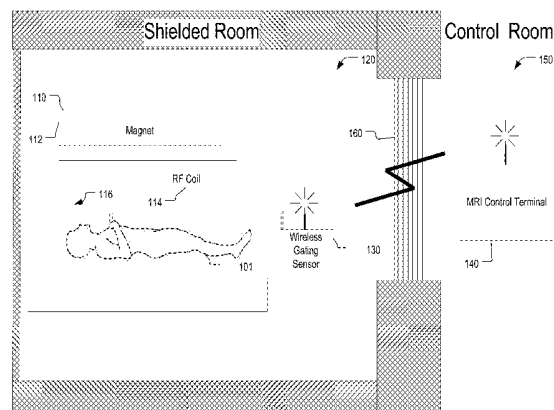

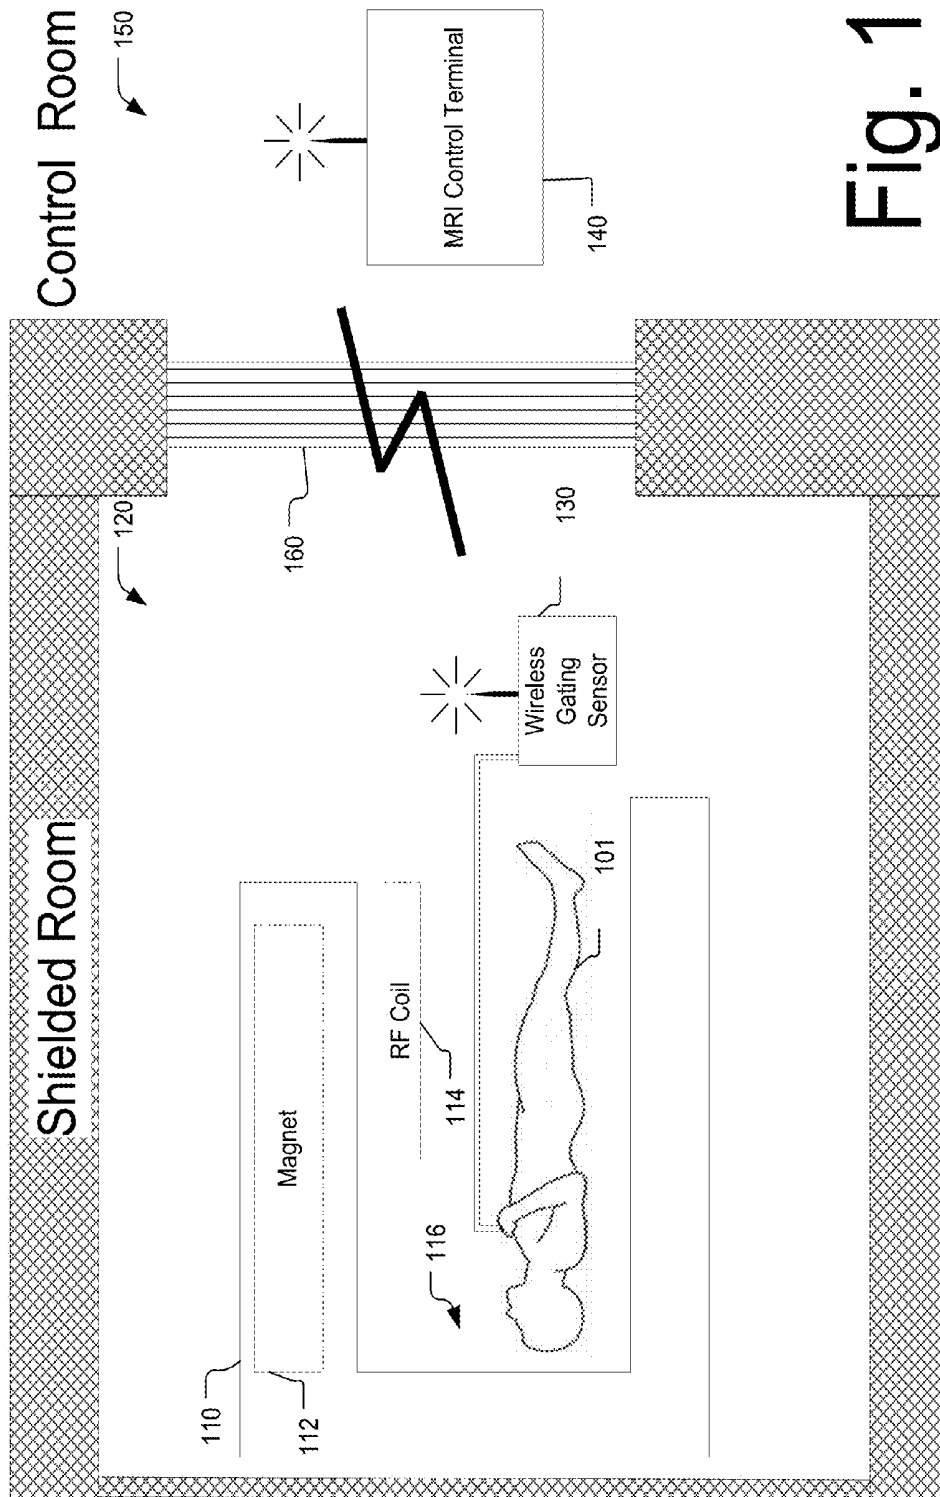


Fig. 1

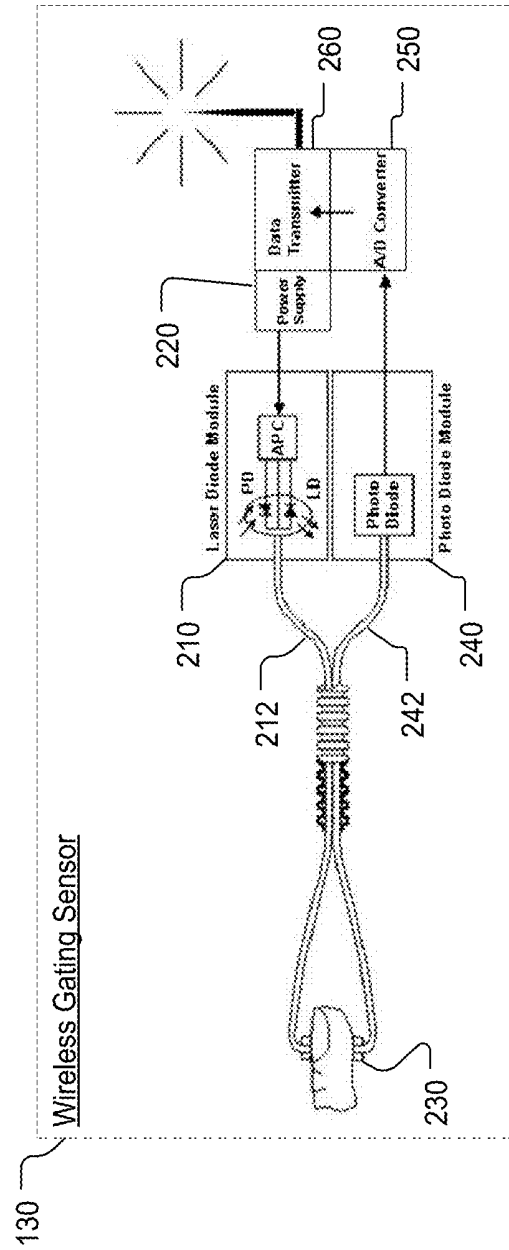


Fig. 2

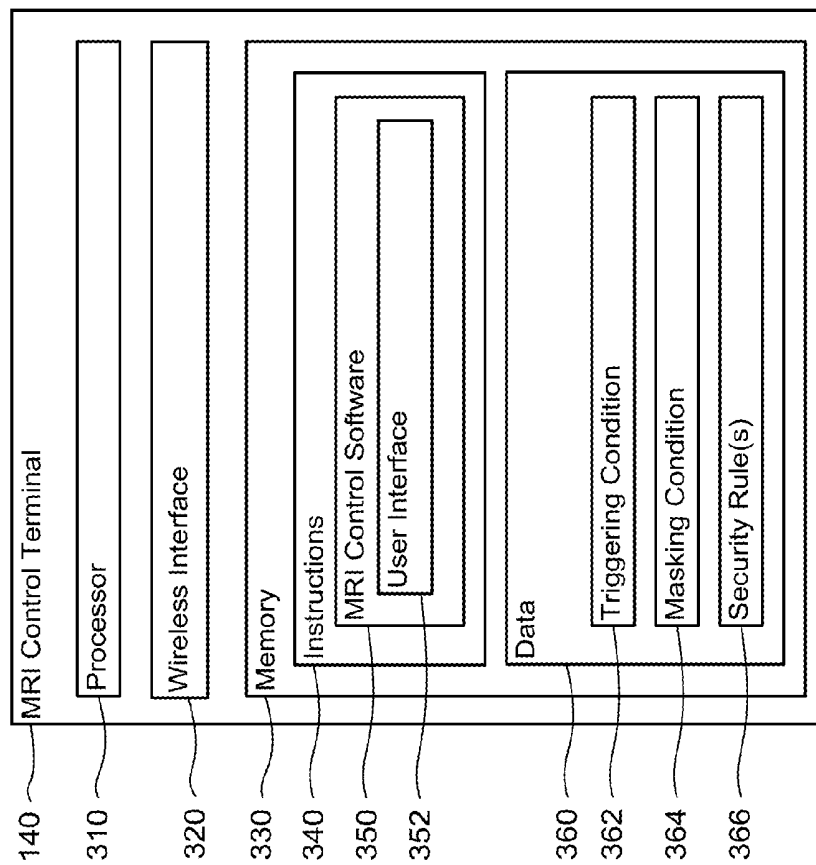


Fig. 3

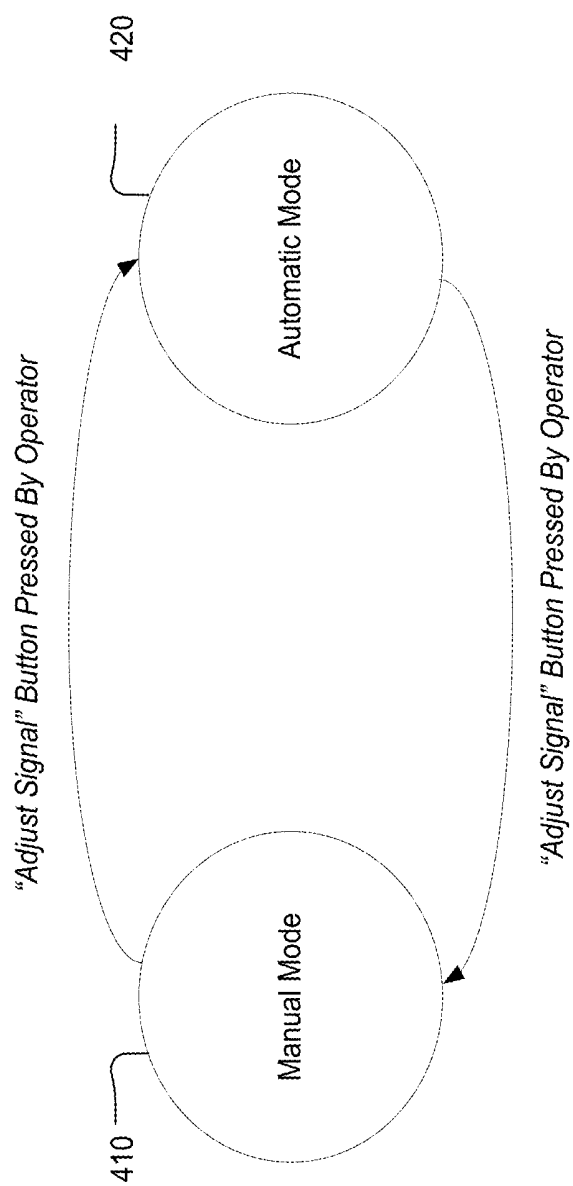


Fig. 4

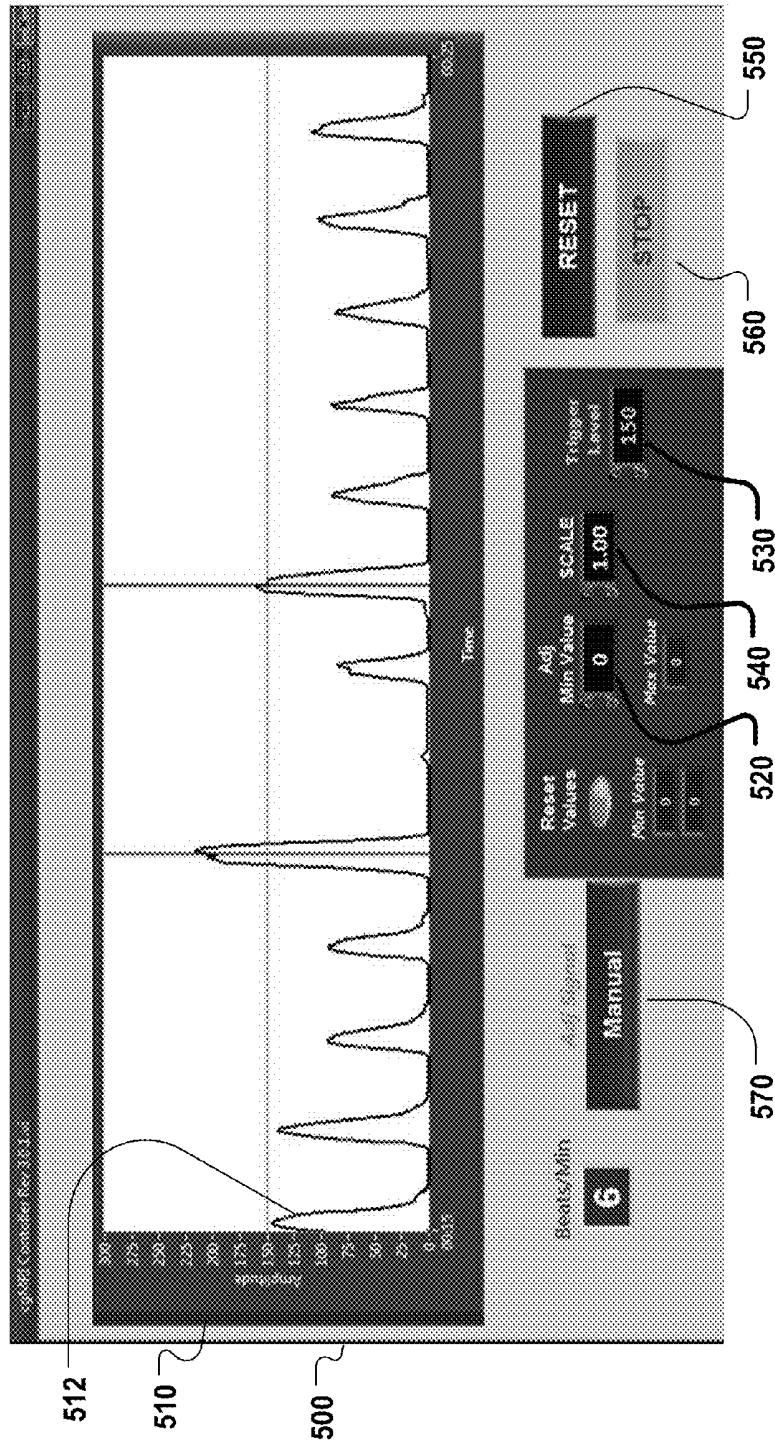


Fig. 5

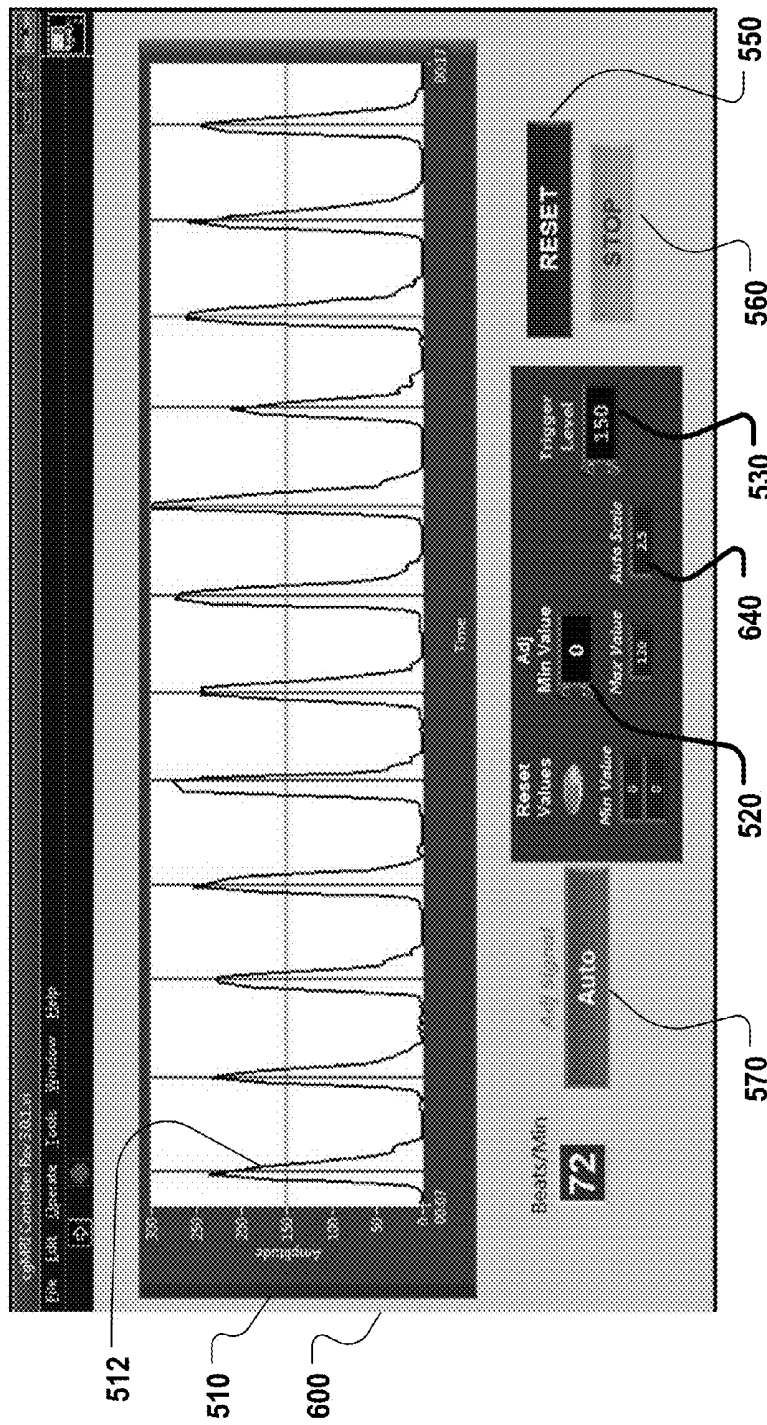


Fig. 6

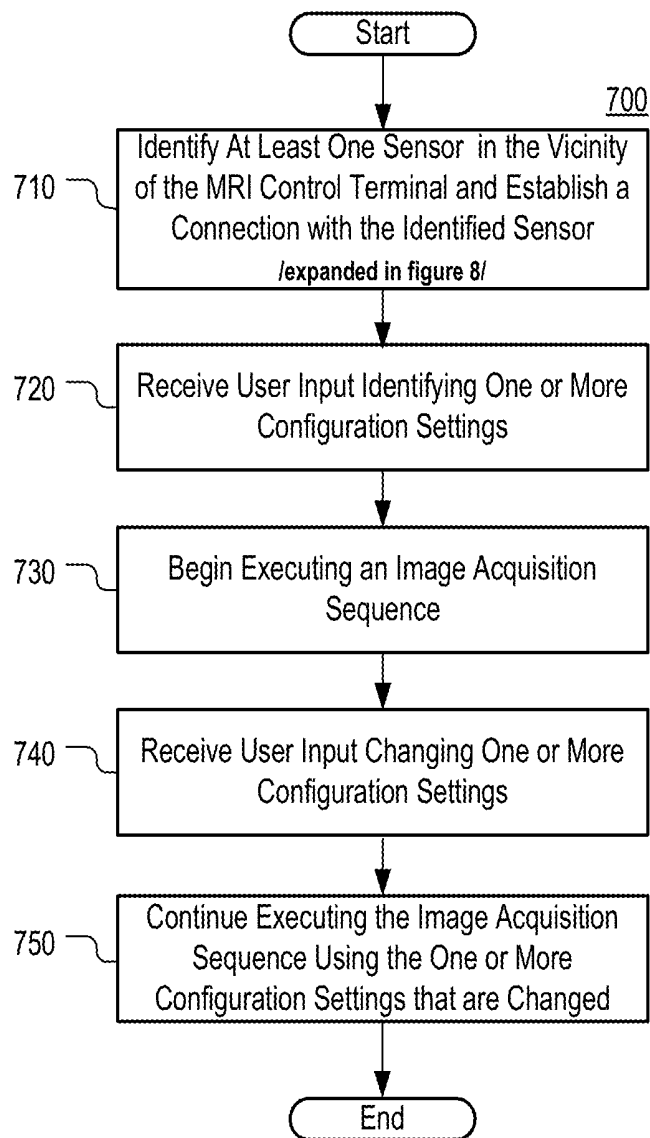


Fig. 7

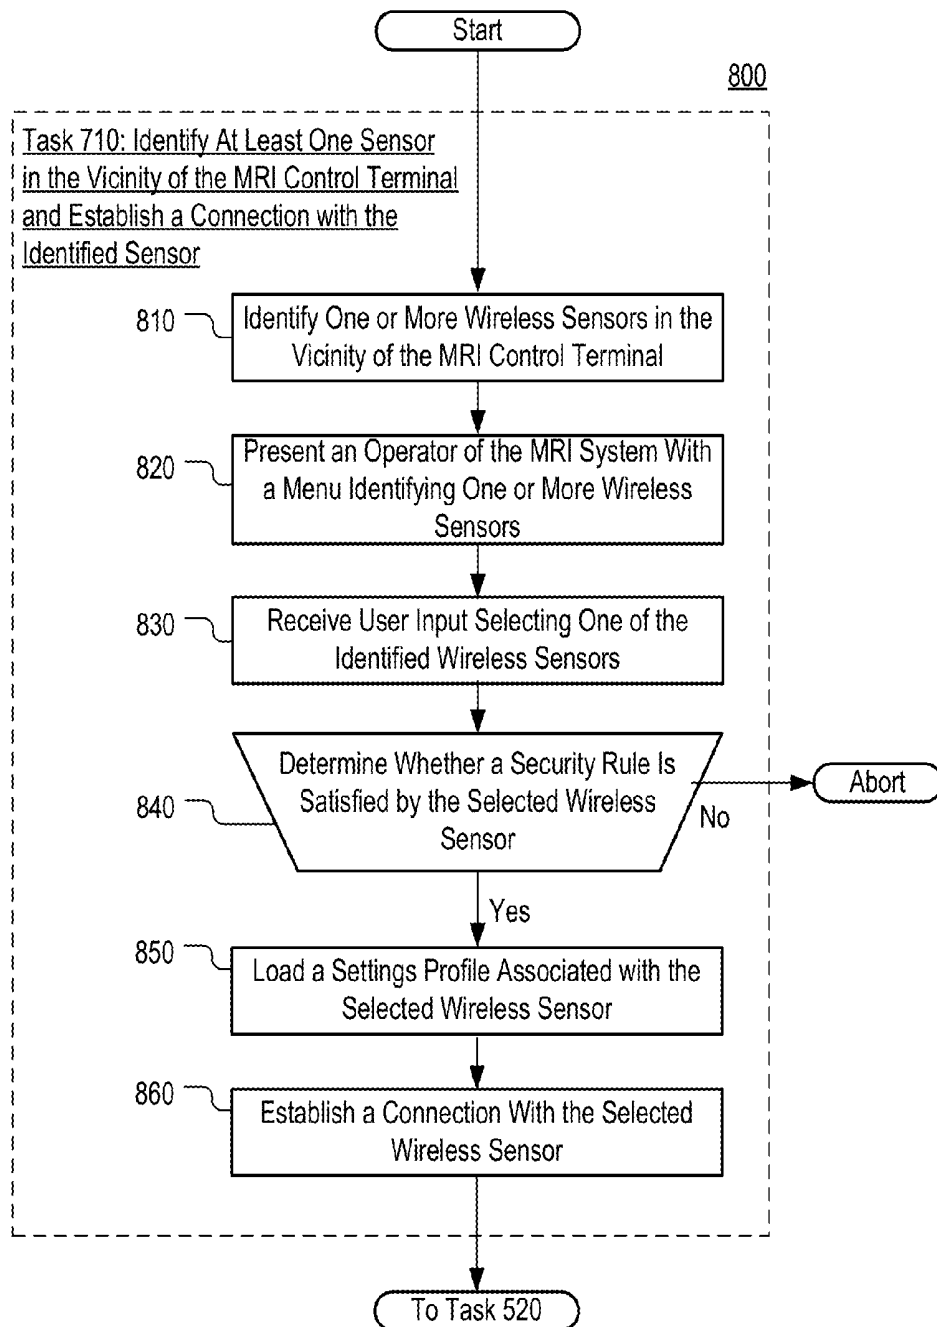


Fig. 8

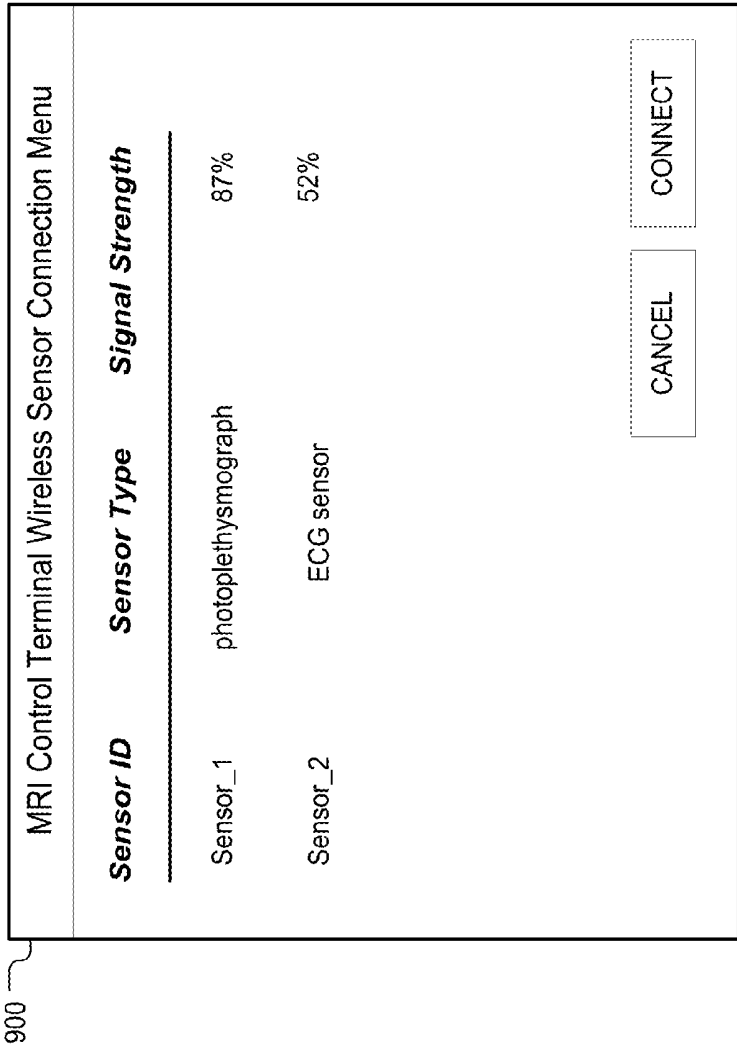


Fig. 9

1

APPARATUS FOR CONTROLLING THE OPERATION OF AN MRI SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims the benefit of the filing date of U.S. Provisional Patent Application No. 61/665,547 filed Jun. 28, 2012, the disclosure of which is hereby incorporated in its entirety herein by reference.

BACKGROUND

In magnetic resonance imaging, an object to be imaged as, for example, a body of a human subject, is exposed to a strong, substantially constant static magnetic field. The static magnetic field causes the spin vectors of certain atomic nuclei within the body to randomly rotate or “precess” around an axis parallel to the direction of the static magnetic field. Radio frequency excitation energy is applied to the body, and this energy causes the precessing atomic nuclei to rotate or “precess” in phase and in an excited state. As the precessing atomic nuclei relax, weak radio frequency signals are emitted; such radio frequency signals are referred to herein as magnetic resonance signals.

Different tissues produce different signal characteristics. Furthermore, relaxation times are the dominant factor in determining signal strength. In addition, tissues having a high density of certain nuclei will produce stronger signals than tissues with a low density of such nuclei. Relatively small gradients in the magnetic field are superimposed on the static magnetic field at various times during the process so that magnetic resonance signals from different portions of the patient’s body differ in phase and/or frequency. If the process is repeated numerous times using different combinations of gradients, the signals from the various repetitions together provide enough information to form a map of signal characteristics versus location within the body. Such a map can be reconstructed by conventional techniques known in the magnetic resonance imaging art, and can be displayed as a pictorial image of the tissues as known in the art.

The magnetic resonance imaging technique offers numerous advantages over other imaging techniques. MRI does not expose either the patient or medical personnel to X-rays and offers important safety advantages. Also, magnetic resonance imaging can obtain images of soft tissues and other features within the body which are not readily visualized using other imaging techniques. Accordingly, magnetic resonance imaging has been widely adopted in the medical and allied arts.

As discussed above, MRI images are taken by acquiring multiple sets of MRI data and compounding those sets to produce a single MRI image. For many years it has been desirable to collect each data set when a predetermined physiological event occurs. The event may be a respiratory event, a muscle movement, a cardiac motion, or any other physiological event. In that regard, in MRI applications, it is often necessary to have the ability to accurately gate the MRI system so the data may be collected when the physiological event occurs.

In some instances, of particular interest in MRI applications is the ability to time the acquisition of data to one point during the cardiac cycle. The most common point used is ventricular contraction, as visualized on the electrocardiogram (ECG) as the QRS wave. The contraction also produces a pressure pulse that is transmitted throughout the whole arterial system of a patient. Using the ECG as a gating

2

technique has been the standard used for years. Nevertheless, there are several disadvantages inherent in using ECG in MRI gating. First, there are fast switching magnetic gradients that induce currents in wires that connect to ECG sensors. Similarly there are induced currents in the skin of the subject that also interfere with the acquisition of the ECG. And finally, there are safety concerns about wires that are in contact with the patient as currents might be induced in those wires by the MRI systems.

SUMMARY

In one aspect, an MRI system is provided that includes a physiological sensor used for gating the MRI system and an MRI control terminal wirelessly connected to the sensor. The physiological sensor is used to monitor a physiological parameter of a user, such as pressure pulse, and communicate data regarding the monitored physiological parameter to the MRI control terminal. The MRI control terminal processes the data received from the physiological sensor and determines whether triggering condition on the data is met. When it is determined that the triggering condition is met, the MRI control terminal initiates the acquisition of a data set. The acquisition of the data set involves initiating a pre-programmed pulse sequence and acquiring RF signals emitted from the patient’s tissue as a result of the execution of the pre-programmed pulse sequence.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a schematic diagram of an MRI system in accordance with aspects of the disclosure.

FIG. 2 depicts a schematic diagram of a physiological sensor used in gating the MRI system of FIG. 1.

FIG. 3 depicts a schematic diagram of a MRI control terminal that is part of the MRI system of FIG. 1.

FIG. 4 depicts a state machine chart of MRI control software that is executed by the MRI control terminal of FIG. 3.

FIG. 5 depicts a graphical user interface (GUI) of the MRI control application of FIG. 4.

FIG. 6 is a graph a GUI of the MRI control application of FIG. 4.

FIG. 7 depicts a flowchart of a process associated with the operation of the MRI control system of FIG. 1.

FIG. 8 depicts a flowchart of a sub-process associated with the process of FIG. 7.

FIG. 9 depicts a schematic diagram of a menu for the selection of a wireless sensor.

DETAILED DESCRIPTION

FIG. 1 depicts a schematic diagram of an MRI system. The system comprises a magnet subsystem **110** that includes a magnet **112** for generating a polarizing static magnetic field surrounding a patient imaging volume **116**. The magnet subsystem **110** further includes gradient coils (not shown) for creating gradients used to determine the spatial localization of the magnetic resonance signals from the patient. The excitations result in RF responses being received from the patients’ **101** tissue via a coil **114**, which, in turn, are used to create MRI images of the patient **101**. The magnet subsystem **110** is located in a shielded room **120** in order to minimize RF interference on the MR imaging process. As noted above, multiple excitations of the patient’s tissue may be necessary to acquire a single MRI image.

The physiological sensor **130** is a sensor that monitors a physiological parameter of the patient **101** for use in gating the MRI system. The physiological sensor **130** may be a photoplethysmograph, oxymeter, an EKG sensor, or any sensor that detects heartbeat, respiration, blood pulse, or another physiological parameter suitable for use in gating MRI systems. In this example, the physiological sensor **130** is a photoplethysmograph that monitors the pressure pulse of the patient **101**.

The MRI control terminal **140** includes hardware and software for controlling the timing of data acquisition by the magnet subsystem **110**. The MRI control terminal **140** is situated in a control room **150** that is separated from the shielded room **120** by a window **160**. The MRI control terminal is operatively connected to the MRI system. In addition, the MRI control terminal is connected to the physiological sensor **130** via a wireless connection that operates at a frequency high enough to pass through the window **160**. The connection may be a Wi-Fi connection (e.g., 802.11 operating at 2.5 GHz) or another type of connection. Using a wireless connection to connect the physiological sensor **130** to the MRI control terminal **140** avoids some of the problems that are inherent in using fiber optic and copper wires, such as current induction in the wires and disturbing the shielding of the shielded room **120** in order the run the wires.

In operation, the MRI control terminal **140** may receive data from the physiological sensor **130** and compile the data to produce a waveform of the pressure pulse of the patient **101**. The waveform may be presented on a display screen of the MRI terminal **140** for viewing by an operator. The MRI control terminal **140** may further monitor the waveform edge and determine whether a triggering condition on the waveform is satisfied. The triggering condition may involve the waveform reaching predetermined amplitude, or assuming another waveform characteristic related to the waveform's amplitude, shape, frequency, or periodicity. When it is determined that the triggering condition is met, the MRI control terminal **140** may transmit a triggering signal to the MRI system. Upon receiving the triggering signal, the MRI system will cause the magnet subsystem **110** to execute an MRI pulse sequence and acquire a new set of MRI data using the coil **114**.

In this example, the MRI control terminal **140** includes a user interface that gives the operator complete control over when triggering signals are produced. In one aspect, the MRI control terminal may provide the operator with a user interface that enables the operator to manually control the base line value of the waveform and set the amount of gain of the signal. In another aspect, the user interface of the MRI control terminal **140** may enable the operator to manually set the triggering condition. For example, the user interface may allow the operator to set the triggering condition either on a rising or falling part of a pressure pulse. As another example, the user interface may enable the operator to set the triggering condition on a specific amplitude value (e.g., configure the MRI system to acquire a data set when a pulse reaches specified amplitude). In yet another aspect, the user interface may allow the operator to specify a minimum delay between the transmissions of subsequent triggering signals. If the triggering condition is satisfied before the minimum delay has expired, the MRI control terminal **140** may refrain from transmitting another triggering signal. Specifying a minimum delay may prevent a second unwanted trigger on a noisy signal. (e.g., once a trigger is issued a second trigger cannot be generated for example in the next 0.3 seconds.)

In some instances, the user interface of the MRI control terminal **140** may allow the operator to choose between manual mode and automatic mode. When in automatic mode, the MRI control terminal **140** may set the gain and/or base value automatically. Applying gain to the physiological signal that is used to gate the MRI system enables small signals to be amplified by a value greater than one while strong signals are amplified by values less than one. In practice, the peak value of the pressure pulse may vary throughout a data acquisition time frame. Thus, when in automatic mode, the MRI control terminal **140** will automatically recalculate the gain value periodically (e.g., every ten seconds).

FIG. 2 depicts a schematic diagram of the physiological sensor **130**. As illustrated, the physiological sensor **130** is a photoplethysmograph including a diode **210**, a power supply **220**, photodiode **240**, an A/D converter **250**, and a wireless transceiver **260**. The diode **210** is a Laser diode in the visible red part of the visible light spectrum (650 nm). The diode **210** is powered using the power supply **220**. The diode **210** is connected via a plastic fiber-optic cable **212** to a probe **230** that is attached to the finger of the patient **101**. Similarly, the photo diode **240** is also coupled via a plastic fiber-optic cable **242** to the probe **230**. In operation, the diode **210** emits light across the fingertip of the patient **101** and the photodiode **240** detects light passing through the fingertip of the patient **101** and converts it into an electric signal. The electric signal is filtered and digitized using the A/D converter **250**. The digitized signal is fed to the wireless transceiver **260** and transmitted to the MRI control terminal **140**. Afterwards, the digitized signal is used by the MRI control terminal **140** to compile a pressure pulse wave for the patient **101**. Deriving a pressure pulse wave from the sensor data is possible because the scattering of light passing through the finger tip of the patient depends, at least partially, on the amount of blood present in the finger. The amount of blood varies with the pulsating blood flow of the patient.

In some aspects, the wireless transceiver **260** may include a Wi-Fi transceiver, a Bluetooth transceiver, or any other type of transceiver. Furthermore, the sensor **130** may include a processor coupled to a memory (not shown). The memory may be configured to store an identifier, such as a unique sensor identifier, a manufacturer's ID, a model number, or an identifier of an MRI system associated with the physiological sensor **130**. The processor may be arranged to transmit an indication of the identifier either periodically or in response to a request from the MRI control terminal **140**. The processor, the memory, and the wireless transceiver **260** may be integrated into the same physical housing as other sensor components or they may have a separate housing.

FIG. 3 depicts a schematic diagram of the MRI control terminal **140** in accordance with aspects of the disclosure. As shown, the MRI control terminal **140** includes a processor **310**, a wireless interface **320**, and a memory **330**. Memory **330** stores information accessible by processor **310**, including instructions **340** that may be executed by the processor **310**. The memory also includes data **360** that may be retrieved, manipulated or stored by the processor. The memory may be of any type capable of storing information accessible by the processor, such as a hard-drive, memory card, ROM, RAM, DVD, CD-ROM, write-capable, and read-only memories. The processor **310** may be any well-known processor, such as commercially available processors. Alternatively, the processor may be a dedicated controller such as an ASIC. In some aspects, the processor **310** may be operable to receive data from the physiological sensor **130** via the wireless interface **320**. The wireless

interface **320** may be a Wi-Fi interface, a Bluetooth interface, or any other type of transceiver capable of communicating with the wireless transceiver **260** of the physiological sensor **130**.

The instructions **340** may be any set of instructions to be executed directly (such as machine code) or indirectly (such as scripts) by the processor. In that regard, the terms “instructions,” “steps” and “programs” may be used interchangeably herein. The instructions may be stored in object code format for direct processing by the processor, or in any other computer language including scripts or collections of independent source code modules that are interpreted on demand or compiled in advance. The instructions **340** may include control software **350** for gating the MRI system. The software **350** includes user interface **352** for specifying a various parameters related to the gating of the MRI system. By way of example, the user interface may be used to specify a triggering condition, a base value for the physiological signal waveform, a masking condition (e.g., minimum delay), sensor security rules, or a gain. In some aspects, the user interface **352** may include a plurality of graphical user interface screens (GUIs), such as the GUI **500**, depicted in FIG. 5, and the GUI **600**, depicted in FIG. 6. These GUIs are discussed further below.

Data **360** may be retrieved, stored or modified by processor **310** in accordance with the instructions **340**. The data may also be formatted in any computer-readable format such as, but not limited to, binary values, ASCII or Unicode. Moreover, the data may comprise any information sufficient to identify the relevant information, such as numbers, descriptive text, proprietary codes, pointers, references to data stored in other memories (including other network locations) or information that is used by a function to calculate the relevant data.

As illustrated, the data **360** may store an indication of triggering condition **362**, an indication of a masking condition **364**, and an indication of a sensor security rule **366**. The triggering condition **352**, as noted above, may identify a characteristic of the physiological waveform that is derived from data transmitted by the physiological sensor **130**. By way of example, the triggering condition may include one or more of:

- T1: An indication of a slope of the waveform (e.g., generate a triggering signal on a rising edge; generate a triggering signal on a falling edge).
- T2: An indication of an amplitude value of the gating signal wave (e.g., generate a triggering signal when the waveform of the patient's **101** pressure pulse reaches amplitude of 150).
- T3: An indication of a waveform pattern (e.g., trigger a data acquisition when a predetermined pattern is observed in the waveform). The indication of the pattern may be based on at least one of order, duration, and magnitude of one or more local maxima (e.g., pulses in the waveform). An example of a pattern may be one that is characterized by a first local maximum that is both preceded and succeeded by local maxima that are at most 50% of the first local maxima. Another example of a pattern may be one characterized by a first waveform pulse that is at least 20% shorter in duration than the pulse immediately preceding the first waveform pulse.

The masking condition **354** may be any condition that, if satisfied, leads to the MRI terminal ignoring the occurrence of a triggering event and refraining from transmitting a triggering signal to the magnet subsystem **110** when the triggering event occurs. For example, the masking condition

may specify that at least 10 milliseconds must pass between the generations of successive triggering signals. As another example, the masking condition may specify that if the slope of rising waveform edge is too steep, that edge should be ignored. As yet another example, the masking condition may specify that when a predetermined waveform pattern occurs, no triggering signals should be transmitted by the MRI control terminal **120**. In any event, the masking condition **364** may prevent unwanted triggering signals from being transmitted due to noise being present in the signal from the physiological sensor **130**.

The security rule(s) may include one or more indications of characteristics that should be possessed by a wireless sensor, such as the physiological sensor **130**, before a connection can be established between that sensor and the MRI control terminal **140**. The security rule(s) may be specified, via an input device such as keyboard, by an operator of the MRI system, or they may be preprogrammed into the MRI control terminal by the system's manufacturer. Examples of security rules include:

- R1: Establish a connection with a sensor only when the strength of signal from that sensor exceeds a predetermined threshold. A rationale for having this rule may be that if the signal strength is low, the connection between the wireless physiological sensor **130** and the MRI control terminal **140** may fall apart before an MRI image has been acquired.
- R2: Establish a connection with a sensor having an identifier only if an identifier associated with the sensor is found on a list of identifiers of sensors that are permitted to connect to the MRI control terminal **140**. The identifier may be one that is unique to the sensor, a manufacturer's ID, a model number, or another identifier. The list of identifiers may be stored in the memory **330** or elsewhere. A rationale for having this rule may be to prevent using wireless physiological sensors that have not been tested for compliance with the MRI control terminal **140**.
- R3: Establish a connection with a sensor only if the sensor identifies itself as being associated with the MRI system. In some instances, sensors may be programmed to store in their memory an identifier of an MRI system they are associated with. Such sensors may be arranged to transmit the identifier to the MRI managing terminal upon request, or otherwise. A rationale for having this rule may be to prevent the MRI terminal **140** from gating the operation of the MRI system based on signals from the wrong sensor (e.g., a sensor in another room).

Although FIG. 3 functionally illustrates the processor and memory as being within the same block, it will be understood that the processor and memory may actually comprise multiple processors and memories that may or may not be stored within the same physical housing. The memory may include one or more media on which information can be stored. Preferably, the medium holding the instructions retains the instructions in non-transitory form. Some or all of the instructions and data may be stored in a location physically remote from, yet still accessible by, the processor. Similarly, the processor may actually comprise a collection of processors which may or may not operate in parallel.

FIG. 4 depicts a state machine diagram for the MRI control terminal **140**. According to this example, the MRI control terminal **140** can be in either a manual mode state **410** or automatic mode state **420**. When in the manual mode state **410**, the gain on the signal from the gate sensor is set manually by the operator. Furthermore, a graphical user

interface (GUI) **500** (FIG. 5) is presented to the operator on a display screen of the MRI control terminal **140**. As illustrated, the GUI **500** includes a pane **510** for displaying a graph of waveform **512** representing a physiological parameter of the patient **101** (e.g., pressure pulse). The waveform is based on the signal received by the MRI control terminal **140** from the physiological sensor **130**.

In one aspect, as discussed above, the GUI **500** may include one or more input components for specifying various parameters related to the gating of the MRI system. In this example, the GUI **500** includes an input component **520** for specifying a base value for the waveform **512**, an input component **530** for specifying the triggering condition (e.g., a waveform amplitude the reaching of which would trigger the acquisition of a data set by the MRI system), and an input component **540** for specifying gain. Furthermore, the GUI **500** may include a "Reset" button **550** for returning various gating parameters (e.g., base value, triggering condition, gain) to predetermined default values, a "Stop" button **560** for stopping the acquisition of data by the MRI system, and an "Adjust Signal" button **570**. When the "Adjust Signal" button **570** is pressed the state of the MRI control terminal may be toggled from "Automatic" to "Manual," and vice versa. Furthermore, in this example, the "Adjust Signal" button **570** is outfitted with a label that indicates what state the MRI control terminal **140** is in.

When the MRI control terminal **140** is in the automatic mode state **420**, the gain of the signal from the gating sensor is determined automatically by MRI control terminal **140**. Furthermore, in the state **420**, the GUI **600** is presented to the operator on the display screen of the MRI control terminal **140**. As illustrated, the GUI **600** is almost identical to the GUI **500** except for that it lacks the input component **540** for specifying gain. Instead, the GUI **600** is outfitted with an indicator **640** (e.g., a text field) that indicates the gain (e.g. scale value) that has been automatically calculated by the MRI control terminal **140** and is currently in use. . . Although in this example the input components for specifying the triggering level (e.g., triggering condition), signal base value, and gain are text fields, in other examples they may be any other type of input component (e.g., radio buttons, list menus, drop-down menus, sliders, or knobs).

FIG. 7 depicts a flowchart of a process **700** associated with the operation of the MRI control terminal **140**. At task **710**, the MRI control terminal **140** identifies one or more wireless sensors and establishes a connection with one of the identified sensors. In this example, a connection with the physiological sensor **130** is established.

At task **720**, the MRI control terminal **140** receives user input specifying a first triggering condition for use in acquiring data. More particularly, the user input may be any indication of a property of the physiological signal waveform (e.g., pressure pulse waveform), such as amplitude, slope (e.g., trigger on rising edge, trigger on falling edge), shape, or any other characteristic. The user input may be received from a text field, such as the field **530**, or any other input component (e.g., radio button, drop down menu, list, or checkbox).

At task **730**, the MRI control terminal **140** begins executing an image acquisition sequence. Executing the image acquisition sequence involves acquiring a plurality of MRI data sets for use in generating a single MRI image. The acquisition of each data set may be synchronized with the occurrence of a particular physiological event (e.g., ventricular contraction). This synchronization is accomplished by using a physiological signal, such as the signal supplied by the physiological sensor **130**. Each of the acquired data

sets will include information that is acquired by the MRI system as a result of the execution of an MRI pulse sequence.

In some aspects, while executing the image acquisition sequence, the MRI control terminal **140** may monitor the waveform of the signal received from the physiological sensor **130** and determine whether the triggering condition specified at task **720** is satisfied. Whenever the triggering condition is satisfied, a triggering signal is transmitted by the MRI control terminal **140** to the magnet subsystem **110**. The triggering signal causes the magnet subsystem **110** to acquire a new data set and forward the acquired data set to the MRI control terminal **140**.

At task **740**, the MRI control terminal **140** receives user input identifying a second triggering condition that is different from the first triggering condition. The second triggering condition is provided as a substitute for the first triggering condition. The second triggering condition, is received before the image acquisition sequence initiated at task **730** is completed. In this example, the first triggering condition requires the MRI control terminal **140** to transmit a triggering signal to magnet subsystem **110** whenever the pressure pulse waveform measured by the sensor **130** reaches amplitude of 150, whereas the second triggering condition requires the MRI control terminal **140** to transmit a triggering signal whenever the pressure pulse waveform reaches amplitude 130. At task **750**, the MRI control terminal **140** completes the image acquisition sequence using the second triggering condition that is specified at task **740**. In that regard, a portion of the data sets acquired as a result of the execution of the image acquisition sequence are obtained using the first triggering condition while another portion of the data sets is obtained by using the second triggering condition. Thus, data sets from both portions may be used in the generation of a single MRI image (e.g., by the MRI control terminal **140**).

For example, an operator may begin acquiring an MRI image of a patient using amplitude value of 150 as a triggering condition. However, halfway through the execution of the image acquisition sequence, the blood pressure of the patient may fall for some unexplained reason thereby causing the pressure pulse waveform measured by the sensor **130** to remain consistently under the amplitude value that is set to trigger data acquisition by the MRI system. In such instances, the operator may notice the blood pressure drop by viewing a graph of the pressure pulse waveform. Furthermore, in response, the operator may lower the triggering condition by using the user interface **352**. Put another way, in one aspect, the MRI terminal **140** enables the operator of the MRI system to react to changing circumstances during the acquisition of an MRI image by changing the condition that triggers data acquisition by the MRI system. Although in the above example, the triggering condition used for gating the MRI system is changed, in other examples, the operator may change or enter a new masking condition midway through the execution of an image acquisition sequence.

FIG. 8 depicts a flowchart of a process **800** associated with identifying and connecting to wireless physiological sensor as specified by task **710** of FIG. 7. At task **810**, the MRI control terminal **140** identifies one or more wireless physiological sensors in its vicinity. The wireless sensors may be identified based on a beacon signal, or other identifier signal, that is transmitted (or broadcast) by each one of the wireless sensors. The beacon signal (or identifier signal) may identify at least one of the following for each sensor:

B1: Type of sensor (e.g., pulse sensor, EKG sensor, oximeter, photoplethysmograph).

B2: Sensor manufacturer.

B3: Unique Identifier of a sensor (e.g., a number, or a string uniquely identifying the sensor, such as a MAC address).

B4: Unique identifier of an MRI system associated with the sensor (e.g., each sensor may be programmed to be associated with a given MRI system by storing in a memory of the sensor an identifier corresponding to the MRI system).

At task **820**, the operator of the MRI system is presented with a sensor selection menu, such as the menu **900** depicted in FIG. **9**. As illustrated, the menu may list information regarding each of the sensors identified at task **810**, such as a sensor ID, a sensor type, or strength of signal from the sensor. The information may be retrieved from beacon signals transmitted by each sensor or acquired as a result of a handshake executed after each sensor has been initially identified. At task **830**, user input is received by the MRI control terminal **140** that identifies a user selection of a sensor identified in the selection menu. For example, the user input may involve highlighting one of the sensors listed in the menu **900** and subsequently clicking on the “Connected” button that is located in the bottom right corner of the menu.

At task **840**, the MRI control terminal **140** determines whether one or more of the security rule(s) **366** are satisfied. If the security rule(s) are satisfied, the execution of the process **800** continues to task **850**. Otherwise, if one or more rules are not satisfied, the execution of the process **800** is aborted.

At task **850**, a settings profile associated with the sensor selected at task **820** is loaded. The settings profile may be a file or a data structure identifying one or more MRI parameters associated with the sensor. By way of example, the MRI parameters may include an indication of a triggering condition, an indication of a desired gain, or an indication of a masking condition. The settings profile may be identified by searching the memory **330**, or the memory of a remote computer, for a file that is associated, via a look-up table or another similar structure, to an identifier of the sensor. By way of example, the identifier may be unique sensor ID, a manufacturer’s ID, or a model number. Loading the profile may involve retrieving the profile and configuring the software **350** to use the one or more settings identified in the profile when gating the MRI system.

At task **860**, a connection with the wireless sensor selected at task **830** is established. Only after the connection is established, may the MRI control terminal **140** begin acquiring data transmitted by the selected wireless sensors for use in gating the MRI system.

FIGS. **7-8** are provided as examples. At least some of the tasks associated with FIGS. **7-8** may be performed in a different order than represented, performed concurrently or altogether omitted. Furthermore, it should be noted that in some instances only the probe **230** of the physiological sensor **130** may be located inside the patient imaging volume **116** of the magnet subsystem **110** while at least some of the other components of the physiological sensor **130** are kept outside of the magnet subsystem **110**. The fiber-optic cables **212** and **242** may extend between the probe and the other components, thereby permitting the other components to be located outside of the magnet subsystem **110**. Moreover, although in the above examples the MRI system is a recumbent MRI system, in other examples it may be an upright MRI system, or any other type of MRI system. As

these and other variations and combinations of the features discussed above can be utilized without departing from the subject matter as defined by the claims, the foregoing description of exemplary aspects should be taken by way of illustration rather than by way of limitation of the subject matter as defined by the claims. It will also be understood that the provision of the examples described herein (as well as clauses phrased as “such as,” “e.g.,” “including” and the like) should not be interpreted as limiting the claimed subject matter to the specific examples; rather, the examples are intended to illustrate only some of many possible aspects.

In summary, and as an example only, in one aspect a sensor for monitoring a physiological phenomenon in a patient is provided. The sensor comprises a wireless transceiver, a memory, and processor. The memory of the sensor is configured to store an identifier associated with a magnetic resonance image (MRI) system that identifies uniquely the MRI system from among a plurality of MRI systems. The processor is coupled to the wireless transceiver and is configured to transmit, using the wireless transceiver, an indication of the identifier associated with the MRI system. The sensor may include an oximeter, photoplethysmograph, ECG sensor, or any type of sensor capable of monitoring a physiological activity of a patient. The wireless transceiver operates at a base frequency capable of penetrating a window of a shielded room used for the conduct of MRI scans. The wireless transceiver is a Bluetooth transceiver, Wi-Fi transceiver, or wireless USB transceiver. The physiological phenomenon may be cardiac pulse, respiratory pulse, heart electrical activity.

As another example, a system is provided that includes a memory configured to store an indication of a first waveform characteristic and a processor coupled to the memory. The processor is configured to receive a signal indicating a physiological parameter of a patient, the signal having an associated waveform. The processor is further configured to execute an image acquisition sequence that includes acquiring a plurality of data sets, wherein each of the data sets is acquired by the MRI system when the waveform of the signal indicating a physiological parameter meets a predetermined triggering condition. The processor is further configured to receive, before the execution of the image acquisition sequence has been completed, a user input indicating a second waveform characteristic that is different from the first waveform characteristic. The plurality of data sets acquired during the first acquisition sequence includes a first proper subset and a second proper subset. The data sets in the first subset are acquired using the first waveform characteristic as the triggering condition. The data sets in the second subset are acquired using the second waveform characteristic as the triggering condition.

Using the first waveform characteristic as a triggering condition, when acquiring a data set, includes determining whether the signal indicating the physiological parameter of the patient possesses the first waveform characteristic. When it is determined that it does, the processor generates a triggering signal that causes a magnet subsystem of the MRI system to activate one or more magnetic gradients (or magnetic gradient coils) and collect RF data emitted by a subject’s tissue as a result of nuclei in the tissue being excited by the magnet subsystem. The physiological parameter may be breathing pulse, heart pulse, heart electrical activity, or any other physiological parameter capable of being used in MRI gating.

The first waveform characteristic depends on at least one of frequency, slope, phase, and amplitude of the waveform

of the physiological signal. In some aspects, the first indication may indicate a particular slope value, phase value or an amplitude value. The second waveform characteristic depends on at least one of frequency, slope, phase, and amplitude of the waveform of the physiological signal. In some aspects, the second indication may indicate a particular slope value, phase value or an amplitude value. In some aspects, both the first indication and the second indication may indicate different values for the same type of characteristic (e.g., different amplitude values). In other aspect, the first indication and the second indication may indicate values for different types of characteristics.

In yet another example, a device for gating an MRI system is provided. The device includes a wireless interface, a processor, and a display screen. The processor is configured to present on the display screen a menu identifying a plurality of wireless sensors that are present in the vicinity of the device. One or more the wireless sensors may be sensors for measuring a physiological parameter of a subject that usable for gating the MRI system. The processor is further configured to receive user input selecting one of the devices, determine whether a security condition is met, and establish a connection. Furthermore, the processor may be further configured to load a profile associated with the selected wireless sensor. The profile may be a file or data structure indicating a triggering condition or a masking condition. After the profile is loaded, the processor begins using the triggering condition and/or masking condition when gating the MRI system. In another aspect, the processor may be further configured to present on the display screen a waveform associated with a signal received from a physiological sensor and receive user input indicating a triggering condition.

Although the invention herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely illustrative of the principles and applications of the present invention. It is therefore to be understood that numerous modifications may be made to the illustrative embodiments and that other arrangements may be devised without departing from the spirit and scope of the present invention as defined by the appended claims.

The invention claimed is:

1. A magnetic resonance imaging (MRI) system for generating magnetic resonance images of a patient, comprising:

a magnet subsystem including a magnet for generating a magnetic field, the magnet subsystem being located in a shielded room having a window;

one or more physiological sensors located within the magnet, and adapted to receive data of the patient, the data associated with physiological parameters of the patient monitored by the sensor, at least one of the physiological sensors including a probe;

an MRI control terminal for controlling the magnet subsystem, the MRI control terminal being located in a control room outside of the shielded room and comprising:

a memory containing executable instructions; and a processor coupled to the memory and configured to use the executable instructions to:

determine whether the data from the sensor meets a triggering condition;

control the magnet subsystem such that the magnet subsystem initiates a pre programmed pulse sequence; and

a data transmission subsystem for providing the data from the one or more physiological sensors to the MRI control terminal, comprising:

a fiber optic cable directly coupled to the probe of the at least one of the physiological sensors;

a wireless transmitter located outside of the magnet and in the shielded room, and coupled to the probe through the fiber optic cable; and

a wireless receiver located in the control room and coupled to the MRI control terminal, the wireless receiver configured to wirelessly receive data transmitted by the wireless transmitter,

wherein the wireless transmitter and wireless receiver are positioned with the window in between such that the data is wirelessly transmitted through the window, and wherein the MRI system is configured to:

acquire a plurality of MRI data sets in response to determining that the data received wirelessly from the sensor meets the triggering condition, said data sets collected from radio frequency (RF) signals emitted from the patient as a result of the pre programmed pulse sequence; and generate a magnetic resonance image based on said data sets.

2. The MRI system of claim 1, wherein the MRI control terminal further includes a user interface for receiving the triggering condition from a user input.

3. The MRI system of claim 1, wherein the processor of the MRI control terminal is further configured to:

identify the one or more sensors using an identifier signal that identifies at least one of the type of sensor, the sensor manufacturer, and a unique identifier; and select one of the identified sensors for receiving data from the sensor.

4. The MRI system of claim 1, wherein the processor of the MRI control terminal is further configured to:

receive an input specifying a second triggering condition different from the first triggering condition; complete said acquisition for generating the MRI image using the second triggering condition.

5. The MRI system of claim 1, wherein the one or more physiological sensors include at least one of a photoplethysmograph, an oxymeter, and an EKG sensor.

6. The MRI system of claim 5, wherein the one or more physiological sensors include a photoplethysmograph, and wherein the triggering condition is one of a slope, amplitude, shape, pattern, frequency, and periodicity of a pressure pulse waveform of the patient.

7. The MRI system of claim 1, wherein the processor is configured to receive data representative of a waveform of one of a heartbeat, respiration, and a blood pulse of the patient.

8. The MRI system of claim 1, wherein the processor of the MRI control terminal is further configured to, after transmission of a first triggering signal, delay transmission of a second triggering signal.

9. The MRI system of claim 8, wherein the MRI control terminal further includes a user interface for receiving a user input indicating a duration of said delay.

10. The MRI system of claim 1, wherein the processor of the MRI control terminal is further configured to ignore the occurrence of a triggering condition based on the occurrence of a predetermined waveform pattern.

11. The MRI system of claim 1, wherein the processor of the MRI control terminal is configured to determine whether the data from the sensor meets a triggering condition that is

indicative of a physiological event to be synchronized with said acquiring of the plurality of MRI data sets.

12. The MRI system of claim 1, wherein the fiber optic cable is plastic.

13. The MRI system of claim 1, wherein the data transmission subsystem further comprises an analog to digital converter adapted to receive an electric signal from at least one of the physiological sensors, filter and convert the electric signal, and provide the filtered and converted electric signal to the wireless transmitter, wherein the analog to digital converter is located outside of the magnet, and wherein the fiber optic cable extends into the magnet subsystem in order to connect the analog to digital converter to the probe.

14. The MRI system of claim 1, wherein the one or more physiological sensors includes a photoplethysmograph, the photoplethysmograph including a laser diode module and a photodiode module, wherein each of the laser diode module and photodiode module is connected to the probe through the fiber optic cable.

15. The MRI system of claim 14, wherein each of the laser diode module and photodiode module is located outside of the magnet.

* * * * *

专利名称(译)	用于控制MRI系统的操作的装置		
公开(公告)号	US9504429	公开(公告)日	2016-11-29
申请号	US13/926275	申请日	2013-06-25
[标]申请(专利权)人(译)	FONAR		
申请(专利权)人(译)	FONAR CORPORATION		
当前申请(专利权)人(译)	FONAR CORPORATION		
[标]发明人	MINKOFF LAWRENCE A		
发明人	MINKOFF, LAWRENCE A.		
IPC分类号	A61B5/055 G01R33/567 A61B5/00 G01R33/36		
CPC分类号	G01R33/5673 G01R33/3692 A61B5/055 A61B5/0006 A61B5/7285 G01R33/546		
优先权	61/665547 2012-06-28 US		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种MRI系统，其包括用于门控MRI系统的生理传感器和无线连接到传感器的MRI控制终端。生理传感器用于监测用户的生理参数，例如压力脉冲，并将关于所监测的生理参数的数据传送到MRI控制终端。MRI控制终端处理从生理传感器接收的数据，并确定是否满足对数据的触发条件。当确定满足触发条件时，MRI控制终端启动数据集的获取。数据集的获取涉及启动预编程的脉冲序列并且由于执行预编程的脉冲序列而获取从患者组织发射的RF信号。

