

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 October 2006 (26.10.2006)

PCT

(10) International Publication Number
WO 2006/113445 A1

(51) International Patent Classification:
A61B 8/06 (2006.01)

(21) International Application Number:
PCT/US2006/014096

(22) International Filing Date: 14 April 2006 (14.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/671,416 14 April 2005 (14.04.2005) US

(71) Applicant (for all designated States except US): **VERASONICS, INC.** [US/US]; 22222 NE 62nd Place, Redmond, WA 98053 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DAIGLE, Ronald, Elvin** [US/US]; 22126 Ne 62nd Place, Redmond, WA 98053 (US).

(74) Agents: **TARLETON, Russell, E.** et al.; Seed Intellectual Property Law Group, PLLC, 701 Fifth Avenue, Suite 6300, Seattle, WA 98104-7092 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ULTRASOUND IMAGING SYSTEM WITH PIXEL ORIENTED PROCESSING

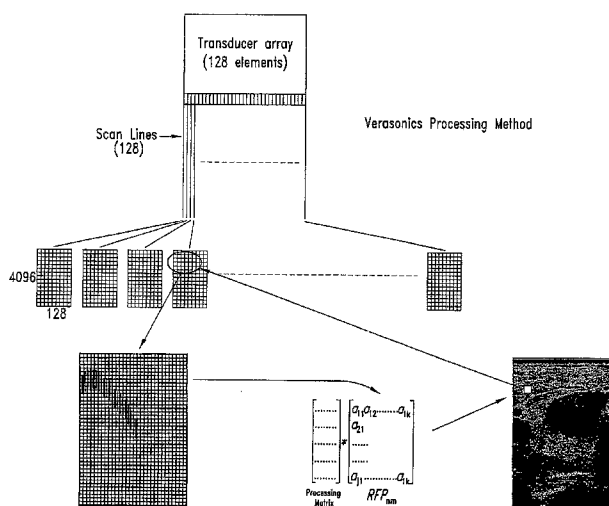

(57) Abstract: An ultrasound imaging system with pixel oriented processing is provided in which an acoustic signal is generated, echoes from the acoustic signal are received at a plurality of receiving elements to obtain echo signals that are then stored, a given pixel is mapped into a region of the stored signals, the mapped region of the stored echo signals is organized into array for the given pixel after which the array is processed to generate a signal response for the given pixel to obtain acoustic information for the given pixel. The system can be implemented entirely on plug-in cards for a commercial PC motherboard. The system and method can be implemented for pixel-oriented or voxel-oriented image processing and display, eliminating intermediate data computations and enabling extensive use of software processing methods. Advantages include improved acquisition of signal dynamic range, flexible acquisition modes for high frame rate 2D, 3D, and Doppler blood flow imaging.

WO 2006/113445 A1

ULTRASOUND IMAGING SYSTEM WITH PIXEL ORIENTED PROCESSING

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention is directed to an ultrasound imaging
5 architecture and, more particularly, to a system and method of capturing and
processing ultrasound data and generating images therefrom utilizing pixel
oriented processing techniques.

Description of the Related Art

Ultrasound Imaging has developed into an effective tool for
10 diagnosing a wide variety of disease states and conditions. The market for
ultrasound equipment has seen steady growth over the years, fueled by
improvements in image quality and the capability to differentiate various types
of tissue. Unfortunately, there are still many applications for ultrasound
systems where the equipment costs are too high for significant adoption.
15 Examples are application areas such as breast cancer detection, prostate
imaging, musculoskeletal imaging, and interventional radiology. In these areas
and others, the diagnostic efficacy of ultrasound imaging depends on excellent
spatial and contrast resolution for differentiation and identification of various
tissue types. These performance capabilities are found only on the more
20 expensive ultrasound systems, which have more extensive processing
capabilities.

Ultrasound imaging has always required extensive signal and
image processing methods, especially for array systems employing as many as
128 or more transducer elements, each with unique signal processing
25 requirements. The last decade has seen a transition to the improved accuracy
and flexibility of digital signal processing in almost all systems except for those
at the lowest tiers of the market. This transition has the potential for reducing
system costs in the long term, by utilizing highly integrated digital circuitry.

Unfortunately, the low manufacturing volumes of ultrasound systems results in substantial overhead and fixed costs for these unique circuits, and thus the transition to digital signal processing has not significantly reduced system cost.

While ultrasound systems have increasingly adopting digital
5 processing technology, their architectures have not changed significantly from their analog counterparts. Almost all current systems on the market use a modular “flow-through” architecture, with signals and data flowing from one module to the next, as shown in Figures 1A and 1B. This is a natural method of dealing with the considerable complexity of ultrasound image formation and
10 processing, and allows separate development teams to work somewhat independently on individual modules. Figure 1A shows the three types of information processing that are typically performed with ultrasound systems – echo image processing, for normal 2D imaging; Doppler processing, for blood velocity measurements; and color flow image processing, for real-time imaging
15 of blood flow.

A major disadvantage of the flow-through architecture is that each module must wait on its input data from the previous module before it can perform its own processing. The module must then deliver its result to the next module. Even within the blocks shown in Figure 1A, there are many individual
20 processing steps that are performed in series. Since the rate of system processing is determined by the rate of slowest processing function in the chain, all processing blocks must perform at high speed with minimal latencies, so as to not to introduce delays in seeing an image appear on the display as the scanhead is moved.

25 Another disadvantage of the flow-through architecture is that it makes inefficient use of resources. Most ultrasound exams are performed primarily with 2D echo imaging only, with only occasional use of Doppler blood velocity measurements or color flow imaging. This means that the complex and expensive hardware processing modules needed to perform these functions are
30 sitting idle most of the time, as they cannot be used in other tasks.

BRIEF SUMMARY OF THE INVENTION

The disclosed embodiments of the present invention are directed to an ultrasound imaging method and system that performs all signal processing and image formation in software executing on commercial CPUs.

- 5 The only custom hardware required in this approach is for transmission of acoustic pulses and data acquisition and signal conditioning of the received signals from the transducer. To accomplish this goal requires fundamental changes in the processing architecture of the ultrasound system to reduce the number of processing steps required in forming the image and to eliminate
- 10 system latencies. It also requires maximum utilization of the processing resources of the CPU to achieve the processing throughput desired. As an important benefit, the new architecture allows improvements in system dynamic range that open up the possibility of utilizing new transducer materials in a low-cost scanhead design. In addition, new modes of acquisition are possible that
- 15 may provide significant new diagnostic information.

- The disclosed software-based ultrasound system architecture leverages the high volume, low cost processing technology from the computer industry by basing the design around a commercial computer motherboard. While some current ultrasound systems incorporate computer motherboards in
- 20 their design, the computer is used only for the user interface and some system control and does not participate in any real-time processing tasks. In the disclosed architecture, the computer motherboard replaces almost all existing hardware, rather than complementing it. Basing the system in software on a general-purpose platform provides a flexible, high-performance imaging system
- 25 at the lowest possible system cost. No custom integrated circuits are required for this approach, reducing system complexity and time-to-market. Moreover, as further improvements in CPU processing power are realized by the computer industry, they can be easily adopted by the system to enhance imaging performance or provide new modes of operation and information extraction.

- 30 The successful realization of the software-based ultrasound architecture represents a market breakthrough in the cost/performance ratio of

ultrasound systems. Presumably, this can significantly increase the utilization of ultrasound in cost-sensitive applications that demand high image resolution and tissue differentiation for diagnostic efficacy. In addition, the low system cost and processing flexibility should open up new specialty application areas
5 where ultrasound has not previously played a significant role.

In accordance with one embodiment of the invention, an ultrasound processing method is provided that includes generating an acoustic signal, receiving at least one echo of the acoustic signal at a plurality of receiving elements and obtaining an echo signal therefrom, storing each echo
10 signal from each of the plurality of receiving elements, mapping a given pixel into a region of the stored echo signals, organizing the mapped region of the stored echo signals into an array for the given pixels, processing the array to generate a signal response for the given pixels, and using the signal response to obtain acoustic information for the given pixel.

15 In accordance with another aspect of the foregoing embodiment, an initial step is provided that includes generating a set of given pixels chosen to represent an area in a field of view of the transducer generating the acoustic signal, in which even given pixel in the array set has a known spatial relationship to the plurality of receiving elements. Preferably the method also
20 includes generating an image from the acoustic information for the given pixels in the array.

In accordance with another aspect of the foregoing embodiment, the acoustic information can be used for one or more of the following, including, but not limited to, measuring and displaying spatial data, measuring and
25 displaying temporal data, measuring and displaying blood flow data, and measuring and displaying tissue displacement responsive to induced mechanical displacement caused by an acoustic signal or acoustic transmit wave.

In accordance with another aspect of the foregoing embodiment,
30 the method includes generating a plurality of acoustic signals, receiving echoes from the plurality of acoustic signals, and combining the received echoes over

multiple generating and receiving cycles to enhance acoustic information obtained therefrom.

In accordance with another aspect of the foregoing embodiment, the stored echo signals are combined and averaged. Furthermore, the signal
5 response comprises an average of the stored echo signals.

In accordance with another aspect of the foregoing embodiment, the method includes combining results of multiple processing of the array to derive enhanced acoustic information.

In accordance with another aspect of the foregoing embodiment,
10 the enhanced acoustic information includes spatial compounding that improves contrast resolution of a final image generated therefrom. In addition, the combined signals are representative of Doppler information associated with moving tissue or moving blood cells.

In accordance with another aspect of the foregoing embodiment,
15 the receiving, obtaining, and storing of echo signals is done at a rate that is higher than a rate of processing the array.

In accordance with another embodiment of the invention, an ultrasound processing method is provided that includes generating an acoustic signal, receiving at least one echo of the acoustic signal at a plurality of
20 receiving elements and obtaining an echo signal therefrom, storing each echo signal from each of the plurality of receiving elements, mapping a given voxel into a region of the stored echo signals, organizing the mapped region of the stored echo signals into an array for the given voxel, processing the array to generate a signal response for the given voxel, and using the signal response
25 to obtain three-dimensional acoustic information for the given voxel.

In accordance with another aspect of the foregoing embodiment, all of the features of the first embodiment described above are applicable to this second embodiment of the invention.

In accordance with another embodiment of the invention, a
30 method of processing acoustic echoes is provided that includes storing acoustic echo signals received from a plurality of receiving elements, mapping a given

pixel into a region of the stored echo signals, organizing the mapped region of the stored echo signals into an array for the given pixel, performing operations on the array to generate a signal response for the given pixel, and using the signal response to obtain acoustic information for the given pixel.

5 In accordance with another embodiment of the invention, an ultrasound processing system is provided that includes a module adapted to generate an acoustic signal, receive at least one echo of the acoustic signal at a plurality of receiving elements in the module and obtain a plurality of echo signals therefrom, and means for processing that communicates with the
10 module and is adapted to map a given pixel into a region of stored echo signals received from the module, to organize the mapped region of the stored echo signals into an array for the given pixel, to perform operations on the array to generate a signal response for the given pixel, and to use the signal response to obtain acoustic information for the given pixel.

15 In accordance with another aspect of the foregoing embodiment, the processing means is adapted to initially generate a set of given pixels in which each given pixel in the set has a known spatial relationship to a receiving element in the module. Ideally, the processing means is configured to generate an image from the acoustic information for the given pixels in the array.
20 Alternatively or in combination therewith, a means for displaying an image is provided that receives the signal response from the processing means for generating an image on a computer display or in printed form or in other forms known to those skilled in the art.

 In accordance with another embodiment of the present invention,
25 an ultrasound processing system is provided that includes a module adapted to generate an acoustic signal, receive at least one echo of the acoustic signal at a plurality of receiving elements in the module and obtain a plurality of echo signals therefrom, and means for processing that communicates with the module and is adapted to map a given voxel into a region of stored echo
30 signals received from the module, to organize the mapped region of the stored echo signals into an array for the given voxel, to perform operations on the

array to generate a signal response for the given voxel, and to use the signal response to obtain acoustic information for the given voxel.

In accordance with another aspect of the foregoing embodiment of the invention, multiple 2D images planes are displayed as arbitrary slices of
5 the real-time 3D data set.

In accordance with another aspect of the foregoing embodiment of the invention, multiple 2D arbitrary image plane slices and a 3D rendering are displayed in real time.

As will be readily appreciated from the foregoing, the benefits of
10 changing to a software-based ultrasound system architecture implemented on commercially available computing platforms include:

- Significantly lower cost of hardware.
- Lower development costs and faster time to market by avoiding lengthy design cycles for custom integrated circuits (ASICs).
- 15 - Direct leveraging of cost/performance advances in computer technology.
- Flexibility for development of many new processing approaches, in commercial and academic environments.
- Increased diagnostic capability, based on image quality
20 improvements, for cost sensitive application areas.
- Increased utilization of ultrasound in specialty applications where cost has been a barrier to adoption.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features and advantages of the present
25 invention will be more readily appreciated as the same become better understood from the following detailed description of the present invention when taken in conjunction with the following drawings, wherein:

Figures 1A and 1B are schematic representations of a known flow-through ultrasound image formation architecture;

Figure 2 is a schematic representation of a software-based architecture of one embodiment of the present invention;

Figure 3 is a diagram of a plug-in module formed in accordance with one embodiment of the present invention;

5 Figure 4 is a schematic representation of the acquisition data for a 128 element linear array formed in accordance with the present invention;

Figure 5 is an illustration of a pixel mapping process of the present invention;

10 Figure 6 is an image of target points obtained from a pixel-oriented simulation of the present invention;

Figure 7 is an isometric representation of the data from Figure 6;

Figure 8 is a side-by-side comparison of two images of target points obtained from a pixel-oriented simulation of the present invention;

15 Figure 9 is a spatially-compounded image of target points obtained from a pixel-oriented simulation of the present invention;

Figure 10 is an isometric representation of the data from Figure 9;

Figure 11 is a block diagram illustrating representative applications for the pixel-oriented image processing method of the present invention; and

20 Figures 12A-12C illustrate alternative processing methods.

DETAILED DESCRIPTION OF THE INVENTION

The software-based method and system architecture in accordance with one embodiment of the invention implements all real-time processing functions in software. The proposed architecture is shown
25 schematically in Figure 2.

The only custom hardware component in the software-based system is a plug-in module to the expansion bus of the computer that contains the pulse generation and signal acquisition circuitry, and a large block of expansion memory that is used to store signal data. The signal acquisition
30 process consists of amplifying and digitizing the signals returned from each of

the transducer elements following a transmit pulse. Typically, the only filtering of the signals prior to digitization, other than the natural band-pass filtering provided by the transducer itself, is low pass, anti-aliasing filtering for A/D conversion. The signals are sampled at a constant rate consistent with the
5 frequencies involved, and the digitized data are stored in memory with minimal processing. The straight-forward design of the signal acquisition allows the circuitry to be implemented with off-the-shelf components in a relatively small amount of board area.

A more detailed look at the plug-in module is shown in Figure 3.
10 Multiple acquisition channels are shown, each composed of a transmitter, receiver pre-amplifier, A/D converter, and memory block. During receive, the transducer signals are digitized and written directly to the individual memory blocks. The memory blocks are dual-ported, meaning they can be read from the computer side at the same time acquisition data is being written from the
15 A/D converter side. The memory blocks appear as normal expansion memory to the system CPU(s). It should be noted that the size of the plug-in module is not limited to the normal size of a standard computer expansion card, since the system is preferably housed in a custom enclosure. Also, multiple plug-in modules can be used to accommodate a large number of transducer elements,
20 with each module processing a subset of the transducer aperture.

The components for the plug-in module, including amplifiers, A/D converters and associated interface circuitry, and the needed components for transmit pulse generation and signal acquisition are readily commercially available components and will not be described in detail herein. The memory
25 block needed for RF data storage of echo signals obtained from received echoes is essentially the same circuitry as found in commercially available plug-in expansion memory cards, with the addition of a second direct memory access port for writing the digitized signal data. (The received echo signal data is generally referred to as RF data, since it consists of high frequency electrical
30 oscillations generated by the transducer.) The memory is mapped into the central processor's address space and can be accessed in a manner similar to

other CPU memory located on the computer motherboard. The size of the memory is such that it can accommodate the individual channel receive data for up to 256 or more separate transmit/receive cycles. Since the maximum practical depth of penetration for round trip travel of an ultrasound pulse in the body is about 500 wavelengths, a typical sampling rate of four times the center frequency will require storage of as many as 4000 samples from an individual transducer element. For a sampling accuracy of 16 bits and 128 transducer channels, a maximum depth receive data acquisition will require approximately one megabyte of storage for each transmit/receive event. To store 256 events will therefore require 256 MB of storage, and all totaled, a 128 channel system could be built on a few plug-in cards.

Another aspect of the software-based ultrasound system is the computer motherboard and its associated components. The motherboard for the proposed design should preferably support a multi-processor CPU configuration, for obtaining the needed processing power. A complete multi-processor computer system, complete with power supply, memory, hard disk storage, DVD/CD-RW drive, and monitor is well-known to those skilled in the art, can be readily commercially purchased, and will not be described in greater detail.

A software-based ultrasound system must truly achieve "high-performance," meaning image quality comparable to existing high-end systems, in order to provide a significant benefit to the health care industry. This level of performance cannot be achieved by simply converting the flow-through processing methods of current systems to software implementations, since a simple addition of all the processing operations needed for one second of real-time imaging in the flow-through architecture gives a number that exceeds the typical number of operations per second currently achievable with several general purpose processors. Consequently, new processing methods are required that achieve a much greater efficiency than the flow-through methods.

In one embodiment of the software-based ultrasound system architecture of the present invention, the input data for signal and image

processing consists of the set of RF samples acquired from individual transducer channels following one or more transmit events. For an example, let us consider a typical 2D imaging scanning mode with a 128 element linear transducer array, as shown in Figure 4.

5 In this case, a 'transmit event' would consist of timed pulses from multiple transducer elements to generate a plurality of acoustic waves that combine in the media to form a focused ultrasound beam that emanates outwards from an origin point on the transducer at a specific element location. Multiple transmit events (128 in all) produce ultrasound beams that are
10 sequentially emitted incrementally across the width of the transducer face, thus interrogating an entire image frame. For each of these transmit beams, the received echo data are collected from each of the 128 receiver elements in the transducer and organized into a data array with each column representing the sampled echo signal received by the corresponding transducer element. Thus,
15 each array has 128 columns, corresponding to the 128 transducer elements, and a number of rows corresponding to the number of samples in depth that were taken (in this case, we will assume 4096 rows resulting in 4096 samples). These 128 data arrays then constitute an RF data set that is sufficient to produce one complete image frame.

20 It is worth noting that in the flow-through architecture, the RF data set described above does not even exist (at least not all at one time), since the beam and image formation takes place as the data streams in from the transducer. In other words, as the data return to each element after a transmit event, they are processed and combined (referred to as beamforming) to
25 generate a single RF signal representing the focused return along a single beam (scanline). This RF signal is processed (again in real-time) into echo amplitude samples, which are stored in a memory array. When all beam directions have been processed, the echo amplitude data are then interpolated and formatted into a pixel image for display. Since all processing takes place in
30 real-time, the processing circuitry must be able to 'keep up' with the data streaming in from the transducer elements.

In the software-based architecture of the present invention, all input data is stored prior to processing. This uncouples the acquisition rate from the processing rate, allowing the processing time to be longer than the acquisition time, if needed. This is a distinct advantage in high frequency
5 scans, where the depth of acquisition is short and the sample rate high. For example, a 10 MHz scanhead might have a useable depth of imaging of around four centimeters. In this case, the speed of sound in tissue dictates that each of the 128 transmit/receive events acquire and store their data in 52
microseconds, a very high acquisition data rate. In the flow-through
10 architecture, these acquisition data would be formed into scanlines in real-time at high processing rates. In the software-based architecture of the present invention, the storage of RF data allows the processing to take as long as the frame period of the display, which for real-time visualization of tissue movement is typically 33 milliseconds (30 frames/second). For 128 pixel columns (the
15 rough analogy to scan lines), this would allow 258 microseconds of processing time per column, rather than the 52 microseconds of the flow-through architecture. This storage strategy has the effect of substantially lowering the maximum rate of processing compared with the flow-through architecture for typical scan depths.

20 Pixel-oriented processing

The storing of input data reduces the maximum processing rates but doesn't necessarily reduce the number of processing steps. To accomplish this, a new approach to ultrasound data processing is taken. The first step is to recognize that the ultimate goal of the system when in an imaging mode is to
25 produce an image on the output display. An ultrasound image has a fundamental resolution that depends on the physical parameters of the acquisition system, such as the frequency and array dimensions, and can be represented as a rectangular array of pixel values that encode echo amplitude or some other tissue (acoustic) property. The density of this rectangular pixel
30 array must provide adequate spatial sampling of the image resolution. It is

recognized that display images need not consist only of rectangular arrays of pixels, but could consist of any arbitrary set of pixels, representing different geometric shapes. The next step is to start with one of the pixels in this image array and consider which sample points in the RF data set contribute to the
5 calculation of this pixel's intensity, and determine the most efficient way of accessing and processing them. This approach is a completely different approach than the one utilized by the current flow-through architecture because only information that contributes to pixels on the display needs to be processed. In the approach of the present invention, a small region on the display image
10 will take less overall processing time than a large image region, because the small region contains fewer pixels. In contrast, the flow-through processing methods must be designed to handle the *maximum* data stream bandwidths, independent of the image region size.

After processing the pixel array required to adequately represent
15 the ultrasound image, the array can be rendered to the computer display at an appropriate size for viewing. The graphics processor of the computer, requiring no additional CPU processing, can typically carry out this operation, which consists of simple scaling and interpolation.

We next consider the processing strategy for a single pixel of our
20 ultrasound image. In this discussion, we will assume that our objective is to obtain the echo intensity at the corresponding spatial location of the pixel with respect to the transducer array. Other acoustic parameters may be similarly obtained. Our first step is to find the region of acquisition RF data containing samples that contribute to the echo intensity calculation. To accomplish this for
25 the scanning method of Figure 4, we first find the acquisition scan line that comes closest to intersecting the pixel location, and then use the corresponding individual element data array. Figure 5 shows this mapping process for an example pixel in an ultrasound image. In Figure 5, the indicated pixel maps to the closest acquisition line of the scan, which in this case is scan line 4, whose
30 RF data resides in the fourth individual element RF data array (which represents data collected from the fourth transmit/receive event). More than

one RF data array could be chosen as contributing to the pixel signal, but for this example we will consider only a single data array.

Out next step is to map out the region in the individual element array containing samples that contribute to the pixel's intensity calculation. This mapping process is fairly complex and depends on several factors. The transducer elements each have a region of sensitivity that determines how they will respond to a signal returning from a particular point in the image field. For a given image point, only elements that have sensitivities above a predetermined threshold need be considered, since if the sensitivity is too low, an element will not contribute useful information to the pixel's quantity. This sensitivity threshold then determines the number of element data columns to include in the mapped region. As shown in Figure 5, elements on the far right hand side of the transducer are not included in the mapped data region.

The starting depth of the mapped data region is determined by the arrival time of the returning echo at each individual transducer element. As shown in Figure 5, the image point signal for elements further away from the image point is captured later in time, and so the starting point of the data set is deeper in memory. Finally, the depth range needed for the mapped data region is dependent on the duration of the transmit pulse generated. Longer transmit pulses will excite the image point for a longer period of time, generating echo signals that extend over a larger depth span of the RF memory.

Fortunately, many of the factors that go into determining the region of mapped data can be pre-computed for a given pixel grid, since this grid does not change over the multiple frames of a real-time image sequence. Using pre-computed factors, the mapped data region for a given pixel can be rapidly and efficiently determined, saving considerable computations during real-time imaging.

After selecting out the pixel mapped RF data, we can organize it into a matrix, RFP_{nm} , as shown below.

$$RFP_{nm} = \begin{bmatrix} a_{11}a_{12}\dots\dots a_{1k} \\ a_{21} \\ \dots\dots \\ \dots\dots \\ a_{j1}\dots\dots\dots a_{jk} \end{bmatrix}$$

The notation 'P_{nm}' refers to the image pixel in row n, column m. The matrix columns are the vertical bars of Figure 5 where it is assumed that the number of samples, j, in each vertical bar are the same. The number of samples, j, is dependent on the range of RF data in time needed for capturing the signal generated by the transmit pulse. The index, k, is the number of channels in the RF data array that have adequate signal strength from the image point to participate in the intensity calculation.

The process of computing the signal intensity value of pixel P_{nm} now consists of a series of matrix operations that eventually lead to a single value. When the computations are organized in this fashion, it quickly becomes apparent that some of the matrix operations may be algebraically combined, leading to fewer computational operations. Without going into specific details, the operations of sample interpolation to find the correct delay values for individual elements, bandpass filtering, Hilbert transform filtering for quadrature detection, and final summation can be performed in a single matrix multiply, then taking the trace of the resulting matrix (The trace of a matrix is the sum of the elements along the main diagonal. Since only the main diagonal of the result of the matrix multiply is needed, the multiply operation can be considerably simplified). Since many of the matrices needed for these operations are independent of the pixel location, they can be pre-computed prior to real-time operation. The processing matrix can then be formed by combining pre-computed elements with elements that change dynamically with the pixel location (such as interpolation parameters). With a fixed number of interpolation steps, it is even possible to select the rows of the processing matrix from a collection of pre-computed vectors. The use of pre-computed data for forming the processing matrix, while not essential to the method, can substantially reduced processing time for real-time operation.

The signal value derived from the pixel oriented processing is typically a complex signal value, which can be represented by quadrature samples I, and Q. To obtain the echo intensity at our image point, the magnitude of the signal is computed, using a simple square root of the sum of the squares of the quadrature samples. If phase information is needed (as for additional processing for Doppler sensing), the complex signal representation can be retained.

With this computational approach, the number of processing steps required to compute a pixel's reconstructed signal value are reduced substantially over the flow-through architecture. Estimates derived from sample calculations indicate that for typical image sizes, operation reductions as great as 10-to-1, a full order of magnitude, are possible. Moreover, the matrix operations needed can be carried out using the vector processing capabilities of modern processors, where multiple data can be operated on using single instructions (These instructions are called 'SIMD' instructions, which stands for 'single instruction, multiple data.' For example, the AltiVec processing unit of the PowerPC can perform a multiply and accumulate on two vectors, containing eight 16-bit samples each, in a single clock cycle). These factors make it feasible to perform real-time processing of ultrasound image data using one or more general-purpose processors.

It is important to note that for the typical imaging scan, the pixel oriented processing method generates no intermediate data sets - the processing method goes directly from unprocessed acquired RF data to pixel intensity, through a series of matrix operations on the mapped acquisition data. Each pixel of the output image maps to its own unique region of the acquisition data, and has its own processing matrix, allowing a direct conversion from raw acquisition data to the desired acoustic signal estimate. This is not the case with the traditional flow-through architecture, which typically processes the individual channel RF data to beamformed RF samples along transmit/receive ray lines and then generates a detected amplitude data set that is then scan converted for display. In the pixel-oriented processing method, even the

process of scan-conversion, which for a sector format scan involves polar-to-rectangular coordinate conversion, is included in the single processing operation.

For irregular shapes of image data, it is more appropriate to
5 consider the collection of pixels to be rendered as a pixel set. The actual display presented to the user can then consist of multiple pixel sets processed and rendered as a display frame. This concept is useful for implementing complex scan formats, as well as the various standard modes of ultrasound scanning, such as 2D imaging combined with Doppler imaging, 2D imaging
10 combined with time-motion imaging (M-mode), or 2D imaging combined with spectral Doppler display. In the case of time-motion imaging and spectral Doppler, the pixel set might consist of a single pixel column, which is moved sequentially across the display.

It should also be noted that the pixel-oriented processing method
15 generates image data that can be precisely measured on the display to derive other types of empirical data. In 2D imaging, each pixel has a known spatial relationship to the transducer, consequently, a measurement distance in pixels can be easily converted to a measurement distance in the media being imaged.

One possible impediment to the processing method described
20 above is bus bandwidth. The memory arrays of received RF data associated with each transmit event must be accessed to compute image points and this access must occur over the expansion bus of the computer. If, for the case of a maximum range ultrasound acquisition, all samples in each memory array were needed for processing, the required bandwidth for the sampling method
25 described above would be $128 \times 4096 \times (2\text{bytes/sample}) \times (128 \text{ arrays}) = 128$ MBytes per frame (The second level caching of accessed samples insures that samples needing multiple times for processing in a given frame will be assessed from the cache after the first access, rather than over the expansion bus). At 30 fps, this would amount to a rather large bandwidth of 3.75
30 GBytes/second, which is at the limits of the current capabilities of most computer buses (the PCI-Express bus is specified at a peak data rate of

256KBytes/sec/lane, which for a 16 lane expansion slot provides 4GBytes/sec of transfer capability). Fortunately, due to the factors explained above, only a subset of the samples in each memory array are needed to compute the image points. Since each transducer element has a limited spatial range of sensitivity, not all elements contribute to a given reconstruction point. Moreover, the typical round trip imaging range for most applications is around 500 – 600 wavelengths (for example, 8 – 10cm for a 5 MHz transducer), so that the memory arrays are only partially filled. These factors result in a typical bus bandwidth requirement of around 1-2 GBytes for 30 fps imaging, which is well within the capabilities of current computer expansion buses.

A further reduction of bus bandwidth can be accomplished by using fewer transmit events, which amounts to a type of multi-line imaging – a technique that is commonly used on high-end ultrasound systems to improve frame rate. Since the transmit beam can be broadened to cover the width of the image field with fewer transmit/receive events, the number of individual element data arrays can be reduced. In this case, multiple pixels along a row fall within the beam pattern of a single transmit. These multiple pixels will still have their own mapped data region, but the regions will all be from the same data array, thus reducing the amount of data that must be transferred over the bus. The pixel-oriented processing method can easily accommodate this type of image acquisition and processing.

Simulation studies have been performed to address the image quality and computational speed of the pixel-oriented processing method. An image of simulated point targets arranged in a pattern is shown in Figures 6 and 7. The linear transducer array simulated is composed of 128 elements at 1 wavelength spacing. Since the simulation is in wavelength units, it is independent of the ultrasound center frequency. The transmit pulse used in this simulation is a cosine weighted three cycle burst, which is a fairly typical pulse shape for current transducers. The transmit focus is set at 100 wavelengths, and accounts for the increased intensity of the echo amplitudes around this range. The spacing of image points in the simulation is at one-

wavelength intervals, which is adequate to represent the spatial resolution of this reconstruction. Figure 7 shows a perspective view of a zoomed region of Figure 6 (50 to 130 wavelengths in depth, 32 to 96 wavelengths laterally. The ability to reconstruct enhanced views of a sub-region of the image field is
5 another strength of the pixel-oriented processing technique.

To generate larger image sizes for high- resolution displays, the ultrasound image can be interpolated to larger display sizes using the processing capability of the computer's graphic card, requiring no additional CPU processing. This process is illustrated by referring to the image in Figure
10 6, which contains only 18560 image points, but has been interpolated to a much larger number of pixels (300 pixels per inch) for rendering on the page.

These simulation studies have verified both the accuracy and speed of the pixel-oriented processing method. It is important to note that all of the processing functions of an ultrasound imaging system have been
15 implemented, including the complex process of beamforming. Further optimization of the processing algorithms can yield higher processing rates, allowing for more complex processing or the rendering of more pixels per image. In addition, the doubling of processor speed with every 18 months will provide a significant boost to pixel processing rates.

20 The software-based architecture of the present invention opens up the possibility of supporting transducers constructed with non-conventional materials and methods, such as low-cost plastic polymer transducers. It accomplishes this by completely de-coupling the acquisition process from the signal and image formation processing. With a minor change to the RF data
25 storage memory interface, the memory writes can be changed to read-modify-writes, allowing input data to be summed with data already in memory. This change allows RF signals to be averaged over multiple identical transmit events, to reduce the effects of system noise and improve dynamic range. Averaging the RF signals permits significant SNR gains compared with
30 averaging amplitude images.

Much of the noise in ultrasound systems is a result of thermal and radiated digital noise from the electronics of the system. The remaining noise is usually environmental RF noise, picked up by the transducer acting as an antenna. In both cases, the noise spectrum is fairly flat, so that with the system
5 filtering of the RF signals, the noise appears as band-limited white noise. This noise typically determines the maximum gain that can be applied to an input signal and thus the penetration of the system, as the returning signals are attenuated as they travel increasing distances through the body.

As mentioned above, the use of signal averaging with the new
10 system architecture can improve signal-to-noise and thus dynamic range significantly. For shallow depths, such as below four or five centimeters, it is feasible to use multiple transmit events for each ultrasound beam direction. The round trip travel time of a pulse traveling to a four centimeter depth is only 52 microseconds, allowing 16 transmit/receive cycles in 832 microseconds.
15 Since movement in the body (with some exceptions) is typically below two or three cm/sec, an echo interface will only move by a small fraction of a wavelength (approximately 1/16 wavelength at 5MHz) in the time it takes to acquire the data for these 16 pulses. A full ultrasound frame using 128 beam positions would then take 106 milliseconds to acquire, giving a useable frame
20 rate of 10 frames per second. This method of acquisition would be expected to result in a four times improvement in signal-to-noise, or about 12 dB. This improvement in signal-to-noise has been verified in simulation studies. Figure 8 shows two simulated images processed using the pixel-oriented processing method. The image on the left is derived from RF data with one transmit pulse
25 per beam, where band-limited white noise approximately 8 times the point target signal strength has been added in each channel. The image on the right uses the same signal to noise ratio for the RF data, but is derived from the average of 16 separate transmit/receive events per beam direction.

The implementation of signal averaging in the acquisition of
30 transducer signals should result in sensitivity and penetration improvements no matter what transducer material is used. For example, it could facilitate the

utilization of arrays made from micro-electromechanical silicone devices, which utilize tiny silicone drums to transmit acoustic information. Finally, for typical transducers made using PZT, it should also allow acoustic power levels to be reduced without sacrificing imaging performance in conventional exams.

5 Another benefit of low power, high dynamic range ultrasound imaging may be in the use of micro-bubble contrast agents to improve visualization of blood flow. Typical power levels result in the rapid destruction of the micro-bubbles, thus limiting visualization studies. Lower power levels should provide longer contrast lifetimes and may permit new clinical protocols.

10 The flexibility of the new software-based ultrasound architecture provides other advantages over the standard flow-through architecture. Previously, we have described how the new pixel-oriented processing methods can be used to implement standard ultrasound imaging acquisition modes. Since individual channel RF data are captured in memory, alternate modes of
15 ultrasound imaging can also be supported. A significant example is often referred to as the 'uniform illumination imaging method,' or 'flash transmit method.' In this approach, the entire image field is interrogated at once with a single, unfocused transmit pulse, followed by acquisition of the returned echo signals from each individual element in the transducer array into a memory
20 buffer. With suitable processing of the individual element data, an entire image plane can be reconstructed, without the need for further transmit pulses. The flash transmit technique can therefore acquire a full image in the same time it takes to acquire a single scan-line using the conventional method, providing theoretical frame rates as much as 128 times higher than a typical scan.

25 The human eye has a fairly slow response time, and as a result, there is not much benefit for ultrasound imaging display rates beyond around 30 frames per second. There are applications, however, such as pediatric cardiac imaging and analysis of heart valve motion, where it is desirable to have a much higher acquisition rate. To serve these applications, the flash
30 transmit imaging technique can be used to acquire RF data frames, which can be stored in successive memory locations at a high acquisition rates in real-

time. For real-time viewing, frames can be selected out of the acquisition stream at a lower rate for processing and display. When the scanning is stopped, all acquisition frames in memory can then be processed and played back at normal or reduced viewing rates, allowing full slow-motion analysis of the rapid tissue movement.

As one might expect, there are some disadvantages to the flash transmit imaging technique. Since the transmit pulse is unfocused, there will obviously be some loss in spatial resolution, although this loss will be confined to the lateral spatial dimension only. Also, since the transmit energy is more diffuse, there will be some loss of echo intensity. Finally, since the larger echo targets in the image are seen 'all the time,' instead of only along specific scan-lines, a high dynamic range reconstruction is required to prevent masking of the smaller echo signals. These deficits have typically led to rejection of the flash transmit reconstruction approach for normal imaging by ultrasound system designers.

The fact that the high frame rate capability of the flash transmit reconstruction technique can be leveraged to reduce or eliminate many of the above-mentioned deficits is often overlooked. In fact, the high frame rates possible with this approach open the door to substantial improvements in contrast resolution, tissue differentiation, and blood flow imaging that are not possible with the conventional image method. For example, recovery of lateral spatial resolution and substantial improvements in contrast resolution can be obtained using spatial compounding with the flash transmit method. The unfocused transmit pulse can be steered through multiple angles to interrogate the media targets from several directions in a time period short enough not to introduce motion artifacts. The images from the individual steering angles are then combined to produce a composite image. Even using as many as nine different angles requires only nine transmit pulses, which for a 10cm image depth example takes only 1.2 milliseconds. Spatial compounding has been shown to provide significant contrast resolution improvements by reducing speckle artifact and averaging out the variations in echo intensity with target

interface angles. For the unfocused transmit case, spatial compounding also can regain some of the loss in lateral spatial resolution, by folding the much better axial resolution of the pulse into the lateral direction. Other techniques for improving contrast resolution, such as frequency compounding and
5 harmonic imaging can also be employed while maintaining very short acquisition times.

Figure 9 shows a simulation that demonstrates the capability of the new system architecture for performing spatial compounding using uniform illumination imaging. The spatial compounding uses five steering angles
10 spaced at 10 degree intervals. Comparing the spatially compounded image of Figure 9 with the "scanline" image of Figure 6, we see that the resolution is comparable while the side lobe levels are somewhat higher. This is remarkable in light of the fact that the acquisition time for the flash transmit image is roughly $1/25^{\text{th}}$ of the time for the conventional image. The lowest side lobe levels of
15 Figure 10 are diffuse and distributed, which is desirable for minimizing artifacts in the image. In actual living tissue, the spatially compounded image would show other benefits, reducing the angular dependence of target returns, and lowering speckle artifact. The flash transmit spatial compounding imaging method could yield higher tissue differentiation than conventional imaging at
20 high frame rates, a combination that is not available in current high-end systems.

The short acquisition times of the flash transmit imaging method can be leveraged in other ways. Since the new system architecture provides multiple RF storage buffers, for the flash transmit method this represents
25 multiple complete frames of data, and very high frame rates for short imaging sequences are possible. Such sequences may have important novel uses, such as 1) capturing full frame Doppler data at multiple angles for angle corrected color flow imaging, 2) shear wave imaging, where the propagation of shear wavefronts through a medium can be visualized, providing information on
30 tissue mechanical properties, 3) elastography, where the strain response of tissue to an external force can yield information about tissue stiffness.

Furthermore, the access to a large buffer of RF frame data makes development of new algorithms straightforward, especially in the academic research community, which has been hampered by the lack of access to RF data on a clinical machine. The simple ability to trade off frame rate for
5 dynamic range or signal to noise ratio may be a useful enhancement not easily implemented in a conventional ultrasound system.

Figure 12 summarizes the variations in the pixel oriented processing method as described above. Figure 12A shows the combining of received echo signals with signals that have been previously stored in the
10 storage arrays. This allows functions such as signal averaging of multiple transmit-receive acquisitions to enhance and improve signal-to-noise and dynamic range of the received signals. Figure 12B illustrates the method of combining processed pixel signals from multiple transmit-receive acquisitions to enhance some aspect of the pixel signal. In the text above, this method was
15 used for combining image data from transmit-receive acquisitions that interrogate media targets from various angles. This results in a spatial compounding that improves the contrast resolution of the final image. Finally, Figure 12C illustrates the de-coupling of the processing of pixel data sets or image frames from the acquisition process. In this case, the acquisition signals
20 required to produce an image are grouped into data sets, which consist of one or more acquisition signal arrays. The storage area is made large enough to store many of these data sets, which can be written to in a circular manner. In this method, the acquisition of echo signal data can be performed at a high rate limited only by speed of sound considerations, while the processing of pixel
25 signals proceeds at a lower rate suitable for display. When the acquisition is stopped, all data sets can be processed at a lower rate to provide a slow motion display.

Figure 11 illustrates a representative selection of pixel-oriented processing applications, which is divided into two areas – high frame rate
30 imaging, which can be used for 3D volume imaging, shear wave imaging, elastography, high dynamic range imaging, and high contrast resolution

imaging, and the second area of high frame rate Doppler flow imaging, which can be used in 3D Doppler flow imaging, vector Doppler flow imaging, and high frame rate tissue Doppler imaging. Further applications in selected categories are also shown in Figure 11.

5 The high frame rate applications leverage the pixel-oriented processing method combined with uniform illumination or flash transmit techniques. For 3D volume imaging, the entire volume of interest can be interrogated with one or more unfocused flash transmit pulses, allowing high real-time frame rates to be achieved, even with the combination of multiple
10 frames for spatial or frequency compounding. For elastography imaging, the high frames rates allow the imaging of mechanical shear waves propagating through the image field, which can reveal information on the elastic properties of tissue. The high dynamic range and high contrast resolution imaging potential has been discussed above, and leverages the signal averaging and
15 multi-frame processing capability of the pixel-oriented processing method.

 The pixel-oriented processing method for 3D volume imaging is more appropriately called a voxel-oriented processing method. This is due to the fact that the output of a 3D volume scan is typically a three-dimensional cuboid containing volume elements, or voxels. The processing procedure for
20 determining acoustic information about a specific voxel is the same as for individual pixels in a 2D image. The voxel's spatial location is mapped to a region of acquired RF data which contributes to the voxel's quantity, and a data matrix is formed. The data matrix is then processed using matrix operations to yield the quantity for the voxel. Voxel data over multiple acquisitions can also
25 be used to obtain 3D Doppler information.

 The voxel data can be displayed as two-dimensional slices through the imaging volume, or as volume-rendered perspective views. It is also possible to have simultaneous displays, where the 3D volume rendering is displayed along side one or more two-dimensional slices determined by the
30 system or user. Such displays are possible, since the received echo signal

data can be processed with both pixel-oriented and voxel-oriented methods at the same time.

3D imaging requires more complex transducer arrays, such as mechanically swept linear arrays, or 2D arrays with large numbers of elements.

5 In this case, the acquisition hardware may require modification. To connect a large number of transducer elements to a lesser number of transmit and receive channels, analog and/or digital multiplexing is generally employed. Some or all of this multiplexing is sometimes incorporated into the transducer housing. The multiplexers are used on transmit to select elements for forming one or more
10 transmit beams that illuminate the 3D volume. On receive, the multiplexers are used to connect a group of transducer elements to the available receive acquisition channels. In some cases, it is appropriate to use synthetic aperture techniques to combine receive data from multiple acquisition events, thus increasing the effective number of processing channels.

15 The right hand side of Fig. 11 shows high frame rate Doppler flow imaging methods that also make use of the flash transmit method combined with pixel-oriented processing. It is possible to acquire flow information for the entire imaging field with only a small number of transmit/receive cycles. This 'ensemble' of acquisitions can be used to compute the average rate of change
20 of phase at each pixel location, which is representative of the Doppler frequency shift associated with moving blood cells. Here again, the high frame rates that can be achieved using this method make practical such applications as 3D volume flow imaging, vector Doppler flow imaging (detecting both the magnitude and direction of blood flow), and tissue Doppler imaging (using the
25 Doppler shift produced by low echogenicity moving tissue to enhance visibility). The high frame rate visualization of tissue motion also supports elastography imaging, which seeks to determine the elastic properties of tissue by observing their response to an induced mechanical displacement.

It is understood that the pixel and voxel oriented processing
30 methods can be applied to many additional modes and applications of ultrasound imaging than are described above. Therefore, the descriptions

above are not intended to limit the scope of the processing method, but rather are provided to illustrate how the method can be used to support various existing and new potential applications.

5 All U.S. patents, U.S. patent application publications, U.S. patent applications, foreign patents, foreign patent applications and non-patent publications referred to in this specification and/or listed in the Application Data Sheet, are incorporated herein by reference, in their entirety.

10 From the foregoing it will be appreciated that, although specific embodiments of the invention have been described herein for purposes of illustration, various modifications may be made without deviating from the spirit and scope of the invention. For example, the processing operations described above to generate pixel or voxel acoustic information have been implemented using matrix operations, but it is recognized that standard mathematical operations, or even hardware based processing methods could be used to
15 accomplish some or all of the processing steps. Accordingly, the invention is not limited except as by the appended claims.

CLAIMS

1. An ultrasound processing method, comprising:
generating an acoustic signal;
receiving at least one echo of the acoustic signal at a plurality of receiving elements and obtaining an echo signal therefrom;
storing each echo signal from each of the plurality of receiving elements;
mapping a given pixel into a region of the stored echo signals;
organizing the mapped region of the stored echo signals into an array for the given pixels;
processing the array to generate a signal response for the given pixels; and
using the signal response to obtain acoustic information for the given pixel.
2. The method of claim 1, comprising an initial step of generating a set of given pixels chosen to represent an area in a field of view of the transducer generating the acoustic signal, in which even given pixel in the set has a known spatial relationship to the plurality of receiving elements.
3. The method of claim 2, further comprising generating an image from the acoustic information for the given pixels in the set.
4. The method of claim 2, further comprising using the acoustic information to measure and display spatial data.
5. The method of claim 2, further comprising using the acoustic information to measure and display temporal data.

6. The method of claim 2, further comprising using the acoustic information to measure and display blood flow data.

7. The method of claim 2, further comprising measuring and displaying tissue displacement response to induced mechanical displacement caused by an acoustic signal.

8. The method of claim 1, comprising generating a plurality of acoustic signals, receiving echoes from the plurality of acoustic signals, combining the received echoes over multiple generating and receiving cycles to enhance acoustic information obtained therefrom.

9. The method of claim 8, wherein receiving echoes from the plurality of acoustic signals comprises obtaining echo signals from the received echoes, storing the echo signals, and combining the received echoes comprises combining the stored echo signals, and further comprising averaging the combined stored echo signals.

10. The method of claim 9 wherein the signal response comprises an average of the echo signals.

11. The method of claim 1, comprising combining results of multiple cycles of generating acoustic signals, receiving echoes, obtaining echo signals from the received echoes and processing the echo signals to obtain pixel signals to derive enhanced acoustic information.

12. The method of claim 11, further comprising processing the stored echo signals in multiple processing steps and combining the processing results to obtain enhanced acoustic information.

13. The method of claim 12 wherein the enhanced acoustic information comprises spatial compounding that improves contrast resolution of a final image.

14. The method of claim 12 wherein the enhanced acoustic information comprises a signal response representative of Doppler information associated with moving tissue or moving blood cells.

15. The method of claim 8 wherein the received echoes are stored at a rate that is higher than a rate of processing the array.

16. An ultrasound processing method, comprising:
generating an acoustic signal;
receiving at least one echo of the acoustic signal at a plurality of receiving elements and obtaining an echo signal therefrom;
storing each echo signal from each of the plurality of receiving elements;
mapping a given voxel into a region of the stored echo signals;
organizing the mapped region of the stored echo signals into an array for the given voxel;
processing the array to generate a signal response for the given voxel; and
using the signal response to obtain three-dimensional acoustic information for the given voxel.

17. The method of claim 16, comprising an initial step of generating a set of given voxels chosen to represent a region in a field of view of the transducer generating the acoustic signal, in which every given voxel in the set has a known spatial relationship to the plurality of receiving elements.

18. The method of claim 17, further comprising generating a three-dimensional image from the acoustic information for the given voxels in the set.

19. The method of claim 17, comprising generating a plurality of acoustic signals, receiving echoes from the plurality of acoustic signals and obtaining corresponding echo signals, and combining voxel signals obtained from the echo signals over multiple cycles of generating, receiving, and storing to enhance acoustic information obtained therefrom.

20. The method of claim 19 wherein the enhanced acoustic information represents Doppler information associated with moving blood cells or tissue.

21. The method of claim 19, further comprising using the acoustic information to display directional 3D Doppler flow data.

22. A method of processing acoustic echoes, comprising:
storing acoustic echo signals received from a plurality of receiving elements;

mapping a given pixel into a region of the stored echo signals;
organizing the mapped region of the stored echo signals into an array for the given pixel;

performing operations on the array to generate a signal response for the given pixel; and

using the signal response to obtain acoustic information for the given pixel.

23. The method of claim 22, comprising an initial step of generating a set of given pixels chosen to represent an area in a field of view of

the transducer generating the acoustic signal, in which even given pixel in the array set has a known spatial relationship to the plurality of receiving elements.

24. The method of claim 23, further comprising generating an image from the acoustic information for the given pixels in the array.

25. An ultrasound processing system, comprising:
a module adapted to generate an acoustic signal, receive at least one echo of the acoustic signal at a plurality of receiving elements in the module and obtain a plurality of echo signals therefrom; and

means for processing that communicates with the module and is adapted to map a given pixel into a region of stored echo signals received from the module, to organize the mapped region of the stored echo signals into an array for the given pixel, to perform operations on the array to generate a signal response for the given pixel, and to use the signal response to obtain acoustic information for the given pixel.

26. The system of claim 25 wherein the processing means is configured to generate a set of given pixels chosen to represent an area in a field of view of the module in which each given pixel in the set has a known spatial relationship to the plurality of receiving elements in the module.

27. The system of claim 26, further comprising means for generating an image from the acoustic information for the given pixels in the array.

28. The method of claim 26 wherein the processing means is adapted to generate an image from the acoustic information for the given pixels in the array.

29. The method of claim 28 wherein the processing means is adapted to measure and display spatial data.

30. The method of claim 28 wherein the processing means is configured to measure and display temporal data.

31. The system of claim 28 wherein the processing means is adapted to measure and display blood flow data.

32. The method of claim 28 wherein the processing means is adapted to measure and display tissue response to induced mechanical displacement caused by an acoustic signal.

33. The system of claim 26 wherein the processing means is configured to generate a plurality of acoustic signals, receive echoes from the plurality of acoustic signals and obtain echo signals therefrom, store the echo signals, and combine the stored echo signals over multiple cycles of generating, receiving, and storing to enhance the acoustic information obtained therefrom.

34. The system of claim 33 wherein the combined echo signals are averaged.

35. The system of claim 33 wherein the signal response generated from processing the array comprises an average of the stored echo signals.

36. The system of claim 26 wherein the processing means is adapted to perform multiple steps of processing the array and combining the results of the multiple steps of processing to obtain further enhanced acoustic information.

37. The system of claim 36 wherein the further enhanced acoustic information comprises spatial compounding that improves contrast resolution of a final image.

38. The system of claim 36 wherein the further enhanced acoustic information is representative of Doppler information associated with moving tissue or moving blood cells.

39. The system of claim 36 wherein the processing means is configured to receive, obtain, and store echo signals at a rate that is higher than a rate of processing the array.

40. An ultrasound processing system, comprising:
a module adapted to generate an acoustic signal, receive at least one echo of the acoustic signal at a plurality of receiving elements in the module and obtain a plurality of echo signals therefrom; and
means for processing that communicates with the module and is adapted to map a given voxel into a region of stored echo signals received from the module, to organize the mapped region of the stored echo signals into an array for the given voxel, to perform operations on the array to generate a signal response for the given voxel, and to use the signal response to obtain acoustic information for the given voxel.

41. The system of claim 40 wherein the processing means is configured to generate a set of given voxels chosen to represent a volume in a field of view of the transducer in which each given voxel in the set has a known spatial relationship to the plurality of receiving elements in the transducer.

42. The system of claim 41, further comprising means for generating an image from the acoustic information for the given voxels in the set.

43. The method of claim 41 wherein the processing means is adapted to generate an image from the acoustic information for the given voxels in the array.

44. The method of claim 43 wherein the processing means is adapted to measure and display spatial data.

45. The method of claim 43 wherein the processing means is configured to measure and display temporal data.

46. The system of claim 43 wherein the processing means is adapted to measure and display blood flow data.

47. The method of claim 43 wherein the processing means is adapted to measure and display tissue response to induced mechanical displacement caused by an acoustic signal.

48. The system of claim 41 wherein the received echoes are combined over multiple cycles of generating, receiving, and storing to enhance the acoustic information obtained therefrom.

49. The system of claim 48 wherein the combined echo signals are averaged.


50. The system of claim 48 wherein the signal response comprises an average of the stored echo signals.

51. The system of claim 41 wherein the processing means is adapted to perform multiple steps of processing the array and combining the results of the multiple steps of processing to obtain further enhanced acoustic information.

52. The system of claim 51 wherein the further enhanced acoustic information comprises spatial compounding that improves contrast resolution of a final image.

53. The system of claim 51 wherein the further enhanced acoustic information is representative of Doppler information associated with moving tissue or moving blood cells.

54. The system of claim 51 wherein the processing means is configured to receive, obtain, and store echo signals at a rate that is higher than a rate of processing the array.

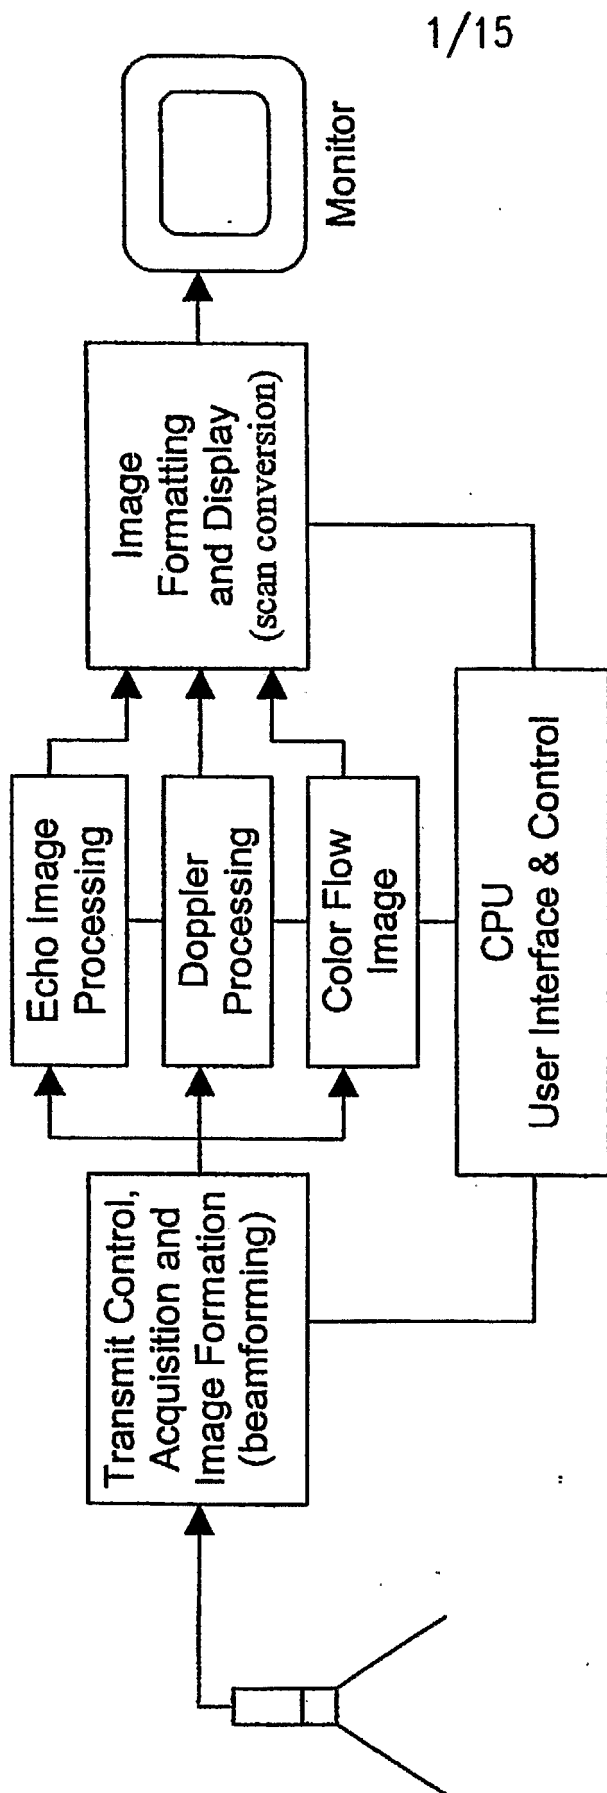

FLOW-THROUGH SYSTEM ARCHITECTURE USED BY CURRENT ULTRASOUND SYSTEMS.

FIG. 1A

Conventional Processing Method for 2D Imaging


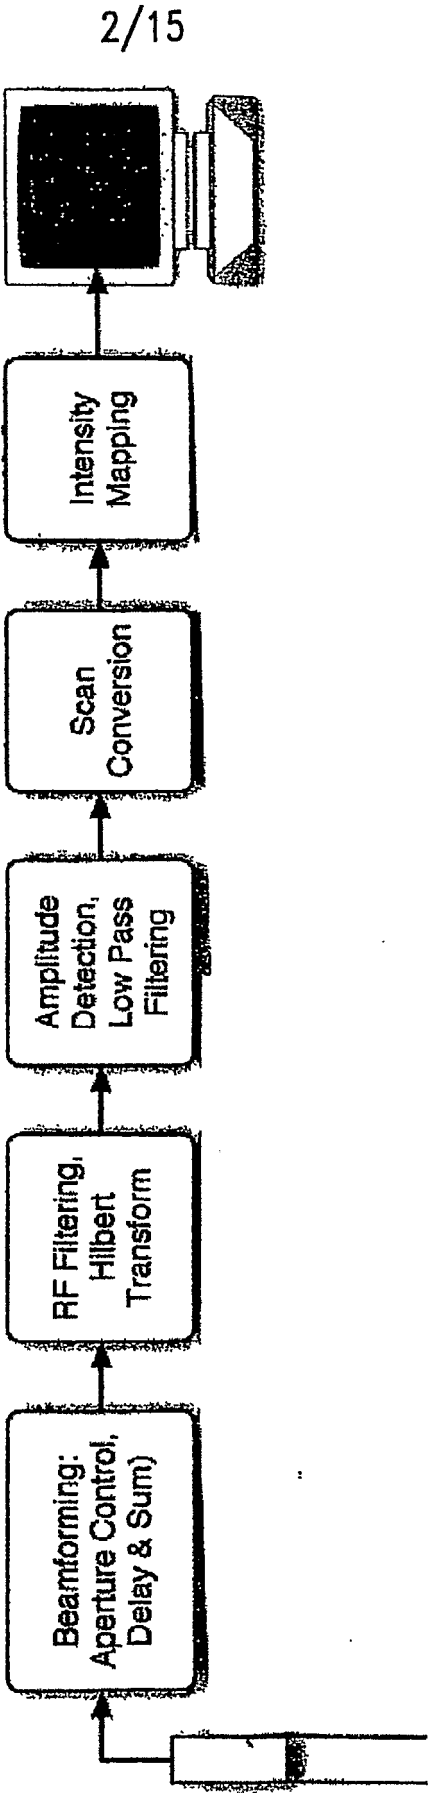


FIG. 1B

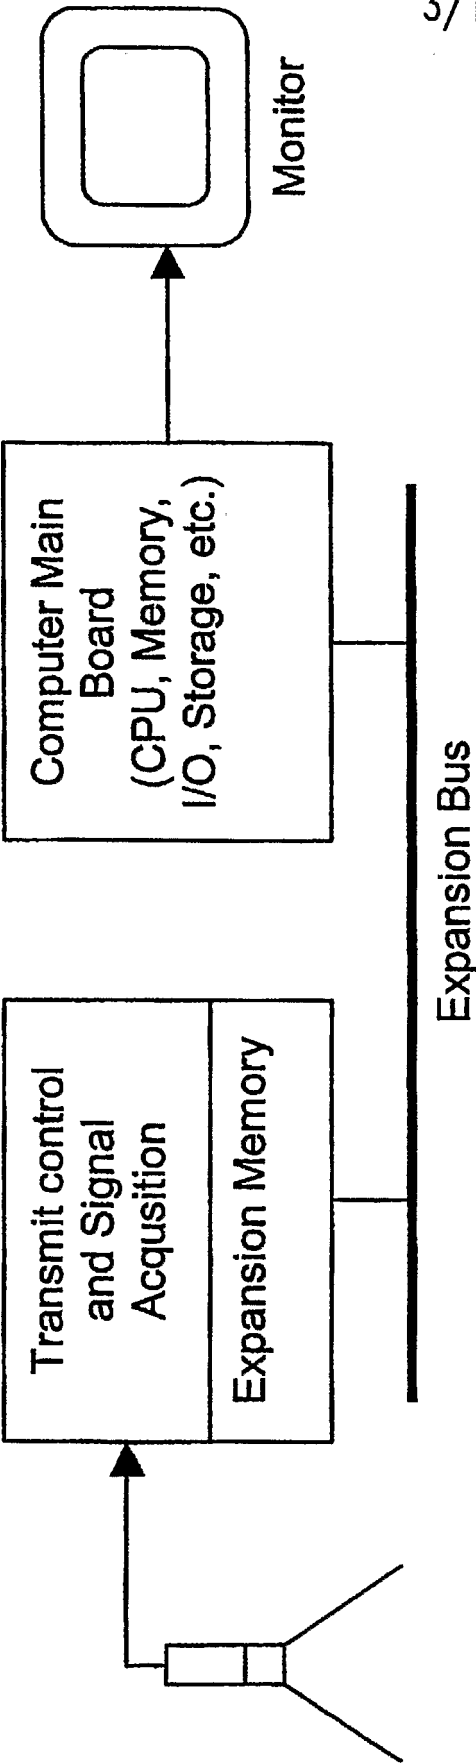

SOFTWARE-BASED SYSTEM ARCHITECTURE

FIG. 2

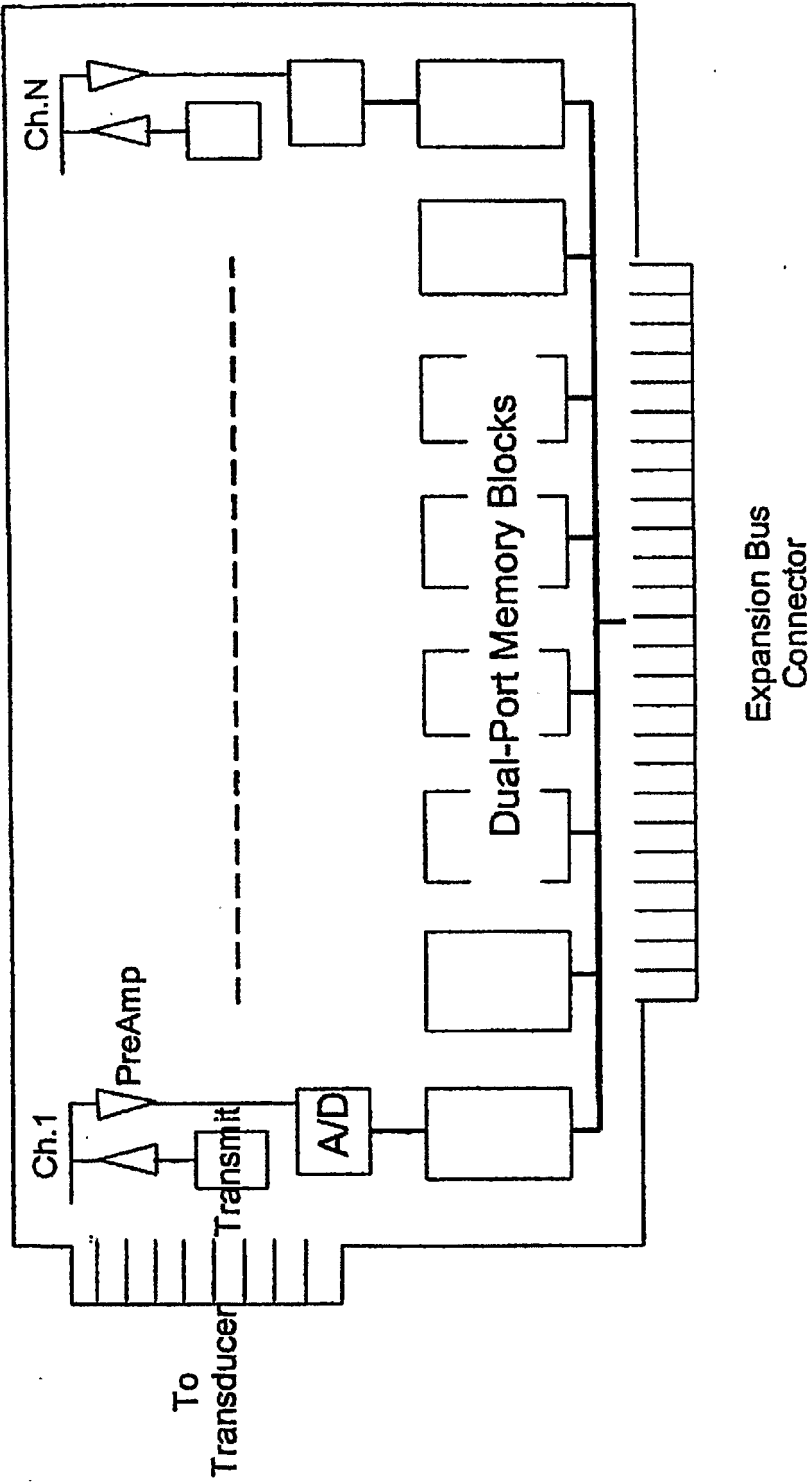
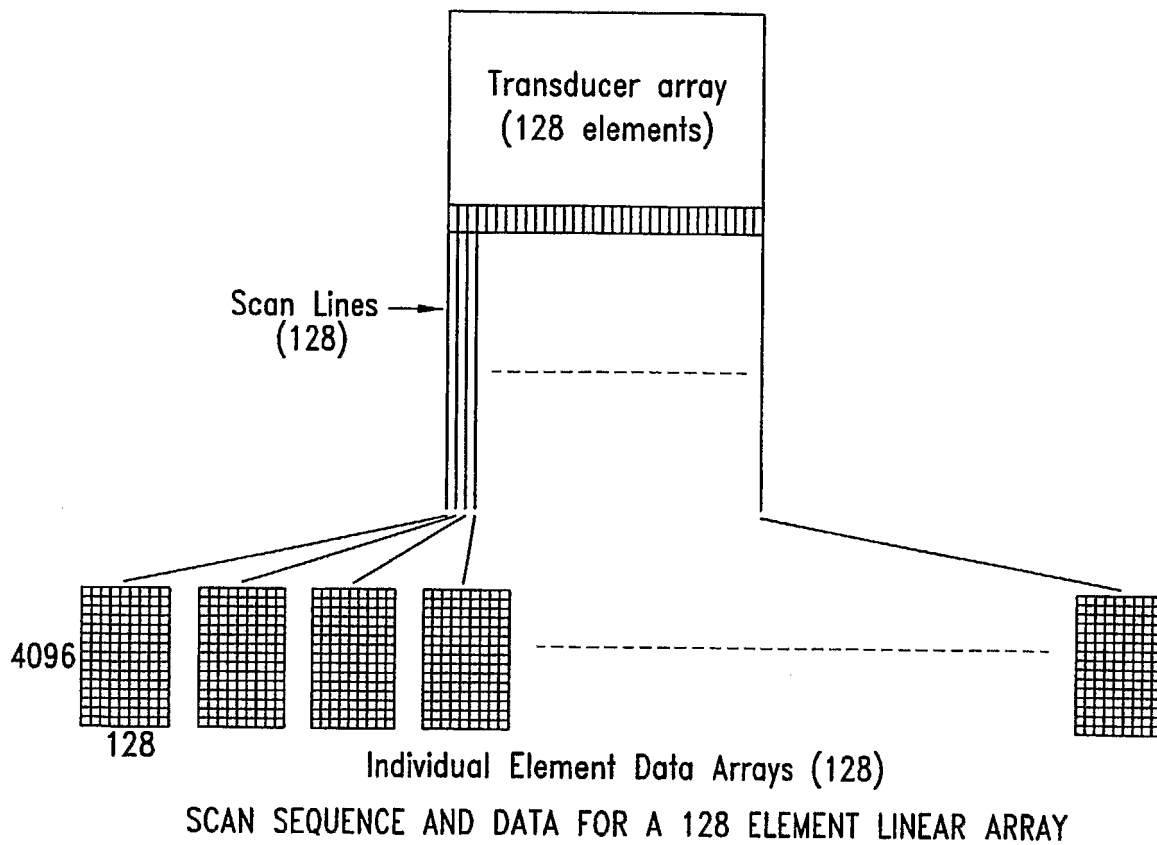


DIAGRAM OF PLUG-IN MODULE CONTAINING ACQUISITION CIRCUITRY.

FIG. 3


5/15

*FIG. 4*


SUBSTITUTE SHEET (RULE 26)

6/15

FIG. 5

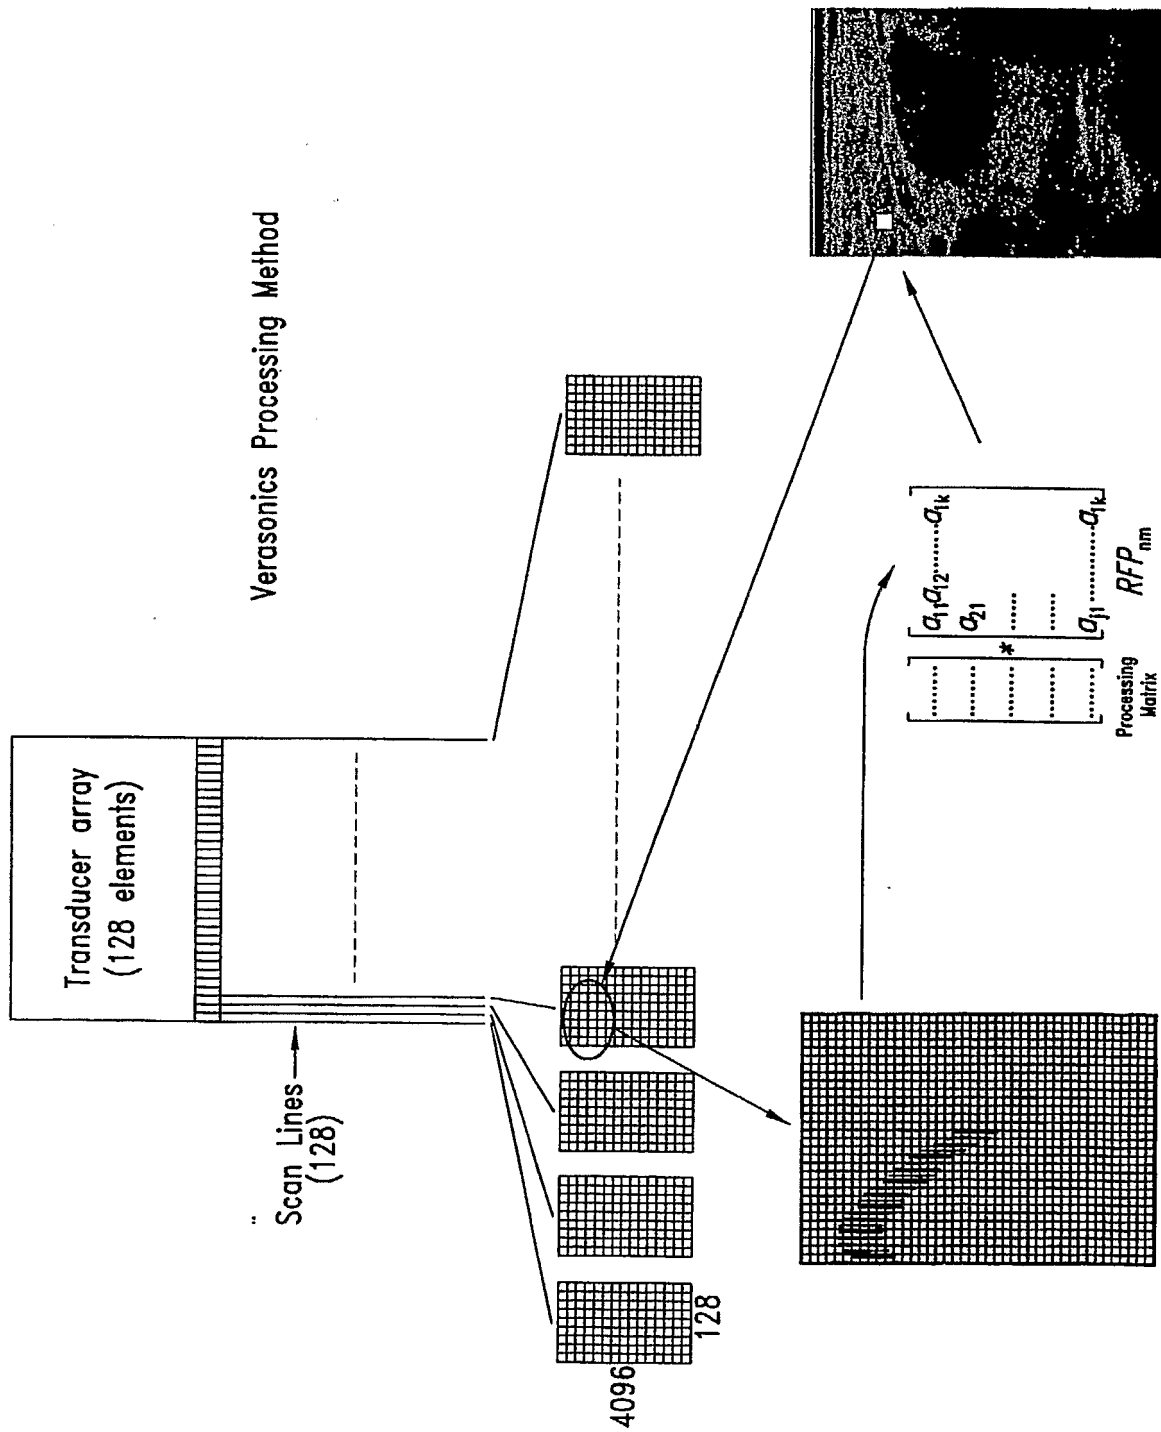


7/15

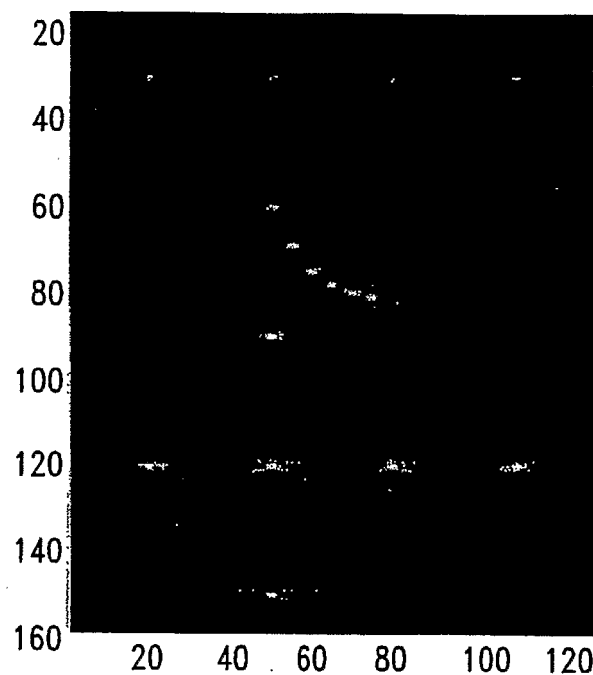

MATLAB SIMULATION OF PIXEL-ORIENTED PROCESSING METHOD. THE POINT TARGETS SHOW THE TYPICAL CROSS-SHAPED PATTERN FOR SLIDE LOBES (INTENSITY DATA ARE COMPRESSED USING A SQUARE-SHAPED PATTERN FOR SIDE LOBES (INTENSITY DATA ARE COMPRESSED USING A SQUARE ROOT FUNCTION)). SCALE ALONG X AND Y AXIS IS IN WAVELENGTHS.

FIG. 6

8/15

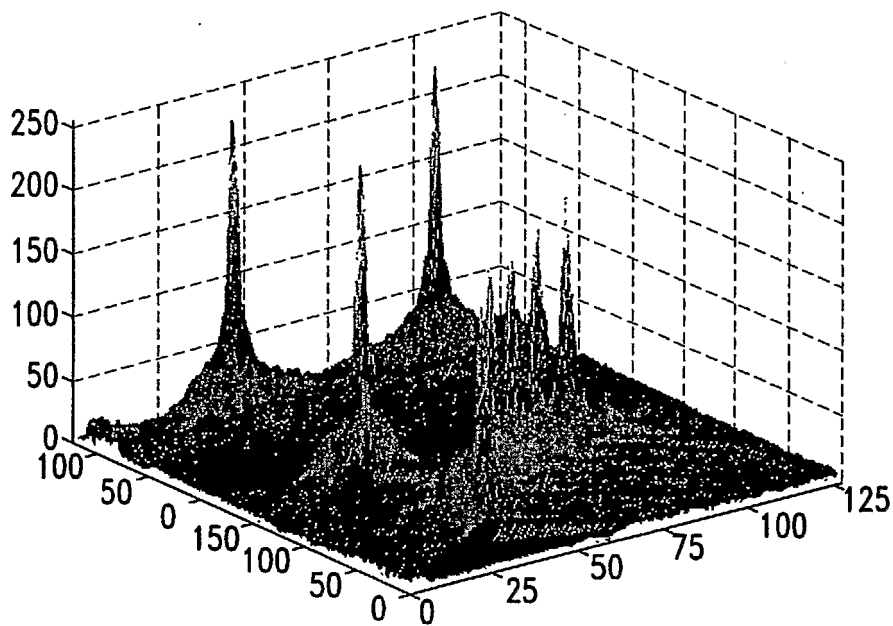


PERSPECTIVE VIEW OF ZOOMED REGION OF FIG. 6, WITH IMAGE POINTS AT $1/2$ WAVELENGTH SPACING. PINK COLOR HIGHLIGHTS SIDE LOBES AT -48DB OR LOWER, WHILE DARK BLUE COLOR SHOWS BACKGROUND CLUTTER AT LESS THAN -100DB . SCALE ALONG X AND Y AXIS IS IN $1/2$ WAVELENGTH UNITS.

FIG. 7

SUBSTITUTE SHEET (RULE 26)


9/15

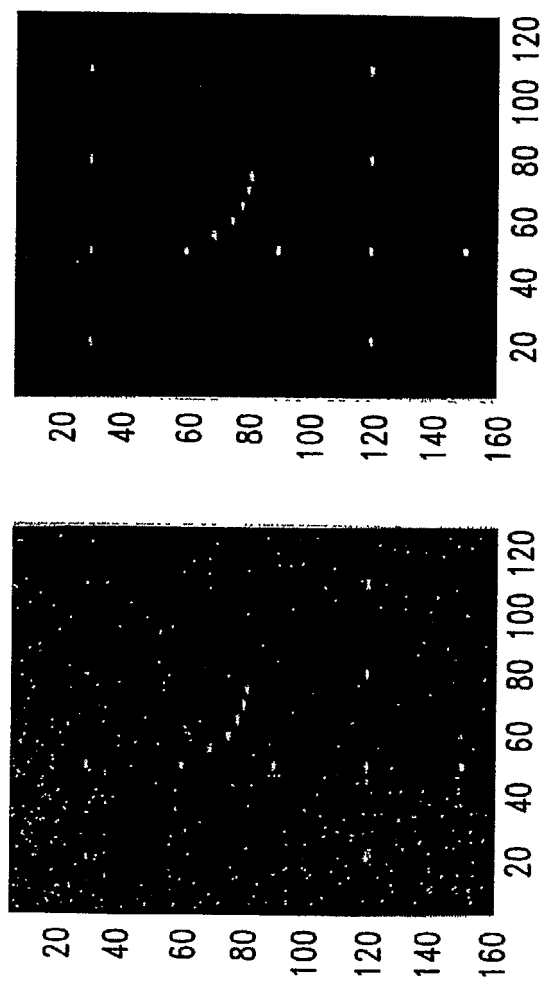

EFFECTS OF SIGNAL AVERAGING ON BAND-LIMITED NOISE ADDED TO RF DATA. THE IMAGE ON THE LEFT IS PROCESSED FROM RF DATA WITH ONE TRANSMIT PULSE FOR EACH BEAM DIRECTION, WHERE THE IMAGE ON THE RIGHT IS PROCESSED FROM RF DATA SUMMED OVER 16 TRANSMIT/RECEIVE EVENTS PER BEAM DIRECTION.

FIG. 8

10/15

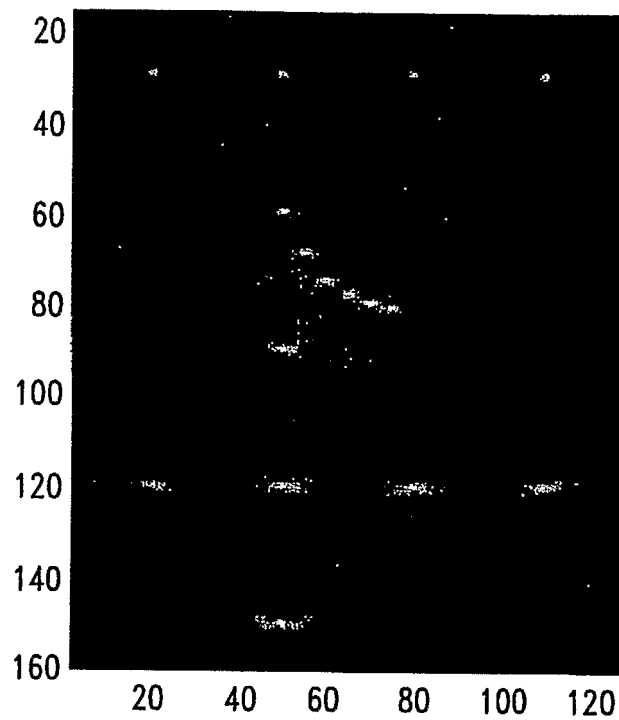


SPATIALLY COMPOUNDED IMAGE RECONSTRUCTION USING UNIFORM ILLUMINATION METHOD. FIVE FLAT WAVEFRONT PULSES WERE USED AT STEERING ANGLES OF -20, -10, 0, 10, AND 20 DEGREES. INTENSITY DATA ARE COMPRESSED WITH A SQUARE ROOT FUNCTION.

FIG. 9

SUBSTITUTE SHEET (RULE 26)

11/15

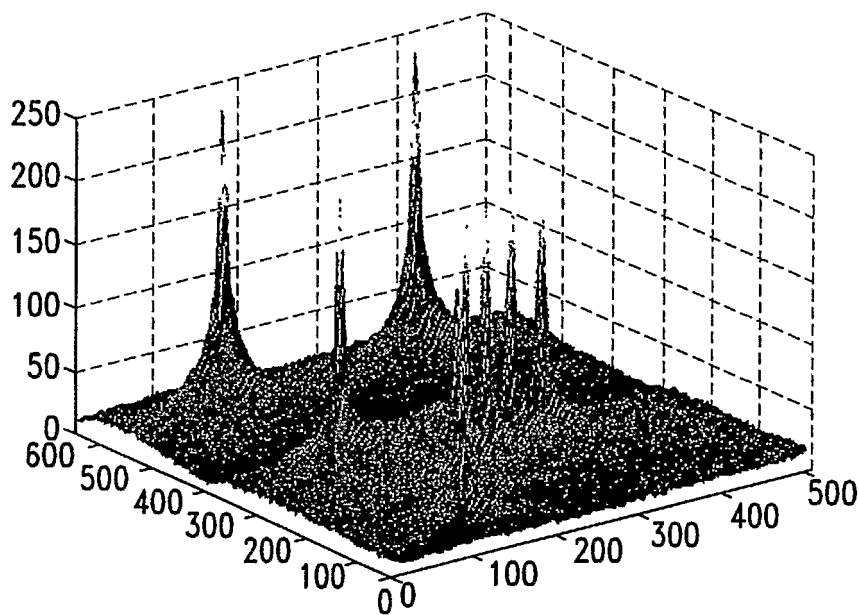

PERSPECTIVE VIEW OF ZOOMED REGION OF FIG. 8. PINK COLOR REPRESENTS AMPLITUDES OF -48DB AND BELOW, WHILE DARKEST BLUE IS AT -68DB. X AND Y AXIS ARE IN UNITS OF 1/8 WAVELENGTH.

FIG. 10

SUBSTITUTE SHEET (RULE 26)

12/15


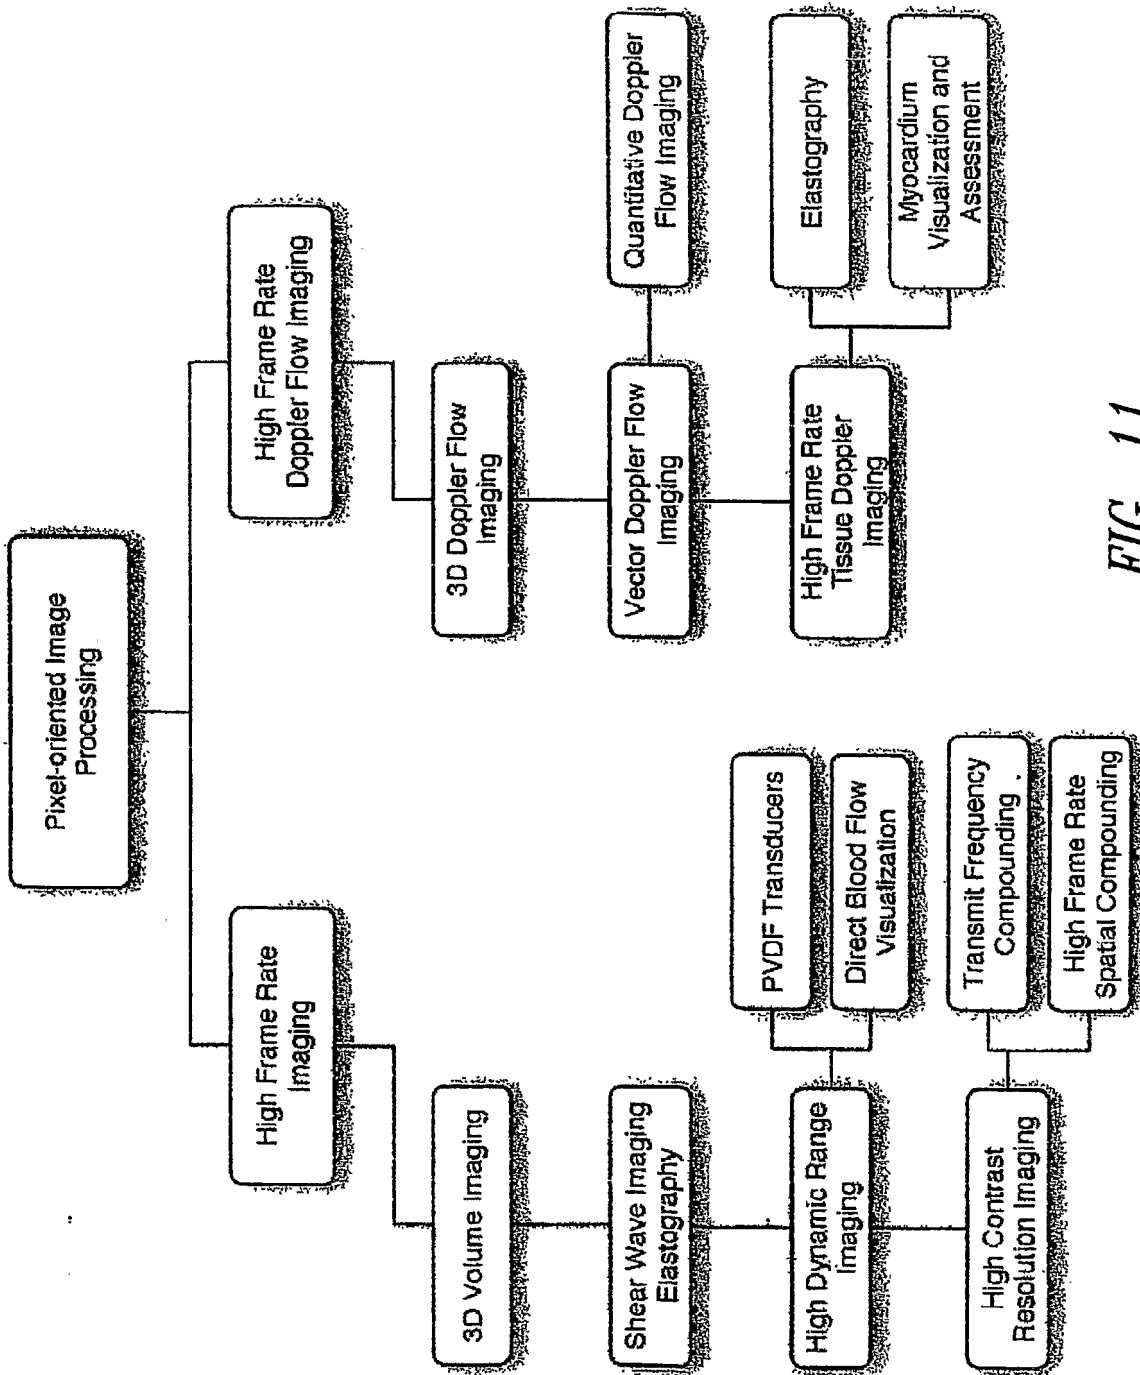


FIG. 11


13/15

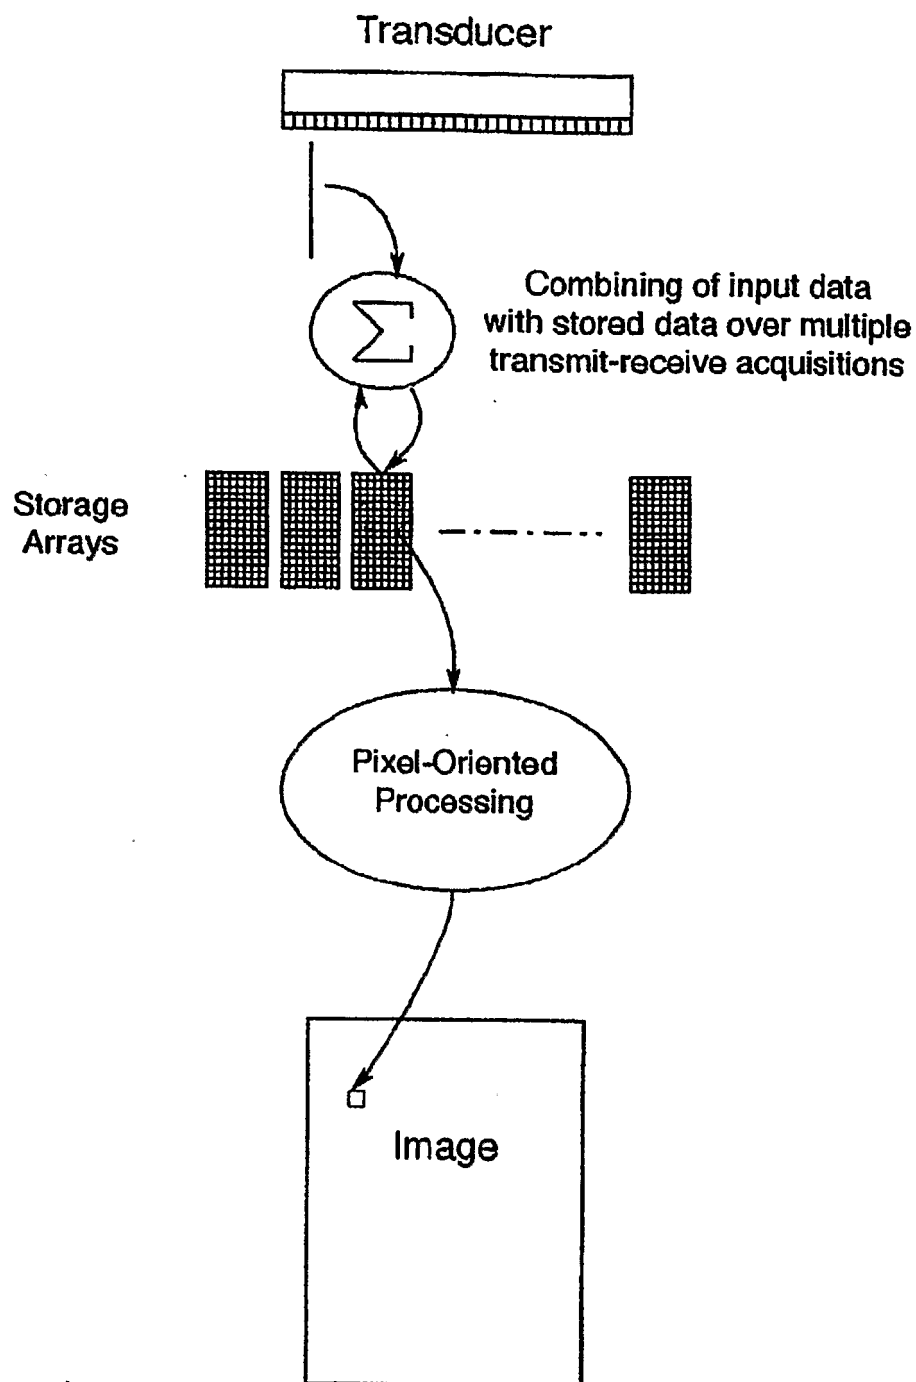

New acquisition data can be combined with data in storage to improve input signal quality.

FIG. 12A


14/15

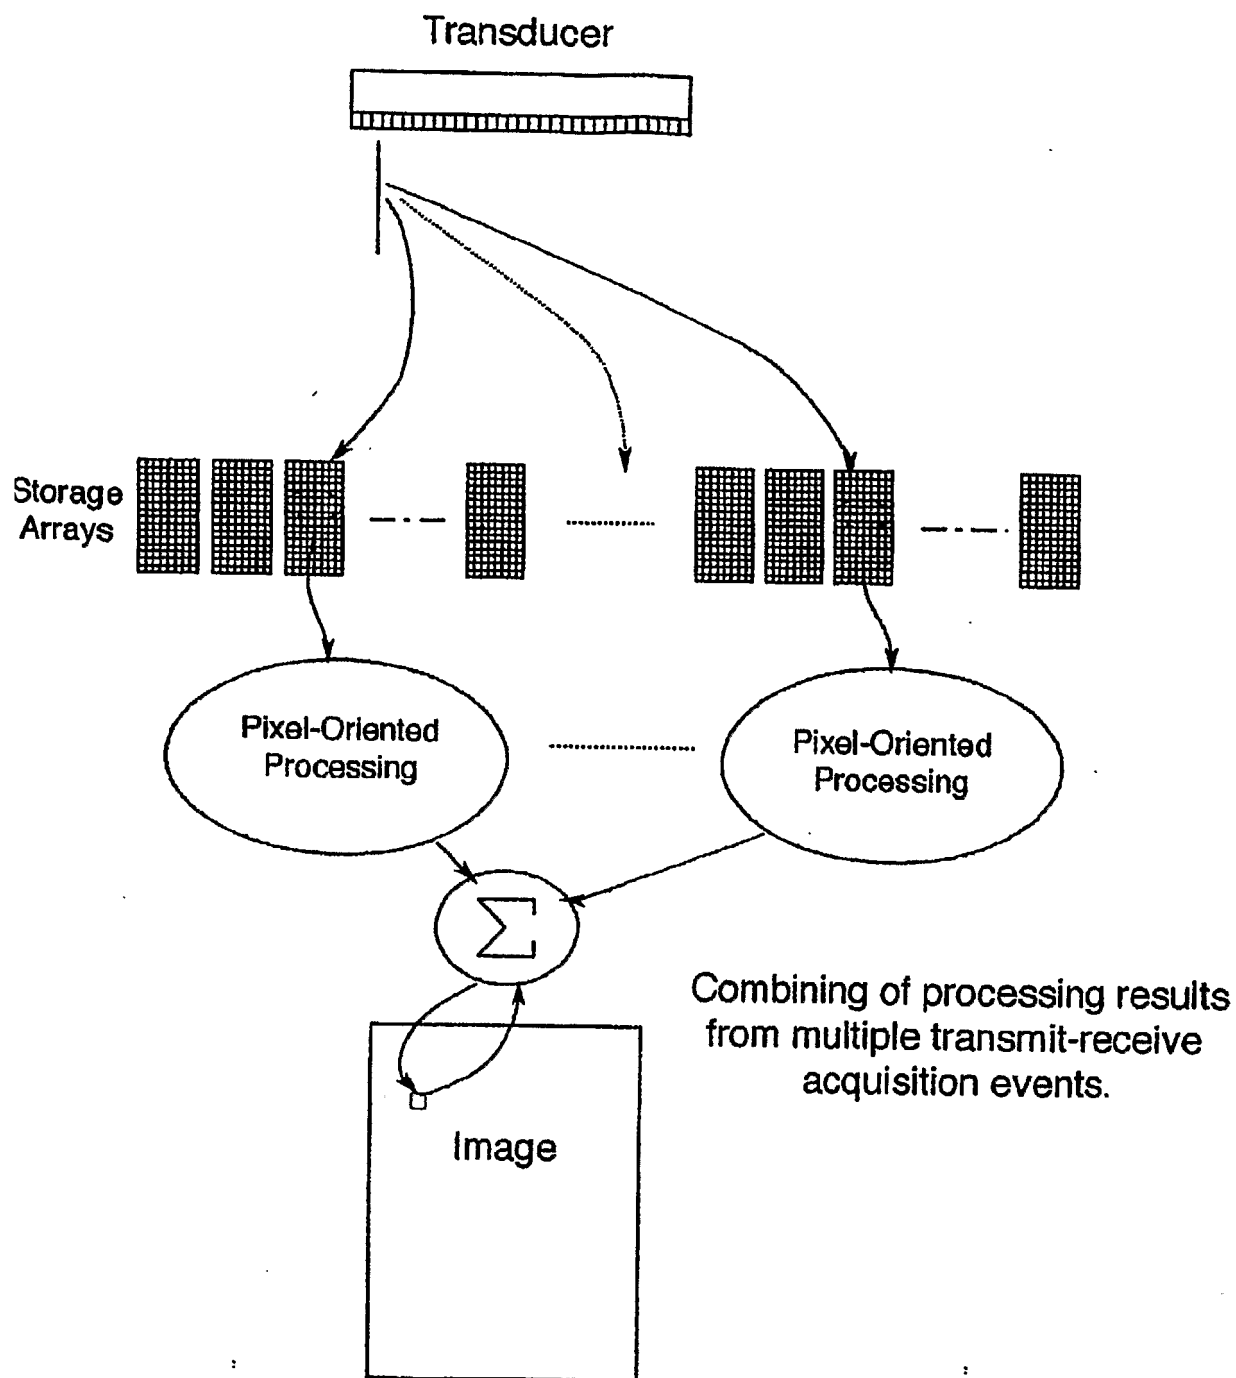

Processing results from multiple acquisitions can be combined to improve output pixel signal.

FIG. 12B

15/15

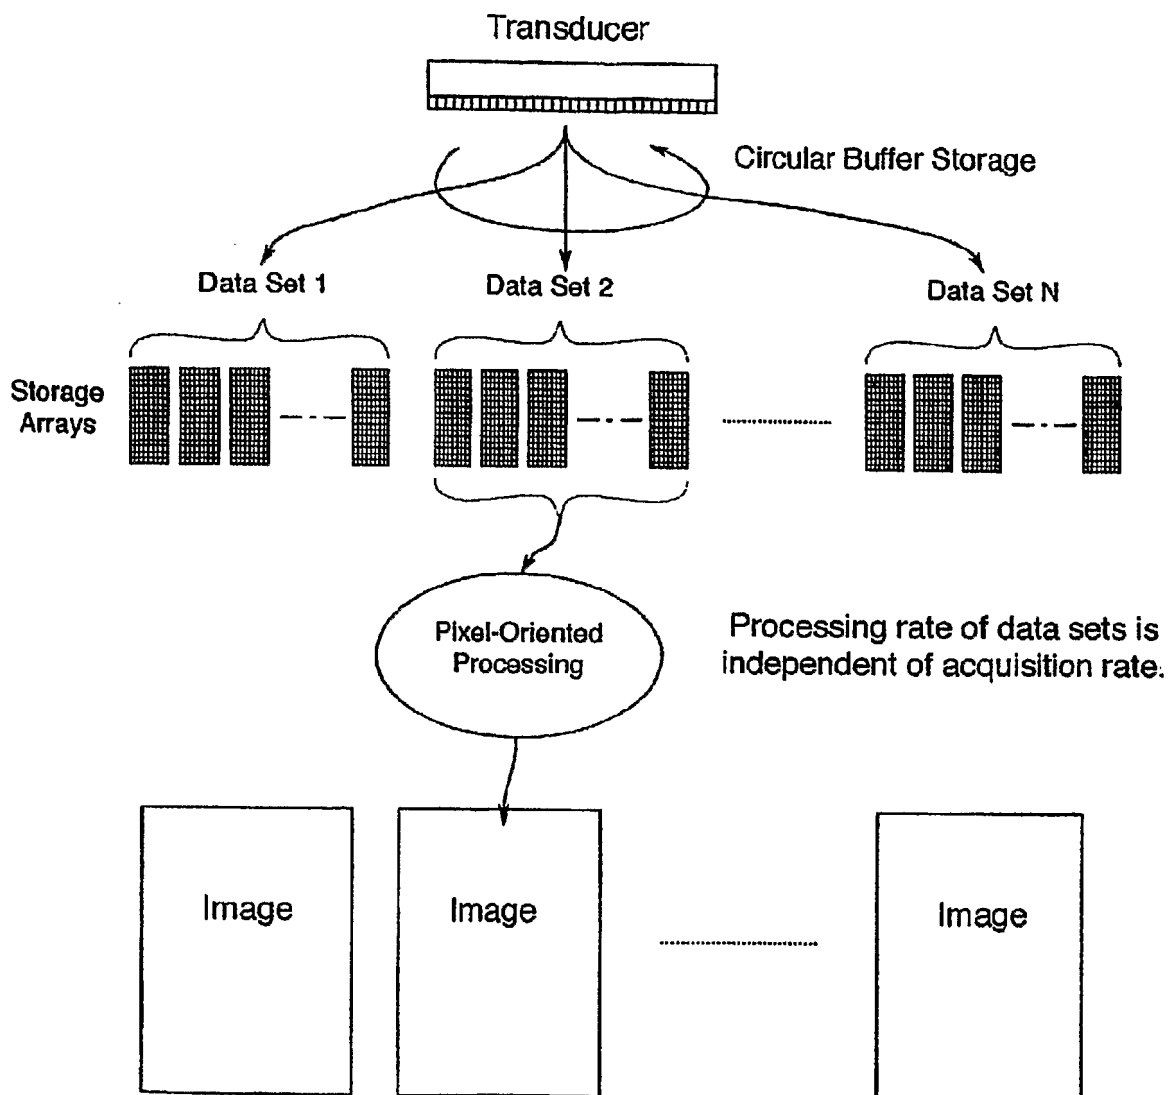

Processing of output image frames can be performed at different rate than acquisition rate.

FIG. 12C

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/014096

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61B8/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B G01S G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 468 213 B1 (KNELL CHRISTOPHER B ET AL) 22 October 2002 (2002-10-22) column 3, line 27 - column 5, line 14 column 19, line 36 - column 23, line 52 column 27, line 7 - column 28, line 59 column 29, line 27 - line 40 -----	1-15, 22-39 16-21, 40-54
X A	FR 2 848 673 A (THALES ULTRASONICS SAS) 18 June 2004 (2004-06-18) page 1, line 1 - line 20 page 3, line 18 - page 10, line 33 page 11, line 16 - line 22 figures 1,2 ----- --/--	1-3, 22-28 4-21, 29-54

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

11 July 2006

Date of mailing of the international search report

03/08/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dydenko, I

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/014096

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 842 473 A (FENSTER ET AL) 1 December 1998 (1998-12-01) column 3, line 27 - column 5, line 40 column 9, line 3 - column 10, line 57 figure 13 -----	16-21, 40-54 1-15, 22-39
A	US 6 234 968 B1 (SUMANAWEEERA THILAKA S ET AL) 22 May 2001 (2001-05-22) column 2, line 53 - column 4, line 42 -----	20, 21, 44-46, 53
A	L S TAYLOR, B C PORTER, D J RUBENS, K J PARKER: "Three-dimensional sonoelastography: principles and practices" PHYS MED BIOL, vol. 45, 2000, pages 1477-1494, XP002389798 the whole document -----	7, 32, 47
A	XULI ZONG * ET AL: "Speckle Reduction and Contrast Enhancement of Echocardiograms via Multiscale Nonlinear Processing" IEEE TRANSACTIONS ON MEDICAL IMAGING, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 17, no. 4, August 1998 (1998-08), XP011035766 ISSN: 0278-0062 pages 532-533 section Introduction -----	8-13, 19, 33-37, 48-51
A	US 2005/049494 A1 (GRITZKY ARTHUR ET AL) 3 March 2005 (2005-03-03) page 1, paragraph 17 - page 2, paragraph 26 -----	15, 16, 39, 40, 54
A	US 6 135 956 A (SCHMIESING ET AL) 24 October 2000 (2000-10-24) the whole document -----	52
A	US 2003/028113 A1 (GILBERT JEFFREY M ET AL) 6 February 2003 (2003-02-06) page 2, paragraph 48 - page 3, paragraph 49 page 6, paragraph 88 - page 7, paragraph 96 figure 8 -----	1, 2, 16, 22-26, 40, 41
A	US 5 396 890 A (WENG ET AL) 14 March 1995 (1995-03-14) column 4, line 53 - column 6, line 25 -----	16, 40

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/014096

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6468213	B1	22-10-2002	NONE	
FR 2848673	A	18-06-2004	AU 2003286195 A1 WO 2004055545 A1	09-07-2004 01-07-2004
US 5842473	A	01-12-1998	NONE	
US 6234968	B1	22-05-2001	NONE	
US 2005049494	A1	03-03-2005	CN 1589747 A DE 102004040410 A1 JP 2005074226 A	09-03-2005 24-03-2005 24-03-2005
US 6135956	A	24-10-2000	WO 0020890 A1 EP 1046063 A1 JP 2002526230 T	13-04-2000 25-10-2000 20-08-2002
US 2003028113	A1	06-02-2003	NONE	
US 5396890	A	14-03-1995	NONE	

专利名称(译)	具有像素定向处理的超声成像系统		
公开(公告)号	EP1874192A1	公开(公告)日	2008-01-09
申请号	EP2006750203	申请日	2006-04-14
[标]申请(专利权)人(译)	维拉声学公司		
申请(专利权)人(译)	VERASONICS INC.		
当前申请(专利权)人(译)	VERASONICS INC.		
[标]发明人	DAIGLE RONALD ELVIN		
发明人	DAIGLE, RONALD, ELVIN		
IPC分类号	A61B8/06		
CPC分类号	A61B8/06 A61B8/13 A61B8/483 A61B8/485 G01S7/52034 G01S7/52042 G01S7/5206 G01S7/5208 G01S15/8984 G01S15/8993 G01S15/8995 A61B8/14 A61B8/4483 A61B8/466 A61B8/481 A61B8/488 A61B8/52 A61B8/5207 A61B8/5223		
优先权	60/671416 2005-04-14 US		
其他公开文献	EP1874192B1		
外部链接	Espacenet		

摘要(译)

提供一种具有像素定向处理的超声成像系统，其中产生声信号，在多个接收元件处接收来自声信号的回波以获得然后存储的回波信号，将给定像素映射到该区域中。在存储的信号中，存储的回波信号的映射区域被组织成用于给定像素的阵列，之后处理该阵列以产生给定像素的信号响应，以获得给定像素的声学信息。该系统可以完全在用于商用PC主板的插卡上实现。该系统和方法可以实现用于面向像素或面向体素的图像处理 and 显示，消除中间数据计算并且能够广泛使用软件处理方法。优点包括改善信号动态范围的采集，灵活的采集模式，用于高帧率2D，3D和多普勒血流成像。