

(19)



(11)

EP 3 595 011 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
15.01.2020 Bulletin 2020/03

(51) Int Cl.:
H01L 27/32 (2006.01) H01L 51/52 (2006.01)

(21) Application number: **19183196.5**

(22) Date of filing: **28.06.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **PARK, Eun-Jung**
10845 Gyeonggi-do (KR)
- **LIM, Ki-Min**
10845 Gyeonggi-do, (KR)
- **ROH, Seung-Kwang**
10845 Gyeonggi-do, (KR)
- **KIM, Byung-Soo**
10845 Gyeonggi-do (KR)
- **MOON, Sang-Kyoung**
10845 Gyeonggi-do, (KR)
- **CHOI, Dong-Il**
10845 Gyeonggi-do (KR)

(30) Priority: **29.06.2018 KR 20180075967**

(71) Applicant: **LG Display Co., Ltd.**
SEOUL, 07336 (KR)

(72) Inventors:

- **SEOK, Han-Byeol**
10845 Gyeonggi-do, (KR)
- **KIM, Kwan-Soo**
10845 Gyeonggi-do, (KR)

(74) Representative: **Morrall, Jonathan Ian McLachlan**
et al
Kilburn & Strode LLP
Lacon London
84 Theobalds Road
London WC1X 8NL (GB)

(54) **ORGANIC LIGHT EMITTING DIODE, ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICE AND DISPLAY DEVICE FOR VEHICLES USING THE SAME**

(57) Disclosed are an organic light emitting diode, an organic light emitting diode display device and a display device for vehicles using the same. The organic light emitting diode may achieve process simplification and reduction in material costs while maintaining high luminance, through structure change.

EP 3 595 011 A1

Description**Field**

5 **[0001]** The present invention relates to an organic light emitting diode, and more particularly, to an organic light emitting diode which may achieve process simplification and reduction in material costs while maintaining high luminance, and an organic light emitting diode display device and a display device for vehicles using the same.

Discussion of the Related Art

10 **[0002]** As we have recently entered the information age, the field of displays which visually display electrical information signals has been rapidly developed and, in order to satisfy such development, various flat display devices having excellent performance, such as thinness, light weight and low power consumption, are being developed and rapidly replacing conventional cathode ray tubes (CRTs).

15 **[0003]** As examples of flat display devices, there are a liquid crystal display (LCD) device, a plasma display panel (PDP) device, a field emission display (FED) device, an organic light emitting diode (OLED) display device, a quantum dot display device, etc.

20 **[0004]** Thereamong, self-luminous display devices which do not require separate light sources and achieve compactness and clear color display, such as an organic light emitting diode display device and a quantum dot display device, are considered as competitive applications.

[0005] Recently, because of the above advantages, demand for application of organic light emitting diode display devices to the insides of vehicles is gradually increasing.

25 **[0006]** If an organic light emitting diode display device is provided in a vehicle, a viewer watching the organic light emitting diode display device is exposed to natural light in the daytime and exposed to dark environments at night and, thus, in order to secure sufficient visibility under strong natural light or dark environments, high efficiency of the organic light emitting diode display device is required.

30 **[0007]** In order to implement an organic light emitting diode display device having high efficiency, various structures have been proposed, but these structures may increase the number of uses of masks and thus cause increase in process costs and increase in material costs. Further, when the number of organic layers provided between two opposite electrodes in an organic light emitting diode in the organic light emitting diode display device is increased, driving voltage is increased and thus it is difficult to simultaneously acquire low voltage characteristics and high efficiency of the organic light emitting diode display device.

SUMMARY

35 **[0008]** In a first aspect, there is provided an organic light emitting diode as defined in claim 1.

[0009] In a second aspect, there is provided an organic light emitting diode display device as defined in claim 15.

[0010] In a third aspect, there is provided a display device for vehicles as defined in claim 18.

40 **[0011]** Accordingly, the present invention is directed to an organic light emitting diode, an organic light emitting diode display device and a display device for vehicles using the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0012] An object of the present invention is to provide an organic light emitting diode which may achieve process simplification and reduction in material costs while maintaining high luminance even under external light, and an organic light emitting diode display device and a display device for vehicles using the same.

45 **[0013]** Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

50 **[0014]** To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic light emitting diode includes a first electrode in each of a first region, a second region and a third region, a first common layer on the first electrodes, a first red light emitting layer and a first green light emitting layer respectively in the first region and the second region, a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions, a charge generation layer on the first blue light emitting layer to contact the first blue light emitting layer, a second common layer provided on the charge generation layer, a second red light emitting layer and a second green light emitting layer respectively provided on the second common layer in the first region and the second region, a second blue light emitting layer provided on the second red light emitting layer, the second green light emitting layer and the second

55

common layer throughout the first to third regions, a third common layer on the second blue light emitting layer, and a second electrode on the third common layer.


[0015] The first blue light emitting layer and the second blue light emitting layer may include a first host related to excitation, a second host having an electron transporting property, and a blue dopant.

[0016] A lowest unoccupied molecular orbital (LUMO) level of the second host may be higher than a LUMO level of the first host by 0.2 eV, 3.2×10^{-20} J, to 0.5 eV, 8.0×10^{-20} J.


[0017] The second host may be a compound comprising anthracene as a core and dibenzofuran as a terminal group serving as a host material.

[0018] The second host may include one selected from the group consisting of compounds expressed as Chemical formulas 1 to 3 below,


[Chemical formula 1]

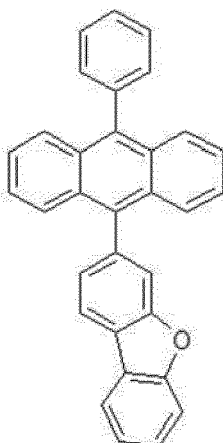

[Chemical formula 2]

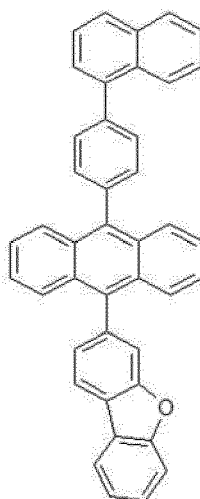

[Chemical formula 3]

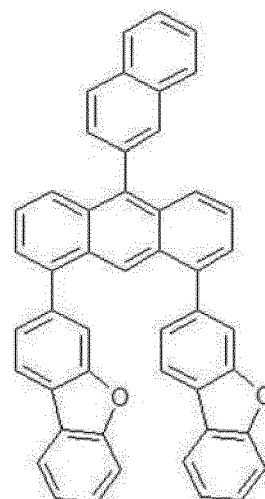

[0019] The first and second blue light emitting layers may include 30% by volume or more of each of the first and second hosts with respect to the first and second blue light emitting layers.

[0020] The first red light emitting layer may have a greater thickness than thicknesses of each of the first green light emitting layer and the first blue light emitting layer, and the second red light emitting layer may have a greater thickness than thicknesses of each of the second green light emitting layer and the second blue light emitting layer.

[0021] The thicknesses of each of the first and second blue light emitting layers may be 150 Å, 15 nm, to 400 Å, 40 nm.

[0022] The thickness of the first green light emitting layer may not be less than the thickness of the first blue light emitting layer and be 400 Å, 40 nm, or less, and the thickness of the second green light emitting layer may not be less than the thickness of the second blue light emitting layer and be 400 Å, 40 nm, or less.

[0023] The organic light emitting diode may further include a capping layer on the second electrode.

[0024] The third common layer may contact the second electrode.

[0025] Lower surfaces of the first red light emitting layer, the first green light emitting layer and the first blue light emitting layer may contact an upper surface of the first common layer, in the first to third regions.

[0026] The organic light emitting diode may further include a light emitting stack formed by stacking a fourth common layer, a light emitting structure and a fifth common layer, between the third common layer and the second electrode.

[0027] The light emitting structure may include a third red light emitting layer and a third green light emitting layer respectively in the first region and the second region, and a third blue light emitting layer on the third red light emitting layer, the third green light emitting layer and the fourth common layer throughout the first to third regions.

[0028] In another example, an organic light emitting diode display device includes a substrate provided with a first region, a second region and a third region, each region having a driving thin film transistor, a first electrode to be connected to the driving thin film transistor in each of the first region, the second region and the third region, a first common layer on the first electrodes, a first red light emitting layer and a first green light emitting layer respectively provided in the first region and the second region, a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions, a charge generation layer on the first blue light emitting layer to contact the first blue light emitting layer, a second common layer provided on the charge generation layer, a second red light emitting layer and a second green light emitting layer respectively on the second common layer in the first region and the second region, a second blue light emitting layer on the second red light emitting layer, the second green light emitting layer and the second common layer throughout the first to third regions, a third common

layer on the second blue light emitting layer, and a second electrode on the third common layer.

[0029] The first blue light emitting layer and the second blue light emitting layer may include a first host related to excitation, a second host having an electron transporting property, and a blue dopant.

[0030] A LUMO level of the second host may be higher than a LUMO level of the first host by 0.2 eV, 3.2×10^{-20} J, to 0.5 eV, 8.0×10^{-20} J.

[0031] The second host is a compound including anthracene as a core and dibenzofuran as a terminal group serving as a host material.

[0032] The organic light emitting diode display device may further include a capping layer configured to contact an upper surface of the second electrode.

[0033] The organic light emitting diode display device may further include an optical film provided on the capping layer.

[0034] The substrate may be a transparent flexible film, the first electrode may include a reflective electrode, and the second electrode may include one of a transparent electrode layer, a transfective electrode layer, a stack of a plurality of transparent electrode layers, a stack of a plurality of transfective electrode layers and a stack of transparent electrode and transfective electrode layers.

[0035] The organic light emitting diode display device may be attached to at least one of an instrument panel, a head-up display, a front glass, a rear view mirror or a side view mirror of a vehicle, and thus be used as a display device for vehicles.

[0036] The driving thin film transistor may receive power from a battery in the vehicle.

[0037] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] Having thus described example implementations of the disclosure in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG. 1 is a cross-sectional view illustrating an organic light emitting diode;

FIG. 2 is a view illustrating the composition of a first or second blue light emitting layer;

FIG. 3 is a view illustrating a band diagram corresponding to the first blue light emitting layer of FIG. 2 and adjacent layers thereto;

FIG. 4A is a cross-sectional view illustrating an organic light emitting diode in accordance with a first comparative example;

FIG. 4B is a view illustrating a band diagram corresponding to a blue light emitting layer of FIG. 4A and adjacent layers thereto;

FIG. 5A is a view illustrating the composition of a blue light emitting layer of an organic light emitting diode in accordance with a second comparative example;

FIG. 5B is a view illustrating a band diagram corresponding to the blue light emitting layer of FIG. 5A and adjacent layers thereto;

FIG. 6 is a graph illustrating current-voltage (J-V) characteristics of test examples;

FIG. 7A is a plan view illustrating a first deposition mask to form a red light emitting layer or a green light emitting layer of the organic light emitting diode;

FIG. 7B is a plan view illustrating a second deposition mask to form a blue light emitting layer of the organic light emitting diode;

FIG. 8 is a cross-sectional view illustrating an organic light emitting diode display device using the organic light emitting diode; and

FIG. 9 is a view illustrating a vehicle to which the organic light emitting diode display device is applied.

DETAILED DESCRIPTION

[0039] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. However, the present invention may be embodied in many alternative forms and should not be construed as limited to the embodiments set forth herein, and the embodiments of the present invention are provided only to completely disclose the invention and to completely inform those skilled in the art of the scope of the invention. Further, the names of elements used in the following description of the embodiments of the present invention are selected in consideration of ease in preparation of the specification, and may thus differ from the names of parts of an actual product.

[0040] Shapes, sizes, rates, angles, numbers, etc. disclosed in the drawings to describe the embodiments of the

present invention are only exemplary and do not limit the present invention. In the following description of the embodiments and the drawings, the same or similar elements are denoted by the same reference numerals even though they are depicted in different drawings. In the following description of the embodiments of the present invention, a detailed description of known functions and configurations incorporated herein will be omitted when it may make the subject matter of the present invention rather unclear. In the following description of the embodiments, the terms 'including', 'having', 'comprising', etc. will be interpreted as indicating presence of one or more other characteristics, numbers, steps, operations, elements or parts stated in the specification or combinations thereof, and do not exclude presence of additional characteristics, numbers, steps, operations, elements, parts or combinations thereof, or possibility of adding the same, unless the term 'only' is used. It will be understood that a singular expression of an element includes a plural expression of the element unless stated otherwise.

[0041] In interpretation of elements included in the various embodiments of the present invention, it will be interpreted that the elements include error ranges even if there is no clear statement.

[0042] In the following description of the embodiments, it will be understood that, when positional relations are expressed, for example, when an element is 'on', 'above', 'under', 'beside', etc. another element, the two elements may directly contact each other, or one or more other elements may be interposed between the two elements unless the term 'just' or 'directly' is used.

[0043] In the following description of the embodiments, it will be understood that, when temporal relations are expressed, for example, a term expressing a sequence of events, such as 'after', 'subsequent to', 'next to' or 'before' may encompass continuous relationship between the events, or discontinuous relationship between the events unless the term 'just' or 'directly' is used.

[0044] In the following description of the embodiments, it will be understood that, when the terms 'first', 'second', etc. are used to describe various elements, these terms are used merely to discriminate the same or similar elements. Therefore, an element modified by the term 'first' may be the same as an element modified by the term 'second' within the technical scope of the invention unless stated otherwise.

[0045] Characteristics of the various embodiments of the present invention may be partially or entirely connected to or combined with each other and technically variously driven and interlocked with each other, and the various embodiments may be independently implemented or be implemented together in connection with each other.

[0046] FIG. 1 is a cross-sectional view illustrating an organic light emitting diode in accordance with the present invention. Further, FIG. 2 is a view illustrating the composition of a first or second blue light emitting layer, and FIG. 3 is a view illustrating a band diagram corresponding to the first blue light emitting layer of FIG. 2 and adjacent layers thereto.

[0047] As exemplarily shown in FIG. 1, the organic light emitting diode in accordance with the present invention includes a first electrode 110 provided in each of a first region SP1, a second region SP2 and a third region SP3, a first common layer CML1 provided on the first electrodes 110, a first red light emitting layer 130 and a first green light emitting layer 135 respectively provided in the first region SP1 and the second region SP2, a first blue light emitting layer 140 provided on the first red light emitting layer 130, the first green light emitting layer 135 and the first common layer CML1 throughout the first to third regions SP1, SP2 and SP3, a charge generation layer 150 provided on the first blue light emitting layer 140 to contact the first blue light emitting layer 140, a second common layer CML2 provided on the charge generation layer 150, a second red light emitting layer 160 and a second green light emitting layer 165 respectively provided on the second common layer CML2 in the first region SP1 and the second region SP2, a second blue light emitting layer 170 provided on the second red light emitting layer 160, the second green light emitting layer 165 and the second common layer CML2 throughout the first to third regions SP1, SP2 and SP3, a third common layer CML3 provided on the second blue light emitting layer 170, and a second electrode 180 provided on the third common layer CML3.

[0048] As such, the organic light emitting diode in accordance with the present invention has a plurality of stacks, i.e., a first stack S1 and a second stack S2, with the charge generation layer 150 interposed therebetween, between the first electrode 110 and the second electrode 180, and has a light emitting layer structure in each of the first and second stacks S1 and S2, thereby having improved luminous efficiency and lifespan, as compared to an organic light emitting diode having a single stack.

[0049] Here, in the light emitting layer structures, the respective first and second stacks S1 and S2 over the first to third regions SP1, SP2 and SP3 share the first and second blue light emitting layers 140 and 170, and the first and second stacks S1 and S2 in the first region SP1 and the second region SP2 respectively have the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165, which contact the lower surfaces of the first and second blue light emitting layers 140 and 170.

[0050] The organic light emitting diode in accordance with the present invention has a two stack structure, in which the light emitting layer structures having the same configuration are repeatedly stacked with the charge generation layer 150 interposed therebetween in each region. The organic light emitting diode in accordance with the present invention having such a repeated light emitting layer structure allows the first and second blue light emitting layers 140 and 170 to be shared by the first to third regions SP1, SP2 and SP3 and may thus form the repeated light emitting layer structure through an open mask which is open to a wide active area without high-definition deposition masks, as compared to a

structure in which light emitting layers are formed using different high-definition deposition masks according to respective areas, thereby preventing occurrence of warpage or misalignment caused by use of the high-definition deposition masks and thus preventing poor deposition of the first and second blue light emitting layers 140 and 170.

[0051] Therefore, in the organic light emitting diode, the first and second blue light emitting layers 140 and 170 are not divisionally formed in the respective regions SP1, SP2 and SP3, and are formed throughout the active area, thus reducing use of high-definition deposition masks. Thereby, yield may be increased.

[0052] Further, the first and second blue light emitting layers 140 and 170 provided to contact the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165 transmit energy to adjacent layers emitting light of a long wavelength, i.e., the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165, and assist excitation of light of respective colors in the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165, and thereby, the first and second blue light emitting layers 140 and 170 in the first region SP1 and the second region SP2 contribute to emission of light of other colors (red light and green light), the thicknesses of the red light emitting layers 130 and 160 and the green light emitting layers 135 and 165 are reduced as compared to a structure in which each stack in each region has a single light emitting layer, use of expensive red and green dopants included in the red light emitting layers 130 and 160 and the green light emitting layers 135 and 165 may be reduced, and thus material costs may be reduced.

[0053] Further, even if stack regions of the first and second blue light emitting layers 140 and 170 and the first and second red light emitting layers 130 and 160 and first and second green light emitting layers 135 and 165 are formed in the first and second regions SP1 and SP2, excitation energy necessary to emit blue light is higher than excitation energy necessary to emit other colored light, emission zones of the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165 are formed by energy received from the first and second blue light emitting layers 140 and 170, and mixing with blue light may be prevented.

[0054] The first electrode 110 may include a reflective electrode, and the second electrode 180 may have a single layer structure including a transparent electrode layer or a transfective electrode layer, or have a stack structure including one selected from the group consisting of a plurality of transparent electrode layers, a plurality of transfective electrode layers, and both transparent electrode and transfective electrode layers. The reflective electrode included in the first electrode 110 may include, for example, one selected from the group consisting of APC(silver Ag: lead Pb: copper Cu), Ag and aluminium Al, or an alloy thereof, and, as circumstances require, the first electrode 110 may further include a transparent electrode provided on the upper or lower surface of the reflective electrode. Further, if the second electrode 180 is a transparent electrode, the transparent electrode may be formed of a transparent metal oxide including one selected from the group consisting of indium, titanium, zinc and tin, and, if the second electrode 180 is a transfective electrode, the transfective electrode may be formed of a metal film having a thin thickness to transmit light and including at least one of Ag, magnesium Mg and ytterbium Yb, or alloy having some thereof.

[0055] In the organic light emitting diode in accordance with the present invention, red light has a peak wavelength of 600 nm to 650 nm, green light has a peak wavelength of 510 nm to 590 nm, and blue light has a peak wavelength of 440 nm to 490 nm. Since the respective colored lights have the peak wavelengths within the above-described ranges, in addition to visually complete red, green and blue, the red light may include light of a color close to orange, the green light may include light of a color close to yellow or magenta, and the blue light may include light of a color close to cyan, sky blue or deep blue. If lights respectively emitted from the first to third regions SP1, SP2 and SP3 are combined to implement white light, combinations of other colored lights are possible.

[0056] The first region SP1 is operated by the principle that output of red light emitted by recombination between electrons and holes in the first red light emitting layer 130 and the second red light emitting layer 160 is increased through a microcavity effect between the first electrode 110 and the second electrode 180. Here, in the first region SP1, the first blue light emitting layer 140 and the second blue light emitting layer 170 are also light emitting layers, but energy necessary to excite the first blue light emitting layer 140 and the second blue light emitting layer 170 is higher than energy necessary to excite the first red light emitting layer 130 and the second red light emitting layer 160 and thus, the first and second blue light emitting layers 140 and 170 serve only to transmit electrons to the first and second red light emitting layers 130 and 160 and do not emit light. Further, the red light finely resonates between the first electrode 110 which is reflective and the second electrode 180 which is transparent or transfective and is emitted in the upward direction, an optical distance is set to form the emission zones in the first and second red light emitting layers 130 and 160 between the first and second electrodes 110 and 180, and thus mixing with blue light is prevented. Red light has a relatively long optical distance, the organic light emitting diode in accordance with the present invention has a simplified layer structure while maintaining high efficiency and does not have an auxiliary hole transport layer divided according to subpixels, and, in order to set the emission zones, the first and second red light emitting layers 130 and 160 have greater thicknesses than those of the first and second green light emitting layers 135 and 165 and the first and second blue light emitting layers 140 and 170 provided in other regions SP2 and SP3. The thicknesses of the first and second red light emitting layers 130 and 160 are about 400 Å, 40 nm, to 800 Å, 80 nm.

[0057] Similarly, the second region SP2 is operated by the principle that output of green light emitted by recombination between electrons and holes in the first green light emitting layer 135 and the second green light emitting layer 165 is increased through the microcavity effect between the first electrode 110 and the second electrode 180. In this case, the first and second green light emitting layers 135 and 165 have smaller thicknesses than those of the first and second red light emitting layers 130 and 160, and the thicknesses of the first and second green light emitting layers 135 and 165 are about 200 Å, 20 nm to 400 Å, 40 nm.

[0058] The first blue light emitting layer 140 and the second blue light emitting layer 170 serve as electron transport layers in the first and second regions SP1 and SP2 and serve as both light emitting layers and electron transport layers in the third region SP3, and, for this purpose, a first host bh1 to form excitons in the first and second blue light emitting layers 140 and 170 in the third region SP3, a second host bh2 to transport electrons from the first charge generation layer 150 and a blue dopant bd are used together. Here, the first blue light emitting layer 140 directly contacts the charge generation layer 150 and thus an electron transport layer in the first stack S1 may be omitted.

[0059] In the second stack S2, although an electron transport layer located in the third common layer CML3 may be omitted due to use of the second blue light emitting layer 170, in order to improve electron injection characteristics of the third common layer CML3 adjacent to the second electrode 180 and to lower driving voltage, the electron transport layer may be provided in the second stack S2.

[0060] The charge generation layer 150 has a bilayer structure including an n-type charge generation layer (nCGL) 150a having an n-type dopant in a host material having high electron mobility and a p-type charge generation layer 150b having a p-type dopant in a host material having high hole mobility, and the n-type dopant and the p-type dopant change Fermi levels of the respective host materials and thus serve to allow electrons and holes to be transeived therebetween and to flow into the adjacent stacks S1 and S2. In this case, the charge generation layer 150 serves as a cathode with regard to the first stack S1 and an anode with regard to the second stack S2, i.e., functions as electrodes in organic stacks having no electrodes, and transmits electrons and holes to the respective layers of the adjacent stacks S1 and S2 so as to form excitons in the red light emitting layers 130 and 160, green light emitting layers 135 and 165, and blue light emitting layers 140 and 170 of the corresponding stacks S1 and S2.

[0061] As such, a structure in which one subpixel includes two stacks with the charge generation layer 150 interposed therebetween may have high efficiency and lifespan, as compared to a general single stack structure. However, as the elements of the stacks are increased and a configuration for patterning each subpixel (each region) is required, a high-definition deposition mask is used and, as the number of layers of the stacks is increased, the number of required organic deposition chambers is increased.

[0062] In order to overcome the above problems, the organic light emitting diode in accordance with the present invention has the blue light emitting layers, which are not divided according to subpixels and are integrally provided throughout the active area, and has both an excitable host and a host having an electron transporting function in the blue light emitting layers so that the blue light emitting layers serve to emit blue light in the third region in which only the blue light emitting layers alone are provided and serve as electron transport layers in the vertical direction in the entirety of the active area and, thus, separate electron transport layers are omitted.

[0063] The first common layer CML1, the second common layer CML2 and the third common layer CML3 are successively provided throughout the first to third regions SP1, SP2 and SP3 without disconnection and are thus referred to as 'common layers', and each thereof may have a single layer structure or a multilayer structure including a plurality of layers having various functions, as needed. In general, common layers perform a function of transporting holes or electrons between an electrode and a light emitting layer or between a light emitting layer and a charge generation layer. The first common layer CML1 includes a hole injection layer 115 and a first hole transport layer (HTL1) 120, the second common layer CML2 includes a second hole transport layer 155, and the third common layer CML3 includes an electron transport layer 173 and an electron injection layer 175. Further, the common layers CML1, CML2 and CML3 are formed of organic materials. As circumstances require, the electron injection layer 175 contacting the second electrode 180 is formed of a combination of an inorganic compound and a metal and, in this case, the metal is a metal included in the second electrode 180 and thus an electron injection barrier may be lowered.

[0064] Further, a capping layer 190 formed on the second electrode 180 has a function of protecting the upper surface of the organic light emitting diode and improving light extraction, includes an organic material, and is formed in the final stage of manufacture of the organic light emitting diode.

[0065] The elements between the first electrode 110 and the second electrode 180 are all organic layers, and, as the number of patterning these layers and the number of deposited layers increase, alignment of the respective layers is required, and a defect rate generated in misalignment may reduce yield and raise material costs.

[0066] Hereinafter, the configuration of the light emitting layer structure and modifications thereof will be described in detail.

[0067] As exemplarily shown in FIG. 2, the first and second blue light emitting layers 140 and 170 may be configured such that the first host bh1 to form excitons in the first and second blue light emitting layers 140 and 170 in the third region SP3 and the second host bh2 to transport electrons from the first charge generation layer 150 are used together,

and particularly, the first blue light emitting layer 140 of the first stack S1 contacts the first charge generation layer 150.

[0068] Therefore, an electron transport layer in the first stack S1 may be omitted. In this case, an interlayer interfacial barrier between the first and second electrodes 110 and 180 may be reduced owing to omission of the electron transport layer, and thereby, driving voltage taken to drive the organic light emitting diode may be lowered.

[0069] The organic light emitting diode in accordance with the present invention may reduce use of organic layers owing to omission of the electron transport layer, thus reducing material costs. Even if the electron transport layer is omitted, at least the first blue light emitting layer 140 may function as the electron transport layer according to change in the compositions of the hosts bh1 and bh2 of the first and second blue light emitting layers 140 and 170, and thus, efficiencies of respective colored lights may be maintained and, in particular, efficiency of blue light may be rather increased.

[0070] For this purpose, as exemplarily shown in FIG. 3, the first blue light emitting layer 140 includes the first host bh1 related to excitation, the second host bh2 having an electron transporting property, and the blue dopant bd.

[0071] The first host bh1 is a compound which uses anthracene as a host material and performs a function of assisting excitation of the blue dopant, in the same manner as a host which is provided in a general blue light emitting layer.


[0072] The second host bh2 has a highest occupied molecular orbital (HOMO) level which is similar to the HOMO level of the first host bh1 and a lowest unoccupied molecular orbital (LUMO) level which is higher than the LUMO level of the first host bh1, the LUMO level of the second host bh2 is similar to the LUMO level of the adjacent charge generation layer 150 (in FIG. 1) and thus the second host bh2 may reduce a barrier when electrons enter the first blue light emitting layer 140 and improve electron injection efficiency. Since the first blue light emitting layer 140 contacts the charge generation layer 150 and is provided in common in the first to third regions SP1, SP2 and SP3, electron injection characteristics from the charge generation layer 150 to the first blue light emitting layer 140 in the respective regions SP1, SP2 and SP3 may be similar. Further, the second blue light emitting layer 170 may use the same first and second hosts bh1 and bh2 as those in the first blue light emitting layer 140.

[0073] Here, the LUMO level of the second host bh2 may be higher than the LUMO level of the first host bh1 by 0.2 eV, 3.2×10^{-20} J, to 0.5 eV, 8.0×10^{-20} J.

[0074] In the organic light emitting diode in accordance with the present invention, the first host bh1 and the second host bh2 in the first and second blue light emitting layers 140 and 170 are expressed as chemical formula 4 below. Here, substituents corresponding to R1 to R10 include fused aromatic rings or heterocyclic rings, and four or fewer of R1 to R10 include heterocyclic rings.

[0075] The LUMO level of the second host bh2 is relatively higher than the LUMO level of the first host bh1, and this means that the electron injection barrier of the second host bh2 is low and thus means that the second host bh2 contributes to transport of electrons in the first to third regions SP1, SP2 and SP3.

[Chemical formula 4]

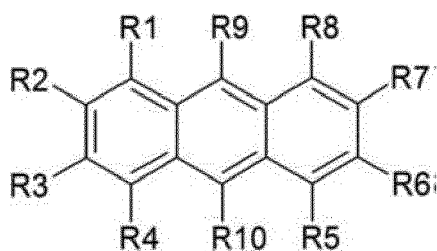

[0076] Further, the first and second blue light emitting layers 140 and 170 may respectively include 30% by volume or more of each of the first and second hosts bh1 and bh2 with respect to the first and second blue light emitting layers 140 and 170 so as to sufficiently assist excitation and contribute to transport of electrons.

[0077] Further, in order to secure an emission zone fitting into red light having a long wavelength, the first red light emitting layer 130 may have a greater thickness than thicknesses of the first green light emitting layer 135 and the first blue light emitting layer 140, and the second red light emitting layer 160 may have a greater thickness than thicknesses of the second green light emitting layer 165 and the second blue light emitting layer 170.

[0078] Here, the thicknesses of the first and second blue light emitting layers 140 and 170 which are thinnest in the light emitting structures may be 150 Å, 15 nm to 400 Å, 40 nm.

[0079] The thickness of the first green light emitting layer 135 may not be less than the thickness of the first blue light emitting layer 140 and be 400 Å, 40 nm or less, and the thickness of the second green light emitting layer 165 may not be less than the thickness of the second blue light emitting layer 170 and be 400 Å, 40 nm or less.

[0080] The effects of the organic light emitting diode in accordance with the present invention will be described by

comparing the organic light emitting diode in accordance with the present invention with organic light emitting diodes in accordance with comparative examples.

[0081] FIG. 4A is a cross-sectional view illustrating an organic light emitting diode in accordance with a first comparative example, and FIG. 4B is a view illustrating a band diagram corresponding to a blue light emitting layer of FIG. 4A and adjacent layers thereto.

[0082] As exemplarily shown in FIG. 4A, in the organic light emitting diode in accordance with the first comparative example, a first electrode 10, a hole injection layer 15, a first hole transport layer 20, a first light emitting layer 30, 35 or 40, a first electron transport layer 45, a charge generation layer 50, a second hole transport layer 55, a second light emitting layer 60, 65 or 70, a second electron transport layer 73, an electron injection layer 75, a second electrode 80 and a capping layer 90 are formed in each of first to third regions SP1, SP2 and SP3. The charge generation layer 50 has a bilayer structure including an n-type charge generation layer 50a and a p-type charge generation layer 50b. The organic light emitting diode in accordance with the first comparative example differs from the above-described organic light emitting diode in accordance with the present invention in that the organic light emitting diode in accordance with the first comparative example includes the first and second blue light emitting layers 40 and 70 having a different composition from that of the first and second blue light emitting layers 140 and 170 of the present invention and further includes the first electron transport layer 45 in a first stack S1.

[0083] Here, the first and second blue light emitting layers 40 and 70 include a first host bh1 to excite blue light and a blue dopant bd. That is, the first and second blue light emitting layers 40 and 70 include a single host bh1 and the blue dopant bd.

[0084] In this case, as exemplarily shown in FIG. 4B, in the first comparative example, the LUMO level of the first host bh1 is lower than the LUMO level of the first electron transport layer (ETL1) 45 by 0.5 eV, 8.0×10^{-20} J, or more and thus acts as a high energy barrier, when electrons are transmitted from the first electron transport layer 45 to the first blue light emitting layer 40, thereby lowering electron transfer characteristics.


[0085] FIG. 5A is a view illustrating the composition of a blue light emitting layer of an organic light emitting diode in accordance with a second comparative example, and FIG. 5B is a view illustrating a band diagram corresponding to the blue light emitting layer of FIG. 5A and adjacent layers thereto.

[0086] As exemplarily shown in FIGS. 5A and 5B, the organic light emitting diode in accordance with the second comparative example has the same configuration as that of the organic light emitting diode in accordance with the present invention shown in FIG. 1 except for the composition of first and second blue light emitting layers, and the first and second blue light emitting layers of the organic light emitting diode in accordance with the second comparative example include an excitable first host bh1, a third host bh3 formed of an electron transporting material ETM and a blue dopant bd. In this composition, the third host bh3 is formed of the same material as an electron transport layer of a second stack S2, and the third host bh3 and the first host bh1 are included in the blue light emitting layer 240. In this case, in the second comparative example, an electron transport layer in a first stack S1 is omitted.

[0087] Hereinafter, effects of the organic light emitting diode in accordance with the present invention and the organic light emitting diodes in accordance with the first and second comparative examples will be compared through Table 1 and FIG. 6.


[0088] In the following test, the first host bh1 assisting the excitation function of the blue light emitting layer, which is used in common in the blue light emitting layers in accordance with the present invention and the first and second comparative examples, is a compound expressed as chemical formula 5 below, which includes naphthalene at a terminal thereof centering around anthracene. In the following test, the compound expressed as chemical formula 2 below was used as the first host bh1.

[Chemical formula 2]

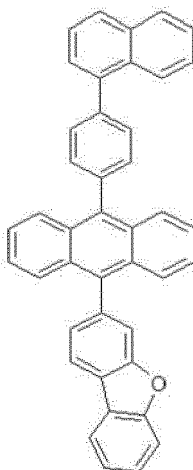


10


[Chemical formula 1]

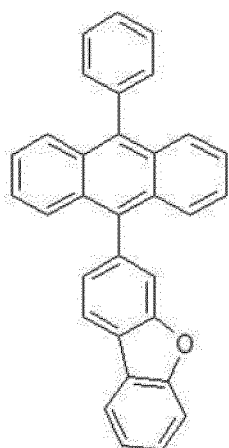

[Chemical formula 3]

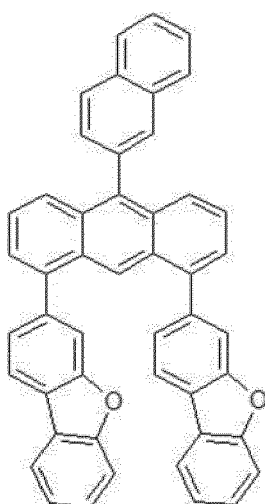

[Chemical formula 6]

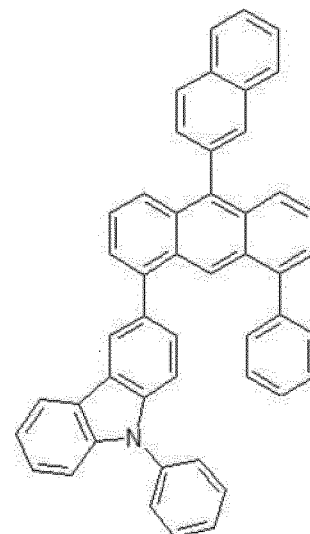

[Table 1]

Structure	Color of emitted light	Driving voltage (V)	Efficiency (Cd/A comparison)(%)	Luminance (Cd/m ²) (nit comparison)(%)	CIE _x	CIE _y
First comparative example	B	7.0	100	100	0.140	0.059
	G	6.6	100	100	0.240	0.709
	R	7.4	100	100	0.685	0.313
Modification of first comparative example	B	6.7	85	85	0.142	0.057
	G	7.1	81	80	0.243	0.699
	R	7.6	91	92	0.687	0.310
Second comparative example	B	6.1	53	53	0.133	0.091
	G	5.8	114	115	0.285	0.681
	R	6.4	98	98	0.690	0.308
Example of present invention	B	6.8	105	104	0.139	0.065
	G	6.6	110	120	0.271	0.689
	R	7.5	98	106	0.690	0.307

[0091] In Table 1 above, the first comparative example indicates test results of the structure shown in FIGS. 4A and 4B, the modification of the first comparative example indicates test results of a structure acquired by omitting the electron transport layer from the first stack in the configuration of the FIG. 4A, the second comparative example indicates test results of the structure shown in FIGS. 5A and 5B, and the example of the present invention indicates test results of the structure shown in FIGS. 1 to 3. The organic light emitting diodes in accordance with the first comparative example, the modification of the first comparative example, the second comparative example and the example of the present invention have the following basic structure.

[0092] In the test, the organic light emitting diode in accordance with the example of the present invention was manufactured according to the configuration of FIG. 1. The first electrode 110 was formed of ITO (70 Å, 7 nm)/APC (1000 Å, 100 nm)/ITO (70 Å, 7 nm), the hole injection layer 115 in the first stack S1 was formed to have a thickness of 50 Å, 5 nm, the hole transport layer 120 was formed of N,N-dinaphthyl-N,N'-diphenylbenzidine (NPD) to have a thickness of 400 Å, 40 nm, and, as the light emitting structure, the first red light emitting layer 130 including a red host and a red dopant was formed in the first region SP1 to have a thickness of 550-650 Å, 55-65 nm, the first green light emitting layer

135 including a green host and a green dopant was formed in the second region SP2 to have a thickness of 300-400 Å, 30-40 nm, and the first blue light emitting layer including the above-described first host bh1 and second host bh2 and the blue dopant was formed over the first to third regions SP1, SP2 and SP3 to have a thickness of 300-350 Å, 30-35 nm. Subsequently, as the charge generation layer 150, the n-type charge generation layer 150a having a thickness of 150 Å, 15 nm, and the p-type charge generation layer 150b having a thickness of 60 Å, 6 nm were stacked.

[0093] Further, on the charge generation layer 150, the second hole transport layer 155 in the second stack S2 was formed, and the second red light emitting layer 160, the second green light emitting layer 165 and the second blue light emitting layer 170 were formed in the same manner as the light emitting layers 130, 135 and 140 in the first stack S1. Subsequently, the electron transport layer 173 was formed of an anthracene-based compound and a lithium quinolate (LiQ) compound to have a thickness of 300 Å, 30 nm, the electron injection layer 175 was formed of Mg:LiF in a ratio of 1:1 to have a thickness of 30 Å, 3 nm, and then the second electrode 180 was formed of Ag:Mg in a ratio of 3:1 to have a thickness of 160 Å, 16 nm.

[0094] In the test, the first and second red light emitting layers 130 and 160 respectively included 7% by weight of the red dopant, the first and second green light emitting layers 135 and 165 respectively included 15% by weight of the green dopant, and the first and second blue light emitting layers 140 and 170 respectively included 3% by weight of the blue dopant. These dopant contents are only one embodiment, and may be varied within the range of 20% by weight.

[0095] The organic light emitting diode according to the first comparative example differs from the organic light emitting diode according to the example of the present invention in that the first blue light emitting layer 40 is restrictively provided only in the third region SP3, the first blue light emitting layer 40 and the second blue light emitting layer 70 include the first host bh1 alone as a host, and the electron transport layer 45 formed of an anthracene-based compound and a LiQ compound and having a thickness of 300 Å, 30 nm, is additionally provided in the first stack S1.

[0096] The organic light emitting diode according to the modification of the first comparative example has a structure in which the electron transport layer 45 in the first stack S1 is omitted from the structure of the organic light emitting diode according to the first comparative example.

[0097] The organic light emitting diode according to the second comparative example has the same configuration as the organic light emitting diode according to the example of the present invention except that the first and second blue light emitting layers of the organic light emitting diode according to the second comparative example include the third host bh3 formed of the same material as the electron transport layer of the second stack S2 in addition to the first host bh1 related to excitation.

[0098] In Table 1, efficiency and luminance are represented through comparison with values of the first comparative example for convenience in understanding. That is, on the assumption that efficiencies and luminances of blue, green and red lights in the organic light emitting diode according to the first comparative example are 100%, respective values in the organic light emitting diodes according to the modification of the first comparative example, the second comparative example and the example of the present invention are represented. If a value is greater than the efficiency or the luminance in the first comparative example, the value shows excellent characteristics and, if a value is less than the efficiency or the luminance in the first comparative example, the value shows poor characteristics.

[0099] In detail, it may be confirmed that, if the example of the present invention was applied, even though the electron transport layer in the first stack is omitted, as compared to the first comparative example, driving voltage necessary to emit blue light was reduced and luminance characteristics of blue light were improved. Further, driving voltage necessary to emit green light was maintained at the same level and luminance characteristics of green light were improved, as compared to the first comparative example. Moreover, driving voltage necessary to emit red light was raised by 0.1 V but luminance characteristics of red light were improved, as compared to the first comparative example, and it means that, if the example of the present invention was applied, characteristics of red light were similar to or higher than those of the first comparative example.

[0100] A significant advantage of application of the example of the present invention is that use of high-definition deposition masks is reduced and thus yield of a designated level or more may be secured by omitting the electron transport layer from one stack structure and applying the blue light emitting layer to the respective stacks without patterning according to subpixels.

[0101] In the organic light emitting diode according to the modification of the first comparative example in Table 1, in which the same blue light emitting layers as in the first comparative example are applied and the electron transport layer is omitted from the first stack, it may be confirmed that driving voltage increase and luminance decline in the first region provided with two stacked red light emitting layers and the second region provided with two stacked green light emitting layers were apparent. The organic light emitting diode according to the example of the present invention may secure luminance characteristics which are equivalent to or higher than those of the organic light emitting diode according to the first comparative example and, in particular, reduce driving voltage of blue light, even though the electron transport layer is omitted.

[0102] In the organic light emitting diode according to the second comparative example in Table 1, in which blue light emitting layers include a material used as the electron transport layer in addition to the excitable host, luminance efficiency

of blue light was reduced to half that of the organic light emitting diode according to the example of the present invention, and thus, it may be understood that, when the material of the electron transport layer is used as a host, excitation efficiency of holes/electrons in the blue light emitting layers is lowered. Therefore, it may be expected that, if such an organic light emitting diode is implemented as a display device, the display device will not emit blue light as time passes.

[0103] On the other hand, it may be confirmed that the organic light emitting diode according to the example of the present invention uses the excitable first host and the second host formed of an electron transporting material having a specific LUMO energy level difference with the first host and thus the second host contributes to transport of electrons without deterioration of the function of the first host. Further, color characteristics of blue, green and red lights were uniformly improved without remarkable degradation or enhancement of a specific color, and it may be expected that the organic light emitting diode according to the example of the present invention shows stable characteristics in spite of driving for a long time.

[0104] FIG. 6 is a graph illustrating current-voltage (J-V) characteristics of test examples.

[0105] In a J-V curve, only if there is a designated section of a region in which a slope is gentle, gradations may be expressed. As shown in FIG. 6, the organic light emitting diode according to the example of the present invention represents a J-V curve having the gentlest slope, and it means that the organic light emitting diode according to the example of the present invention may sufficiently express gradations.

[0106] Hereinafter, a first deposition mask 250 used to form the first and second red light emitting layers 130 and 160 or the first and second green light emitting layers 135 and 165 and a second deposition mask 230 used to form the first and second blue light emitting layers 140 and 170 in accordance with the present invention will be compared.

[0107] FIG. 7A is a plan view illustrating the first deposition mask to form the red light emitting layer or the green light emitting layer of the organic light emitting diode in accordance with the present invention, and FIG. 7B is a plan view illustrating the second deposition mask to form the blue light emitting layer of the organic light emitting diode in accordance with the present invention.

[0108] As exemplarily shown in FIG. 7A, the first deposition mask 250 used to form the red light emitting layer or the green light emitting layer, which is divisionally deposited in designated regions of an active area of a substrate, includes first openings 251 formed at regions corresponding to emission zones of first regions SP1 or second regions SP2, and a shielding part 252 formed in the remaining regions. In this case, the first openings 251 have a size which is equal to or less than the size of subpixels, and the first deposition mask 250 is provided to be finely partitioned. Further, each of the first and second red light emitting layers 130 and 160 and the first and second green light emitting layers 135 and 165 formed using the first deposition mask 250 is formed in a shape which is divided to correspond to the respective first openings 251.

[0109] As exemplarily shown in FIG. 7B, the second deposition mask 230 formed to cover the first to third regions SP1, SP2 and SP3 includes a second opening 232 formed in a region corresponding to all subpixels of a substrate and a shielding part 231 formed at the edge of the substrate. When the first blue light emitting layer 140 or the second blue light emitting layer 170 is formed using the second deposition mask 230, the first or second blue light emitting layer 140 or 170 is integrally formed throughout all the subpixels in the active area of the substrate without disconnection.

[0110] FIG. 8 is a cross-sectional view illustrating an organic light emitting diode display device using the organic light emitting diode in accordance with the present invention.

[0111] As exemplarily shown in FIG. 8, the organic light emitting diode display device in accordance with the present invention has organic light emitting diodes shown in FIG. 1, on a substrate 100, and the first electrode 110 of the organic light emitting diode is connected to a driving thin film transistor TFT provided in the first to third regions (subpixels) SP1 to SP3 of each organic light emitting diode.

[0112] Here, although the driving thin film transistor TFT is schematically illustrated, the driving thin film transistor TFT includes a semiconductor layer provided in a designated region of the substrate 100, a gate electrode provided on the semiconductor layer with a gate insulating film interposed therebetween, and source and drain electrodes connected to both sides of the semiconductor layer, and one electrode of the driving thin film transistor TFT is connected to the first electrode 110.

[0113] As circumstances require, the organic light emitting diode display device in accordance with the present invention may have a two stack structure, as exemplarily shown in this figure, or, in order to further increase luminous efficiency, the organic light emitting diode display device may further include at least one light emitting stack, in which a fourth common layer, a light emitting layer including a combination of a red light emitting layer and a green light emitting layer provided in designated subpixels and a blue light emitting layer provided throughout the respective subpixels, and a fifth common layer are stacked, between the third common layers CML3 and the second electrode 180.

[0114] Further, a thin film laminate for encapsulation in which an organic film and an inorganic film are alternately stacked may be provided on the upper surface of the capping layer 190, and an optical film to improve luminance may be further provided at a final emission side of the display device or inside a cover film.

[0115] FIG. 9 is a view illustrating a vehicle to which the organic light emitting diode display device in accordance with the present invention is applied.

[0116] As exemplarily shown in FIG. 9, the organic light emitting diode display device in accordance with the present invention may be used under the condition that the substrate 100 is attached to at least one of an instrument panel (not shown), a head-up display 2000 separated from a front glass 3000 so as to be movable, the front glass 3000, a rear view mirror (not shown) or a side view mirror 3100 of the vehicle. In this case, the display device in the vehicle is usable

as a device to provide information to a driver.

[0117] As the substrate 100 of the organic light emitting diode display device in accordance with the present invention, a transparent flexible plastic substrate is used to be easily attached to the inside of the vehicle.

[0118] Further, the driving thin film transistor TFT to drive each organic light emitting diode on the substrate 100 may be operated by power received from a battery in the vehicle, and therethrough, the organic light emitting diode may be operated by applied current. In this case, the display device in accordance with the present invention has high luminous efficiency even in moving outdoors and may thus display an image to a user at high luminance and have improved visibility. Further, omission of the electron transport layer from the first stack lowers barrier voltage in transport of electrons, raises an electron transport rate, and may thus increase recombination between holes and electrons in the respective light emitting layers even if all the subpixels share the blue light emitting layer, thereby improving luminance characteristics of respective colors of light.

[0119] When the organic light emitting diode display device in accordance with the present invention is attached to the inside of a vehicle, the organic light emitting diode display device has high luminance, and may thus provide a designated degree or more of luminance characteristics to a driver under external light or dark environments and display an image without obstruction of a driver's field of vision during driving.

[0120] As apparent from the above description, an organic light emitting diode, an organic light emitting diode display device and a display device for vehicles using the same in accordance with the present invention have effects as follows.

[0121] First, in the organic light emitting diode, blue light emitting layers are not divisionally formed in respective subpixels and are integrally formed throughout an active area, and thus use of high-definition deposition masks may be reduced. Thereby, yield may be increased.

[0122] Second, the blue light emitting layers contacting red light emitting layers and green light emitting layers transmit energy to adjacent layers emitting light of a long wavelength (i.e., the red light emitting layers and the green light emitting layers) and assist excitation of the red light emitting layers and the green light emitting layers, and thereby, the blue light emitting layers contribute to light emission in red and green subpixels, the thicknesses of the red and green light emitting layers are reduced as compared to a structure in which each stack in each region has a single light emitting layer, i.e., the red or green light emitting layer, use of expensive red and green dopants included in the red and green light emitting layers may be reduced, and thus material costs may be reduced.

[0123] Third, even if stack regions between the blue light emitting layers and the other colored light emitting layers are formed, excitation energy necessary to emit blue light is higher than excitation energy necessary to emit other colored light, emission of light of corresponding colors (red light and green light) in regions provided with the other colored light emitting layers is possible by energy received from the blue light emitting layers, and mixing with blue light may be prevented.

[0124] Fourth, the blue light emitting layers are configured such that a first host to form excitons in the blue light emitting layers and a second host to transport electrons from a charge generation layer are used together, and particularly, the blue light emitting layer of a first stack contacts the charge generation layer. Therefore, an electron transport layer in the first stack may be omitted. In this case, an interlayer interfacial barrier may be reduced owing to omission of the electron transport layer, and thereby, driving voltage may be lowered.

[0125] Fifth, the organic light emitting diode reduces use of organic layers owing to omission of the electron transport layer and may thus reduce material costs. Even if the electron transport layer is omitted, the blue light emitting layer functions as the electron transport layer according to change in the compositions of hosts of the blue light emitting layers, and thus, efficiencies of respective colored lights may be maintained without decline and, in particular, efficiency of blue light may be rather increased.

[0126] The description further comprises the following clauses:

1. An organic light emitting diode comprising:

- a first electrode in each of a first region, a second region and a third region;
- a first common layer on the first electrodes;
- a first red light emitting layer and a first green light emitting layer respectively in the first region and the second region;
- a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions;
- a charge generation layer on the first blue light emitting layer to contact the first blue light emitting layer;
- a second common layer on the charge generation layer;

a second red light emitting layer and a second green light emitting layer respectively on the second common layer in the first region and the second region;
 a second blue light emitting layer on the second red light emitting layer, the second green light emitting layer and the second common layer throughout the first to third regions;
 a third common layer on the second blue light emitting layer; and
 a second electrode on the third common layer.


2. The organic light emitting diode according to clause 1, wherein the first blue light emitting layer and the second blue light emitting layer comprise a first host related to excitation, a second host having an electron transporting property, and a blue dopant.

3. The organic light emitting diode according to clause 2, wherein a LUMO level of the second host is higher than a LUMO level of the first host by 0.2 eV to 0.5 eV.


4. The organic light emitting diode according to clause 2 or clause 3, wherein the second host is a compound comprising anthracene as a core and dibenzofuran as a terminal group.

5. The organic light emitting diode according to any of clauses 2 to 4, wherein the second host comprises one selected from the group consisting of compounds expressed as Chemical formulas 1 to 3 below,


[Chemical formula 1]

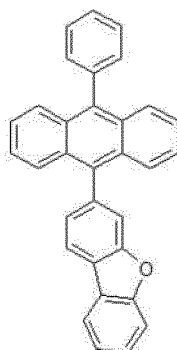

[Chemical formula 2]

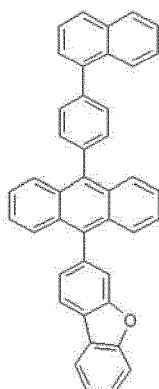

[Chemical formula 3]

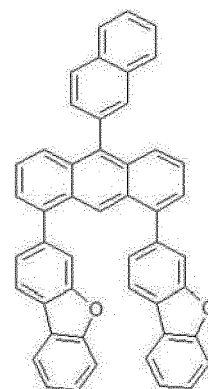

6. The organic light emitting diode according to any of clauses 2-5, wherein the first and second blue light emitting layers comprises 30 vol% or more of each of the first and second hosts with respect to the first and second blue light emitting layers.

7. The organic light emitting diode according to any of clauses 1-6, wherein:

the first red light emitting layer has a greater thickness than thicknesses of each of the first green light emitting layer and the first blue light emitting layer; and

the second red light emitting layer has a greater thickness than thicknesses of each of the second green light emitting layer and the second blue light emitting layer.

8. The organic light emitting diode according to any preceding clause, wherein the thickness of each of the first and second blue light emitting layers are 150 Å, 15 nm, to 400 Å, 40 nm.

9. The organic light emitting diode according to any preceding clause, wherein:

the thickness of the first green light emitting layer is not less than the thickness of the first blue light emitting layer and is 400 Å, 40 nm, or less; and

the thickness of the second green light emitting layer is not less than the thickness of the second blue light emitting layer and is 400 Å, 40 nm, or less.

10. The organic light emitting diode according to any preceding clause, further comprising a capping layer on the second electrode.

11. The organic light emitting diode according to any preceding clause, wherein the third common layer contacts the second electrode.

12. The organic light emitting diode according to any preceding clause, wherein lower surfaces of the first red light emitting layer, the first green light emitting layer and the first blue light emitting layer contact an upper surface of the first common layer, in the first to third regions.

13. The organic light emitting diode according to any preceding clause, further comprising a light emitting stack formed by stacking a fourth common layer, a light emitting structure and a fifth common layer, between the third common layer and the second electrode.

14. The organic light emitting diode according to clause 13, wherein the light emitting structure comprises:

a third red light emitting layer and a third green light emitting layer respectively in the first region and the second region; and
a third blue light emitting layer on the third red light emitting layer, the third green light emitting layer and the fourth common layer throughout the first to third regions.

15. An organic light emitting diode display device comprising:

a substrate provided with a first region, a second region and a third region, each region having a driving thin film transistor;
a first electrode to be connected to the driving thin film transistor in each of the first region, the second region and the third region;
a first common layer on the first electrodes;
a first red light emitting layer and a first green light emitting layer respectively in the first region and the second region;
a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions;
a charge generation layer on the first blue light emitting layer to contact the first blue light emitting layer;
a second common layer on the charge generation layer;
a second red light emitting layer and a second green light emitting layer respectively on the second common layer in the first region and the second region;
a second blue light emitting layer on the second red light emitting layer, the second green light emitting layer and the second common layer throughout the first to third regions;
a third common layer on the second blue light emitting layer; and
a second electrode on the third common layer.

16. The organic light emitting diode display device according to clause 15, wherein the first blue light emitting layer and the second blue light emitting layer comprise a first host related to excitation, a second host having an electron transporting property, and a blue dopant.

17. The organic light emitting diode display device according to clause 16, wherein a LUMO level of the second host is higher than a LUMO level of the first host by 0.2 eV to 0.5 eV.

18. The organic light emitting diode display device according to clause 16 or clause 17, wherein the second host is a compound comprising anthracene as a core and dibenzofuran as a terminal group.

19. The organic light emitting diode display device according to any of clauses 15-18, further comprising a capping layer configured to contact an upper surface of the second electrode.

20. The organic light emitting diode display device according to clause 19, further comprising an optical film provided on the capping layer.

21. The organic light emitting diode display device according to any of clauses 15-20, wherein:

the substrate is a transparent flexible film;
the first electrode includes a reflective electrode; and
the second electrode includes one of a transparent electrode layer, a transfective electrode layer, a stack of a plurality of transparent electrode layers, a stack of a plurality of transfective electrode layers and a stack of transparent electrode and transfective electrode layers.

22. A display device for vehicles, formed by attaching the organic light emitting diode display device according to any one of clauses 15 to 21 to at least one of an instrument panel, a head-up display, a front glass, a rear view mirror or a side view mirror of a vehicle.

23. The display device for vehicles according to clause 22, wherein the driving thin film transistor receives power from a battery in the vehicle.

24. An organic light emitting diode comprising:

a first electrode in each of a first region, a second region and a third region;
a first common layer on the first electrodes;

a first red light emitting layer and a first green light emitting layer respectively in the first region and the second region;
 a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions;
 a charge generation layer on the first blue light emitting layer;
 a second common layer on the charge generation layer;
 a second red light emitting layer and a second green light emitting layer respectively on the second common layer in the first region and the second region;
 a second blue light emitting layer on the second red light emitting layer, the second green light emitting layer and the second common layer throughout the first to third regions;
 a third common layer on the second blue light emitting layer; and
 a second electrode on the third common layer.

25. The organic light emitting diode according to clause 24, wherein the first blue light emitting layer contacts the charge generation layer.


26. The organic light emitting diode according to clause 24 or 25, wherein each of the first blue light emitting layer and the second blue light emitting layer comprises a first host related to excitation, a second host having an electron transporting property, and a blue dopant.

27. The organic light emitting diode according to clause 26, wherein a lowest unoccupied molecular orbital, LUMO, level of the second host is higher than a LUMO level of the first host by 0.2 eV, 3.2×10^{-20} J, to 0.5 eV, 8.0×10^{-20} J.


28. The organic light emitting diode according to clause 26 or 27, wherein the second host is a compound comprising anthracene as a core and dibenzofuran as a terminal group.

29. The organic light emitting diode according to any of clauses 26-28, wherein the second host comprises one selected from the group consisting of compounds expressed as Chemical formulas 1 to 3 below,


[Chemical formula 1]

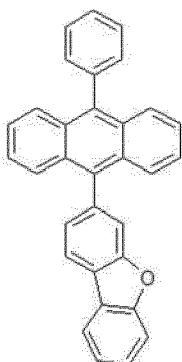

[Chemical formula 2]

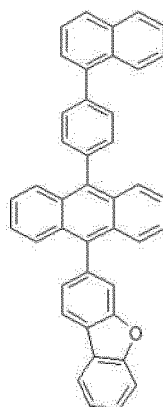

[Chemical formula 3]

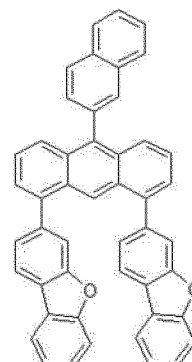

30. The organic light emitting diode according to any of clauses 26-29, wherein each of the first and second blue light emitting layers comprises 30% by volume or more of each of the first and second hosts with respect to the first and second blue light emitting layers.

31. The organic light emitting diode according to any of clauses 24-30, wherein:

the first red light emitting layer has a greater thickness than thicknesses of each of the first green light emitting layer and the first blue light emitting layer; and

the second red light emitting layer has a greater thickness than thicknesses of each of the second green light emitting layer and the second blue light emitting layer.

32. The organic light emitting diode according to any of clauses 24-31, wherein the thickness of each of the first and second blue light emitting layers are 150 Å, 15 nm, to 400 Å, 40 nm.

33. The organic light emitting diode according to any of clauses 24-32, wherein:

the thickness of the first green light emitting layer is not less than the thickness of the first blue light emitting layer and is 400 Å, 40 nm, or less; and

the thickness of the second green light emitting layer is not less than the thickness of the second blue light

emitting layer and is 400 Å, 40 nm, or less.

34. The organic light emitting diode according to any of clauses 24-33, further comprising a capping layer on the second electrode.

35. The organic light emitting diode according to any of clauses 24-34, wherein the third common layer contacts the second electrode.

36. The organic light emitting diode according to any of clauses 24-35, wherein lower surfaces of the first red light emitting layer, the first green light emitting layer and the first blue light emitting layer contact an upper surface of the first common layer, in the first to third regions respectively.

37. The organic light emitting diode according to any of clauses 24-36, further comprising a light emitting stack formed by stacking a fourth common layer, a light emitting structure and a fifth common layer, between the third common layer and the second electrode.

38. The organic light emitting diode according to clause 37, wherein the light emitting structure comprises:

a third red light emitting layer and a third green light emitting layer respectively in the first region and the second region; and

a third blue light emitting layer on the third red light emitting layer, the third green light emitting layer and the fourth common layer throughout the first to third regions.

39. An organic light emitting diode display device comprising the organic light emitting diode according to any of clauses 24-38, the organic light emitting diode further comprising:

a substrate;

a driving thin film transistor in each of the first region, the second region and the third region, wherein the first electrode in each region is connected to the TFT in that region.

40. The organic light emitting diode display device according to clause 39 when dependent on clause 34, further comprising an optical film provided on the capping layer.

41. The organic light emitting diode display device according to clause 39 or clause 40, wherein:

the substrate is a transparent flexible film;

the first electrode includes a reflective electrode; and

the second electrode includes one of a transparent electrode layer, a transfective electrode layer, a stack of a plurality of transparent electrode layers, a stack of a plurality of transfective electrode layers and a stack of transparent electrode and transfective electrode layers.

42. A display device for vehicles, formed by attaching the organic light emitting diode display device according to any one of clauses 39 to 41 to at least one of an instrument panel, a head-up display, a front glass, a rear view mirror or a side view mirror of a vehicle.

43. The display device for vehicles according to clause 42, wherein the driving thin film transistor receives power from a battery in the vehicle.

[0127] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims.

Claims

1. An organic light emitting diode comprising:

a first electrode in each of a first region, a second region and a third region;

a first common layer on the first electrodes;

a first red light emitting layer and a first green light emitting layer respectively in the first region and the second region;


a first blue light emitting layer on the first red light emitting layer, the first green light emitting layer and the first common layer throughout the first to third regions;

a charge generation layer on the first blue light emitting layer;


a second common layer on the charge generation layer;
 a second red light emitting layer and a second green light emitting layer respectively on the second common layer in the first region and the second region;
 a second blue light emitting layer on the second red light emitting layer, the second green light emitting layer and the second common layer throughout the first to third regions;
 a third common layer on the second blue light emitting layer; and
 a second electrode on the third common layer.

2. The organic light emitting diode according to claim 1, wherein each of the first blue light emitting layer and the second blue light emitting layer comprises a first host related to excitation, a second host having an electron transporting property, and a blue dopant, and wherein the first blue light emitting layer contacts the charge generation layer.
3. The organic light emitting diode according to claim 2, wherein a lowest unoccupied molecular orbital, LUMO, level of the second host is higher than a LUMO level of the first host by 0.2 eV, 3.2×10^{-20} J, to 0.5 eV, 8.0×10^{-20} J.
4. The organic light emitting diode according to claim 2 or claim 3, wherein the second host is a compound comprising anthracene as a core and dibenzofuran as a terminal group.
5. The organic light emitting diode according to any of claims 2 to 4, wherein the second host comprises one selected from the group consisting of compounds expressed as Chemical formulas 1 to 3 below,


[Chemical formula 1]

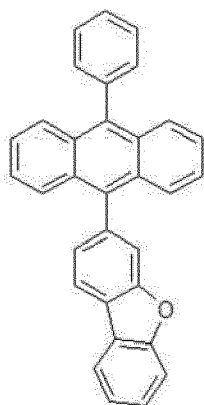

[Chemical formula 2]

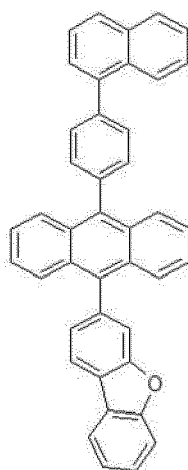

[Chemical formula 3]

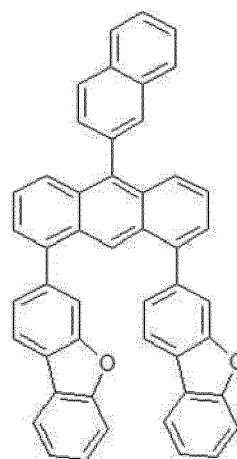

6. The organic light emitting diode according to any of claims 2-5, wherein each of the first and second blue light emitting layers comprises 30% by volume or more of each of the first and second hosts.
7. The organic light emitting diode according to any of claims 1-6, wherein:
 - the first red light emitting layer has a greater thickness than thicknesses of each of the first green light emitting layer and the first blue light emitting layer; and
 - the second red light emitting layer has a greater thickness than thicknesses of each of the second green light emitting layer and the second blue light emitting layer.
8. The organic light emitting diode according to any preceding claim, wherein the thickness of each of the first and second blue light emitting layers are 150 Å, 15 nm, to 400 Å, 40 nm.
9. The organic light emitting diode according to any preceding claim, wherein:
 - the thickness of the first green light emitting layer is not less than the thickness of the first blue light emitting layer and is 400 Å, 40 nm, or less; and
 - the thickness of the second green light emitting layer is not less than the thickness of the second blue light emitting layer and is 400 Å, 40 nm, or less.

10. The organic light emitting diode according to any preceding claim, further comprising a capping layer on the second electrode.

11. The organic light emitting diode according to any preceding claim, wherein the third common layer contacts the second electrode.

12. The organic light emitting diode according to any preceding claim, wherein lower surfaces of the first red light emitting layer, the first green light emitting layer and the first blue light emitting layer contact an upper surface of the first common layer, in the first to third regions respectively.

13. The organic light emitting diode according to any preceding claim, further comprising a light emitting stack formed by stacking a fourth common layer, a light emitting structure and a fifth common layer, between the third common layer and the second electrode.

14. The organic light emitting diode according to claim 13, wherein the light emitting structure comprises:

a third red light emitting layer and a third green light emitting layer respectively in the first region and the second region; and

a third blue light emitting layer on the third red light emitting layer, the third green light emitting layer and the fourth common layer throughout the first to third regions.

15. An organic light emitting diode display device comprising the organic light emitting diode according to any preceding claim, the organic light emitting diode further comprising:

a substrate;

a driving thin film transistor in each of the first region, the second region and the third region, wherein the first electrode in each region is connected to the TFT in that region.

16. The organic light emitting diode display device according to claim 15 when dependent on claim 10, further comprising an optical film provided on the capping layer.

17. The organic light emitting diode display device according to claim 15 or claim 16, wherein:

the substrate is a transparent flexible film;

the first electrode includes a reflective electrode; and

the second electrode includes one of a transparent electrode layer, a transfective electrode layer, a stack of a plurality of transparent electrode layers, a stack of a plurality of transfective electrode layers and a stack of transparent electrode and transfective electrode layers.

18. A display device for vehicles, formed by attaching the organic light emitting diode display device according to any one of claims 15 to 17 to at least one of an instrument panel, a head-up display, a front glass, a rear view mirror or a side view mirror of a vehicle.

19. The display device for vehicles according to claim 18, wherein the driving thin film transistor receives power from a battery in the vehicle.

FIG. 1

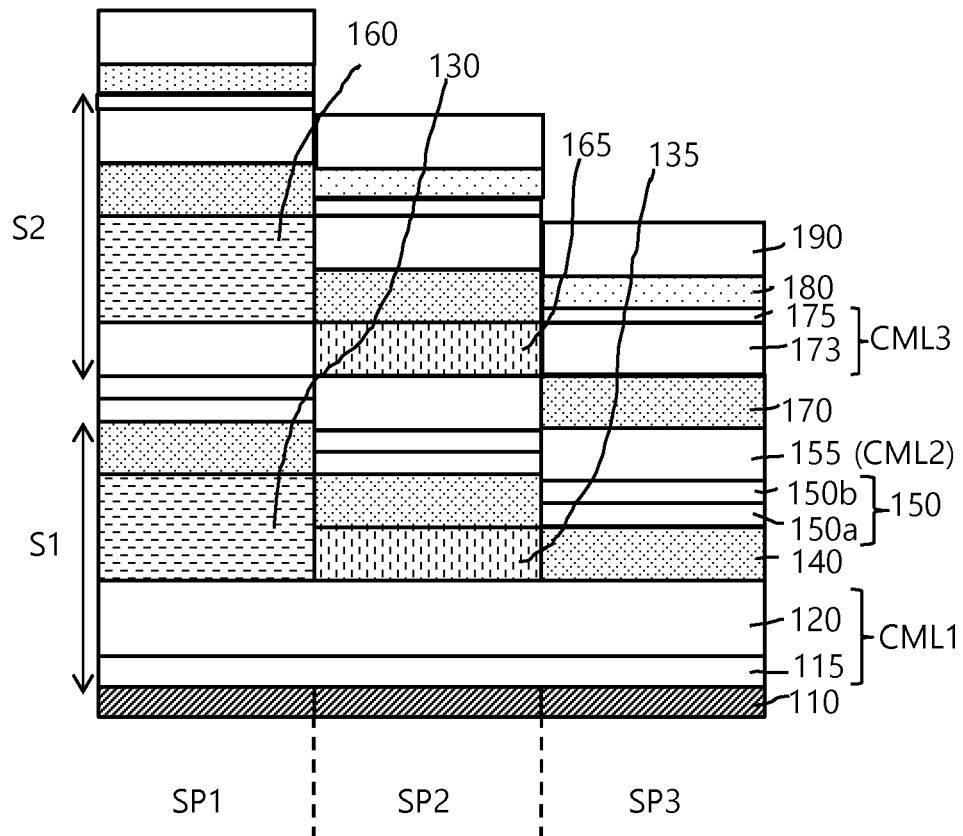


FIG. 2

140 or 170

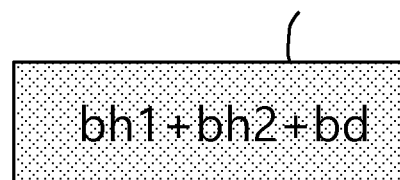


FIG. 3

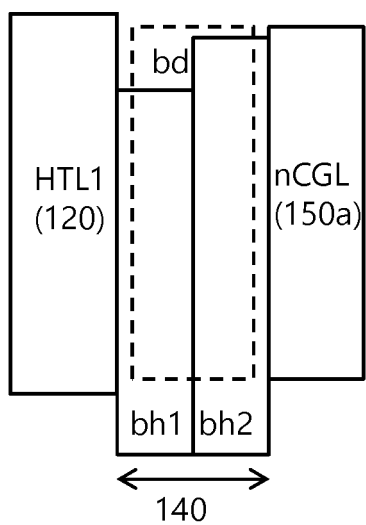


FIG. 4A

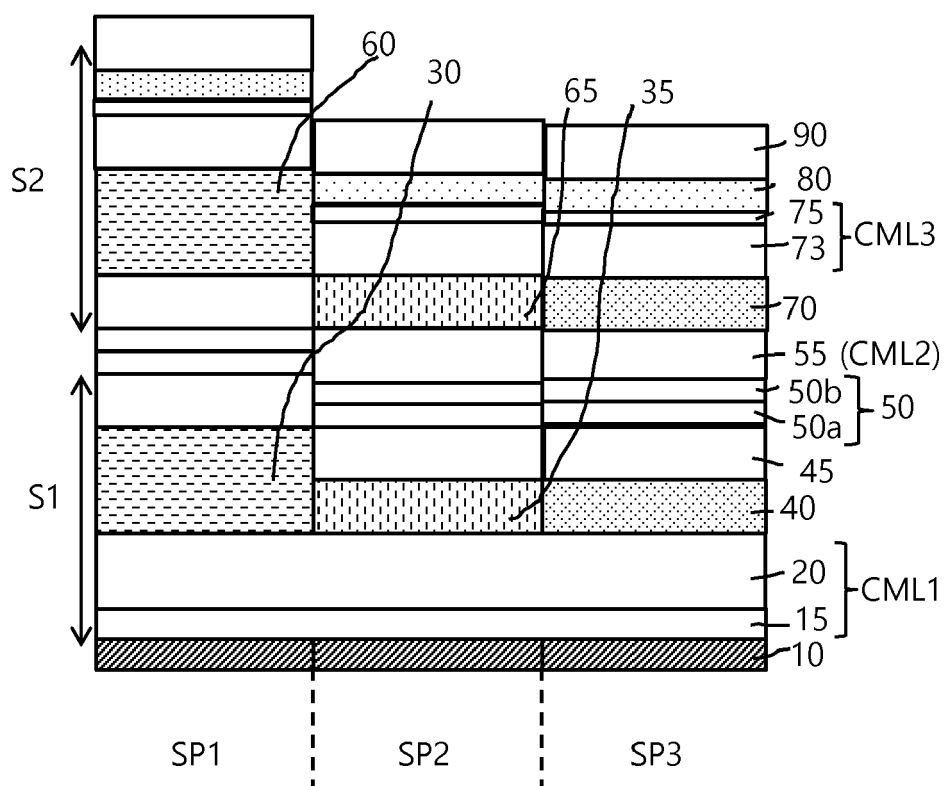


FIG. 4B

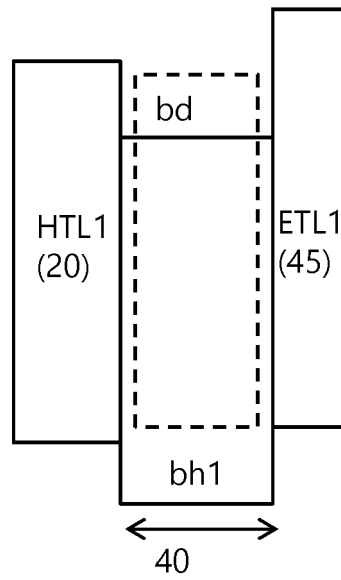


FIG. 5A

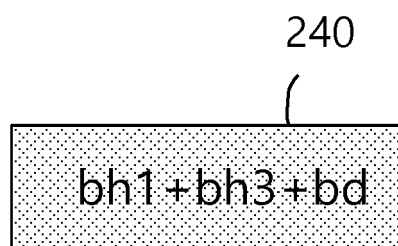


FIG. 5B

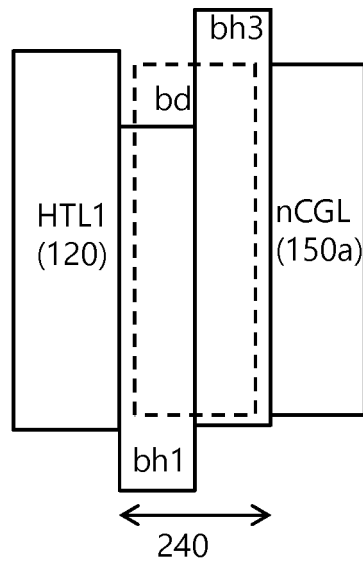


FIG. 6

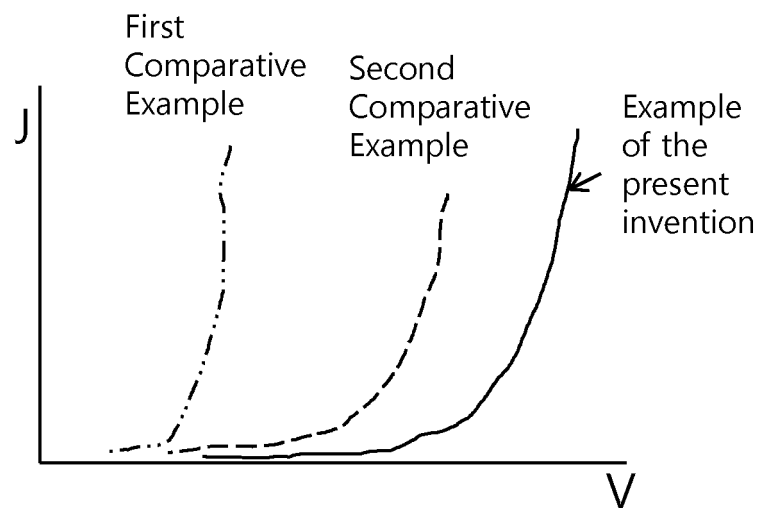


FIG. 7A

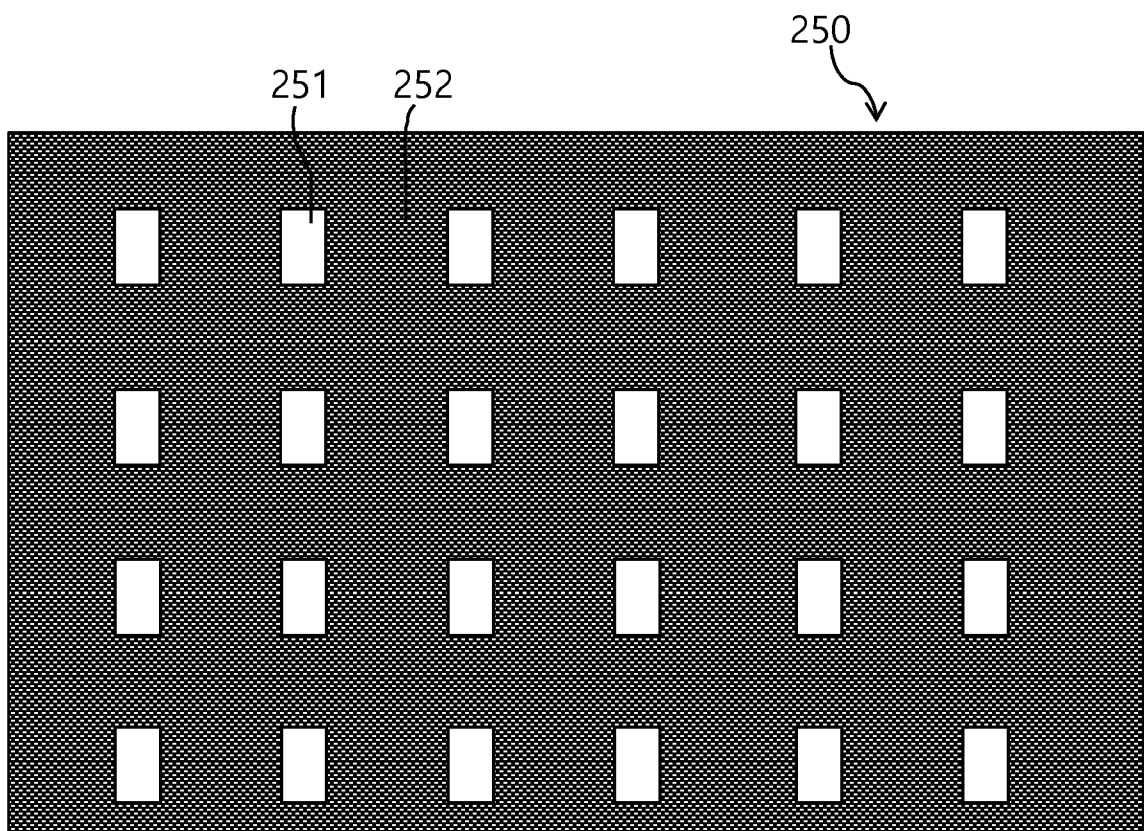


FIG. 7B



FIG. 8


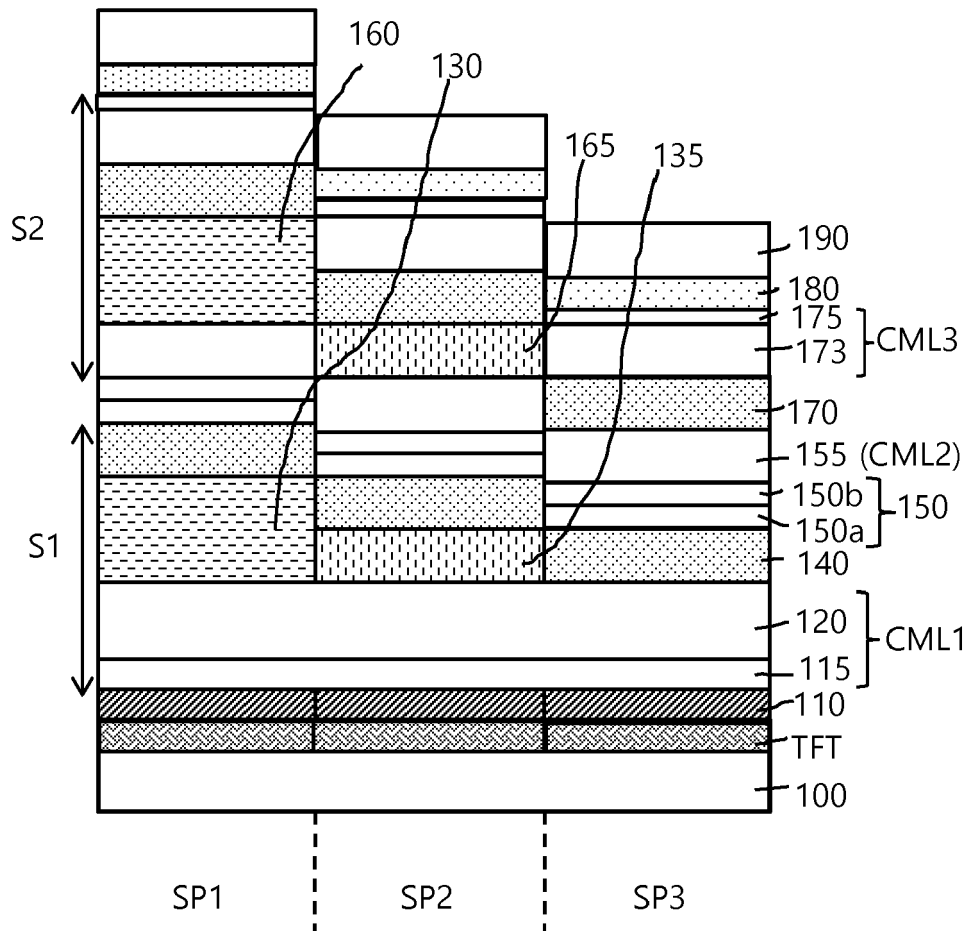


FIG. 9



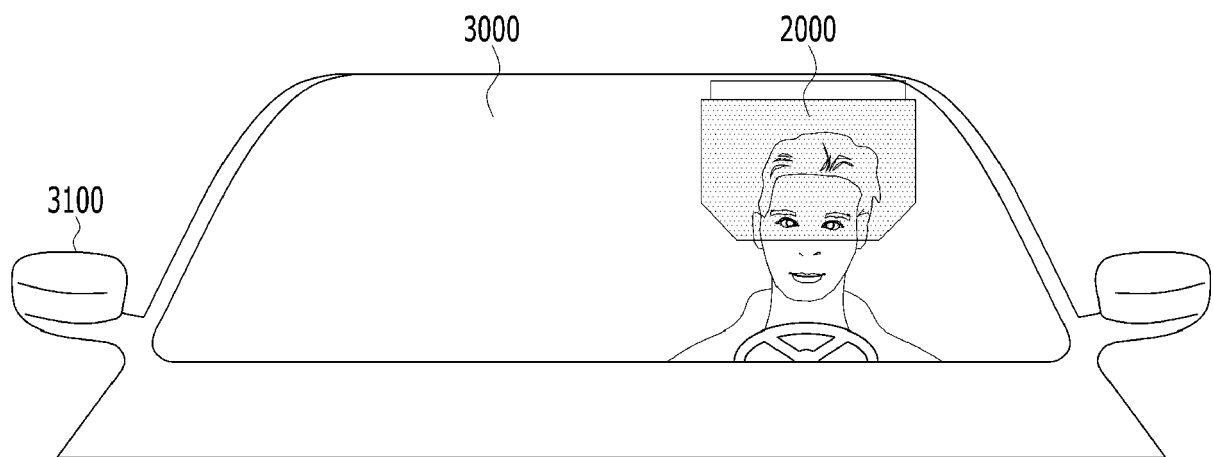

EUROPEAN SEARCH REPORT

Application Number
EP 19 18 3196

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 108 198 945 A (WUHAN CHINA STAR OPTOELECTRONICS SEMICONDUCTOR DISPLAY TECH CO LTD) 22 June 2018 (2018-06-22) * page 3, paragraph 23 - page 4, paragraph 26; claim 1; figures 1, 2, 5 *	1,10-14	INV. H01L27/32 H01L51/52
Y	EP 3 142 148 A1 (LG DISPLAY CO LTD [KR]) 15 March 2017 (2017-03-15) * page 8, paragraph 84 - paragraph 88; figure 3 * * page 10, paragraph 102 *	1-19	
Y	US 2015/155515 A1 (KIM YOUNG-JU [KR] ET AL) 4 June 2015 (2015-06-04) * page 3, paragraph 47; figures 1, 2 *	1-19	
Y	US 2018/151819 A1 (KIM SU-HYEON [KR]) 31 May 2018 (2018-05-31) * claims 1, 8; figure 1 *	2,3,6	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01L
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 December 2019	Examiner Parashkov, Radoslav
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 18 3196

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-12-2019

10

15

20

25

30

35

40

45

50

55


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 108198945 A	22-06-2018	CN 108198945 A	22-06-2018
		WO 2019109438 A1	13-06-2019
EP 3142148 A1	15-03-2017	CN 106531894 A	22-03-2017
		EP 3142148 A1	15-03-2017
		KR 20170030364 A	17-03-2017
		US 2017069865 A1	09-03-2017
		US 2018019429 A1	18-01-2018
		US 2019173035 A1	06-06-2019
US 2015155515 A1	04-06-2015	CN 104681580 A	03-06-2015
		KR 20150063785 A	10-06-2015
		US 2015155515 A1	04-06-2015
US 2018151819 A1	31-05-2018	CN 108134010 A	08-06-2018
		DE 102017128304 A1	30-05-2018
		KR 20180062290 A	08-06-2018
		TW 201824599 A	01-07-2018
		US 2018151819 A1	31-05-2018

专利名称(译)	有机发光二极管，具有有机发光二极管的显示装置以及使用其的车辆用显示装置		
公开(公告)号	EP3595011A1	公开(公告)日	2020-01-15
申请号	EP2019183196	申请日	2019-06-28
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	SEOK HAN BYEOL KIM KWAN SOO PARK EUN JUNG LIM KI MIN ROH SEUNG KWANG KIM BYUNG SOO MOON SANG KYOUNG CHOI DONG IL		
发明人	SEOK, HAN-BYEOL KIM, KWAN-SOO PARK, EUN-JUNG LIM, KI-MIN ROH, SEUNG-KWANG KIM, BYUNG-SOO MOON, SANG-KYOUNG CHOI, DONG-IL		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	B60R1/00 B60R1/12 B60R2001/1215 H01L27/3211 H01L51/0032 H01L51/5004 H01L51/5012 H01L51/5024 H01L51/5203 H01L27/3206 H01L27/3244 H01L51/5044 H01L51/5265 H01L51/5275 H01L2251/5384 H01L2251/552 H01L2251/558 G02B27/0149 G09G3/3208 H01L51/5072		
审查员(译)	PARASHKOV，拉多斯拉夫		
优先权	1020180075967 2018-06-29 KR		
外部链接	Espacenet		


摘要(译)

公开了一种有机发光二极管，一种有机发光二极管显示装置以及使用该有机发光二极管的车辆用显示装置。通过结构改变，有机发光二极管可以实现工艺简化和材料成本的降低，同时保持高亮度。

[Chemical formula 1]



[Chemical formula 2]



[Chemical formula 3]

