

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 577 871 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

21.09.2005 Bulletin 2005/38

(51) Int Cl.7: G09G 3/32, G09G 5/02

(21) Application number: 05100524.7

(22) Date of filing: 27.01.2005

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

Designated Extension States:

AL BA HR LV MK YU

(30) Priority: 15.03.2004 KR 2004017310

(71) Applicant: Samsung SDI Co., Ltd.
Gyeonggi-do (KR)

(72) Inventor: KWAK, Won-Kyu, Legal & IP Team,

Samsung SDI Co.,
Yongin-City, Kyeonggi-do, Gyeonggi-do (KR)

(74) Representative: Hengelhaupt, Jürgen et al


Anwaltskanzlei
Gulde Hengelhaupt Ziebig & Schneider
Wallstrasse 58/59
10179 Berlin (DE)

(54) Colour display with time-divisionally driving of subpixels

(57) Red, green, and blue organic electroluminescent (EL) elements formed on a pixel in an organic EL display are driven by a driving transistor. A capacitor is coupled between a gate and a source of the driving transistor to maintain a voltage for a predetermined time. Emission control transistors are coupled between the driving transistor and the red, green, and blue organic

EL elements, respectively. One field is divided into three subfields, and one of the red, green, and blue organic EL elements in each pixel starts to emit light in each subfield to thus represent a full color screen. The red, green, and blue are mixed and emitted in the row direction and column direction in each of the subfields of a field.

Fig. 2

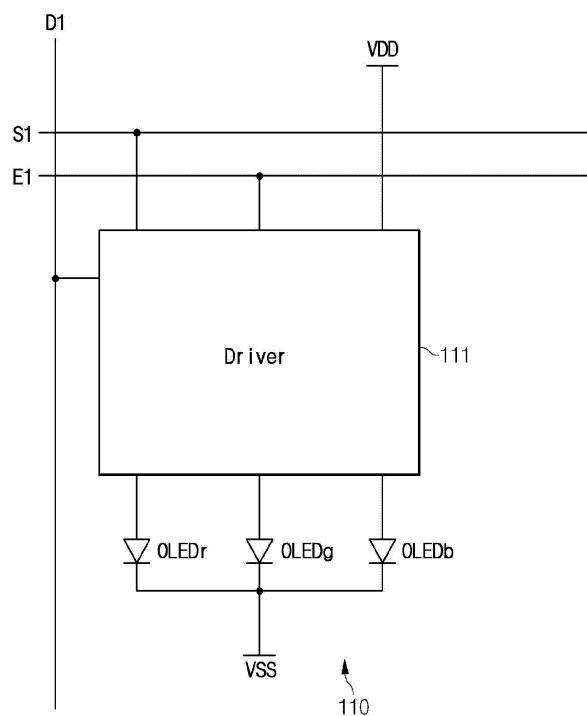

Description**CROSS REFERENCE TO RELATED APPLICATION**

[0001] This application claims priority to and the benefit of Korea Patent Application No. 10-2004-0017310 filed on March 15, 2004 in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION**(a) Field of the Invention**

[0002] The present invention relates to a display device and a driving method thereof. More specifically, the present invention relates to an organic electroluminescent (EL) display using electroluminescence of organic matter, and a driving method thereof.

(b) Description of the Related Art

[0003] In general, an organic EL display is a display device for electrically exciting phosphorous organic compounds and emitting light. The organic EL display drives organic light emission cells arranged in a matrix format to represent images. An organic light emission cell having a diode characteristic is referred to as an organic light emission diode (OLED) and has a structure including an anode electrode layer, an organic thin film, and a cathode electrode layer. Holes and electrons injected through the anode electrode and the cathode electrode are combined on the organic thin film, and emit light. The organic light emission cell emits different amounts of light according to injected amounts of electrons and holes, that is, depending on the applied current.

[0004] In the organic EL display, a pixel includes a plurality of sub-pixels each of which has one of a plurality colors (e.g., primary colors of light), and colors are represented through combinations of the colors emitted by the sub-pixels. In general, a pixel includes a sub-pixel for displaying red R, a sub-pixel for displaying green G, and a sub-pixel for displaying blue B, and the colors are displayed by combinations of red, green, and blue (RGB).

[0005] Each sub-pixel in the organic EL display includes a driving transistor for driving an organic EL element, a switching transistor, and a capacitor. Also, each sub-pixel has a data line for transmitting a data signal, and a power line for transmitting a power supply voltage VDD. Therefore, many wires are required for transmitting voltages or signals to the transistors and capacitor formed at each pixel. It is difficult to arrange such wires in the pixel, and the aperture ratio corresponding to a light emission area of the pixel is reduced.

SUMMARY OF THE INVENTION

[0006] In an exemplary embodiment of the present invention, is provided a display device in which the aperture ratio is improved.

[0007] In another exemplary embodiment of the present invention, is provided a display device for simplifying configurations and wiring of elements in the pixel.

[0008] In another exemplary embodiment of the present invention, a plurality of light emission elements in a pixel share a driver.

[0009] In one aspect of the present invention, a display includes a plurality of pixels arranged in rows and columns, a plurality of select lines coupled to the pixels for applying a plurality of select signals, and a plurality of data lines for applying data signals to the pixels. The pixels display an image during a field having a plurality of subfields. Each of the pixels includes a plurality of light emitting elements having different colors. Each of the select signals is coupled to a corresponding one of the rows of pixels to apply a corresponding one of the select signals thereto. The select signals sequentially select the rows of pixels during each of the plurality of subfields. The pixels on the same one of the rows start emitting different color lights in each of the plurality of subfields. In one of the subfields, at least one of the pixels starts emitting light having a color which is different from a color of a light it starts emitting in another one of the subfields.

[0010] In another aspect of the present invention, a display device includes a plurality of scan lines including a first scan line and a second scan line for applying select signals, a plurality of data lines including a first data line and a second data line for applying data signals for displaying an image during a field having a plurality of subfields, and a plurality of pixel circuits coupled to the scan lines and the data lines. Each of the pixel circuits includes: at least two emit elements, a capacitor, and a driving transistor. The emit elements emit light having different colors, wherein each of the emit elements emits light responsive to an applied current. The capacitor stores a voltage corresponding to one of the data signals applied in response to one of the select signals. The driving transistor outputs the applied current corresponding to the voltage stored in the capacitor. In a first one of the subfields, one of the emit elements of a first color starts emitting light in a first pixel circuit of the pixel circuits, which is coupled to the first scan line and the first data line, one of the emit elements of a color which is different from the first color starts emitting light in a second pixel circuit of the pixel circuits, which is coupled to the first scan line and the second data line, one of the emit elements of a second color starts emitting light in a third pixel circuit of the pixel circuits, which is coupled to the second scan line and the first data line, and one of the emit elements of a color which is different from the second color starts emitting light in a fourth pixel circuit of the pixel circuits, which is coupled to the second scan line and the second data line.

cuit of the pixel circuits, which is coupled to the second scan line and the second data line.

[0011] The emit elements may include an emit element of the first color, an emit element of the second color, and an emit element of a third color. At least one of the pixel circuits may further include a first emitting transistor, a second emitting transistor, and a third emitting transistor. The first emitting transistor may be coupled between the driving transistor and the emit element of the first color, the second emitting transistor may be coupled between the driving transistor and the emit element of the second color, and the third emitting transistor may be coupled between the driving transistor and the emit element of the third color.

[0012] In a second one of the subfields, the emit element of the second color may start emitting light in the first pixel circuit, and one of the emit elements of a color which is different from the second color may start emitting light in the second pixel circuit. In a third one of the subfields, the emit element of the third color may start emitting light in the first pixel circuit, and one of the emit elements of a color which is different from the third color may start emitting light in the second pixel circuit.

[0013] The emit element of the third color may start emitting light in the third pixel circuit in the second one of the subfields, and the emit element of the first color may start emitting light in the third pixel circuit in the third one of the subfields.

[0014] One of the emit elements of a color which is different from colors of the emit elements which start emitting light in the first and second pixel circuits may start emitting light in a fifth pixel circuit of the pixel circuits, which is coupled to the first scan line and the third data line in the first, second and third ones of the subfields.

[0015] One of the emit elements of a color which is different from colors of the emit elements which start emitting light in the first and third pixel circuits may start emitting light in a sixth pixel circuit of the pixel circuits, which is coupled to the third scan line and the first data line in the first, second and third ones of the subfields.

[0016] The emit element of the first color, the emit element of the second color and the emit element of the third color may emit light at least once during the field.

[0017] In another aspect of the present invention, a display device includes a plurality of scan lines, a plurality of data lines, and a plurality of pixel circuits. The scan lines apply select signals, the data lines apply data signals for displaying an image during a field having a plurality of subfields. The pixel circuits are coupled to the scan lines and data lines. Each of the pixel circuits includes at least two emit elements, a switching transistor, a capacitor, a driving transistor, and a switch. The emit elements emit light having different colors, wherein each of the emit elements emits light responsive to an applied current. The switching transistor applies one of the data signals corresponding to one of the emit elements in response to one of the select signals at least

once during the field. The capacitor stores a voltage corresponding to one of the data signals applied by the switching transistor. The driving transistor outputs the applied current corresponding to the voltage stored in

5 the capacitor, and the switch selectively outputs the applied current provided by the driving transistor to one of the emit elements of a color which corresponds to the one of the data signals. In a first one of the subfields, one of the data signals corresponding to one of the emit elements of a first color is applied to a data line of a first group including at least one of the data lines, and one of the data signals corresponding to one of the emit elements of a second color is applied to a data line of a second group including at least one of the data lines,

10 when one of the select signals is applied to a scan line of a first group including at least one of the scan lines.

[0018] In still another aspect of the present invention, in a display device including a plurality of pixel circuits arranged in rows and columns, a method of driving during a field having a plurality of subfields is provided.

15 Each of the pixel circuits includes at least two emit elements for emitting light of different colors responsive to an applied current, and a transistor coupled to the emit elements supplies the applied current to one of the emit elements through at least one switch. The method includes, start emitting, in a first one of the subfields, one of the emit elements of a first color in a first pixel circuit provided on a row of a first row group including at least one of the rows and a column of a first column group including at least one of the columns; start emitting, in the first one of the subfields, one of the emit elements of a second color which is different from the first color in a second pixel circuit provided on a row of the first row group and a column of a second column group including at least one of the columns; and start emitting, 20 in a second one of the subfields, the emit elements of colors in the first and second pixel circuits, respectively, which are different from the first and second colors, respectively.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The accompanying drawings illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the invention:

[0020] FIG. 1 shows a plan view of an organic EL display used to implement exemplary embodiments of the present invention;

[0021] FIG. 2 shows a conceptual diagram of a pixel in the organic EL display of FIG. 1;

[0022] FIG. 3 shows a circuit diagram of a pixel in an organic EL display according to a first exemplary embodiment of the present invention;

[0023] FIG. 4 shows a signal timing diagram of an organic EL display according to the first exemplary embodiment of the present invention;

[0024] FIGs. 5 and 6 show signal timing diagrams of

an organic EL display according to second and third exemplary embodiments of the present invention;

[0025] FIG. 7 shows a circuit diagram of a pixel in an organic EL display according to a fourth exemplary embodiment of the present invention;

[0026] FIG. 8 shows a signal timing diagram of the organic EL display according to the fourth exemplary embodiment of the present invention;

[0027] FIG. 9 shows a circuit diagram of a number of pixels in an organic EL display according to a fifth exemplary embodiment of the present invention; and

[0028] FIG. 10 shows a signal timing diagram of the organic EL display according to the fifth exemplary embodiment of the present invention.

DETAILED DESCRIPTION

[0029] In the following detailed description, only certain exemplary embodiments of the present invention are shown and described, simply by way of illustration. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not restrictive. There may be parts shown in the drawings, or parts not shown in the drawings, that are not discussed in the specification as they are not essential to a complete understanding of the invention. Like reference numerals designate like elements.

[0030] A light emission display and driving method according to exemplary embodiments of the present invention will be described in detail with reference to drawings, and an organic EL display will be exemplified and described in the exemplary embodiments.

[0031] FIG. 1 shows a plan view of an organic EL display used to implement exemplary embodiments of the present invention, and FIG. 2 shows a conceptual diagram of a pixel in the organic EL display of FIG. 1.

[0032] As shown in FIG. 1, the organic EL display includes a display 100, a select scan driver 200, an emit scan driver 300, and a data driver 400. The display 100 includes a plurality of scan lines S1 to Sn and E1 to En arranged in the row direction, and a plurality of data lines D1 to Dm, a plurality of power lines VDD, and a plurality of pixels 110 respectively arranged in the column direction. The pixels are formed at pixel areas formed by two adjacent ones of the scan lines S1 to Sn and two adjacent ones of the data lines D1 to Dm. Referring to FIG. 2, the pixel 110 includes organic EL elements OLED_r, OLED_g, and OLED_b for emitting red, green, and blue lights, respectively, and a driver 111 on which elements for driving the organic EL elements OLED_r, OLED_g, and OLED_b are formed. The organic EL elements emit light having brightness corresponding to the applied current.

[0033] The select scan driver 200 sequentially transmits select signals for selecting corresponding lines to the select scan lines S1 to Sn in order to apply data sig-

nals to pixels of the corresponding lines, the emit scan driver 300 sequentially transmits emit signals for controlling light emission of the organic EL elements OLED_r, OLED_g, and OLED_b to the emit scan lines E1 to En, and the data driver 400 applies data signals corresponding to the pixels of lines to which select signals are applied to the data lines D1 to Dm each time the select signals are sequentially applied.

[0034] The select and emit scan drivers 200 and 300 and the data driver 400 are coupled to a substrate on which the display 100 is formed. In addition, the select and emit scan drivers 200 and 300 and/or the data driver 400 can be installed directly on the substrate of the display 100, and they can be substituted with a driving circuit which is formed on the same layer on the substrate of the display 100 as the layer on which scan lines, data lines, and transistors are formed. Further, the select and emit scan drivers 200 and 300 and/or the data driver 400 can be installed in a chip format on a tape carrier package (TCP), a flexible printed circuit (FPC), or a tape automatic bonding unit (TAB) coupled to the select and emit scan drivers 200 and 300 and/or the data driver 400.

[0035] One field is divided into three subfields and then driven, and red, green, and blue data are written on the three subfields to emit light in the first exemplary embodiment. For this purpose, the select scan driver 200 sequentially transmits select signals to the select scan lines S1 to Sn for each subfield, the emit scan driver 300 applies emit signals to the emit scan lines E1 to En so that the organic EL element for each color may emit light in a subfield, and the data driver 400 applies data signals respectively corresponding to the red, green, and blue organic EL elements to the data lines D1 to Dm.

[0036] A detailed operation of the organic EL display according to a first exemplary embodiment will be described with reference to FIGs. 3 and 4.

[0037] FIG. 3 shows a circuit diagram of a pixel 110' in the organic EL display according to the first exemplary embodiment of the present invention, and FIG. 4 shows a signal timing diagram of the organic EL display according to the first exemplary embodiment of the present invention. The pixel 110', for example, can be used as the pixel 110 of FIGs. 1 and 2. In detail, FIG. 3 shows a voltage programmed pixel coupled to the select scan line S1 of the first row and the data line D1 of the first column. The pixel 110' includes p-channel transistors. No other pixels will be described in reference to the first exemplary embodiment since the pixels of first exemplary embodiment have substantially the same structure as that shown in FIG. 3.

[0038] As shown in FIG. 3, the pixel circuit 110' according to the first exemplary embodiment includes a driver 111' and organic EL elements OLED_r, OLED_g, and OLED_b. The driver 111' includes a driving transistor M1, a switching transistor M2, and emitting transistors M3r, M3g, and M3b for controlling light emission of the

organic EL elements OLED_r, OLED_g, and OLED_b. One emit scan line E1 includes three emit signal lines E1_r, E1_g, and E1_b, and while not illustrated in FIG. 3, other emit scan lines E2 to En respectively include three emit signal lines E2_r to En_r, E2_g to En_g, and E2_b to En_b. The emitting transistors M3_r, M3_b, and M3_b and the emit signal lines E1_r, E1_g, and E1_b form a switch for selectively transmitting the current provided by the driving transistor M1 to the organic EL elements OLED_r, OLED_g, and OLED_b.

[0039] In detail, the switching transistor M2 having a gate coupled to the select scan line S1 and a source coupled to the data line D1 transmits the data voltage provided by the data line D1 in response to the select signal provided by the select scan line S1. The driving transistor has a source coupled to the power line VDD for supplying a power supply voltage, and has a gate coupled to a drain of the switching transistor M2, and a capacitor C1 is coupled between a source and a gate of the driving transistor M1. The driving transistor M1 has a drain coupled to sources of the emit transistors M3_r, M3_g, and M3_b, and gates of the emit transistors M3_r, M3_g, and M3_b are coupled to the emit signal lines E1_r, E1_g, and E1_b, respectively. Drains of the emit transistors M3_r, M3_g, and M3_b are coupled, respectively, to anodes of the organic EL elements OLED_r, OLED_g, and OLED_b, and a power supply voltage VSS is applied to cathodes of the organic EL elements OLED_r, OLED_g, and OLED_b. The power supply voltage VSS in the first exemplary embodiment can be a negative voltage or a ground voltage.

[0040] The switching transistor M2 transmits the data voltage provided by the data line D1 to the gate of the driving transistor M1 in response to a low-level select signal provided by the select scan line S1, and the voltage which corresponds to a difference between the data voltage transmitted to the gate of the transistor M1 and the power supply voltage VDD is stored in the capacitor C1. When the emitting transistor M3_r is turned on in response to a low-level emit signal provided by the emit signal line E1_r, the current which corresponds to the voltage stored in the capacitor C1 is transmitted to the red organic EL element OLED_r from the driving transistor M1 to emit light. In a like manner, when the emitting transistor M3_g is turned on in response to a low-level emit signal provided by the emit signal line E1_g, the current which corresponds to the voltage stored in the capacitor C1 is transmitted to the green organic EL element OLED_g from the driving transistor M1 to emit light. Further, when the emitting transistor M3_b is turned on in response to a low-level emit signal provided by the emit signal line E1_b, the current which corresponds to the voltage stored in the capacitor C1 is transmitted to the blue organic EL element OLED_b from the driving transistor M1 to emit light. Three emit signals applied to the three emit signal lines respectively have low-level periods without repetition during one field so that one pixel can display red, green, and blue.

[0041] An organic EL display driving method will be described in detail with reference to FIG. 4. Referring to FIG. 4, one field 1TV includes three subfields 1SF, 2SF, and 3 SF, and signals for driving the red, green, and blue organic EL elements are applied to the subfields 1SF, 2SF, and 3 SF, periods of which are the same.

[0042] In the subfield 1SF, when a low-level select signal is applied to the select scan line S1 on the first row, data voltages of R corresponding to red of the pixels on the first row are applied, respectively, to the data lines D1 to D_m, and a low-level emit signal is applied to the emit signal line E1_r on the first row. The corresponding one of the data voltages of R is applied to the capacitor C1 through the switching transistor M2 of each pixel on the first row, and a voltage corresponding to the corresponding one of the data voltages of R is charged in the capacitor C1. The emitting transistor M3_r of the pixel on the first row is turned on, and a current corresponding to a gate-source voltage stored in the capacitor C1 is transmitted to the red organic EL element OLED_r from the driving transistor M1 to thus emit light.

[0043] Next, when a low-level select signal is applied to the select scan line S2 on the second row, the data voltages of R corresponding to the red of pixels of the second row are applied, respectively, to the data lines D1 to D_m, a low-level emit signal is applied to the emit signal line E2_r of the second row, and a current corresponding to the corresponding one of the data voltages of R provided by a corresponding one of the data lines D1 to D_m is supplied to the red organic EL element OLED_r of each pixel on the second row to thus emit light.

[0044] Then the data voltages are sequentially applied to pixels of from the third to (n-1)th rows to emit the red organic EL element OLED_r. When a low-level select signal is applied to the select scan line S_n on the nth row, the data voltages of R corresponding to the red of the pixels of the nth row are applied to the data lines D1 to D_m, and a low-level emit signal is applied to the emit signal line E_n_r of the nth row. A current corresponding to a corresponding one of the data voltages of R provided by the data lines D1 to D_m is accordingly supplied to the red organic EL element OLED_r of each pixel on the nth row to thus emit light.

[0045] As a result, the data voltages of R corresponding to red are applied to the respective pixels formed on the display panel 100 during the subfield 1 SF. The emit signals applied to the emit signal lines E1_r to En_r are maintained at the low level for a predetermined time, and the organic EL element OLED_r coupled to the emitting transistor M3_r to which the corresponding emit signal is applied during the emit signal is at the low level consecutively emits light. This period is illustrated to correspond to the subfield 1SF in FIG. 4. That is, the red organic EL element OLED_r for each pixel emits light with brightness which corresponds to the data voltage applied during the period which corresponds to the subfield.

[0046] In the subfield 2SF, in a like manner as the subfield 1SF, a low-level select signal is sequentially applied to the select scan lines S1 to Sn of from the first to the nth rows, and when the select signal is applied to the respective select scan lines S1 to Sn, data voltages of G corresponding to green of pixels of the corresponding rows are applied, respectively, to the data lines D1 to Dm. A low-level emit signal is sequentially applied to the emit signal line E1g to Eng in synchronization with sequentially applying the low-level select signal to the select scan lines S1 to Sn. A current corresponding to the applied data voltage is transmitted to the green organic EL element OLEDg through the emitting transistor M3g in each pixel to emit light.

[0047] In the subfield 3SF, in a like manner as the subfield 2SF, a low-level select signal is sequentially applied to the select scan lines S1 to Sn of from the first to the nth rows, and when the select signal is applied to the respective select scan lines S1 to Sn, data voltages of B corresponding to blue of pixels of the corresponding rows are applied, respectively, to the data lines D1 to Dm. A low-level emit signal is sequentially applied to the emit signal lines E1b to Enb in synchronization with sequentially applying the low-level select signal to the select scan lines S1 to Sn. A current corresponding to the applied data voltage of B is transmitted to the blue organic EL element OLEDb through the emitting transistor M3b in each pixel to emit light.

[0048] As described above, one field is divided into three subfields, and the subfields are sequentially driven in the organic EL display driving method according to the first exemplary embodiment. One color organic EL element of one pixel in each subfield emits light, and the organic EL elements of three colors (red, green, and blue) sequentially emit light through three subfields to thus represent colors.

[0049] The signal timing diagram of FIG. 4 illustrates that the organic EL display is driven from the single scan method to the progressive scan method. In addition, the organic EL display can be driven using a dual scan method, an interlaced scan method, and other scan methods without being restricted to them.

[0050] Also, the red, green, and blue organic EL elements have been described to emit light during the same period according to the first exemplary embodiment, but the white balance can be incorrect because of different efficiency of the organic EL elements of respective colors when they emit light during the same period. In this case, the emit periods of the organic EL elements of respective colors are to be modified, which will be described with reference to FIG. 5.

[0051] FIG. 5 shows a signal timing diagram of the organic EL display according to a second exemplary embodiment of the present invention.

[0052] As shown in FIG. 5 differing from FIG. 4, low-level periods of emit signals applied to the emit signal lines E1r to Enr corresponding to red, emit signals applied to the emit signal lines E1g to Eng corresponding

to green, and emit signals applied to the emit signal lines E1b to Enb corresponding to blue are different from each other. As described above, the emit periods of the organic EL elements depend on low-level periods of the emit signals applied to the gates of the emitting transistors M3r, M3g, and M3b coupled to the corresponding organic EL elements, and hence, emit times of the respective organic EL elements can be varied by providing different low-level periods of emit signals.

[0053] For example in FIG. 5, low-level periods of emit signals applied to the emit signal lines E1r to Enr coupled to the gate of the transistor M3r coupled to the red organic EL element OLEDr are established to be the longest, and low-level periods of emit signals applied to the emit signal lines E1b to Enb coupled to the gate of the transistor M3b coupled to the blue organic EL element OLEDb are established to be the shortest. An emit time of the red organic EL element OLEDr is lengthened, and an emit time of the blue organic EL element OLEDb is shortened. The white balance is controlled well through the above-noted process when the emit efficiency of the red organic EL element OLEDr is the worst and the emit efficiency of the blue organic EL element OLEDb is the best.

[0054] The colors are controlled to emit light in the order of red, green, and blue in FIGS. 4 and 5, and they can emit light in other orders. Also, it is possible to divide a field into four subfields rather than three subfields and control the fourth subfield to drive an organic EL element of one color to emit light, or drive organic EL elements of two or more colors concurrently. Further, it is possible to add an organic EL element for displaying white in addition to the three organic EL elements, and either drive the white organic EL element during a subfield or drive four-color organic EL elements respectively during four subfields.

[0055] Also, referring to FIGS. 4 and 5, the select signal has been illustrated to be low-level and the emit signal has been illustrated to be concurrently low-level in one pixel. Alternatively, the emit signal can be low-level after the select signal is switched to high-level from low-level. That is, referring to FIG. 6, the select signal becomes high-level and the emit signal applied to the emit signal lines E1r, E1g, and E1b becomes low-level after the select signal applied to the select scan line S1 changes from low-level to high-level and a voltage which corresponds to the data voltage provided by the data lines D1 to Dm is programmed to the capacitor C1 of each pixel according to the third exemplary embodiment. As a result, the organic EL elements are prevented from emitting light while the data are programmed.

[0056] P-channel transistors have been applied to the pixels according to the first to third exemplary embodiments, and n-channel transistors, combinations of p-channel and n-channel transistors, and other switches having similar functions as the p-channel and n-channel transistors can also be used in addition to the p-channel transistors.

[0057] The emitting transistors M3r, M3g, and M3b have been driven by individual emit signal lines in the first to third exemplary embodiments. That is, three emit signal lines have been used for each pixel. Differing from this, all three of the pixels can be driven using only two emit signal lines, which will now be described with reference to FIGs. 7 and 8.

[0058] FIG. 7 shows a circuit diagram of a pixel 110" in the organic EL display according to a fourth exemplary embodiment of the present invention, and FIG. 8 shows a signal timing diagram of the organic EL display according to the fourth exemplary embodiment of the present invention. In detail, FIG. 7 illustrates a voltage programming pixel 110" coupled to the select scan line S1 of the first row and the data line D1 of the first column. The pixel 110", for example, can be used as the pixel 110 of FIGs. 1 and 2.

[0059] Referring to FIG. 7, differing from the pixel circuit of FIG. 3, the pixel circuit according to the fourth exemplary embodiment has two emitting transistors for each color's organic EL element, and the emitting transistors are driven by two emit signal lines. An emit scan line E1 includes two emit signal lines E11 and E12, and other emit scan lines E2 to En have two emit signal lines E21 to En1 and E22 to En2, respectively.

[0060] In detail, a p-channel emitting transistor M31 and an n-channel emitting transistor M32r are coupled in series between a drain of the driving transistor M1 and a red organic EL element OLED_r, an n-channel emitting transistor M31g and a p-channel emitting transistor M32g are coupled in series between the drain of the driving transistor M1 and a green organic EL element OLED_g, and n-channel emitting transistors M31b and M32b are coupled in series between the drain of the driving transistor M1 and a blue organic EL element OLED_b. Gates of the emitting transistors M31r, M31g, and M31b are coupled in common to the emit signal line E11, and gates of the emitting transistors M32r, M32g, and M32b are coupled in common to the emit signal line E12.

[0061] Accordingly, the current is supplied to the red organic EL element OLED_r when an emit signal applied to the emit signal line E11 is low-level and an emit signal applied to the emit signal line E12 is high-level, the current is supplied to the green organic EL element OLED_g when an emit signal applied to the emit signal line E11 is high-level and an emit signal applied to the emit signal line E12 is low-level, and the current is supplied to the blue organic EL element OLED_b when both the emit signals applied to the emit signal lines E11 and E12 are high-level. That is, when the emit signals are supplied in the three subfields according to the above-described method, the red, green, and blue organic EL elements are sequentially driven with two emit signals according to the signal timing of FIG. 8.

[0062] An organic EL display driving method according to the fourth exemplary embodiment of the present invention will be described with reference to FIG. 8. One

field (1TV) includes three subfields 1SF, 2SF, and 3 SF, and signals for driving red, green, and blue organic EL elements of each pixel are applied to the subfields 1 SF, 2SF, and 3 SF in a like manner as FIG. 4.

[0063] Referring to FIG. 8, emit signals applied to the emit signal lines E11 to En1 have the same timing as that applied to the emit signal lines E1r to Enr of FIG. 4, and emit signals applied to the emit signal lines E12 to En2 have the same timing as that applied to the emit signal lines E1g to Eng of FIG. 4.

[0064] In the subfield 1SF, since the emit signal applied to the emit signal line E11 is low-level and the emit signal applied to the emit signal line E12 is high-level, the emitting transistors M31r and M32r are turned on, and hence, the current is supplied to the red organic EL element OLED_r to emit light. However, no current is supplied to the green and blue organic EL elements OLED_g and OLED_b since the n-channel transistors M31g and M31b coupled to the emit signal line E11 are turned off.

[0065] In the subfield 2SF, since the emit signal applied to the emit signal line E11 is high-level and the emit signal applied to the emit signal line E12 is low-level, the emitting transistors M31g and M32g are turned on, and hence, the current is supplied to the green organic EL element OLED_g to emit light. However, no current is supplied to the red and blue organic EL elements OLED_r and OLED_b since the n-channel transistors M32r and M32b coupled to the emit signal line E12 are turned off.

[0066] In the subfield 3 SF, since the emit signals applied to the emit signal lines E11 and E12 are high-level, the emitting transistors M31b and M32b are turned on, and hence, the current is supplied to the blue organic EL element OLED_b to emit light. However, no current is supplied to the red and green organic EL elements OLED_r and OLED_g since the p-channel transistors M31r and M32g respectively coupled to the emit signal lines E11 and E12 are turned off.

[0067] Therefore, the three-colored organic EL elements are controlled by using two emit signal lines in the fourth exemplary embodiment. The transistors M31r and M32g are p-channel transistors and the transistors M32r, M31g, M31b, and M32b are n-channel transistors in FIGs. 7 and 8. In other embodiments, conductivity types of these transistors can be combined in different manners when the transistors are controllable in a manner similar to that illustrated by the timing diagram of FIG. 8. Also, the timing diagrams similar to those of second and third exemplary embodiments in FIGs. 5 and 6 can be used with the pixel circuit 110" of FIG. 7 according to the fourth exemplary embodiment.

[0068] The voltage programming pixel circuit using switching transistors and driving transistors has been described in the first to fourth exemplary embodiments, and a voltage programming pixel circuit using transistors for compensating for threshold voltages of the driving transistors or transistors for compensating for voltage dropping as well as the switching transistors and driving transistors is applicable. Also, the present inven-

tion is applicable to current programming pixel circuits when the driving waveform described with reference to FIG. 5, that is, the driving waveform in which the emit signal is high-level while the select signal is low-level.

[0069] The organic EL elements sequentially emit light of one color in one subfield, and other organic EL elements sequentially emit light of other colors in the next subfield in the first to fourth exemplary embodiments. The color emitted at upper rows of the display panel is different from the color emitted at lower rows thereof at an instance during the above-noted driving. Referring to FIG. 4, the red organic EL elements emit light in the upper region of the display area and the blue organic EL elements emit light in the lower region of the display area in the temporally middle part of one subfield 1 SF. When the organic EL display is shaken in this instance, red areas and blue areas may look separated, which is generally referred to as a color separation phenomenon.

[0070] An exemplary embodiment for eliminating or reducing the color separation phenomenon will now be described with reference to FIGs. 9 and 10.

[0071] FIG. 9 is a circuit diagram of a number of pixels of a display 200 in an organic EL display according to a fifth exemplary embodiment of the present invention, and FIG. 10 is a signal timing diagram of the organic EL display according to the fifth exemplary embodiment of the present invention. By way of example, the display 200 can be used in the organic EL display of FIG. 1 instead of the display 100 to realize an organic EL display according to the fifth exemplary embodiment. The display 200 has a pattern in which nine pixel circuits formed by three rows and three columns are repeated. FIG. 9 illustrates only a portion of the display 200, in which nine pixel circuits are formed at regions defined by first to third rows S1 to S3 and first to third columns D1 to D3.

[0072] Referring to FIG. 9, in the three pixel circuits coupled to the scan line S1 on the first row, gates of a transistor M3r of the pixel circuit coupled to the data line D1, a transistor M3g of the pixel circuit coupled to the data line D2, and a transistor M3b of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E1r. In a like manner, gates of a transistor M3g of the pixel circuit coupled to the data line D1, a transistor M3b of the pixel circuit coupled to the data line D2, and a transistor M3r of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E1g. Also, gates of a transistor M3b of the pixel circuit coupled to the data line D1, a transistor M3r of the pixel circuit coupled to the data line D2, and a transistor M3g of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E1b.

[0073] In the three pixel circuits coupled to the scan line S2 on the second row, gates of a transistor M3g of the pixel circuit coupled to the data line D1, a transistor M3b of the pixel circuit coupled to the data line D2, and a transistor M3r of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E2r. In a like

manner, gates of a transistor M3b of the pixel circuit coupled to the data line D1, a transistor M3r of the pixel circuit coupled to the data line D2, and a transistor M3g of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E2g. Also, gates of a transistor M3r of the pixel circuit coupled to the data line D1, a transistor M3g of the pixel circuit coupled to the data line D2, and a transistor M3b of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E2b.

[0074] In the three pixel circuits coupled to the scan line S3 on the third row, gates of a transistor M3b of the pixel circuit coupled to the data line D1, a transistor M3r of the pixel circuit coupled to the data line D2, and a transistor M3g of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E3r. In a like manner, gates of a transistor M3r of the pixel circuit coupled to the data line D1, a transistor M3g of the pixel circuit coupled to the data line D2, and a transistor M3b of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E3g. Also, gates of a transistor M3g of the pixel circuit coupled to the data line D1, a transistor M3b of the pixel circuit coupled to the data line D2, and a transistor M3r of the pixel circuit coupled to the data line D3 are coupled to an emit signal line E3b.

[0075] Accordingly, a pixel circuit coupled to a scan line S(3i-2) of the (3i-2)th row (where \square is an integer less than $\square n/3 \square$ when assuming that $\square n \square$ is a multiple of 3) and a (3j-2)th data line D(3j-2) (where \square is an integer less than $\square m/3 \square$ when assuming that $\square m \square$ is a multiple of 3) has the same coupling relation as that of a pixel circuit coupled to the scan line S1 and the data line D1, a pixel circuit coupled to the scan line S(3i-2) and a (3j-1)th data line D(3j-1) has the same coupling relation as that of a pixel circuit coupled to the scan line S1 and the data line D2, and a pixel circuit coupled to the scan line S(3i-2) and a (3j)th data line D(3j) has the same coupling relation as that of a pixel circuit coupled to the scan line S1 and the data line D3. Also, a pixel circuit coupled to the scan line S(3i-1) of the (3i-1)th row and the data line D(3j-2) has the same coupling relation as that of a pixel circuit coupled to the scan line S2 and the data line D1, a pixel circuit coupled to the scan line S(3i-1) and the data line D(3j-1) has the same coupling relation as that of a pixel circuit coupled to the scan line S2 and the data line D3. In a like manner, a pixel circuit coupled to the scan line S(3i) of the (3i)th row and the data line D(3j-2) has the same coupling relation as that of a pixel circuit coupled to the scan line S3 and the data line D1, a pixel circuit coupled to the scan line S(3i) and the data line D(3j-1) has the same coupling relation as that of a pixel circuit coupled to the scan line S3 and the data line D2, and a pixel circuit coupled to the scan line S(3i) and the data line D(3j) has the same coupling relation as that of a pixel circuit coupled to the scan line S3 and the data line D3.

[0076] Referring to FIG. 10, in a subfield 1SF, when a select signal is applied to the scan line S1 of the first row, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E1r so that the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb emit light in the three pixel circuits which are adjacent in the row direction.

[0077] When a select signal is applied to the scan line S2 of the second row, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E2r so that the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr emit light in the three pixel circuits which are adjacent in the row direction.

[0078] When a select signal is applied to the scan line S3 of the third row, data voltages of B, R, and G corresponding to the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E3r so that the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg emit light in the three pixel circuits which are adjacent in the row direction.

[0079] In a like manner, in the subfield 1SF, when a select signal is applied to the (3i-2)th scan lines S1, S4, \square , Sn-2, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm so that the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb emit light in the three pixel circuits which are adjacent in the row direction. When a select signal is applied to the (3i-1)th scan lines S2, S5, \square , Sn-1, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm so that the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr emit light in the three pixel circuits which are adjacent in the row direction. Also, when a select signal is applied to the (3i)th scan lines S3, S6, \square , Sn, data voltages of B, R, and G corresponding to the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6,

\square , Dm so that the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg emit light in the three pixel circuits which are adjacent in the row direction.

[0080] In a subsequent subfield 2SF, when a select signal is applied to the scan line S1, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr are respectively applied to the data lines D1, D4, \square , Dm-2, the data lines D2, D5, \square , Dm-1, and the data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E1g so that the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr emit light in the three pixel circuits which are adjacent in the row direction.

[0081] When a select signal is applied to the scan line S2, data voltages of B, R, and G, corresponding to the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg are respectively applied to the data lines D1, D4, \square , Dm-2, the data lines D2, D5, \square , Dm-1, and the data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E2g so that the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg emit light in the three pixel circuits which are adjacent in the row direction.

[0082] When a select signal is applied to the scan line S3, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb are respectively applied to the data lines D1, D4, \square , Dm-2, the data lines D2, D5, \square , Dm-1, and the data lines D3, D6, \square , Dm, and an emit signal is applied to the emit signal line E3g so that the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb emit light in the three pixel circuits which are adjacent in the row direction.

[0083] In a like manner, in the subfield 2SF, when a select signal is applied to the (3i-2)th scan lines S1, S4, \square , Sn-2, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm so that the green, blue, and red organic EL elements OLEDg, OLEDb, and OLEDr emit light in the three pixel circuits which are adjacent in the row direction. When a select signal is applied to the (3i-1)th scan lines S2, S5, \square , Sn-1, data voltages of B, R, and G corresponding to the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg are respectively applied to the (3j-2)th data lines D1, D4, \square , Dm-2, the (3j-1)th data lines D2, D5, \square , Dm-1, and the (3j)th data lines D3, D6, \square , Dm so that the blue, red, and green organic EL elements OLEDb, OLEDr, and OLEDg emit light in the three pixel circuits which are adjacent in the row direction. Also,

when a select signal is applied to the (3i)th scan lines S3, S6, \square , Sn, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLEDr, OLEDg, and OLEDb are respectively applied to

the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm so that the red, green, and blue organic EL elements OLED_r, OLED_g, and OLED_b emit light in the three pixel circuits which are adjacent in the row direction.

[0084] In a subsequent subfield 3SF, when a select signal is applied to the scan line S1, data voltages of B, R, and G corresponding to the blue, red, and green organic EL elements OLED_b, OLED_r, and OLED_g are respectively applied to the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm, and an emit signal is applied to the emit signal line E1b so that the blue, red, and green organic EL elements OLED_b, OLED_r, and OLED_g emit light in the three pixel circuits which are adjacent in the row direction.

[0085] When a select signal is applied to the scan line S2, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLED_r, OLED_g, and OLED_b are respectively applied to the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm, and an emit signal is applied to the emit signal line E2b so that the red, green, and blue organic EL elements OLED_r, OLED_g, and OLED_b emit light in the three pixel circuits which are adjacent in the row direction.

[0086] When a select signal is applied to the scan line S3, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLED_g, OLED_b, and OLED_r are respectively applied to the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm, and an emit signal is applied to the emit signal line E3g so that the green, blue, and red organic EL elements OLED_g, OLED_b, and OLED_r emit light in the three pixel circuits which are adjacent in the row direction.

[0087] In a like manner, in the subfield 3SF, when a select signal is applied to the (3i-2)th scan lines S1, S4, □, Sn-2, data voltages of B, R, and G corresponding to the blue, red, and green organic EL elements OLED_b, OLED_r, and OLED_g are respectively applied to the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm so that the blue, red, and green organic EL elements OLED_b, OLED_r, and OLED_g emit light in the three pixel circuits which are adjacent in the row direction. When a select signal is applied to the (3i-1)th scan lines S2, S5, □, Sn-1, data voltages of R, G, and B corresponding to the red, green, and blue organic EL elements OLED_r, OLED_g, and OLED_b are respectively applied to the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm so that the red, green, and blue organic EL elements OLED_r, OLED_g, and OLED_b emit light in the three pixel circuits which are adjacent in the row direction. Also,

when a select signal is applied to the (3i)th scan lines S3, S6, □, Sn, data voltages of G, B, and R corresponding to the green, blue, and red organic EL elements OLED_g, OLED_b, and OLED_r are respectively applied to

5 the (3j-2)th data lines D1, D4, □, Dm-2, the (3j-1)th data lines D2, D5, □, Dm-1, and the (3j)th data lines D3, D6, □, Dm so that the green, blue, and red organic EL elements OLED_g, OLED_b, and OLED_r emit light in the three pixel circuits which are adjacent in the row direction.

[0088] Therefore, three colors are mixed and emitted in the pixel circuits provided on the same row in one subfield, and three colors are mixed and emitted in the pixel circuits provided on the same column. That is, a plurality

10 of pixel circuits which respectively emit red, green, and blue light on the total screen are provided in one subfield, and one pixel circuit emits different colors for each subfield so that the red, green, and blue are emitted in one field. As a result, since the three colors are mixed and emitted in the row direction and the column direction, the color separation phenomenon which may be caused because of different colors on the upper region and lower region of the screen is reduced or eliminated.

[0089] While each row has a different color emitted in 15 the fifth exemplary embodiment, without being restricted to this, it is possible to combine a plurality of rows into a group, and control each group to emit a different color. Also, while the emit elements of three colors have been described in the exemplary embodiments, the principles 20 of the present invention are applicable to and the scope of the present invention includes pixel circuits having emit elements of two or more than three colors. These additional embodiments will not be described since those skilled in the art would understand them from the 25 above-noted descriptions.

[0090] Further, while the colors are mixed and emitted in the row direction and the column direction in the fifth exemplary embodiment, it is also possible to emit light with the same color in the column direction and emit light 30 with mixed colors in the row direction.

[0091] According to the exemplary embodiments of 35 the present invention, the configuration of elements used within the pixels and the wiring design for transmitting the current, voltages, and signals are simplified 40 since the emit elements of various colors on one pixel can be driven by common driving and switching transistors and capacitors, thereby improving the aperture ratio in the pixel. Further, the color separation phenomenon 45 is reduced or eliminated by emitting different colors for the respective rows in one subfield.

[0092] While this invention has been described in connection with certain exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended 50 to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

Claims**1. A display device comprising:**

a plurality of pixels arranged in rows and columns for displaying an image during a field having a plurality of subfields, each of the pixels comprising a plurality of light emitting elements having different colors; 5
 a plurality of select lines coupled to the pixels for applying a plurality of select signals, each of the select lines being coupled to a corresponding one of the rows of pixels to apply a corresponding one of the select signals thereto, wherein the select signals sequentially select the rows of pixels during each of the plurality of subfields; and 10
 a plurality of data lines for applying data signals to the pixels for the pixels on the same one of the rows to start emitting different color lights in each of the plurality of subfields, wherein, in one of the subfields, at least one of the pixels starts emitting light having a color which is different from a color of a light it starts emitting in another one of the subfields. 15

2. The display device of claim 1, wherein each of the light emitting elements emits red, green or blue light, and wherein the pixels on the same one of the rows concurrently start emitting the red, green and blue lights in each of the plurality of subfields. 20

3. The display device of claim 2, wherein the pixels on the same one of the columns sequentially start emitting the red, green and blue lights in each of the plurality of subfields. 25

4. The display device of claim 1, wherein white balance of the image is controlled by making emit periods of the light emitting elements having different colors to be different. 30

5. The display device of claim 1, further comprising a plurality of emit lines coupled to the rows of pixels for applying emit signals thereto, wherein a number of the emit lines coupled to each of the rows of pixels is the same as a number of the light emitting elements in each of the pixels. 35

6. The display device of claim 1, further comprising a plurality of emit lines coupled to the rows of pixels for applying emit signals thereto, wherein a number of the emit lines coupled to each of the rows of pixels is less than a number of the light emitting elements in each of the pixels by at least one. 40

7. A display device including a plurality of scan lines including a first scan line and a second scan line for 45

applying select signals, a plurality of data lines including a first data line and a second data line for applying data signals for displaying an image during a field having a plurality of subfields, and a plurality of pixel circuits coupled to the scan lines and the data lines, 5

wherein each of the pixel circuits comprises:

at least two emit elements for emitting light having different colors, 10
 wherein each of the emit elements emits light responsive to an applied current; 15
 a capacitor for storing a voltage corresponding to one of the data signals applied in response to one of the select signals; and
 a driving transistor for outputting the applied current corresponding to the voltage stored in the capacitor, and 20

wherein, in a first one of the subfields, one of the emit elements of a first color starts emitting light in a first pixel circuit of the pixel circuits, which is coupled to the first scan line and the first data line, one of the emit elements of a color which is different from the first color starts emitting light in a second pixel circuit of the pixel circuits, which is coupled to the first scan line and the second data line, one of the emit elements of a second color starts emitting light in a third pixel circuit of the pixel circuits, which is coupled to the second scan line and the first data line, and one of the emit elements of a color which is different from the second color starts emitting light in a fourth pixel circuit of the pixel circuits, which is coupled to the second scan line and the second data line. 25

8. The display device of claim 7, wherein each of the pixel circuits further comprises a switching transistor for applying one of the data signals provided by one of the data lines to the capacitor in response to one of the select signals provided by one of the scan lines. 30

9. The display device of claim 8, wherein each of the pixel circuits further comprises at least two emitting transistors coupled between the driving transistor and the emit elements, and one of the emit elements emits light in response to an operation of the emitting transistors. 35

10. The display device of claim 9, further comprising at least two emit signal lines which are respectively coupled to gates of the emitting transistors and apply control signals for controlling the operation of the emitting transistors, 40
 wherein one of the emitting transistors is turned on by one of the control signals applied through the emit signal lines and the applied current is applied 45

to one of the emit elements from the driving transistor.

11. The display device of claim 7, wherein, in a second one of the subfields, one of the emit elements of a third color which is different from the first color starts emitting light in the first pixel circuit, one of the emit elements of a color which is different from the third color starts emitting light in the second pixel circuit, one of the emit elements of another color which is different from the third color starts emitting light in the third pixel circuit, and one of the emit elements of a color which is different from said another color starts emitting light in the fourth pixel circuit.

12. The display device of claim 7, wherein the emit elements emit light at least once during the field.

13. The display device of claim 8, wherein the emit elements comprise an emit element of the first color, an emit element of the second color, and an emit element of a third color, and

wherein at least one of the pixel circuits further comprises a first emitting transistor coupled between the driving transistor and the emit element of the first color, a second emitting transistor coupled between the driving transistor and the emit element of the second color, and a third emitting transistor coupled between the driving transistor and the emit element of the third color.

14. The display device of claim 13, wherein, in a second one of the subfields, the emit element of the second color starts emitting light in the first pixel circuit, and one of the emit elements of a color which is different from the second color starts emitting light in the second pixel circuit, and

wherein, in a third one of the subfields, the emit element of the third color starts emitting light in the first pixel circuit, and one of the emit elements of a color which is different from the third color starts emitting light in the second pixel circuit.

15. The display device of claim 14, wherein the emit element of the third color starts emitting light in the third pixel circuit in the second one of the subfields, and

wherein the emit element of the first color starts emitting light in the third pixel circuit in the third one of the subfields.

16. The display device of claim 14, wherein one of the emit elements of a color which is different from colors of the emit elements which start emitting light in the first and second pixel circuits starts emitting light in a fifth pixel circuit of the pixel circuits, which is coupled to the first scan line and the third data line in the first, second and third ones of the sub-

fields.

17. The display device of claim 16, wherein one of the emit elements of a color which is different from colors of the emit elements which start emitting light in the first and third pixel circuits starts emitting light in a sixth pixel circuit of the pixel circuits, which is coupled to the third scan line and the first data line in the first, second and third ones of the subfields.

18. The display device of claim 13, wherein the emit element of the first color, the emit element of the second color and the emit element of the third color emit light at least once during the field.

19. A display device including a plurality of scan lines for applying select signals, a plurality of data lines for applying data signals for displaying an image during a field having a plurality of subfields, and a plurality of pixel circuits coupled to the scan lines and the data lines, ,

wherein each of the pixel circuits comprises:

at least two emit elements for emitting light having different colors,

wherein each of the emit elements emits light responsive to an applied current;

a switching transistor for applying one of the data signals corresponding to one of the emit elements in response to one of the select signals at least once during the field;

a capacitor for storing a voltage corresponding to the one of the data signals applied by the switching transistor;

a driving transistor for outputting the applied current corresponding to the voltage stored in the capacitor; and

a switch for selectively outputting the applied current provided by the driving transistor to one of the emit elements of a color which corresponds to the one of the data signals,

wherein, in a first one of the subfields, one of the data signals corresponding to one of the emit elements of a first color is applied to a data line of a first group including at least one of the data lines, and one of the data signals corresponding to one of the emit elements of a second color is applied to a data line of a second group including at least one of the data lines, when one of the select signals is applied to a scan line of a first group including at least one of the scan lines.

20. The display device of claim 19, wherein, in the first one of the subfields, one of the data signals corresponding to one of the emit elements of a third color is applied to a data line of a third group including at least one of the data lines when one of the select

signals is applied to the scan line of the first group including at least one of the scan lines.

21. The display device of claim 19, wherein, in the first one of the subfields, one of the data signals corresponding to one of the emit elements of a color which is different from the first color is applied to the data line of the first group including at least one of the data lines, and one of the data signals corresponding to one of the emit elements of a color which is different from the second color is applied to the data line of the second group including at least one of the data lines, when one of the select signals is applied to a scan line of a second group including at least one of the scan lines. 5

22. The display device of claim 19, wherein, in a second one of the subfields, one of the data signals corresponding to one of the emit elements of a color which is different from the first color is applied to the data line of the first group including at least one of the data lines, and one of the data signals corresponding to one of the emit elements of a color which is different from the second color is applied to the data line of the second group including at least one of the data lines, when one of the select signals is applied to the scan line of the first group including at least one of the scan lines. 10

23. The display device of claim 22, wherein the emit elements emit light at least once during the field. 15

24. In a display device including a plurality of pixel circuits arranged in rows and columns, wherein each of the pixel circuits comprises at least two emit elements for emitting light of different colors responsive to an applied current, and a transistor coupled to the emit elements supplies the applied current to one of the emit elements through at least one switch, a method of driving during a field having a plurality of subfields, comprising: 20

start emitting, in a first one of the subfields, one of the emit elements of a first color in a first pixel circuit provided on a row of a first row group including at least one of the rows and a column of a first column group including at least one of the columns; 25

start emitting, in the first one of the subfields, one of the emit elements of a second color which is different from the first color in a second pixel circuit provided on a row of the first row group and a column of a second column group including at least one of the columns; and 30

start emitting, in a second one of the subfields, the emit elements of colors in the first and second pixels circuits, respectively, which are different from the first and second colors, respec- 35

tively.

25. The method of claim 24, comprising: 40

start emitting, in the first one of the subfields, one of the emit elements of a third color which is different from the first color in a third pixel circuit provided on a row of a second row group including at least one of the rows and a column of the first group; and 45

start emitting, in the second one of the subfields, one of the emit elements of a color which is different from the third color in the third pixel circuit. 50

26. The method of claim 24, wherein the emit elements emit light at least once during the field. 55

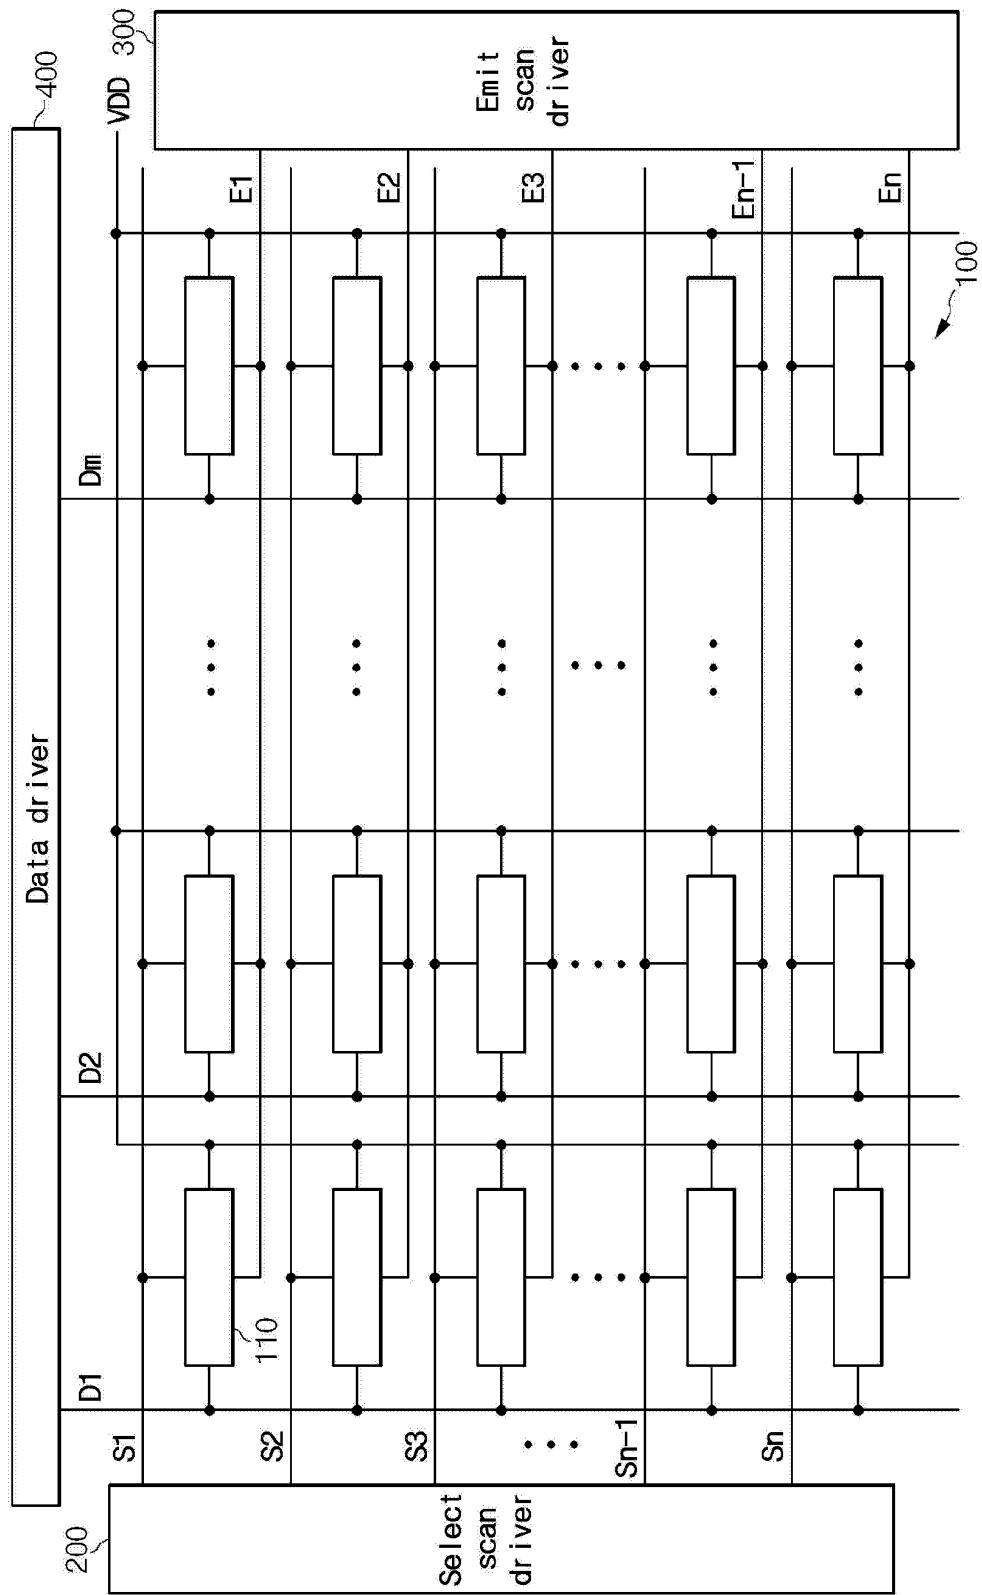
Fig. 1

Fig. 2

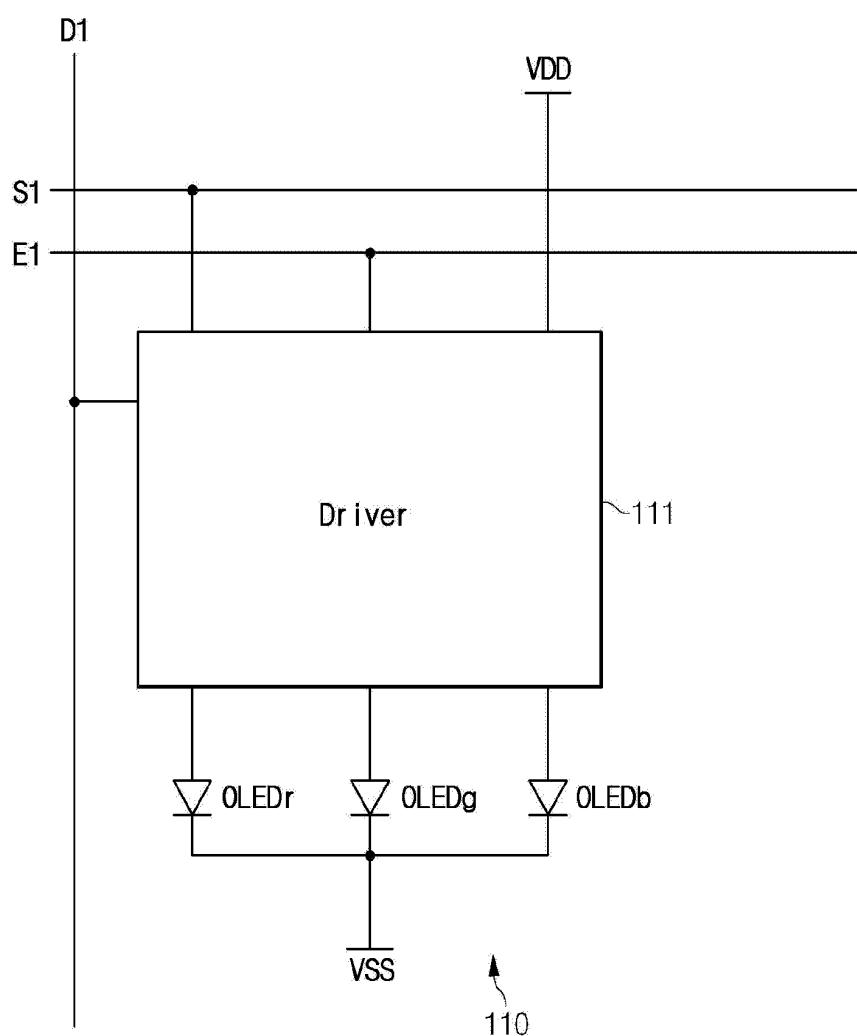


Fig. 3

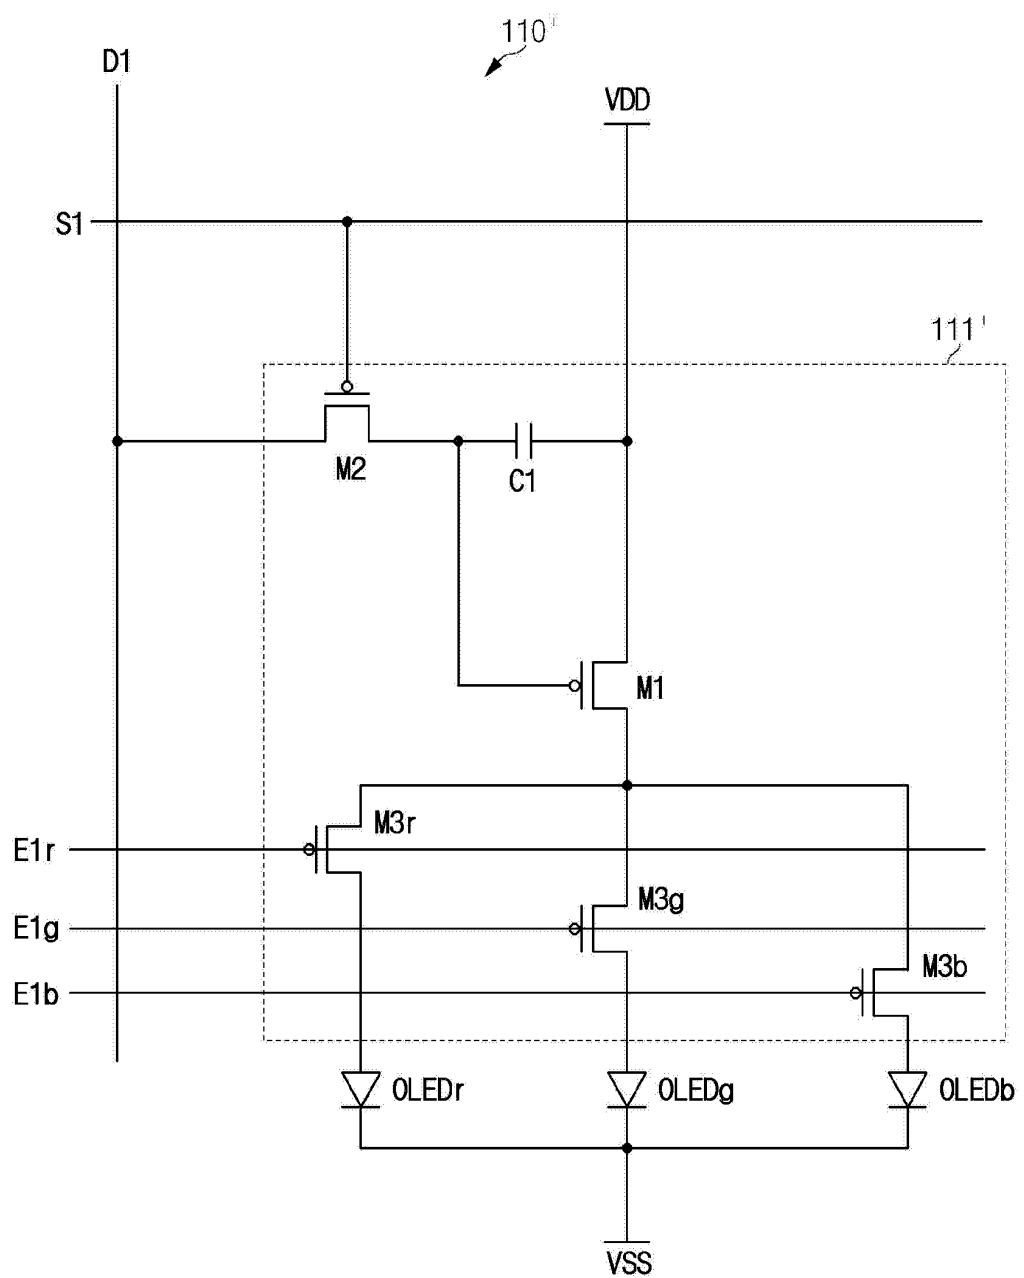


Fig. 4

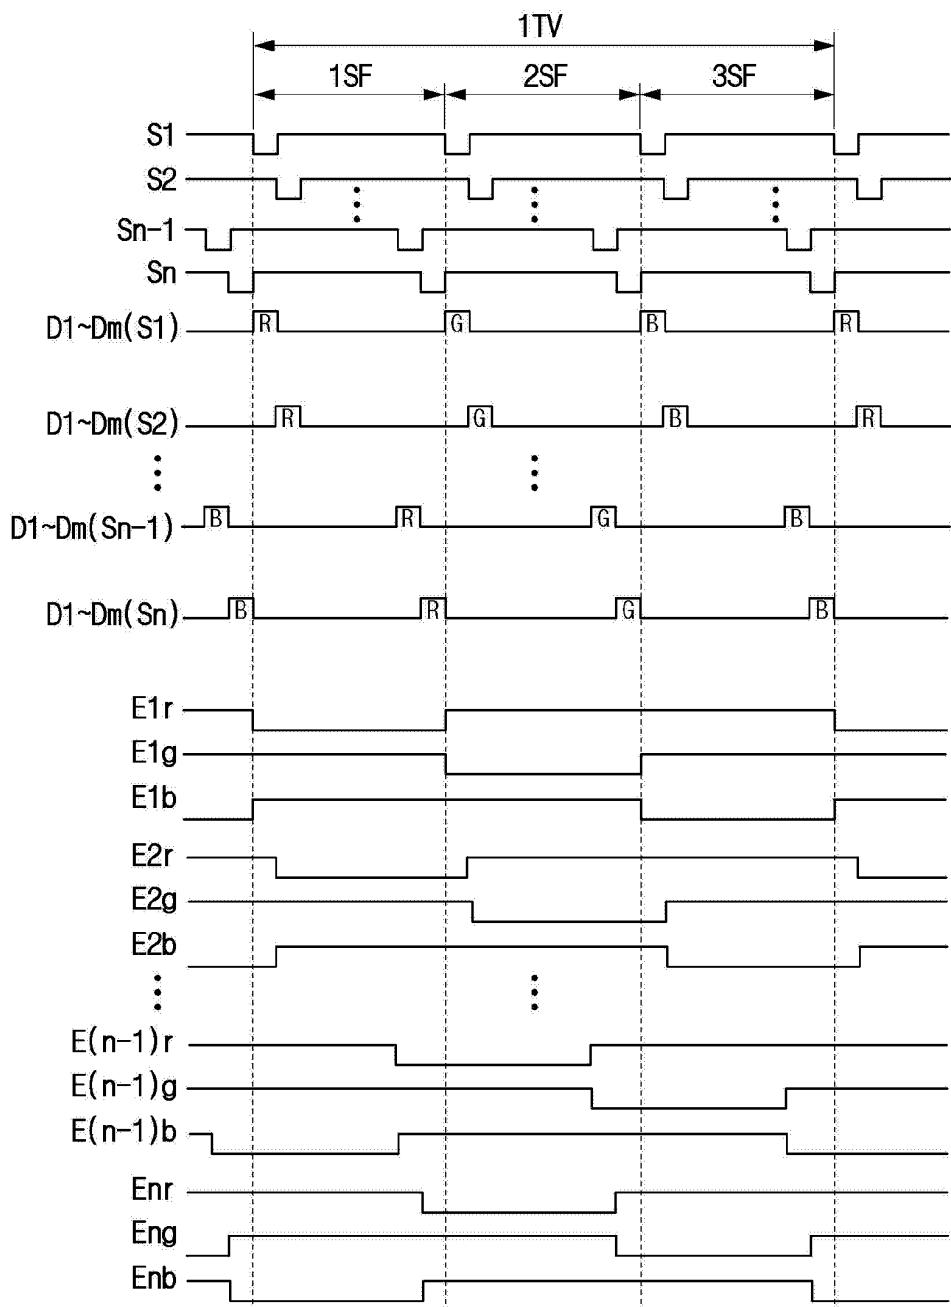


Fig. 5

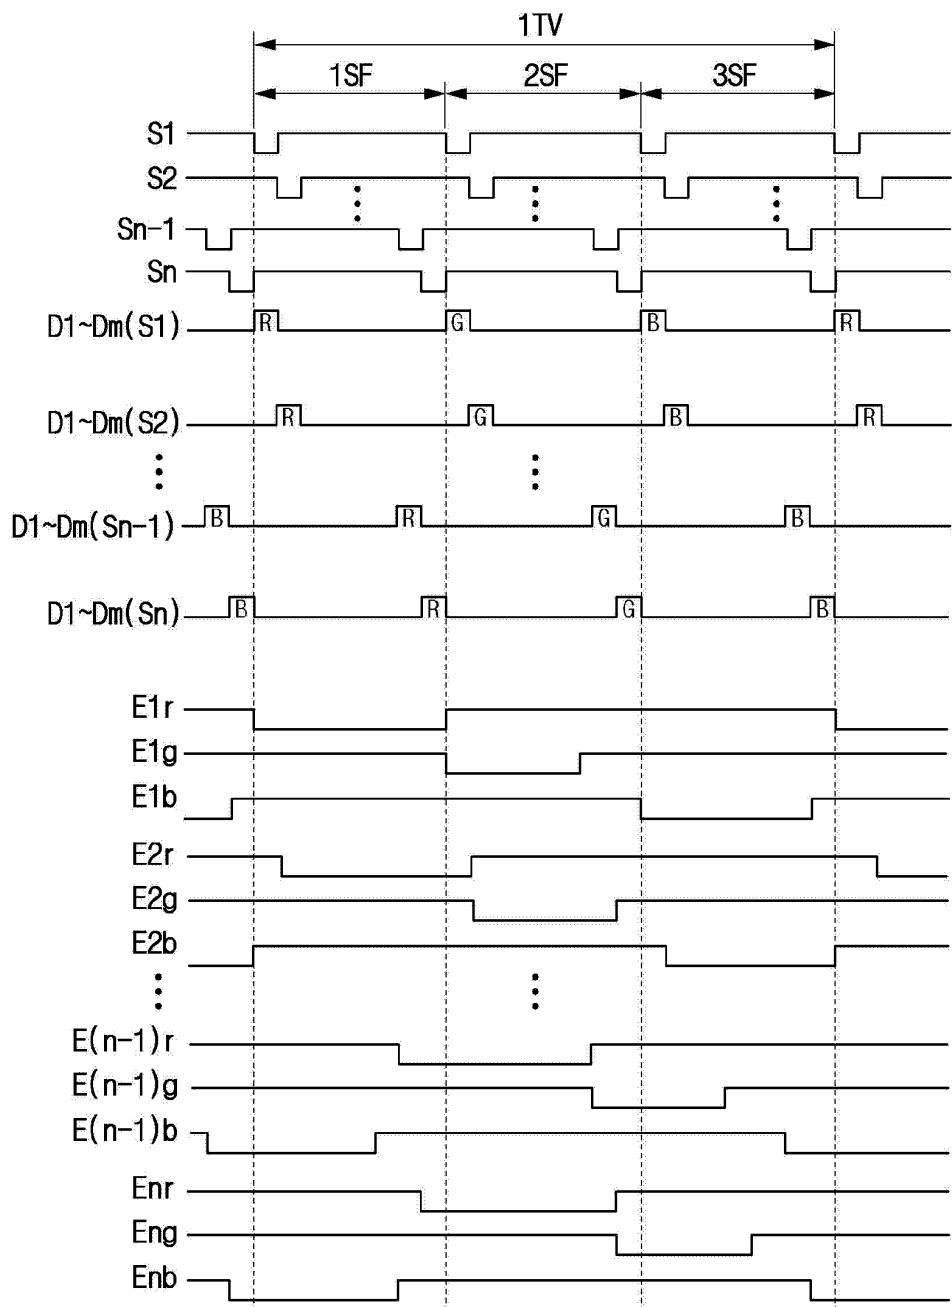


Fig. 6

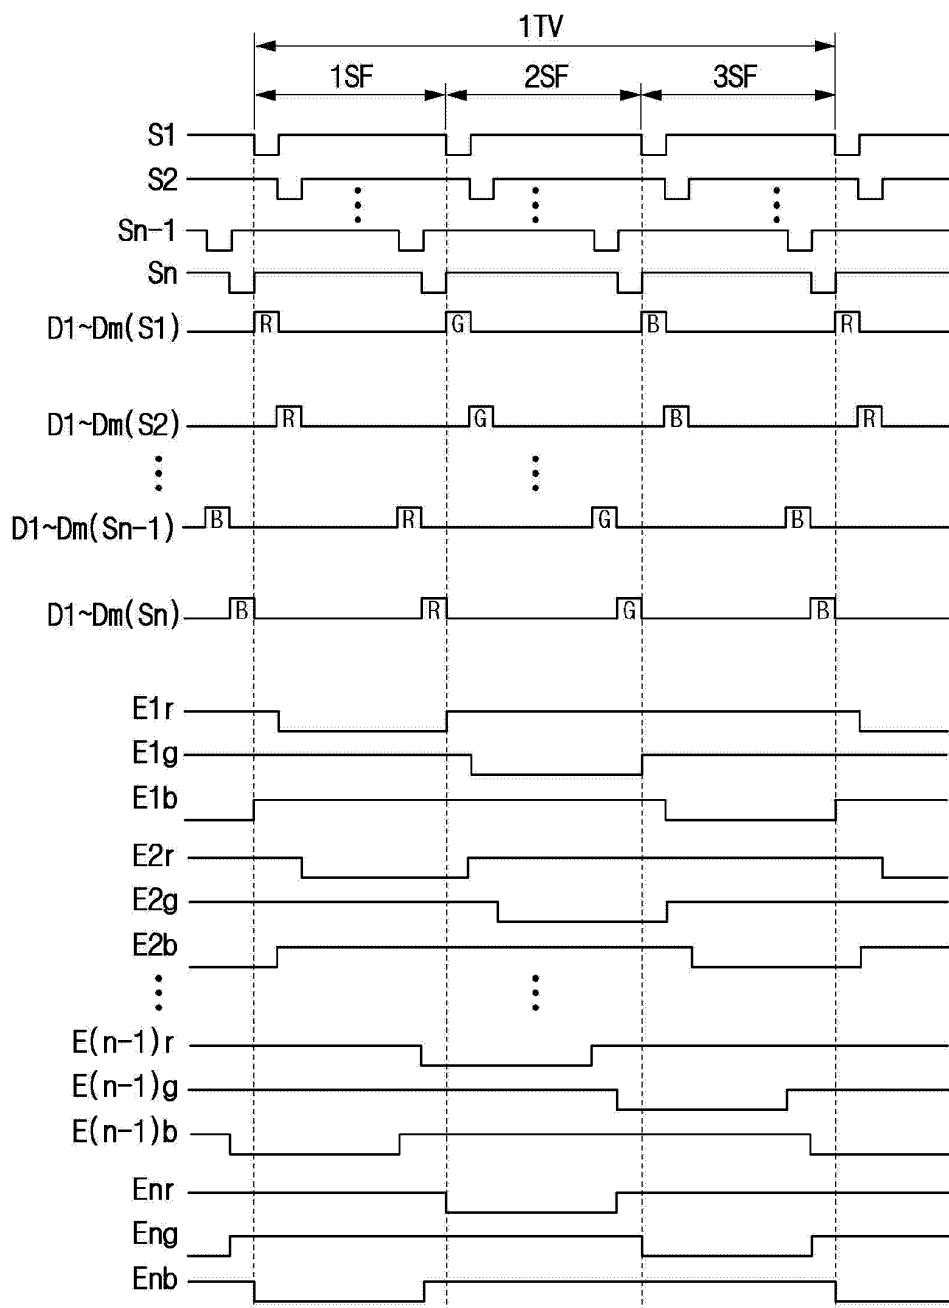


Fig. 7

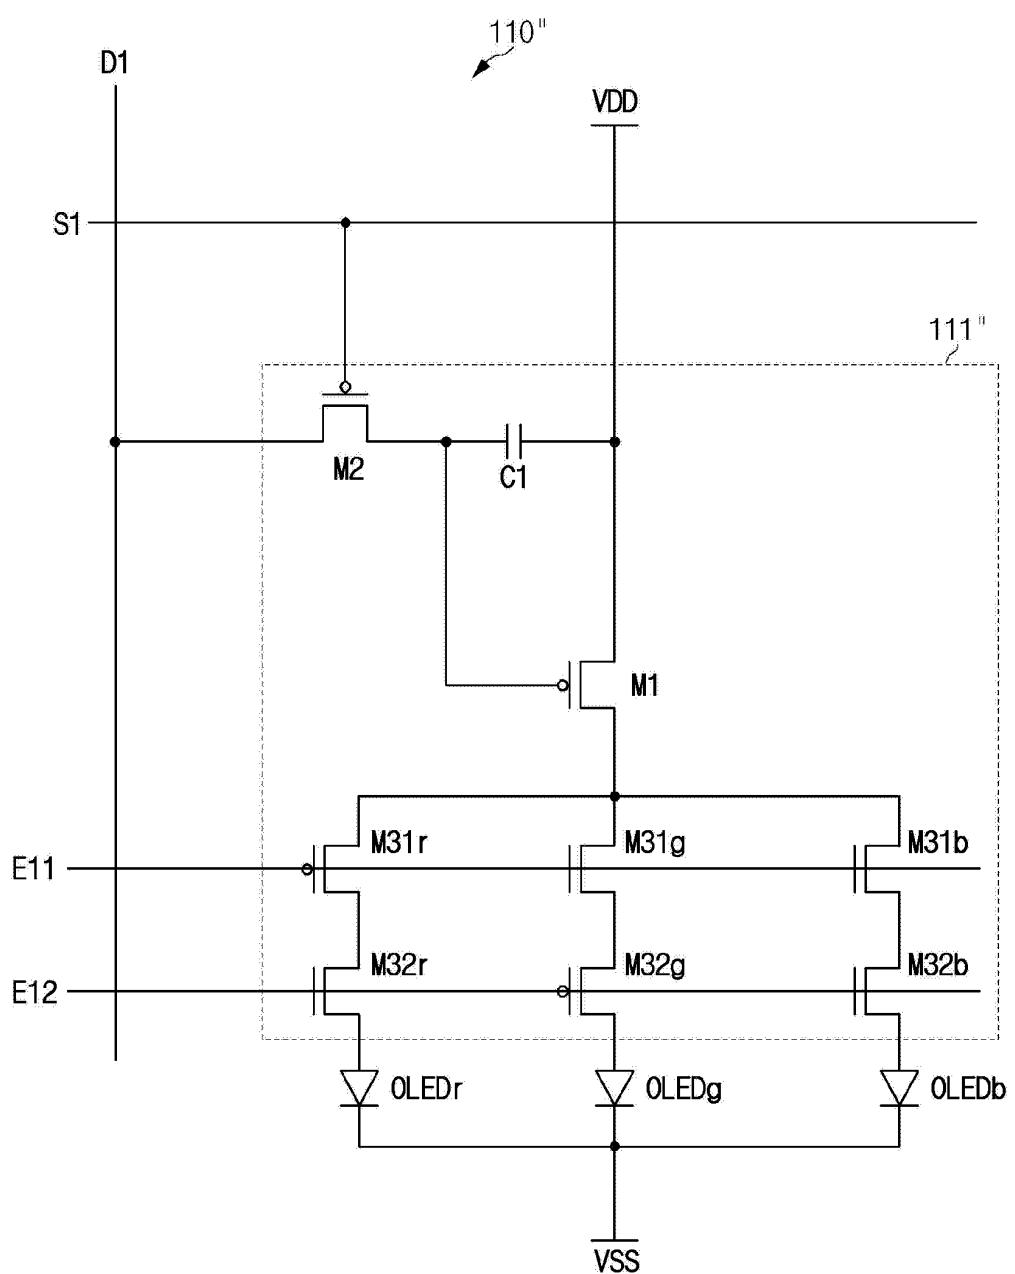


Fig. 8

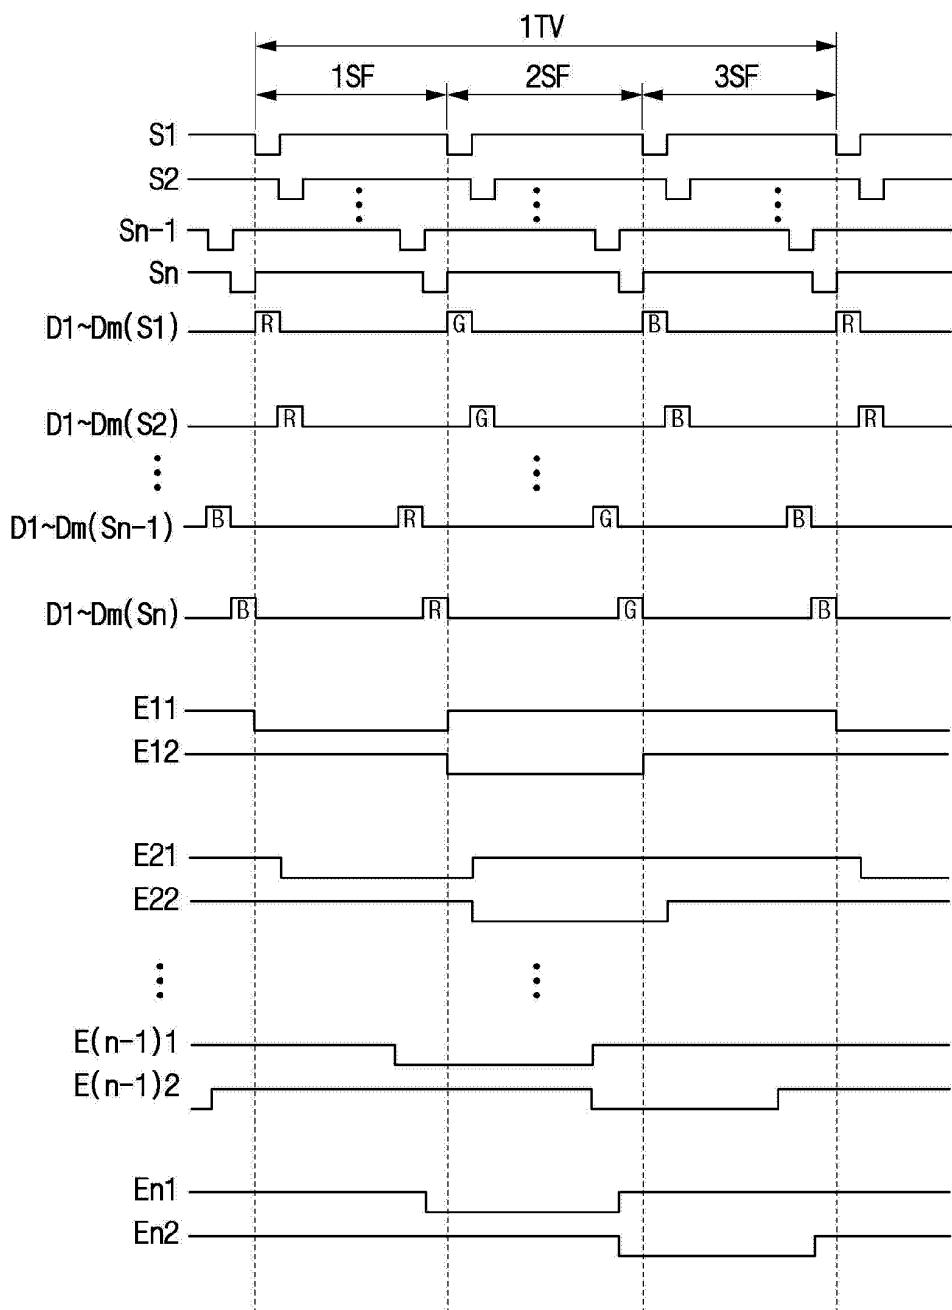


Fig. 9


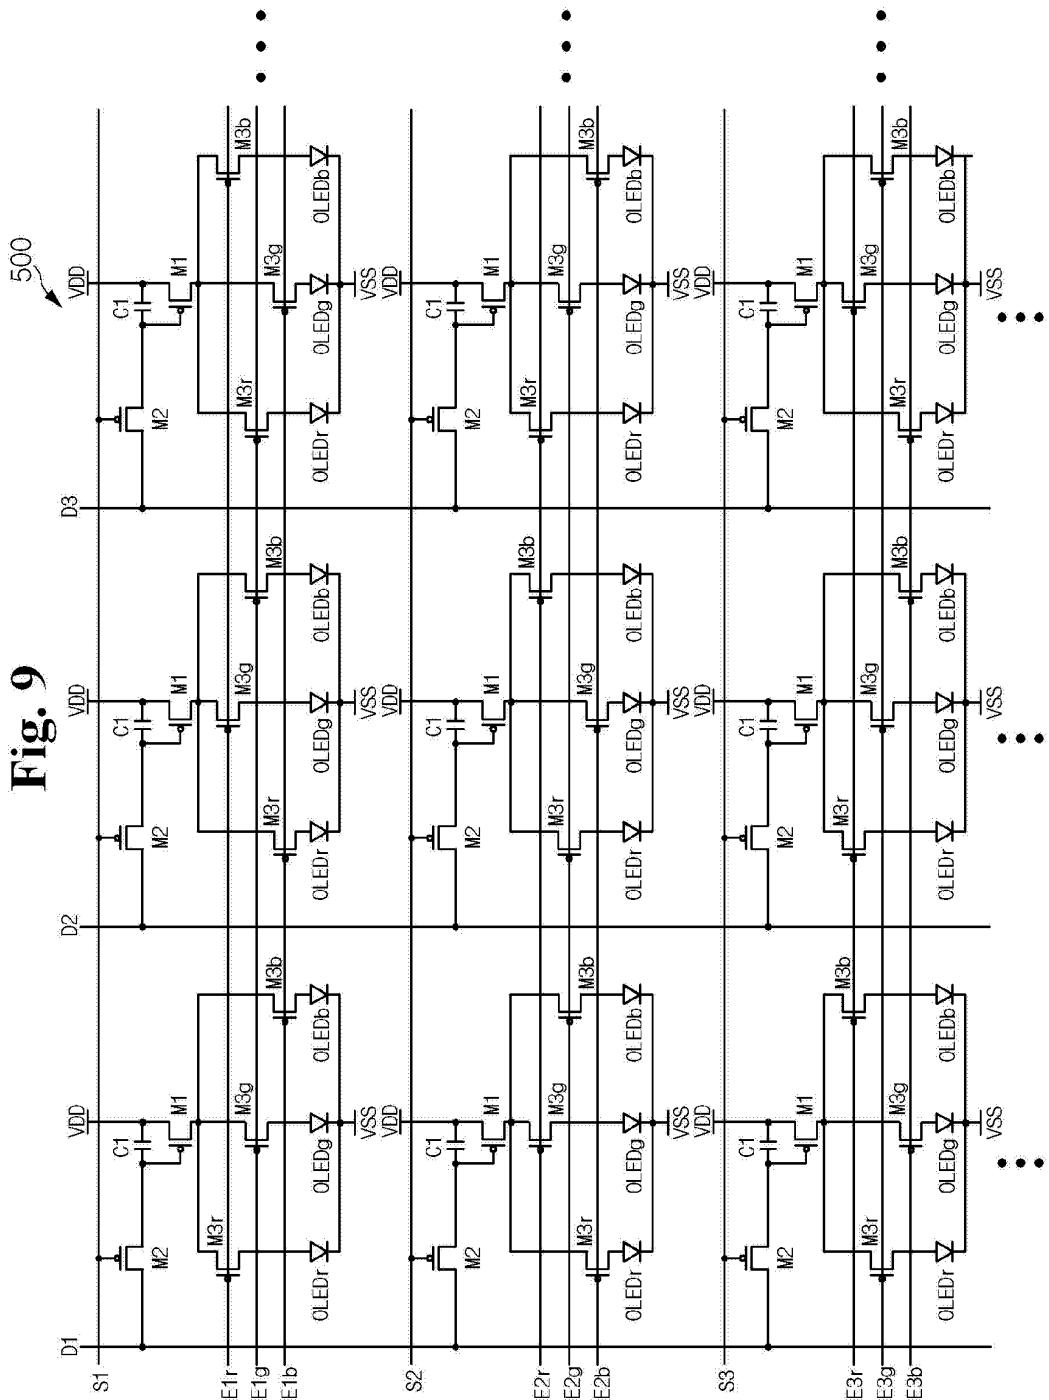


Fig. 10





DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	EP 0 762 374 A (MOTOROLA, INC) 12 March 1997 (1997-03-12) * figures 3,4 * * column 4, line 44 - column 6, line 49 * -----	1	G09G3/32 G09G5/02
E	EP 1 531 452 A (SAMSUNG SDI CO., LTD) 18 May 2005 (2005-05-18) * the whole document *	1	
X	US 2003/214493 A1 (AKIMOTO HAJIME ET AL) 20 November 2003 (2003-11-20) * paragraphs [0012], [0051] - [0065] * * figures 1-4,18 *	1-5	
X	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 09, 4 September 2002 (2002-09-04) -& JP 2002 149129 A (SHARP CORP), 24 May 2002 (2002-05-24) * abstract * * paragraphs [0016] - [0025]; figures 4,5 *	1,4,5	TECHNICAL FIELDS SEARCHED (Int.Cl.)
A	US 6 618 031 B1 (BOHN, JR. LOWELL F ET AL) 9 September 2003 (2003-09-09) * column 4, line 5 - column 5, line 34 * * column 6, lines 15-37 * * column 7, line 60 - column 8, line 17 * * figures 4,6 *	1-26	G09G
A	US 2002/043941 A1 (IKETSU YUICHI ET AL) 18 April 2002 (2002-04-18) * figure 4 *	1-5	
		-/-	
1	The present search report has been drawn up for all claims		
	Place of search	Date of completion of the search	Examiner
	The Hague	2 June 2005	van Wesenbeeck, R
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone	T : theory or principle underlying the invention		
Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date		
A : technological background	D : document cited in the application		
O : non-written disclosure	L : document cited for other reasons		
P : intermediate document	& : member of the same patent family, corresponding document		

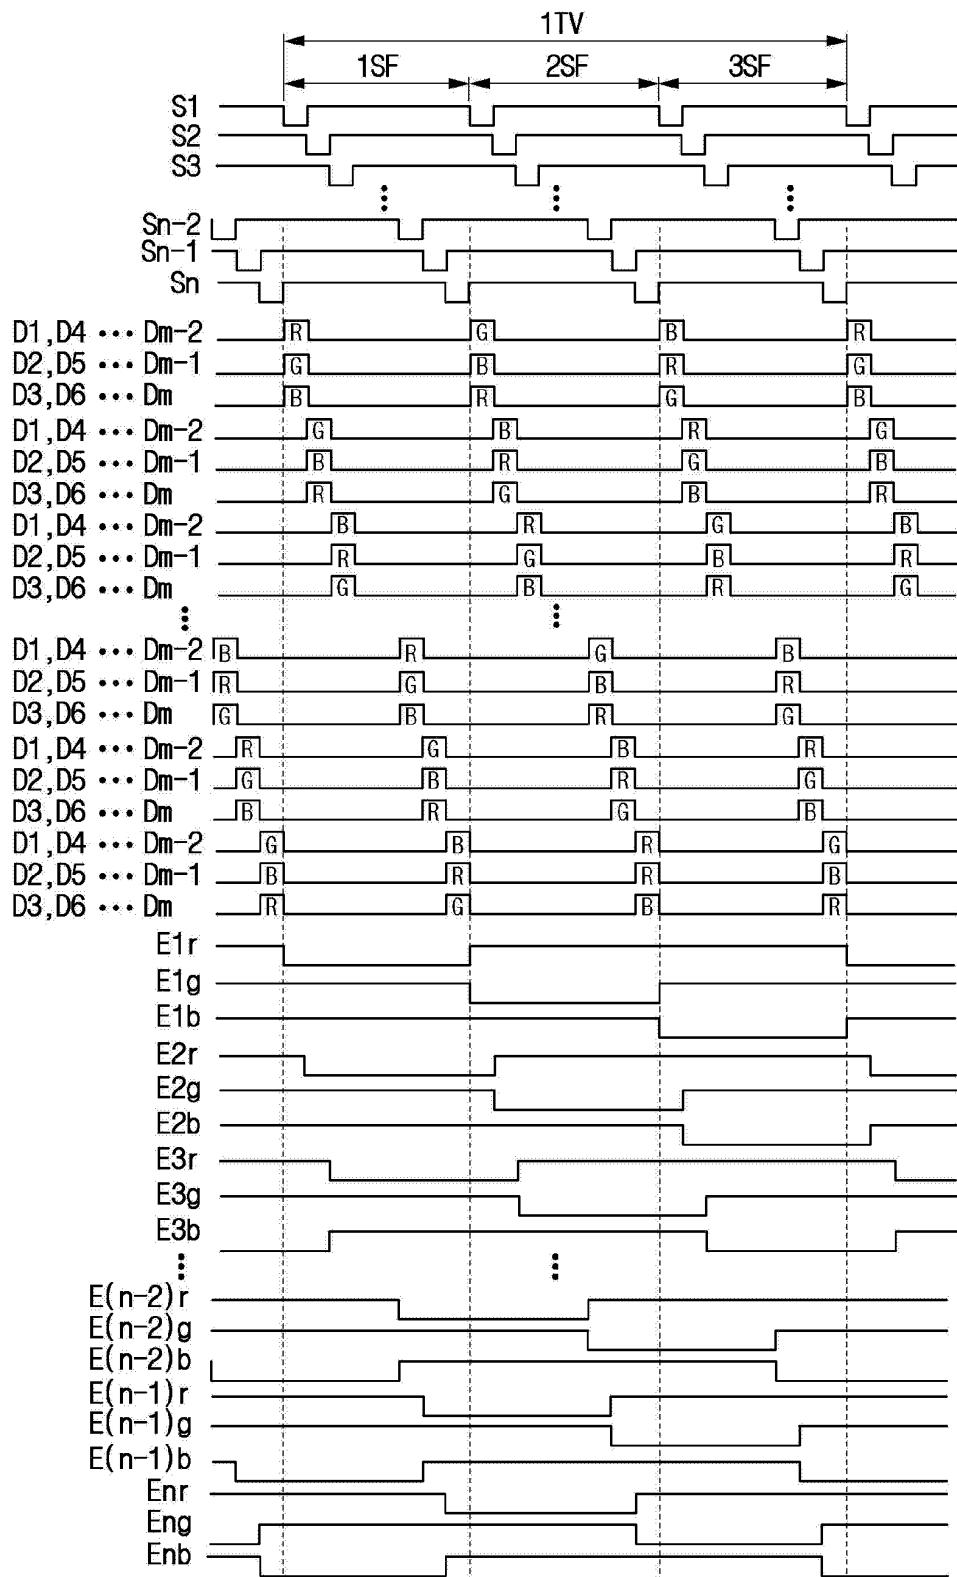

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 03, 31 March 1999 (1999-03-31) -& JP 10 333639 A (MATSUSHITA ELECTRIC IND CO LTD), 18 December 1998 (1998-12-18) * abstract * * figure 4 * -----	4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
1	The present search report has been drawn up for all claims		
	Place of search	Date of completion of the search	Examiner
	The Hague	2 June 2005	van Wesenbeeck, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
EPO FORM 1503.03.82 (P04C01) X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing more than ten claims.

Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):

No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-6

number of emit lines coupled to each row of pixels is less
than the number of light emitting elements in each pixel

2. claims: 7-26

From different pixel circuits, light emitting elements
emitting different colours of light are selected within the
same subfield

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 05 10 0524

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-06-2005

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 0762374	A	12-03-1997	US	5748160 A	05-05-1998	
			EP	0762374 A1	12-03-1997	
			JP	9138659 A	27-05-1997	
EP 1531452	A	18-05-2005	EP	1531452 A1	18-05-2005	
			US	2005104875 A1	19-05-2005	
US 2003214493	A1	20-11-2003	JP	2003330422 A	19-11-2003	
			CN	1514426 A	21-07-2004	
			TW	594639 B	21-06-2004	
JP 2002149129	A	24-05-2002		NONE		
US 6618031	B1	09-09-2003	AU	3381800 A	14-09-2000	
			WO	0051103 A1	31-08-2000	
US 2002043941	A1	18-04-2002	DE	10150836 A1	23-05-2002	
			JP	3548844 B2	28-07-2004	
			JP	2002198174 A	12-07-2002	
JP 10333639	A	18-12-1998		NONE		

专利名称(译)	彩色显示器，分时驱动子像素		
公开(公告)号	EP1577871A1	公开(公告)日	2005-09-21
申请号	EP2005100524	申请日	2005-01-27
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星SDI CO. , LTD.		
[标]发明人	KWAK WON KYU LEGAL & IP TEAM SAMSUNG SDI CO		
发明人	KWAK, WON-KYU, LEGAL & IP TEAM, SAMSUNG SDI CO.,		
IPC分类号	H05B33/12 G09G3/20 G09G3/30 G09G3/32 G09G5/02 H01L51/50		
CPC分类号	G09G3/3233 G09G2300/0452 G09G2300/0804 G09G2300/0814 G09G2300/0842 G09G2300/0861 G09G2310/0235 G09G2320/0247 G09G2320/0261 G09G2320/0606 G09G2320/0666		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020040017310 2004-03-15 KR		
其他公开文献	EP1577871B1		
外部链接	Espacenet		

摘要(译)

形成在有机EL显示器中的像素上的红色，绿色和蓝色有机电致发光(EL)元件由驱动晶体管驱动。电容器耦合在驱动晶体管的栅极和源极之间，以将电压保持预定时间。发射控制晶体管分别耦合在驱动晶体管和红色，绿色和蓝色有机EL元件之间。一个场被分成三个子场，并且每个像素中的红色，绿色和蓝色有机EL元件之一开始在每个子场中发光，从而表示全色屏幕。红色，绿色和蓝色在场的每个子场中在行方向和列方向上混合并发射。

Fig. 2

