



(11)

EP 1 606 848 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:  
**08.08.2012 Bulletin 2012/32**

(21) Application number: **04722655.0**(22) Date of filing: **23.03.2004**

(51) Int Cl.:  
**H01L 51/52 (2006.01)**

(86) International application number:  
**PCT/JP2004/003949**

(87) International publication number:  
**WO 2004/086531 (07.10.2004 Gazette 2004/41)**

(54) **LIGHT-EMITTING DEVICE, METHOD OF MANUFACTURING THE SAME, AND DISPLAY UNIT**

LICHTEMITTIERENDE VORRICHTUNG, VERFAHREN ZU DEREN HERSTELLUNG, UND ANZEIGEVORRICHTUNG

Dispositif émettant de la lumière, son procédé de fabrication et afficheur

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **26.03.2003 JP 2003085868**  
**29.05.2003 JP 2003153053**  
**22.08.2003 JP 2003299258**

(43) Date of publication of application:  
**21.12.2005 Bulletin 2005/51**

(73) Proprietor: **Sony Corporation**  
**Tokyo 141-0001 (JP)**

(72) Inventors:  

- **YOKOYAMA, Seiichi**  
Shinagawa-ku, Tokyo 141-0001 (JP)
- **HANAWA, Koji**  
Shinagawa-ku, Tokyo 141-0001 (JP)
- **SHIBASAKI, Takanori**  
Shinagawa-ku, Tokyo 141-0001 (JP)

• **HIRANO, Takashi**  
Shinagawa-ku, Tokyo 141-0001 (JP)

(74) Representative: **Körber, Martin Hans**  
**Mitscherlich & Partner**  
**Patent- und Rechtsanwälte**  
**Postfach 33 06 09**  
**80066 München (DE)**

(56) References cited:  

<b>WO-A-03/005115</b>	<b>WO-A-03/022011</b>
<b>US-A- 6 081 310</b>	<b>US-A1- 2002 117 962</b>

- **PATENT ABSTRACTS OF JAPAN** vol. 2000, no. 16, 8 May 2001 (2001-05-08) -& JP 2001 004993 A (TOPPAN PRINTING CO LTD), 12 January 2001 (2001-01-12)
- **PATENT ABSTRACTS OF JAPAN** vol. 2002, no. 12, 12 December 2002 (2002-12-12) -& JP 2002 246185 A (VICTOR CO OF JAPAN LTD), 30 August 2002 (2002-08-30)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### TECHNICAL FIELD

**[0001]** The present invention relates to a light-emitting device reflecting light generated in a light-emitting layer by a first electrode to extract the light from a second electrode side, a method of manufacturing the light-emitting device, and a display unit using the light-emitting device.

### BACKGROUND ART

**[0002]** In recent years, as one of flat panel displays, an organic light-emitting display using an organic light-emitting device has become a focus of attention. The organic light-emitting display is of a self-luminous type, so it is considered that the organic light-emitting display has advantages of a wide viewing angle, low power consumption and adequate response to high-definition high-speed video signals. Therefore, the development of the organic light-emitting displays toward practical utilization has been proceeding.

**[0003]** As the organic light-emitting device, for example, a laminate comprising a first electrode, an organic layer including a light-emitting layer, and a second electrode with a TFT (thin film transistor), a planarizing layer and the like in between in order on a substrate is known. Light generated in the light-emitting layer may be extracted from the substrate side or the second electrode side.

**[0004]** As an electrode where light is extracted, in many cases, a transparent electrode made of an electrically conductive material with transparency such as a compound including indium (In), tin (Sn) and oxygen (O) (ITO; indium tin oxide) is used. Various structures of the transparent electrode have previously been proposed. For example, in order to prevent an increase in cost due to an increase in the thickness of an ITO film, a transparent electrode including a laminate of a metal thin film made of silver (Ag) or the like and a high refractive index film made of zinc oxide (ZnO) or the like has been proposed (for example, refer to Japanese Unexamined Patent Application Publication No. 2002-334792). In the transparent electrode, the high refractive index film has a thickness of 5 nm to 350 nm, and the metal thin film has a thickness of 1 nm to 50 nm, so the high refractive index film is relatively thicker than the metal thin film, thereby the transparency of the transparent electrode is increased, and reflection by a surface of the metal thin film can be reduced by the high refractive index film.

**[0005]** In many cases, as an electrode where light is not extracted, various metal electrodes are used. For example, when light is extracted from the second electrode side, the first electrode as an anode is made of, for example, a metal such as chromium (Cr). Conventionally, for example, a first electrode with two-layer structure including a metallic material layer made of chromium and a buffer thin film layer made of an oxide including chromium has been proposed, thereby the surface roughness

of chromium of the metallic material layer is reduced by the buffer thin film layer (for example, refer to Japanese Unexamined Patent Application Publication No. 2002-216976).

**[0006]** When light is extracted from the second electrode side, light generated in the light-emitting layer may be directly extracted through the second electrode, or may be reflected by the first electrode once to be emitted through the second electrode. Conventionally, the first electrode is made of chromium or the like, so there is a problem that the light absorptance of the first electrode is large, thereby a loss of light reflected by the first electrode to be extracted is large. The light absorptance of the first electrode has a large influence on the organic light-emitting device, so when the light-emitting efficiency is lower, a larger amount of current is required in order to obtain the same intensity. An increase in the amount of drive current has a large influence on the life of the organic light-emitting device which is extremely important for practical use of the organic light-emitting device.

**[0007]** Therefore, for example, it is considered that the first electrode is made of silver (Ag) with the highest reflectance among metals or an alloy including silver. However, silver has properties such that its reactivity is extremely high, it is difficult to be processed, and its adhesion is low. Therefore, in order to achieve a chemically stable first electrode with high reflectance through making full use of advantages of silver, the structure and the manufacturing process of the first electrode are susceptible to further improvement.

**[0008]** JP 2001-004993 A, JP 2002-246185 A, WO 03/005115 A1, US-A-2002/0117962, US-A-6081310 and WO 03/022011 A disclose related light-emitting devices and methods of manufacturing such devices.

### DISCLOSURE OF THE INVENTION

**[0009]** In view of the foregoing, it is an object of the invention to provide a light-emitting device capable of preventing separation or alteration of a first electrode to obtain high performance, a method of manufacturing the light-emitting device, and a display unit.

**[0010]** A light-emitting device according to the invention is defined in claim 1.

**[0011]** A method of manufacturing a light-emitting device according to the invention is defined in claim 10.

**[0012]** A display unit according to the invention is defined in claim 9.

**[0013]** In the light-emitting device according to the invention and the display unit according to the invention, the first electrode includes the adhesive layer disposed in contact with the base layer, the reflective layer reflecting the light generated in the light-emitting layer, and the barrier layer protecting the reflective layer, so alteration of the reflective layer can be prevented by the barrier layer, and the reflective layer can be prevented from being separated from the base layer by the adhesive layer, thereby the possibility that the alteration of the reflective

layer from a separated portion thereof can be eliminated. Therefore, it is suitable specifically in the case of the invention where the reflective layer is made of silver (Ag) or an alloy including silver.

**[0014]** In the method of manufacturing a light-emitting device according to the invention, after the adhesive layer, the reflective layer and the barrier layer are formed in order on the base layer, the barrier layer, the reflective layer and the adhesive layer are patterned in order from the barrier layer to form the first electrode. Next, the layer including the light-emitting layer is formed on the first electrode, and then the second electrode is formed on the layer.

**[0015]** In the light-emitting device according to the invention or the display unit according to the invention, the first electrode has a structure in which the adhesive layer, the reflective layer and the barrier layer are laminated, so separation or alteration of the reflective layer can be prevented, thereby the occurrence of a short circuit between the first electrode and the second electrode due to the alteration of the reflective layer can be prevented. Therefore, it is suitable specifically in the case of the invention where the reflective layer is made of silver (Ag) or an alloy including silver, and defects in the display unit can be reduced, and the life of the display unit can be extended.

**[0016]** In the method of manufacturing a light-emitting device according to the invention, after the adhesive layer, the reflective layer and the barrier layer are formed on the base layer, they are patterned in order from the barrier layer to form the first electrode, so the material of the reflective layer can be prevented from reacting with oxygen or sulfur in air, and damage on the reflective layer in a manufacturing step after forming the reflective layer can be reduced. Moreover, the reflective layer can be prevented from being separated from the base layer by the adhesive layer, thereby an adverse effect on the reflective layer by air or a chemical solution entered into a separated portion of the reflective layer can be prevented.

**[0017]** Other and further objects, features and advantages of the invention will appear more fully from the following description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

##### **[0018]**

FIG. 1 is a sectional view of a display unit, not being part of the invention

FIG. 2 is an enlarged sectional view of an organic light-emitting device shown in FIG. 1;

FIG. 3 is an enlarged sectional view of the organic light-emitting device shown in FIG. 1;

FIGs. 4A and 4B are sectional views for showing steps in a method of manufacturing the display unit shown in FIG. 1;

FIGs. 5A, 5B and 5C are sectional views for showing

steps following the steps in FIGs. 4A and 4B; FIGs. 6A and 6B are sectional views for showing steps following the steps in FIGs. 5A through 5C; FIGs. 7A and 7B are sectional views for showing steps following the steps in FIG. 6A and 6B; FIG. 8 is a sectional view for showing a step following the steps in FIGs. 7A and 7B; FIG. 9 is a sectional view for showing a step following the step in FIG. 8; FIG. 10 is a sectional view for showing a step following the step in FIG. 9; FIG. 11 is a sectional view for showing a step following the step in FIG. 10; FIGs. 12A and 12B are sectional views for showing steps following the step in FIG. 11; FIG. 13 is a sectional view for showing a step following the steps in FIGs. 12A and 12B; FIG. 14 is a sectional view of a display unit according to the invention; FIG. 15 is an enlarged sectional view of an organic light-emitting device shown in FIG. 14; FIG. 16 is an enlarged sectional view of the organic light-emitting device shown in FIG. 14; FIG. 17 is a graph showing reflectance of a first electrode of an organic light-emitting device according to an example of the invention; FIG. 18 is a sectional view of a first electrode of an organic light-emitting device according to a reference example of the invention; FIG. 19 is a graph of reflectance of the first electrode according to the reference example shown in FIG. 18; and FIGs. 20A and 20B are sectional views for showing modification of the steps shown in FIGs. 6A and 6B.

#### BEST MODE FOR CARRYING OUT THE INVENTION

**[0019]** The present invention will be described in more detail below referring to the accompanying drawings.

**[0020]** FIG. 1 shows a sectional view of a display unit Example, not being part of the invention, given for the comprehension of the invention. The display unit is used as an ultra-thin organic light-emitting display, and in the display unit, for example, a drive panel 10 and a sealing panel 20 faces each other, and the whole facing surfaces thereof are bonded together with an adhesive layer 30 made of a thermosetting resin. The drive panel 10 includes an organic light-emitting device 10R emitting red light, an organic light-emitting device 10G emitting green light and an organic light-emitting device 10B emitting blue light disposed in order in a matrix shape as a whole on a substrate 11 made of, for example, an insulating material such as glass with a TFT 12 and a planarizing layer 13 in between.

**[0021]** A gate electrode (not shown) of the TFT 12 is connected to a scanning circuit (not shown), and a source and a drain (both not shown) are connected to a wiring 12B through an interlayer insulating film 12A made of,

for example, silicon oxide, PSG (phosphosilicate glass) or the like. The wiring 12B is connected to the source and the drain of the TFT 12 through a connecting hole (not shown) disposed in the interlayer insulating film 12A to function as a signal line. The wiring 12B is made of, for example, aluminum (Al) or an aluminum (Al)-copper (Cu) alloy. The structure of the TFT 12 is not specifically limited; and may be of a bottom gate structure or a top gate structure.

**[0022]** The planarizing layer 13 is a base layer for planarizing a surface of the substrate 11 where the TFT 12 is formed so as to form the organic light-emitting devices 10R, 10G and 10B with uniform thicknesses. In the planarizing layer 13, a connecting hole 13A is disposed to connect a first electrode 14 of each of the organic light-emitting devices 10R, 10G and 10B to the wiring 12B. In the planarizing layer 13, a minute connecting hole 13A is formed, so the planarizing layer 13 is preferably made of a material with high pattern accuracy. As the material of the planarizing layer 13, an organic material such as polyimide or an inorganic material such as silicon oxide ( $\text{SiO}_2$ ) can be used. The planarizing layer 13 is made of, for example, an organic material such as polyimide.

**[0023]** The organic light-emitting devices 10R, 10G and 10B each include, for example, the first electrode 14 as an anode, an insulating film 15, an organic layer 16 including a light-emitting layer and a second electrode 17 as a cathode laminated in order from the substrate 11 with the planarizing layer 13 as a base layer in between. A protective film 18 is formed on the second electrode 17 if necessary.

**[0024]** The first electrode 14 also has a function as a reflective layer, so the first electrode 14 preferably has as high reflectance as possible so as to enhance light-emitting efficiency. The first electrode 14 has a structure in which an adhesive layer 14A, a reflective layer 14B and a barrier layer 14C are laminated in order from the substrate 11. The adhesive layer 14A is disposed in contact with the planarizing layer 13 to prevent the reflective layer 14B from being separated from the planarizing layer 13. The reflective layer 14B reflects light generated in the light-emitting layer. The barrier layer 14C protects the reflective layer 14B.

**[0025]** The adhesive layer 14A is preferably made of, for example, a metal, an electrically conductive oxide or a metal compound including at least one kind selected from the group of metal elements consisting of chromium (Cr), indium (In), tin (Sn), zinc (Zn), cadmium (Cd), titanium (Ti), aluminum (Al), magnesium (Mg) and molybdenum (Mo), because these materials have high electrical conductivity, so a good electrical connection to the wiring 12B can be established. The adhesive layer 14A is made of, for example, chromium.

**[0026]** The adhesive layer 14A preferably has as large a thickness in a laminate direction (hereinafter simply referred to "thickness") as light does not pass therethrough. More specifically, when the adhesive layer 14A is made of chromium, the adhesive layer 14A preferably

has a thickness of 40 nm to 300 nm, and more preferably 50 nm to 150 nm.

**[0027]** The reflective layer 14B is made of silver or an alloy including silver, because silver has the highest reflectance among metals, so an absorption loss of light in the reflective layer 14B can be reduced. Moreover, the reflective layer 14B made of silver is preferable, because the reflective layer 14B has the highest reflectance however, the reflective layer 14B made of an alloy including silver and another metal is more preferable, because chemical stability and processing accuracy can be enhanced, and adhesion with the adhesive layer 14A and the barrier layer 14C can be improved. Silver has extremely high reactivity, low processing accuracy and low adhesion, so it is extremely difficult to handle silver.

**[0028]** Examples of the alloy including silver of the reflective layer 14B include alloys including silver (Ag) and at least one element selected from the group consisting of neodymium (Nd), samarium (Sm), yttrium (Y), cerium (Ce), europium (Eu), gadolinium (Gd), terbium (Tb), dysprosium (Dy), erbium (Er), ytterbium (Yb), scandium (Sc), ruthenium (Ru), copper (Cu) and gold (Au). More specifically, a AgSmCu alloy including silver (Ag), samarium (Sm) and copper (Cu) is cited, and an alloy including silver (Ag) as a main component, 0.03 % by mass to 0.5 % by mass inclusive of samarium (Sm) and 0.2 % by mass to 1.0 % by mass inclusive of copper (Cu) is preferable. Moreover, an alloy including silver (Ag) as a main component, 0.05 % by mass to 0.2 % by mass inclusive of samarium (Sm) and 0.2 % by mass to 1.0 % by mass inclusive of copper (Cu) is more preferable.

**[0029]** The thickness of the reflective layer 14B is preferably within a range of, for example, 50 nm to 300 nm inclusive. It is because when the thickness is within the range, adhesion can be secured, thereby the separation of the first electrode 14 can be prevented. Further, the thickness of the reflective layer 14B is more preferably within a range of 50 nm to 150 nm inclusive. It is because when the thickness of the reflective layer 14B is reduced, the surface roughness of the reflective layer 14B can be reduced, thereby the thickness of the barrier layer 14C can be reduced to increase light extraction efficiency. Moreover, it is because when the thickness of the reflective layer 14B is reduced, an increase in the surface roughness due to crystallization of the reflective layer 14B by heat processing during manufacturing can be reduced, thereby an increase in defects of the barrier layer 14C due to the increased surface roughness of the reflective layer 14B can be prevented.

**[0030]** The barrier layer 14C has functions of preventing silver or an alloy including silver of the reflective layer 14B from reacting with oxygen or sulfur in air, and reducing damage on the reflective layer 14B during a manufacturing step after forming the reflective layer 14B. More specifically, it is considered that the damage herein is caused by a chemical solution or the like used to form an aperture portion 15A of the insulating film 15 which will be described later. Further, the barrier layer 14C also

has a function as a work function adjustment layer which enhances efficiency of hole injection into the organic layer 16, so the barrier layer 14C is preferably made of a material having a higher work function than the reflective layer 14B.

**[0031]** The barrier layer 14C is preferably a light transparent film made of, for example, a metal, an oxide or a metal compound including at least one kind selected from the group of metal elements consisting of indium (In), tin (Sn), zinc (Zn), cadmium (Cd), titanium (Ti), chromium (Cr), gallium (Ga) and aluminum (Al). More specifically, the barrier layer 14C is preferably made of at least one kind selected from the group consisting of a compound including indium (In), tin (Sn) and oxygen (O) (ITO; indium tin oxide), a compound including indium (In), zinc (Zn) and oxygen (O) (IZO; indium zinc oxide), indium oxide ( $In_2O_3$ ), tin oxide ( $SnO_2$ ), zinc oxide ( $ZnO$ ), cadmium oxide ( $CdO$ ), titanium oxide ( $TiO_2$ ), chromium oxide ( $CrO_2$ ), gallium nitride (GaN), gallium oxide ( $Ga_2O_3$ ) and aluminum oxide ( $Al_2O_3$ ). It is because compared to the case where the barrier layer 14C is made of a metallic material, by using any of these inorganic light-transparent materials, the barrier layer 14C can be formed so as to have a smaller surface roughness, so the surface roughness of the reflective layer 14B made of silver or an alloy including silver can be reduced to improve the surface planarization of the first electrode 14. Moreover, it is because each layer of the organic layer 16 formed on the first electrode 14 can have a uniform thickness, thereby a possibility of a short circuit between the first electrode 14 and the second electrode 17 due to the lack of thickness of the organic layer 16 can be eliminated, and specifically when a resonator structure which will be described later is formed, the occurrence of color unevenness in pixels can be prevented to enhance color reproducibility. Further, it is because the materials have extremely small light absorption in a visible light range, and good light transmittance, so an absorption loss when light generated in the light-emitting layer passes through the barrier layer 14C can be minimized.

**[0032]** In order for the barrier layer 14C to secure the above-described function as a protective film, the thickness of the barrier layer 14C is preferably within a range of 1 nm to 50 nm inclusive, and more preferably 3 nm to 30 nm inclusive.

**[0033]** The insulating film 15 is used to secure insulation between the first electrode 14 and the second electrode 17, and to accurately form a desired shape of a light-emitting region in each of the organic light-emitting devices 10R, 10G and 10B. The insulating film 15 has, for example, a thickness of approximately 600 nm, and is made of an insulating material such as silicon dioxide ( $SiO_2$ ) or polyimide. In the insulating film 15, an aperture portion 15A is disposed corresponding to a light-emitting region.

**[0034]** The organic layer 16 has a different structure depending upon colors emitted from the organic light-emitting devices 10R, 10G and 10B. FIG. 2 shows an

enlarged view of the organic layer 16 in the organic light-emitting devices 10R and 10B. The organic layer 16 of each of the organic light-emitting devices 10R and 10B has a structure in which a hole transport layer 16A, a

5 light-emitting layer 16B and an electron transport layer 16C are laminated in this order from the first electrode 14. The hole transport layer 16A enhances the efficiency of hole injection into the light-emitting layer 16B. The hole transport layer 16A also serves as a hole injection layer.

10 The light-emitting layer 16C generates light through applying an electric field to recombine electrons and holes, and emits the light in a region corresponding to the aperture portion 15A of the insulating film 15. The electron transport layer 16C enhances the efficiency of electron injection into the light-emitting layer 16B.

**[0035]** The hole transport layer 16A of the organic light-emitting device 10R has, for example, a thickness of approximately 45 nm, and is made of bis[(N-naphthyl)-N-phenyl]benzidine ( $\alpha$ -NPD). The light-emitting layer 16B of the organic light-emitting device 10R has, for example, a thickness of approximately 50 nm, and is made of 2,5-bis[4-[N-(4-methoxyphenyl)-N-phenylamino]]styrylbenzene-1,4-dicarbonitrile (BSB). The electron transport layer 16C of the organic light-emitting device 10R has, for example, a thickness of approximately 30 nm, and is made of 8-quinolinol aluminum complex ( $Alq_3$ ).

**[0036]** The hole transport layer 16A of the organic light-emitting device 10B has, for example, a thickness of approximately 30 nm, and is made of  $\alpha$ -NPD. The light-emitting layer 16B of the organic light-emitting device 10B has, for example, a thickness of approximately 30 nm, and is made of 4,4'-bis(2,2'-diphenyl vinyl)biphenyl (DPVBi). The electron transport layer 16C of the organic light-emitting device 10B has, for example, a thickness of approximately 30 nm, and is made of  $Alq_3$ .

**[0037]** FIG. 3 shows an enlarged view of the organic layer 16 in the organic light-emitting device 10G. The organic layer 16 of the organic light-emitting device 10G has a structure in which a hole transport layer 16A and a light-emitting layer 16B are laminated in this order from the first electrode 14. The hole transport layer 16A also serves as a hole injection layer, and the light-emitting layer 16B also serves as an electron transport layer.

**[0038]** The hole transport layer 16A of the organic light-emitting device 10G has, for example, a thickness of approximately 50 nm, and is made of  $\alpha$ -NPD. The light-emitting layer 16B of the organic light-emitting device 10G has, for example, a thickness of approximately 60 nm, and is made of  $Alq_3$  mixed with 1 vol% of Coumarin6 (C6).

**[0039]** The second electrode 17 shown in FIGs. 1, 2 and 3 has, for example, a thickness of approximately 10 nm, and is made of a metal such as silver (Ag), aluminum (Al), magnesium (Mg), calcium (Ca) or sodium (Na), or an alloy. In the embodiment, for example, the second electrode 17 is made of, for example, an alloy of magnesium (Mg) and silver (MgAg alloy).

**[0040]** The second electrode 17 is formed so that the

organic light-emitting devices 10R, 10G and 10B are covered with the second electrode 17, thereby the second electrode 17 is a common electrode of the organic light-emitting devices 10R, 10G and 10B. An auxiliary electrode 17A is preferably disposed on the insulating film 15 to reduce a voltage drop in the second electrode 17. The auxiliary electrode 17A is disposed in gaps between the organic light-emitting devices 10R, 10G and 10B, and an end portion thereof is connected to a trunk-shaped auxiliary electrode (not shown) which is a bus formed so as to surround a region where the organic light-emitting devices 10R, 10G and 10B are disposed in a peripheral portion of the substrate 11. The auxiliary electrode 17A and the trunk-shaped auxiliary electrode have a single layer structure or a laminate structure made of an electrically conductive material with low resistance such as aluminum (Al) or chromium (Cr).

**[0041]** The second electrode 17 also serves as a semi-transparent reflective layer. More specifically, each of the organic light-emitting devices 10R, 10G and 10B has a resonator structure in which assuming that an end surface of the first electrode 14 on a side closer to the light-emitting layer 16B and an end surface of the second electrode 17 on a side closer to the light-emitting layer 16B are a first end portion P1 and a second end portion P2, respectively, and the organic layer 16 is a resonant portion, light generated in the light-emitting layer 16B is resonated to be extracted from the second end portion P2. The organic light-emitting devices 10R, 10G and 10B preferably have such a resonator structure, because when multiple interference of the light generated in the light-emitting layer 16B occurs, the structure functions as a kind of narrow-band filter, so the half-value width of the spectrum of extracted light can be reduced, and color purity can be improved. Moreover, external light incident from the sealing panel 20 can be attenuated by the multiple interference, and the reflectance of the external light on the organic light-emitting devices 10R, 10G and 10B can become extremely small by a combination of a color filter 22 (refer to FIG. 1) which will be described later.

**[0042]** For the purpose, it is preferable that an optical distance L between the first end portion P1 and the second end portion P2 of the resonator satisfies Mathematical Formula 1 so that a resonant wavelength of the resonator (a peak wavelength of the spectrum of light to be extracted) matches a peak wavelength of the spectrum of light desired to be extracted. Actually, the optical distance L is preferably selected to be a positive minimum value satisfying Mathematical Formula 1.

### (Mathematical Formula 1)

$$(2L)/\lambda + \Phi/(2\pi) = m$$

(where L represents an optical distance between the first end portion P1 and the second end portion P2,  $\Phi$

represents the sum of a phase shift  $\Phi_1$  of reflected light generated in the first end portion P1 and a phase shift  $\Phi_2$  of reflected light generated in the second end portion P2 ( $\Phi = \Phi_1 + \Phi_2$ ) (rad),  $\lambda$  represents a peak wavelength of

the spectrum of light desired to be extracted from the second end portion P2, and m is an integer to make L a positive value. Further, in Mathematical Formula 1, the units of L and  $\lambda$  may be the same, for example, (nm).)

**[0043]** Herein, when the first electrode 14 has a structure in which the adhesive layer 14A, the reflective layer 14B and the barrier layer 14C are laminated, the position of the first end portion P1 may vary depending upon the material and the thickness of each layer. In principle, as shown in FIGs. 2 and 3, reflected light h of the light generated in the light-emitting layer 16B on the first end portion P1 is a composite wave including reflected light h1 generated in an interface between the adhesive layer 14A and the reflective layer 14B, reflective light h2 generated in an interface between the reflective layer 14B and the barrier layer 14C, and reflected light h3 generated in an interface between the barrier layer 14C and the organic layer 16, and the first end portion P1 is a virtual interface corresponding to the composite wave. However, the reflective layer 14B is made of silver or an alloy including silver, so when the reflective layer 14B has an enough thickness, the reflected light h1 generated in the interface between the adhesive layer 14A and the reflective layer 14B is small. Moreover, when the barrier layer 14C is made of the above-described material, the reflected light h3 generated in the interface between the barrier layer 14C and the organic layer 16 is also small, so it can be considered that the barrier layer 14C is included in a resonant portion, and the first end portion P1 is an interface between the reflective layer 14B and the barrier layer 14C.

**[0044]** The protective film 18 shown in FIG. 1 has, for example, a thickness of 500 nm to 10000 nm inclusive, and is a passivation film made of a transparent dielectric. The protective film 18 is made of, for example, silicon oxide ( $\text{SiO}_2$ ), silicon nitride ( $\text{SiN}$ ) or the like.

**[0045]** As shown in FIG. 1, the sealing panel 20 is placed on a side of the drive panel 10 closer to the second electrode 17, and has a sealing substrate 21 which seals the organic light-emitting devices 10R, 10G and 10B with the adhesive layer 30. The sealing substrate 21 is made of a material transparent to light generated in the organic light-emitting devices 10R, 10G and 10B such as glass or the like. For example, the color filter 22 is disposed on the sealing substrate 21 to extract light generated in the organic light-emitting devices 10R, 10G and 10B, and to absorb external light reflected by the organic light-emitting devices 10R, 10G and 10B and wirings therebetween, thereby the contrast is improved.

**[0046]** The color filter 22 may be disposed on either side of the sealing substrate 21, but the color filter 22 is preferably disposed on a side closer to the drive panel 10, because the color filter 22 is not exposed to the surface, and can be protected by the adhesive layer 30. The

color filter 22 includes a red filter 22R, a green filter 22G and a blue filter 22B, which are disposed corresponding to the organic light-emitting devices 10R, 10G and 10B, respectively.

**[0047]** The red filter 22R, the green filter 22G and the blue filter 22B each have, for example, a rectangular shape, and are formed with no space in between. The red filter 22R, the green filter 22G and the blue filter 22B each are made of a resin mixed with pigments, and by the selection of the pigments, the light transmittance in a targeted wavelength of red, green or blue is adjusted to be higher, and the light transmittance in other wavelengths is adjusted to be lower.

**[0048]** Moreover, a wavelength range with high transmittance in the color filter 22 matches the peak wavelength  $\lambda$  of the spectrum of light desired to be extracted from the resonator structure. Thereby, among external light incident from the sealing panel 20, only light having a wavelength equivalent to the peak wavelength  $\lambda$  of the spectrum of light to be extracted passes through the color filter 22, and external light with other wavelengths can be prevented from entering into the organic light-emitting devices 10R, 10G and 10B.

**[0049]** The display unit can be manufactured through, for example, the following steps.

**[0050]** FIGs. 4A through 13 show steps in a method of manufacturing the display unit in order. At first, as shown in FIG. 4A, the TFT 12, the interlayer insulating film 12A and the wiring 12B are formed on the substrate 11 made of the above-described material.

**[0051]** Next, as shown in FIG. 4B, the planarizing layer 13 made of the above-described material is formed throughout the substrate by, for example, a spin coat method, and then while the planarizing layer 13 is patterned in a predetermined shape by exposure and development, the connecting hole 13A is formed. After that, in order to imidize polyimide, polyimide is baked at, for example, 320°C with a clean baking furnace.

**[0052]** Next, as shown in FIG. 5A, the adhesive layer 14A made of, for example, chromium (Cr) with a thickness of 80 nm is formed on the planarizing layer 13 by, for example, sputtering.

**[0053]** After that, as shown in FIG. 5B, the reflective layer 14B made of, for example, an alloy including silver with a thickness of 150 nm is formed on the adhesive layer 14A by, for example, sputtering. Thus, the reflective layer 14B is formed on the planarizing layer 13 with the adhesive layer 14A in between, thereby the reflective layer 14B can be prevented from being separated from the planarizing layer 13 as a base layer. Moreover, the entry of an etching solution or air from a separated portion of the reflective layer 14 can be prevented, thereby silver or an alloy including silver of the reflective layer 14B can be prevented from reacting with oxygen or sulfur included in the etching solution or the air.

**[0054]** Next, as shown in FIG. 5C, the barrier layer 14C made of, for example, ITO with a thickness of 15 nm is formed on the reflective layer 14B by, for example, sput-

tering. Thus, after forming the reflective layer 14B, the barrier layer 14C is immediately formed, thereby silver or the alloy including silver of the reflective layer 14B can be prevented from reacting with oxygen or sulfur in air, and during a manufacturing step after forming the reflective layer 14B, damage on the reflective layer 14B can be reduced, and an interface between the reflective layer 14B and the barrier layer 14C can be maintained clean.

**[0055]** After forming the adhesive layer 14A, the reflective layer 14B and the barrier layer 14C, as shown in FIG. 6A, the barrier layer 14C and the reflective layer 14B are selectively etched by, for example, lithography or wet etching to be patterned in a predetermined shape.

**[0056]** Next, as shown in FIG. 6B, the adhesive layer 14A is patterned by, for example, lithography or wet etching to form the first electrode 14. At this time, a sidewall of the reflective layer 14B is preferably covered with a photoresist, because the possibility that the sidewall of the reflective layer 14B contacts a chemical solution for wet etching can be eliminated, thereby damage on the reflective layer 14B can be reduced.

**[0057]** After that, as shown in FIG. 7A, the insulating film 15 with the above-described thickness is formed throughout the substrate 11 by, for example, CVD (chemical vapor deposition), and a portion of the insulating film 15 corresponding to the light-emitting region is selectively removed by, for example, lithography to form the aperture portion 15A.

**[0058]** Next, as shown in FIG. 7B, the auxiliary electrode 17A is formed on the insulating film 15 throughout the substrate 11, and then is selectively etched by, for example, lithography to be patterned in a predetermined shape.

**[0059]** Next, as shown in FIG. 8, the hole transport layer 16A, the light-emitting layer 16B and the electron transport layer 16C of the organic light-emitting device 10R all of which are made of the above-described materials with the above-described thicknesses are formed by, for example, vapor deposition to form the organic layer 16 of the organic light-emitting device 10R. At this time, it is preferable that a metallic mask 41 having an aperture 41A corresponding to a region where the organic layer 16 is formed is used to form the organic layer 16 corresponding to the light-emitting region, that is, the aperture portion 15A of the insulating film 15. However, it is difficult to deposit the organic layer 16 only in the aperture portion 15A with high accuracy, so the whole aperture portion 15A may be covered with the organic layer 16 so as to lay the organic layer 16 on an edge of the insulating film 15.

**[0060]** After that, the mask 41 is shifted, and as shown in FIG. 9, as in the case of the organic layer 16 of the organic light-emitting device 10R, the hole transport layer 16A and the light-emitting layer 16B of the organic light-emitting device 10G both made of the above-described materials with the above-described thicknesses are formed so as to form the organic layer 16 of the organic light-emitting device 10G. Next, the mask 41 is shifted

again, and as shown in FIG. 9, as in the case of the organic layer 16 of the organic light-emitting device 10R, the hole transport layer 16A, the light-emitting layer 16B and the electron transport layer 16C of the organic light-emitting device 10B all of which are made of the above-described materials with the above-described thicknesses are formed so as to form the organic layer 16 of the organic light-emitting device 10B. FIG. 9 shows a state in which the aperture 41A of the mask 41 faces the organic layer 16 of the organic light-emitting device 10B.

**[0061]** After forming the organic layer 16 of each of the organic light-emitting devices 10R, 10G and 10B, as shown in FIG. 10, the second electrode 17 made of the above-described material with the above-described thickness is formed throughout the substrate 11 by, for example, vapor deposition. Thereby, the second electrode 17 is electrically connected to the auxiliary electrode 17A which has already been formed and the trunk-shaped auxiliary electrode (not shown) as a bus. Thus, the organic light-emitting devices 10R, 10G and 10B shown in FIGs. 1 through 3 are formed.

**[0062]** Next, as shown in FIG. 11, the protective film 18 made of the above-described material with the above-described thickness is formed on the second electrode 17. Thereby, the drive panel 10 shown in FIG. 1 is formed.

**[0063]** Moreover, as shown in FIG. 12A, the sealing substrate 21 made of the above-described material is coated with the material of the red filter 22R by spin coating or the like, and then the material of the red filter 22R is patterned by photolithography, and is baked so as to form the red filter 22R. Next, as shown in FIG. 12B, as in the case of the red filter 22R, the blue filter 22B and the green filter 22G are formed in order. Thereby, the sealing panel 20 is formed.

**[0064]** After forming the sealing panel 20 and the drive panel 10, as shown in FIG. 13, the adhesive layer 30 made of a thermosetting resin is formed through coating on a side of the substrate 11 where the organic light-emitting devices 10R, 10G and 10B are formed. The coating may be carried out through emitting the resin from a slit nozzle dispenser, or through roll coating or screen printing. Next, as shown in FIG. 1, the drive panel 10 and the sealing panel 20 are bonded together with the adhesive layer 30 in between. At this time, a surface of the sealing panel 20 where the color filter 22 is formed preferably faces the drive panel 10. Moreover, it is preferable to avoid air bubbles from entering into the adhesive layer 30. After that, relative positioning between the color filter 22 of the sealing panel 20 and the organic light-emitting devices 10R, 10G and 10B of the drive panel 10 is aligned, then heat treatment is carried out at a predetermined temperature for a predetermined time to cure the thermosetting resin of the adhesive layer 30. Thereby, the display unit shown in FIGs. 1 through 3 is completed.

**[0065]** In the display unit, when a predetermined voltage is applied between the first electrode 14 and the second electrode 17, a current is injected into the light-emitting layer 16B of the organic layer 16, and holes and

electrons are recombined to emit light mainly from an interface of the light-emitting layer 16B on a side closer to the hole transport layer 16A. The light is reflected several times between the first end portion P1 and the second end portion P2, and then passes through the second electrode 17 to be extracted. In the embodiment, the first electrode 14 has a structure in which the adhesive layer 14A, the reflective layer 14B and the barrier layer 14C are laminated, so alteration of the reflective layer 14B

5 can be prevented by the barrier layer 14C, and the reflective layer 14B can be prevented from being separated from the planarizing layer 13 by the adhesive layer 14A.

**[0066]** Thus, The first electrode 14 has a structure in which the adhesive layer 14A, the reflective layer 14B and the barrier layer 14C are laminated, so separation or alteration of the reflective layer 14B can be prevented, thereby the occurrence of a short circuit between the first electrode 14 and the second electrode 17 due to the alteration of the reflective layer 14B can be prevented.

10 Therefore, is it specifically suitable when the reflective layer 14B is made of silver (Ag) or an alloy including silver, and defects in the display unit can be reduced, and the life of the display unit can be extended.

**[0067]** Moreover, after the adhesive layer 14A, the reflective layer 14B and the barrier layer 14C are formed on the planarizing layer 13 as a base layer, they are patterned in order from the barrier layer 14C to form the first electrode 14, so silver or the alloy including silver of the reflective layer 14B can be prevented from reacting with

15 oxygen or sulfur in air by the barrier layer 14C, and damage on the reflective layer 14B during a manufacturing step after forming the reflective layer 14B can be reduced. Further, the reflective layer 14B can be prevented from being separated from the planarizing layer 13 by the adhesive layer 14A, thereby an adverse effect on the reflective layer 14B by air or a chemical solution entered into a separated portion of the reflective layer 14B can be prevented.

20 **[Embodiment]**

**[0068]** FIG. 14 shows a sectional view of a display unit according to the invention. The display unit is equivalent to the display unit according to the example, except that 25 instead of the adhesive layer 14A of the first electrode 14, the display unit comprises an adhesive layer-cum-auxiliary reflective film 14D which also has a function as a auxiliary reflective film reflecting light generated in the light-emitting layer 16B and passing through the reflective layer 14B. Therefore, like components are denoted by like numerals as of the example and will not be further explained.

**[0069]** The adhesive layer-cum-auxiliary reflective film 14D is preferably made of, for example, a metal, an electrically conductive oxide or a metal compound including at least one kind selected from the group of metal elements consisting of chromium (Cr), indium (In), tin (Sn), zinc (Zn), cadmium (Cd), titanium (Ti), aluminum (Al),

magnesium (Mg) and molybdenum (Mo), because these materials have high electrical conductivity, so a good electrical connection to the wiring 12B can be established. Moreover, in terms of reflectance, they have small absorption in a visible light range, so high effects as an auxiliary reflective film can be obtained. Further, the adhesive layer-cum-auxiliary reflective film 14D has a reflectance of 50% or over, because higher effects can be obtained. In the embodiment, the adhesive layer-cum-auxiliary reflective film 14D is made of, for example, chromium (with a reflectance of approximately 70% in a wavelength range of 400 nm to 500 nm, and example approximately 66% in a wavelength range of 600 nm to 800 nm as a larger wavelength causes a reduction in the reflectance).

**[0070]** As in the case of the adhesive layer 14A in the example, the adhesive layer-cum-auxiliary reflective film 14D preferably has as large a thickness as light does not pass therethrough. More specifically, when the adhesive layer-cum-auxiliary reflective film 14D is made of chromium, the thickness thereof is preferably within a range of 40 nm to 300 nm inclusive, and more preferably within a range of 50 nm to 150 nm inclusive.

**[0071]** As in the case of the example, the reflective layer 14B is made of silver or an alloy including silver. The reflective layer 14B has a thickness of 10 nm to 100 nm inclusive. It is because when the thickness is within the range, a reflectance equivalent to that in the example can be obtained by a synergistic effect with the adhesive layer-cum-auxiliary reflective film 14D. It is because when the thickness of the reflective layer 14B is reduced, its surface roughness can be reduced, thereby the thickness of the barrier layer 14C can be reduced to further increase light extraction efficiency. Moreover, it is because when the thickness of the reflective layer 14B is reduced, an increase in the surface roughness due to crystallization of the reflective layer 14B by heat processing during manufacturing can be reduced, thereby an increase in defects of the barrier layer 14C due to the increased surface roughness of the reflective layer 14B can be prevented more effectively.

**[0072]** As in the case of the example, the barrier layer 14C is preferably made of an inorganic transparent material, and more specifically, the barrier layer 14C is preferably made of at least one kind selected from the group consisting of a compound including indium (In), tin (Sn) and oxygen (O) (ITO; indium tin oxide), a compound including indium (In), zinc (Zn) and oxygen (O) (IZO; indium zinc oxide), tin oxide ( $\text{SnO}_2$ ), zinc oxide ( $\text{ZnO}$ ), cadmium oxide ( $\text{CdO}$ ), titanium oxide ( $\text{TiO}_2$ ) and chromium oxide ( $\text{CrO}_2$ ).

**[0073]** The barrier layer 14C preferably has, for example, a thickness of 1 nm to 50 nm inclusive, and more preferably 3 nm to 15 nm inclusive. It is because in the embodiment, as described above, the thickness of the reflective layer 14B can be reduced, so even if the thickness of the barrier layer 14C is reduced to the above range, a function as a protective film can be secured.

Moreover, it is because when the thickness of the barrier layer 14C is reduced, a loss in light absorption can be reduced to further enhance light extraction efficiency.

**[0074]** When the first electrode 14 has a structure in which the adhesive layer-cum-auxiliary reflective film 14D, the reflective layer 14B and the barrier layer 14C are laminated according to the embodiment, as described above, the thickness of the reflective layer 14B can be thinner than that in the example. In this case, reflected light  $h_2$  generated in an interface between the reflective layer 14B and the barrier layer 14C is smaller than that in the example, and reflected light  $h_1$  generated in an interface between the adhesive layer-cum-auxiliary reflective film 14D and the reflective layer 14B is larger than that in the example. Therefore, as shown in FIGs. 15 and 16, it can be considered that the first end portion P1 includes an interface between the reflective layer 14B and the barrier layer 14C and an interface between the adhesive layer-cum-auxiliary reflective film 14D and the reflective layer 14B. Reflected light  $h_3$  generated in an interface between the barrier layer 14C and the organic layer 16 is as small as that in the example, so the barrier layer 14C is included in the resonant portion.

**[0075]** The display unit can be manufactured as in the case of the example.

**[0076]** In the display unit, when a predetermined voltage is applied between the first electrode 14 and the second electrode 17, a current is injected into the light-emitting layer 16B of the organic layer 16, and holes and electrons are recombined to emit light mainly from an interface of the light-emitting layer 16B on a side closer to the hole transport layer 16A. The light is reflected several times between the first end portion P1 and the second end portion P2, and then passes through the second electrode 17 to be extracted. In the embodiment, the first electrode 14 has a structure in which the adhesive layer-cum-auxiliary reflective film 14D, the reflective layer 14B and the barrier layer 14C are laminated, so light generated in the light-emitting layer 16B and having passed through the barrier layer 14C and the reflective layer 14B is reflected by the adhesive layer-cum-auxiliary reflective film 14D. Therefore, even if the reflective layer 14B has a thinner thickness, high reflectance can be maintained.

**[0077]** Thus, in the embodiment, the first electrode 14 has a structure in which the adhesive layer-cum-auxiliary reflective film 14D, the reflective layer 14B and the barrier layer 14C are laminated, so even if the reflective layer 14B has a thinner thickness, a decline in the reflectance of the reflective layer 14B can be prevented by the adhesive layer-cum-auxiliary reflective film 14D to obtain high reflectance. Moreover, when the thickness of the reflective layer 14B is reduced, the thickness of the barrier layer 14C can be also reduced, thereby light extraction efficiency can be improved.

55 Specific examples

**[0078]** Next, specific examples of the invention will be

described below.

(Example 1)

**[0079]** As in the case of the embodiment, the organic light-emitting device was formed. At that time, the first electrode 14 had a structure in which the adhesive layer-cum-auxiliary reflective film 14D made of chromium with a thickness of 40 nm, the reflective layer 14B made of an alloy including silver with a thickness of 36 nm, and the barrier layer 14C made of ITO with a thickness of 7.5 nm were laminated. Moreover, the resonant wavelength of the above-described resonator (peak wavelength of the spectrum of light extracted from the second electrode 17) was set to 400 nm and 800 nm. In the obtained organic light-emitting device, the reflectance of the first electrode 14 in both cases was determined. The obtained results are shown in FIG. 17.

**[0080]** As Reference Examples 1 through 5 relative to the example, as shown in FIG. 18, a first electrode 114 which was equivalent to the example except that the first electrode 114 included only a reflective layer 114B and a barrier layer 114C, and the adhesive layer-cum-auxiliary reflective film was not included. At that time, the thickness of the reflective layer 114B was 36 nm in Reference Example 1, 70 nm in Reference Example 2, 90 nm in Reference Example 3, 110 nm in Reference Example 4 and 150 nm in Reference Example 5. In Reference Examples 1 through 5, the reflectance of the first electrode 114 was determined. The obtained results are shown in FIG. 19, and the results of Reference Examples 1 and 5 are also shown in FIG. 17.

**[0081]** It was obvious from FIG. 19 that in Reference Examples 1 through 5 in which the adhesive layer-cum-auxiliary reflective film is not included, the reflectance was declined according to a decrease in the thickness of the reflective layer 114B in both cases of the resonant wavelengths of 800 nm and 400 nm. Among them, in Reference Examples 1 through 3 in which the thickness of the reflective layer 114B was 100 nm or less, a decline in the reflectance specifically in the resonant wavelength of 400 nm was pronounced. On the other hand, it was obvious from FIG. 17 that in the example in which the adhesive layer-cum-auxiliary reflective film 14D was included, compared to Reference Example 1 having the reflective layer 114B with the same thickness as that in the example, the reflectance was improved in both cases of the resonant wavelengths of 800 nm and 400 nm. Specifically in the resonant wavelength of 400 nm, the same reflectance as that in Reference Example 5 in which the thickness of the reflective layer 114B was 150 nm could be obtained. In other words, it was found out that when the first electrode 14 included the adhesive layer-cum-auxiliary reflective film 14D, a decline in the reflectance due to a reduction in the thickness of the reflective layer 14B can be offset, and characteristics can be improved.

(Example 2)

**[0082]** The first electrode 14 was formed as in the case of Example 1, except that the thickness of the adhesive layer 14A was 150 nm. The reflectance thereof was determined, and the same results as those in Example 1 were obtained. The obtained results are shown in FIG. 17.

**[0083]** Although the present invention is described referring to the embodiment and the examples, the invention is not limited to the embodiment and the examples, and is variously modified. For example, the materials and the thicknesses of the layers, film forming methods, film forming conditions and so on are not limited to those described in the embodiments and the examples, and any other materials, any other thicknesses, any other film forming methods and any other film forming conditions may be applicable. For example, the adhesive layer-cum-auxiliary reflective film 14D can be formed by not only sputtering, but also vapor deposition, CVD, MOCVD (metal organic chemical vapor deposition), laser ablation, plating and the like. The reflective layer 14B can be also formed by not only sputtering but also vapor deposition, CVD, MOCVD, laser ablation, plating and the like.

**[0084]** Moreover, for example, in the above embodiment and the above examples, the case where the adhesive layer-cum-auxiliary reflective film 14D, the reflective layer 14B and the barrier layer 14C are patterned by wet etching is described, they may be patterned by dry etching.

**[0085]** Further, for example, in the embodiment and the examples, the case where after the barrier layer 14C and the reflective layer 14B are patterned, the adhesive layer-cum-auxiliary reflective film 14D is patterned is described; however, as shown in FIG. 20A, at first, only the barrier layer 14C is patterned, and then as shown in FIG. 20B, the reflective layer 14B, and the adhesive layer-cum-auxiliary reflective film 14D may be patterned. Further, the barrier layer 14C, the reflective layer 14B, and the adhesive layer-cum-auxiliary reflective film 14D may be patterned one after another from the barrier layer 14C.

**[0086]** Further, in the embodiment, the structures of the organic light-emitting devices 10R, 10G and 10B are described in detail; however, each of them does not necessarily include all layers such as the insulating film 15, the auxiliary electrode 17A and the protective film 18, and each of them may further include any other layer. Although the invention is applicable to the case where the second electrode 17 is not a semi-transparent electrode but a transparent electrode, and the second electrode 17 does not have a resonator structure, the invention is to enhance the reflectance in the first electrode 14, so in the case where an interface of the first electrode 14 on a side closer to the light-emitting layer 16B and an interface of the second electrode 17 on a side closer to the light-emitting layer 16B are the first end portion P1 and the second end portion P2 respectively, and the organic layer 16 has a resonator structure as a resonator

portion, higher effects can be obtained.

**[0087]** In addition, in the embodiment, the case where the invention is applied to the organic light-emitting device or the display unit comprising the organic light-emitting device is described; however, the invention is applicable to any other display unit such as, for example, a liquid crystal display panel.

## Claims

1. A light-emitting device, comprising a substrate (11), a base layer (13), a first electrode (14), an insulating film (15), a light-emitting layer (16) and a second electrode (17) laminated in this order, and emitting light generated in the light-emitting layer (16) through the second electrode (17), wherein the first electrode (14) includes:

an adhesive layer (14A) provided in contact with the base layer (13);  
a reflective layer (14B) provided on the adhesive layer (14A) to reflect the light generated in the light-emitting layer (16); and  
a barrier layer (14C) provided on the reflective layer (14B) to protect the reflective layer (14B);

### characterized in that

the adhesive layer also serves as an auxiliary reflective film reflecting light generated in the light-emitting layer and having passed through the reflective layer; wherein the adhesive layer has a reflectance of 50% or over in a visible light range, and wherein the reflective layer (14B) is made of silver (Ag) or an alloy including silver, and has a thickness of 10nm to 100nm;

2. A light-emitting device according to claim 1, wherein the adhesive layer (14A) is made of a metal, an electrically conductive oxide or a metal compound including at least one kind selected from the group of metal elements consisting of chromium (Cr), indium (In), tin (Sn), zinc (Zn), cadmium (Cd), titanium (Ti), aluminum (Al), magnesium (Mg) and molybdenum (Mo).

3. A light-emitting device according to claim 1, wherein the reflective layer (14B) is made of an alloy including silver (Ag) and at least one kind selected from the group consisting of neodymium (Nd), samarium (Sm), yttrium (Y), cerium (Ce), europium (Eu), gadolinium (Gd), terbium (Tb), dysprosium (Dy), erbium (Er), ytterbium (Yb), scandium (Sc), ruthenium (Ru), copper (Cu) and gold (Au).

4. A light-emitting device according to claim 1, wherein the reflective layer (14B) is made of an alloy including silver (Ag), samarium (Sm) and copper (Cu).

5. A light-emitting device according to claim 1, wherein the reflective layer (14B) is made of an alloy including silver (Ag) as a main component, 0.03 % by mass to 0.5 % by mass inclusive of samarium (Sm) and 0.2 % by mass to 1.0 % by mass inclusive of copper (Cu).

6. A light-emitting device according to claim 1, wherein the thickness of the barrier layer (14C) is within a range of 1 nm to 50 nm inclusive.

7. A light-emitting device according to claim 1, wherein the base layer (13) is a planarizing layer.

8. A light-emitting device according to any one of the claims 1 to 7, wherein the barrier layer (14C) is made of at least one material selected from the group consisting of a compound including indium (In), tin (Sn) and oxygen (O) (ITO), a compound including indium (In), zinc (Zn) and oxygen (O) (IZO), indium oxide ( $In_2O_3$ ), tin oxide ( $SnO_2$ ), zinc oxide ( $ZnO$ ), cadmium oxide ( $CdO$ ), titanium oxide ( $TiO_2$ ), chromium oxide ( $CrO_2$ ), gallium nitride (GaN), gallium oxide ( $Ga_2O_3$ ) and aluminum oxide ( $Al_2O_3$ ).

9. A display unit comprising a first, a second and a third light-emitting device according to any one of the claims 1 to 8, whereby a resonant wavelength of the first light-emitting device (10R) corresponds to a red color, a resonant wavelength of the second light-emitting device (10B) corresponds to a blue color and a resonant wavelength of the third light-emitting device (10G) corresponds to a green color, whereby the second electrode (17) is semi transparent and a resonator structure is formed by the first electrode (14), the light emitting layer (16) and the second electrode (17).

10. A method of manufacturing a light-emitting device, the light-emitting device comprising a substrate (11), a base layer (13), a first electrode (14), an insulating film (15), a light-emitting layer (16) and a second electrode (17) laminated in this order, the method comprising the steps of:

forming an adhesive layer (14A) on the base layer (13);  
forming a reflective layer (14B) reflecting light generated in the light-emitting layer (16) on the adhesive layer (14A);  
forming a barrier layer (14C) protecting the reflective layer (14B) on the reflective layer (14B);  
forming the first electrode (14) through patterning the barrier layer (14C), the reflective layer (14B) and the adhesive layer (14A) in order from the barrier layer (14C);  
forming the layer including the light-emitting layer (16) on the first electrode (14); and

forming the second electrode (17) on the layer including the light-emitting layer (16); wherein the adhesive layer also serves as an auxiliary reflective film reflecting light generated in the light-emitting layer and having passed through the reflective layer; and wherein the adhesive layer has a reflectance of 50% or over in a visible light range wherein the reflective layer (14B) is made of silver or an alloy including silver and has a thickness of 10 nm to 100 nm,

11. A method of manufacturing a light-emitting device according to claim 10, wherein in the step of forming the first electrode (14), after the barrier layer (14C) and the reflective layer (14B) are patterned, the adhesive layer (14A) is patterned. 15

12. A method of manufacturing a light-emitting device according to claim 10, wherein in the step of forming the first electrode (14), after the barrier layer (14C) is patterned, the reflective layer (14B) and the adhesive layer (14A) are patterned. 20

13. A method of manufacturing a light-emitting device according to claim 10, wherein in the step of forming the first electrode (14), the barrier layer (14C), the reflective layer (14B) and the adhesive layer (14A) are patterned one by one from the barrier layer (14C). 25

14. A method of manufacturing a light-emitting device according to one of the claims 11 to 13, wherein the barrier layer (14C) is made of at least one material selected from the group consisting of a compound including indium (In), tin (Sn) and oxygen (O) (ITO), a compound including indium (In), zinc (Zn) and oxygen (O) (IZO), indium oxide ( $In_2O_3$ ), tin oxide ( $SnO_2$ ), zinc oxide ( $ZnO$ ), cadmium oxide ( $CdO$ ), titanium oxide ( $TiO_2$ ), chromium oxide ( $CrO_2$ ), gallium nitride (GaN), gallium oxide ( $Ga_2O_3$ ) and aluminum oxide ( $Al_2O_3$ ). 30

#### Patentansprüche

1. Ein Licht-emittierendes Gerät, welches ein Substrat (11), eine Basisschicht (13), eine erste Elektrode (14), einen Isolierfilm (15), eine Licht-emittierende Schicht (16) und eine zweite Elektrode (17), die in dieser Reihenfolge beschichtet sind, umfasst und in der Licht-emittierenden Schicht generiertes Licht durch die zweite Elektrode emittiert, wobei die erste Elektrode (14) umfasst:

eine Haftsicht (14A), in Kontakt mit der Basis- schicht (13) bereitgestellt; eine Reflektionsschicht (14B), auf der

Haftsicht (14A) bereitgestellt, um das in der Licht-emittierenden Schicht (16) generierte Licht zu reflektieren; und eine Barrièreschicht (14C), auf der Reflektionsschicht (14B) bereitgestellt, um die Reflektionsschicht zu schützen;

dadurch charakterisiert, dass die Haftsicht auch als ein Hilfsreflektionsfilm zur Reflektion des in der Licht-emittierenden Schicht generierten und durch die Reflektionsschicht passierten Lichts dient; wobei die Haftsicht einen Reflektionsgrad von 50% oder mehr im Bereich des sichtbaren Lichts hat, und wobei die Reflektionsschicht (14B) aus Silber (Ag) oder einer Silber beinhaltenden Legierung hergestellt ist und eine Dicke von 10nm bis 100nm hat.

2. Ein Licht-emittierendes Gerät gemäß Anspruch 1, wobei die Haftsicht (14A) aus einem Metall, einem elektrisch leitendem Oxid oder einem Metallverbund, der mindestens eine aus der Gruppe der Metallelemente bestehend aus Chrom (Cr), Indium (In), Zinn (Sn), Zink (Zn), Kadmium (Cd), Titan (Ti), Aluminium (Al), Magnesium (Mg) und Molybdän (Mo) selektierte Art umfasst, hergestellt ist. 25

3. Ein Licht-emittierendes Gerät gemäß Anspruch 1, wobei die Reflektionsschicht (14B) aus einer Silber (Ag) und mindestens eine aus der Gruppe bestehend aus Neodym (Nd), Samarium (Sm), Yttrium (Y), Cer (Ce), Europium (Eu), Gadolinium (Gd), Terbium (Tb), Dysprosium (Dy), Erbium (Er), Ytterbium (Yb), Scandium (Sc), Ruthenium (Ru), Kupfer (Cu) und Gold (Au) selektierte Art Legierung hergestellt ist. 30

4. Ein Licht-emittierendes Gerät gemäß Anspruch 1, wobei die Reflektionsschicht (14B) aus einer Silber (Ag), Samarium (Sm) und Kupfer (Cu) beinhaltenden Le- gierung hergestellt ist. 35

5. Ein Licht-emittierendes Gerät gemäß Anspruch 1, wobei die Reflektionsschicht (14B) aus einer Silber (Ag) als Hauptkomponente, 0.03% bis 0.5% an Samari- um (Sm) und 0.2% bis 1.0% an Kupfer beinhaltenden Legierung hergestellt ist. 40

6. Ein Licht-emittierendes Gerät gemäß Anspruch 1, wobei die Dicke der Barrièreschicht (14C) innerhalb des Bereichs von 1 nm bis 50 nm liegt. 45

7. Ein Licht-emittierendes Gerät gemäß Anspruch 1, 50

wobei die Basisschicht (13) eine planarisierende Schicht ist.

8. Ein Licht-emittierendes Gerät gemäß einer der Ansprüche 1 bis 7, wobei die Barrièreschicht (14C) aus mindestens einem aus der Gruppe selektiertem Material hergestellt ist, die Gruppe bestehend aus einem Verbund beinhaltend Indium (In), Zinn (Sn) und Sauerstoff (O) (ITO), einem Verbund beinhaltend Indium (In), Zink (Zn) und Sauerstoff (O) (IZO), Indiumoxid ( $In_2O_3$ ), Zinnoxid ( $SnO_2$ ), Zinkoxid (ZnO), Kadmiumoxid (CdO), Titanoxid ( $TiO_2$ ), Chromoxid ( $CrO_2$ ), Galliumnitrid ( $Ga_2O_3$ ) und Aluminiumoxid ( $Al_2O_3$ ). 5

9. Eine Displayeinheit umfassend ein erstes, ein zweites und ein drittes Licht-emittierendes Gerät gemäß einer der Ansprüche 1 bis 8, wobei eine Resonanzwellenlänge des ersten Licht-emittierenden Geräts einer roten Farbe entspricht, eine Resonanzwellenlänge des zweiten Licht-emittierenden Geräts (10B) einer blauen Farbe entspricht und eine Resonanzwellenlänge des dritten Licht-emittierenden Geräts (10G) einer grünen Farbe entspricht, wobei die zweite Elektrode (17) semitransparent ist und eine Resonatorstruktur durch die erste Elektrode (14), die Licht-emittierende Schicht (16) und die zweite Elektrode (17) gebildet ist. 10

10. Ein Verfahren zum Herstellen eines Licht-emittierenden Geräts, das Licht-emittierende Gerät umfassend ein Substrat (11), eine Basisschicht (13), eine erste Elektrode (14), einen Isolierfilm (15), eine Licht-emittierende Schicht (16) und eine zweite Elektrode (17), die in dieser Reihenfolge beschichtet sind, das Verfahren die Schritte umfassend:

Bilden einer Haftschicht (14A) auf der Basisschicht (13); 15

Bilden einer in der Licht-emittierenden Schicht (16) generiertes Licht reflektierende Reflektionsschicht (14B) auf der Haftschicht (14A); und

Bilden einer die Reflektionsschicht schützende Barrièreschicht (14C) auf der Reflektionsschicht (14B); 20

Bilden der ersten Elektrode (14) durch Strukturieren der Barrièreschicht (14C), der Reflektionsschicht (14B) und der Haftschicht (14A) in der Reihenfolge beginnend von der Barrièreschicht (14C); 25

Bilden der die Licht-emittierende Schicht beinhaltende Schicht auf der ersten Elektrode (14); und

Bilden der zweiten Elektrode (17) auf der die Licht-emittierende Schicht beinhaltende Schicht (16); 30

wobei die Haftschicht auch als ein Hilfsreflektionsfilm zur Reflektion des in der Licht-emittierenden Schicht generierten und durch die Reflektionsschicht passierten Lichts dient; 35

wobei die Haftschicht einen Reflektionsgrad von 50% oder mehr im Bereich des sichtbaren Lichts hat, und

wobei die Reflektionsschicht (14B) aus Silber (Ag) oder einer Silber beinhaltenden Legierung hergestellt ist und eine Dicke von 10nm bis 100nm hat. 40

11. Ein Verfahren zum Herstellen eines Licht-emittierenden Geräts gemäß Anspruch 10, wobei in dem Schritt zum Bilden der ersten Elektrode (14), nach dem die Barrièreschicht (14C) und die Reflektionsschicht (14B) strukturiert sind, die Haftschicht (14A) strukturiert wird. 45

12. Ein Verfahren zum Herstellen eines Licht-emittierenden Geräts gemäß Anspruch 10, wobei in dem Schritt zum Bilden der ersten Elektrode (14), nach dem die Barrièreschicht (14C) strukturiert ist, die Reflektionsschicht (14B) und die Haftschicht (14A) strukturiert werden. 50

13. Ein Verfahren zum Herstellen eines Licht-emittierenden Geräts gemäß Anspruch 10, wobei in dem Schritt zum Bilden der ersten Elektrode (14), die Barrièreschicht (14C), die Reflektionsschicht (14B) und die Haftschicht (14A) eine nach der anderen beginnend von der Barrièreschicht (14C) strukturiert werden. 55

14. Ein Verfahren zum Herstellen eines Licht-emittierenden Geräts gemäß einer der Ansprüche 11 bis 13, wobei die Barrièreschicht (14C) aus mindestens einem aus der Gruppe selektiertem Material hergestellt ist, die Gruppe bestehend aus einem Verbund beinhaltend Indium (In), Zinn (Sn) und Sauerstoff (O) (ITO), einem Verbund beinhaltend Indium (In), Zink (Zn) und Sauerstoff (O) (IZO), Indiumoxid ( $In_2O_3$ ), Zinnoxid ( $SnO_2$ ), Zinkoxid (ZnO), Kadmiumoxid (CdO), Titanoxid ( $TiO_2$ ), Chromoxid ( $CrO_2$ ), Galliumnitrid ( $Ga_2O_3$ ) und Aluminiumoxid ( $Al_2O_3$ ). 60

## Revendications

1. Dispositif d'émission de lumière, comprenant un substrat (11), une couche de base (13), une première électrode (14), un film isolant (15), une couche d'émission de lumière (16) et une deuxième électrode (17) lamifiés dans cet ordre, et émettant la lumière générée dans la couche d'émission de lumière (16) à travers la deuxième électrode (17), dans lequel la première électrode (14) comprend :

une couche adhésive (14A) prévue en contact avec la couche de base (13) ;  
 une couche réfléchissante (14B) prévue sur la couche adhésive (14A) pour réfléchir la lumière générée dans la couche d'émission de lumière (16) ; et  
 une couche de barrière (14C) prévue sur la couche réfléchissante (14B) pour protéger la couche réfléchissante (14B) ;

**caractérisé en ce que**

la couche adhésive sert également en tant que film réfléchissant auxiliaire réfléchissant la lumière générée dans la couche d'émission de lumière et qui est passée à travers la couche réfléchissante ; dans lequel la couche adhésive a une réflectance de 50 % ou plus dans une plage de lumière visible, et dans lequel la couche réfléchissante (14B) est constituée d'argent (Ag) ou d'un alliage comprenant de l'argent et a une épaisseur de 10 nm à 100 nm.

**2. Dispositif d'émission de lumière selon la revendication 1, dans lequel**

la couche adhésive (14A) est constituée d'un métal, d'un oxyde électriquement conducteur ou d'un composé métallique comprenant au moins un type sélectionné dans le groupe d'éléments métalliques consistant en le chrome (Cr), l'indium (In), l'étain (Sn), le zinc (Zn), le cadmium (Cd), le titane (Ti), l'aluminium (Al), le magnésium (Mg) et le molybdène (Mo).

**3. Dispositif d'émission de lumière selon la revendication 1, dans lequel**

la couche réfléchissante (14B) est constituée d'un alliage comprenant de l'argent (Ag) et au moins un type sélectionné dans le groupe consistant en le néodyme (Nd), le samarium (Sm), l'yttrium (Y), le céryum (Ce), l'europium (Eu), le gadolinium (Gd), le terbium (Tb), le dysprosium (Dy), l'erbium (Er), l'ytterbium (Yb), le scandium (Sc), le ruthénium (Ru), le cuivre (Cu) et l'or (Au).

**4. Dispositif d'émission de lumière selon la revendication 1, dans lequel**

la couche réfléchissante (14B) est constituée d'un alliage comprenant de l'argent (Ag), du samarium (Sm) et du cuivre (Cu).

**5. Dispositif d'émission de lumière selon la revendication 1, dans lequel**

la couche réfléchissante (14B) est constituée d'un alliage comprenant de l'argent (Ag) en tant que composant principal, 0,03 % en masse à 0,5 % en masse inclus de samarium (Sm) et 0,2 % en masse à 1,0 % en masse inclus de cuivre (Cu).

**6. Dispositif d'émission de lumière selon la revendication 1, dans lequel**

l'épaisseur de la couche de barrière (14C) est dans une plage de 1 nm à 50 nm inclus.

**5 7. Dispositif d'émission de lumière selon la revendication 1, dans lequel**  
 la couche de base (13) est une couche d'égalisation.

**10 8. Dispositif d'émission de lumière selon l'une quelconque des revendications 1 à 7, dans lequel la couche de barrière (14C) est constituée d'au moins un matériau sélectionné dans le groupe consistant en un composé comprenant de l'indium (In), de l'étain (Sn) et de l'oxygène (O) (ITO), un composé comprenant de l'indium (In), du zinc (Zn) et de l'oxygène (O) (IZO), l'oxyde d'indium ( $In_2O_3$ ), l'oxyde d'étain ( $SnO_2$ ), l'oxyde de zinc (ZnO), l'oxyde de cadmium (CdO), l'oxyde de titane ( $TiO_2$ ), l'oxyde de chrome ( $CrO_2$ ), le nitrate de gallium (GaN), l'oxyde de gallium ( $Ga_2O_3$ ) et l'oxyde d'aluminium ( $Al_2O_3$ ).**

**15 9. Unité d'affichage comprenant des premier, deuxième et troisième dispositifs d'émission de lumière selon l'une quelconque des revendications 1 à 8, moyennant quoi une longueur d'onde de résonance du premier dispositif d'émission de lumière (10R) correspond à une couleur rouge, une longueur d'onde de résonance du deuxième dispositif d'émission de lumière (10B) correspond à une couleur bleue et une longueur d'onde de résonance du troisième dispositif d'émission de lumière (10G) correspond à une couleur verte,**  
 moyennant quoi la deuxième électrode (17) est semi-transparente et une structure de résonateur est formée par la première électrode (14), la couche d'émission de lumière (16) et la deuxième électrode (17).

**20 10. Procédé de fabrication d'un dispositif d'émission de lumière, le dispositif d'émission de lumière comprenant un substrat (11), une couche de base (13), une première électrode (14), un film isolant (15), une couche d'émission de lumière (16) et une deuxième électrode (17) lamifiés dans cet ordre, le procédé comprenant les étapes consistant à :**

former une couche adhésive (14A) sur la couche de base (13) ;

former une couche réfléchissante (14B) réfléchissant la lumière générée dans la couche d'émission de lumière (16) sur la couche adhésive (14A) ; et

former une couche de barrière (14C) protégeant la couche réfléchissante (14B) sur la couche réfléchissante (14B) ;

former la première électrode (14) en dessinant la couche de barrière (14C), la couche réfléchissante (14B) et la couche adhésive (14A) dans

l'ordre à partir de la couche de barrière (14C) ; former la couche comprenant la couche d'émission de lumière (16) sur la première électrode (14) ; et former la deuxième électrode (17) sur la couche comprenant la couche d'émission de lumière (16) ; dans lequel la couche adhésive sert également en tant que film réfléchissant auxiliaire réfléchissant la lumière générée dans la couche d'émission de lumière et qui est passée à travers la couche réfléchissante ; et dans lequel la couche adhésive a une réflectance de 50 % ou plus dans une plage de lumière visible, dans lequel la couche réfléchissante (14B) est constituée d'argent ou d'un alliage comprenant de l'argent et a une épaisseur de 10 nm à 100 nm.

20

11. Procédé de fabrication d'un dispositif d'émission de lumière selon la revendication 10, dans lequel à l'étape de formation de la première électrode (14), après que la couche de barrière (14C) et la couche réfléchissante (14B) ont été dessinées, la couche adhésive (14A) est dessinée.
12. Procédé de fabrication d'un dispositif d'émission de lumière selon la revendication 10, dans lequel à l'étape de formation de la première électrode (14), après que la couche de barrière (14C) a été dessinée, la couche réfléchissante (14B) et la couche adhésive (14A) sont dessinées.
13. Procédé de fabrication d'un dispositif d'émission de lumière selon la revendication 10, dans lequel à l'étape de formation de la première électrode (14), la couche de barrière (14C), la couche réfléchissante (14B) et la couche adhésive (14A) sont dessinées une par une à partir de la couche de barrière (14C).
14. Procédé de fabrication d'un dispositif d'émission de lumière selon l'une des revendications 11 à 13, dans lequel la couche de barrière (14C) est constituée d'au moins un matériau sélectionné dans le groupe consistant en un composé comprenant de l'indium (In), de l'étain (Sn) et de l'oxygène (O) (ITO), un composé comprenant de l'indium (In), du zinc (Zn) et de l'oxygène (O) (IZO), l'oxyde d'indium ( $In_2O_3$ ), l'oxyde d'étain ( $SnO_2$ ), l'oxyde de zinc ( $ZnO$ ), l'oxyde de cadmium ( $CdO$ ), l'oxyde de titane ( $TiO_2$ ), l'oxyde de chrome ( $CrO_2$ ), le nitrate de gallium (GaN), l'oxyde de gallium ( $Ga_2O_3$ ) et l'oxyde d'aluminium ( $Al_2O_3$ ).

45

50

55

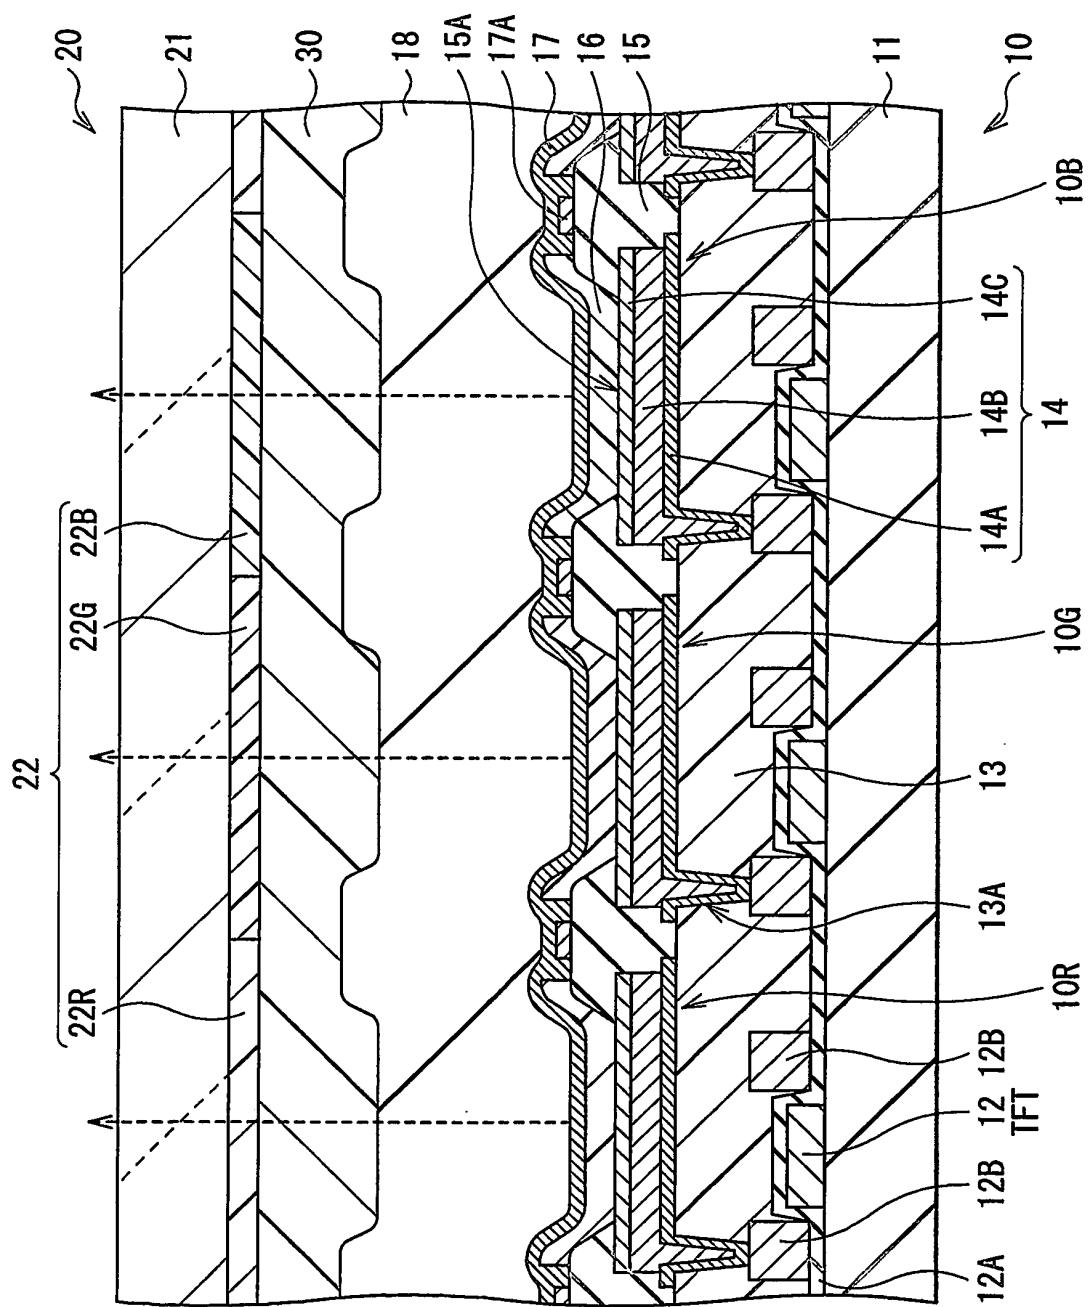


FIG. 1

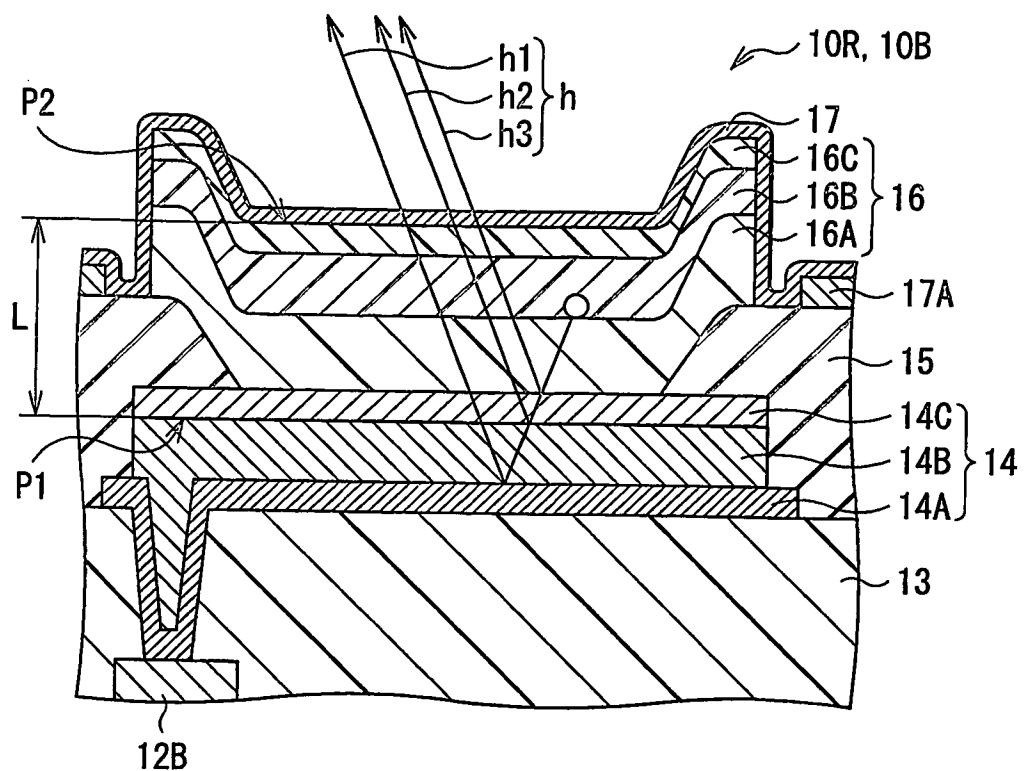


FIG. 2

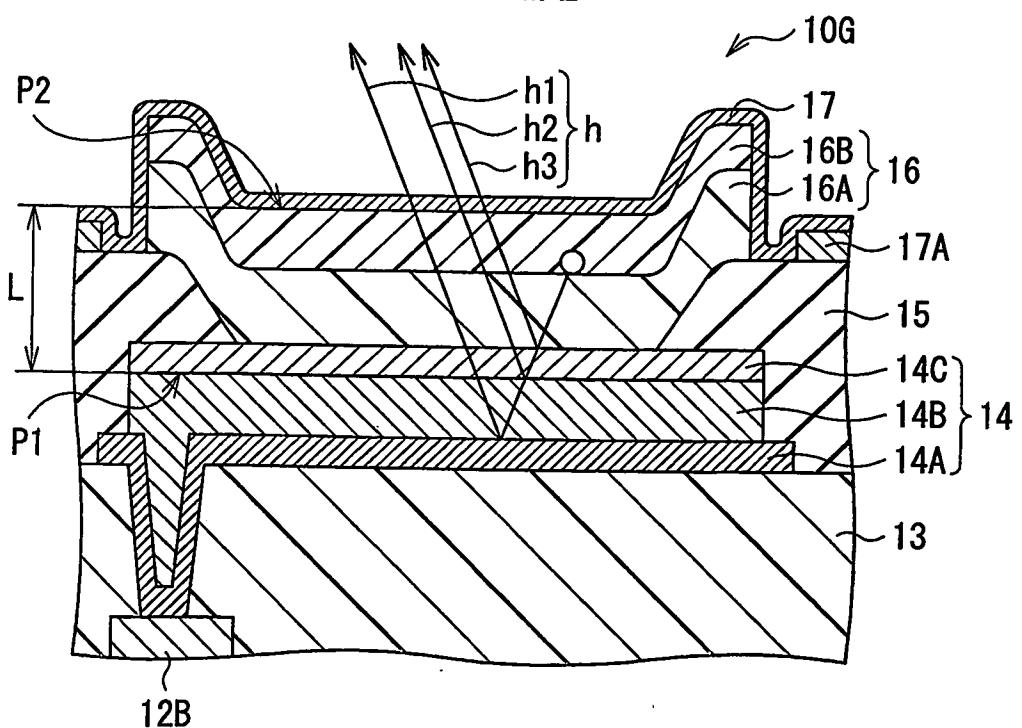
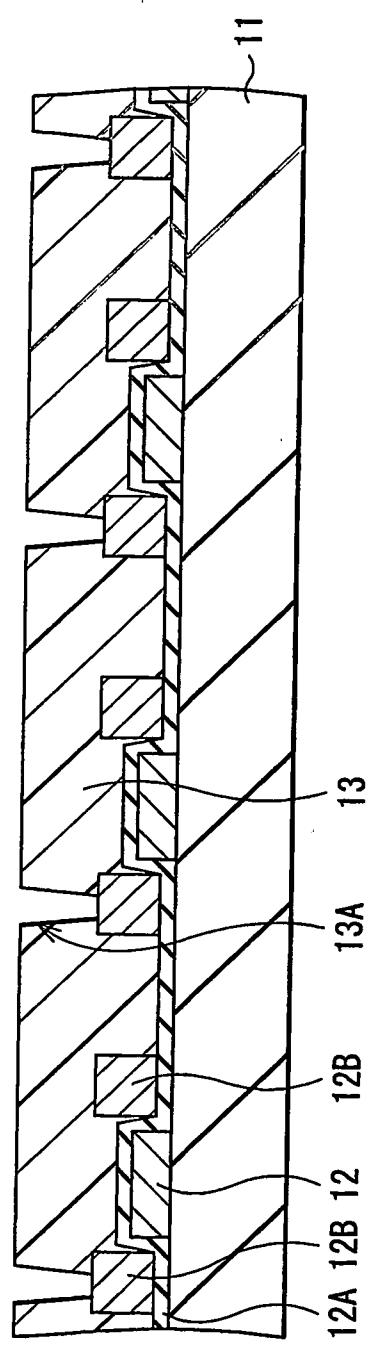
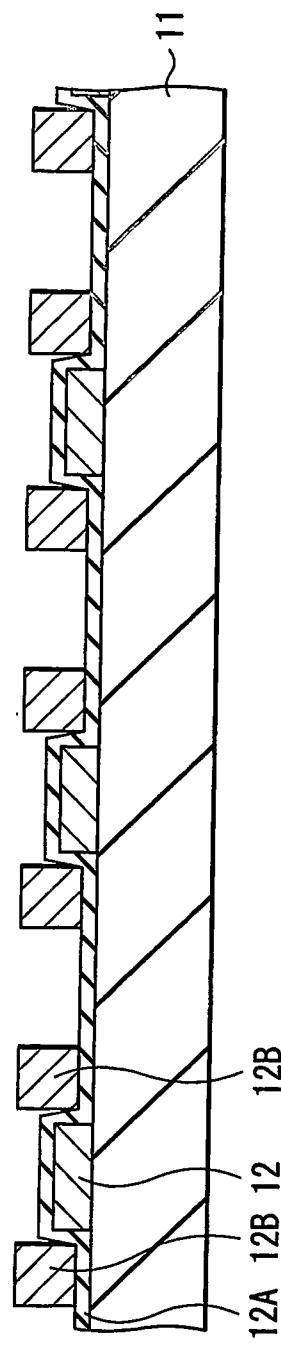


FIG. 3



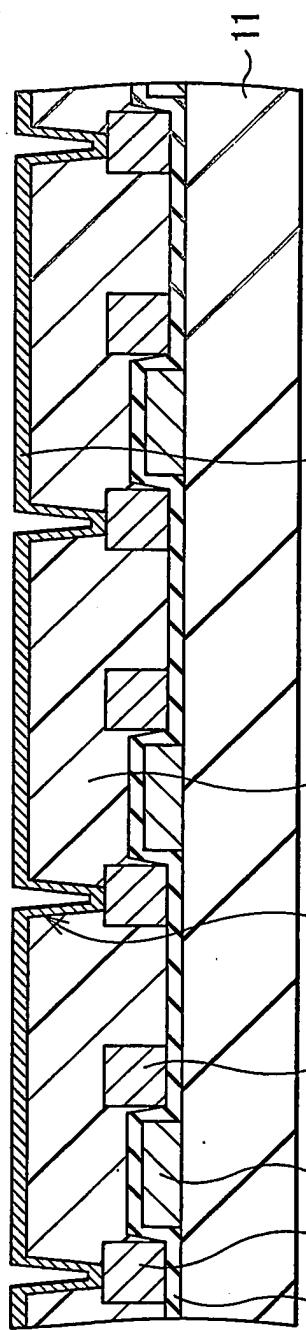


FIG. 5A

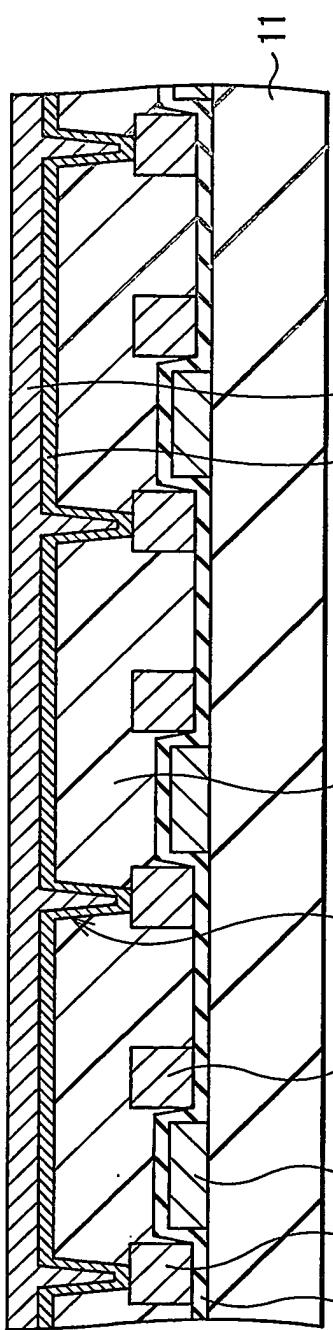


FIG. 5B

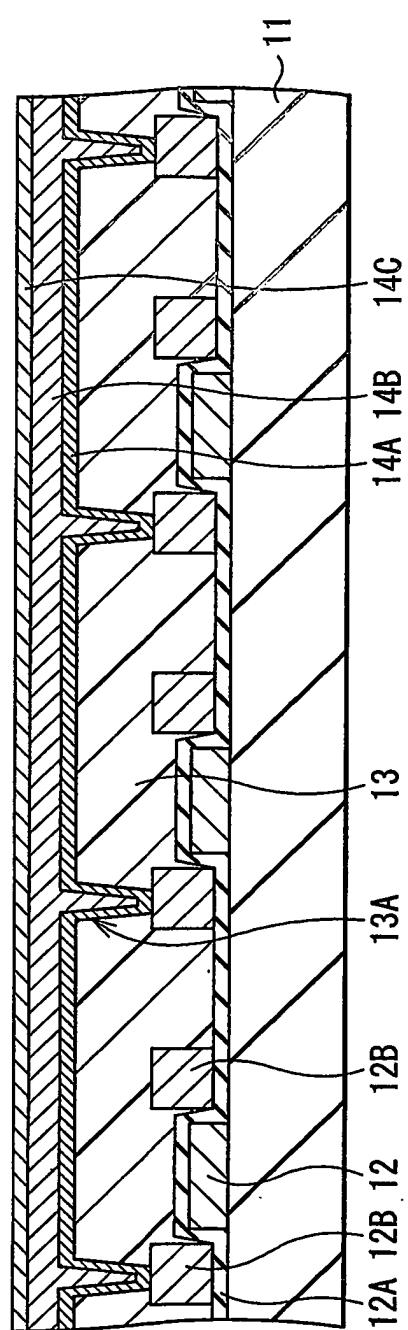


FIG. 5C

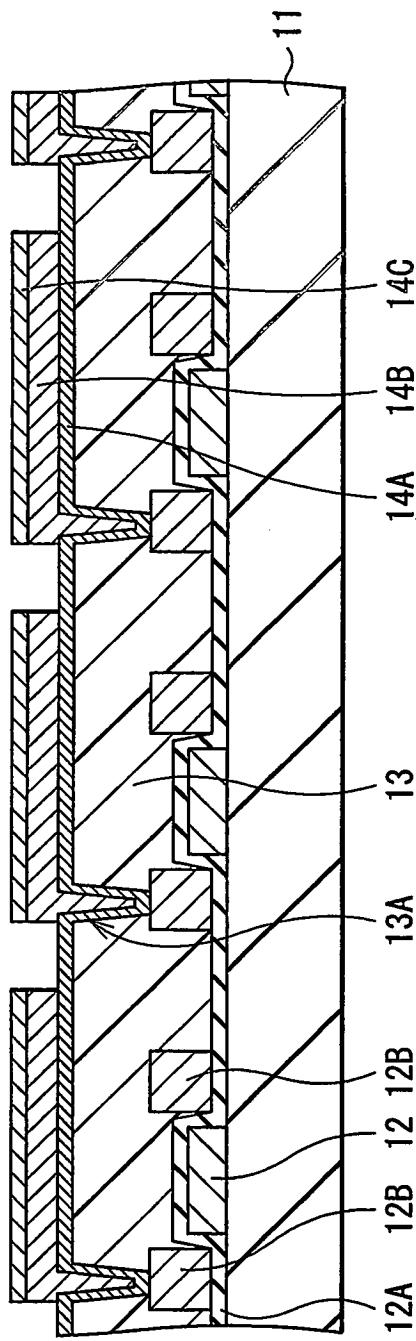


FIG. 6A

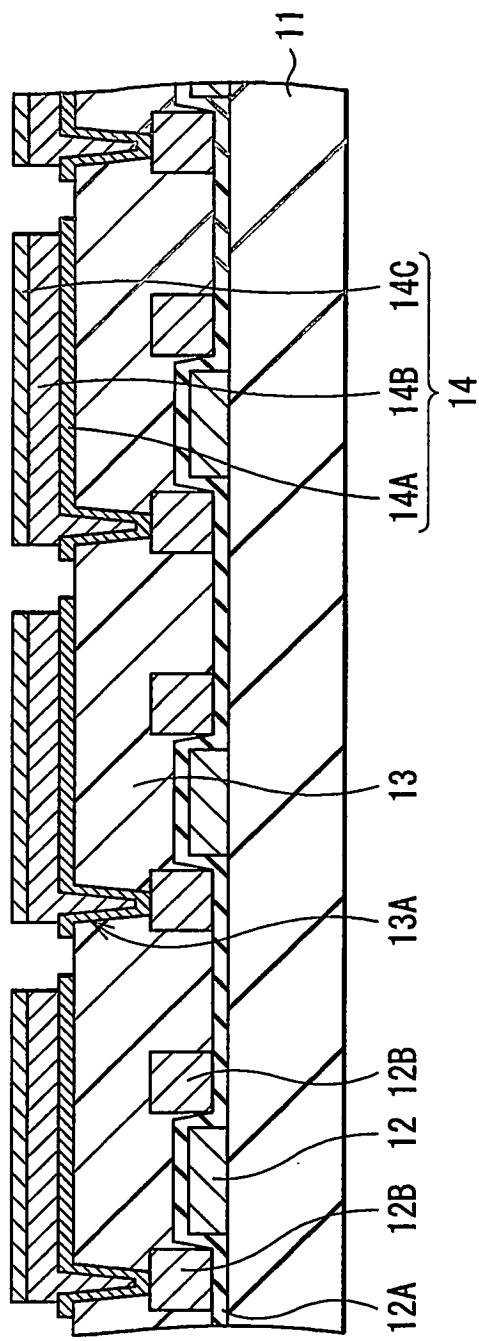


FIG. 6B

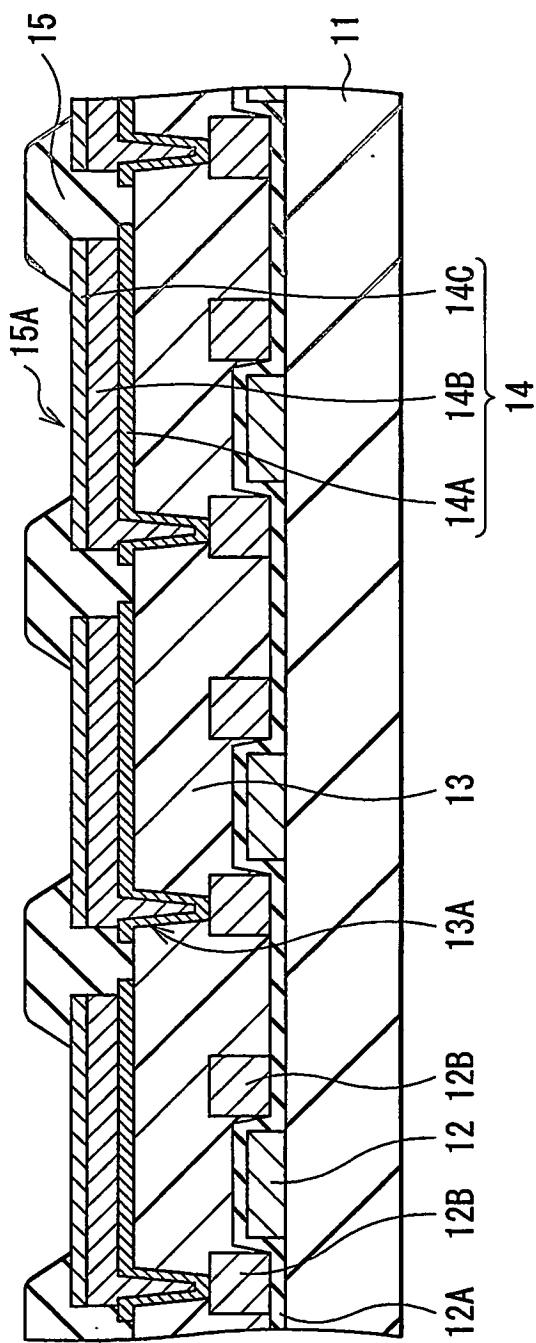


FIG. 7A

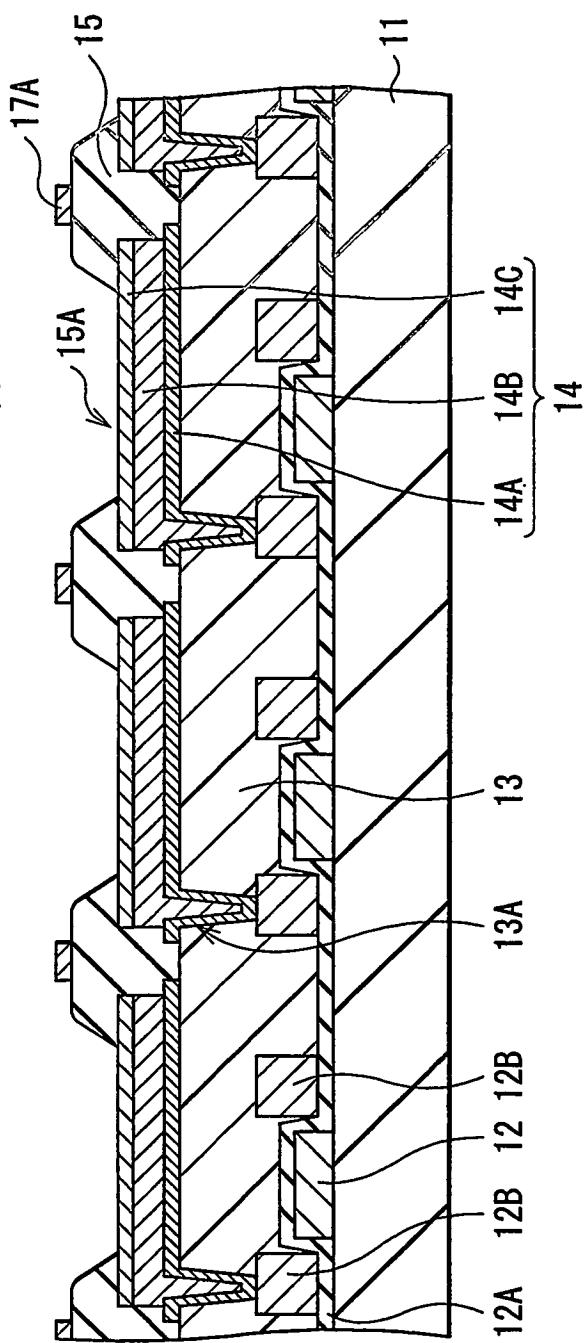


FIG. 7B

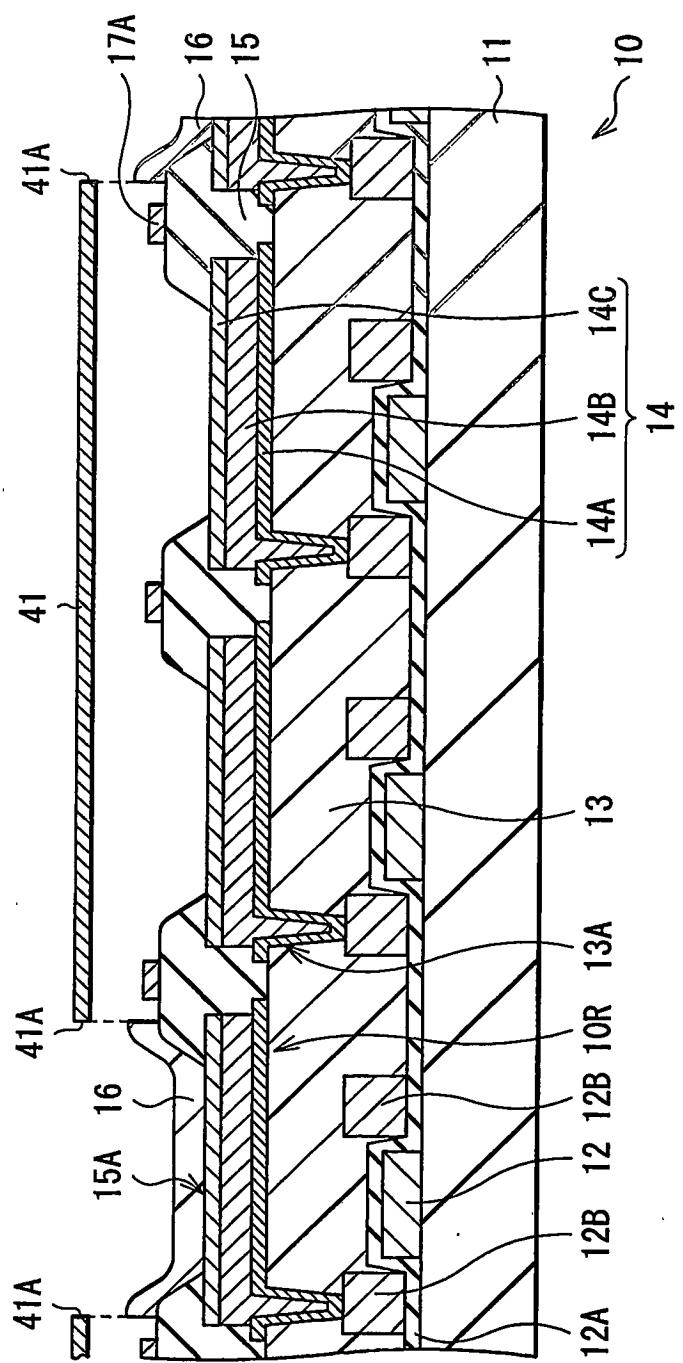


FIG. 8

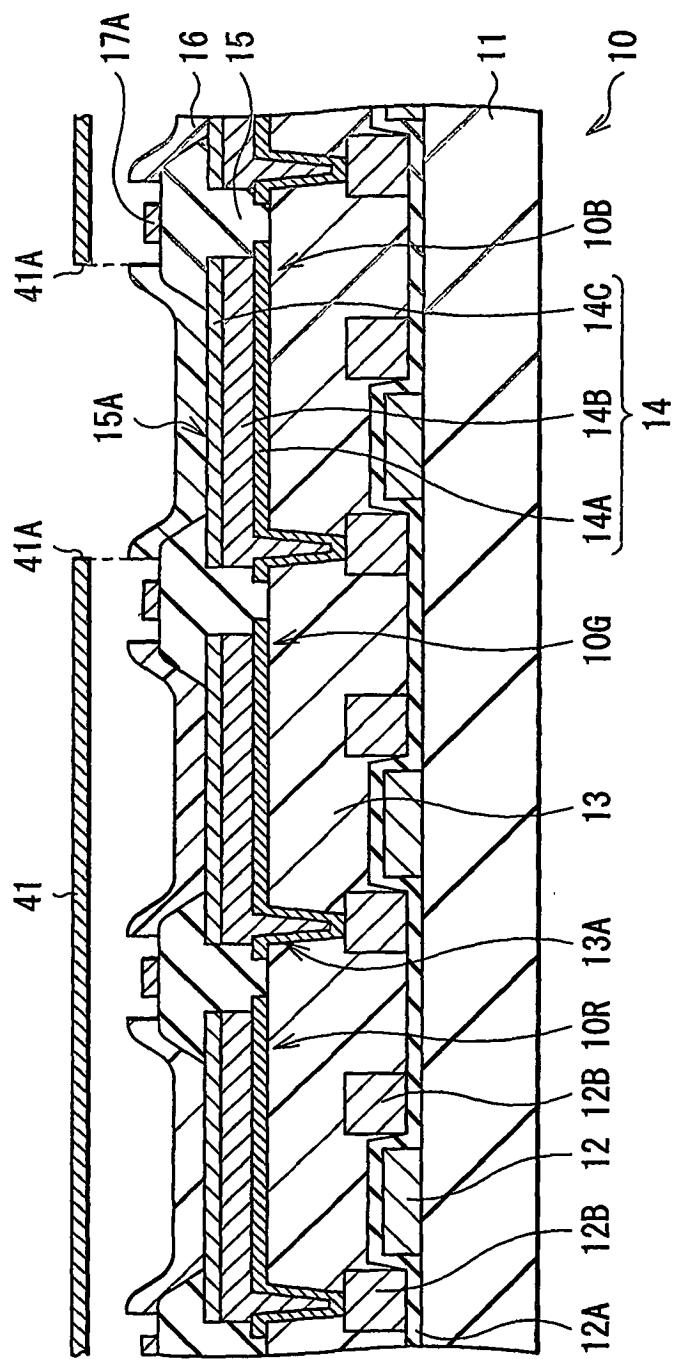
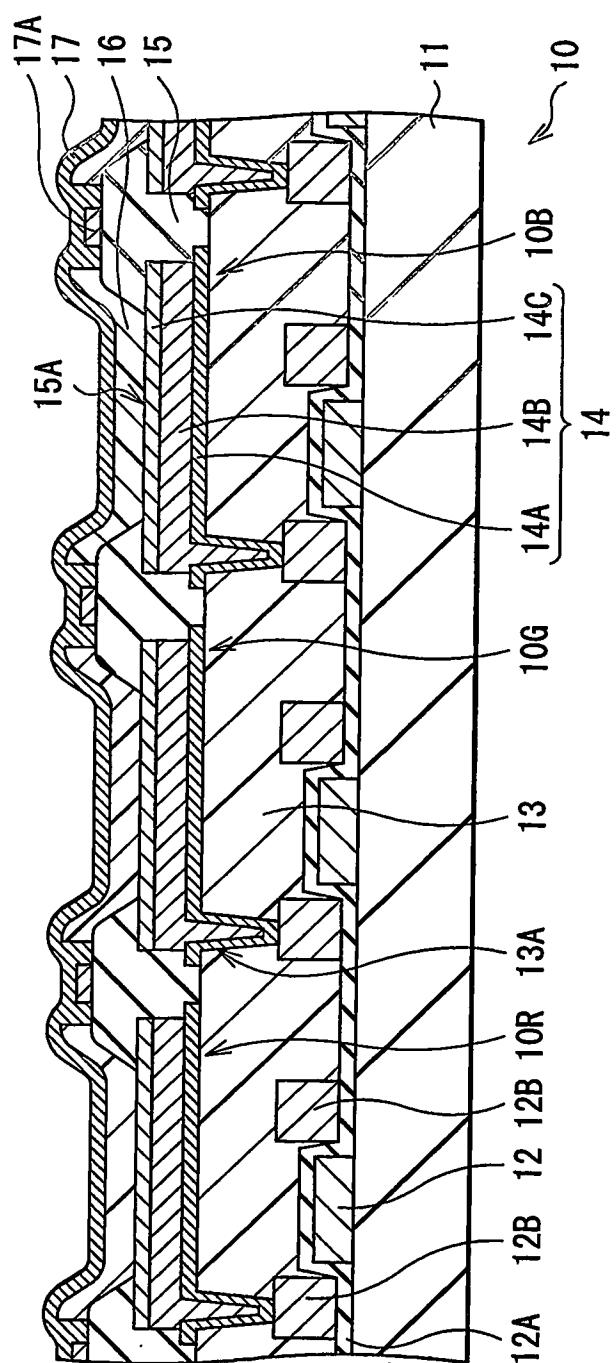
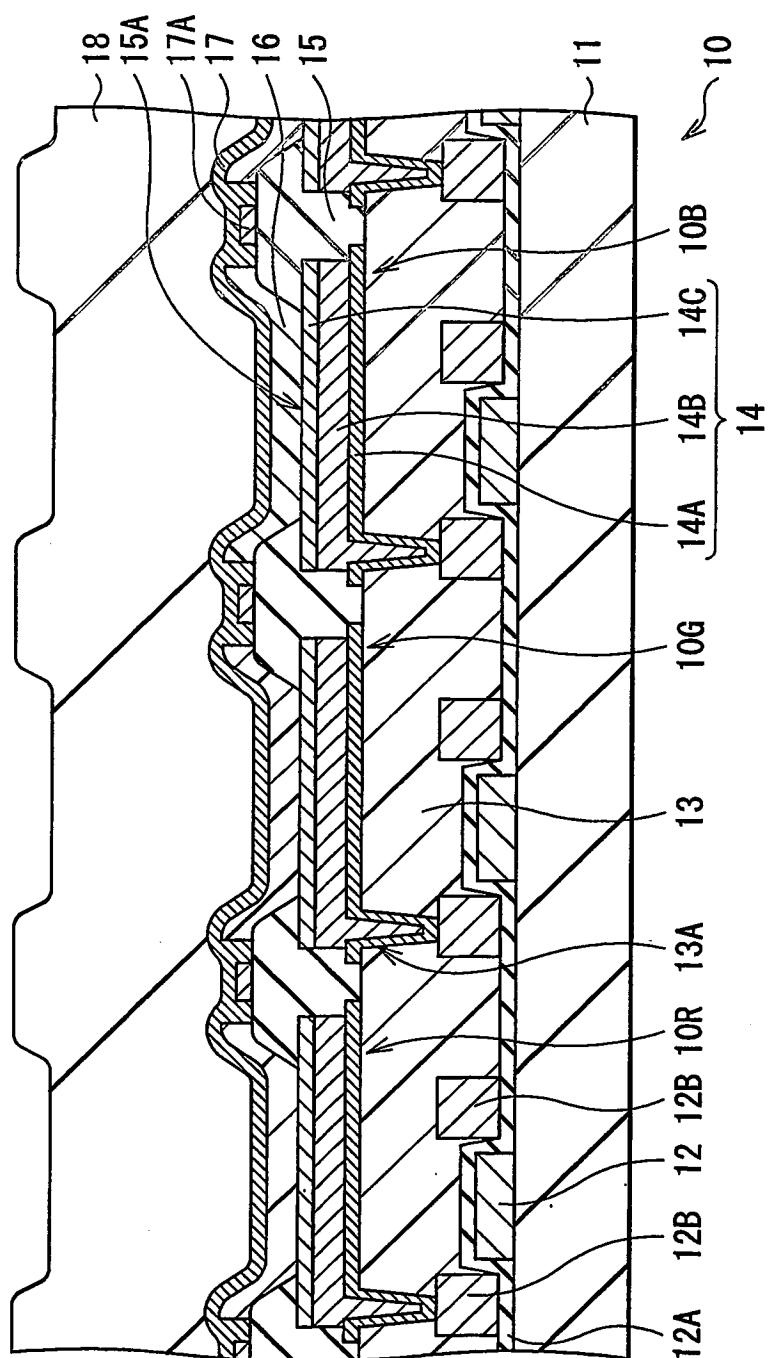


FIG. 9





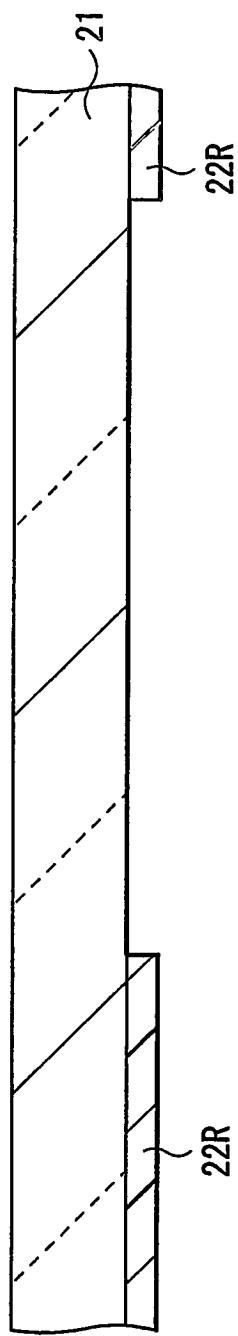


FIG. 12A

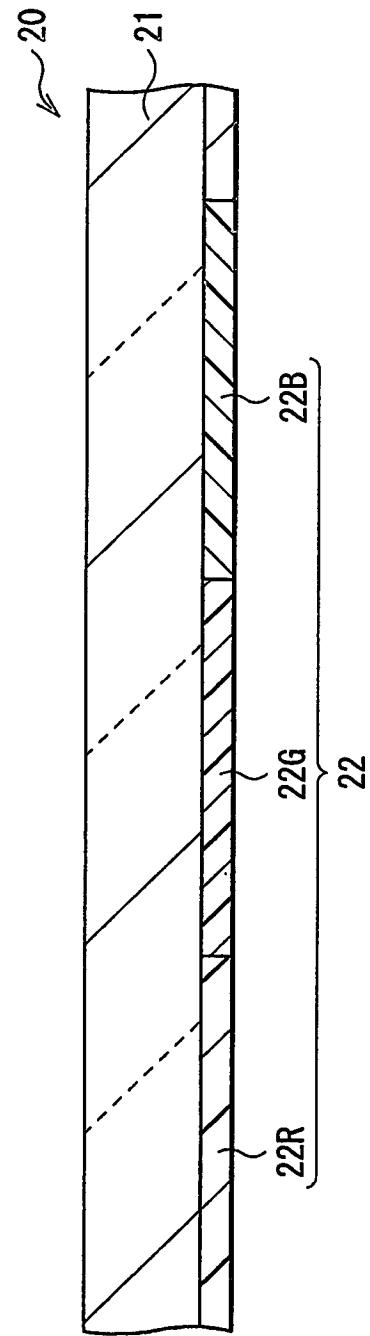
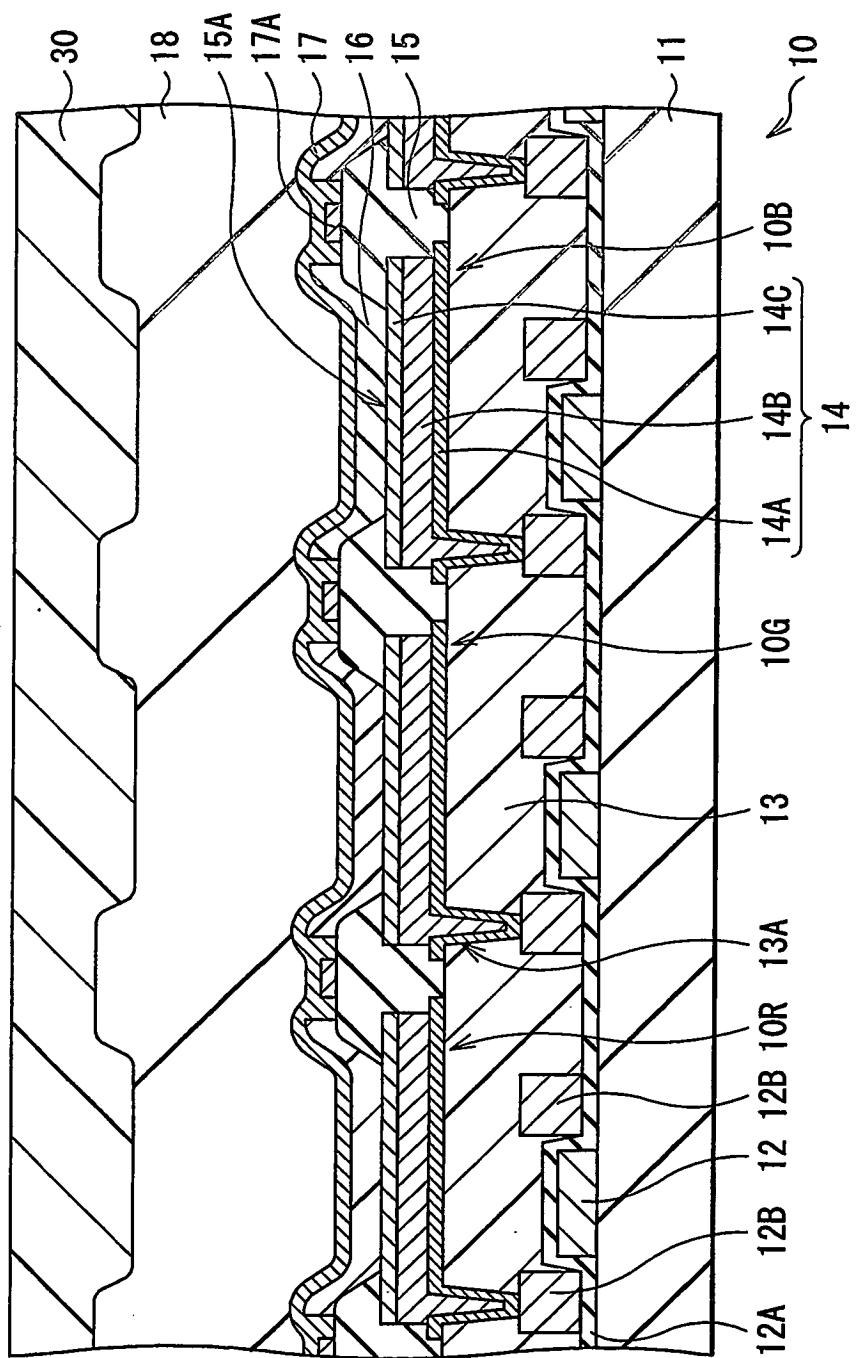
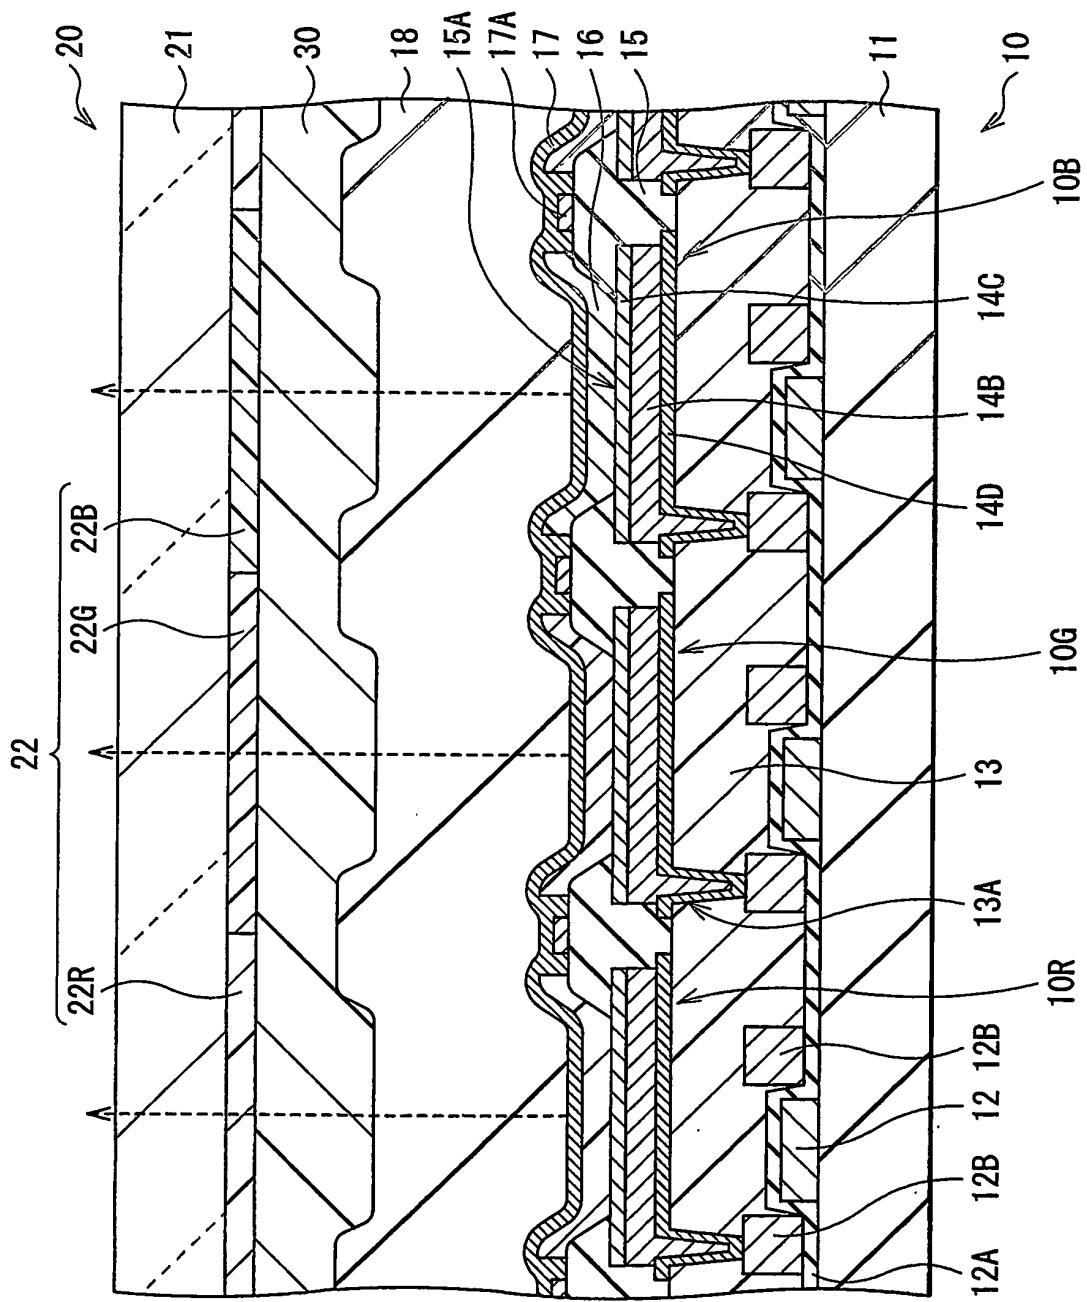


FIG. 12B





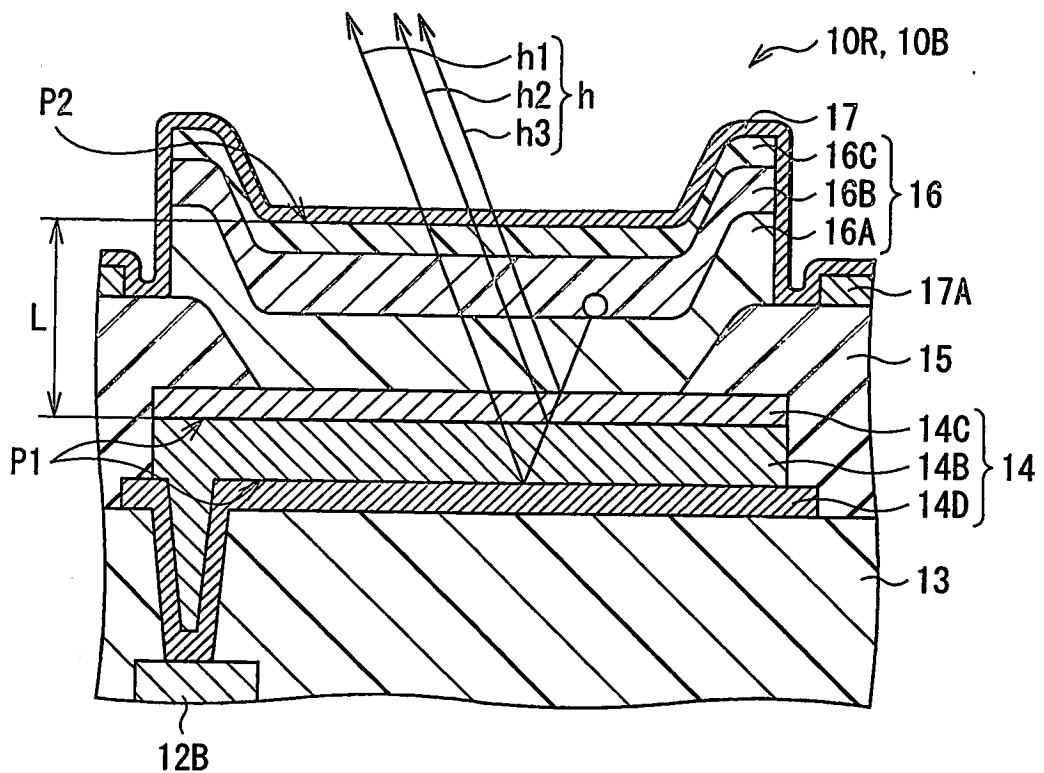


FIG. 15

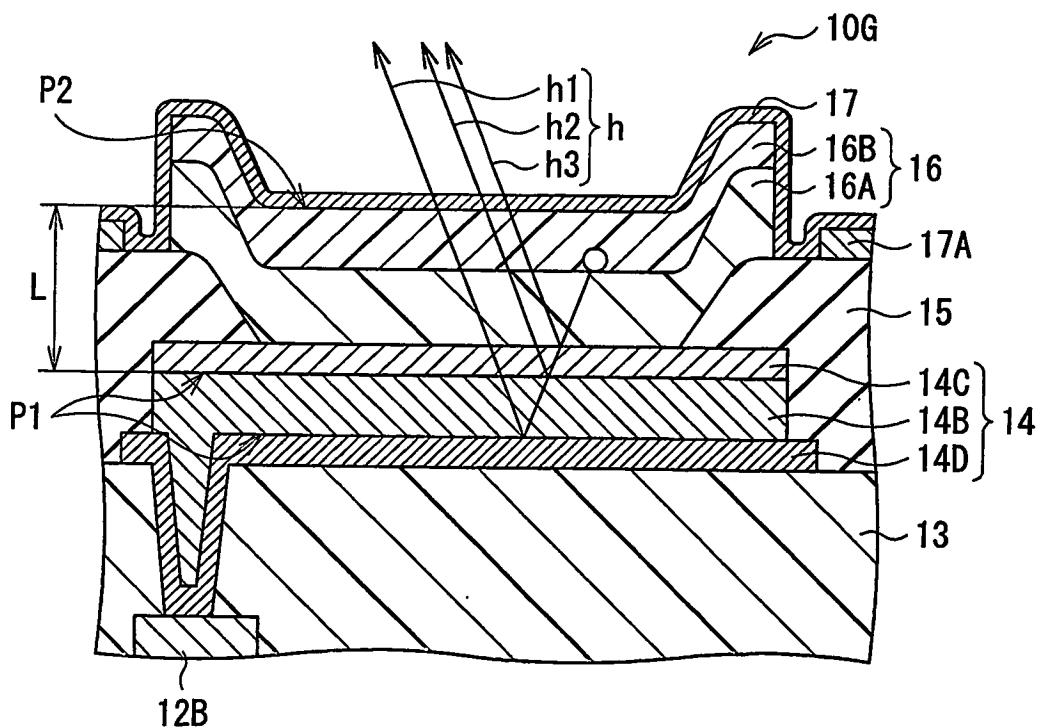


FIG. 16

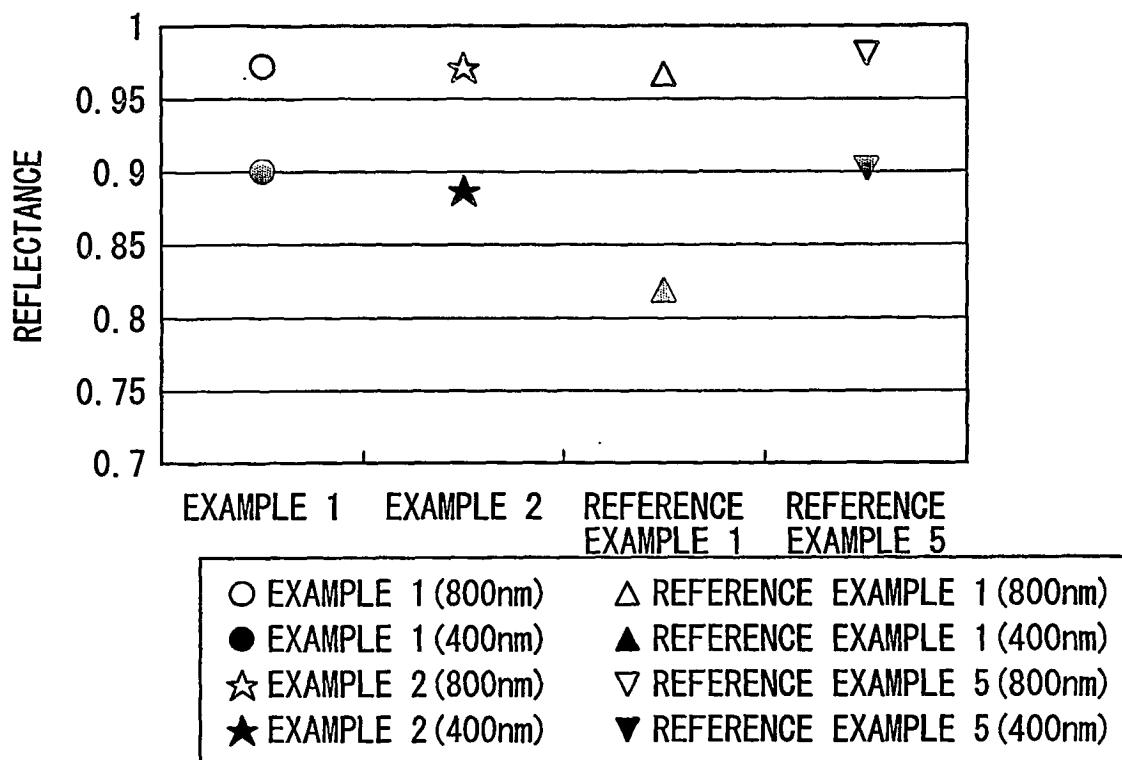


FIG. 17

114

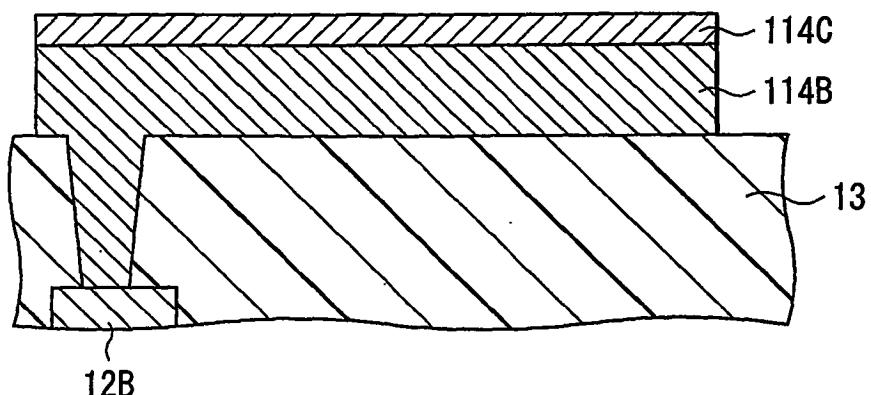


FIG. 18

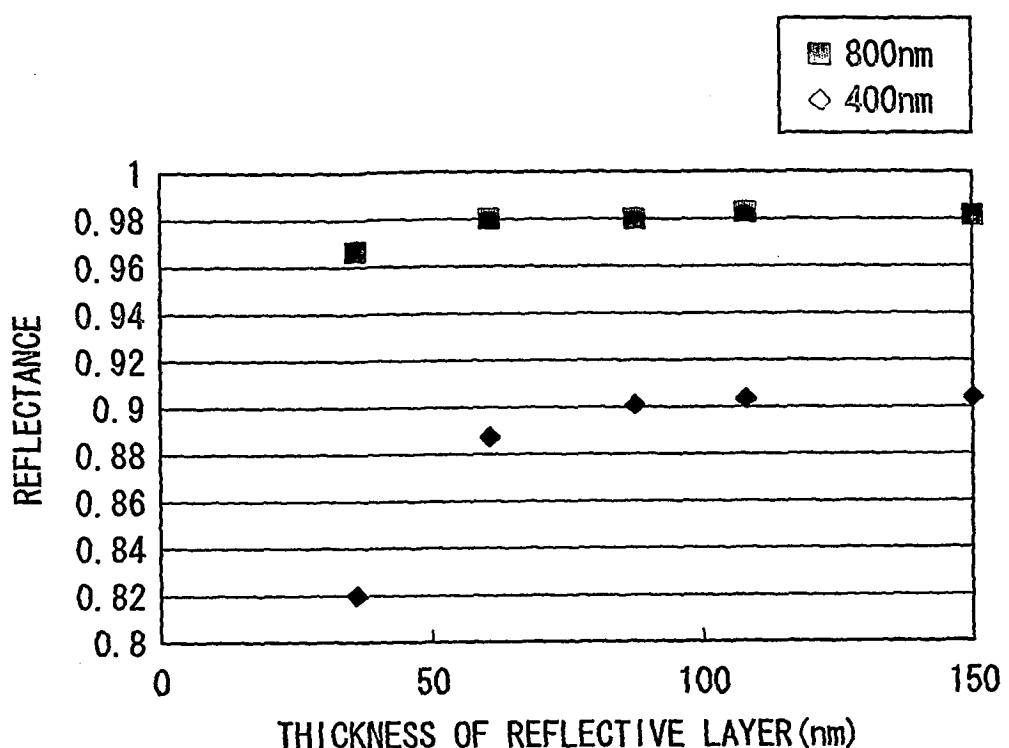


FIG. 19

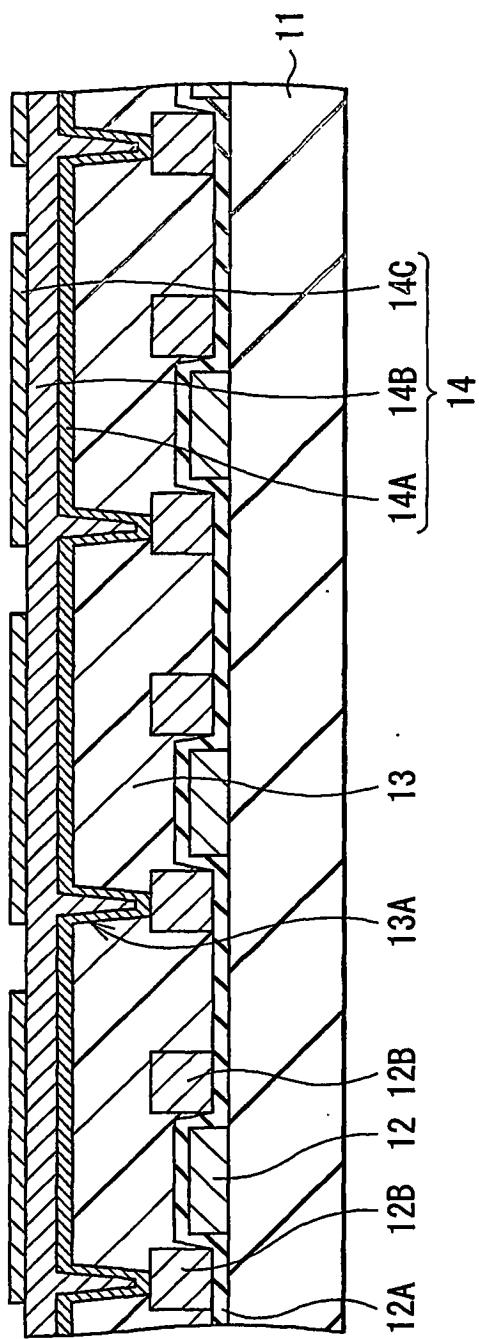


FIG. 20A

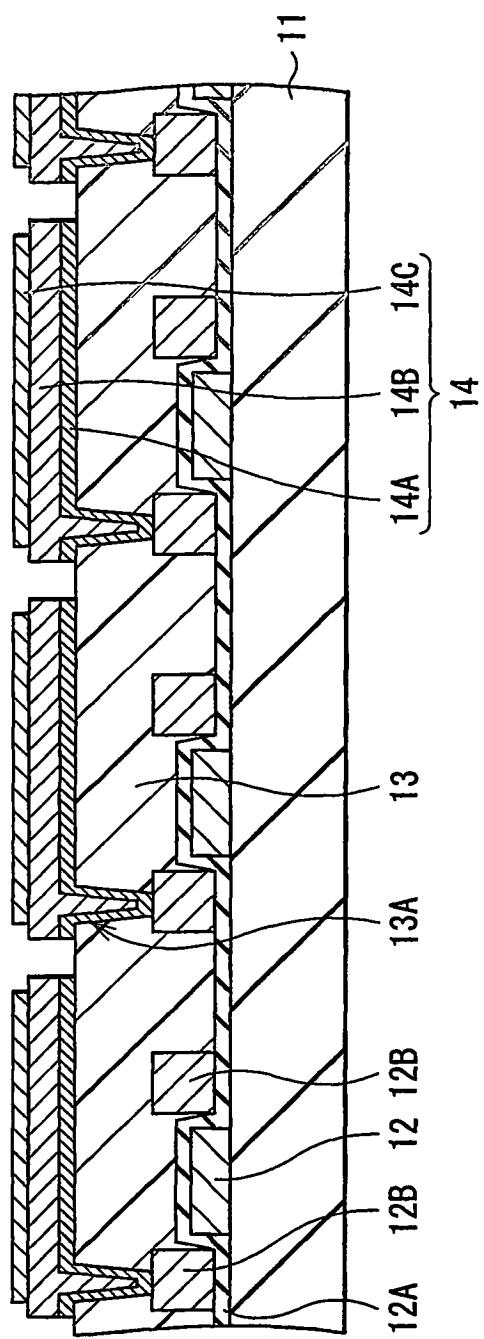


FIG. 20B

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2002334792 A [0004]
- JP 2002216976 A [0005]
- JP 2001004993 A [0008]
- JP 2002246185 A [0008]
- WO 03005115 A1 [0008]
- US 20020117962 A [0008]
- US 6081310 A [0008]
- WO 03022011 A [0008]

专利名称(译)	发光装置，其制造方法以及显示单元		
公开(公告)号	<a href="#">EP1606848B1</a>	公开(公告)日	2012-08-08
申请号	EP2004722655	申请日	2004-03-23
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	YOKOYAMA SEIICHI HANAWA KOJI SHIBASAKI TAKANORI HIRANO TAKASHI		
发明人	YOKOYAMA, SEIICHI HANAWA, KOJI SHIBASAKI, TAKANORI HIRANO, TAKASHI		
IPC分类号	H01L51/52 H05B33/26 G09F9/30 H01L27/32 H01L51/50 H05B33/10 H05B33/14 H05B33/24		
CPC分类号	H01L51/5218 H01L27/3211 H01L27/3244 H01L51/5228 H01L51/5234 H01L51/5265 H01L51/5271 H01L2251/5315		
优先权	2003299258 2003-08-22 JP 2003085868 2003-03-26 JP 2003153053 2003-05-29 JP		
其他公开文献	<a href="#">EP1606848A1</a>		
外部链接	<a href="#">Espacenet</a>		

### 摘要(译)

本发明提供一种能够防止第一电极分离或改变以获得高性能的发光装置，以及制造该发光装置的方法和显示单元。将作为阳极(14)的第一电极，绝缘膜(15)，包括发光层(16)的有机层和作为阴极(17)的第二电极依次层叠在具有基板的基板上。平坦化层(13)作为其间的基层。第一电极(14)具有这样的结构，其中粘合剂层(14A)，反射层(14B)和阻挡层(14C)从基板依次层叠。通过阻挡层可以防止反射层的改变，并且可以防止反射层通过粘合层与平坦化层分离。通过在平坦化层上形成粘合剂层，反射层和阻挡层，然后从阻挡层依次图案化它们来形成第一电极。

(Mathematical Formula 1)

$$(2L)/\lambda + \Phi/(2\pi) = m$$