



(11) **EP 1 627 603 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
19.10.2011 Bulletin 2011/42

(51) Int Cl.:
A61B 8/12 ^(2006.01) **B06B 1/06** ^(2006.01)
G01S 15/89 ^(2006.01)

(21) Application number: **05017874.8**

(22) Date of filing: **17.08.2005**

(54) **Ultrasonic endoscope and ultrasonic endoscopic apparatus**

Ultraschallendoskop und Ultraschallendoskopiegerät

Endoscope ultrasonique et appareil d'endoscope à ultra-sons

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **20.08.2004 JP 2004240787**

(43) Date of publication of application:
22.02.2006 Bulletin 2006/08

(73) Proprietor: **FUJIFILM Corporation**
Minato-ku
Tokyo (JP)

(72) Inventors:
• **Satoh, Yoshiaki**
Ashigarakami-gun,
Kanagawa 258-8538 (JP)
• **Tsujita, Kazuhiro**
Ashigarakami-gun,
Kanagawa 258-8538 (JP)

(74) Representative: **Klunker . Schmitt-Nilson . Hirsch**
Patentanwälte
Destouchesstrasse 68
80796 München (DE)

(56) References cited:
US-A- 4 448 075 US-A- 4 841 977
US-A- 5 081 993 US-A- 5 630 873
US-A- 5 685 311 US-A1- 2003 213 305

- **SCHWARZ H P ET AL INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS: "A 100-ELEMENT ULTRASONIC CIRCULAR ARRAY FOR ENDOSCOPIC APPLICATION IN MEDICINE AND NDT" PROCEEDINGS OF THE ANNUAL CONFERENCE OF THE ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY. PHILADELPHIA, NOV. 1 - 4, 1990, NEW YORK, IEEE, US, vol. VOL. 1 CONF. 12, 1 November 1990 (1990-11-01), pages 287-290, XP000239520**

EP 1 627 603 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an ultrasonic endoscope according to the preamble of claim 1, capable of being inserted into a body of a patient and imaging ultrasonic tomographic images for medical diagnoses and an ultrasonic endoscopic apparatus including such an endoscope.

Description of a Related Art

[0002] Recent years, an ultrasonic endoscope has been used for medical diagnoses by inserting it into a body of a patient and imaging ultrasonic tomographic images. In such an ultrasonic endoscope, generally, a mechanical radial scanning method of performing scanning with viewing angle of 360° by mechanically rotating an array including plural ultrasonic transducers (ultrasonic vibrators) that transmit and receive ultrasonic waves has been adopted.

[0003] However, according to the mechanical radial scanning method, compared to a scanning method of performing scanning with viewing angle of 90° using a convex ultrasonic transducer array in an external ultrasonic imaging apparatus, in the case where conditions of sound ray density, scanning depth, etc. are set into the same condition, there is a problem that scanning time (frame period) for obtaining an image for one frame becomes longer in order to perform scanning with wide viewing angle and the frame rate becomes low.

[0004] On the other hand, an electronic radial scanning method of performing scanning with viewing angle of 360° by electronic scanning has been proposed. For example, Kinichi Takeda et al., "The Experience of Electric Radial Endoscopic Ultrasonography on Gastroenterology", Jpn JMed Ultrasonics, Vol. 31, Supplement (2004), 77-C062, pp. 238 discloses results from studies on efficacy and problems of an electronic radial ultrasonic endoscope based on experiences of using the electronic radial ultrasonic endoscope for various digestive system diseases.

[0005] Further, Japanese Patent Application Publication JP-A-2-134142 discloses an electronic radial ultrasonic beam apparatus having improved resolving power in which a flexible substrate on which plural ultrasonic vibrators are provided in a line is formed in a cylindrical shape and an interval between ultrasonic vibrators in the joint part of the flexible substrate is set to an integral multiple of an arrangement interval of the respective vibrators. Further, the apparatus includes drive element switching circuits and delay lines for enabling scanning operation at an interval position between the ultrasonic vibrators in the joint part by driving ultrasonic vibrators adjacent to the interval position (page 2, right upper col-

umn, line 14 to left lower column, line 3; page 4, right lower column, lines 2-10; and Fig. 3).

[0006] However, in the ultrasonic endoscope according to the electronic radial scanning method, in order to obtain a B-mode ultrasonic tomographic image with viewing angle of 360°, it is also required to sequentially transmit ultrasonic beams (sound rays) SL1 to SL360 in a frame period T as shown in Fig. 11A while varying the positions of ultrasonic transducers to be used along a circumferential direction as shown in Fig. 11B. Accordingly, compared to the case of performing scanning operation with viewing angle of 90° using a convex ultrasonic transducer array, the frame period T becomes about four times and the frame rate is reduced to about one-quarter.

[0007] Further, in the electronic radial ultrasonic endoscope, in the case where bloodstream information is obtained by the Doppler method, in order to improve the S/N ratio of minute bloodstream information, plural pulses are sequentially transmitted in the same direction. For example, as shown in Fig. 11D, four ultrasonic beams SL1-1 to SL1-4 are sequentially transmitted in the first direction, and the transmission is repeated while varying the transmission direction, and finally, four ultrasonic beams SL360-1 to SL360-4 are sequentially transmitted in the 360th direction. In this case, compared to the case of imaging the B-mode tomographic image as shown in Figs. 11A and 11B, the frame period T becomes about four times (4T) and the frame rate is reduced to about one-quarter as shown in Fig. 11C.

[0008] In accordance with the preamble of claim 1, US-A-5 081 993 discloses an ultrasonic endoscope having an angular arrangement of ultrasonic transducers connected in a predetermined manner in order to activate the transducers in a controlled manner. The interconnections may be such that the transducers may be activated in parallel. This provides for ultrasonic beams that may be simultaneously transmitted in each of plural angle regions, e.g. each comprising 90°.

[0009] US 2003/213305 A1 discloses a dynamically configured ultrasonic transducer element which comprises an array of capacitive transducer elements. US-A-5 685 311 discloses an ultrasonic probe having an electronic radio transducer with plural piezoelectric elements. The piezoelectric elements are disposed at the outer periphery surface of a cylinder. A plurality of electrodes are provided on both major surfaces thereof.

[0010] US-A-4 841 977 discloses an acoustic transducer system in which miniature ultrasound crystals are mounted on a carriage for mounting an array of ultra thin transducers.

SUMMARY OF THE INVENTION

[0011] The present invention is achieved in view of the above-mentioned problems. An object of the present invention is to improve a frame rate in electronic radial scanning operation in an ultrasonic endoscope capable

of being inserted into a body of a patient and imaging ultrasonic tomographic images.

[0012] In order to solve the above-mentioned problems, an ultrasonic endoscope according to the present invention comprises the features of claim 1.

[0013] Further, an ultrasonic endoscopic apparatus according to the present invention comprises the features of claim 4 or claim 7.

[0014] According to the present invention, the frame rate can be improved by simultaneously transmitting the same number of ultrasonic beams at a certain angle interval in each of plural angle regions formed by dividing a scanning angle region by a predetermined angle. Further, in the case where the angle interval of the simultaneously transmitted ultrasonic beams is set to 90°, an influence of crosstalk between plural ultrasonic beams is reduced and image quality of ultrasonic tomographic images can be uniformized. Furthermore, the number of interconnections between the ultrasonic transducer unit and the main body (ultrasonic observation apparatus) is reduced, and thereby, the ultrasonic endoscope can be downsized while the cost is reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Fig. 1 is a block diagram showing a constitution of an ultrasonic endoscope apparatus 1 according to one embodiment of the present invention;

Fig. 2 shows a structure of an ultrasonic endoscope 2 shown in Fig. 1;

Fig. 3 is an enlarged view showing a tip of the ultrasonic endoscope 2 shown in Fig. 2;

Fig. 4 shows a constitution of an ultrasonic transducer unit 40 shown in Fig. 2;

Figs. 5A to 5E are charts for explanation of a frame rate when the ultrasonic endoscope 2 shown in Fig. 1 is driven in B-mode;

Figs. 6A to 6E are charts for explanation of a frame rate when the ultrasonic endoscope 2 shown in Fig. 1 is driven in Doppler mode with frame rate priority;

Figs. 7A to 7E are charts for explanation of a frame rate when the ultrasonic endoscope 2 shown in Fig. 1 is driven in Doppler mode with sensitivity priority;

Fig. 8 is a diagram for explanation of steering operation at boundaries between sub regions;

Fig. 9 shows an example of combination of frame rate and sensitivity;

Fig. 10 shows a slide switch for selection of one of combinations of frame rate and sensitivity; and

Figs. 11A to 11D are charts for explanation of frame rates in a conventional ultrasonic endoscope.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Hereinafter, preferred embodiments of the present invention will be described in detail by referring

to the drawings. The same reference numbers will be assigned to the same component elements and the description thereof will be omitted.

[0017] As shown in Fig. 1, an ultrasonic endoscope apparatus 1 according to one embodiment of the present invention includes an electronic radial ultrasonic endoscope 2, an ultrasonic observation apparatus 3 to which the ultrasonic endoscope 2 is connectable, a display device 4 connected to the ultrasonic observation apparatus 3.

[0018] The ultrasonic observation apparatus 3 includes a console 11, a CPU (central processing unit) 12, first and second switches SW1 and SW2, a transmitting circuit 14, a receiving circuit 15, a B-mode processing unit 16, a Doppler processing unit 17, a digital scan converter (DSC) 18, an image memory 19, and a digital/analog converter (D/A converter) 20.

[0019] As shown in Fig. 2, the ultrasonic endoscope 2 includes an insertion part 31, an operation part 32, a connecting cord 33, and a universal cord 34.

[0020] The insertion part 31 of the ultrasonic endoscope 2 has an elongated flexible tubular shape so as to be inserted into a body of a patient. The operation part 32 is provided at the base end of the insertion part 31, connected to the ultrasonic observation apparatus 3 via the connecting cord 33 and connected to a light source device (not shown) via the universal cord 34.

[0021] In the insertion part 31 of the ultrasonic endoscope 2, an illumination window and an observation window are provided. An illumination lens for outputting illumination light supplied via a light guide from the light source device is attached to the illumination window. These form an illumination optical system. Further, an objective lens is attached to the observation window, and, in a position where the objective lens forms an image, an input end of an image guide or solid-state image sensor such as a CCD camera is disposed. These form an observation optical system.

[0022] Fig. 3 is an enlarged view showing the tip of the ultrasonic endoscope 2 shown in Fig. 2. At the tip of the insertion part 31 of the ultrasonic endoscope 2, an ultrasonic transducer unit 40 in which plural ultrasonic transducers are arranged on the circumference thereof. The ultrasonic transducer unit 40 transmits an ultrasonic beam according to drive signals supplied from the transmitting circuit 14 of the ultrasonic observation apparatus 3, receives ultrasonic echoes reflected from a target part or the like, and outputs plural reception signals to the receiving circuit 15 of the ultrasonic observation apparatus 3. Further, at the tip of the insertion part 31 of the ultrasonic endoscope 2, a hole is formed from which a treatment tool or the like inserted from a treatment tool insertion hole 35 provided in the operation part 32 is protruded.

[0023] As shown in Fig. 4, the ultrasonic transducer unit 40 is formed by arranging 360 ultrasonic transducers T1 to T360 on the circumference thereof. Here, the ultrasonic transducers T1 to T360 are grouped as below,

in order to divide a scanning angle region with viewing angle of 360° into four divisional regions (first to fourth divisional regions AR1 to AR4) by 90°, perform radial scanning by transmitting four ultrasonic beams with the same timing in the first to fourth divisional regions AR1 to AR4, respectively, and holding the intervals of the four ultrasonic beams transmitted with the same timing at 90°.

[0024] The first group of ultrasonic transducers consists of 45 ultrasonic transducers T1 to T45 that belong to a first sub region SA1 of two sub regions (first and second sub regions SA1 and SA2) formed by dividing the first divisional region AR1 shown in Fig. 4 by 45°. Accordingly, the range of scanning by the ultrasonic transducers T1 to T45 in the first group corresponds to the range of the first sub region SA1.

[0025] The second group of ultrasonic transducers consists of 45 ultrasonic transducers T46 to T90 that belong to the above-mentioned second sub region SA2. Accordingly, the range of scanning by the ultrasonic transducers T46 to T90 in the second group corresponds to the range of the second sub region SA2.

[0026] The third group of ultrasonic transducers consists of 45 ultrasonic transducers T91 to T135 that belong to a third sub region SA3 of two sub regions (third and fourth sub regions SA3 and SA4) formed by dividing the second divisional region AR2 shown in Fig. 4 by 45°. Accordingly, the range of scanning by the ultrasonic transducers T91 to T135 in the third group corresponds to the range of the third sub region SA3.

[0027] The fourth group of ultrasonic transducers consists of 45 ultrasonic transducers T136 to T180 that belong to the above-mentioned fourth sub region SA4. Accordingly, the range of scanning by the ultrasonic transducers T136 to T180 in the fourth group corresponds to the range of the fourth sub region SA4.

[0028] The fifth group of ultrasonic transducers consists of 45 ultrasonic transducers T181 to T225 that belong to a fifth sub region SA5 of two sub regions (fifth and sixth sub regions SA5 and SA6) formed by dividing the third divisional region AR3 shown in Fig. 4 by 45°. Accordingly, the range of scanning by the ultrasonic transducers T181 to T225 in the fifth group corresponds to the range of the fifth sub region SA5.

[0029] The sixth group of ultrasonic transducers consists of 45 ultrasonic transducers T226 to T270 that belong to the above-mentioned sixth sub region SA6. Accordingly, the range of scanning by the ultrasonic transducers T226 to T270 in the sixth group corresponds to the range of the sixth sub region SA6.

[0030] The seventh group of ultrasonic transducers consists of 45 ultrasonic transducers T271 to T315 that belong to a seventh sub region SA7 of two sub regions (seventh and eighth sub regions SA7 and SA8) formed by dividing the fourth divisional region AR4 shown in Fig. 4 by 45°. Accordingly, the range of scanning by the ultrasonic transducers T271 to T315 in the seventh group corresponds to the range of the seventh sub region SA7.

[0031] The eighth group of ultrasonic transducers con-

sists of 45 ultrasonic transducers T316 to T360 that belong to the above-mentioned eighth sub region SA8. Accordingly, the range of scanning by the ultrasonic transducers T316 to T360 in the eighth group corresponds to the range of the eighth sub region SA8.

[0032] Each of the ultrasonic transducers T1 to T360 includes an ultrasonic vibrator formed by sandwiching a piezoelectric element of PZT, PVDF, or the like between an individual electrode and a common electrode. When a drive signal is applied to the individual electrode while the common electrode is connected to a fixed potential (for example, ground potential in the embodiment), the transducer transmits ultrasonic waves, and receives ultrasonic echoes reflected from a target part or the like and generates a reception signal in the individual electrode.

[0033] As shown in Fig. 4, in each of the first to fourth divisional regions AR1 to AR2, the individual electrodes of the two ultrasonic transducers located at 45° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the same one of signal interconnections EL1 to EL 180.

[0034] For example, in the first divisional region AR1, the individual electrode of the ultrasonic transducer T1 within the first group and the individual electrode of the ultrasonic transducer T46 within the second group located at 45° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the signal interconnection EL1. Similarly, the individual electrode of the ultrasonic transducer T2 within the first group and the individual electrode of the ultrasonic transducer T47 within the second group located at 45° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the signal interconnection EL2.

[0035] Further, in the second divisional region AR2, the individual electrode of the ultrasonic transducer T91 within the third group and the individual electrode of the ultrasonic transducer T136 within the fourth group located at 45° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the signal interconnection EL46. Similarly, the individual electrode of the ultrasonic transducer T92 within the third group and the individual electrode of the ultrasonic transducer T137 within the fourth group located at 45° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the signal interconnection EL47.

[0036] On the other hand, the common electrodes of the ultrasonic transducers of the same group are electrically connected to the same one of the common electrode interconnections G1 and G2, and the common electrodes of the ultrasonic transducers of the plural groups located at each 90° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are also electrically connected to the same one of the common electrode interconnections G1 and G2.

[0037] That is, the common electrodes of the ultrasonic

transducers T1 to T45, T91 to T135, T181 to T225, and T271 to T315 of the odd number (the first, third, fifth, and seventh) groups located at each 90° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the common electrode interconnection G1. Further, the common electrodes of the ultrasonic transducers T46 to T90, T136 to T180, T226 to T270, and T316 to T380 of the even number (the second, fourth, sixth, and eighth) groups located at each 90° interval with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the common electrode interconnection G2.

[0038] Since the individual electrodes and the common electrodes of the ultrasonic transducers T1 to T360 are thus interconnected, and then, the number of interconnections becomes "182" as the sum of "180" as the number of signal interconnections EL1 to EL180, and "2" as the number of common electrode interconnections G1 and G2. Consequently, the number of interconnections can be reduced to the half of the number of interconnections "361" (= 360 + 1) in the case where signal interconnections are provided to the individual electrodes of the ultrasonic transducers T1 to T360, respectively, and one common electrode interconnection is wired to the common electrodes.

[0039] The signal interconnections EL1 to EL180 are connected to the transmitting circuit 14 and the receiving circuit 15 of the ultrasonic observation apparatus 3 shown in Fig. 1 via the connecting cord 33 shown in Fig. 2, and the common electrode interconnections G1 and G2 are connected to the first and second switches SW1 and SW2 of the ultrasonic observation apparatus 3 via the connecting cord 23.

[0040] The console 11 of the ultrasonic observation apparatus 3 shown in Fig. 1 outputs control signal A for controlling start/stop of ultrasonic imaging operation in the ultrasonic endoscope 2 and mode selection (B-mode or Doppler mode, and frame rate priority mode or sensitivity priority mode) to the CPU 12 according to the operation of an operator.

[0041] The CPU 12 generates first and second switch control signals B1 and B2 for controlling ON/OFF of the first and second switches SW1 and SW2 based on the control signal A input from the console 11 and outputs those signals to the first and second switches SW1 and SW2, respectively. Further, the CPU 12 outputs transmitting circuit control signal A1 for controlling the operation of the transmitting circuit 14 to the transmitting circuit 14, and outputs receiving circuit control signal A2 for controlling the operation of the receiving circuit 15 to the receiving circuit 15.

[0042] The first and second switches SW1 and SW2 are turned ON/OFF according to the first and second switch control signals B1 and B2 input from the CPU 12. When the first and second switches SW1 and SW2 are turned ON, the common electrode interconnections G1 and G2 are grounded, respectively, and, when the first

and second switches SW1 and SW2 are turned OFF, the common electrode interconnections G1 and G2 are opened, respectively. Since the ultrasonic transducer is operated only when the common electrode is grounded, the ultrasonic transducers T1 to T360 can be operated separately in the odd number (the first, third, fifth, and seventh) groups and the even number (the second, fourth, sixth, and eighth) groups.

[0043] The transmitting circuit 14 generates drive signals based on the transmitting circuit control signal A1, and outputs these drive signals to the signal interconnections EL1 to EL 180. According to these drive signals, ultrasonic waves are transmitted from the ultrasonic transducers of groups with the grounded common electrodes.

[0044] On the other hand, the receiving circuit 15 amplifies the reception signals input from the ultrasonic transducers of groups with the grounded common electrodes via the signal interconnections EL1 to EL 180 at a predetermined amplification degree, and then, converts the amplified reception signals into digital reception signals by performing A/D conversion. Further, the receiving circuit 15 performs reception focus processing by performing processing of phase matching or the like on the digital reception signals to form sound ray data in which focal points of the ultrasonic echoes are narrowed.

[0045] The B-mode processing unit 16 performs correction of attenuation depending on the distance according to the depth of the reflection position of ultrasonic waves on the sound ray data formed by the receiving circuit 15 and performs envelope detection processing thereon to generate B-mode image data.

[0046] The Doppler processing unit 17 removes high frequency components from the reception signals that have been subjected to the reception focus processing based on the sound ray data formed by the receiving circuit 15, and performs orthogonal phase detection processing on the reception signals. Further, the Doppler processing unit 17 removes unwanted clutter components caused by the variations in specular echoes of blood vessel wall, heart wall, or the like from the reception signals that have been subjected to orthogonal phase detection. Thus, Doppler image data formed by extracting only reflection components from bloodstream is generated.

[0047] Since the B-mode image data generated in the B-mode processing unit 16 and the Doppler image data generated in the Doppler processing unit 17 have been obtained by the scanning method different from the normal scanning method of television signal, the DSC 18 converts (raster conversion) the data into normal image data. The image memory 19 stores the image data generated in the DSC 18. The D/A converter 20 converts the digital image data read from the image memory 19 into analog image signals and outputs them to the display unit 4. Thereby, in the display unit 4, an ultrasonic tomographic image imaged by the ultrasonic endoscope 2 is displayed.

[0048] Next, an operation of the ultrasonic endoscopic apparatus 1 according to the embodiment will be described.

[0049] In the case where an ultrasonic tomographic image is imaged using the ultrasonic endoscope 2 shown in Fig. 2, the operator emits light from the light source connected to one end of the universal cord 34 and outputs illumination light into the body of the patient from the illumination window provided at the tip of the insertion part 31, and inserts the insertion part 31 of the ultrasonic endoscope 2 into the body of the patient while observing the insertion state from the observation window.

[0050] First, the operation of the ultrasonic endoscopic apparatus in the case of imaging a B-mode image will be described. When the insertion part 31 reaches a target position, the operator allows the console 11 to output the control signal A for starting the operation of the ultrasonic endoscope 2 and designating B-mode to the CPU 12 by operating the console 11 (Fig. 1).

[0051] The CPU 12 outputs the transmitting circuit control signal A1 for instructing start of the operation of the transmitting circuit 14 and generation of the drive signals for B-mode to the transmitting circuit 14. Further, the CPU 12 outputs the receiving circuit control signal A2 for instructing start of the operation of the receiving circuit 15 to the receiving circuit 15.

[0052] Furthermore, the CPU 12 outputs the first switch control signal B1 for turning ON the first switch SW1 to the first switch SW1. When the first switch SW1 is turned ON, the common electrode interconnection G1 is grounded and the common electrodes of the ultrasonic transducers T1 to T45, T91 to T135, T181 to T225, and T271 to T315 of the odd number (the first, third, fifth, and seventh) groups shown in Fig. 4 are grounded.

[0053] The transmitting circuit 14 generates drive signals (pulse signals in the embodiment) to be respectively supplied to the individual electrodes of the ultrasonic transducers T1 to T45, T91 to T135, T181 to T225, and T271 to T315 of the odd number (the first, third, fifth, and seventh) groups via the signal interconnections EL1 to EL180. Simultaneously, the transmitting circuit 14 generates those drive signals such that four ultrasonic beams are transmitted from points separated at 90° from each other using three ultrasonic transducers for forming each one ultrasonic beam.

[0054] For example, when scanning for one frame is started as shown in Fig. 5A, first, drive pulse signals for driving the ultrasonic transducers are generated as shown in Figs. 5B to 5E such that the ultrasonic beam (sound ray) SL1 (Fig. 5B) is transmitted from the ultrasonic transducers T1 to T3 within the first group in the divisional region AR1, the ultrasonic beam SL91 (Fig. 5C) is transmitted from the ultrasonic transducers T91 to T93 within the third group in the divisional region AR2, the ultrasonic beam SL181 (Fig. 5D) is transmitted from the ultrasonic transducers T181 to T183 within the fifth group in the divisional region AR3, and the ultrasonic beam SL271 (Fig. 5E) is transmitted from the ultrasonic

transducers T271 to T273 within the seventh group in the divisional region AR4.

[0055] The plural reception signals obtained by receiving ultrasonic echoes generated by the reflection of these ultrasonic beams from the object are output to the receiving circuit 15 via the signal interconnections EL1 to EL180 and sound ray data is formed and B-mode image data is generated in the B-mode processing unit 16, and then, the data is raster-converted in the DSC 18 and image data is formed. The image data is stored in the image memory 19.

[0056] When the scanning by the ultrasonic transducers T1 to T45, T91 to T135, T181 to T225, and T271 to T315 of the odd number (the first, third, fifth, and seventh) groups is finished, the CPU 12 outputs the first switch control signal B1 for turning OFF the first switch SW1 to the first switch SW1 and outputs the second switch control signal B2 for turning ON the second switch SW2 to the second switch SW2. Thereby, the common electrode interconnection G2 is grounded and the common electrodes of the ultrasonic transducers T46 to T90, T136 to T180, T226 to T270, and T316 to T380 of the even number (the second, fourth, sixth, and eighth) groups are grounded.

[0057] The transmitting circuit 14 generates plural drive pulse signals to be supplied to the individual electrodes of the ultrasonic transducers T46 to T90, T136 to T180, T226 to T270, and T316 to T380 of the even number (the second, fourth, sixth, and eighth) groups via the signal interconnections EL1 to EL180, respectively, as is the case for the ultrasonic transducers of the odd number groups.

[0058] The plural reception signals obtained by receiving ultrasonic echoes generated by the reflection of these ultrasonic beams from the object are output to the receiving circuit 15 via the signal interconnections EL1 to EL180 and sound ray data is formed and B-mode image data is generated in the B-mode processing unit 16, and then, the data is raster-converted in the DSC 18 and image data is formed. The image data is stored in the image memory 19.

[0059] Thus, by alternately driving the ultrasonic transducers of the odd number and even number groups and convex-scanning the respective divisional regions, the scanning angle range of total 360° of viewing angle is radially scanned. By the way, the scanning angle range is not limited to 360° but may be set to 180° or other values. The image data read from the image memory 19 is converted into analog image signals by the D/A converter 20 and output to the display device 4. Thereby, a B-mode ultrasonic tomographic image is displayed on the display device 4.

[0060] By the ultrasonic endoscopic apparatus according to the embodiment, since the ultrasonic beams are transmitted in four directions with the same timing, in the B-mode, compared to the frame period T shown in Fig. 11A in the conventional case where the ultrasonic beam is transmitted one by one, the frame period can be re-

duced to one-quarter (e.g., T/4) as shown in Fig. 5A and the frame rate can be increased to four times. Further, since the angular interval between the four ultrasonic beams transmitted with the same timing is 90°, the cross-talk due to simultaneous transmission of plural ultrasonic beams may hardly occur.

[0061] However, since the ultrasonic transducers in the adjacent sub regions can not be used for transmitting ultrasonic beams near the boundaries of the sub regions SA1 to SA8 (e.g., around the time of switching of groups of ultrasonic transducers by the first and second switches SW1 and SW2), irregularities in ultrasonic beams are caused.

[0062] Accordingly, for example, after the ultrasonic beam SL45 is transmitted, by controlling the delay amounts of the drive pulse signals to be supplied to the individual electrodes of the ultrasonic transducers T43, T44, and T45 within the first group, which have been used for transmission of the ultrasonic beam SL45, so as to steer the ultrasonic beam (sector scan), the ultrasonic beam SL45' is transmitted toward the second sub region SA2 side than the ultrasonic beam SL45 as shown in Fig. 8.

[0063] Then, before the ultrasonic beam SL46 is transmitted using the ultrasonic transducers T46, T47, and T48 within the second group, by controlling the delay amounts of the drive pulse signals to be supplied to the individual electrodes of these ultrasonic transducers T46, T47, and T48 so as to steer the ultrasonic beam (sector scan), the ultrasonic beam SL46' is transmitted toward the first sub region SA1 side than the ultrasonic beam SL46 as shown in Fig. 8. Thereby, irregularities in the ultrasonic beams at the boundary between the first sub region SA1 and the second sub region SA2 can be reduced.

[0064] Further, also at the boundary between the third and fourth sub regions SA3 and SA4, at the boundary between the fifth and sixth sub regions SA5 and SA6, and, at the boundary between the seventh and eighth sub regions SA7 and SA8, when steering the ultrasonic beam SL45', by simultaneously steering the ultrasonic beams SL135', SL225', SL315' (sector scan), and, when steering the ultrasonic beam SL46', by simultaneously steering the ultrasonic beams SL136', SL226', SL316' (sector scan), the reduction in frame rate due to increase in the number of ultrasonic beams is prevented.

[0065] Next, an operation of the ultrasonic endoscopic apparatus in the case where a Doppler mode image is imaged with frame rate priority will be described. The operator operates the console 11 (Fig. 1) to start the operation of the ultrasonic endoscope 2 and allows the console 11 to output the control signal A for instructing the Doppler mode with frame rate priority to the CPU 12.

[0066] The CPU 12 outputs the transmitting circuit control signal A1 for instructing start of the operation of the transmitting circuit 14 and generation of the drive signals for Doppler mode to the transmitting circuit 14. Further, the CPU 12 outputs the receiving circuit control signal

A2 for instructing start of the operation of the receiving circuit 15 to the receiving circuit 15. In the Doppler mode with frame rate priority, the transmitting circuit 14 generates drive pulse signals such that four ultrasonic beams (pulses) are continuously transmitted at four times in four directions, respectively.

[0067] For example, when scanning for one frame is started as shown in Fig. 6A, first, drive pulse signals for driving the ultrasonic transducers are generated as shown in Figs. 6B to 6E such that the continuous four ultrasonic beams (sound rays) SL1-1 to SL1-4 (Fig. 6B) are transmitted from the ultrasonic transducers T1 to T3 within the first group in the divisional region AR1, the continuous four ultrasonic beams SL91-1 to SL91-4 (Fig. 6C) are transmitted from the ultrasonic transducers T91 to T93 within the third group in the divisional region AR2, the continuous four ultrasonic beams SL181-1 to SL181-4 (Fig. 6D) are transmitted from the ultrasonic transducers T181 to T183 within the fifth group in the divisional region AR3, and the continuous four ultrasonic beams SL271-1 to SL271-4 (Fig. 6E) are transmitted from the ultrasonic transducers T271 to T273 within the seventh group in the divisional region AR4.

[0068] The plural reception signals obtained by receiving ultrasonic echoes generated by the reflection of these ultrasonic beams from the object are output to the receiving circuit 15 via the signal interconnections EL1 to EL180 and sound ray data is formed and Doppler mode image data is generated in the Doppler mode processing unit 17, and then, the data is raster-converted in the DSC 18 and image data is formed. The image data is stored in the image memory 19.

[0069] Thus, by convex-scanning the respective divisional regions, the entire scanning angle range is radial-scanned. Furthermore, as well as in the first embodiment, the ultrasonic beam is steered (sector scan) near the boundaries of the sub regions SA1 to SA8. Further, the image data stored in the image memory 19 is read, converted into analog image signals by the D/A converter 20, and output to the display device 4. Thereby, a Doppler image with frame rate priority is displayed in the display device 4.

[0070] According to the Doppler mode with frame rate priority, since the operation that four ultrasonic beams are transmitted in four directions are repeated at four times, compared to the frame period 4T shown in Fig. 11B in the conventional case where one ultrasonic beam is transmitted continuously at four times, the frame period can be reduced to one-quarter (e.g., T) as shown in Fig. 6A and the frame rate can be increased to four times.

[0071] By the way, in the case where bloodstream information at the location where the pounding of the heart is heavy, the Doppler mode with frame rate priority in which the number of repeated times for repeatedly transmitting the ultrasonic beam in the same direction is reduced is preferable, while, in the case where bloodstream information at the location where the blood flow rate is small, the Doppler mode with sensitivity priority in which

the number of repeated times for repeatedly transmitting the ultrasonic beam in the same direction is increased is preferable.

[0072] In the case where a Doppler image is imaged in the Doppler mode with sensitivity priority, the operator operates the console 11 (Fig. 1) to start the operation of the ultrasonic endoscope 2 and allows the console 11 to output the control signal A for instructing the Doppler mode with sensitivity priority to the CPU 12.

[0073] The CPU 12 outputs the transmitting circuit control signal A1 for instructing start of the operation of the transmitting circuit 14 and generation of the drive signals for Doppler mode with sensitivity priority to the transmitting circuit 14. Further, the CPU 12 outputs the receiving circuit control signal A2 for instructing start of the operation of the receiving circuit 15 to the receiving circuit 15. In the Doppler mode with sensitivity priority, the transmitting circuit 14 generates drive pulse signals such that four ultrasonic beams (pulses) are continuously transmitted at 16 times in four directions, respectively.

[0074] For example, when scanning for one frame is started as shown in Fig. 7A, first, drive pulse signals for driving the ultrasonic transducers are generated as shown in Figs. 7B to 7E such that the continuous 16 ultrasonic beams (sound rays) SL1-1 to SL1-16 (Fig. 7B) are transmitted from the ultrasonic transducers T1 to T3 within the first group in the divisional region AR1, the continuous 16 ultrasonic beams SL91-1 to SL91-16 (Fig. 7C) are transmitted from the ultrasonic transducers T91 to T93 within the third group in the divisional region AR2, the continuous four ultrasonic beams SL181-1 to SL181-16 (Fig. 7D) are transmitted from the ultrasonic transducers T181 to T183 within the fifth group in the divisional region AR3, and the continuous four ultrasonic beams SL271-1 to SL271-16 (Fig. 7E) are transmitted from the ultrasonic transducers T271 to T273 within the seventh group in the divisional region AR4.

[0075] Then, by the same operation as in the above-mentioned Doppler mode with frame rate priority, a Doppler image with more improved sensitivity than in the case of frame rate priority is displayed in the display apparatus 4.

[0076] According to the Doppler mode with sensitivity priority, since the operation that four ultrasonic beams are transmitted in four directions are repeated at 16 times, compared to the frame period 16T in the conventional case where the operation that one ultrasonic beam is transmitted is repeated at 16 times, the frame period can be reduced to one-quarter (e.g., 4T) as shown in Fig. 7A and the frame rate can be increased to four times.

[0077] With respect to the frame rate priority and sensitivity priority in the Doppler mode, for example, a slide switch 50 as shown in Fig. 10 may be provided in the console 11 in Fig. 1 for the operator to select one of 14 combinations of sensitivity s and frame rate f ($= 1/T$) as shown in Fig. 9. Thereby, the operator can finely select sensitivity s and frame rate f as usage and the user-friendliness is improved.

[0078] In the above-mentioned embodiments, radial scan has been performed while transmitting the ultrasonic beams with the same timing one by one in the first to fourth divisional regions AR1 to AR4, however, radial scan may be performed while transmitting the plural ultrasonic beams in the respective divisional regions.

[0079] Further, the scanning angle region of 360° has been divided into four divisional regions at each 90°, however, the angle at which the scanning angle region is divided may be not 90°. For example, the scanning angle region of 360° may be divided into two divisional regions at each 180°, and radial scan may be performed while transmitting a predetermined number of ultrasonic beams with the same timing in the respective divisional regions.

[0080] Furthermore, the respective first to fourth divisional regions AR1 to AR4 have been divided into sub regions SA1 to SA8 at each 45° and the ultrasonic transducers have been grouped with respect to each of the sub regions SA1 to SA8, however, the angle at which the respective divisional regions are divided into sub regions may be not 45°.

[0081] For example, the ultrasonic transducers may be grouped in 12 by dividing the respective first to fourth divisional regions AR1 to AR4 into sub regions SA1 to SA12 at each 30°. In this case, the number of signal interconnections is 120 and the individual electrodes of the three ultrasonic transducers separated at each 30° of the plural ultrasonic transducers are electrically connected to the same signal interconnection in the respective first to fourth divisional regions AR1 to AR4.

[0082] Further, in the case, the number of common electrode interconnections G is three, and the common electrodes of the ultrasonic transducers in the same group are electrically connected to the same common electrode interconnection, and the common electrodes of the ultrasonic transducers in the plural groups located at 90° intervals with respect to the circumferential direction of the ultrasonic transducer unit 40 are electrically connected to the same common electrode interconnection. Accordingly, three switches are provided in the ultrasonic observation apparatus 3 shown in Fig. 1, and one of the three switches is turned ON according to three switch control signals supplied from the CPU 12.

[0083] In the above embodiments, electronic radial ultrasonic endoscope has been described, however, the present invention can be applied to a convex ultrasonic endoscope in which 180 ultrasonic transducers are arranged in a semicircular form by dividing the region of 180° as a scanning full angle is divided into two divisional regions at each 90°, and performing scanning by transmitting ultrasonic beams one by one with the same timing in the respective divisional regions.

[0084] Further, the first and second switches SW1 and SW2 shown in Fig. 1 have been provided in the ultrasonic observation apparatus 3, however, they may be provided in the ultrasonic endoscope 2.

[0085] Furthermore, the control signal A for controlling

the start/stop of the ultrasonic imaging operation in the ultrasonic endoscope 2 and indicating the mode has been output from the console 11, however, for example, a button for generating the control signal A may be provided in the operation part 32 of the ultrasonic endoscope 2 and the control signal A may be output from the operation part 32 to the CPU 12.

Claims

1. An ultrasonic endoscope comprising:

an ultrasonic transducer unit (40) including plural ultrasonic transducers (T1 to T360), each having a first electrode and a second electrode, for transmitting and receiving ultrasonic waves; a plurality of first interconnections (EL1 to EL180) connected to the first electrodes of said plural ultrasonic transducers (T1 to T360); and a plurality of second interconnections (G1 and G2) connected to the second electrodes of said plural ultrasonic transducers (T1 to T360), **characterized in that:**

said plural ultrasonic transducers (T1 to T360) are provided in plural angle regions (AR1 to AR4) formed by dividing a scanning angle region by a predetermined angle, each of said plural angle regions (AR1 to AR4) divided into a first sub region (SA1, SA3, SA5 or SA7) and a second sub region (SA2, SA4, SA6 or SA8);

each of said plurality of first interconnections (EL1 to EL180) is connected to the first electrodes of a first respective one of said plural ultrasonic transducers provided in the first sub region (SA1, SA3, SA5 or SA7) and a second respective one of said plural ultrasonic transducers provided in the second sub region (SA2, SA4, SA6 or SA8) within corresponding one of said plural angle regions (AR1 to AR4);

each of said plurality of second interconnections (G1 and G2) is connected to the second electrodes of ultrasonic transducers provided in respective one of the first sub regions (SA1, SA3, SA5 and SA7) and the second sub regions (SA2, SA4, SA6 and SA8); and

said ultrasonic transducer unit (40) performs scanning operation by simultaneously transmitting a same number of ultrasonic beams in each of said plural angle regions (AR1 to AR4) when selectively supplied with drive signals via said plurality of first interconnections (EL1 to EL180) and said plurality of second interconnections (G1 and

G2).

2. An ultrasonic endoscope according to claim 1, wherein:

each of said plural angle regions (AR1 to AR4) is divided into the first and second sub regions (SA1 to SA8) by a second predetermined angle; and

each of said plurality of first interconnections (EL1 to EL180) is connected to the first electrodes of the first respective one and the second respective one of said plural ultrasonic transducers located at said second predetermined angle.

3. An ultrasonic endoscope according to claim 1, wherein:

said predetermined angle is 90°; and said ultrasonic transducer unit (40) performs scanning operation by simultaneously transmitting plural ultrasonic beams at an angle interval of 90° when selectively supplied with the drive signals via said plurality of first interconnections (EL1 to EL180) and said plurality of second interconnections (G1 and G2).

4. An ultrasonic endoscopic apparatus comprising:

said ultrasonic endoscope according to any one of claims 1-3; and

an ultrasonic observation apparatus (3) for selectively supplying the drive signals to said ultrasonic transducer unit (40) such that said ultrasonic transducer unit performs scanning operation by simultaneously transmitting a same number of ultrasonic beams in each of said plural angle regions (AR1 to AR4).

5. An ultrasonic endoscopic apparatus according to claim 4, wherein said ultrasonic observation apparatus (3) selectively supplies the drive signals to said ultrasonic transducer unit (40) such that said ultrasonic transducer unit performs combination of first scanning operation by selectively driving said plural ultrasonic transducers (T1 to T360) and second scanning operation by steering an ultrasonic beam formed by ultrasonic waves transmitted from a predetermined number of ultrasonic transducers in each of said plural angle regions (AR1 to AR4).

6. An ultrasonic endoscopic apparatus according to claim 5, wherein said ultrasonic observation apparatus (3) selectively supplies the drive signals to said ultrasonic transducer unit (40) such that said ultrasonic transducer unit performs combination of first scanning operation by selectively driving said plural ultrasonic transducers (T1 to T360) and second

scanning operation by steering an ultrasonic beam formed by ultrasonic waves, transmitted from a predetermined number of ultrasonic transducers in a region where said first scanning operation is impossible.

7. An ultrasonic endoscopic apparatus comprising:

said ultrasonic endoscope according to any one of claims 1-3;
 transmitting means (14) for generating the drive signals and supplying the drive signals to said ultrasonic transducer unit (40) via said plurality of first interconnections (EL1 to EL180);
 plural switch means (SW1 and SW2) connected to said plurality of second interconnections (G1 and G2) and a fixed potential; and
 control means (12) for controlling said transmitting means to perform scanning operation by simultaneously transmitting a same number of ultrasonic beams in each of said plural angle regions (AR1 to AR4) and supplying said plural switch means (SW1 and SW2) with control signals for controlling whether or not each of said plurality of second interconnections (G1 and G2) is connected to the fixed potential.

8. An ultrasonic endoscopic apparatus according to claim 4 or 7, further comprising:

mode switching means (11) for switching, in a Doppler mode in which plural ultrasonic pulses are continuously transmitted in each transmission direction, between a frame rate priority mode in which a number of continuous ultrasonic pulses are reduced within a predetermined range to increase a frame rate and a sensitivity priority mode in which the number of continuous ultrasonic pulses is larger than that in the frame rate priority mode to increase sensitivity.

9. An ultrasonic endoscopic apparatus according to claim 7, wherein said plural switch means (SW1 and SW2) are provided within said ultrasonic endoscope (2).

10. An ultrasonic endoscopic apparatus according to claim 8, wherein said mode switching means (11) is provided within said ultrasonic endoscope (2).

Patentansprüche

1. Ultraschallendoskop, umfassend:

eine Ultraschallwandlereinheit (40) mit mehreren Ultraschallwandlern (T1 bis T360), die jeweils eine erste und eine zweite Elektrode zum

Senden bzw. Empfangen von Ultraschallwellen besitzen;

eine Mehrzahl erster Zwischenverbindungen (EL1 bis EL180), die an die ersten Elektroden der mehreren Ultraschallwandler (T1 bis T360) angeschlossen sind; und

eine Mehrzahl zweiter Zwischenverbindungen (G1 und G2), die an die zweiten Elektroden der mehreren Ultraschallwandler (T1 bis T360) angeschlossen sind, **dadurch gekennzeichnet, dass**

die mehreren Ultraschallwandler (T1 bis T360) in mehreren Winkelzonen (AR1 bis AR4) vorgesehen sind, die gebildet werden durch Teilen einer Abtastwinkelzone durch einen vorbestimmten Winkel, wobei jede der mehreren Winkelzonen (AR1 bis AR4) in eine erste Unterzone (SA1, SA3, SA5 oder SA7) und eine zweite Unterzone (SA2, SA4, SA6 oder SA8) aufgeteilt ist; jede der mehreren ersten Zwischenverbindungen (EL1 bis EL180) an die ersten Elektroden eines ersten zugehörigen Wandlers der mehreren Ultraschallwandler in der ersten Unterzone (SA1, SA3, SA5 oder SA7) und eines zweiten zugehörigen Wandlers der mehreren Ultraschallwandler der zweiten Unterzone (SA8, SA4, SA6 oder SA8) innerhalb der entsprechenden mehreren Winkelzonen (AR1 bis AR4) angeschlossen ist;

jede der mehreren zweiten Zwischenverbindungen (G1 und G2) an die zweiten Elektroden von Ultraschallwandlern angeschlossen ist, die in der betreffenden einen der ersten Unterzonen (SA1, SA3, SA5 und SA7) und der zweiten Unterzonen (SA2, SA4, SA6 und SA8) vorgesehen sind; und

die Ultraschallwandlereinheit (40) einen Abtastvorgang in der Weise durchführt, dass sie gleichzeitig die gleiche Anzahl von Ultraschallbündeln in jede der mehreren Winkelzonen (AR1 bis AR4) sendet, wenn sie selektiv über die mehreren ersten Zwischenverbindungen (EL1 bis EL180) und die mehreren zweiten Zwischenverbindungen (G1 und G2) mit Treibersignalen selektiv beschickt wird.

2. Ultraschallendoskop nach Anspruch 1, bei dem jede der mehreren Winkelzonen (AR1 bis AR4) unterteilt ist in die ersten und zweiten Unterzonen (SA1 bis SA8) durch einen ersten vorbestimmten Winkel; und

jede der mehreren ersten Zwischenverbindungen (EL1 bis EL180) mit den ersten Elektroden der ersten einen und der zweiten einen der mehreren Ultraschallwandler verbunden ist, die sich innerhalb des zweiten vorbestimmten Winkels befinden.

3. Ultraschallendoskop nach Anspruch 1, bei dem der

vorbestimmte Winkel 90° beträgt; und die Ultraschallwandlereinheit (40) einen Abtastvorgang in der Weise ausführt, dass sie gleichzeitig mehrere Ultraschallstrahlen in einem Winkelintervall von 90° sendet, wenn sie selektiv mit den Treibersignalen über die mehreren ersten Zwischenverbindungen (EL1 bis EL180) und die mehreren zweiten Zwischenverbindungen (G1 und G2) gespeist wird.

4. Ultraschallendoskop, umfassend:

das Ultraschallendoskop nach einem der Ansprüche 1 bis 3; und eine Ultraschall-Betrachtungsvorrichtung (3) zum selektiven Zuführen der Treibersignale zu der Ultraschallwandlereinheit (40) in der Weise, dass die Ultraschallwandlereinheit einen Abtastvorgang durchführt durch gleichzeitiges Senden der gleichen Anzahl von Ultraschallbündeln in jede der mehreren Winkelzonen (AR1 bis AR4).

5. Ultraschallendoskopvorrichtung nach Anspruch 4, bei der die Ultraschall-Betrachtungsvorrichtung (3) selektiv die Treibersignale in der Weise zu der Ultraschallwandlereinheit (40) liefert, dass die Ultraschallwandlereinheit eine Kombination aus einem ersten Abtastvorgang durch selektives Treiben der mehreren Ultraschallwandler (T1 bis T360) und eines zweiten Abtastvorgangs durch Lenken eines Ultraschallbündels durchführt, welches gebildet wird durch Ultraschallwellen, die von einer vorbestimmten Anzahl von Ultraschallwandlern in jeder der mehreren Winkelzonen (AR1 bis AR4) gesendet werden.

6. Ultraschallendoskopvorrichtung nach Anspruch 5, bei dem die Ultraschall-Betrachtungsvorrichtung (3) die Treibersignale selektiv zu der Ultraschallwandlereinheit (40) in der Weise liefert, dass die Ultraschallwandlereinheit eine Kombination aus einem ersten Abtastvorgang mit selektivem Treiben der mehreren Ultraschallwandler (T1 bis T360) und eines zweiten Abtastvorgangs durch Lenken eines Ultraschallbündels ausführt, welches gebildet wird durch Ultraschallwellen, die von einer vorbestimmten Anzahl von Ultraschallwandlern in einer Zone gesendet werden, während der erste Abtastvorgang gesperrt ist.

7. Ultraschallendoskopvorrichtung, umfassend:

das Ultraschallendoskop nach einem der Ansprüche 1 bis 3; eine Sendeeinrichtung (14) zum Erzeugen der Treibersignale und zum Zuführen der Treibersignale zu der Ultraschallwandlereinheit (40) über die mehreren ersten Zwischenverbindungen (EL1 bis EL180);

mehrere Schalteinrichtungen (SW1 und SW2), die an die mehreren zweiten Zwischenverbindungen (G1 und G2) und ein fixes Potential angeschlossen sind; und

eine Steuereinrichtung (12) zum Steuern der Sendeeinrichtung in der Weise, dass ein Abtastvorgang ausgeführt wird durch gleichzeitiges Senden der gleichen Anzahl von Ultraschallbündeln in jede der mehreren Winkelzonen (AR1 bis AR4) und durch Zuführen von Steuersignalen zu den mehreren Schalteinrichtungen (SW1 und SW2), um zu steuern, ob jede der mehreren zweiten Zwischenverbindungen (G1 und G2) mit dem fixen Potential verbunden ist oder nicht.

8. Ultraschallendoskopvorrichtung nach Anspruch 4 oder 7, weiterhin umfassend:

eine Modus-Schalteinrichtung (11), um in einem Doppler-Modus, in welchem mehrere Ultraschallpulse kontinuierlich in jede Senderichtung gesendet werden, umzuschalten zwischen einem Vollbildraten-Prioritätsmodus, in welchem eine Anzahl kontinuierlicher Ultraschallpulse innerhalb eines vorbestimmten Bereichs reduziert wird, um eine Vollbildrate zu erhöhen, und einem Empfindlichkeits-Prioritätsmodus, in welchem die Anzahl von kontinuierlichen Ultraschallpulsen größer ist als in dem Vollbildraten-Prioritätsmodus, um die Empfindlichkeit zu steigern.

9. Ultraschallendoskopvorrichtung nach Anspruch 7, bei der die mehreren Schalteinrichtungen (SW1 und SW2) innerhalb des Ultraschallendoskops (2) vorgesehen sind.

10. Ultraschallendoskopvorrichtung nach Anspruch 8, bei dem die Modus-Schalteinrichtung (11) innerhalb des Ultraschallendoskops (2) vorgesehen ist.

Revendications

1. Endoscope ultrasonique comprenant :

une unité de transducteurs ultrasoniques (40) comprenant une pluralité de transducteurs ultrasoniques (T1 à T360), comportant chacun une première électrode et une deuxième électrode, pour transmettre et recevoir des ondes ultrasoniques ;

une pluralité de premières interconnexions (EL1 à EL180) connectées aux premières électrodes de ladite pluralité de transducteurs ultrasoniques (T1 à T360) ; et

une pluralité de deuxièmes interconnexions (G1 et G2) connectées aux deuxièmes électrodes

de ladite pluralité de transducteurs ultrasoniques (T1 à T360), **caractérisé en ce que** :

ladite pluralité de transducteurs ultrasoniques (T1 à T360) sont prévus dans une pluralité de régions angulaires (AR1 à AR4) formées en divisant une région angulaire de balayage par un angle prédéterminé, chacune de ladite pluralité de régions angulaires (AR1 à AR4) étant divisée en une première région secondaire (SA1, SA3, SA5 ou SA7) et une deuxième région secondaire (SA2, SA4, SA6 ou SA8) ;
 chacune de ladite pluralité de premières interconnexions (EL1 à EL180) est connectée aux premières électrodes d'un premier transducteur respectif de ladite pluralité de transducteurs ultrasoniques prévus dans la première région secondaire (SA1, SA3, SA5 ou SA7) et d'un deuxième transducteur respectif de ladite pluralité de transducteurs ultrasoniques prévus dans la deuxième région secondaire (SA2, SA4, SA6 ou SA8) dans une région correspondante de ladite pluralité de régions angulaires (AR1 à AR4) ;
 chacune de ladite pluralité de deuxièmes interconnexions (G1 et G2) est connectée aux deuxièmes électrodes des transducteurs ultrasoniques prévus dans une région secondaire respective parmi les premières régions secondaires (SA1, SA3, SA5 et SA7) et les deuxièmes régions secondaires (SA2, SA4, SA6 et SA8) ; et
 ladite unité de transducteurs ultrasoniques (40) effectue une opération de balayage en transmettant simultanément un même nombre de faisceaux ultrasoniques dans chacune de ladite pluralité de régions angulaires (AR1 à AR4) lorsqu'elle reçoit de manière sélective des signaux de commande par l'intermédiaire de ladite pluralité de premières interconnexions (EL1 à EL180) et de ladite pluralité de deuxièmes interconnexions (G1 et G2).

2. Endoscope ultrasonique selon la revendication 1, dans lequel :

chacune de ladite pluralité de régions angulaires (AR1 à AR4) est divisée en les première et deuxième régions secondaires (SA1 à SA8) par un deuxième angle prédéterminé ; et
 chacune de ladite pluralité de premières interconnexions (EL1 à EL180) est connectée aux premières électrodes du premier transducteur respectif et du deuxième transducteur respectif de ladite pluralité de transducteurs ultrasoni-

ques situés audit deuxième angle prédéterminé.

3. Endoscope ultrasonique selon la revendication 1, dans lequel :

ledit angle prédéterminé est de 90° ; et
 ladite unité de transducteurs ultrasoniques (40) effectue une opération de balayage en transmettant simultanément une pluralité de faisceaux ultrasoniques à un intervalle angulaire de 90° lorsqu'elle reçoit de manière sélective les signaux de commande par l'intermédiaire de ladite pluralité de premières interconnexions (EL1 à EL180) et de ladite pluralité de deuxièmes interconnexions (G1 et G2).

4. Appareil endoscopique ultrasonique comprenant :

ledit endoscope ultrasonique selon l'une quelconque des revendications 1 à 3; et
 un appareil d'observation ultrasonique (3) pour fournir de manière sélective les signaux de commande à ladite unité de transducteurs ultrasoniques (40) de sorte que ladite unité de transducteurs ultrasoniques effectue une opération de balayage en transmettant simultanément un même nombre de faisceaux ultrasoniques dans chacune de ladite pluralité de régions angulaires (AR1 à AR4).

5. Appareil endoscopique ultrasonique selon la revendication 4, dans lequel ledit appareil d'observation ultrasonique (3) fournit de manière sélective les signaux de commande à ladite unité de transducteurs ultrasoniques (40) de sorte que ladite unité de transducteurs ultrasoniques effectue la combinaison d'une première opération de balayage en commandant de manière sélective ladite pluralité de transducteurs ultrasoniques (T1 à T360) et d'une deuxième opération de balayage en dirigeant un faisceau ultrasonique formé par les ondes ultrasoniques transmises par un nombre prédéterminé de transducteurs ultrasoniques dans chacune de ladite pluralité de régions angulaires (AR1 à AR4).

6. Appareil endoscopique ultrasonique selon la revendication 5, dans lequel ledit appareil d'observation ultrasonique (3) fournit de manière sélective les signaux de commande à ladite unité de transducteurs ultrasoniques (40) de sorte que ladite unité de transducteurs ultrasoniques effectue la combinaison d'une première opération de balayage en commandant de manière sélective ladite pluralité de transducteurs ultrasoniques (T1 à T360) et d'une deuxième opération de balayage en dirigeant un faisceau ultrasonique formé par les ondes ultrasoniques transmises par un nombre prédéterminé de transducteurs ultrasoniques dans une région où ladite

première opération de balayage est impossible.

7. Appareil endoscopique ultrasonique comprenant :

ledit endoscope ultrasonique selon l'une quel- 5
conque des revendications 1 à 3 ;
des moyens de transmission (14) pour générer
les signaux de commande et fournir les signaux
de commande à ladite unité de transducteurs
ultrasoniques (40) par l'intermédiaire de ladite 10
pluralité de premières interconnexions (EL1 à
EL180) ;
une pluralité de moyens de commutation (SW1
et SW2) connectés à ladite pluralité de deuxiè- 15
mes interconnexions (G1 et G2) et à un potentiel
fixe ; et
des moyens de commande (12) pour comman-
der lesdits moyens de transmission pour effec- 20
tuer une opération de balayage en transmettant
simultanément un même nombre de faisceaux
ultrasoniques dans chacune de ladite pluralité
de régions angulaires (AR1 à AR4) et pour four-
nir à ladite pluralité de moyens de commutation 25
(SW1 et SW2) des signaux de contrôle pour con-
trôler si, oui ou non, chacune de ladite pluralité
de deuxièmes interconnexions (G1 et G2) est
connectée au potentiel fixe.

**8. Appareil endoscopique ultrasonique selon la reven- 30
dication 4 ou 7, comprenant en outre :**

des moyens de commutation de mode (11) pour
commuter, dans un mode Doppler dans lequel
une pluralité d'impulsions ultrasoniques sont 35
transmises continuellement dans chaque direc-
tion de transmission, entre un mode de priorité
de débit d'images dans lequel un nombre d'im-
pulsions ultrasoniques continues est réduit dans
une plage prédéterminée pour augmenter un 40
débit d'images et un mode de priorité de sensi-
bilité dans lequel le nombre d'impulsions ultra-
soniques continues est plus grand que celui
dans le mode de priorité de débit d'images pour
augmenter la sensibilité.

**9. Appareil endoscopique ultrasonique selon la reven- 45
dication 7, dans lequel ladite pluralité de moyens de
commutation (SW1 et SW2) sont prévus dans ledit
endoscope ultrasonique (2).**

**10. Appareil endoscopique ultrasonique selon la reven- 50
dication 8, dans lequel lesdits moyens de commuta-
tion de mode (11) sont prévus dans ledit endoscope
ultrasonique (2).**

55

FIG.1

1 ULTRASONIC ENDOSCOPIC APPARATUS

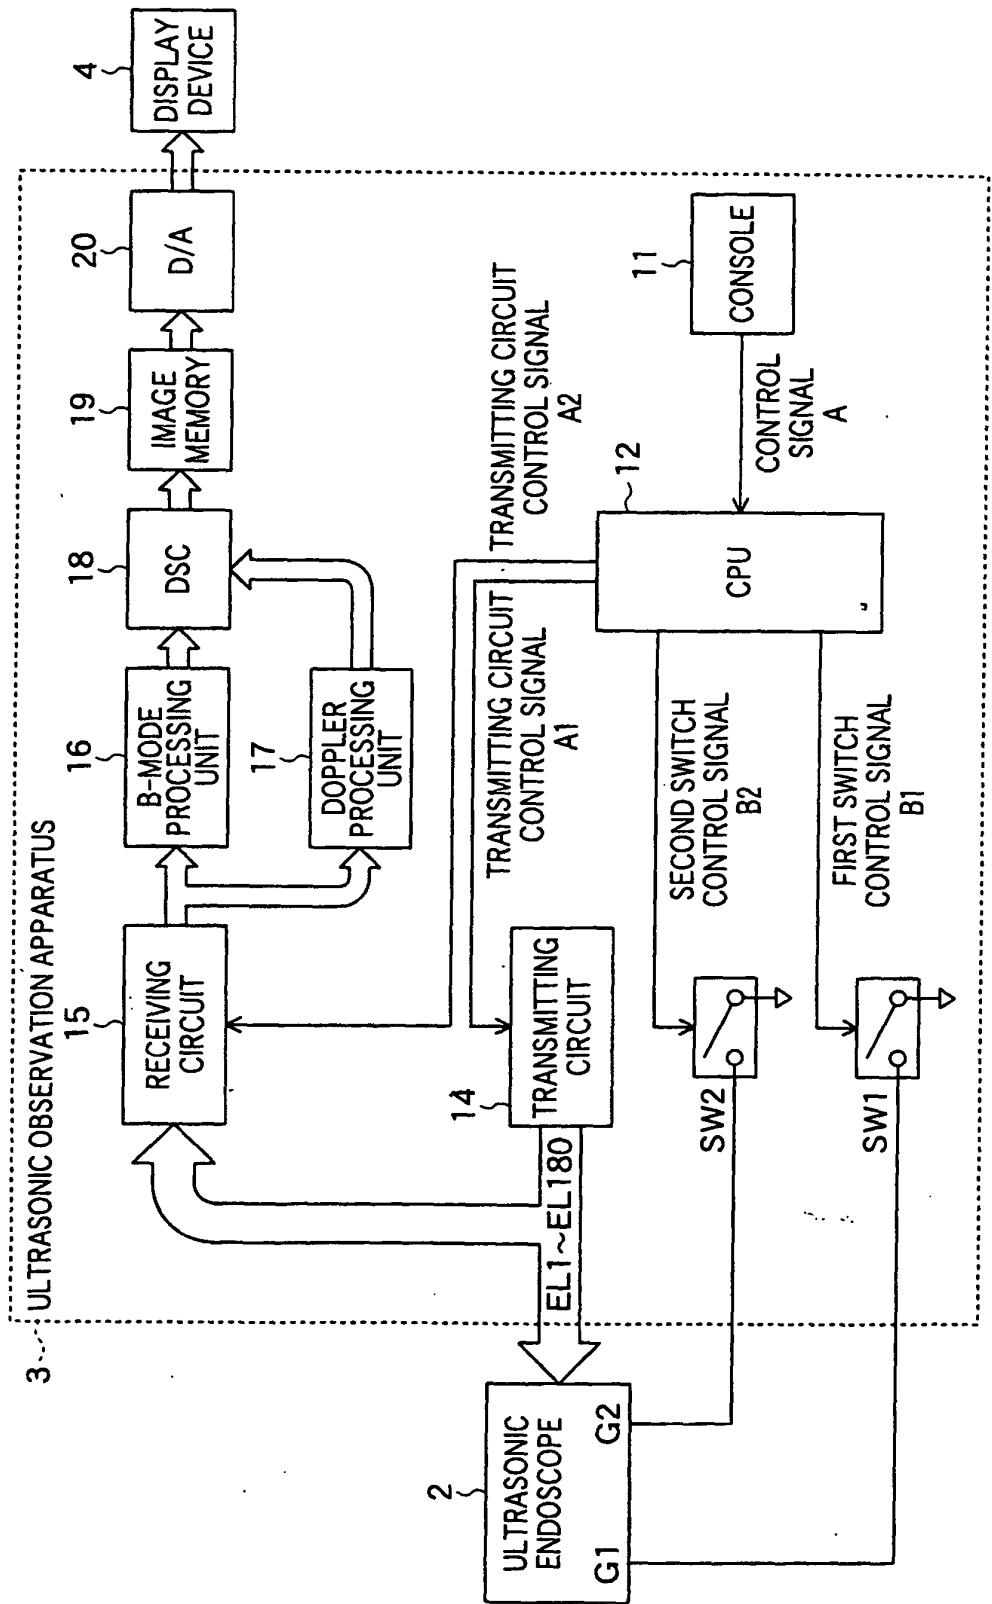


FIG.2

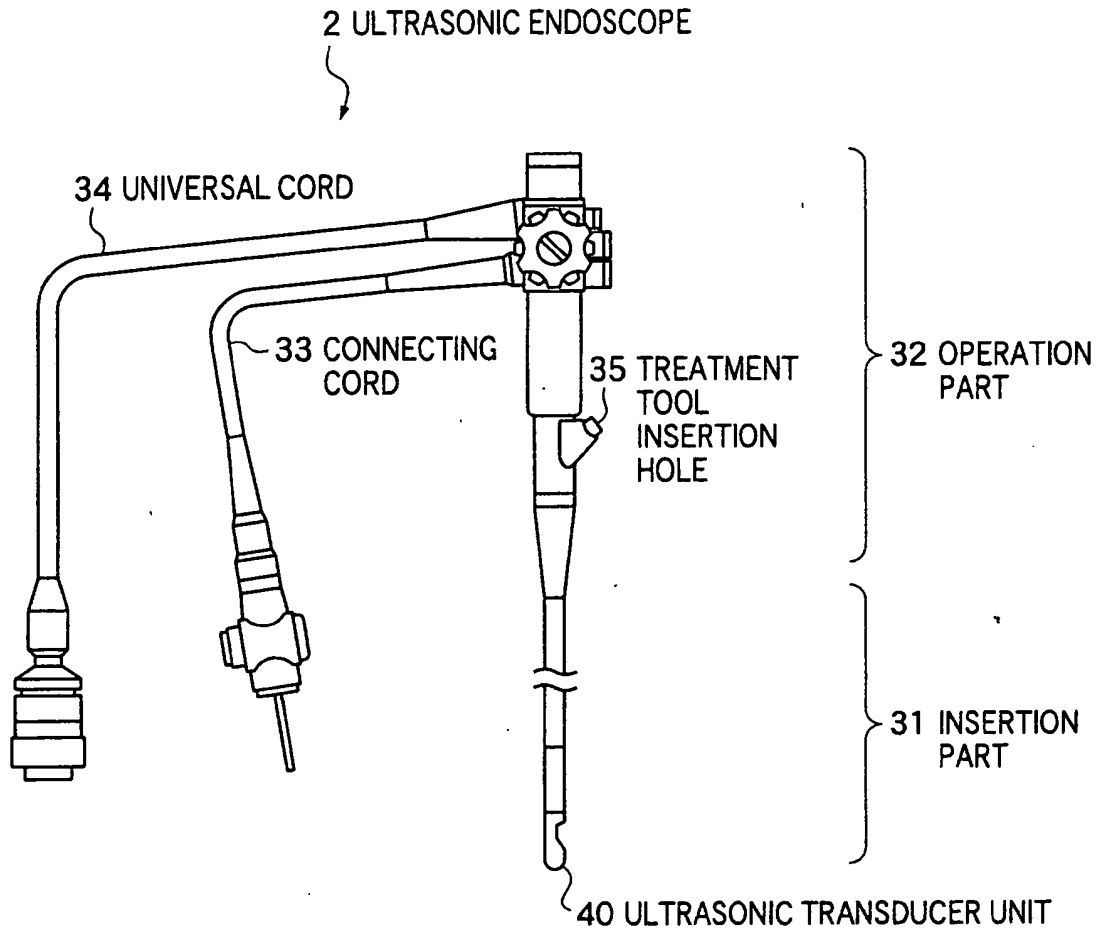


FIG.3



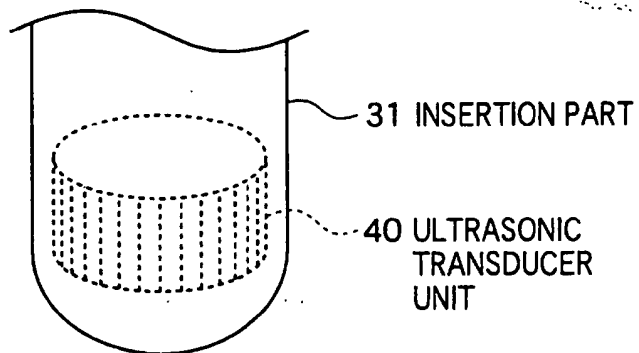


FIG.4

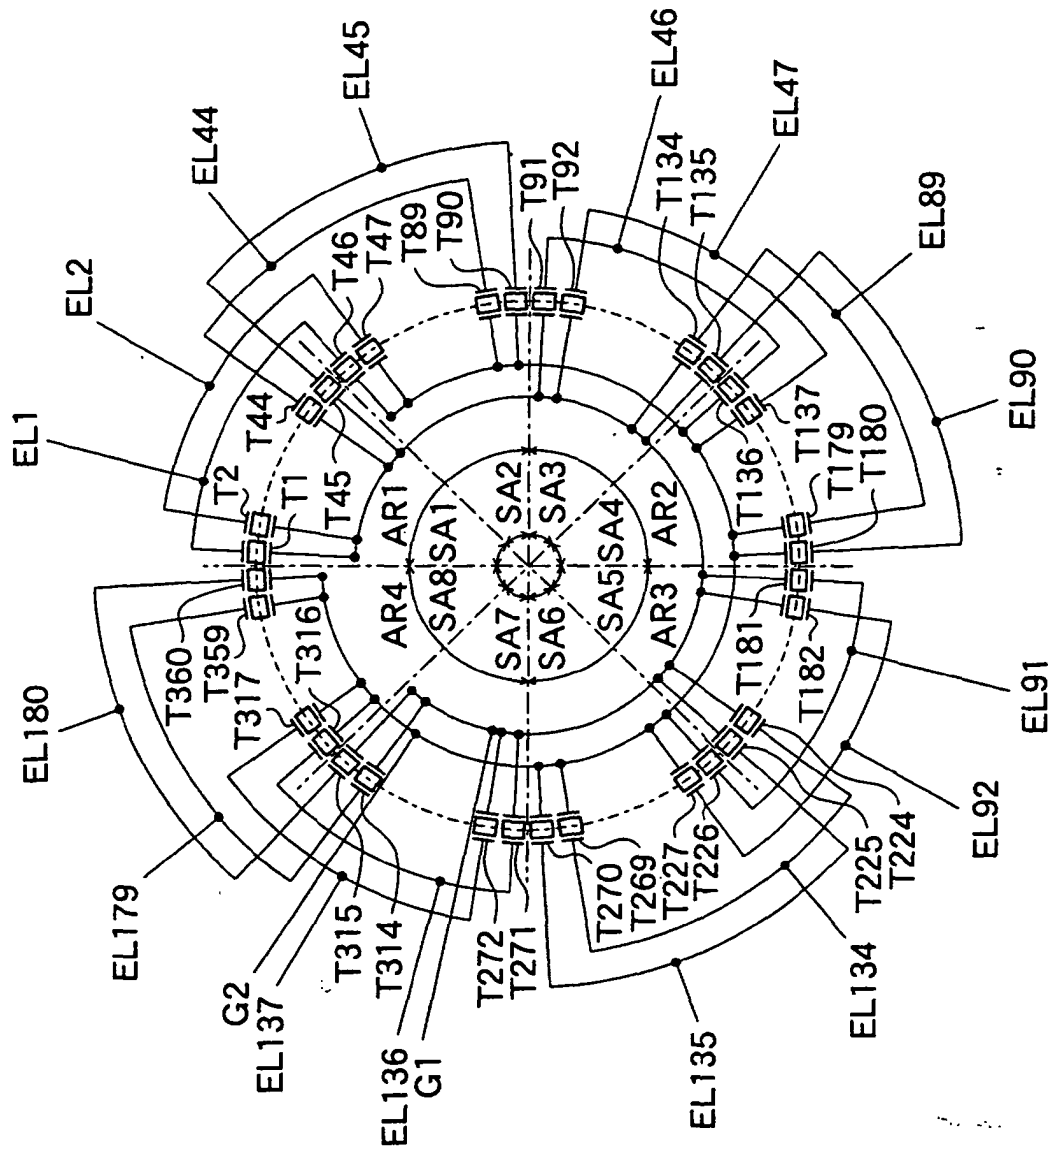



FRAME TIMING

FIG.5A



TRANSMISSION
TIMING
(DIVISIONAL
REGION AR1)

FIG.5B



TRANSMISSION
TIMING
(DIVISIONAL
REGION AR2)

FIG.5C



TRANSMISSION
TIMING
(DIVISIONAL
REGION AR3)

FIG.5D



TRANSMISSION
TIMING
(DIVISIONAL
REGION AR4)

FIG.5E

FIG. 6A




FIG. 6B




FIG. 6C




FIG. 6D




FIG. 6E






FIG.7A

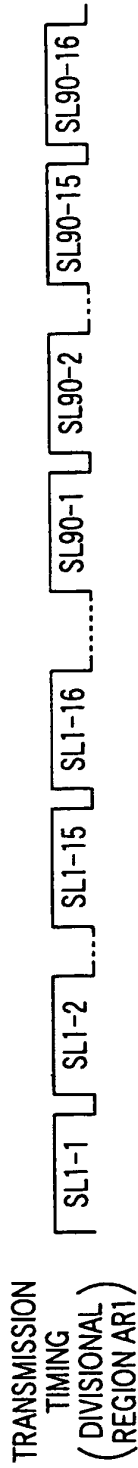


FIG.7B

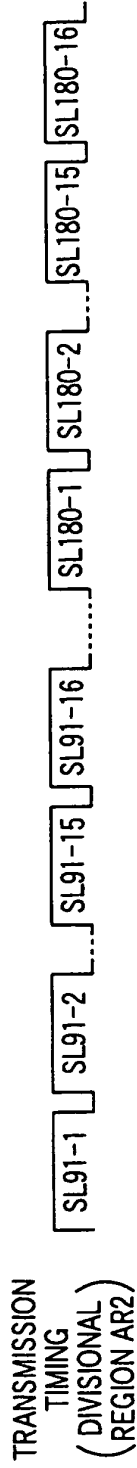


FIG.7C

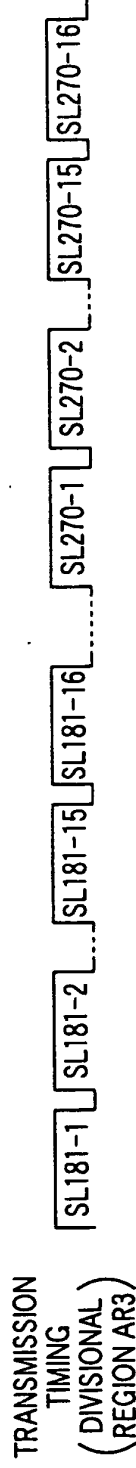


FIG.7D



FIG.7E

FIG. 8

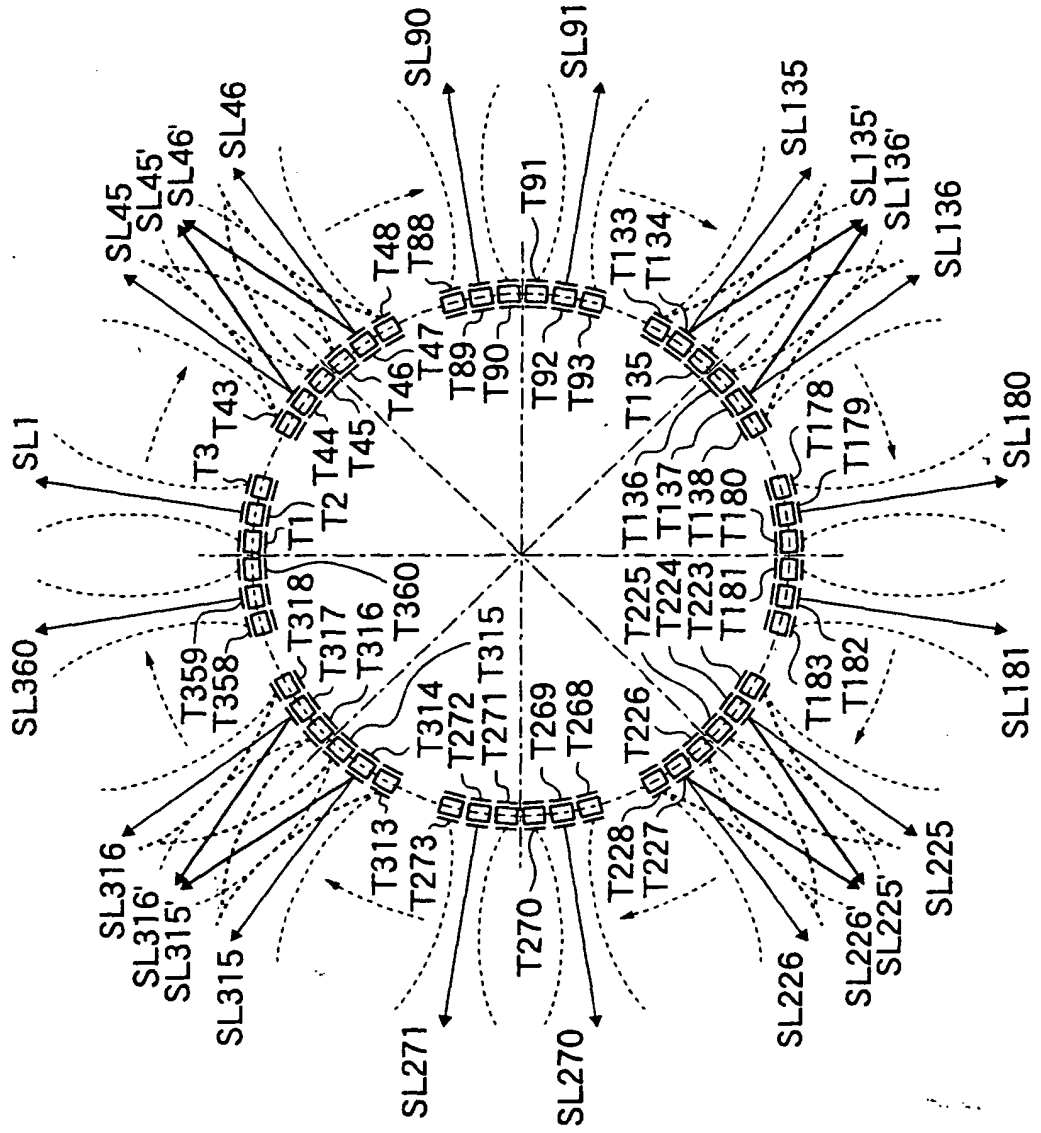


FIG.9

COMBINATION No.	1	2	3	4	5	6		
SENSITIVITY	s	5s/4	6s/4	7s/4	8s/4	9s/4		
FRAME RATE	f	4f/5	4f/6	4f/7	4f/8	4f/9		
COMBINATION No.	7	8	9	10	11	12	13	
SENSITIVITY	10s/4	11s/4	12s/4	13s/4	14s/4	15s/4	16s/4	
FRAME RATE	4f/10	4f/11	4f/12	4f/13	4f/14	4f/15	4f/16	

FIG.10

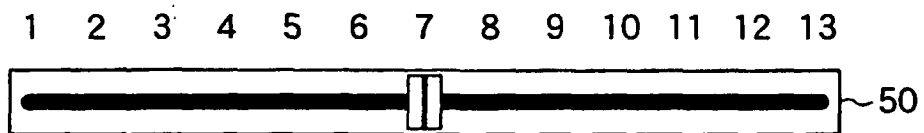




FIG. 11A
PRIOR ART



FIG. 11B
PRIOR ART



FIG. 11C
PRIOR ART




FIG. 11D
PRIOR ART

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2134142 A [0005]
- US 5081993 A [0008]
- US 2003213305 A1 [0009]
- US 5685311 A [0009]
- US 4841977 A [0010]

Non-patent literature cited in the description

- **Kinichi Takeda et al.** The Experience of Electric Radial Endoscopic Ultrasonography on Gastroenterology. *Jpn JMed Ultrasonics*, vol. 31, 238 [0004]

专利名称(译)	超声波内窥镜和超声波内窥镜装置		
公开(公告)号	EP1627603B1	公开(公告)日	2011-10-19
申请号	EP2005017874	申请日	2005-08-17
[标]申请(专利权)人(译)	富士摄影胶片公司		
申请(专利权)人(译)	富士胶片有限公司.		
当前申请(专利权)人(译)	富士胶片株式会社		
[标]发明人	SATOH YOSHIAKI TSUJITA KAZUHIRO		
发明人	SATOH, YOSHIAKI TSUJITA, KAZUHIRO		
IPC分类号	A61B8/12 B06B1/06 G01S15/89 A61B8/14		
CPC分类号	A61B8/12 A61B8/145 A61B8/4461 A61B8/4483 A61B8/4488 G01S15/8922 G01S15/8979		
优先权	2004240787 2004-08-20 JP		
其他公开文献	EP1627603A1		
外部链接	Espacenet		

摘要(译)

在能够插入患者体内并对超声波断层图像成像的超声波内窥镜中，电子径向扫描操作中的帧速率得到改善。超声波内窥镜包括：超声波换能器单元（40），包括多个超声波换能器（T1至T360），每个超声波换能器具有第一电极和第二电极，用于发送和接收超声波；多个第一互连（EL1至EL180），每个第一互连连接到预定超声换能器的第一电极；多个第二互连（G1和G2），每个第二互连连接到超声换能器的第二电极，所述超声波换能器的第一电极彼此不连接；其中，当通过多个第一互连和多个第二互连选择性地提供驱动信号时，超声波换能器单元（40）通过在多个角度区域的每一个中同时传输相同数量的超声波束来执行扫描操作。

