

(19)



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 1 814 179 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.08.2007 Bulletin 2007/31

(51) Int Cl.:
H01L 51/52 (2006.01) **H01L 27/32** (2006.01)

(21) Application number: **07250310.5**

(22) Date of filing: **25.01.2007**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(30) Priority: **25.01.2006 KR 20060007961
18.04.2006 KR 20060034899**

(71) Applicant: **Samsung SDI Co., Ltd.**
Suwon-si
Gyeonggi-do (KR)

(72) Inventor: **Park, Jin-Woo**
c/o Samsung SDI Co., LTD.
Gyeonggi-do (KR)


(74) Representative: **Mounteney, Simon James**
Marks & Clerk
90 Long Acre
London WC2E 9RA (GB)

(54) **Organic light emitting display device and method of fabrication the same**

(57) Provided is an organic light emitting display device. An organic light emitting display device according to one embodiment of the present invention comprises a first substrate (200); a second substrate (260) comprising an interior surface opposing the first substrate; an array of organic light emitting pixels formed between the first and second substrates, the array comprising a top

surface facing the second substrate; a frit seal (280) interposed between the first and second substrates while surrounding the array; and a film structure (290) comprising one or more layered films, the film structure comprising a portion interposed between the array and the second substrate, the film structure contacting the interior surface and the top surface; and wherein the second substrate comprises a recess (270) on interior surface.

FIG. 5

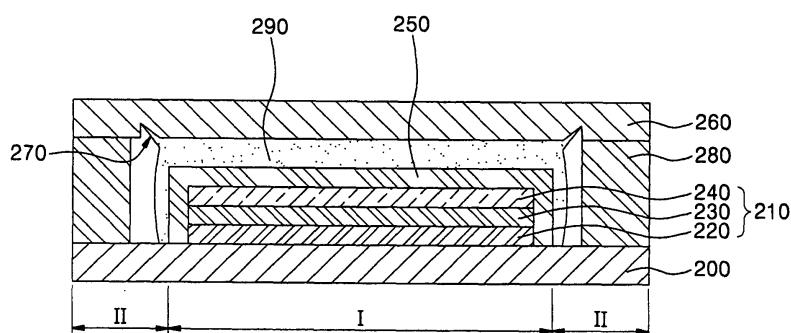

Description**Field of the Invention**

[0001] The present invention relates to a display device, and more particularly, to an organic light emitting display device.

Description of Related Art

[0002] Recently, attention has been focused on flat panel displays such as a liquid crystal display device, an organic light emitting display device, a plasma display panel (PDP), and so on. Since a liquid crystal display is a passive device rather than an emissive device, it is difficult to make it have high brightness and contrast, a wide viewing angle, and a large-sized screen. While the PDP is an emissive device, it is heavy, consumes much power, and requires a complex manufacturing process, compared to other displays.

[0003] Meanwhile, since the organic light emitting display device (OLED) is an emissive device, it has a wide viewing angle, and high contrast. In addition, since it does not require a backlight, it can be made lightweight, compact, and power efficient. Further, an OLED can be driven at a low DC voltage, has a rapid response speed, and is formed entirely of solid material. As a result, the OLED has the ability to withstand external impact and a wide range of temperatures, and can be fabricated by a simple method at low cost.

SUMMARY OF CERTAIN INVENTIVE ASPECTS

[0004] According to a first aspect of the invention, there is provided an organic light-emitting display device as set out in Claim 1. Preferred features of this aspect are set out in Claims 2 to 25.

[0005] According to a second aspect of the invention, there is provided a method of making an organic light-emitting display device as set out in claim 26. Preferred features of this aspect are set out in Claims 27 and 28.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The above and other aspects and features of the present invention will be apparent from the following description of certain exemplary embodiments with reference to the attached drawings in which:

[0007] FIG. 1 is a cross-sectional view of an exemplary organic light emitting display device;

[0008] FIGS. 2 to 5 are cross-sectional views of an organic light emitting display device in accordance with embodiments of the present invention;

[0009] FIG. 6A is a schematic exploded view of a passive matrix type organic light emitting display device in accordance with one embodiment;

[0010] FIG 6B is a schematic exploded view of an active matrix type organic light emitting display device in

accordance with one embodiment;

[0011] FIG. 6C is a schematic top plan view of an organic light emitting display in accordance with one embodiment;

[0012] FIG. 6D is a cross-sectional view of the organic light emitting display of FIG. 6C, taken along the line d-d; and

[0013] FIG. 6E is a schematic perspective view illustrating mass production of organic light emitting devices in accordance with one embodiment.

DETAILED DESCRIPTION OF EMBODIMENTS

[0014] Various embodiments of the present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown.

[0015] An organic light emitting display (OLED) is a display device comprising an array of organic light emitting diodes. Organic light emitting diodes are solid state devices which include an organic material and are adapted to generate and emit light when appropriate electrical potentials are applied.

[0016] OLEDs can be generally grouped into two basic types dependent on the arrangement with which the stimulating electrical current is provided. Fig. 6A schematically illustrates an exploded view of a simplified structure of a passive matrix type OLED 1000. Fig. 6B schematically illustrates a simplified structure of an active matrix type OLED 1001. In both configurations, the OLED 1000, 1001 includes OLED pixels built over a substrate 1002, and the OLED pixels include an anode 1004, a cathode 1006 and an organic layer 1010. When an appropriate electrical current is applied to the anode 1004, electric current flows through the pixels and visible light is emitted from the organic layer.

[0017] Referring to Fig. 6A, the passive matrix OLED (PMOLED) design includes elongate strips of anode 1004 arranged generally perpendicular to elongate strips of cathode 1006 with organic layers interposed therebetween. The intersections of the strips of cathode 1006 and anode 1004 define individual OLED pixels where light is generated and emitted upon appropriate excitation of the corresponding strips of anode 1004 and cathode 1006. PMOLEDs provide the advantage of relatively simple fabrication.

[0018] Referring to Fig. 6B, the active matrix OLED (AMOLED) includes driving circuits 1012 arranged between the substrate 1002 and an array of OLED pixels. An individual pixel of AMOLEDs is defined between the common cathode 1006 and an anode 1004, which is electrically isolated from other anodes. Each driving circuit 1012 is coupled with an anode 1004 of the OLED pixels and further coupled with a data line 1016 and a scan line 1018. The scan lines 1018 supply scan signals that select rows of the driving circuits, and the data lines 1016 supply data signals for particular driving circuits. The data signals and scan signals stimulate the local driving circuits

1012, which excite the anodes 1004 so as to emit light from their corresponding pixels.

[0019] In the illustrated AMOLED, the local driving circuits 1012, the data lines 1016 and scan lines 1018 are buried in a planarization layer 1014, which is interposed between the pixel array and the substrate 1002. The planarization layer 1014 provides a planar top surface on which the organic light emitting pixel array is formed. The planarization layer 1014 may be formed of organic or inorganic materials, and formed of two or more layers although shown as a single layer. The local driving circuits 1012 are typically formed with thin film transistors (TFT) and arranged in a grid or array under the OLED pixel array. The local driving circuits 1012 may be at least partly made of organic materials, including organic TFT. AMOLEDs have the advantage of fast response time improving their desirability for use in displaying data signals. Also, AMOLEDs have the advantages of consuming less power than passive matrix OLEDs.

[0020] Referring to common features of the PMOLED and AMOLED designs, the substrate 1002 provides structural support for the OLED pixels and circuits. In various arrangements, the substrate 1002 can comprise rigid or flexible materials as well as opaque or transparent materials, such as plastic, glass, and/or foil. As noted above, each OLED pixel or diode is formed with the anode 1004, cathode 1006 and organic layer 1010 interposed therebetween. When an appropriate electrical current is applied to the anode 1004, the cathode 1006 injects electrons and the anode 1004 injects holes. In certain arrangements, the anode 1004 and cathode 1006 are inverted; i.e., the cathode is formed on the substrate 1002 and the anode is opposingly arranged.

[0021] Interposed between the cathode 1006 and anode 1004 are one or more organic layers. More specifically, at least one emissive or light emitting layer is interposed between the cathode 1006 and anode 1004. The light emitting layer may comprise one or more light emitting organic compounds. Typically, the light emitting layer is configured to emit visible light in a single color such as blue, green, red or white. In the illustrated arrangement, one organic layer 1010 is formed between the cathode 1006 and anode 1004 and acts as a light emitting layer. Additional layers, which can be formed between the anode 1004 and cathode 1006, can include a hole transporting layer, a hole injection layer, an electron transporting layer and an electron injection layer.

[0022] Hole transporting and/or injection layers can be interposed between the light emitting layer 1010 and the anode 1004. Electron transporting and/or injecting layers can be interposed between the cathode 1006 and the light emitting layer 1010. The electron injection layer facilitates injection of electrons from the cathode 1006 toward the light emitting layer 1010 by reducing the work function for injecting electrons from the cathode 1006. Similarly, the hole injection layer facilitates injection of holes from the anode 1004 toward the light emitting layer 1010. The hole and electron transporting layers facilitate

movement of the carriers injected from the respective electrodes toward the light emitting layer.

[0023] In some arrangements, a single layer may serve both electron injection and transportation functions or both hole injection and transportation functions. In some arrangements, one or more of these layers are lacking. In some arrangements, one or more organic layers are doped with one or more materials that help injection and/or transportation of the carriers. In arrangements where only one organic layer is formed between the cathode and anode, the organic layer may include not only an organic light emitting compound but also certain functional materials that help injection or transportation of carriers within that layer.

[0024] There are numerous organic materials that have been developed for use in these layers including the light emitting layer. Also, numerous other organic materials for use in these layers are being developed. In some arrangements, these organic materials may be macromolecules including oligomers and polymers. In some arrangements, the organic materials for these layers may be relatively small molecules. The skilled artisan will be able to select appropriate materials for each of these layers in view of the desired functions of the individual layers and the materials for the neighboring layers in particular designs.

[0025] In operation, an electrical circuit provides appropriate potential between the cathode 1006 and anode 1004. This results in an electrical current flowing from the anode 1004 to the cathode 1006 via the interposed organic layer(s). In one arrangement, the cathode 1006 provides electrons to the adjacent organic layer 1010. The anode 1004 injects holes to the organic layer 1010. The holes and electrons recombine in the organic layer 1010 and generate energy particles called "excitons." The excitons transfer their energy to the organic light emitting material in the organic layer 1010, and the energy is used to emit visible light from the organic light emitting material. The spectral characteristics of light generated and emitted by the OLED 1000, 1001 depend on the nature and composition of organic molecules in the organic layer(s). The composition of the one or more organic layers can be selected to suit the needs of a particular application by one of ordinary skill in the art.

[0026] OLED devices can also be categorized based on the direction of the light emission. In one type referred to as "top emission" type, OLED devices emit light and display images through the cathode or top electrode 1006. In these arrangements, the cathode 1006 is made of a material transparent or at least partially transparent with respect to visible light. In certain arrangements, to avoid losing any light that can pass through the anode or bottom electrode 1004, the anode may be made of a material substantially reflective of the visible light. A second type of OLED devices emits light through the anode or bottom electrode 1004 and is called "bottom emission" type. In the bottom emission type OLED devices, the anode 1004 is made of a material which is at least partially

transparent with respect to visible light. Often, in bottom emission type OLED devices, the cathode 1006 is made of a material substantially reflective of the visible light. A third type of OLED devices emits light in two directions, e.g. through both anode 1004 and cathode 1006. Depending upon the direction(s) of the light emission, the substrate may be formed of a material which is transparent, opaque or reflective of visible light.

[0027] In many arrangements, an OLED pixel array 1021 comprising a plurality of organic light emitting pixels is arranged over a substrate 1002 as shown in Fig. 6C. The pixels in the array 1021 are controlled to be turned on and off by a driving circuit (not shown), and the plurality of the pixels as a whole displays information or image on the array 1021. The OLED pixel array 1021 is arranged with respect to other components, such as drive and control electronics to define a display region and a non-display region. In these arrangements, the display region refers to the area of the substrate 1002 where OLED pixel array 1021 is formed. The non-display region refers to the remaining areas of the substrate 1002. The non-display region can contain logic and/or power supply circuitry. It will be understood that there will be at least portions of control/drive circuit elements arranged within the display region. For example, in PMOLEDs, conductive components will extend into the display region to provide appropriate potential to the anode and cathodes. In AMOLEDs, local driving circuits and data/scan lines coupled with the driving circuits will extend into the display region to drive and control the individual pixels of the AMOLEDs.

[0028] One design and fabrication consideration in OLED devices is that certain organic material layers of OLED devices can suffer damage or accelerated deterioration from exposure to water, oxygen or other harmful gases. Accordingly, it is generally understood that OLED devices be sealed or encapsulated to inhibit exposure to moisture and oxygen or other harmful gases found in a manufacturing or operational environment. Fig. 6D schematically illustrates a cross-section of an encapsulated OLED device 1011 having a layout of Fig. 6C and taken along the line d-d of Fig. 6C. A generally planar top plate or substrate 1061 engages with a seal 1071 which further engages with a bottom plate or substrate 1002 to enclose or encapsulate the OLED pixel array 1021. In other arrangements, one or more layers are formed on the top plate 1061 or bottom plate 1002, and the seal 1071 is coupled with the bottom or top substrate 1002, 1061 via such a layer. In the illustrated arrangement, the seal 1071 extends along the periphery of the OLED pixel array 1021 or the bottom or top plate 1002, 1061.

[0029] The seal 1071 is made of a frit material as will be further discussed below. In various arrangements, the top and bottom plates 1061, 1002 comprise materials such as plastics, glass and/or metal foils which can provide a barrier to passage of oxygen and/or water to thereby protect the OLED pixel array 1021 from exposure to these substances. At least one of the top plate 1061 and

the bottom plate 1002 may be formed of a substantially transparent material.

[0030] To lengthen the life time of OLED devices 1011, it is generally desired that seal 1071 and the top and bottom plates 1061, 1002 provide a substantially non-permeable seal to oxygen and water vapor and provide a substantially hermetically enclosed space 1081. In certain applications, it is indicated that the seal 1071 of a frit material in combination with the top and bottom plates 1061, 1002 provide a barrier to oxygen of less than approximately 10^{-3} cc/m²-day and to water of less than 10^{-6} g/m²-day. Given that some oxygen and moisture can permeate into the enclosed space 1081, in some arrangements, a material that can take up oxygen and/or moisture is formed within the enclosed space 1081.

[0031] The seal 1071 has a width W, which is its thickness in a direction parallel to a surface of the top or bottom substrate 1061, 1002 as shown in Fig. 6D. The width varies among arrangements and ranges from about 300 μ m to about 3000 μ m, optionally from about 500 μ m to about 1500 μ m. Also, the width may vary at different positions of the seal 1071. The seal 1071 may be the largest where the seal 1071 contacts one of the bottom and top substrate 1002, 1061 or a layer formed thereon. The width may be the smallest where the seal 1071 contacts the other. The width variation in a single cross-section of the seal 1071 relates to the cross-sectional shape of the seal 1071 and other design parameters.

[0032] The seal 1071 has a height H, which is its thickness in a direction perpendicular to a surface of the top or bottom substrate 1061, 1002 as shown in Fig. 6D. The height varies among arrangements and ranges from about 2 μ m to about 30 μ m, optionally from about 10 μ m to about 15 μ m. Generally, the height does not significantly vary at different positions of the seal 1071. However, in certain arrangements, the height of the seal 1071 may vary at different positions thereof.

[0033] In the illustrated arrangement, the seal 1071 has a generally rectangular cross-section. In other arrangements, however, the seal 1071 can have other various cross-sectional shapes such as a generally square cross-section, a generally trapezoidal cross-section, a cross-section with one or more rounded edges, or other configuration as indicated by the needs of a given application. To improve hermeticity, it is generally desired to increase the interfacial area where the seal 1071 directly contacts the bottom or top substrate 1002, 1061 or a layer formed thereon. In some arrangements, the shape of the seal can be designed such that the interfacial area can be increased.

[0034] The seal 1071 can be arranged immediately adjacent the OLED array 1021, and in other arrangements, the seal 1071 is spaced some distance from the OLED array 1021. In certain arrangements, the seal 1071 comprises generally linear segments that are connected together to surround the OLED array 1021. Such linear segments of the seal 1071 can extend generally parallel to respective boundaries of the OLED array 1021. In other

arrangements, one or more of the linear segments of the seal 1071 are arranged in a non-parallel relationship with respective boundaries of the OLED array 1021. In yet other arrangements, at least part of the seal 1071 extends between the top plate 1061 and bottom plate 1002 in a curvilinear manner.

[0035] As noted above, in certain arrangements, the seal 1071 is formed using a frit material or simply "frit" or glass frit," which includes fine glass particles. The frit particles includes one or more of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li₂O), sodium oxide (Na₂O), potassium oxide (K₂O), boron oxide (B₂O₃), vanadium oxide (V₂O₅), zinc oxide (ZnO), tellurium oxide (TeO₂), aluminum oxide (Al₂O₃), silicon dioxide (SiO₂), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P₂O₅), ruthenium oxide (Ru₂O), rubidium oxide (Rb₂O), rhodium oxide (Rh₂O), ferrite oxide (Fe₂O₃), copper oxide (CuO), titanium oxide (TiO₂), tungsten oxide (WO₃), bismuth oxide (Bi₂O₃), antimony oxide (Sb₂O₃), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate, etc. These particles range in size from about 2 μm to about 30 μm , optionally about 5 μm to about 10 μm , although not limited only thereto. The particles can be as large as about the distance between the top and bottom substrates 1061, 1002 or any layers formed on these substrates where the frit seal 1071 contacts.

[0036] The frit material used to form the seal 1071 can also include one or more filler or additive materials. The filler or additive materials can be provided to adjust an overall thermal expansion characteristic of the seal 1071 and/or to adjust the absorption characteristics of the seal 1071 for selected frequencies of incident radiant energy. The filler or additive material(s) can also include inversion and/or additive fillers to adjust a coefficient of thermal expansion of the frit. For example, the filler or additive materials can include transition metals, such as chromium (Cr), iron (Fe), manganese (Mn), cobalt (Co), copper (Cu), and/or vanadium. Additional materials for the filler or additives include ZnSiO₄, PbTiO₃, ZrO₂, eucryptite.

[0037] A frit material as a dry composition can contain glass particles from about 20 to 90 about wt%, and the remaining includes fillers and/or additives. In some arrangements, the frit paste contains about 10-30 wt% organic materials and about 70-90% inorganic materials. In some arrangements, the frit paste contains about 20 wt% organic materials and about 80 wt% inorganic materials. The organic materials may include about 0-30 wt% binder(s) and about 70-100 wt% solvent(s). About 10 wt% may be binder(s) and about 90 wt% may be solvent(s) among the organic materials. The inorganic materials may include about 0-10 wt% additives, about 20-40 wt% fillers and about 50-80 wt% glass powder. About 0-5 wt% may be additive(s), about 25-30 wt% may be filler(s) and about 65-75 wt% may be the glass powder among the inorganic materials.

[0038] In forming a frit seal, a liquid material is added to the dry frit material to form a frit paste. Any organic or

inorganic solvent with or without additives can be used as the liquid material. The solvent may includes one or more organic compounds. For example, applicable organic compounds are ethyl cellulose, nitro cellulose, hydroxyl propyl cellulose, butyl carbitol acetate, terpineol, butyl cellulose, acrylate compounds. Then, the thus formed frit paste can be applied to form a shape of the seal 1071 on the top and/or bottom plate 1061, 1002.

[0039] In one arrangement, a shape of the seal 1071 is initially formed from the frit paste and interposed between the top plate 1061 and the bottom plate 1002. The seal 1071 can in certain arrangements be pre-cured or pre-sintered to one of the top plate and bottom plate 1061, 1002. Following assembly of the top plate 1061 and the bottom plate 1002 with the seal 1071 interposed therebetween, portions of the seal 1071 are selectively heated such that the frit material forming the seal 1071 at least partially melts. The seal 1071 is then allowed to resolidify to form a secure joint between the top plate 1061 and the bottom plate 1002 to thereby inhibit exposure of the enclosed OLED pixel array 1021 to oxygen or water.

[0040] The selective heating of the frit seal is carried out by irradiation of light, such as a laser or directed infrared lamp. As previously noted, the frit material forming the seal 1071 can be combined with one or more additives or filler such as species selected for improved absorption of the irradiated light to facilitate heating and melting of the frit material to form the seal 1071.

[0041] OLED devices 1011 are often mass produced. In an arrangement illustrated in Fig. 6E, a plurality of separate OLED arrays 1021 is formed on a common bottom substrate 1101. In the illustrated arrangement, each OLED array 1021 is surrounded by a shaped frit to form the seal 1071. A common top substrate (not shown) is placed over the common bottom substrate 1101 and the structures formed thereon such that the OLED arrays 1021 and the shaped frit paste are interposed between the common bottom substrate 1101 and the common top substrate. The OLED arrays 1021 are encapsulated and sealed, such as via the previously described enclosure process for a single OLED display device. The resulting product includes a plurality of OLED devices kept together by the common bottom and top substrates. Then, the resulting product is cut into a plurality of pieces, each of which constitutes an OLED device 1011 of Fig. 6D. In certain arrangements, the individual OLED devices 1011 then further undergo additional packaging operations to further improve the sealing formed by the frit seal 1071 and the top and bottom substrates 1061, 1002.

[0042] FIG. 1 is a cross-sectional view of an exemplary organic light emitting display device. Referring to FIG. 1, a substrate 100, which is equivalent to the bottom plate 1002, is provided, and organic light emitting diodes or pixels 110 is disposed on the substrate 100. The organic light emitting diode 110 includes a first electrode, an organic layer having at least an emission layer, and a second electrode. In addition, the organic light emitting diode 110 may further include a thin film transistor having a

semiconductor layer, a gate electrode, and source and drain electrodes.

[0043] Subsequently, an encapsulation substrate 120, which is equivalent to the top plate 1061, is provided. A glass frit 130 is formed on one surface of the substrate 100 or the encapsulation substrate 120, and the substrate 100 is attached to the encapsulation substrate 120. Subsequently, a laser is irradiated on the glass frit 130 to melt and solidify the glass frit 130, thereby fabricating an organic light emitting display device. The glass frit is typically formed to have a height of about 14 μm or less. Thus, when the substrate and the encapsulation substrate are joined using the glass frit, a central portion of the encapsulation substrate may deform by about 7 to about 8 μm so that the encapsulation substrate has a curvature. As a result, an air gap between the substrate and the encapsulation substrate becomes irregular, and concentric circular patterns are formed on an emission surface of the encapsulation substrate, i.e., Newton's rings occur. Further, an internal space of the organic light emitting display device is typically filled with an inert gas such as N_2 or the like, and thus, the device may have less resistance against external impact.

[0044] To cope with the above-described drawbacks, the Newton's rings and the possible damage due to the external impact can be prevented by filling the internal space of the organic light emitting display device with a material or sealant such as urethane acryl or the like. However, such filling of the internal space may cause the material to contact the glass frit. Also, the material or sealant may contaminate the frit during the process of melting and resolidifying the frit for sealing between the substrate to the encapsulation substrate. For example, when laser is irradiated onto the glass frit for the sealing, the sealant as an organic material may be heated by the laser and turn to or generate chemical compounds that may be harmful to the glass frit. Also, such organic material may flow into the area where the glass frit is formed and form a film between the glass frit and the substrate so that adhesive strength between the glass frit and the substrate can be degraded.

[0045] FIGS. 2 to 5 are cross-sectional views of an organic light emitting display device in accordance with embodiments of the present invention. Referring to FIG. 2, a substrate 200, which is equivalent to the bottom plate 1002, having a pixel region I and a non-pixel region II is provided. An insulating glass, plastic, or conductive substrate may be used as the substrate 200.

[0046] In certain embodiments, an organic light emitting diode 210 is formed in the pixel region I of the substrate 200. The organic light emitting diode 210 includes a first electrode 220, an organic layer 230 having at least an emission layer, and a second electrode 240. In the organic light emitting diode 210, the first electrode 220 may be formed of Indium Tin Oxide (ITO) or Indium Zinc Oxide (IZO). Further, in a case of a top emitting type, the organic light emitting diode may further include a reflective layer. The organic layer 230 may include at least an

emission layer, and may further include at least one of a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer. The second electrode 240 may be formed of at least one of Mg, Ag, Al, Ca, and an alloy thereof which have a low work function. In addition, the organic light emitting diode 210 may further include a thin film transistor having a semiconductor layer, a gate electrode, and source and drain electrodes. The thin film transistor may be a top gate type in which the gate electrode is disposed above the semiconductor layer, or a bottom gate type in which the gate electrode is disposed below the semiconductor layer. A passivation layer 250 covering the organic light emitting diode 210 may be formed. The passivation layer 250 acts to protect the organic light emitting diode 210 from external physical and chemical stimulation, and may be formed of an organic layer, an inorganic layer, or a composite layer thereof.

[0047] Referring to FIG. 3, an encapsulation substrate 260, which is equivalent to the top plate 1061, is provided. The encapsulation substrate 260 may be an insulating glass or plastic substrate. In some embodiments, a groove or recess 270 is formed in certain regions of the encapsulation substrate 260. For example, the groove or recess 270 is formed into the encapsulation substrate 260 such that the recess 270 forms a substantially closed loop surrounding the area immediately opposing the pixel region I of the substrate 200. The groove is preferably formed to completely surround the pixel region I although not limited thereto. Further, the recess 270 is formed internal to the areas on which the frit is to be formed.

[0048] The groove or recess 270 may be formed by etching, sand blasting, or molding, although not limited thereto. The recess 270 may be formed in various cross-sectional shapes. The cross-sectional shape of the recess 270 may be generally rectangular, square, triangular, etc. One or more edges forming the recess 270 may be linear or curvilinear. The recess 270 may include one or more surface that is sloped with reference to the interior surface of the substrate, into which the recess is formed.

[0049] In the illustrated embodiment, the recess 270 includes a first slope 272 and a second slope 274 with reference to the interior surface 262 of the encapsulation substrate 260. The first slope 272 is closer to the center of the interior surface of the encapsulation substrate 260 than the second slope 274. The second slope 274 is closer to the periphery of the encapsulation substrate 260 than the first slope 272. In the illustrated embodiment, the second slope 274 is steeper than the first slope 272 with reference to the interior surface. Thus, the sealant can smoothly flow over the first slope into the groove, but it is not easy for the sealant to flow beyond the second slope and be in contact with the glass frit. In some embodiments, the angle of the first slope 272 of the recess 270 with respect to the interior surface 262 of the encapsulation substrate 260 is about 0.1°, 0.2°, 0.3°, 0.4°, 0.5°, 0.7°, 1°, 2°, 3°, 4°, 5°, 6°, 7°, 8°, 9°, 10°, 12°, 15°, 20°,

25°, 30°, 35°, 40°, 45° or 50°. In certain embodiments, the angle of the second slope 274 of the recess 270 with respect to the interior surface 262 of the encapsulation substrate 260 is about 90°, 88°, 86°, 84°, 82°, 80°, 78°, 76°, 73°, 70°, 65°, 60°, 55°, 50° or 45°.

[0050] The groove 270 preferably has a depth (d) of about 20 μm to about 300 μm , although not limited thereto. In certain embodiments, the groove or recess 270 has a depth of about 10, 20, 30, 40, 50, 70, 100, 150, 200, 250, 300, 350, 400, 450, 550, 600, 700, 800, 900 or 1000 μm . The groove 270 preferably has a width (w) of about 0.1 mm to about 5 mm, although not limited thereto. In certain embodiments, the groove or recess 270 has a width of about 0.1, 0.2, 0.3, 0.4, 0.5, 0.7, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 9 or 10 mm.

[0051] A glass frit 280 is formed along the periphery of the groove 270 of the encapsulation substrate 260. The glass frit 280 may be formed of one selected from the group consisting of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li₂O), sodium oxide (Na₂O), potassium oxide (K₂O) boron oxide (B₂O₃), vanadium oxide (V₂O₅), zinc oxide (ZnO), tellurium oxide (TeO₂), aluminum oxide (Al₂O₃), silicon dioxide (SiO₂), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P₂O₅), ruthenium oxide (Ru₂O), rubidium oxide (Rb₂O), rhodium oxide (Rh₂O), ferrite oxide (Fe₂O₃), copper oxide (CuO), titanium oxide (TiO₂), tungsten oxide (WO₃), bismuth oxide (Bi₂O₃), antimony oxide (Sb₂O₃), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate, and a combination thereof. The glass frit 280 may be formed by a screen printing method or a dispensing method. In this case, a height of the glass frit is preferably about 10 μm to about 300 μm .

[0052] A sealant 290 is formed within a region surrounded by the groove 270 of the encapsulation substrate 260 to form a film between the encapsulation substrate 260 and the array of organic light emitting pixels. The sealant 290 is disposed on an area corresponding to the pixel region I of the substrate 200. An UV curable material or a thermosetting material may be used as the sealant 290. For example, acrylic-based resin or polyimide-based resin may be employed, and urethane acryl is preferably employed.

[0053] In some embodiments, the sealant 290 is substantially transparent. Accordingly, light emitted from the organic light emitting diode 210 can be emitted outward through the encapsulation substrate 260. That is, a top-emitting organic light emitting display device can be implemented, although not limited thereto. In other embodiments, the organic light emitting display device may be a bottom-emitting type and light is emitted through the substrate 200. In alternative embodiment, the organic light emitting display device may be a dual-emitting type and light is emitted through both of the substrate 200 and the encapsulation substrate 260.

[0054] Referring to FIG. 4, the encapsulation substrate 260, on which the glass frit 280 and the sealant 290 are formed, is disposed such that the glass frit 280 and the

sealant 290 face the substrate 200. Pressure is applied to the substrate 200 and the encapsulation substrate 260 to seal the substrate 200 to the encapsulation substrate 260 as shown in FIG. 5. And then, the sealant 290 covers

5 the organic light emitting diode 210 formed on the substrate 200. A portion of the sealant 290 may flow toward the outside of the pixel region I when the pressure is applied. However, the portion of the sealant becomes in contact with the groove 270 and trapped therein. Accordingly, the sealant 290 is prevented from flowing to contact the glass frit 280. Thus, the glass frit 280 or film 290 can be prevented from being contaminated. In other words, the groove 270 can control the overflow of the sealant 290. Therefore, the glass frit 280 can be prevented from 10 being contaminated, the glass frit can be prevented from being delaminated, and the sealant can avoid a damage which may be caused by high heat created when the laser is irradiated onto the glass frit.

[0055] After the arranging the substrate 200 and the 20 encapsulation substrate 260, the laser is irradiated onto the glass frit 280 to melt and solidify the glass frit 280, and then the substrate 200 is attached to the encapsulation substrate 260. Heat is applied to or UV is irradiated onto the sealant 290 to cure the sealant 290. According to some embodiments of the present invention, the laser 25 is irradiated onto the glass frit and then the UV is irradiated onto the sealant for curing. However, in other embodiments, the UV may be irradiated onto the sealant to cure the sealant, and then the laser may be irradiated onto the glass frit to melt and solidify the glass frit.

[0056] As a result, an organic light emitting display device according to exemplary embodiments of the present invention is fabricated. As described above, a groove is formed on the encapsulation substrate to substantially 35 separate a sealant from a glass frit. Thus, the sealant can be prevented from being damaged by heat for melting the frit when the laser is irradiated onto the glass frit. The resultant adhesive strength of frit can be prevented from being deteriorated due to the delaminated glass frit.

[0057] Although the aspects and features of the 40 present invention has been described with reference to certain exemplary embodiments thereof, it will be understood by those skilled in the art that a variety of modifications and variations may be made to the embodiments presented herein without departing from the scope defined in the appended claims, and their equivalents.

Claims

50 1. An organic light emitting display device, comprising:
 55 a first substrate;
 a second substrate comprising an interior surface opposing the first substrate;
 an array of organic light emitting pixels formed between the first and second substrates, the array comprising a top surface facing the second

substrate;

a frit seal interposed between the first and second substrates while surrounding the array; and a film structure comprising one or more layered films, the film structure comprising a portion interposed between the array and the second substrate, the film structure contacting the interior surface and the top surface; and wherein the second substrate comprises a recess on the interior surface.

2. A device according to Claim 1, wherein the recess is located between the film structure and the frit seal.

3. A device according to Claim 1 or 2, wherein the film structure does not contact the frit seal.

4. A device according to any one of Claims 1 to 3, wherein the interior surface is substantially planar and has a size substantially equal to or greater than that of the top surface.

5. A device according to any one of Claims 1 to 4, wherein at least part of the film structure is formed within the recess.

6. A device according to any one of Claims 1 to 5, wherein the film structure extends into the recess.

7. A device according to any one of Claims 1 to 6, wherein the film structure further comprises another portion interposed between the first and second substrates while not interposed between the array and the second substrate.

8. A device according to any one of Claims 1 to 7, wherein the film structure covers substantially the entire portion of the top surface.

9. A device according to any one of Claims 1 to 8, wherein the film structure comprises a resin.

10. A device of Claim 9, wherein the resin is of a UV curable type or a heat curable type.

11. A device according to Claim 9 or 10, wherein the resin comprises at least one selected from the group consisting of acrylic resins and polyimide resins.

12. A device according to Claim 11, wherein the resin comprises a urethane acrylic resin.

13. A device according to any one of Claims 1 to 12, wherein at least part of the film structure is substantially transparent with respect to visible light.

14. A device according to any one of Claims 1 to 13, wherein the array is arranged to emit visible light

through the second substrate.

5 15. A device according to any one of Claims 1 to 14, wherein the recess extends along a segment of the frit seal.

16. A device according to Claim 15, wherein the recess is substantially parallel to the segment of the frit seal.

10 17. A device according to any one of Claims 1 to 16, wherein the recess forms a closed loop.

18. A device according to any one of Claims 1 to 17, wherein the interior surface is substantially planar, and the recess comprises a slope with reference to the interior surface such that the recess becomes deeper in a direction from the center of the interior surface toward periphery of the interior surface.

20 19. A device according to any one of Claims 1 to 18, wherein the interior surface is substantially planar, and the recess comprises a first slope and a second slope with reference to the interior surface, which forms a valley, wherein the first slope is closer to the center than the second slope, wherein the second slope is steeper than the first slope with reference to the interior surface.

20 20. A device according to Claim 19, wherein the second slope is substantially perpendicular to the interior surface.

21. A device according to any one of Claims 1 to 20, wherein the array comprises a first electrode, a second electrode and an organic light emitting material interposed between the first and second electrodes, wherein the first electrode has a first distance from the first substrate, and the second electrode has a second distance from the first substrate, wherein the second distance is greater than the first distance, and wherein the top surface is a surface of the electrode.

22. A device according to any one of Claims 1 to 21, wherein the film structure comprises an organic layer and a protective layer interposed between the array and the organic resin layer, wherein the layer is configured to substantially inhibit the organic resin layer from diffusing into the array.

23. A device according to any one of Claims 1 to 22, wherein the recess has a depth measured from the interior surface, and wherein the depth is from about 20 μm to about 300 μm .

24. A device according to any one of Claims 1 to 23, wherein the recess has a width measured on the interior surface in a direction parallel to an edge of

the interior surface, and wherein the width is from about 0.1 mm to about 5 mm.

25. A device according to any one of Claims 1 to 24, wherein the frit seal comprises one or more materials selected from the group consisting of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li₂O), sodium oxide (Na₂O), potassium oxide (K₂O), boron oxide (B₂O₃), vanadium oxide (V₂O₅), zinc oxide (ZnO), tellurium oxide (TeO₂), aluminum oxide (Al₂O₃), silicon dioxide (SiO₂), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P₂O₅), ruthenium oxide (Ru₂O), rubidium oxide (Rb₂O), rhodium oxide (Rh₂O), ferrite oxide (Fe₂O₃), copper oxide (CuO), titanium oxide (TiO₂), tungsten oxide (WO₃), bismuth oxide (Bi₂O₃), antimony oxide (Sb₂O₃), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate. 5 10 15

26. A method of making an organic light emitting device, 20 the method comprising:

providing a first substrate and an array of light emitting pixels formed on the first substrate with or without a layer therebetween; 25 providing a second substrate and a curable resin formed over a surface of the second substrate, the second substrate comprising a recess on the surface; arranging the first and second substrates such that the resin is located between the array and the second substrate; 30 interconnecting the first and second substrates with a frit such that the frit surrounds the array; and 35 curing a curable resin to form a film structure such that the film structure comprises one or more layered films comprising the cured resin and contacts the second substrate and the array. 40

27. A method according to Claim 26, wherein at least part of the resin flows into the recess.

28. A method according to Claim 27, wherein the at least 45 part of the resin stops to flow within the recess.

FIG. 1

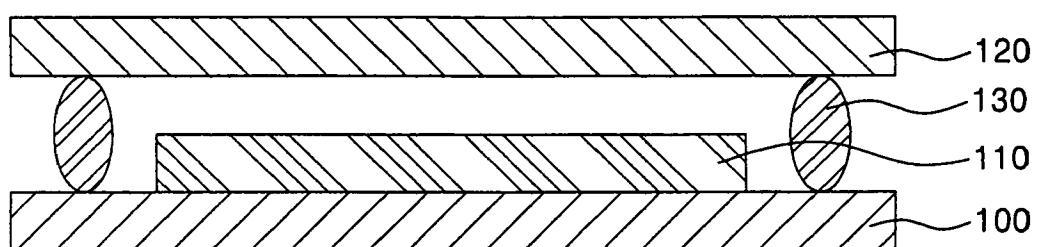


FIG. 2

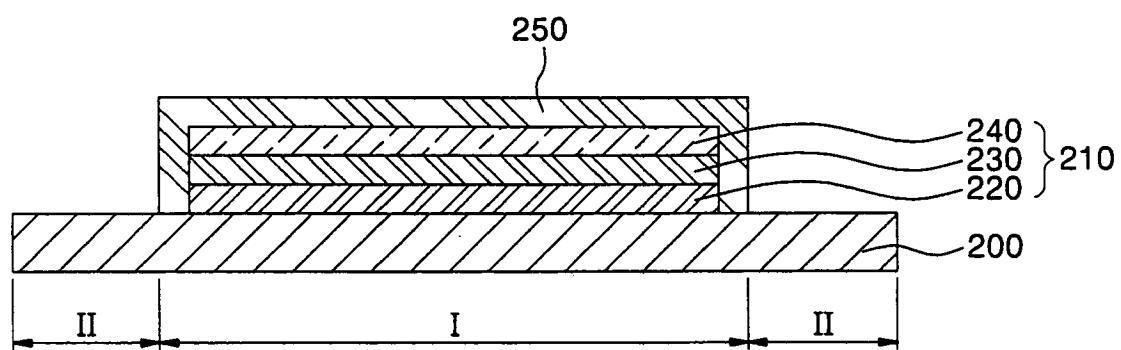


FIG. 3

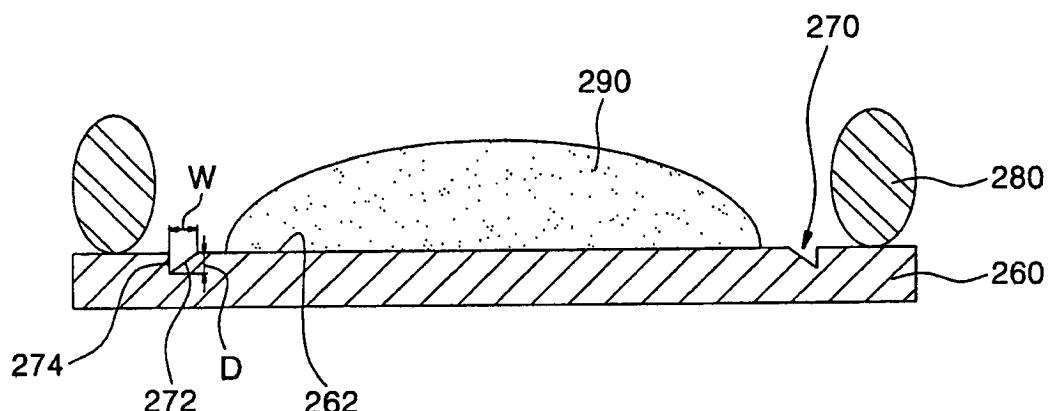


FIG. 4

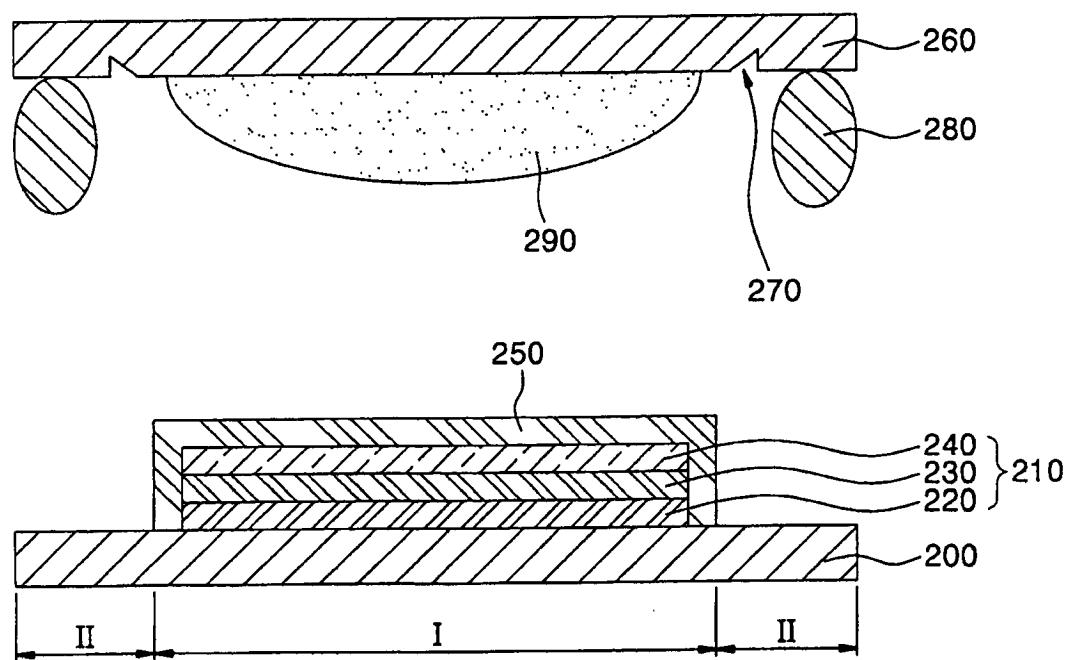


FIG. 5

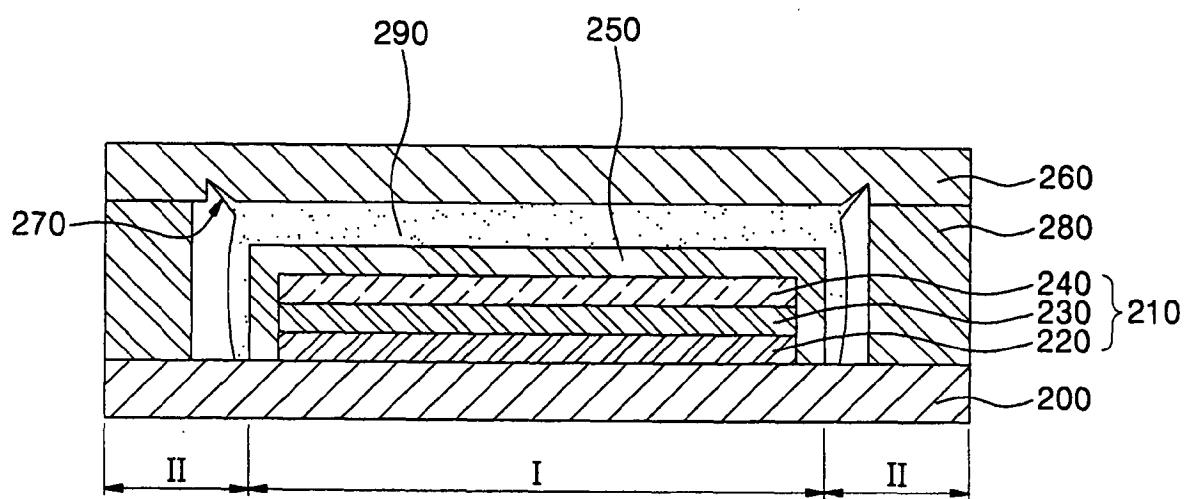


FIG. 6A

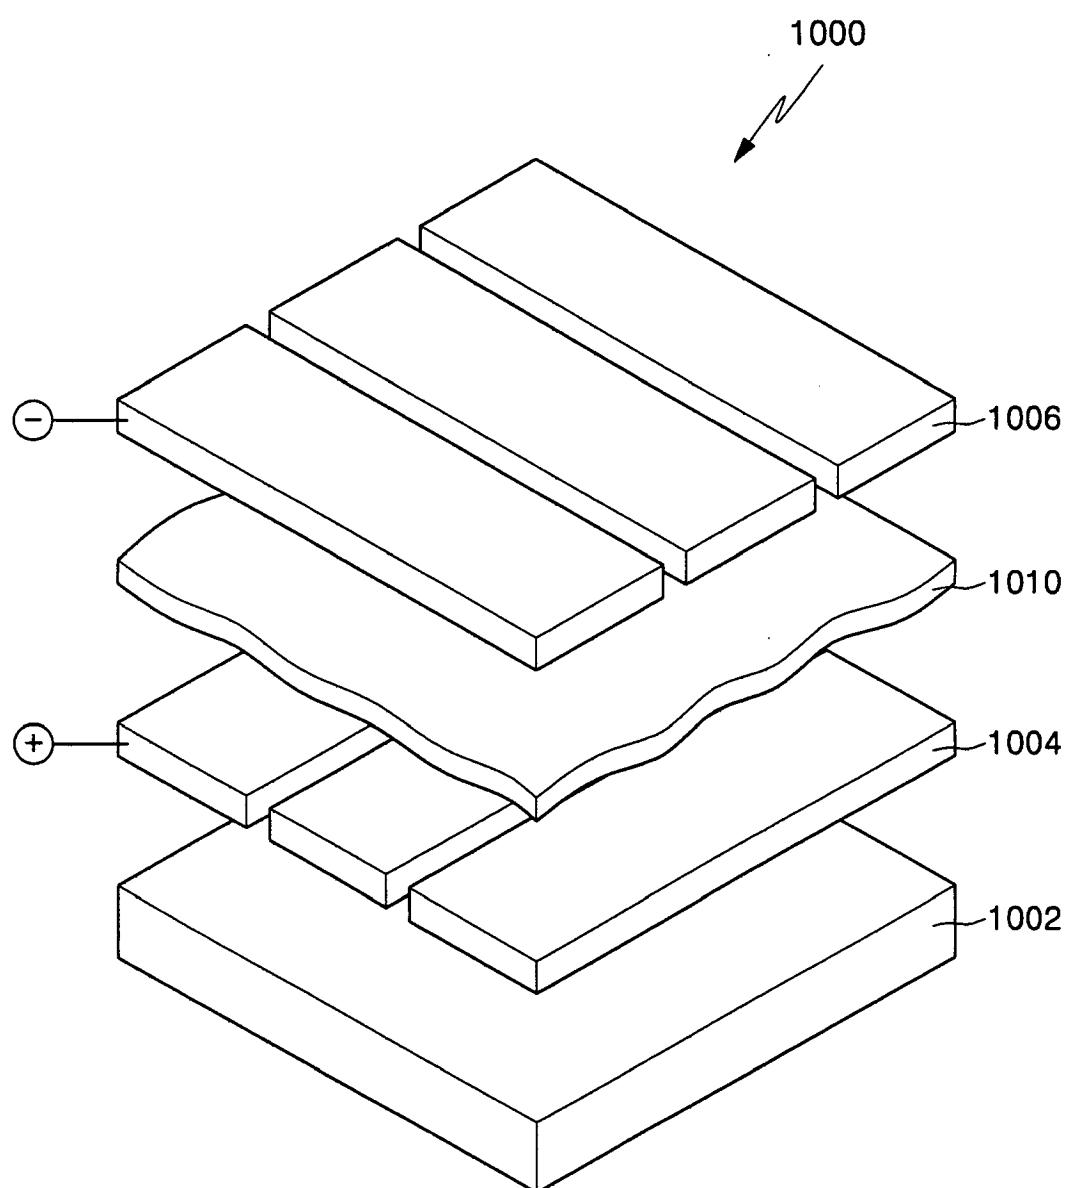


FIG. 6B

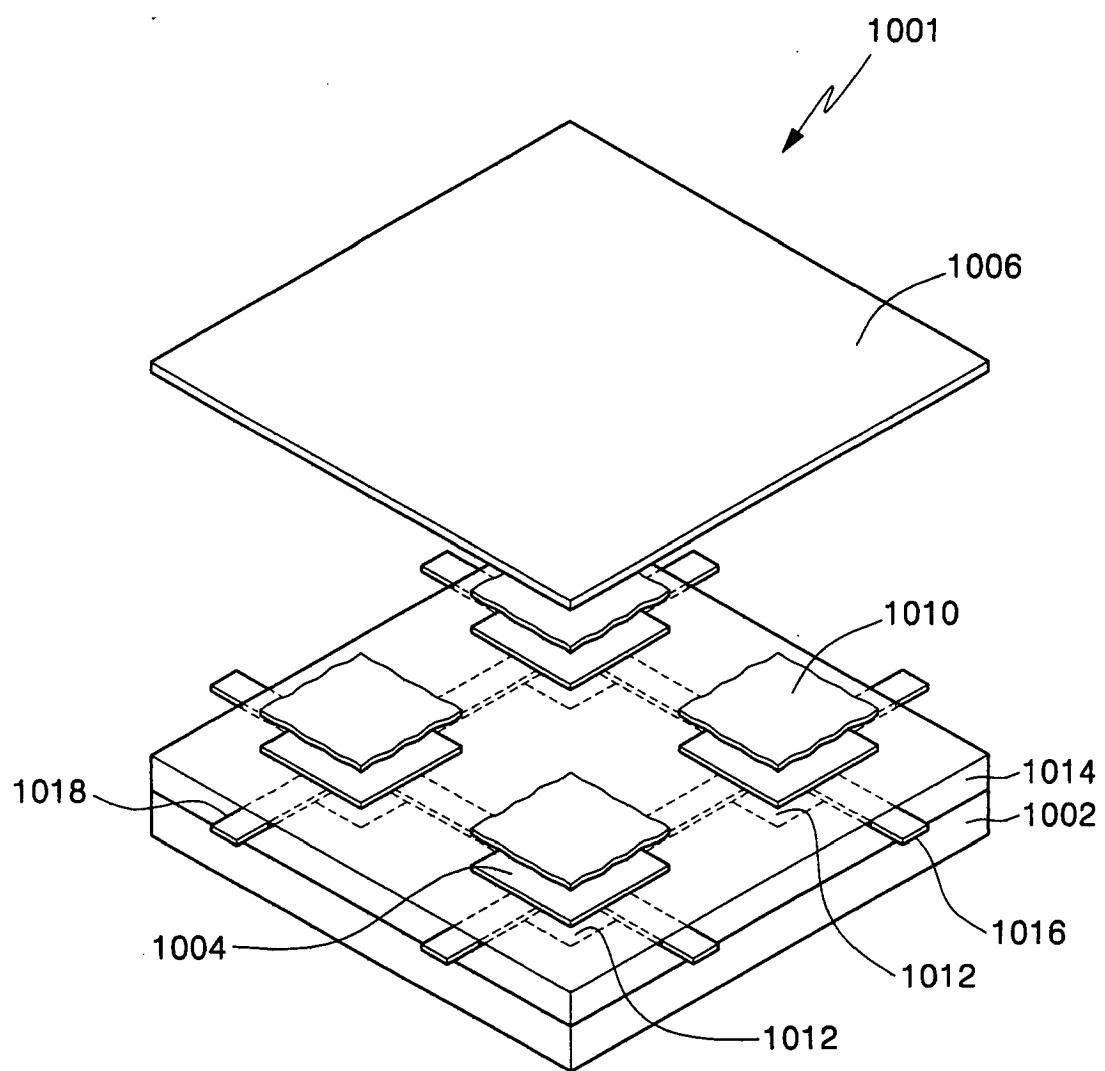


FIG. 6C

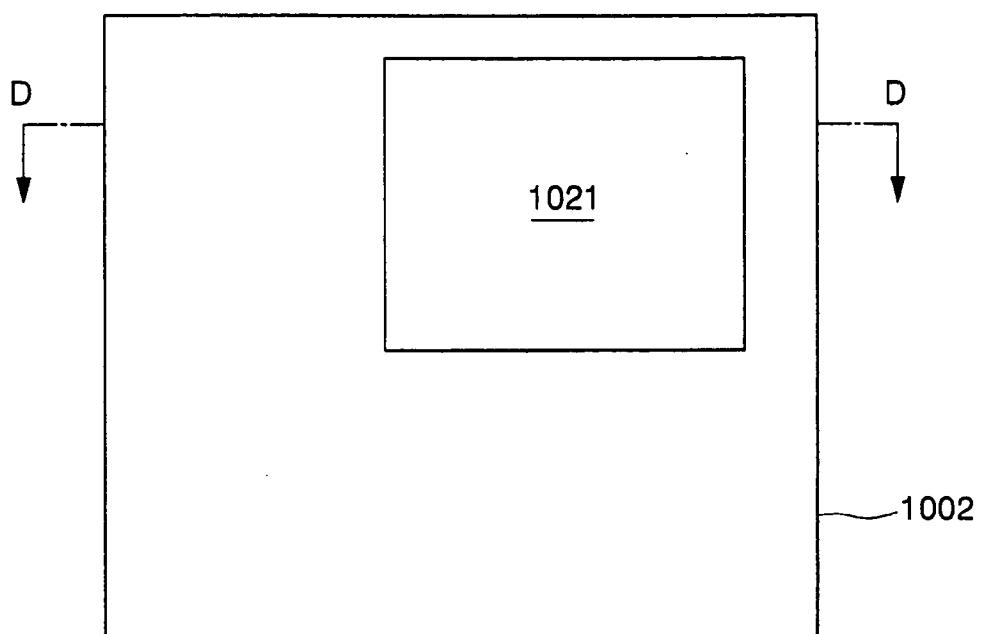


FIG. 6D


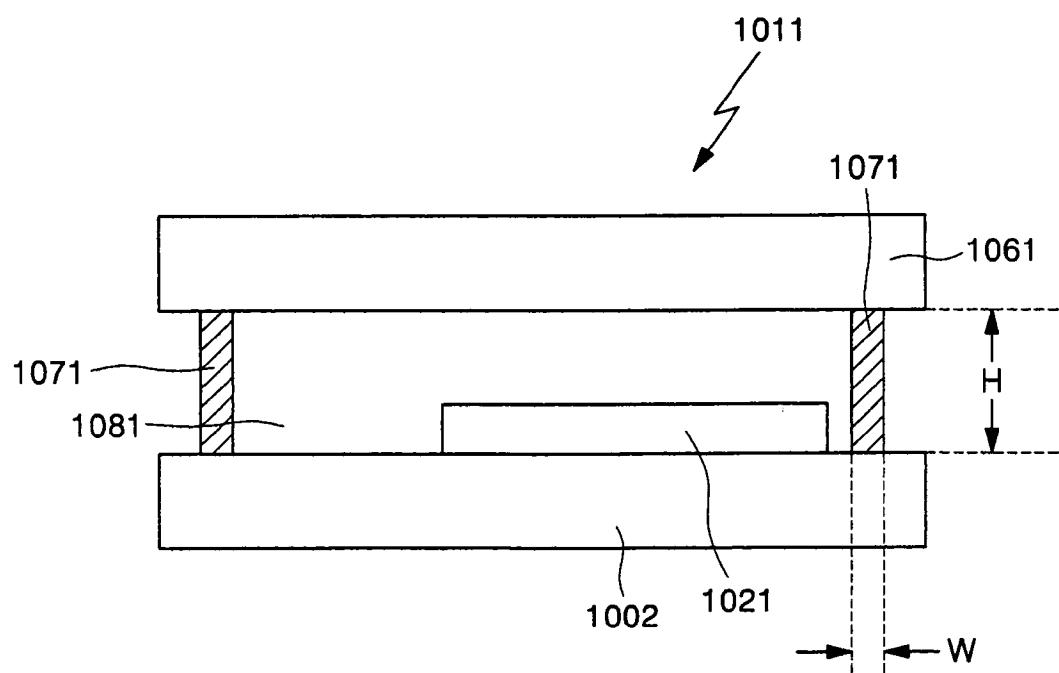


FIG. 6E

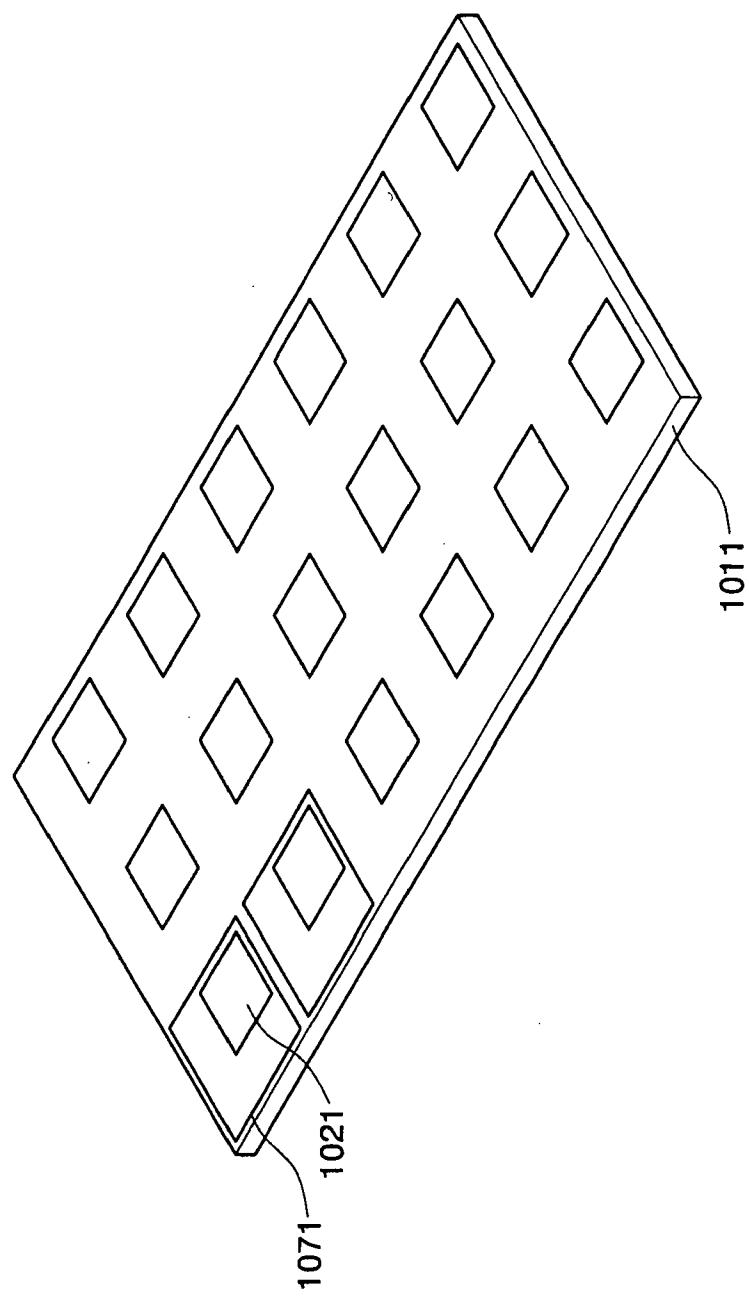

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	EP1814179A2	公开(公告)日	2007-08-01
申请号	EP2007250310	申请日	2007-01-25
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
发明人	PARK, JIN-WOO C/O SAMSUNG SDI CO., LTD.		
IPC分类号	H01L51/52 H01L27/32		
CPC分类号	H01L51/5253 H01L51/524 H01L51/5246		
优先权	1020060034899 2006-04-18 KR 1020060007961 2006-01-25 KR		
其他公开文献	EP1814179A3		
外部链接	Espacenet		

摘要(译)

提供一种有机发光显示装置。根据本发明的一个实施例的有机发光显示装置包括第一基板(200);第二基板(260),包括与第一基板相对的内表面;在第一和第二基板之间形成的有机发光像素阵列,该阵列包括面向第二基板的顶表面;在围绕阵列的同时插入第一和第二基板之间的玻璃料密封件(280);包括一个或多个分层膜的膜结构(290),所述膜结构包括插入在所述阵列和所述第二基板之间的部分,所述膜结构接触所述内表面和所述顶表面;并且其中第二基板包括内表面上的凹槽(270)。

FIG. 5

