

(19)



(11)

EP 3 154 435 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
15.08.2018 Bulletin 2018/33

(51) Int Cl.:
A61B 8/00 (2006.01) G01S 15/89 (2006.01)
G10K 11/34 (2006.01) G01S 7/52 (2006.01)

(21) Application number: **15725684.3**

(86) International application number:
PCT/EP2015/062709

(22) Date of filing: **08.06.2015**

(87) International publication number:
WO 2015/189149 (17.12.2015 Gazette 2015/50)

(54) **ULTRASOUND TRANSDUCER ASSEMBLY**
 ULTRASCHALLWANDLERANORDNUNG
 ENSEMBLE TRANSDUCTEURS À ULTRASONS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **VAN RENS, Antonia Cornelia**
5656 AE Eindhoven (NL)

(30) Priority: **12.06.2014 EP 14172046**

(74) Representative: **Gravendeel, Cornelis**
Philips Intellectual Property & Standards
High Tech Campus 5
5656 AE Eindhoven (NL)

(43) Date of publication of application:
19.04.2017 Bulletin 2017/16

(56) References cited:
EP-A1- 2 944 976 US-A- 4 790 320
US-A- 5 676 147 US-A- 5 832 923

(73) Proprietor: **Koninklijke Philips N.V.**
5656 AE Eindhoven (NL)

EP 3 154 435 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to an ultrasound transducer assembly, in particular an ultrasound beamformer for receiving ultrasound waves.

[0002] The present invention further relates to an ultrasound imaging system, in particular for in-body ultrasound imaging like cardiovascular or transesophageal echocardiography imaging.

10 BACKGROUND OF THE INVENTION

[0003] Ultrasound imaging systems are generally known producing real-time images of internal portions of a tissue of a human body or the like. Such imaging systems include a multiple channel transmit beamformer and a multiple channel receive beamformer either coupled to a single array of ultrasonic transducers using a transmit and receive switch or coupled separately to a transmit transducer array and a receive transducer array. The transmit beamformer generates timed electrical pulses and applies them to individual transducer elements to generate an ultrasound beam to a portion of interest to be analyzed. A portion of the acoustic energy is scattered back towards the transducer array from the tissues structures. An array of received transducers, which may be the same as the transmit transducers converts the pressure pulses into corresponding electrical pulses. The receive beamformer usually has a plurality of processing channels with compensating delay elements, wherein a delay value for each channel is selected to collect ultrasound waves from a selected area of interest or from a selected steering direction.

[0004] A corresponding ultrasound receive beamformer with phased sub-arrays is e.g. known from US 5,676,147.

[0005] The ultrasound penetration depth and, therefore, the area of interest is inversely proportional to the resonance frequency of the ultrasound waves, so that the field of view is close to the transducer array for high ultrasound frequencies. In order to provide high quality images of a field of view, fine and precise timing delays are required for these high ultrasound frequencies. Further, parasitic system-related time delays have an increased impact on the final image quality for these frequencies.

[0006] US 4,790,320 discloses an apparatus for parallel processing of ultrasonic information to derive simultaneously multiple vectors of ultrasonic information per ultrasonic transmission. The apparatus includes in a transducer array for each transducer element an analog to digital converter and a delay processing subsystem associated with each analog to digital converter. The output of each first incremental delay means of all of the delay processing subsystems is applied to a first summing network and, simultaneously, the output of each of the second incremental delay means is applied to a second summing network which produces a second vector of time synchronized echo information.

[0007] A further exemplary ultrasound imaging system architecture employing switched transducer elements is known from US 5,832,923 A.

SUMMARY OF THE INVENTION

[0008] It is an object of the present invention to provide an improved ultrasound transducer assembly providing a higher image quality with low technical effort.

[0009] It is furthermore an object of the present invention to provide a corresponding ultrasound imaging system.

[0010] In a first aspect of the present invention, an ultrasound transducer assembly according to claim 1 is presented that comprises:

- 45 - a first plurality of ultrasound transducer elements for receiving ultrasound waves and for providing transducer signals corresponding to the respectively received ultrasound waves,
- a second plurality of ultrasound transducer elements for receiving ultrasound waves and for providing transducer signals corresponding to the respectively received ultrasound waves,
- 50 - a plurality of signal combiners for providing different output signals on the basis of the transducer signals of the first and second plurality of transducer elements, and
- a plurality of timing elements for providing different time shifts to the transducer signals of the first plurality of transducer elements,
- a delay element associated to each of the second plurality of transducer elements for providing a fixed time delay to each of the respective transducer signals of the second plurality of transducer elements

55 wherein each of the first plurality of ultrasound transducer elements is connected to a plurality of the timing elements for providing the different time shifts to each of the transducer signals of the first plurality of transducer elements, wherein each of the first plurality of ultrasound transducer elements is connected to a plurality of the signal combiners

for providing the transducer signals of the first plurality of transducer elements including the different time shifts to different of the signal combiners

wherein each of the second plurality of transducer elements is connected to only one of the signal combiners, and wherein the plurality of signal combiners are connected to an overall combiner configured to combine the plurality of output signals to an overall output signal of the transducer assembly.

[0011] In a further aspect of the present invention, ultrasound imaging system is presented comprising an ultrasound transducer array including a plurality of ultrasound transducer elements for transmitting and receiving ultrasound waves and an ultrasound transducer assembly of this kind.

[0012] Preferred embodiments of the invention are defined in the dependent claims.

[0013] The present invention is based on the idea to provide an ultrasound transducer assembly having a first plurality of transducer elements, wherein different transducer signals of the transducer elements are differently time shifted and provided to different signal combiners. Parasitic delays or timing errors of the transducer signals can be compensated when the different output signals of the signal combiners are combined. Hence, a time delay of the transducer signals leads to a small amplitude error of the micro-beamformed output signal of the transducer assembly but not to a steering angle error so that the image quality of the overall beamformer can be improved with low technical effort.

[0014] The first plurality of ultrasound transducer elements, which are each connected to a plurality of the signal combiners form a group of first transducer elements of the ultrasound transducer assembly.

[0015] Each of the first plurality of ultrasound transducer elements is connected to a plurality of the timing elements for providing the different time shifts to each of the transducer signals. This is a possibility to achieve individual time shifts and to provide the transducer signal including the different time shifts to the different signal combiners.

[0016] In a preferred embodiment, a plurality of secondary transducer signals is formed from the transducer signal of each of the ultrasound transducer elements and wherein each of the split transducer signals is provided to one of the signal combiners, respectively. The secondary transducer signals are identical to the transducer signals and preferably formed by splitting or copying the transducer signal. Since the transducer signals of each of the transducer elements are provided to different signal combiners and since the transducer signals are differently time shifted, the timing errors and/or propagation delays included in the transducer signals can compensate each other, effectively.

[0017] In a preferred embodiment, the signal combiners each comprise an adder. This is a possibility to combine the plurality of transducer signals with a low technical effort.

[0018] In a preferred embodiment, the transducer signals of the plurality of transducer elements provided to the different signal combiners are weighted by means of different weight factors. This is a possibility to adjust the output signals combined at the signal combiners individually, since the differently time shifted transducer signals can be weighted individually. By means of the different weight factors a precise compensation of the timing errors can be achieved.

[0019] In a preferred embodiment, an amplifier or an attenuator device is associated to each of the transducer elements to provide different gain factors to the transducer signals. It shall be understood that the gain factors may be larger than one or smaller than one so that the transducer signals are either attenuated or amplified. This is a further possibility to individually set the transducer signals to an individual value so that a precise compensation of the error delays and an improved imaging can be achieved.

[0020] In a preferred embodiment, the gain factors of the transducer signals provided to one of the signal combiners having different absolute values. This is a possibility to individually set the output signal of the different signal combiners to an optimal combination of the transducer signal.

[0021] The ultrasound transducer assembly further comprises a second plurality of transducer elements, wherein a delay element is associated to each of the second plurality of transducer elements for providing a fixed time delay to the respective transducer signals of the second plurality of transducer elements. This is a possibility to achieve positive and negative time shifts to the individual transducer signals since a fixed time delay is provided to all transducer signals.

[0022] Each of the second plurality of transducer elements is connected to one of the signal combiners. The second plurality of transducer elements form a second group of transducer elements of the ultrasound transducer assembly. These transducer elements can form a reference signal for the first transducer elements which are connected to two of the signal combiners.

[0023] In a preferred embodiment, the plurality of second transducer elements and the respectively connected delay elements are virtual elements. This is a possibility to reduce the technical effort, since these reference elements can be simulated including the fixed time delay.

[0024] In a preferred embodiment, the time shift provided to the transducer signals include a fixed time delay and a relative time shift. This is a possibility to individually set the time shift to positive or negative values.

[0025] In a preferred embodiment, the relative time shift of the transducer signals provided to a first of the signal combiners is a positive time shift and the relative time shift of the transducer signals provided to a second of the signal combiners is a negative time shift. This is a possibility that the timing errors of the transducer signals can compensate each other, since the relative time shift provided to the signal combiners are positive and negative time shifts of the same transducer signals.

[0026] In a preferred embodiment, the time shifts of the transducer signals provided to one of the signal combiners have different absolute values. This is a further possibility to achieve a precise compensation of the timing errors.

[0027] In a further preferred embodiment, the time shifts of the transducer signals provided to one of the signal combiners are multiples of on first time shift.

[0028] In a further preferred embodiment, the time shifts of the transducer signals provided to different of the signal combiners have different polarities.

[0029] The plurality of signal combiners are connected to each other to combine the plurality of output signals to an overall output signal of the transducer assembly. This is a possibility to achieve a single error-compensated output signal of the ultrasound transducer assembly.

[0030] In a further preferred embodiment, the plurality of ultrasound transducer elements are connected to the signal combiners in parallel to each other. This is a possibility to combine the transducer signals to different output signals so that a timing error compensation can be achieved.

[0031] As mentioned above, the ultrasound transducer assembly according to the present invention can compensate timing errors and/or parasitic delays of the transducer signals with low technical effort, since the transducer signals are individually time shifted and provided to different signal combiners, so that the timing errors are correspondingly compensated by each other in the resulting output signal. Hence, the timing errors lead only to an amplitude error of the micro-beamformed output signal but not in a steering angle error so that the image quality can be improved.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] These and other aspects of the invention will be apparent from and elucidated with reference to the embodiment(s) described hereinafter. In the following drawings

Fig. 1 shows a schematic representation of an ultrasound imaging system in use to scan a volume of a patient's body; Fig. 2 shows a schematic block diagram of a known two-to-one channel receive beamformer of an ultrasound system; Fig. 3 shows an embodiment of a receive beamformer for timing error compensation; Fig. 4 shows a further embodiment of a two-to-one channel receive beamformer for timing error compensation; Fig. 5 shows a further embodiment of a two-to-one channel receive beamformer; and Fig. 6 shows different sensitivity diagrams for different receive beamformers and different timing errors.

DETAILED DESCRIPTION OF THE INVENTION

[0033] Fig. 1 shows a schematic illustration of an ultrasound system 10 according to an embodiment, in particular a medical three-dimensional (3D) ultrasound imaging system. The ultrasound imaging system 10 is applied to inspect a volume of an anatomical site, in particular an anatomical site of a patient 12. The ultrasound system comprises an ultrasound probe 14 having at least one transducer array having a multitude of transducer elements for transmitting and/or receiving ultrasound waves. In one example, the transducer elements each can transmit ultrasound waves in form of at least one transmit impulse of a specific pulse duration, in particular a plurality of subsequent transmit pulses. The transducer elements may be arranged in a one-dimensional array or a two-dimensional array, in particular for providing a multi-planar or three-dimensional images.

[0034] An ultrasound scan typically involves emitting ultrasound waves that illuminate a particular volume within a body, which may be designated as target volume. This can be achieved by emitting ultrasound waves at multiple different angles. A set of volume data is then obtained by receiving and processing reflected waves. A steering of the ultrasound transducer is achieved by a receive beamformer which provides individual delays to the individual ultrasound signals.

[0035] It shall be understood that the ultrasound probe 14 may either be used in a non-invasive manner (as shown in Fig. 1) or in an invasive manner (not shown) as this is usually done in two-dimensional transesophageal echocardiography (TEE). The ultrasound probe 14 may be hand-held by the user of the system, for example medical staff or a doctor. The ultrasound probe 14 is supplied to the body of the patient 12 so that an image of an anatomical site, in particular an anatomical object of the patient 12 is provided.

[0036] Further, the ultrasound system 10 may comprise a control unit 16 that controls the provision of ultrasound image via the ultrasound system 10. A control unit 16 controls the acquisition of data via the transducer array of the ultrasound probe 14 and controls the signal and image processing that form the ultrasound images out of the echos of the ultrasound beams received by the transducer array of the ultrasound probe 14.

[0037] The ultrasound system 10 may further comprise a display 18 for displaying the 3D images to the user. Still further, an input device 20 may be provided connected to the display 18 or directly to the control unit 16.

[0038] The ultrasound system 10 comprises in general a beamformer, which is provided for steering the transducer elements to a focal point within the anatomical site to be inspected. The individual transducer elements are steered to the focal point by providing individual time delays to the transducer signals so that the transit time of the ultrasound

waves from the focal point to the different transducer elements can be compensated. By means of these individual time delays provided by the beamformer, a steered ultrasound transducer can be provided.

[0039] The beamformer comprises a micro-beamformer, which is located in the ultrasound probe 14 close to the transducer array. The beamformer may further comprise a system-beamformer integrated in the control unit 16 and connected to the micro-beamformer for coarse beamforming. The ultrasound system 10 further comprises an analog-to-digital converter (ADC), which is preferably connected between the micro-beamformer and the system-beamformer.

[0040] Fig. 2 shows an ultrasound transducer known from the prior art which is generally denoted by 20. The ultrasound transducer 20 comprises a two-to-one channel receive micro-beamformer which is adapted to reduce the effects of timing errors by combining differently time shifted signals. The ultrasound transducer 20 comprises a plurality of transducer elements 22, which are adapted to receive ultrasound waves and to transform the ultrasound waves into an electrical transducer signal X1-X4. The transducer elements 22 are each connected to an amplifier 24 for amplifying the electrical transducer signals X1-X4, wherein the amplifiers 24 are preferably formed as operational amplifiers. The transducer elements 22 are each further connected to a timing element 26, which are adapted to provide a defined time shift to the electrical signals X1-X4 received from the transducer elements 22. Two of the transducer elements 22 are connected to one signal adder 28 in order to combine the electrical signals to one output signal Y1, Y2 which are combined by a coarse beamformer to an overall output signal of the ultrasound transducer (not shown).

[0041] The timing elements 26, which are connected to one of the signal adders 28 are adapted to provide a positive and a negative time shift to the electrical transducer signals X1-X4, respectively, so that timing errors can be compensated at the signal adder 28. In practice, all timing elements 26 provide a fixed positive time delay to the electrical transducer signals X1-X4 and the additional relative time shift so that a positive and a negative time shift can be implemented.

[0042] The disadvantage of these standard two-to-one channel receive beamformers is that the time delay must be set very precisely and that a grating lobe is generated already for moderate timing errors so that the resulting image quality is affected.

[0043] Fig. 3 shows an ultrasound transducer assembly according to one embodiment of the present invention which is generally denoted by 30. The ultrasound transducer assembly 30 comprises a plurality of transducer elements 32, 34, 36, 38, 40 for receiving ultrasound waves and for providing electrical transducer signals, which are generally denoted by X1, X2, X3, X4, X5. The ultrasound transducer assembly 30 further comprises in general an ultrasound beamformer connected to the ultrasound transducer elements 32-40. The ultrasound beamformer shown in Fig. 3 is formed as a four-to-one channel micro-beamformer. The ultrasound beamformer provides steering and focussing of the ultrasound transducer elements 32-40 to a point by providing a time shift to the electrical transducer signals X1-X5 as described in the following. The ultrasound transducer elements 32-40 may be arranged in a one-dimensional or a two-dimensional array of transducer elements in order to provide a two-dimensional or a three-dimensional ultrasound image.

[0044] The ultrasound transducer assembly 30 and in particular the ultrasound micro-beamformer comprises a first signal combiner 42 and a second signal combiner 44 which provide a first output signal Y1 and a second output signal Y2. The signal combiners 42, 44 are formed as signal adders which combine electrical signals on the basis of the ultrasound transducer signals X1-X4 and X2-X5 to form the output signals Y1, Y2. The signal combiners 42, 44 are each connected to the transducer elements 34, 36, 38 so that the transducer elements 34, 36, 38 are connected in parallel to each other.

[0045] The transducer elements 34, 36, 38, which form a first group of transducer elements are each connected via a first gain element 46 and a first timing element 48 to the first adder 42. The transducer elements 34, 36, 38 are further connected via a second gain element 50 and a second timing element 52 to the second signal combiner 44. A plurality - in this case - two secondary ultrasound signals are formed of the ultrasound transducer signals X2, X3, X4 preferably by splitting or copying the ultrasound transducer signals X2, X3, X4 and the secondary signals are provided with a gain factor g by means of the gain elements 46, 50 to the timing elements. The secondary ultrasound signals are identical to the respective ultrasound transducer signals X2, X3, X4. The secondary transducer signals are further provided with a time shift τ by means of the timing elements 48, 52. The gain elements 46, 50 and the timing elements 48, 52 provide different gain factors and different time shifts τ to the ultrasound transducer signals X2-X4 corresponding to the position of the respective transducer element 34-36 and corresponding to which of the signal combiners 42, 44 the respectively gained and time shifted signal is provided.

[0046] The transducer elements 32, 40 are each connected via a gain element 54 and a timing element 56 to only one of the signal combiners 42, 44. The transducer elements 32, 40, which are respectively connected to one of the signal combiners 42, 44 belong to a second group of transducer elements. The gain elements 54 provide a reference gain to the respective ultrasound transducer signal X1, X5 and the timing elements 56 provide a fixed time delay τ_1 to the ultrasound transducer signal X1, X5. The first and the second timing elements 48, 52 each provide the fixed delay τ_1 to the respective ultrasound transducer signal X2, X3, X4 and an additional time shift, which is positive in the case of the first timing elements 48 and negative in the case of the second timing elements 52. Hence, the signals provided to the first signal combiner 42 have a negative time shift relative to the fixed time delay τ_1 and the signals provided to the second signal combiner 44 have a positive time shift with respect to the fixed delay τ_1 . The output signals Y1, Y2

EP 3 154 435 B1

are finally combined e.g. by the system-beamformer to an overall output signal (not shown) of the transducer assembly 30.

[0047] The signals provided to the signal combiners 42, 44 may be provided with a weight factor in order to weigh the respective signals individually so that the respective individual transducer signals X1-X5 have an individual influence on the wave form of the output signals Y1, Y2.

5 **[0048]** Due to the combination of the differently time shifted and differently weighted ultrasound transducer signals X1-X5 combined by different signal combiners 42, 44, the resulting overall output signal is less sensitive to timing errors on the programmed delay profiles than the ultrasound beamformers known from the prior art.

[0049] The gain factors g and the time shifts τ of the gain elements 46, 50, 54 and the timing elements 48, 52, 56 have different values. The time shifts and the gain factors primarily are:

10 $\tau_1 = \text{fixed delay, sufficiently large to make all delays effectively positive}$

15
$$\tau_{2a} = \tau_1 - \Delta\tau$$

$$\tau_{2b} = \tau_1 + (N-1)\Delta\tau$$

20
$$\tau_{3a} = \tau_1 - 2\Delta\tau$$

$$\tau_{3b} = \tau_1 + (N-2)\Delta\tau$$

25
$$\tau_{4a} = \tau_1 - 3\Delta\tau$$

30
$$\tau_{4b} = \tau_1 + (N-3)\Delta\tau$$

$g_1 = \text{reference gain}$

35
$$g_{2a} = (N-1)/N * g_1$$

$$g_{2b} = 1/N * g_1$$

$$g_{3a} = (N-2)/N * g_1$$

40
$$g_{3b} = 2/N * g_1$$

.....

45
$$g_{Na} = 1/N * g_1$$

$$g_{Nb} = (N-1)/N * g_1,$$

50 wherein $\Delta\tau$ is the incremental correction for the calculated signal propagation delay difference and N is the number of transducer elements 32 - 38 in a sub-channel, in this example N=4. The structure can be used to provide any N-to-1 channel receive beamformer with N being any natural number larger than one.

[0050] In a certain embodiment, the ADC may be integrated in the micro-beamformer and connected between the transducer elements and the gain elements 54, 46, 50. In a certain embodiment, the ADC is preceded by a low noise amplifier with a fixed gain for all channels.

55 **[0051]** In a further embodiment, the transducer elements 32, 40 of the second group of elements which are only connected to one of the signal combiners 42, 44 can be implemented as virtual transducer elements, wherein the fixed time delay of the first group of transducer elements are aligned to the fixed time delay of the virtual transducer elements.

[0052] In this case, the time shifts and the gain factors will primarily be:

EP 3 154 435 B1

τ_1 = fixed delay, sufficiently large to make all delays effectively positive

$$\tau_{2a} = \tau_1 - 0.5\Delta\tau$$

$$\tau_{2b} = \tau_1 + (N-0.5)\Delta\tau$$

$$\tau_{3a} = \tau_1 - 1.5\Delta\tau$$

$$\tau_{3b} = \tau_1 + (N-1.5)\Delta\tau$$

$$\tau_{4a} = \tau_1 - 2.5\Delta\tau$$

$$\tau_{4b} = \tau_1 + (N-2.5)\Delta\tau$$

g_1 = reference gain

$$g_{2a} = (N)/(N+1) * g_1$$

$$g_{2b} = 1/(N+1) * g_1$$

$$g_{3a} = (N-1)/(N+1) * g_1$$

$$g_{3b} = 2/(N+1) * g_1$$

....

$$g_{Na} = (1)/(N+1) * g_1$$

$$g_{Nb} = (N)/(N+1) * g_1$$

wherein $\Delta\tau$ is the incremental correction for the calculated signal propagation delay difference and N is the number of non-virtual (real) transducer elements 34, 36, 38 in a sub-channel (in this example, N=3).

[0053] Fig. 4 shows an embodiment of the ultrasound transducer assembly 30 including a two-to-one channel micro-beamformer. In this embodiment, the ultrasound transducer assembly 30 comprises three or more signal combiners 60, 62, 64, which combine signals based on the ultrasound transducer signals X1-X5 of two or three transducer elements 32-40. The signal combiners 60, 62, 64 are preferably formed as signal adders and provide the output signals Y1, Y2, Y3 of the micro-beamformer which are combined to an overall output signal by the (coarse) system-beamformer (not shown). In this embodiment, the transducer elements 32, 36, 40, which belong to the second group of transducer elements are connected via the gain element 54 and the timing element 56 directly to one of the signal combiners 60, 62, 64, respectively. The transducer elements 34, 38, which belong to the first group of transducer elements are connected to a gain element 66 for providing a gain factor g to the respective ultrasound transducer signal X2, X4, wherein two separate secondary transducer signals are formed from the ultrasound transducer signals X2, X4 including the gain factor g. The secondary transducer signals are formed by splitting or copying the transducer signals X2, X4, wherein the secondary transducer signals are identical with the secondary transducer signals except for the gain factor. The two secondary transducer signals are time shifted by means of a first timing element 68 and a second timing element 70, respectively, wherein the two secondary transducer signals are provided to different of the signal combiners 60, 62, 64. Consequently, the transducer elements 32, 36, 40 which belong to the second group of transducer elements and which are in this row the odd transducer elements are directly connected to one of the signal combiners 60, 62, 64 and the transducer elements 34, 38 which are the even transducer elements are connected to two of the signal combiners 60,

62, 64.

[0054] As described above, the timing elements 56 provide a fixed delay τ_1 to the respective ultrasound transducer signal X1, X3, X5 and the timing elements 68, 70 provide the fixed delay τ_1 and additionally a relative time shift $-\Delta\tau$, $+\Delta\tau$ to the ultrasound transducer signals X2, X4, wherein the timing element 68 provide a negative time shift $-\Delta\tau$ and the timing element 70 provide a positive time shift $+\Delta\tau$ to the respective ultrasound transducer signal X2, X4.

[0055] Since the ultrasound transducer signals X2, X4 are differently time shifted and gained by means of the gain factor g, the overall output signal is less sensitive to timing errors on the programmed delay profiles than the beamformer known from the prior art so that a more precise steering and a more precise imaging of the transducer assembly can be achieved.

[0056] In a certain embodiment, the ADC may be integrated in the micro-beamformer and connected between the transducer elements and the gain elements 54, 56 (in practice, the ADC will be preceded by a low noise amplifier with a fixed gain for all channels in this case)

[0057] Fig. 5 shows a further embodiment of the ultrasound transducer assembly 30. In this embodiment, the transducer assembly 30 comprises the three or more signals combiners 60, 62, 64 which receive each signals on the basis of different ultrasound transducer signals X1-X5 provided by the different ultrasound transducer elements 32-40.

[0058] Identical with the embodiment of Fig. 4, the ultrasound transducer signals X2, X4 of the ultrasound transducer elements 34, 38 are provided with a gain factor g and split into two split signals, which are differently time shifted (positive and negative) by means of the timing elements 68, 70 and provided to the respectively neighbored signal combiner 60, 62, 64.

[0059] The ultrasound transducer signals X1, X3, X5 of the ultrasound transducer elements 32, 36, 40 are provided with a gain factor g by means of the gain element 54 and split into two or three split signals, wherein one split signal is provided with the fixed time delay by means of the timing element 56 and the so delayed signal is provided to one of the signal combiners 60, 62, 64. The other split signals are time shifted by means of a first timing element 72 and a second timing element 74, wherein the so differently time shifted signals are provided to different of the signal combiners 60, 62, 64. The first timing elements 72 provide the fixed time delay τ and a negative time shift to the respective split signal and the second timing elements 74 provide the fixed delay τ and a positive time shift to the split signal. In this certain embodiment, three secondary transducer signals are formed of the ultrasound transducer signals X3, X5 by splitting or copying and provided with different time shifts to three of the signal combiners, wherein the ultrasound transducer signals X2, X4 are split into two split signals and provided with different time shifts to two of the signal combiners 60, 62, 64.

[0060] Additionally the split signals are weighted by means of weight factors (G, 1-2G) at the signal combiners 60, 62, 64 in order to individually form the output signals Y1, Y2, Y3 on the basis of the ultrasound transducer signals X1-X5. Since the signals of three or more transducer elements 32-40 are combined at the signal combiners 60, 62, 64, the micro-beamformer output signal provided by this embodiment of the ultrasound transducer assembly is less sensitive to timing errors on the programmed delay profiles than a simple two-to-one channel micro-beamformer.

[0061] In a certain embodiment, the ADC may be integrated in the micro-beamformer and connected between the transducer elements and the gain elements 54, 66 and in practice, the ADC is preferably preceded by a low noise amplifier with a fixed gain for all channels in this case.

[0062] In the following, the amplitude of grating lobes of the overall output signal of the ultrasound transducer assembly 20 of Fig. 2 and the ultrasound transducer assemblies 30 of Fig. 4 and 5 are calculated in order to determine the sensitivity to programmed timing errors.

[0063] In practice the generated micro-beamformer delay will not be exactly equal to the desired delay. The difference between the two delays is $\Delta\tau_{\text{error}}$:

$$+\Delta\tau_{\text{gen}} = +\Delta\tau + \Delta\tau_{\text{error}}$$

$$-\Delta\tau_{\text{gen}} = -\Delta\tau - \Delta\tau_{\text{error}}$$

[0064] Note that it is assumed that the error on the positive delay is equal in magnitude but with a negative sign relative to the error on the negative delay. This is realistic since the delays are generated on the same ASIC using the same type of circuitry.

[0065] It is assumed that the ultrasound reflections of the two transducer elements can be modeled by a narrowband signal around the resonance frequency ω_{RES} according to:

$$X1(t) = A(t - \Delta\tau_{\text{real}} / 2) * \sin(\omega_{\text{RES}} (t - \Delta\tau_{\text{real}} / 2))$$

5

$$X2(t) = A(t + \Delta\tau_{\text{real}} / 2) * \sin(\omega_{\text{RES}} (t + \Delta\tau_{\text{real}} / 2))$$

[0066] With $+\Delta\tau_{\text{real}}$ = signal propagation delay difference of ultrasound signals X1 and X2 for the actual reflection and $+\Delta\tau$ if the actual reflection arrives from the steering and focusing direction

[0067] A(t) = amplitude of the envelope as a function of time.

10 **[0068]** The output signal Y1_1 of the ultrasound transducer assembly shown in Fig. 2 (prior art) can be described as follows:

$$\begin{aligned} Y1_1(t) &= X1(t + \Delta\tau_{\text{gen}}/2) + X2(t - \Delta\tau_{\text{gen}}/2) \\ &= A(t - \Delta\tau_{\text{real}} / 2 + \Delta\tau_{\text{gen}}/2) * \sin(\omega_{\text{RES}} (t - \Delta\tau_{\text{real}} / 2 + \Delta\tau_{\text{gen}}/2)) + \\ &\quad A(t + \Delta\tau_{\text{real}} / 2 - \Delta\tau_{\text{gen}}/2) * \sin(\omega_{\text{RES}} (t + \Delta\tau_{\text{real}} / 2 - \Delta\tau_{\text{gen}}/2)) \end{aligned}$$

15

20 **[0069]** For acoustic energy coming from the steering direction (Y1_1s), this formula can be rewritten to:

$$\begin{aligned} Y1_1s(t) &= A(t + \Delta\tau_{\text{error}}/2) * \sin(\omega_{\text{RES}} (t + \Delta\tau_{\text{error}}/2)) + \\ &\quad A(t - \Delta\tau_{\text{error}}/2) * \sin(\omega_{\text{RES}} (t - \Delta\tau_{\text{error}}/2)) \end{aligned}$$

25

$$\begin{aligned} Y1_1s(t) &\approx A(t) * 2 * \cos(\Delta\tau_{\text{error}}/2) * \sin(\omega_{\text{RES}} t) \\ &\approx A(t) * (2 - (\omega_{\text{RES}} \Delta\tau_{\text{error}}/2)^2) * \sin(\omega_{\text{RES}} t) \end{aligned} \quad (\text{eq. 1})$$

30

[0070] For acoustic energy coming from the direction that causes the first grating lobe (Y1_1g), this formula can be rewritten to:

$$\begin{aligned} Y1_1g(t) &= A(t + \Delta\tau_{\text{error}}/2) * \sin(\omega_{\text{RES}} (t + \Delta\tau_{\text{error}}/2)) - \\ &\quad A(t - \Delta\tau_{\text{error}}/2 + \Gamma/2) * \sin(\omega_{\text{RES}} (t - \Delta\tau_{\text{error}}/2)) \end{aligned}$$

35

$$\begin{aligned} Y1_1g(t) &\approx A(t) * 2 * \sin(\Delta\tau_{\text{error}}/2) * \cos(\omega_{\text{RES}} t) \\ &\approx A(t) * \Delta\tau_{\text{error}} * \cos(\omega_{\text{RES}} t) \end{aligned} \quad (\text{eq. 2})$$

40

45 **[0071]** In case of the ultrasound transducer 30 shown in Fig. 4, the beamformer is transparent to all odd (even) transducer signals. The even (odd) signals are transferred to two signal combiners. E.g. the signal of transducer element X2 is visible in outputs Y1 and Y2 according to:

$$\begin{aligned} Y1_2(t) &= \text{gain} * A(t - \Delta\tau_{\text{gen}}) * \sin(\omega_{\text{RES}} (t - \Delta\tau_{\text{gen}})) \\ Y2_2(t) &= \text{gain} * A(t + \Delta\tau_{\text{gen}}) * \sin(\omega_{\text{RES}} (t + \Delta\tau_{\text{gen}})) \end{aligned} \quad (\text{eq. 3})$$

50

55 **[0072]** Typically gain factors (gain) are 0.5.. 0.6. In the system beamformer (not shown) the signals are combined according to:

$$Y_{total_2}(t) = Y1_2(t + \Delta\tau_{sys}) + Y1_2(t - \Delta\tau_{sys}) \quad (\text{eq. 4})$$

wherein $\Delta\tau_{sys}$ is the delay generated in the system beamformer, located externally in the imaging system. It is assumed that this system generates the correct steering or focusing delays (the system beamformer typically has much more calculation power than the micro-beamformer), so

$$+\Delta\tau_{sys} = +\Delta\tau = +\Delta\tau_{gen} - \Delta\tau_{error}$$

$$-\Delta\tau_{sys} = -\Delta\tau = -\Delta\tau_{gen} + \Delta\tau_{error}$$

Rewriting equation 3 and 4 gives:

$$\begin{aligned} Y_{total_2}(t) &= \text{gain} * (A(t - \Delta\tau_{error}) * \sin(\omega_{RES} (t - \Delta\tau_{error})) + \\ &A(t + \Delta\tau_{error}) * \sin(\omega_{RES} (t + \Delta\tau_{error}))) \\ &\approx \text{gain} * 2 * A(t) * \cos(\omega_{RES} \cdot \Delta\tau_{error}) * \sin(\omega_{RES} * t) \quad (\text{eq. 5}) \end{aligned}$$

[0073] Now it is possible to calculate the effective contribution of odd and even transducer signals provided by the first and second group of transducer elements to the output:

$$Y12_2(t) = X1(t - \Delta\tau_{real}/2 + \Delta\tau_{sys}/2) + Y_{total_2}(t + \Delta\tau_{real}/2 - \Delta\tau_{sys}/2)$$

[0074] For acoustic energy coming from the steering direction ($Y12_2s$), this formula can be reduced to:

$$\begin{aligned} Y12_2s(t) &\approx A(t) * (1 + g * 2 * \cos(\omega_{RES} \Delta\tau_{error})) * \sin(\omega_{RES} t) \\ &\approx A(t) * (2 - 0.5 * (\omega_{RES} \cdot \Delta\tau_{error})^2) * \sin(\omega_{RES} t); \quad [g = 0.5] \quad (\text{eq. 6}) \end{aligned}$$

[0075] For acoustic energy coming from the direction that causes the first grating lobe ($Y12_2g$), the formula can be rewritten to:

$$\begin{aligned} Y12_2g(t) &\approx A(t) * (1 - \text{gain} * 2 * \cos(\omega_{RES} \Delta\tau_{error})) * \sin(\omega_{RES} t) \\ &\approx A(t) * 0.5 * (\omega_{RES} \Delta\tau_{error})^2 * \sin(\omega_{RES} t); \quad -- [g = 0.5] \quad (\text{eq. 7}) \end{aligned}$$

[0076] Eq. 7 shows that the amplitude of the grating lobes of the proposed ultrasound transducer including the beamformer for moderate timing errors is lower than the amplitude of the grating lobes of the standard beamformer (eq. 2). Timing errors result into a phase error between odd and even ultrasound signals in case of the standard micro-beamformer while timing errors result into an amplitude error for the proposed micro-beamformer. As all timing errors result into a reduced amplitude of the split or copied secondary transducer signals (eq. 5), it is attractive for imaging performance to choose gain factor $\text{gain} > 0.5$, e.g. $g = [0.5 \dots 0.6]$.

[0077] In case of the second embodiment of the proposed ultrasound transducer 30 shown in Fig.5, the effect of the timing error is further reduced. Processing of the even transducer signals remains the same, typical value for gain $g=0.5$. The beamformer remains transparent for a major fraction of the odd signals.

[0078] A small fraction of the odd signals is transferred to neighbor output nodes. For example, the signal of transducer element X3 is visible in output Y1, Y2 and Y3 according to:

$$\begin{aligned}
 Y1_3(t) &= G * A(t - 2\Delta\tau_gen) * \sin(\omega_{RES} (t - 2.\Delta\tau_gen)) \\
 Y2_3(t) &= (1-2*G) * A(t) * \sin(\omega_{REST}) \\
 Y2_3(t) &= G * A(t + 2\Delta\tau_gen) * \sin(\omega_{RES} (t + 2\Delta\tau_gen)) \quad (\text{eq. 8})
 \end{aligned}$$

[0079] Typically gain factor $g = 0.5$ and $G = 0.1667$. In the system beamformer in imaging system (not shown) the signals are combined again according to:

$$Y_{total_3}(t) = Y1_3(t + 2\Delta\tau_sys) + Y2_3(t) + Y1_3(t - 2.\Delta\tau_sys) \quad (\text{eq. 9})$$

wherein $\Delta\tau_sys$ is the incremental delay generated in the system beamformer, located externally in the imaging system. It is assumed that this system generates the correct steering or focusing delays:

$$+\Delta\tau_sys = +\Delta\tau = +\Delta\tau_gen - \Delta\tau_error$$

$$-\Delta\tau_sys = -\Delta\tau = -\Delta\tau_gen + \Delta\tau_error$$

Rewriting equation 8 and 9 gives:

$$\begin{aligned}
 Y_{total_3}(t) &= G * (A(t - 2\Delta\tau_error) * \sin(\omega_{RES} (t - 2\Delta\tau_error)) + (1-2G) * A(t) * \sin(\omega_{REST}) \\
 &+ G * (A(t + 2\Delta\tau_error) * \sin(\omega_{RES} (t + 2\Delta\tau_error))) \\
 &\approx A(t) * (1 + G * 2 * (\cos(\omega_{RES} 2\Delta\tau_error) - 1)) * \sin(\omega_{RES} t) \quad (\text{eq. 10})
 \end{aligned}$$

[0080] Now it is possible to calculate the effective contribution of odd and even signals to the output:

$$Y12_3(t) = Y_{total_3}(t - \Delta\tau_real / 2 + \Delta\tau_sys / 2) + Y_{total_2}(t + \Delta\tau_real / 2 - \Delta\tau_sys / 2)$$

[0081] For acoustic energy coming from the steering direction ($Y12_3s$), this formula can be reduced to:

$$\begin{aligned}
 Y12_3s(t) &\approx A(t) * (1 + G * 2 * (\cos(\omega_{RES} 2\Delta\tau_error) - 1) + gain * 2 * \cos(\omega_{RES} \Delta\tau_error)) * \sin(\omega_{REST}) \\
 &\approx A(t) * (2 - 1.2 * (\omega_{RES} . \Delta\tau_error)^2) * \sin(\omega_{REST}); [g = 0.5, G=0.1667] \quad (\text{eq. 11})
 \end{aligned}$$

[0082] For acoustic energy coming from the direction that causes the first grating lobe ($Y12_3g$), the formula can be rewritten to:

$$\begin{aligned}
 Y12_2g(t) &\approx A(t) * (1 + G * 2 * (\cos(\omega_{RES} 2\Delta\tau_error) - 1) - \\
 &gain * 2 * \cos(\omega_{RES} \Delta\tau_error)) * \sin(\omega_{REST}) \\
 &<\approx A(t) * 0.1 * (\omega_{RES} \Delta\tau_error)^2 * \sin(\omega_{REST}); [g = 0.5, G=0.1667] \quad (\text{eq. 12})
 \end{aligned}$$

[0083] From equation 12 it is clear that the grating lobes are less dependent on the timing error and, therefore, the ultrasound transducer assembly 30 is less sensitive for timing errors in general.

[0084] In Fig. 6a-c, the angle sensitivity of the ultrasound transducer assembly 20, 30 of Fig. 2, 4 and 5 are shown for different values of the timing error. The sensitivity is calculated for a steering angle of -36° and a grating lobe is generated

at an angle of +25°.

[0085] All cases refer to far field sensitivity of the transducer array including the respective ultrasound beamformer. Course delays have been programmed so that the beam is steered to an angle of -36°. The simulated sensitivity is shown for beamformer timing errors of $0, 1 * T_{res}/20, 2 * T_{res}/20$ and $3 * T_{res}/20$ wherein T_{res} is the period time of the transducer resonance frequency.

[0086] As shown in Fig. 6a, the sensitivity of the transducer assembly 20 shown in Fig. 2 including the standard two-to-one beamformer has no grating lobe for zero timing error while the amplitude of the first grating lobe (happening at +25 degrees) increases for increasing timing errors.

[0087] Fig. 6b is a simulation of the ultrasound transducer assembly shown in Fig. 4, wherein the grating lobe at 25° is merely visible for a timing error of $3 * T_{res}/20$. For smaller timing errors, the grating lobe amplitude reduces rapidly.

[0088] Fig. 6c shows a simulation of the sensitivity of the ultrasound transducer using the micro-beamformer of Fig. 5. The simulation diagram shows that an error of the timing does reduce the sensitivity at the steering angle -36° but that does not show any grating lobe

[0089] Consequently, the ultrasound transducer assemblies 30 according to the present invention provides a reduced sensitivity to timing errors than the transducer assemblies known from the prior art.

[0090] While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims.

[0091] In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. A single element or other unit may fulfill the functions of several items recited in the claims. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

[0092] Any reference signs in the claims should not be construed as limiting the scope.

Claims

1. Ultrasound transducer assembly (30), comprising:

- a first plurality of ultrasound transducer elements (34, 38) for receiving ultrasound waves and for providing transducer signals (X2, X4) corresponding to the respectively received ultrasound waves,
- a second plurality of ultrasound transducer elements (32, 40) for receiving ultrasound waves and for providing transducer signals (X1, X5) corresponding to the respectively received ultrasound waves,
- a plurality of signal combiners (42, 44; 60, 62, 64) for providing a plurality of different output signals (Y1, Y2) on the basis of the transducer signals of the first and second plurality of transducer elements, and
- a plurality of timing elements (48, 52; 68, 70; 72, 74) for providing different time shifts (τ) to the transducer signals of the first plurality of transducer elements, wherein each of the first plurality of ultrasound transducer elements is connected to a plurality of the timing elements for providing the different time shifts to each of the transducer signals of the first plurality of transducer elements,
- a respective delay element (56) associated to each of the second plurality of transducer elements for providing a fixed time delay (τ_1) to each of the respective transducer signals of the second plurality of transducer elements,

wherein each of the first plurality of transducer elements is connected to a plurality of the signal combiners for providing the transducer signals of the first plurality of transducer elements including the different time shifts to different of the signal combiners,

wherein each of the second plurality of transducer elements is connected to only one of the signal combiners, and wherein the plurality of signal combiners are connected to an overall combiner configured to combine the plurality of output signals to an overall output signal of the transducer assembly.

2. Ultrasound transducer assembly as claimed in claim 1, wherein a plurality of secondary transducer signals is formed of the transducer signal of each of the first plurality of ultrasound transducer elements by the different time shifts provided by the connected timing elements, and wherein each of the secondary transducer signals is provided to one of the signal combiners, respectively.

3. Ultrasound transducer assembly as claimed in claim 1, wherein the signal combiners each comprise a signal adder.

4. Ultrasound transducer assembly as claimed in claim 1, wherein the transducer signals of the first and second plurality

of transducer elements provided to the different signal combiners are weighted by means of different weight factors (G).

- 5 5. Ultrasound transducer assembly as claimed in claim 1, wherein an amplifier or an attenuator device (46, 50, 54; 66) is associated to each of the first and second plurality of transducer elements to provide different gain factors (g) to the transducer signals.
- 10 6. Ultrasound transducer assembly as claimed in claim 5, wherein the gain factors of the transducer signals provided to one of the signal combiners have different absolute values.
- 15 7. Ultrasound transducer assembly as claimed in claim 1, wherein the second plurality of transducer elements and the respectively connected delay elements are virtual elements.
- 20 8. Ultrasound transducer assembly as claimed in claim 1, wherein the time shift provided to the transducer signals of the first plurality of transducer elements include a fixed time delay and a relative time shift.
- 25 9. Ultrasound transducer assembly as claimed in claim 8, wherein the relative time shift of the transducer signals provided to a first of the signal combiners is a positive time shift ($+\Delta\tau$) and the relative time shift of the transducer signals provided to a second of the signal combiners is a negative time shift ($-\Delta\tau$).
- 30 10. Ultrasound transducer assembly as claimed in claim 8 or 9, wherein the time shifts of the transducer signals of the first plurality of transducer elements provided to one of the signal combiners have different absolute values.
- 35 11. Ultrasound transducer assembly as claimed in claim 1, wherein the first and second plurality of ultrasound transducer elements are connected to the signal combiners in parallel to each other.
- 40 12. Ultrasound imaging system (10) comprising the ultrasound transducer assembly as claimed in claim 1.

30 Patentansprüche

1. Ultraschallwandleranordnung (30), umfassend:

- 35 - eine erste Vielzahl von Ultraschallwandlerelementen (34, 38) zum Empfangen von Ultraschallwellen und zum Bereitstellen von Wandlersignalen (X2, X4), die den jeweiligen empfangenen Ultraschallwellen entsprechen,
- eine zweite Vielzahl von Ultraschallwandlerelementen (32, 40) zum Empfangen von Ultraschallwellen und zum Bereitstellen von Wandlersignalen (X1, X5), die den jeweiligen empfangenen Ultraschallwellen entsprechen,
- 40 - eine Vielzahl von Signalkombinierern (42, 44; 60, 62, 64) zum Bereitstellen einer Vielzahl von verschiedenen Ausgangssignalen (Y1, Y2) auf der Basis der Wandlersignale aus der ersten und zweiten Vielzahl von Wandlerelementen, und
- eine Vielzahl von Zeitsteuerungselementen (48, 52; 68, 70; 72, 74) zum Bereitstellen von verschiedenen Zeitverschiebungen (τ) an die Wandlersignale aus der ersten Vielzahl von Wandlerelementen, wobei jedes aus der ersten Vielzahl von Ultraschallwandlerelementen mit einer Vielzahl der Zeitsteuerungselemente verbunden ist, zum Bereitstellen der verschiedenen Zeitverschiebungen an jedes der Wandlersignale aus der ersten Vielzahl von Wandlerelementen,
- 45 - ein jeweiliges Verzögerungselement (56), das mit jedem aus der zweiten Vielzahl von Wandlerelementen verknüpft ist, zum Bereitstellen einer festen Zeitverzögerung (τ_1) an jedes der jeweiligen Wandlersignale aus der zweiten Vielzahl von Wandlerelementen,

50 wobei jedes aus der ersten Vielzahl von Wandlerelementen mit einer Vielzahl der Signalkombinierer verbunden ist, zum Bereitstellen der Wandlersignale aus der ersten Vielzahl von Wandlerelementen, die die verschiedenen Zeitverschiebungen einschließen, an verschiedene der Signalkombinierer, wobei jedes aus der zweiten Vielzahl von Wandlerelementen mit nur einem der Signalkombinierer verbunden ist, und
 55 wobei die Vielzahl von Signalkombinierern mit einem allgemeinen Kombiniierer verbunden sind, der dazu ausgebildet ist, die Vielzahl von Ausgangssignalen zu einem allgemeinen Ausgangssignal der Wandleranordnung zu kombinieren.

EP 3 154 435 B1

2. Ultraschallwandleranordnung nach Anspruch 1, wobei über die verschiedenen Zeitverschiebungen, die von den verbundenen Zeitsteuerungselementen bereitgestellt werden, eine Vielzahl von sekundären Wandlersignalen aus dem Wandlersignal von jedem aus der ersten Vielzahl von Ultraschallwandlererelementen gebildet werden, und wobei jedes der sekundären Wandlersignale jeweils einem der Signalkombinierer bereitgestellt wird.
3. Ultraschallwandleranordnung nach Anspruch 1, wobei die Signalkombinierer jeder einen Signaladdierer umfassen.
4. Ultraschallwandleranordnung nach Anspruch 1, wobei die Wandlersignale aus der ersten und zweiten Vielzahl von Wandlererelementen, die den verschiedenen Signalkombinierern bereitgestellt werden, mittels verschiedener Gewichtungsfaktoren (G) gewichtet sind.
5. Ultraschallwandleranordnung nach Anspruch 1, wobei mit jedem aus der ersten und zweiten Vielzahl von Wandlererelementen eine Verstärker- oder eine Dämpfungsvorrichtung (46, 50, 54; 66) verknüpft ist, um den Wandlersignalen verschiedene Verstärkungsfaktoren (g) bereitzustellen.
6. Ultraschallwandleranordnung nach Anspruch 5, wobei die Verstärkungsfaktoren der Wandlersignale, die einem der Signalkombinierer bereitgestellt werden, verschiedene Absolutwerte aufweisen.
7. Ultraschallwandleranordnung nach Anspruch 1, wobei die zweite Vielzahl von Wandlererelementen und die jeweiligen verbundenen Verzögerungselemente virtuelle Elemente sind.
8. Ultraschallwandleranordnung nach Anspruch 1, wobei die Zeitverschiebung, die den Wandlersignalen aus der ersten Vielzahl von Wandlererelementen bereitgestellt wird, eine feste Zeitverzögerung und eine relative Zeitverschiebung einschließt.
9. Ultraschallwandleranordnung nach Anspruch 8, wobei die relative Zeitverschiebung der Wandlersignale, die einem ersten der Signalkombinierer bereitgestellt werden, eine positive Zeitverschiebung ($+\Delta\tau$) ist, und die relative Zeitverschiebung der Wandlersignale, die einem zweiten der Signalkombinierer bereitgestellt werden, eine negative Zeitverschiebung ($-\Delta\tau$) ist.
10. Ultraschallwandleranordnung nach Anspruch 8 oder 9, wobei die Zeitverschiebungen der Wandlersignale aus der ersten Vielzahl von Wandlererelementen, die einem der Signalkombinierer bereitgestellt werden, verschiedene Absolutwerte aufweisen.
11. Ultraschallwandleranordnung nach Anspruch 1, wobei die erste und zweite Vielzahl von Ultraschallwandlererelementen parallel zueinander mit den Signalkombinierern verbunden sind.
12. Ultraschallbildgebungssystem (10), das die Ultraschallwandleranordnung nach Anspruch 1 umfasst.

Revendications

1. Ensemble de transducteurs ultrasonores (30), comprenant :
- une première pluralité d'éléments transducteurs ultrasonores (34, 38) permettant de recevoir des ondes ultrasonores et de fournir des signaux de transducteurs (X2, X4) correspondant aux ondes ultrasonores reçues respectivement,
 - une seconde pluralité d'éléments transducteurs ultrasonores (32, 40) permettant de recevoir des ondes ultrasonores et de fournir des signaux de transducteurs (X1, X5) correspondant aux ondes ultrasonores reçues respectivement,
 - une pluralité de combineurs de signaux (42, 44 ; 60, 62, 64) permettant de fournir une pluralité de signaux de sortie (Y1, Y2) différents sur la base des signaux de transducteurs de la première et la seconde pluralité d'éléments transducteurs, et
 - une pluralité d'éléments de temporisation (48, 52 ; 68, 70 ; 72, 74) permettant d'impartir différents décalages (τ) aux signaux de transducteurs de la première pluralité d'éléments transducteurs, dans lequel chacun de la première pluralité d'éléments transducteurs ultrasonores est connecté à une pluralité des éléments de temporisation permettant d'impartir les différents décalages à chacun des signaux de transducteurs de la première pluralité d'éléments transducteurs,

EP 3 154 435 B1

- un élément de retard (56) respectif associé à chacun de la seconde pluralité d'éléments transducteurs permettant d'impartir un retard fixe (τ_1) à chacun des signaux de transducteurs respectifs de la seconde pluralité d'éléments transducteurs,

- 5 dans lequel chacun de la première pluralité d'éléments transducteurs est connecté à une pluralité des combineurs de signaux permettant de fournir les signaux de transducteurs de la première pluralité d'éléments transducteurs incluant les différents décalages à différents combineurs de signaux, dans lequel chacun de la seconde pluralité d'éléments transducteurs est connecté à un seul des combineurs de signaux, et
- 10 dans lequel la pluralité de combineurs de signaux sont connectés à un combineur global configuré pour combiner la pluralité de signaux de sortie en un signal de sortie global de l'ensemble de transducteurs.
2. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel une pluralité de signaux de transducteurs secondaires est constituée du signal de transducteur de chacun de la première pluralité d'éléments transducteurs ultrasonores par les différents décalages impartis par les éléments de temporisation connectés, et dans lequel chacun des signaux de transducteurs secondaires est fourni à un des combineurs de signaux, respectivement.
 3. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel les combineurs de signaux comprennent chacun un sommateur de signaux.
 4. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel les signaux de transducteurs de la première et la seconde pluralité d'éléments transducteurs fournis aux différents combineurs de signaux sont pondérés au moyen de différents facteurs de pondération (G).
 5. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel un amplificateur ou un dispositif atténuateur (46, 50, 54 ; 66) est associé à chacun de la première et la seconde pluralité d'éléments transducteurs pour impartir différents facteurs de gain (g) aux signaux de transducteurs.
 6. Ensemble de transducteurs ultrasonores selon la revendication 5, dans lequel les facteurs de gain des signaux de transducteurs fournis à l'un des combineurs de signaux ont des valeurs absolues différentes.
 7. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel la seconde pluralité d'éléments transducteurs et les éléments de retard connectés respectivement sont des éléments virtuels.
 8. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel le décalage impartit aux signaux de transducteurs de la première pluralité d'éléments transducteurs inclut un retard fixe et un décalage relatif.
 9. Ensemble de transducteurs ultrasonores selon la revendication 8, dans lequel le décalage relatif des signaux de transducteurs fournis à un premier des combineurs de signaux est un décalage positif ($+\Delta\tau$) et le décalage relatif des signaux de transducteurs fournis à un second des combineurs de signaux est un décalage négatif ($-\Delta\tau$).
 10. Ensemble de transducteurs ultrasonores selon la revendication 8 ou 9, dans lequel les décalages des signaux de transducteurs de la première pluralité d'éléments transducteurs fournis à l'un des combineurs de signaux ont des valeurs absolues différentes.
 11. Ensemble de transducteurs ultrasonores selon la revendication 1, dans lequel la première et la seconde pluralité d'éléments transducteurs ultrasonores sont connectés aux combineurs de signaux en parallèle les uns aux autres.
 12. Système d'imagerie ultrasonore (10) comprenant l'ensemble de transducteurs ultrasonores selon la revendication 1.

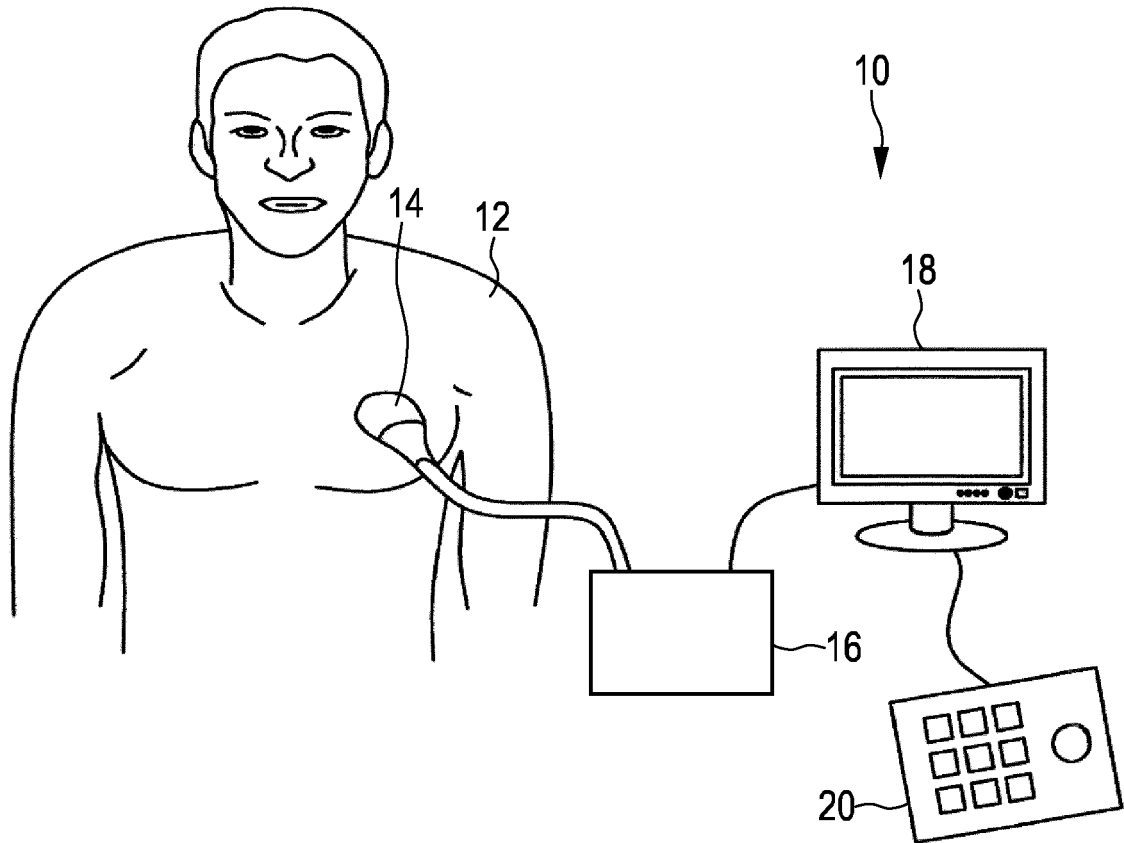


FIG. 1

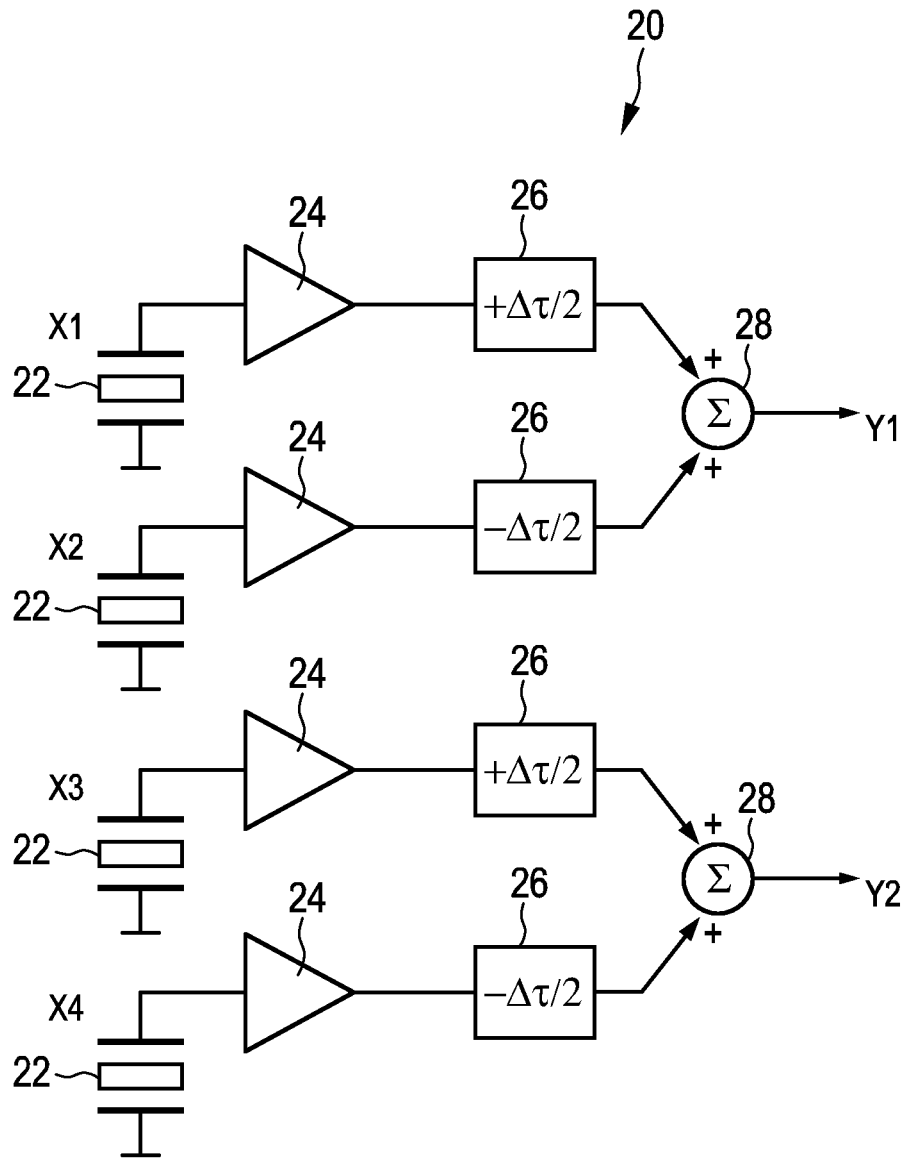


FIG. 2

-prior art-

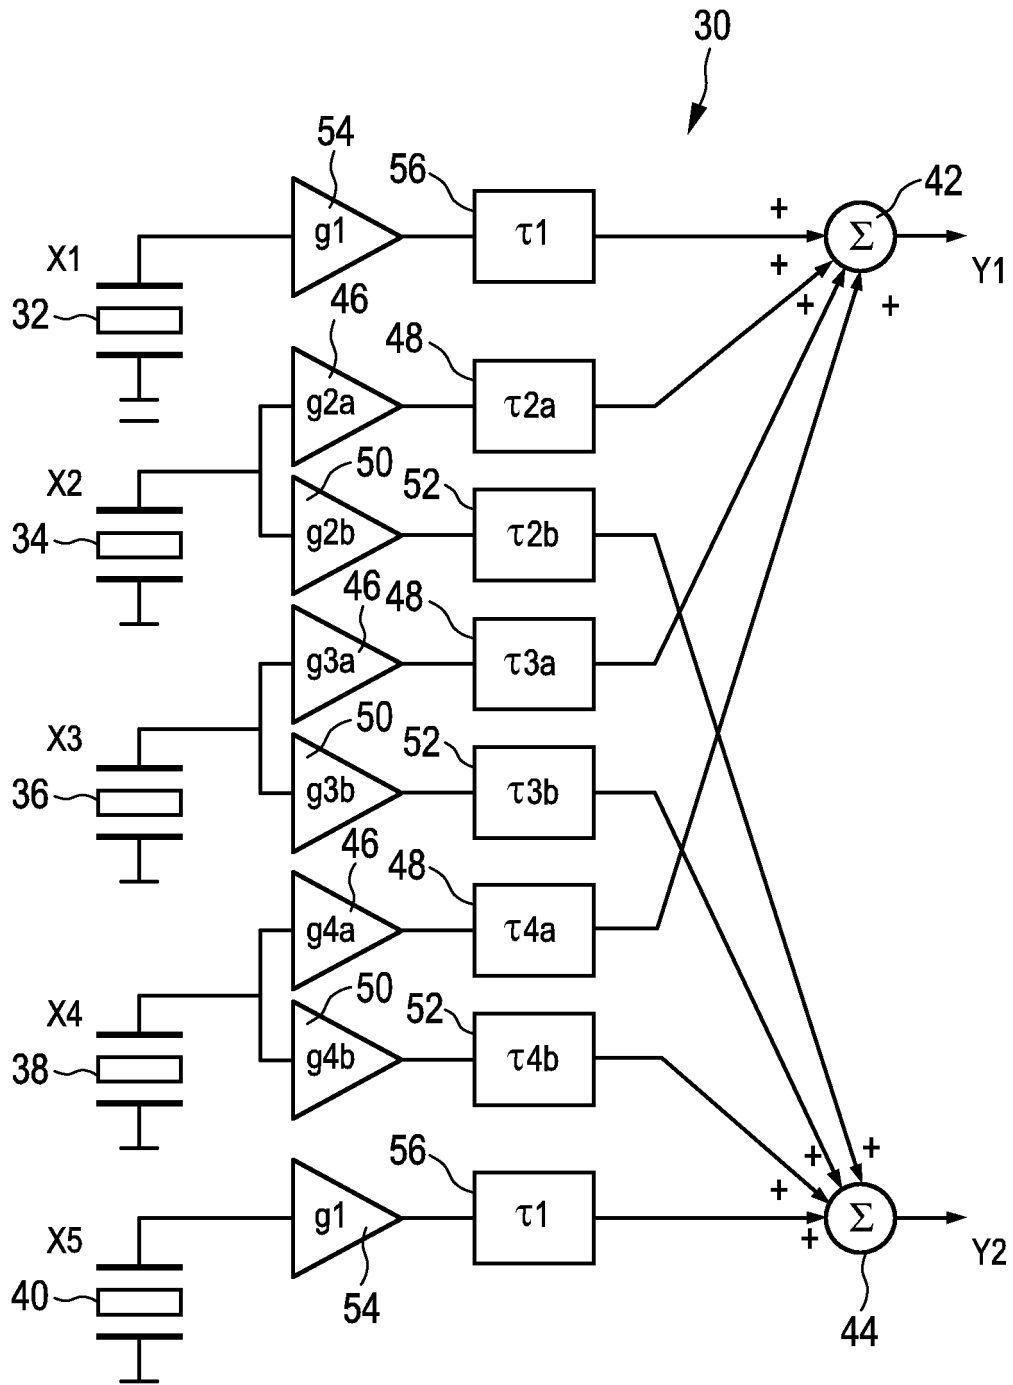


FIG. 3

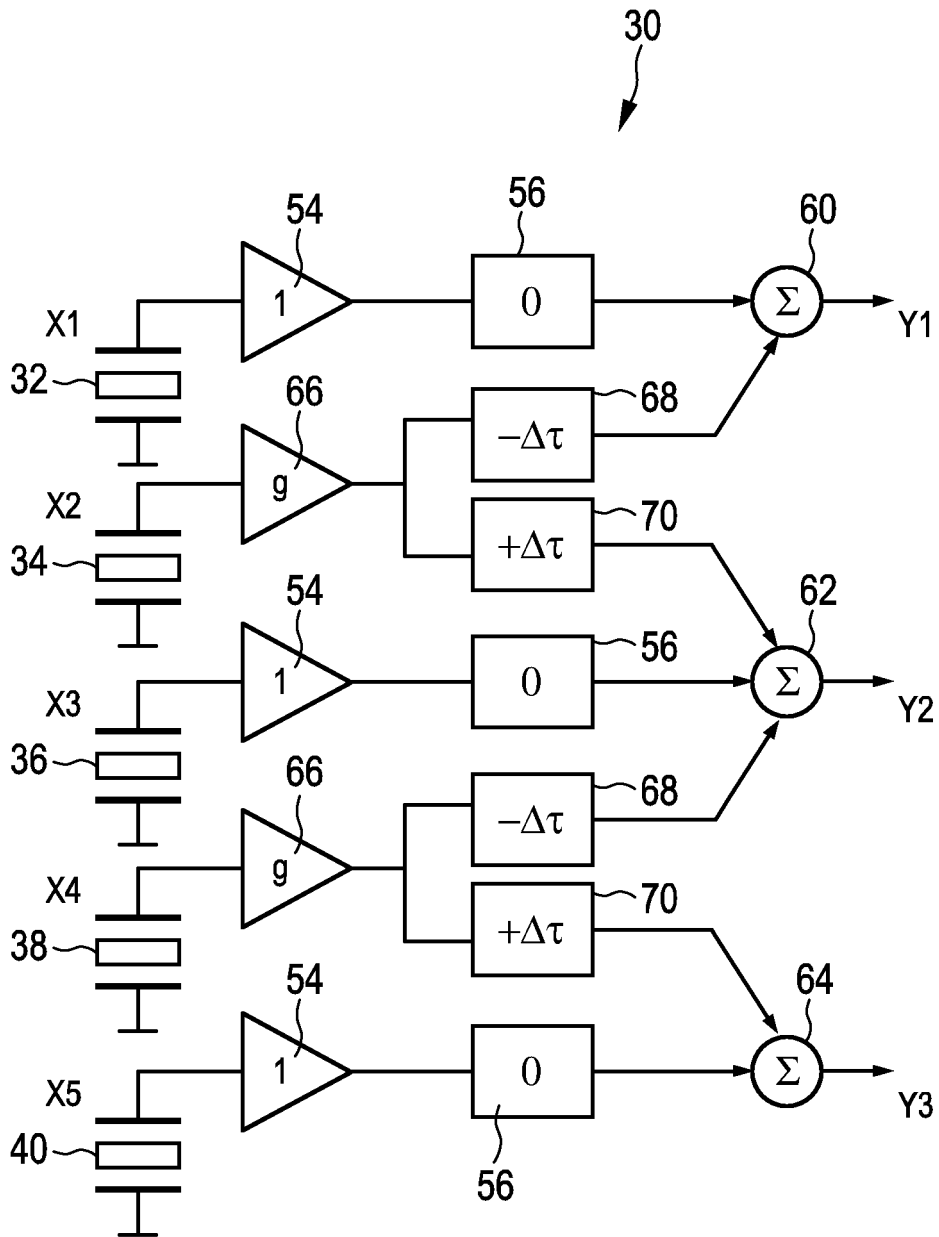


FIG. 4

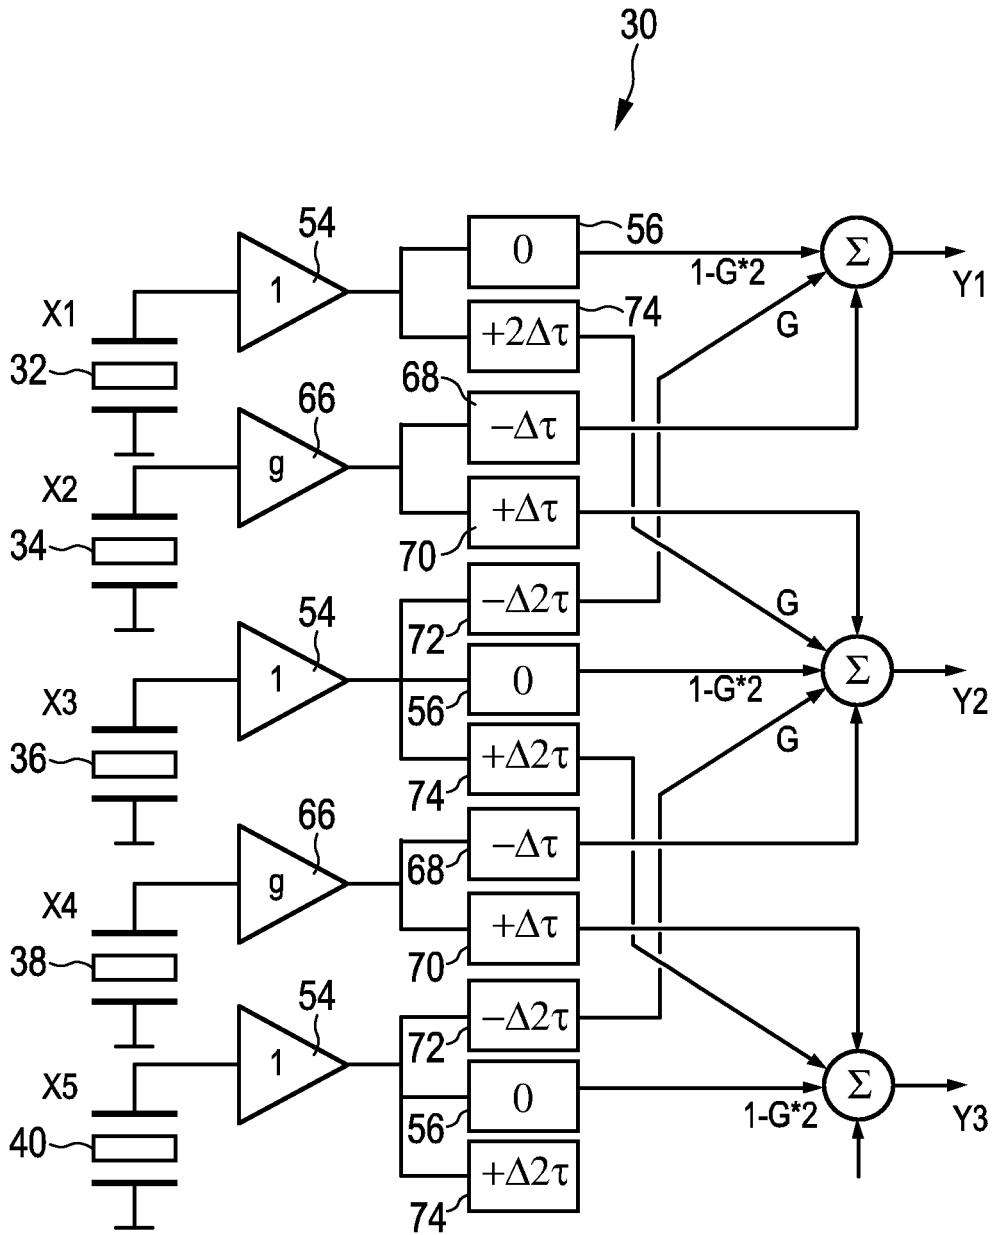


FIG. 5

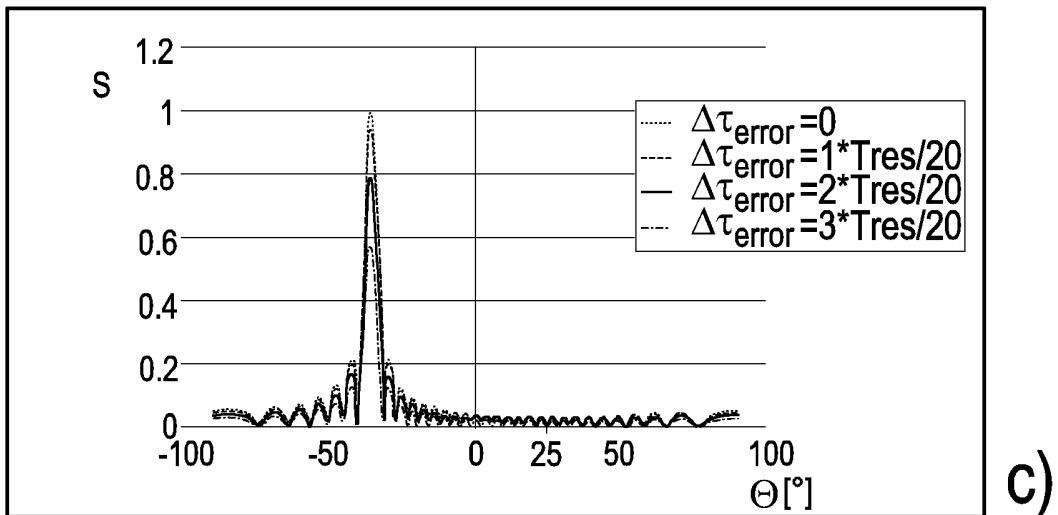
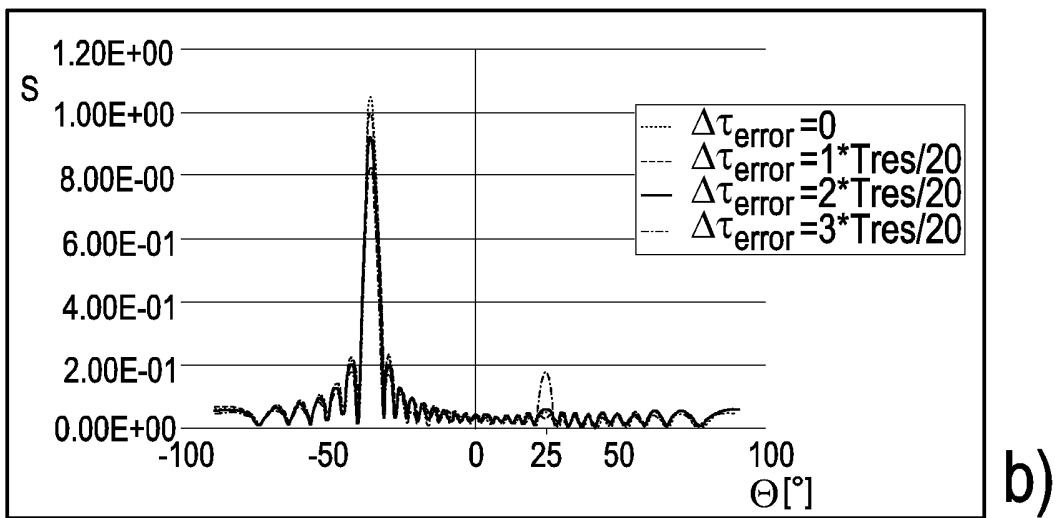
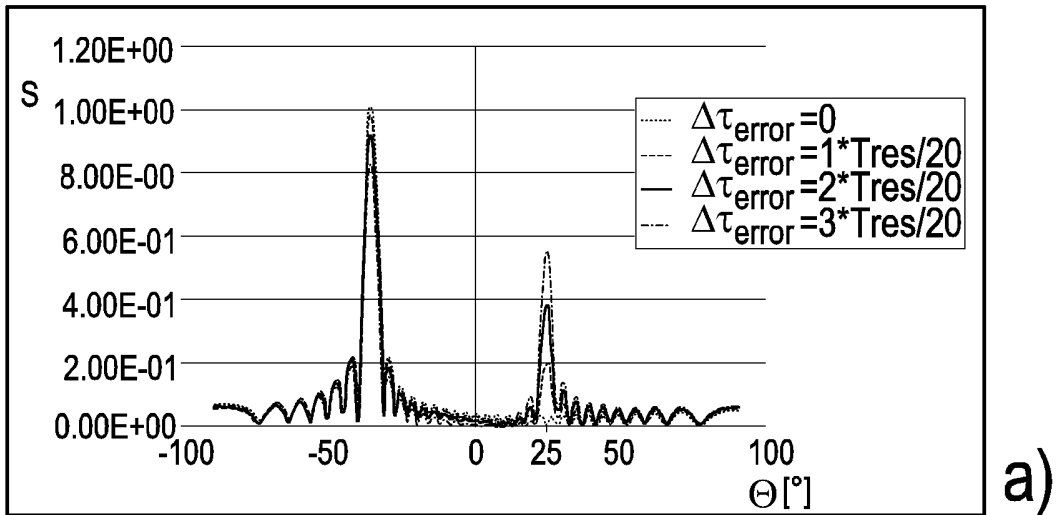


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5676147 A [0004]
- US 4790320 A [0006]
- US 5832923 A [0007]

专利名称(译)	超声换能器组件		
公开(公告)号	EP3154435B1	公开(公告)日	2018-08-15
申请号	EP2015725684	申请日	2015-06-08
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	VAN RENS ANTONIA CORNELIA		
发明人	VAN RENS, ANTONIA CORNELIA		
IPC分类号	A61B8/00 G01S15/89 G10K11/34 G01S7/52		
优先权	2014172046 2014-06-12 EP		
其他公开文献	EP3154435A1		
外部链接	Espacenet		

摘要(译)

公开了一种超声换能器组件 (30) , 包括 : 多个超声换能器元件 (34,36,38) , 用于接收超声波并提供对应于分别接收的超声波的换能器信号 (X2 , X3 , X4) 。该组件包括多个信号组合器 (42,44 ; 60,62,64) , 用于根据换能器信号提供不同的输出信号 (Y1 , Y2) , 以及多个定时元件 (48,52 ; 68 , 70 ; 72,74) 用于向换能器信号提供不同的时移 (τ) 。每个超声换能器元件连接到多个信号组合器 , 用于提供换能器信号 , 包括到不同信号组合器的不同时移。

