



(11) **EP 3 278 734 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
07.02.2018 Bulletin 2018/06

(51) Int Cl.: **A61B 8/00** (2006.01)

(21) Application number: **15887806.6**

(86) International application number:
PCT/KR2015/003036

(22) Date of filing: **27.03.2015**

(87) International publication number:
WO 2016/159395 (06.10.2016 Gazette 2016/40)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
MA

- **Industry Academic Cooperation Foundation,
Hallym University
Chuncheon-si, Gangwon-do 200-702 (KR)**

(72) Inventors:

- **CHANG, Sun-Yeob**
Seoul 03477 (KR)
- **BAE, Moo-Ho**
Seoul 05504 (KR)

(71) Applicants:

- **Alpinion Medical Systems Co., Ltd.**
Seoul 152-848 (KR)


(74) Representative: **Groth & Co. KB**
P.O. Box 6107
102 32 Stockholm (SE)

(54) **BEAMFORMING DEVICE, ULTRASONIC IMAGING DEVICE, AND BEAMFORMING METHOD
ALLOWING SIMPLE SPATIAL SMOOTHING OPERATION**

(57) A beamforming device, an ultrasonic imaging device, and a beamforming method, which allow a simple spatial smoothing operation, are disclosed. A beamforming device according to an embodiment of the present invention comprises: a spatial smoothing unit for transforming a received signal into another space, using a transformation function configured by low frequency components, calculating a transformed signal by a spatial smoothing operation using a transformation function in

a transformation space, and estimating an averaged spatial covariance matrix; a weighted value operation unit for operating a weighted value of the transformed signal from the averaged spatial covariance matrix which has been estimated by the spatial smoothing operation; and a synthesis unit for generating a beam signal, using the transformed signal and the weighted value of the transformed signal.

FIG. 1

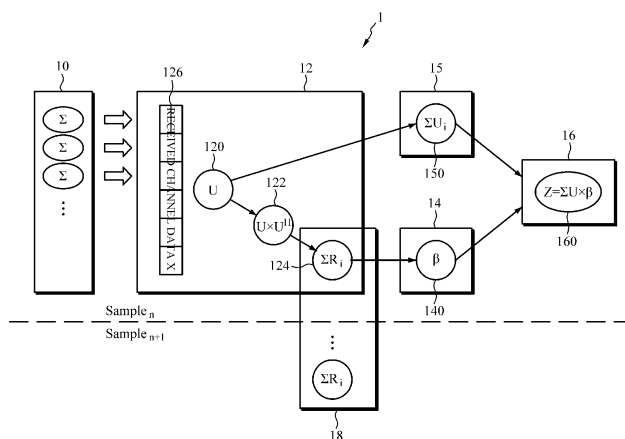

Description

[Technical Field]

5 **[0001]** The present invention relates to a beamforming technology.

[Background Art]

10 **[0002]** An ultrasonic imaging apparatus is an apparatus for acquiring an image of an object, for example, tomographic images of various kinds of tissues, structures, or the like in a human body, or images of a bloodstream or the like by using ultrasonic waves. Such an ultrasonic imaging apparatus is relatively small and inexpensive, can display images in real time, has no risk of exposure to X-rays and the like, and thus is widely used in medical fields, for example, cardiology, internal medicine, urology, obstetrics and gynecology, and the like.

15 **[0003]** The ultrasonic imaging apparatus emits an ultrasonic signal toward a target part inside an object, collects an ultrasonic echo signal reflected from the target part, and then generates an ultrasonic image from the collected ultrasonic echo signal. To this end, the ultrasonic imaging apparatus performs beamforming to estimate amplitude of a reflected wave in a specific space from a plurality of pieces of channel data resulting from an ultrasonic echo signal collected through an ultrasonic transducer. The beamforming collects a time difference between ultrasonic signals received through the ultrasonic transducer and emphasizes a signal of a specific position or relatively attenuates a signal of another position by applying a predetermined weight, that is, a beamforming coefficient, to each of the received ultrasonic signals so that the ultrasonic signals are focused. Due to the beamforming, the ultrasonic imaging apparatus can generate an ultrasonic image suitable for identifying an internal structure of the object and provide the ultrasonic image to a user.

[Disclosure]

25

[Technical Problem]

30 **[0004]** The present invention is directed to providing a beamforming apparatus, an ultrasonic imaging apparatus, and a beamforming method for improving a calculation speed and reducing the amount of resources used by the beamforming apparatus and required for beamforming by reducing an amount of calculation required for spatial smoothing during the beamforming.

[Technical Solution]

35 **[0005]** One aspect of the present invention provides a beamforming apparatus including: a spatial smoothing unit configured to transform received signals into another space by using a transform function composed of low-frequency components, calculate transformed signals by a spatial smoothing operation employing the transform function in the transformed space, and estimate an averaged spatial covariance matrix; a weight calculation unit configured to calculate weights of the transformed signals from the averaged spatial covariance matrix estimated by the spatial smoothing operation; and a synthesis unit configured to generate a beam signal by using the transformed signals and the weights of the transformed signals.

40 **[0006]** The spatial smoothing unit may leave the low-frequency components of the transform function, remove high-frequency components, and then generate the transformed signals by transforming the received signals into the other space with a transform function composed of the remaining low-frequency components to reduce dimensions of a spatial covariance matrix of each of received signals input through a plurality of channels.

45 **[0007]** The spatial smoothing unit may calculate the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system, and may estimate spatial covariance matrices from the calculated transformed signals.

50 **[0008]** The transform function may be an orthogonal polynomial, and the spatial smoothing unit may calculate the transformed signals by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated, and may estimate spatial covariance matrices from the calculated transformed signals.

55 **[0009]** The orthogonal polynomial may be any one of a Hermite polynomial, a Laguerre polynomial, a Jacobi polynomial, a Gegenbauer polynomial, a Chebyshev polynomial, and a Legendre polynomial.

[0010] The transform function V may be a Legendre polynomial P , and $P = [P_0, P_1, \dots, P_{L-1}]$ where P_k is a k^{th} column

of P , $P_k = [P_{0k}, P_{1k}, \dots, P_{(L-1)k}]^T$, $P_{mk} = \sum_{n=0}^k m^n c_{nk}$, c_{nk} is determined by a Gram-Schmidt orthogonalization process, and the superscript T is a transpose.

[0011] The spatial smoothing unit may estimate a spatial covariance matrix $\tilde{\mathbf{R}}_1$ through the spatial smoothing operation,

and the estimated spatial covariance matrix $\tilde{\mathbf{R}}_1$ may be
$$\tilde{\mathbf{R}}_1 = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \mathbf{u}_l \mathbf{u}_l^H$$
 where M is the number of all channels, M-L+1 is the number of sub-arrays, L is a sub-array length, $\mathbf{u}_l$ is the transformed signal, and the superscript H is a Hermitian transpose.

[0012] The beamforming apparatus may further include an accumulation unit configured to accumulate a transformed signal corresponding to each sub-array, and the synthesis unit may calculate the beam signal once by synthesizing the transformed signals accumulated by the accumulation unit and the weights. The beam signal $\tilde{z}$ calculated by the synthesis

unit may be
$$\tilde{z} = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \beta \mathbf{u}_l$$
 where M is the number of all channels, M-L+1 is the number of sub-arrays, L is a sub-array length, β is the weight, and $\mathbf{u}_l$ is the transformed signal.

[0013] The spatial smoothing unit may calculate a corrected transformed signal $\hat{\mathbf{u}}_l$ obtained by correcting the transformed signal, and $\hat{\mathbf{u}}_l = \hat{\mathbf{P}}^H \mathbf{x}_l$ where $\hat{\mathbf{P}}$ is a corrected Legendre polynomial, $\hat{\mathbf{P}} = [\mathbf{p}_0 \ \mathbf{p}_1 \ \dots \ \mathbf{p}_{Q-1}]$, $\hat{\mathbf{P}}^H = \hat{\mathbf{P}}^T$,

$$\hat{\mathbf{u}}_l = \begin{bmatrix} H_{l,0} \\ H_{l,1} \\ \vdots \\ H_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{p}_0^T \mathbf{x}_l \\ \mathbf{p}_1^T \mathbf{x}_l \\ \vdots \\ \mathbf{p}_{Q-1}^T \mathbf{x}_l \end{bmatrix}$$

, $\mathbf{x}$ is a received signal, the subscript 1 is a start index of $\mathbf{x}$, the subscript Q is the number of components of a transformed signal selected by a user, the superscript H is a Hermitian transpose, and the superscript T is a transpose. A difference of an R^{th} row in the corrected Legendre polynomial $\hat{\mathbf{P}}$ may be

$$\delta_{R+1,l+Q,R} = \sum_{q=0}^R (d_{R+L,q,R} \mathbf{x}_l + e_{R+1,q,R} \mathbf{x}_{l+L+q})$$

where d and e in $d_{p,q,r}$ or $e_{p,q,r}$ are previously calculated real-number coefficients, the subscript p is a degree of difference, r is an r^{th} row of the corrected transformed function $\hat{\mathbf{u}}_l$, q is a degree of each term of the polynomial, 1 is the start index of $\mathbf{x}$, and L is a sub-array length. Here, $2(Q+1)$ multiplications and $2(Q+1)$ additions may be required to calculate the difference of the R^{th} row in the corrected Legendre polynomial $\hat{\mathbf{P}}$, one addition may be further required every time the difference degree decreases, and the difference of the R^{th} row in the corrected Legendre polynomial $\hat{\mathbf{P}}$ may be consequently calculated by $2(Q+1)$ multiplications and $3Q+2$ additions.

[0014] The transform function may be a Fourier transform basis function, and the spatial smoothing unit may calculate the transform function using the Fourier transform basis function and estimate the averaged spatial covariance matrix using the calculated transform function. Here, the spatial smoothing unit may calculate a corrected transformed signal $\hat{\mathbf{u}}_l$ obtained by correcting a transformed signal, and $\hat{\mathbf{u}}_l = \hat{\mathbf{B}}^H \mathbf{x}_l$ where the transform function $\hat{\mathbf{B}}$ is a corrected transform function, $\hat{\mathbf{B}} = [\mathbf{b}_0 \ \mathbf{b}_1 \ \dots \ \mathbf{b}_{Q-1}]$,

$$\hat{\mathbf{B}} = \begin{bmatrix} H_{l,0} \\ H_{l,1} \\ \vdots \\ H_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{b}_0^H \mathbf{x}_l \\ \mathbf{b}_1^H \mathbf{x}_l \\ \vdots \\ \mathbf{b}_{Q-1}^H \mathbf{x}_l \end{bmatrix}$$

$\mathbf{x}$ is a received signal, the subscript 1 is a start index of $\mathbf{x}$, the subscript Q is the number of components of a transformed signal selected by a user, and the superscript H is a Hermitian transpose. Here, the transformed signal $\mathbf{u}_{l,m}$ may be

$$\begin{aligned}
 R_{l,m} &= \mathbf{b}_m^H \cdot \mathbf{X}_l = \sum_{n=1}^{L-1} \mathbf{b}_{m,n}^H \cdot \mathbf{X}_{l,n} \\
 &= \left(\sum_{n=1}^{L-1} \mathbf{b}_{m,n}^H \cdot \mathbf{X}_{l,n} \right) \cdot e^{j \frac{2\pi}{L} \cdot m \cdot (L-1)} \cdot \mathbf{b}_{m,L-1}^H \cdot \mathbf{X}_{l,L-1} \\
 &= \left(\mathbf{b}_{l,m}^H - \mathbf{X}_{l,L-1} \right) \cdot e^{j \frac{2\pi}{L} \cdot m \cdot (L-1)} \cdot \mathbf{b}_{m,L-1}^H \cdot \mathbf{X}_{l,L-1}
 \end{aligned}$$

where m is an mth row, n is an nth column, 1 is the start index of x, and L is a sub-array length.

[0015] The beamforming apparatus may further include a channel data averaging unit configured to generate the received signals in a channel data form by averaging multiple pieces of sample data before the spatial smoothing. Here, the channel data averaging unit may generate the received signals in the channel data form from sample data received according to sub-arrays of a transducer by performing beamforming on the sample data constituting a sample data set. The channel data averaging unit may generate the received signals in the channel data form from multiple sample data sets by averaging sample data received through elements at identical positions of a transducer with respect to the same depth. The spatial smoothing unit may perform the spatial smoothing once on the received signals in the channel data form obtained by the channel data averaging unit averaging the multiple pieces of sample data.

[0016] The beamforming apparatus may further include a temporal averaging unit configured to collect averaged covariance matrices generated by performing the spatial smoothing on sample data having individual depths and perform temporal averaging. Here, the beamforming apparatus may further include a shared memory, and the temporal averaging unit may be located in the shared memory.

[0017] Another aspect of the present invention provides a beamforming apparatus including: a transducer configured to emit an ultrasonic wave to an object, receive an ultrasonic signal reflected by the object, and output a plurality of ultrasonic signals by transforming the received ultrasonic wave; a beamforming unit configured to calculate transformed signals by transforming the ultrasonic signal received by the transducer into another space with a transform function composed of low-frequency components, generate a beam signal by applying weights to the transformed signals in the transformed space, and estimate an averaged spatial covariance matrix to be used for generating the beam signal by a spatial smoothing operation employing the transform function; and an image generation unit configured to generate an image using a signal output from the beamforming unit.

[0018] The beamforming unit may calculate the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system.

[0019] The transform function may be an orthogonal polynomial, and the beamforming unit may calculate the transformed signals by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated.

[0020] The transform function may be a Fourier transform basis function, and the beamforming unit may calculate the transformed signals by using the Fourier transform basis function.

[0021] Another aspect of the present invention provides a beamforming method including: calculating transformed signals by transforming received signals into another space with a transform function composed of low-frequency components; estimating averaged spatial covariance matrices through spatial smoothing employing a feature of the transform function; and calculating weights of the transformed signals from the averaged spatial covariance matrices and generating a beam signal by applying the weights to the transformed signals.

[0022] The calculating of the transformed signals may include calculating the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system.

[0023] The transform function may be an orthogonal polynomial, and the calculating of the transformed signals may include calculating the transformed signals by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated.

[0024] The generating of the beam signal may include calculating the weights through spatial smoothing based on the orthogonal polynomial and generating a minimum variance (MV) beam signal from the calculated weights.

[0025] The transform function may be a Fourier transform basis function, and the calculating of the transformed signals may include calculating the transformed signals by using the Fourier transform basis function. Here, the generating of the beam signal may include calculating the weights through spatial smoothing based on the Fourier transform basis function and generating a beamspace adaptive (BA) beam signal from the calculated weights.

[0026] The beamforming method may further include, before the spatial smoothing, generating the received signals in a channel data form by averaging multiple pieces of sample data.

[Advantageous Effects]

[0027] According to an exemplary embodiment, since a beamforming apparatus, an ultrasonic imaging apparatus,

and a beamforming method which allow a simple spatial smoothing operation are proposed, an amount of calculation required for a process of generating a beam signal by performing beamforming on a received signal can be reduced. In this case, it is possible to reduce resources required for the beamforming by various devices which perform the beamforming, for example, an ultrasonic imaging apparatus.

[0028] In particular, since a feature of a Fourier transform basis function or a transformed function composed of an orthogonal polynomial may be used to calculate a transformed signal and estimate an averaged spatial covariance matrix, it is possible to simply calculate spatial smoothing. Also, since a weight is calculated through spatial smoothing based on a Fourier transform basis function and a beamspace adaptive (BA) beam signal is generated from the calculated weight or the weight is calculated through spatial smoothing based on an orthogonal polynomial and a minimum variance (MV) beam signal is generated from the calculated weight, a beamforming speed for a received signal may be increased, and an amount of calculation for the received signal may be reduced.

[0029] Further, since sample data is averaged to generate channel data before spatial smoothing, the spatial smoothing can be performed once on the generated channel data, and the amount of calculation for the spatial smoothing can be reduced.

[0030] Moreover, since averaged covariance matrices generated by performing spatial smoothing on sample data having individual depths are collected to perform temporal averaging in a shared memory, performance can be improved.

[0031] In addition, it is possible to solve various problems, such as a delayed ultrasonic image being output and a device being overheated or overloaded. Also, a reduction in the amount of resources a beamforming apparatus uses leads to a reduction in power consumption of the beamforming apparatus, and use of a calculation device with low specifications leads to a reduction in costs.

[0032] Meanwhile, the present invention may be applied to all of various array signal processing fields, such as a radar, a sonar, a non-destructive examination, and the like as well as to an ultrasonic diagnostic device.

[Description of Drawings]

[0033]

FIG. 1 is a configuration diagram of a beamforming apparatus according to an exemplary embodiment of the present invention.

FIG. 2 is a reference diagram of received channel data to which spatial smoothing is applied according to an exemplary embodiment of the present invention.

FIG. 3 is a reference diagram showing that an amount of calculation for spatial smoothing is reduced when a Fourier transform function or a transform function composed of an orthogonal polynomial is used to estimate an averaged spatial covariance matrix according to an exemplary embodiment of the present invention.

FIG. 4 is a data structure diagram illustrating a channel data averaging process according to an exemplary embodiment of the present invention.

FIG. 5 is a data structure diagram illustrating a channel data averaging process according to another exemplary embodiment of the present invention.

FIG. 6 is a configuration diagram of an ultrasonic imaging apparatus according to an exemplary embodiment of the present invention.

FIG. 7 is a graph showing that high-frequency components are removed solely through spatial smoothing according to an exemplary embodiment of the present invention.

FIG. 8 is a graph for comparing a continuous wave (CW) beam pattern of a Legendre polynomial basis transform function P according to an exemplary embodiment of the present invention with CW beam patterns of a Fourier transform function B and a transform function of principal component analysis-based minimum variance beamforming (PCA MV BF).

FIG. 9 is a flowchart showing a beamforming method according to an exemplary embodiment of the present invention.

[Modes of the Invention]

[0034] Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings. In the following description of the present invention, a detailed description of a known art related to the present invention will be omitted when it is determined to unnecessarily obscure the subject matter of the present invention. Also, the terms used in the following description are terms defined in consideration of functionality in the present invention, and may vary depending on a user's or an operator's intention, usual practice, or the like. Therefore, definitions of terms used herein should be made on the basis of the content throughout the specification.

[0035] FIG. 1 is a configuration diagram of a beamforming apparatus according to an exemplary embodiment of the present invention.

[0036] Referring to FIG. 1, a beamforming apparatus 1 includes a spatial smoothing unit 12, a weight calculation unit 14, and a synthesis unit 16, and may further include a channel data averaging unit 10, an accumulation unit 15, and a temporal averaging unit 18.

[0037] In the beamforming apparatus 1 shown in FIG. 1, only elements related to the present embodiment are shown. Therefore, those of ordinary skill in a technical field related to the present embodiment should appreciate that general-use elements other than the elements shown in FIG. 1 may be further included therein.

[0038] At least some of the elements constituting the beamforming apparatus 1 shown in FIG. 1 may correspond to one or more processors. The processors may be implemented as an array of multiple logic gates or a combination of a general-use microprocessor and a memory storing a program executable by the microprocessor. Those of ordinary skill in a technical field to which the present embodiment pertains should appreciate that the processors may also be implemented in other hardware forms.

[0039] The beamforming apparatus 1 receives a received signal reflected by a subject and forms a received beam from the received signal. Here, the subject may be, for example, the abdomen, the heart, or the like of a human body, and the received signal may be an ultrasonic signal reflected by the subject. However, these simply correspond to an exemplary embodiment for helping understanding the present invention, and the present invention is not limited thereto.

[0040] The beamforming apparatus 1 transforms a received signal of an element space into a transformed space, which is another space, by using a transform function, generates a beam signal by performing signal processing in the transformed space, and outputs the beam signal. The transform function may be expressed as a transform matrix.

[0041] The beamforming apparatus 1 according to an exemplary embodiment leaves low-frequency components and removes high-frequency components among components constituting the transform function. Here, it should be noted that the low-frequency components are frequency components of a lateral direction in a space. Then, the beamforming apparatus 1 transforms the received signal into the other space using a transform function composed of the remaining low-frequency components. In this case, it is possible to reduce dimensions of spatial covariance matrices R of individual signals input through a plurality of channels. Accordingly, calculation of inverse matrices R^{-1} of the covariance matrices required to calculate weights of transformed signals is also facilitated.

[0042] When the calculation of the inverse matrices R^{-1} of the covariance matrices is simplified by the above-described methods, the amount of calculation for spatial smoothing, which is a necessary step in a beamforming process and requires a large amount of calculation, is important. The spatial smoothing is necessary in the beamforming process because, aside from a calculation of an inverse matrix of a covariance matrix, the largest amount of calculation is required thereby.

[0043] The spatial smoothing unit 12 of the beamforming apparatus 1 receives a received signal X 126 and generates a transformed signal U 120 by transforming the received signal X 126 with a predetermined transform function V . The received signal X 126 may be composed of a channel data set input through multiple channels. In other words, the received signal X 126 may be a set of multiple pieces of channel data. Likewise, the transformed signal U 120 may also be a set of transformed signals of multiple channels output through the multiple channels.

[0044] When the transform function V is given, the transformed signal U 120 has less dimensions than the received signal X 126. For example, when the transform function is given as an $M \times N$ matrix, $M > N$, and the received signal X 126 is given as an $M \times 1$ matrix, that is, the received signal X 126 has M dimensions, the transformed signal U 120, which is a calculation result, is given as an $N \times 1$ matrix so that the transformed signal U 120 has less dimensions than the received signal X 126. In this way, when dimensions are reduced, the amount of calculation is relatively reduced and convenience and speed of calculation may be improved.

[0045] The spatial smoothing unit 12 according to an exemplary embodiment performs spatial smoothing by using a feature of the transform function proposed by the present invention, and thus the amount of calculation for spatial smoothing is reduced. Spatial smoothing is intended to prevent signal cancelling caused by the coherence between channel signals. The spatial smoothing unit 12 calculates the transformed signal U 120 using the transform function, calculates $U_i \times U_i^H$ 122 from the transformed signal U 120, and estimates an averaged spatial covariance matrix ΣR_i 124 from $U_i \times U_i^H$ 122.

[0046] For spatial smoothing, the spatial smoothing unit 12 divides arrays of a transducer into multiple overlapping sub-arrays. Here, M is the number of all channels, $M-L+1$ is the number of sub-arrays, and L is a sub-array length. L may be diversely set. For example, L may equal $(M+1)/2$, but is not limited thereto. The spatial smoothing unit 12 calculates the average ΣR_i 124 of spatial covariance matrices corresponding to the individual sub-arrays. An exemplary embodiment of M and L of the transducer arrays will be described again with reference to FIG. 2, which is described below.

[0047] The spatial smoothing unit 12 according to an exemplary embodiment calculates the transformed signal U 120 by using a feature of a Fourier transform basis function. As another example, the spatial smoothing unit 12 calculates the transformed signal U 120 by using a feature of a transform function composed of an orthogonal polynomial. Here, the polynomial may be a normalized orthogonal polynomial.

[0048] For example, the spatial smoothing unit 12 calculates the transformed signal U 120 by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every

time the orthogonal polynomial is differentiated. In this case, the amount of calculation of the transformed signal U 120 is reduced. An exemplary embodiment in which a transform function composed of an orthogonal polynomial, such as a Legendre polynomial, is used to perform spatial smoothing will be described below with reference to Equations 21 to 29. Also, an exemplary embodiment in which a feature of a Fourier transform basis function is used to perform spatial

smoothing will be described below with reference to Equations 30 to 32.

[0049] A beamforming method of the beamforming apparatus 1 may be varied. The spatial smoothing unit 12 according to an exemplary embodiment uses a beamspace adaptive beamforming (BA BF) method. The BA BF method involves transforming a received signal of an element space into another space by using a transform function, which is an orthonormal basis matrix, and reducing dimensions of spatial covariance matrices of individual received signals input through a plurality of channels through signal processing such as approximation in which only important components are left. Accordingly, an inverse matrix of a covariance matrix may be very simply calculated.

[0050] The spatial smoothing unit 12 according to an exemplary embodiment uses a transform function composed of an orthogonal polynomial for a spatial transformation. The orthogonal polynomial is a series of polynomials which satisfy an orthogonal relationship. The orthogonal polynomial may be any one of, for example, a Hermite polynomial, a Laguerre polynomial, a Jacobi polynomial, a Gegenbauer polynomial, a Chebyshev polynomial, and a Legendre polynomial. Although a description centering on the Legendre polynomial among the orthogonal polynomials will be given below, it should be noted that the orthogonal polynomial is not limited to the Legendre polynomial.

[0051] The spatial smoothing unit 12 according to an exemplary embodiment uses an orthogonal matrix composed of the Legendre polynomial as the transform function. In particular, the spatial smoothing unit 12 may use the Legendre polynomial as the transform function in a minimum variance beamforming (MV BF) method. In this case, it is possible to maintain the performance of MV BF while remarkably reducing the amount of calculation. From now, a method in which a matrix composed of a Legendre polynomial is used as a transform function for transforming a received signal of an element space into a transformed space is referred to as a Legendre polynomial-based MV BF (LP MV BF) method. Through the LP MV BF method, MV BF can be approximated more accurately than BA BF and it is possible to obtain performance similar to that of an MV BF method based on principal component analysis-based MV BF (referred to as PCA MV BF below).

[0052] When the beamforming apparatus 1 performs beamforming by the MV BF method in the transformed space, it is possible to remarkably reduce an amount of calculation required to calculate an inverse matrix of a spatial covariance matrix by using only some components important in the transformed space. For example, only some leading columns in a transform matrix are used to transform a received signal so that dimensions of a spatial covariance matrix are reduced. The leading columns in the transform matrix represent important components in an MV BF calculation.

[0053] When the beamforming apparatus 1 performs beamforming using a Fourier transform matrix (also referred to as a Butler matrix) for BA BF in the transformed space, the spatial smoothing unit 12 according to an exemplary embodiment may use only some leading columns in the Fourier transform matrix. The leading columns represent low-frequency components and correspond to a direction of a focal point and beam components close to the focal point. Assuming that interference frequently occurs around a front direction, it is possible to efficiently reduce dimensions of a spatial covariance matrix by using only these columns.

[0054] When the beamforming apparatus 1 performs an orthogonal polynomial-based MV BF method, the spatial smoothing unit 12 according to an exemplary embodiment uses only some leading columns of a transform function composed of an orthogonal polynomial. Since columns of the transform function sequentially represent frequency components in order of increasing frequency, some leading columns correspond to low-frequency components like a Fourier transform function.

[0055] An X-shaped long side lobe, which is observed in a delay-and-sum beamforming (DAS BF) method, can be removed through spatial smoothing of MV BF. Using this feature, it is possible to maintain features of MV BF very well even when a dimensionality reduction in which only side lobe components close to a front side are treated and other high-frequency components are removed is performed in the MV BF employing a Legendre polynomial-based transform function. It can be seen in FIG. 7, which will be described below, that high-frequency components are removed solely through spatial smoothing.

[0056] The weight calculation unit 14 calculates a weight β 140 from the averaged spatial covariance matrix ΣR_i 124 which is generated through spatial smoothing based on the transformed signal U 120 by the spatial smoothing unit 12. A method of calculating the weight β 140 is shown in Equation 11, which will be described below. The synthesis unit 160 generates a beam signal Z 160 by synthesizing the transformed signal U 120 and the weight β 140. Here, the accumulation unit 15 generates an accumulated transformed signal value ΣU_i 150 by accumulating sub-array-specific transformed signals U 120, and the synthesis unit 160 may generate the beam signal Z ($\Sigma U_i \times \beta$) 160 by synthesizing the accumulated transformed signal value ΣU_i 150 and the weight β 140. The accumulation unit 15 may accumulate M-L+1, which is the number of sub-arrays, transformed signals U. When the accumulated transformed signal value ΣU_i 150 is generated by accumulating the transformed signals U 120 corresponding to individual sub-arrays and the beam signal Z 160 is calculated from the accumulated transformed signal value ΣU_i 150, a spatial smoothing calculation is

simplified.

[0057] The beamforming apparatus 1 according to an exemplary embodiment includes the channel data averaging unit 10. The channel data averaging unit 10 generates the received signal X 126 in a channel data form by averaging multiple pieces of sample data before the spatial smoothing by the spatial smoothing unit 12. As an example, the channel data averaging unit 10 generates channel data from a sample data set received according to sub-arrays of a transducer by performing beamforming on the sample data constituting the sample data set. An exemplary embodiment related to this will be described below with reference to FIG. 4. As another example, the channel data averaging unit 10 generates channel data from a plurality of sample data sets by averaging sample data which is received through elements at identical positions of the transducer with respect to the same depth. An exemplary embodiment related to this will be described below with reference to FIG. 5. The averaging may be performed by data summation. As described above, since the spatial smoothing unit 12 can perform spatial smoothing once on the received signal X 126 of the channel data form obtained by averaging sample data, the amount of calculation of spatial smoothing is reduced. The above-described averaging process of the channel data averaging unit 10 can also be used in spatial compounding and a compounding aperture.

[0058] The beamforming apparatus 1 according to an exemplary embodiment includes the temporal averaging unit 18. The temporal averaging unit 18 collects averaged covariance matrices generated through spatial smoothing performed on sample data having individual depths, and performs temporal averaging. An actual ultrasonic image does not have favorable picture quality due to much speckle noise being included therein, partial omission thereof, and the like. In particular, speckle noise, which is frequently detected in a homogeneous region in which changes in brightness of pixel values are homogeneous, serves as a hindrance when a system automatically analyzes and recognizes an image. Therefore, the temporal averaging unit 18 uses a temporal average to reduce the speckle noise. The temporal averaging unit 18 according to an exemplary embodiment is located in a shared memory. It is possible to improve temporal averaging performance of the temporal averaging unit 18 using the shared memory.

[0059] A reason that a transform function based on an orthogonal polynomial, such as a Legendre polynomial, is used for MV BF as a method for improving performance, particularly, for improving a lateral resolution and a contrast resolution, of the beamforming apparatus 1, and functionality of the orthogonal polynomial-based transform function will be described in detail below.

[0060] The DAS BF method may be used in an ultrasonic diagnostic device to focus ultrasonic beams in a desired direction. In accordance with DAS BF, it is necessary to apply weights of an appropriate form to signals received from array elements to lower a level of clutter generated by an echo signal from an undesired direction at the expense of increasing a width of a main lobe.

[0061] As a method for removing this limitation and improving performance of an ultrasonic diagnostic device, MV BF (also referred to as Capon beamforming, which is named after its inventor) is applied to ultrasonic beamforming. In the MV BF, an optimal weight, that is, an apodization function, of each receive focal point is calculated and applied to the receive focal point on the basis of input data so that a signal from a desired direction can be passed with a gain of 1 (unity gain) and signals from other directions can be optimally attenuated. Therefore, unlike DAS BF, it is possible to simultaneously lower a clutter level and reduce the width of the main lobe so that a spatial resolution and a contrast resolution can be simultaneously improved.

[0062] The most significant problem of MV BF is that it requires an excessive amount of calculation in comparison to DAS BF, and thus it is difficult to apply the MV BF to an ultrasonic diagnostic device in which real-time processing is important. In other words, since the MV BF method involves calculating an inverse matrix of a spatial covariance matrix, the amount of calculation may be large. Therefore, it is necessary to reduce the amount of calculation without degrading the performance of MV BF.

[0063] A step of MV BF requiring the largest amount of calculation is a process of calculating an inverse matrix of a spatial covariance matrix. When dimensions of the spatial covariance matrix are $L \times L$, $O(L^3)$ calculations are required. As a solution to this, input data is transformed from an element space into another space, and then components which have little influence on the performance of MV BF are removed in the other space so that dimensions of the spatial covariance matrix are remarkably reduced. Consequently, it is possible to simply calculate an inverse matrix of the covariance matrix. Among these methods, BA BF based on a Fourier transform may be used.

[0064] The spatial smoothing unit 12 according to an exemplary embodiment uses an orthogonal polynomial as a basis matrix for the spatial transformation. When the orthogonal polynomial is used and dimensions of spatial covariance matrices are evenly reduced, the number of approximation errors caused by dimensionality reductions are less than or similar to those of the BA BF method, the PCA MV BF method, and the like.

[0065] FIG. 2 is a reference diagram of received channel data to which spatial smoothing is applied according to an exemplary embodiment of the present invention.

[0066] Referring to FIGS. 1 and 2, the spatial smoothing unit 12 divides arrays of the transducer into multiple overlapping sub-arrays. Here, M is the number of all channels, M-L+1 is the number of sub-arrays, and L is a sub-array length. For example, referring to FIG. 2, the number M of all channels is 10, the sub-array length L is 5, and the number of sub-

arrays $M-L+1$ is 6. The spatial smoothing unit 12 calculates an average ΣR_i of spatial covariance matrices corresponding to the individual sub-arrays.

[0067] FIG. 3 is a reference diagram showing that the amount of calculation of spatial smoothing is reduced when a Fourier transform function or a transform function composed of an orthogonal polynomial is used to estimate an averaged spatial covariance matrix according to an exemplary embodiment of the present invention.

[0068] In general, $Q \cdot L$ complex multiplications and complex additions are required to calculate a transformed signal U_1 from a received signal X_1 with respect to each 1. Also, L complex accumulations are required to calculate $U_1 \times U_1^H$, and ΣR_i requires $M-L+1$ calculations of $\hat{\mathbf{u}}_i \hat{\mathbf{u}}_i^H$. Therefore, a total of $(M-L+1)(Q+1) \cdot L$ complex accumulations are required to calculate ΣR_i .

[0069] However, according to the present invention, the number of calculations for calculating one transformed signal U is remarkably reduced. Referring to FIG. 3, $M-L+1$, which is the number of sub-arrays, transformed signals U are generated. When a difference is $\delta\delta$, $\delta\delta_{1,n} = U_n - U_{n-1}$ and $\delta\delta_{2,n} = \delta\delta_{1,n} - \delta\delta_{1,n-1}$. For example, $\delta\delta_{1,4}$ 320 is the sum of $\delta\delta_{1,3}$ 300 and $\delta\delta_{2,4}$ 310, and U_4 340 is the sum of U_3 330 and $\delta\delta_{1,4}$ 320. When this is generalized, a difference between neighboring transformed signals corresponds to a difference of a first system, and a difference between neighboring differences of the first system corresponds to a difference of a second system.

[0070] According to the present invention, only $2(Q+1)$ multiplications and $3Q+2$ additions are required to calculate one transformed signal U . A detailed exemplary embodiment of calculating a transformed signal U will be described below with reference to Equations 21 to 29.

[0071] According to the present invention, after $Q+1$ transformed signals U are initially calculated, it is only necessary to read a new received signal X and calculate a next transformed signal U . For example, when Q = a fourth degree, five U values U_1, U_2, U_3, U_4 , and U_5 are calculated, and only then the new received signal X is read to calculate a next transformed signal U .

[0072] FIG. 4 is a data structure diagram illustrating a channel data averaging process according to an exemplary embodiment of the present invention.

[0073] Referring to FIGS. 1 and 4, before spatial smoothing, channel data is generated from a sample data set received according to sub-arrays of a transducer by performing beamforming on sample data constituting the sample data set.

[0074] Multiple sample data sets, for example, sample data sets 42-1 and 42-2 of FIG. 4, are respectively received through a sub array 1 40-1 and a sub array 2 40-2 of the transducer, and a received signal 126-1 in a channel data form is generated by performing beamforming on sample data constituting the sample data sets. Here, the sample data sets 42-1 and 42-2 respectively corresponding to the sub-array 1 40-1 and the sub-array 2 40-2 may be data received at the same time. Also, the sample data sets 42-1 and 42-2 respectively corresponding to the sub-array 1 40-1 and the sub-array 2 40-2 may be data received at different times. The above-described process is repeated for each sub-array of the transducer to finally generate the received signal 126-1 in a channel data form. The generated received signal 126-1 in the channel data form is provided to the spatial smoothing unit 12.

[0075] FIG. 5 is a data structure diagram illustrating a channel data averaging process according to another exemplary embodiment of the present invention.

[0076] Referring to FIGS. 1 and 5, before spatial smoothing, a received signal in a channel data form is generated from multiple sample data sets by averaging sample data received through elements at identical positions of the transducer with respect to the same depth. For example, sample data sets 42-3 and 42-4 of FIG. 5 are received through a transducer array 40 at different times t_0 and t_1 , and the transducer array 40 is composed of multiple elements. First sample data 400-1 of the first sample data set 42-3 received through a first element 400 of the transducer array 40 among the multiple elements and second sample data 400-2 of the second sample data set 42-4 received through the first element 400 of the transducer array 40 at a different time than the first sample data set 42-3 are averaged to reflect a delay according to a transmission condition of the transducer array 40. The above-described process is repeated for other elements of the transducer array 40, and finally, a received signal 126-2 in a channel data form is generated. The generated received signal 126-2 in the channel data form is provided to the spatial smoothing unit 12.

[0077] FIG. 6 is a configuration diagram of an ultrasonic imaging apparatus according to an exemplary embodiment of the present invention.

[0078] Referring to FIG. 6, an ultrasonic imaging apparatus 6 includes a transducer 600, a beamforming unit 610, an image generation unit 620, a display unit 630, a storage unit 640, and an output unit 650.

[0079] The beamforming unit 610 shown in FIG. 6 corresponds to an exemplary embodiment of the beamforming apparatus 1 shown in FIG. 1. Accordingly, the above description of FIG. 1 is applicable to the ultrasonic imaging apparatus shown in FIG. 6, and duplicate description will be omitted.

[0080] The ultrasonic imaging apparatus 6 according to an exemplary embodiment provides an image of a subject. For example, the ultrasonic imaging apparatus 6 displays a diagnostic image of the subject or outputs a signal showing the diagnostic image of the subject to an external device for displaying the diagnostic image of the subject. Here, the diagnostic image may be an ultrasonic image, but is not limited thereto.

[0081] The transducer 600 exchanges signals with the subject. The transducer 600 transmits an ultrasonic signal to

the subject and receives ultrasonic echo signals reflected by the subject.

[0082] The beamforming unit 610 calculates weights to be applied to the ultrasonic echo signals reflected by the subject by using basis vectors, applies the calculated weights to the ultrasonic echo signals reflected by the subject, and synthesizes the signals to which the weights are applied. Here, when a normalized orthogonal polynomial or a Fourier transform function is used as a transform function, the basis vectors are columns of the transform function, and thus may be predetermined regardless of the ultrasonic echo signals. The basis vectors may be stored in the beamforming unit 610 or the storage unit 640. Accordingly, the beamforming unit 610 may perform beamforming using at least some of the plurality of stored basis vectors. Here, the number of at least some of the basis vectors can be selected by a user. In this way, since the beamforming unit 610 calculates weights using a plurality of basis vectors and applies the calculated weights to the signals, it is possible to perform beamforming with a reduced amount of calculation. The beamforming unit 610 according to an exemplary embodiment generates beam signals from weights obtained through spatial smoothing calculations and outputs the beam signals.

[0083] The image generation unit 620 generates an image using the signals output from the beamforming unit 610. The image generation unit 620 may include a digital signal processor (DSP) and a digital scan converter (DSC). The DSP according to an exemplary embodiment performs a predetermined signal processing operation on the signals output from the beamforming unit 610, and the DSC generates an image by scanning and converting image data generated with the signals which have undergone the predetermined signal processing operation.

[0084] The display unit 630 displays the image generated by the image generation unit 620. For example, the display unit 630 includes all output devices, such as a display panel, a mouse, a liquid crystal display (LCD) screen, a monitor, and the like, provided in the ultrasonic imaging apparatus. However, those of ordinary skill in a technical field related to the present embodiment should appreciate that the ultrasonic imaging apparatus 6 according to an exemplary embodiment may not include the display unit 630 but may include the output unit 650 for outputting the image generated by the image generation unit 620 to an external display device.

[0085] The storage unit 640 stores the image generated by the image generation unit 620 and data generated while an operation of the ultrasonic imaging apparatus 6 is performed. The output unit 650 may exchange data with an external device through a wired or wireless network or wired serial communication. The external device may be another medical image system, a general-use computer system, a facsimile machine, and the like at a distant place. Also, those of ordinary skill in a technical field related to the present embodiment should appreciate that the storage unit 640 and the output unit 650 according to an exemplary embodiment may further include image interpretation and search functions to be integrally formed as a picture archiving communication system (PACS) and the like.

[0086] Since the beamforming unit 610 does not process a large amount of calculation to perform beamforming, the ultrasonic imaging apparatus 6 can generate high-resolution images in real time.

[0087] Various beamforming methods will be described in detail below with reference to equations.

[0088] A beamforming process of an ultrasonic diagnostic device may be expressed by Equation 1.

$$z[n] = \sum_{m=0}^{M-1} w_m[n] x_m[n] \quad (1)$$

[0089] In Equation 1, $x_m[n]$ is a received signal of each channel to which a focusing delay is applied, m is a channel index, n is a time index, $w_m[n]$ is a weight to be applied to a signal of each channel, which is also referred to as apodization, and $z[n]$ is an output of a beamforming apparatus.

[0090] In Equation 1, M may be the number of receive channels participating in beamforming or the number of receive sub-arrays participating in the beamforming. In this case, M may be the number of receive channels, and m may be the m^{th} channel among the M channels. Alternatively, M may be the number of receive sub-arrays, and m may be the m^{th} sub-array among the M sub-arrays.

[0091] According to MV BF, w , which minimizes a variance, that is, power, of $z[n]$ is calculated while a gain of a signal from a desired direction, for example, a front signal to which a focusing delay is applied, is kept at 1. Here, $w[n] = [w_0[n], w_1[n], \dots, w_{M-1}[n]]^H$. Accordingly, it is possible to minimize an influence of a signal from an undesired direction on the output without distorting a signal from a desired direction. This problem is represented by the following equation.

$$\min_{w[n]} E[|z[n]|^2] = \min_{w[n]} w[n]^H R[n] w[n], \quad w^H[n] a = 1 \quad (2)$$

[0092] Here, $E[\cdot]$ is an expectation operator, $w[n]^H$ is a Hermitian transpose of $w[n]$, a is a steering vector, and because $x_m[n]$ is a signal to which a focusing delay is applied, all elements are 1. $R[n]$ is a spatial covariance matrix represented by Equation 3.

$$\mathbf{R}[n] = E[\mathbf{x}[n]\mathbf{x}^H[n]] \quad (3)$$

[0093] In Equation 3, $\mathbf{x}[n] = [x_0[n], x_1[n], \dots, x_{m-1}[n]]^T$. Here, the superscript T is a transpose.

[0094] The value of this problem is represented by Equation 4.

$$\mathbf{w}[n] = \frac{\mathbf{R}[n]^{-1} \mathbf{a}}{\mathbf{a}^H \mathbf{R}[n]^{-1} \mathbf{a}} \quad (4)$$

[0095] Practically, it is necessary to estimate $\mathbf{R}[n]$, and during the estimation, spatial smoothing, that is, sub-aperture averaging, is performed to prevent signal cancelling caused by coherence between channel signals. Also, temporal averaging is performed to improve a statistical feature of a speckle pattern of a resultant image. Estimated $\tilde{\mathbf{R}}[n]$ is represented by Equation 5 below.

$$\tilde{\mathbf{R}}[n] = \frac{1}{2K+1} \frac{1}{M-L+1} \sum_{k=-K}^K \sum_{l=0}^{M-L} \mathbf{x}_l[n-k] \mathbf{x}_l^H[n-k] \quad (5)$$

[0096] Here,

$$\mathbf{x}_l[n] = \begin{bmatrix} x_{j_1}[n] \\ x_{j_2}[n] \\ \vdots \\ x_{j_{L-1}+1}[n] \end{bmatrix} \quad (6)$$

[0097] In Equation 5, $\frac{1}{M-L+1} \sum_{l=0}^{M-L}$ corresponds to spatial smoothing, and $\frac{1}{2K+1} \sum_{k=-K}^K$ corresponds to temporal averaging. In the spatial smoothing, M is the number of all channels, M-L+1 is the number of sub-arrays, and L is a sub-array length. By the spatial smoothing, all of the M channels are divided into overlapping M-L+1 sub-arrays, and the length of each divided sub-array is L. Here, sub-array-specific spatial covariance matrices $\tilde{\mathbf{R}}[n]$ are averaged. In Equation 6, $x[n]$ is a received signal, and 1 in $x_1[n]$ represents a start index of x.

[0098] Meanwhile, a method called diagonal loading is frequently used to improve robustness of an MV BF calculation. In the diagonal loading, $\tilde{\mathbf{R}}[n]$ is replaced with $\tilde{\mathbf{R}}[n] + \Delta$. Here,

$$\Delta = \Delta \cdot \text{tr}(\tilde{\mathbf{R}}[n]) \quad (7)$$

[0099] In Equation 7, $\text{tr}()$ is a trace operator, and Δ is a constant referred to as a diagonal loading factor.

[0100] To obtain an MV BF output from MV weights obtained through spatial smoothing, the following Equation 8 is calculated.

$$\tilde{z}[n] = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \mathbf{w}[n]^H \mathbf{x}_l[n] \quad (8)$$

[0101] In Equation 8, M is the number of all channels, M-L+1 is the number of sub-arrays, and L is a sub-array length. Here, a weight $\mathbf{w}[n]$ is calculated from $\tilde{\mathbf{R}}[n]$.

[0102] When Equation 8 is rearranged in the form of Equation 1, the following Equation 9 is obtained.

$$\tilde{z}[n] = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \sum_{k=0}^{L-1} (w_k[n] x_{k+l}[n]) = \frac{1}{M-L+1} \sum_{m=0}^{M-1} \left[\left(\sum_{k=0}^{L-1} w_k[n] r_{m-k} \right) x_m[n] \right] \quad (9)$$

$$r_k = \begin{cases} 1 & \text{for } 0 \leq k < M-L+1 \\ 0 & \text{otherwise} \end{cases}$$

[0103] Here, it can be seen that an apodization function of standard MV BF corresponding to w_m in Equation 1 is r_k , that is, a convolution of a rectangle window having a length of $M-L+1$ and $w[n]^H$. Since it is well-known that a continuous wave (CW) beam pattern on a focal plane is a Fourier transform pair of apodization functions, a beam pattern of the apodization function of the standard MV BF is consequently shown as a multiplication of a Fourier transform pair of the rectangle window, that is, a sinc function, and a Fourier transform pair of $w[n]^H$ calculated from the minimum variance. Overall, the sinc function is gradually reduced as it recedes from the center, and thus it is possible to presume that clutter far away from a main lobe may be reduced to a certain degree solely through spatial smoothing.

[0104] FIG. 7 is a graph showing that high-frequency components are removed solely through spatial smoothing according to an exemplary embodiment of the present invention.

[0105] Specifically, (a) of FIG. 7 shows a point target image of DAS BF which is apodized into a rectangle window, and (b) of FIG. 7 shows a point target image of MV BF in which spatial smoothing is performed when $w[n]$ is a rectangle function.

[0106] It is assumed that $L = M/4$ and a plane wave from a front direction is transmitted. Referring to (b) of FIG. 7, it can be seen that an X-shaped long side lobe, which is observed in DAS BF of (a) of FIG. 7, is appropriately removed solely through spatial smoothing of MV BF. It can be seen that features of standard MV BF can be maintained very well even when a dimensionality reduction of treating only side lobe components close to a front side and removing other high-frequency components is performed in MV BF employing a transform function based on an orthogonal polynomial such as a Legendre polynomial.

[0107] An MV BF method in which x is transformed into another space instead of applying MV BF to an original space of x , that is, an element space, and MV BF is performed in the transformed space will be described below.

[0108] Assuming that a transform function V is an $L \times L$ full rank matrix and columns of V are orthonormal to each other, any weight w in Equation 4 can be represented as a linear combination of the following columns of V .

$$w = V\beta \quad (10)$$

[0109] Here, β is an $L \times 1$ column vector.

[0110] Then, an MV BF value is calculated for a given V as follows.

$$\beta = \frac{R_1^{-1} v_1}{v_1^H R_1^{-1} v_1} \quad (11)$$

[0111] In Equation 11, $R_1 = V^H R V = E[u \cdot u^H]$, $u = V^H x$, and $v_1 = V^H a$. Here, R_1 may be defined with expected values of u and a transpose of u , and V_1 is a steering vector. Equation 11 is an MV BF value in a space in which x is transformed into V^H .

[0112] Practically, spatial smoothing is required to estimate $\tilde{R}_1$, and $\tilde{R}_1$ is estimated according to a calculation of Equation 12.

$$\tilde{R}_1 = \frac{1}{M-L+1} \sum_{l=0}^{M-L} u_l u_l^H \quad (12)$$

[0113] $\tilde{R}_1$ replaces R_1 in Equation 11. Here, M is the number of all channels, $M-L+1$ is the number of sub-arrays, and L is a sub-array length.

[0114] Here, $u_1 = V^H x_1$, and

$$\mathbf{u}_l = \begin{bmatrix} u_{l,0}[n] \\ u_{l,1}[n] \\ \vdots \\ u_{l,L-1}[n] \end{bmatrix} \quad (13).$$

[0115] An output of a beamforming apparatus which takes spatial smoothing into consideration is represented by Equation 14.

$$\tilde{z} = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \boldsymbol{\beta}^H \mathbf{u}_l \quad (14)$$

[0116] Meanwhile, according to MV BF methods in a transformed space, only some components which are particularly important in the transformed space are used so that an amount of calculation required to calculate an inverse matrix of $\tilde{\mathbf{R}}$ can be remarkably reduced. Since some leading columns constituting $\mathbf{V}$ represent components which are important for an MV BF calculation, it is possible to reduce the dimensionality of $\tilde{\mathbf{R}}$ by transforming a received signal $\mathbf{x}$ with only the columns. Therefore, the amount of calculation for the inverse matrix of $\tilde{\mathbf{R}}$ can be further reduced.

[0117] Assuming that $\hat{\mathbf{V}}$ represents a subspace composed of leading columns of $\mathbf{V}$, the following Equation 15 can be obtained.

$$\hat{\mathbf{V}} = [\mathbf{v}_0, \mathbf{v}_1, \dots, \mathbf{v}_{Q-1}] \quad (15)$$

[0118] Here, $Q \leq L$. L is a channel length or a sub-array length. Then, a weight, which is calculated using $\hat{\mathbf{V}}$, is represented by the following Equation 16.

$$\hat{\mathbf{w}} = \hat{\mathbf{V}} \hat{\boldsymbol{\beta}} \quad (16)$$

$$\boldsymbol{\beta} = \frac{\mathbf{R}_1^{-1} \mathbf{v}_1}{\mathbf{v}_1^H \mathbf{R}_1^{-1} \mathbf{v}_1}, \quad \hat{\mathbf{R}}_1 = E[\hat{\mathbf{u}} \hat{\mathbf{u}}^H], \quad \hat{\mathbf{u}} = \hat{\mathbf{V}}^H \mathbf{x}_p, \quad \text{and} \quad \hat{\mathbf{v}}_1 = \hat{\mathbf{V}}^H \mathbf{a}.$$

[0119] Here,

[0120] When $\tilde{\mathbf{R}}_1$ is actually estimated through spatial smoothing, $\hat{\mathbf{R}}_1$ is represented by the following Equation 17.

$$\hat{\mathbf{R}}_1 = \frac{1}{M-L+1} \sum_{l=0}^{M-L} \hat{\mathbf{u}}_l \hat{\mathbf{u}}_l^H \quad (17)$$

[0121] Here,

$$\hat{\mathbf{u}}_l = \begin{bmatrix} u_{l,0}[n] \\ u_{l,1}[n] \\ \vdots \\ u_{l,Q-1}[n] \end{bmatrix} \quad (18)$$

[0122] Transform functions in MV BF will be described below with reference to equations.

[0123] A known transform function which is used to reduce calculations of inverse matrices in MV BF is a Fourier transform matrix for BA BF (also referred to as a Butler matrix) and the like.

[0124] $B_{m,n}$, which is a component of the m^{th} row and the n^{th} column in a Fourier transform matrix $B \in \mathbb{C}^{L,L}$, is represented by the following Equation 19.

$$B_{m,n} = \frac{1}{\sqrt{L}} e^{-j2\pi mn/L} \quad (19)$$

[0125] This Fourier transform matrix transforms an element space into a transformed space. Some leading columns in the Fourier transform matrix represent low-frequency components and correspond to a direction of a focal point and beam components close to the focal point. Assuming that interference frequently occurs around a front direction, it is possible to efficiently reduce dimensions using only these columns. Further, as described above, spatial smoothing has an effect of reducing interference from a place far from a front side.

[0126] A transform function composed of a Legendre polynomial according to an exemplary embodiment of the present invention will be described below with reference to equations.

[0127] A beamforming apparatus according to an exemplary embodiment employs the LP MV BF method in which a matrix composed of a Legendre polynomial is used as a transform function for transforming a signal of an element space into a transformed space. MV BF performance of the case in which a Legendre polynomial is used in comparison to that of the case in which another transform function is used will be described below.

[0128] Some leading columns of a transform function composed of a Legendre polynomial may fully represent low-frequency components like a Fourier transform function. Each of Legendre polynomials obtained by applying a Gram-Schmidt orthonormalization process to a series of polynomials $\{1, n, n^2, \dots, n^{L-1}\}$ may be used as a column of V . In other

words, $V = P$, and $P = [P_0, P_1, \dots, P_{L-1}]$. Here, P_k is the k^{th} column of P , $P_k = [P_{0k}, P_{1k}, \dots, P_{(L-1)k}]^T$, and C_{nk} is determined by a Gram-Schmidt orthogonalization process.

[0129] For example, P_2 is represented by Equation 20.

$$P_2 = \begin{bmatrix} P_{20} \\ P_{21} \\ P_{22} \\ \vdots \\ P_{2(L-1)} \end{bmatrix} = \begin{bmatrix} c_{20} \\ c_{21} + c_{11} - c_{01} \\ 4c_{22} + 2c_{12} + c_{02} \\ \vdots \\ (L-1)^2 c_{22} + (L-1)c_{12} + c_{02} \end{bmatrix} \quad (20)$$

[0130] Columns of P sequentially represent frequency components in order of increasing frequency.

[0131] FIG. 8 is a graph for comparing a CW beam pattern of a Legendre polynomial basis transform function P according to an exemplary embodiment of the present invention with CW beam patterns of a Fourier transform function B and a transform function of PCA MV BF.

[0132] Specifically, in FIG. 8, a second column of P , that is, a CW beam pattern of P_1 , is compared with CW beam patterns of second columns of the Fourier transform function B and a transform function $\hat{V}$ of PCA MV BF.

[0133] In Equation 16, that is, $\hat{\mathbf{w}} = \hat{\mathbf{V}}\hat{\beta}$, since $\hat{\mathbf{W}}$ is a weighted sum of some leading columns of $\hat{\mathbf{V}}$ obtained by using $\hat{\beta}$, a CW beam pattern of $\hat{\mathbf{W}}$ is also a weighted sum of CW beam patterns of columns of $\hat{\mathbf{V}}$ obtained by using $\hat{\beta}$. It can be seen that the CW beam pattern of P is quite similar to a CW beam pattern of the transform function of PCA MV BF.

[0134] However, P_1 has a much lower frequency component than a second column b_1 of B , and unlike b_1 , absolute values of the beam pattern are bilaterally symmetrical with respect to 0 degrees. Such features work as an advantage in that interference close to the front is prevented more efficiently in the case in which P is used than in the case in which B is used even when $Q = 2$ so that a point target image may be sharper and also bilaterally symmetrical.

[0135] Meanwhile, a direction of a null point in a CW beam pattern of a column of B is also a null point direction in a CW beam pattern of another column, but this may not be the same in the case of P as shown in FIG. 2. For example, when $Q = 2$ and interference is received from a first null point direction of the CW beam pattern of p_1 , it is not possible to remove the interference using any $\hat{\beta}$. This is because P_1 has no influence on the direction. This is almost the same as in the case in which a transform function of PCA MV BF is used and may be a serious disadvantage of P when a CW is used. However, since various frequencies are mixed in an actual ultrasonic diagnostic device employing a wide-band signal, such a null point is not clearly shown in the beam pattern, and the disadvantage is not a large concern. Rather, in the same dimensionality reduction, LP MV BF's performance of decomposing adjacent point targets is similar to or superior to the two other methods, and in terms of approximation errors caused by the dimensionality reduction, LP MV BF almost always has fewer errors than BA BF and has almost no difference in the amount of errors from PCA MV BF in most cases.

[0136] One of advantages of LP MV BF is that a transform function is composed of only real numbers. In principle, BA BF or PAC MV BF is composed of complex numbers. Therefore, a transform calculation of LP MV BF is simple.

[0137] As described above, an amount of calculation for calculating an inverse matrix of $\tilde{\mathbf{R}}$ can be remarkably reduced by dimensionality reduction in the transformed space. In particular, when $Q \leq 3$, the amount of calculation is almost negligible. In this case, a step with the largest amount of calculation in MV BF employing transformation is the spatial smoothing step. As described above with reference to Equation 17, $\hat{\mathbf{R}}_1$ is calculated after $\hat{\mathbf{u}}_l \hat{\mathbf{u}}_l^H$ is calculated $M-L+1$ times. Here, since $\hat{\mathbf{u}}_l = \hat{\mathbf{V}}^H \mathbf{x}_l$, $Q \cdot L$ complex accumulations, for example, complex multiplications and complex additions, are generally required to transform $\mathbf{x}_l$ into $\hat{\mathbf{u}}_l$ with respect to each l . Also, L complex accumulations are required to calculate $\hat{\mathbf{u}}_l \hat{\mathbf{u}}_l^H$. Therefore, a total of $(M-L+1)(Q+1) \cdot L$ complex calculations are required to calculate $\hat{\mathbf{R}}_1$. When $M-L+1 = L$, that is, $L = (M+1)/2$, a total of $(Q+1) \cdot L^2$ complex accumulations are required to calculate $\hat{\mathbf{R}}_1$. This amount of calculation is considerably greater than the amount of calculation of M real number calculations which is required in conventional DAS BF. It being possible to remarkably reduce $\hat{\mathbf{R}}_1$ calculations when a polynomial, such as a Legendre polynomial, or a Fourier transform basis function is used as a transformation basis function according to an exemplary embodiment will be described below.

[0138] A degree of a polynomial, such as a Legendre polynomial, used as a transform function is reduced by one every time the polynomial is differentiated. Using the aforementioned feature, the present invention makes it possible to simply calculate spatial smoothing. For example, $\hat{\mathbf{u}}_l$ in Equation 17 is represented by Equation 21.

$$\hat{\mathbf{u}}_l = \hat{\mathbf{P}}^H \mathbf{x}_l \quad (21)$$

[0139] In Equation 21, $\hat{\mathbf{P}} = [\mathbf{p}_0 \ \mathbf{p}_1 \ \cdots \ \mathbf{p}_{Q-1}]$. Since $\mathbf{P}$ is composed of real numbers, $\hat{\mathbf{P}}^H = \hat{\mathbf{P}}^T$. The superscript H is a Hermitian transpose, and the superscript T is a transpose. Equation 21 can be represented by Equation 22 again.

$$\hat{\mathbf{u}}_l = \begin{bmatrix} u_{l,0} \\ u_{l,1} \\ \vdots \\ u_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{p}_0^T \mathbf{x}_l \\ \mathbf{p}_1^T \mathbf{x}_l \\ \vdots \\ \mathbf{p}_{Q-1}^T \mathbf{x}_l \end{bmatrix} \quad (22)$$

[0140] $u_{l,0}$ calculated using a lowest-degree column $\mathbf{P}_0$ is represented by Equation 23.

$$u_{l,0} = \sum_{q=0}^{L-1} c_{00} x_{l+m+q} \quad (23)$$

[0141] Meanwhile, when differentiation is performed, it is assumed that $\delta_{1,l+1,0} = u_{l+1,0} - u_{l,0}$. Also, $\delta_{p,q,r}$ is defined as being equal to $\delta_{p-1,q,r} - \delta_{p-1,q-1,r}$ when $p \geq 2$. For example, $\delta_{2,l+2,2} = \delta_{1,l+2,2} - \delta_{1,l+1,2}$. In $\delta_{p,q,r}$, p is a degree of difference, q is an index related to 1 in Equation 23 and has a minimum value obtained by adding p to the start index 1 of x which will participate in the calculation, and r indicates that the calculation result corresponds to the r^{th} row of $\hat{\mathbf{u}}_l$.

[0142] Since $\delta_{1,l+1,0} = u_{l+1,0} - u_{l,0}$, Equation 24 holds.

$$\delta_{1,l+1,0} = \sum_{q=0}^{L-1} c_{00} x_{l+m+q+1} - \sum_{q=0}^{L-1} c_{00} x_{l+m+q} = c_{00} (x_{l+L} - x_l) \quad (24)$$

[0143] Since $\delta_{1,l+1,0} = u_{l+1,0} - u_{l,0}$, $u_{l+1,0}$ can be simply calculated by Equation 25.

$$u_{l+1,0} = u_{l,0} + \delta_{1,l+1,0} \quad (25)$$

[0144] To calculate $u_{l,0}$, it is not necessary to repeat L multiplications and additions for every l , only two additions and one multiplication are required every time l increases by one after $u_{0,0}$ is calculated. L is a sub-array length.

[0145] Meanwhile, in the case of $u_{1,2}$ in which a second-degree polynomial is used, it is first assumed that, for example,

$u_{0,2}$, $u_{1,2}$, and $u_{2,2}$ are previously and directly calculated by using Equation 21 through a complicated calculation process omitted herein. $\delta_{1,1,2}$, $\delta_{1,2,2}$, and $\delta_{2,2,2}$ are also assumed to be previously and directly calculated from $u_{0,2}$, $u_{1,2}$, and $u_{2,2}$. Subsequently, when $L \geq 3$,

$$u_{l,2} = u_{0,2} + \delta_{1,1,2} + \delta_{1,2,2} + \sum_{k=3}^l \delta_{3,k,2} + \delta_{2,l,2} + \delta_{1,l,2} = v_{l,2} + \delta_{2,l,2} + \delta_{1,l,2} \quad (26)$$

[0146] Here,

$$v_{l,2} = u_{0,2} + \delta_{1,1,2} + \delta_{1,2,2} + \sum_{k=3}^l \delta_{3,k,2}, \quad \delta_{2,l,2} = \delta_{2,2,2} + \sum_{k=3}^l \delta_{3,k,2}$$

$$\delta_{1,l,2} = \delta_{1,1,2} + \delta_{1,2,2} + \sum_{k=3}^l \delta_{3,k,2} + \delta_{2,l,2} \quad (27)$$

$$\delta_{3,l+1,2} = d_{1,0,2}x_l + d_{3,1,2}x_{l-1} + d_{3,2,2}x_{l-2} + e_{3,0,2}x_{l+L} + e_{3,1,2}x_{l+L-1} + e_{3,2,2}x_{l+L-2} \quad (28)$$

[0147] In Equation 28, $d_{3,0,2} = -c_{02}$, $d_{3,1,2} = -(c_{22} - 2c_{02} + c_{12})$, $d_{3,2,2} = -c_{02} - c_{22} + c_{12}$, $e_{3,0,2} = ((L-1)^2+2)c_{22} + (L-1)c_{12} + c_{02}$, $e_{3,1,2} = -2((L-1)^2c_{22} + (L-1)c_{12} + c_{02})$, and $e_{3,2,2} = (L-1)^2c_{22} + (L-1)c_{12} + c_{02}$.

[0148] Here, both d and e are real-number constants which can be pre-calculated.

[0149] Accordingly, when $L \geq 2$, $u_{l+1,2} = v_{l+1,2} + \delta_{2,l+1,2} + \delta_{1,l+1,2}$. Since $v_{l+1,2} = v_{l,2} + \delta_{3,l+1,2}$, $\delta_{2,l+1,2} = \delta_{2,l,2} + \delta_{3,l+1,2}$, and $\delta_{1,l+1,2} = \delta_{1,l,2} + \delta_{2,l+1,2}$, the calculation can be sequentially performed with only addition except for 6 multiplications for calculating $\delta_{3,l+1,2}$.

[0150] Generally, a final difference of the R^{th} row of $\hat{\mathbf{P}}$ is represented by Equation 29.

$$\delta_{R+1,l+Q,R} = \sum_{q=0}^k (d_{R+1,q,R}x_l + e_{R+1,q,R}x_{l+L+q}) \quad (29)$$

[0151] In Equation 29, d and e in $d_{p,q,r}$ or $e_{p,q,r}$ are previously calculated real-number coefficients, the subscripts p and r have the same meanings as $\delta_{p,q,r}$, but the subscript q represents a degree of each term in a polynomial.

[0152] In other words, the calculation is finished with $2(Q+1)$ multiplications and $2(Q+1)$ additions. Next, δ is calculated by sequentially reducing a degree of difference (corresponding to x in $\delta_{x,y,z}$), and one addition is required every time the degree is reduced. In other words, one calculation of u involves calculating up to $\delta_{0,l+m,Q}$, and to this end, a total of Q additions are further required. Therefore, the one calculation of u involves $2(Q+1)$ multiplications and $3Q+2$ additions overall. Here, initial calculations, that is, $\delta_{Q+1,0,Q}$ and the like, should be performed in advance.

[0153] Meanwhile, in BA BF, a spatial smoothing calculation can be simplified in a similar way to LB MV BF. In this case, the transformed signal $\hat{\mathbf{u}}_l$ of BA BF corresponding to Equation 21 is represented by Equation 30.

$$\hat{\mathbf{u}}_l = \hat{\mathbf{B}}^H \mathbf{x}_l \quad (30)$$

[0154] Here, $\hat{\mathbf{B}} = [\mathbf{b}_0 \ \mathbf{b}_1 \ \cdots \ \mathbf{b}_{Q-1}]$.

[0155] Also, assuming that

$$\hat{\mathbf{u}}_l = \begin{bmatrix} \hat{u}_{l,0} \\ \hat{u}_{l,1} \\ \vdots \\ \hat{u}_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{b}_0^H \cdot \mathbf{x}_l \\ \mathbf{b}_1^H \cdot \mathbf{x}_l \\ \vdots \\ \mathbf{b}_{Q-1}^H \cdot \mathbf{x}_l \end{bmatrix} \quad (31),$$

$$\begin{aligned}
 \mathbf{X}_{1,m} &= \mathbf{h}_m^H \cdot \mathbf{x}_1 \approx \sum_{n=0}^{L-1} \mathbf{h}_{m,n}^H \cdot \mathbf{x}_{1,n} \\
 &= \left(\sum_{n=0}^{L-1} \mathbf{h}_{m,n}^H \cdot \mathbf{x}_{1,n} \right) \cdot e^{j\frac{2\pi}{L} \cdot \frac{m}{L} \cdot \frac{L-1}{2}} \cdot \mathbf{h}_{m,L-1}^H \cdot \mathbf{x}_{1,L-1} \\
 &\quad \cdot \left(\mathbf{h}_{m,L-1}^H \cdot \mathbf{x}_{1,L-1} \right) \cdot e^{j\frac{2\pi}{L} \cdot \frac{m}{L} \cdot \frac{L-1}{2}} \cdot \mathbf{h}_{m,L-1}^H \cdot \mathbf{x}_{1,L-1} \quad (32)
 \end{aligned}$$

[0156] In Equations 30 to 32, x is a received signal, the subscript 1 is a start index of x , a subscript Q is the number of components of a transformed signal selected by the user, and the superscript H is a Hermitian transpose. m represents the m^{th} row, n represents the n^{th} column, and L is a sub-array length.

[0157] FIG. 9 is a flowchart showing a beamforming method according to an exemplary embodiment of the present invention.

[0158] Referring to FIG. 9., a beamforming apparatus according to an exemplary embodiment transforms a received signal of an element space into a transformed space, which is another space, by using a transform function and calculates a transformed signal of the transformed space (900). Here, a transform function composed of low-frequency components may be used.

[0159] During the calculation of a transformed signal (900), the beamforming apparatus according to an exemplary embodiment uses a transform function composed of an orthogonal polynomial. The orthogonal polynomial may be any one of, for example, a Hermite polynomial, a Laguerre polynomial, a Jacobi polynomial, a Gegenbauer polynomial, a Chebyshev polynomial, and a Legendre polynomial.

[0160] When the beamforming apparatus uses an orthogonal polynomial, such as the Legendre polynomial, as the transform function for a spatial transformation, the Legendre polynomial can be used as the transform function in the MV BF method. In this case, it is possible to maintain performance of MV BF while remarkably reducing the amount of calculation of MV BF. When the beamforming apparatus performs beamforming using an orthogonal polynomial-based MV BF method, it is possible to select low-frequency components and discard high-frequency components, and some leading columns correspond to the low-frequency components like a Fourier transform function.

[0161] The beamforming apparatus according to an exemplary embodiment calculates the transformed signal by using features of a Fourier transform basis function or the transform function composed of a polynomial. For example, a feature that a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated is used to calculate the transformed signal. In this case, the amount of calculation of the transformed signal is reduced.

[0162] The exemplary embodiments in which spatial smoothing is performed using a feature of a Legendre polynomial or a Fourier transform basis function to reduce the amount of calculation of a transformed signal have been described above with reference to Equations 21 to 32.

[0163] Subsequently, the beamforming apparatus estimates an averaged spatial covariance matrix through spatial smoothing employing a feature of the transform function (910). Then, the beamforming apparatus calculates a weight of the transformed signal from the averaged spatial covariance matrix and generates a beam signal by applying the weight to the transformed signal (920).

[0164] The beamforming apparatus according to an exemplary embodiment generates a received signal in a channel data form by averaging multiple pieces of sample data before spatial smoothing. As an example, the beamforming apparatus generates a received signal in a channel data form by averaging sample data constituting sample data sets according to the sample data sets. As another example, the beamforming apparatus generates a received signal in a channel data form from multiple sample data sets by averaging sample data received through the same element of a transducer. Accordingly, spatial smoothing can be performed once on the received signal of the channel data form obtained by averaging multiple pieces of sample data, and the amount of calculation is reduced.

[0165] The beamforming apparatus according to an exemplary embodiment can perform a step of collecting averaged covariance matrices, which are generated by performing spatial smoothing on sample data having individual depths, and performing temporal averaging on the averaged covariance matrices. Here, when the time averaging is performed in a shared memory, performance can be improved.

[0166] According to the above description, the present invention can be applied to all of various array signal processing fields, such as a radar, a sonar, non-destructive examination, and the like in addition to an ultrasonic diagnostic device.

[0167] Exemplary embodiments of the present invention have been described above. Those of ordinary skill in the technical field to which the present invention pertains should appreciate that various changes can be made without departing from the spirit of the present invention. Accordingly, the disclosed embodiments should be considered in a descriptive sense and not in a restrictive sense. The scope of the present invention is set forth not in the foregoing description but in the claims, and differences in scope equivalent to the claims should be construed as being included in the present invention.

Claims

1. A beamforming apparatus comprising:

a spatial smoothing unit configured to transform received signals into another space by using a transform function composed of low-frequency components, calculate transformed signals by a spatial smoothing operation employing the transform function in the transformed space, and estimate an averaged spatial covariance matrix; a weight calculation unit configured to calculate weights of the transformed signals from the averaged spatial covariance matrix estimated by the spatial smoothing operation; and a synthesis unit configured to generate a beam signal by using the transformed signals and the weights of the transformed signals.

2. The beamforming apparatus of claim 1, wherein the spatial smoothing unit leaves the low-frequency components of the transform function, removes high-frequency components, and then generates the transformed signals by transforming the received signals into the other space with a transform function composed of the remaining low-frequency components to reduce dimensions of a spatial covariance matrix of each of the received signals input through a plurality of channels.

3. The beamforming apparatus of claim 1, wherein the spatial smoothing unit calculates the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system, and estimates spatial covariance matrices from the calculated transformed signals.

4. The beamforming apparatus of claim 1, wherein the transform function is an orthogonal polynomial, and the spatial smoothing unit calculates the transformed signals by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated, and estimates spatial covariance matrices from the calculated transformed signals.

5. The beamforming apparatus of claim 4, wherein the orthogonal polynomial is any one of a Hermite polynomial, a Laguerre polynomial, a Jacobi polynomial, a Gegenbauer polynomial, a Chebyshev polynomial, and a Legendre polynomial.

6. The beamforming apparatus of claim 4, wherein the transform function (V) is a Legendre polynomial (P), and

$P = [P_0, P_1, \dots, P_{L-1}]$ where P_k is a k^{th} column of P, $P_k = [P_{0k}, P_{1k}, \dots, P_{(L-1)k}]^T$, $P_{mk} = \sum_{n=0}^k m^n c_{njk}$, c_{nk} is determined by a Gram-Schmidt orthogonalization process, and the superscript T is a transpose.

7. The beamforming apparatus of claim 1, wherein the spatial smoothing unit estimates a spatial covariance matrix $\tilde{\mathbf{R}}_1$ through the spatial smoothing operation, and

the estimated spatial covariance matrix $\tilde{\mathbf{R}}_1$ is
$$\tilde{\mathbf{R}}_1 = \frac{1}{M-L+1} \sum_{i=0}^{M-L} \mathbf{u}_i \mathbf{u}_i^H$$
 where M is a number of all channels, M-L+1 is a number of sub-arrays, L is a sub-array length, $\mathbf{u}_i$ is a transformed signal, and the superscript H is a Hermitian transpose.

8. The beamforming apparatus of claim 1, further comprising:

an accumulation unit configured to accumulate a transformed signal corresponding to each sub-array, wherein the synthesis unit calculates the beam signal once by synthesizing the transformed signals accumulated by the accumulation unit and the weights.

9. The beamforming apparatus of claim 8, wherein the beam signal $\tilde{\mathbf{Z}}$ calculated by the synthesis unit is

$$\tilde{\mathbf{Z}} = \frac{1}{M-L+1} \sum_{i=0}^{M-L} \beta^i \mathbf{u}_i$$
 where M is a number of all channels, M-L+1 is a number of sub-arrays, L is a sub-array length, β is a weight, and $\mathbf{u}_i$ is a transformed signal.

10. The beamforming apparatus of claim 1, wherein the spatial smoothing unit calculates a corrected transformed signal $\hat{\mathbf{u}}_l$ obtained by correcting a transformed signal, and

$$\hat{\mathbf{u}}_l = \begin{bmatrix} H_{l,0} \\ H_{l,1} \\ \vdots \\ H_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{p}_0^T \mathbf{x}_l \\ \mathbf{p}_1^T \mathbf{x}_l \\ \vdots \\ \mathbf{p}_{Q-1}^T \mathbf{x}_l \end{bmatrix},$$

$\hat{\mathbf{u}}_l = \hat{\mathbf{P}}^H \mathbf{x}_l$ where $\hat{\mathbf{P}}$ is a corrected Legendre polynomial, $\hat{\mathbf{P}} = [\mathbf{p}_0 \mathbf{p}_1 \cdots \mathbf{p}_{Q-1}]$, $\hat{\mathbf{P}}^H = \hat{\mathbf{P}}^T$, $\mathbf{x}$ is a received signal, the subscript 1 is a start index of $\mathbf{x}$, the subscript Q is a number of components of a transformed signal selected by a user, the superscript H is a Hermitian transpose, and the superscript T is a transpose.

11. The beamforming apparatus of claim 10, wherein a difference of an R^{th} row in the corrected Legendre polynomial

$\hat{\mathbf{P}}$ is $\delta_{R+1,2+2L,R} = \sum_{q=0}^R (d_{R+1,q,R} \mathbf{x}_l + e_{R+1,q,R} \mathbf{x}_{l+2+L})$ where d and e in $d_{p,q,r}$ or $e_{p,q,r}$ are previously calculated real-number coefficients, the subscript p is a degree of difference, r is an r^{th} row of the corrected transformed function $\hat{\mathbf{u}}_l$, q is a degree of each term of the polynomial, 1 is the start index of $\mathbf{x}$, and L is a sub-array length.

12. The beamforming apparatus of claim 11, wherein $2(Q+1)$ multiplications and $2(Q+1)$ additions are required to calculate the difference of the R^{th} row in the corrected Legendre polynomial $\hat{\mathbf{P}}$, one addition is further required every time the difference degree decreases, and the difference of the R^{th} row in the corrected Legendre polynomial $\hat{\mathbf{P}}$ is consequently calculated by $2(Q+1)$ multiplications and $3Q+2$ additions.

13. The beamforming apparatus of claim 1, wherein the transform function is a Fourier transform basis function, and the spatial smoothing unit calculates the transform function using the Fourier transform basis function.

14. The beamforming apparatus of claim 13, wherein the spatial smoothing unit calculates a corrected transformed signal $\hat{\mathbf{u}}_l$ obtained by correcting a transformed signal, and $\hat{\mathbf{u}}_l = \hat{\mathbf{B}}^H \mathbf{x}_l$ where a transform function $\hat{\mathbf{B}}$ is a corrected transform function, $\hat{\mathbf{B}} = [\mathbf{b}_0 \mathbf{b}_1 \cdots \mathbf{b}_{Q-1}]$,

$$\hat{\mathbf{u}}_l = \begin{bmatrix} H_{l,0} \\ H_{l,1} \\ \vdots \\ H_{l,Q-1} \end{bmatrix} = \begin{bmatrix} \mathbf{b}_0^H \mathbf{x}_l \\ \mathbf{b}_1^H \mathbf{x}_l \\ \vdots \\ \mathbf{b}_{Q-1}^H \mathbf{x}_l \end{bmatrix},$$

$\mathbf{x}$ is a received signal, the subscript 1 is a start index of $\mathbf{x}$, the subscript Q is a number of components of a transformed signal selected by a user, and the superscript H is a Hermitian transpose.

15. The beamforming apparatus of claim 14, wherein the transformed signal $u_{l,m}$ is

$$\begin{aligned} u_{l,m} &= \mathbf{b}_{m,n}^H \mathbf{x}_l = \sum_{n=0}^{Q-1} \mathbf{b}_{m,n}^H \mathbf{x}_{l,n} \\ &= \left(\sum_{n=0}^{L-1} \mathbf{b}_{m,n}^H \mathbf{x}_{l+1,n} \right) e^{j2\pi \frac{m}{L} l} + \mathbf{b}_{m,L}^H \mathbf{x}_{l+L} \\ &= \left(\mathbf{b}_{m,L}^H \mathbf{x}_{l+L} - \mathbf{b}_{m,L}^H \mathbf{x}_{l+1,L} \right) e^{j2\pi \frac{m}{L} l} + \mathbf{b}_{m,L}^H \mathbf{x}_{l+L} \end{aligned}$$

where m is an m^{th} row, n is an n^{th} column, 1 is the start index of $\mathbf{x}$, and L is a sub-array length.

16. The beamforming apparatus of claim 1, further comprising:

a channel data averaging unit configured to generate the received signals in a channel data form by averaging multiple pieces of sample data before the spatial smoothing.

17. The beamforming apparatus of claim 16, wherein the channel data averaging unit generates the received signals in the channel data form from sample data sets received according to sub-arrays of a transducer by performing

beamforming on sample data constituting the sample data sets.

18. The beamforming apparatus of claim 16, wherein the channel data averaging unit generates the received signals in the channel data form from multiple sample data sets by averaging sample data received through elements at identical positions of a transducer with respect to an identical depth.

19. The beamforming apparatus of claim 16, wherein the spatial smoothing unit performs the spatial smoothing once on the received signals of the channel data form obtained by the channel data averaging unit averaging the multiple pieces of sample data.

20. The beamforming apparatus of claim 1, further comprising:

a temporal averaging unit configured to collect averaged covariance matrices generated by performing the spatial smoothing on sample data having individual depths, and perform temporal averaging.

21. The beamforming apparatus of claim 20, further comprising:

a shared memory
wherein the temporal averaging unit is located in the shared memory.

22. An ultrasonic imaging apparatus comprising:

a transducer configured to emit an ultrasonic wave to an object, receive an ultrasonic signal reflected by the object, and output a plurality of ultrasonic signals by transforming the received ultrasonic wave;

a beamforming unit configured to calculate transformed signals by transforming the ultrasonic signal received by the transducer into another space with a transform function composed of low-frequency components, generate a beam signal by applying weights to the transformed signals in the transformed space, and estimate an averaged spatial covariance matrix to be used for generating the beam signal by a spatial smoothing operation employing the transform function; and

an image generation unit configured to generate an image using a signal output from the beamforming unit.

23. The ultrasonic imaging apparatus of claim 22, wherein the beamforming unit calculates the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system.

24. The ultrasonic imaging apparatus of claim 22, wherein the transform function is an orthogonal polynomial, and the beamforming unit calculates the transformed signals by using features that the orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated.

25. The ultrasonic imaging apparatus of claim 22, wherein the transform function is a Fourier transform basis function, and the beamforming unit calculates the transformed signals by using the Fourier transform basis function.

26. A beamforming method comprising:

calculating transformed signals by transforming received signals into another space with a transform function composed of low-frequency components;

estimating an averaged spatial covariance matrix through spatial smoothing employing a feature of the transform function; and

calculating weights of the transformed signals from the averaged spatial covariance matrix and generating a beam signal by applying the weights to the transformed signals.

27. The beamforming method of claim 26, wherein the calculating of the transformed signals comprises calculating the transformed signals by using features that a difference between neighboring transformed signals is a difference of a first system and a difference between neighboring differences of the first system is a difference of a second system.

28. The beamforming method of claim 26, wherein the transform function is an orthogonal polynomial, and the calculating of the transformed signals comprises calculating the transformed signals by using features that the

orthogonal polynomial is composed of real numbers and a degree of the orthogonal polynomial is reduced by one every time the orthogonal polynomial is differentiated.

5 **29.** The beamforming method of claim 28, wherein the generating of the beam signal comprises calculating the weights through spatial smoothing based on the orthogonal polynomial and generating a minimum variance (MV) beam signal from the calculated weight.

10 **30.** The beamforming method of claim 26, wherein the transform function is a Fourier transform basis function, and the calculating of the transformed signals comprises calculating the transformed signals by using the Fourier transform basis function.

15 **31.** The beamforming method of claim 30, wherein the generating of the beam signal comprises calculating the weights through spatial smoothing based on the Fourier transform basis function and generating a beamspace adaptive (BA) beam signal from the calculated weights.

32. The beamforming method of claim 26, further comprising:

20 before the spatial smoothing, generating the received signals in a channel data form by averaging multiple pieces of sample data.

FIG. 1

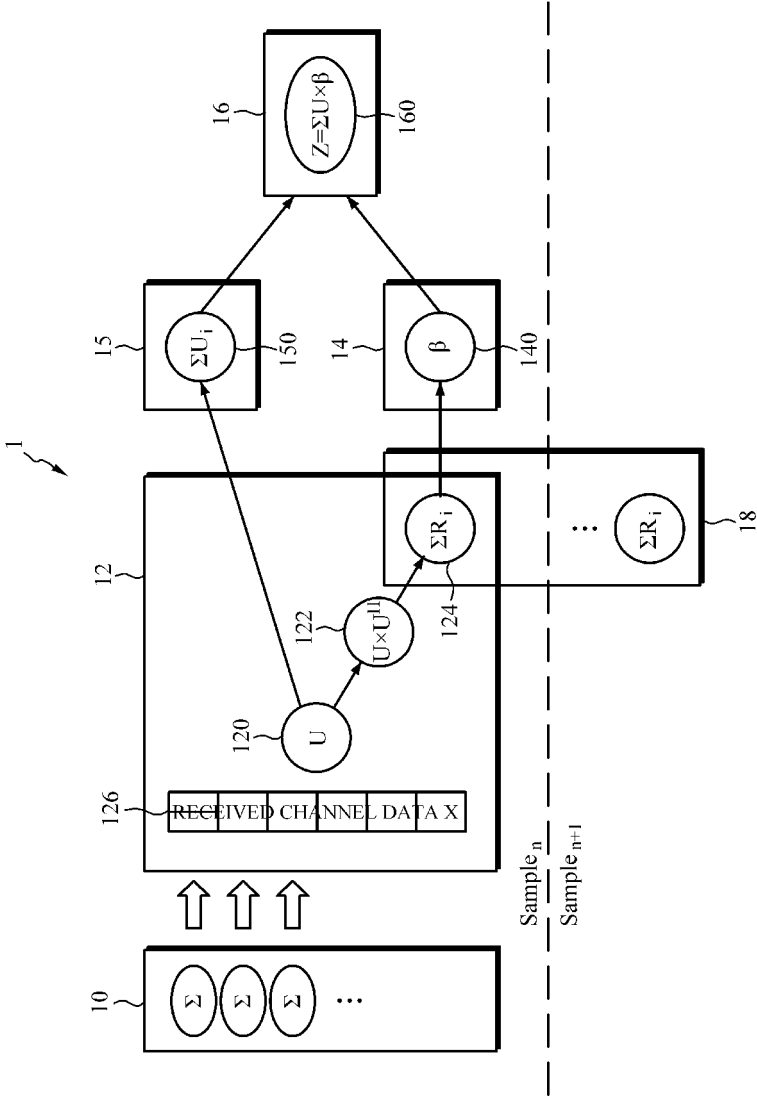


FIG. 2

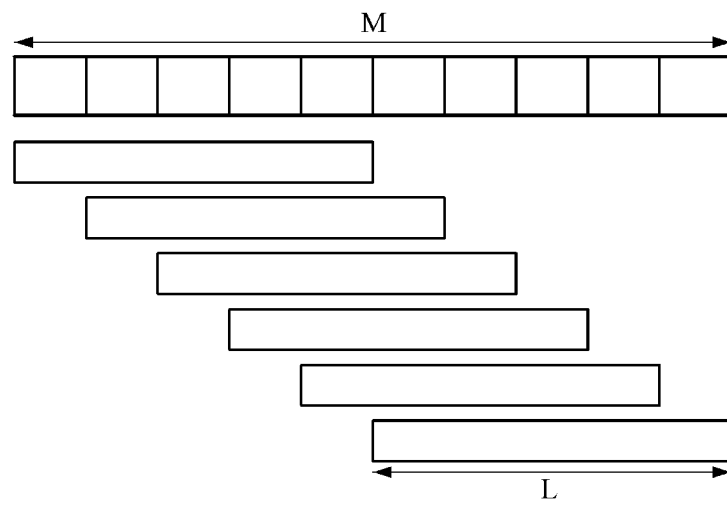


FIG. 3

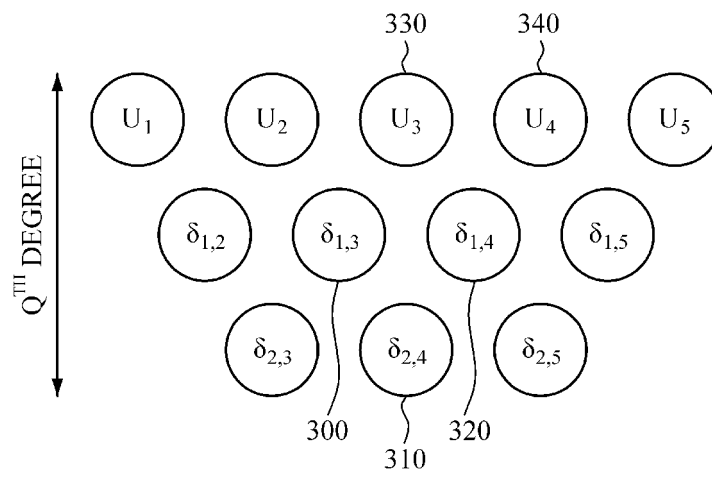


FIG. 4

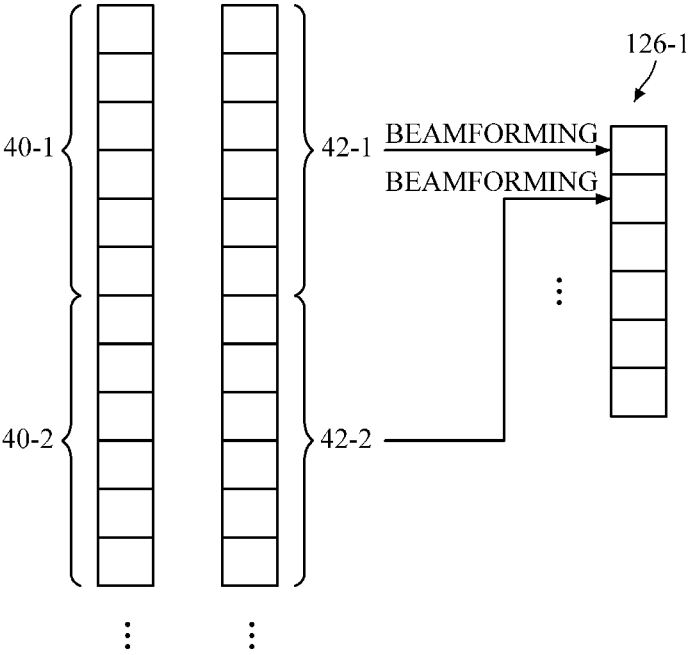


FIG. 5

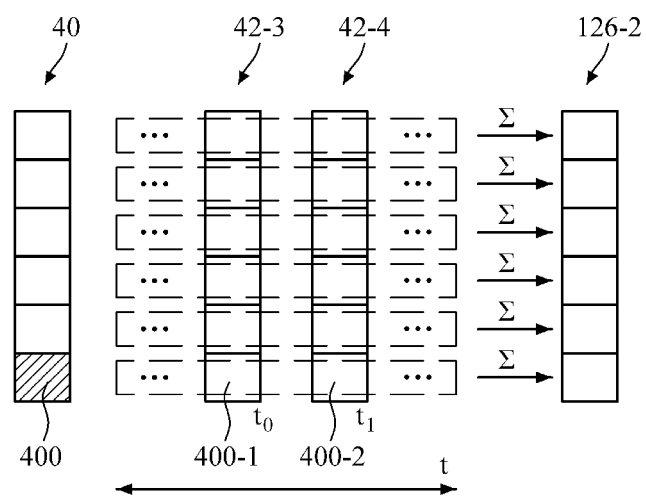


FIG. 6



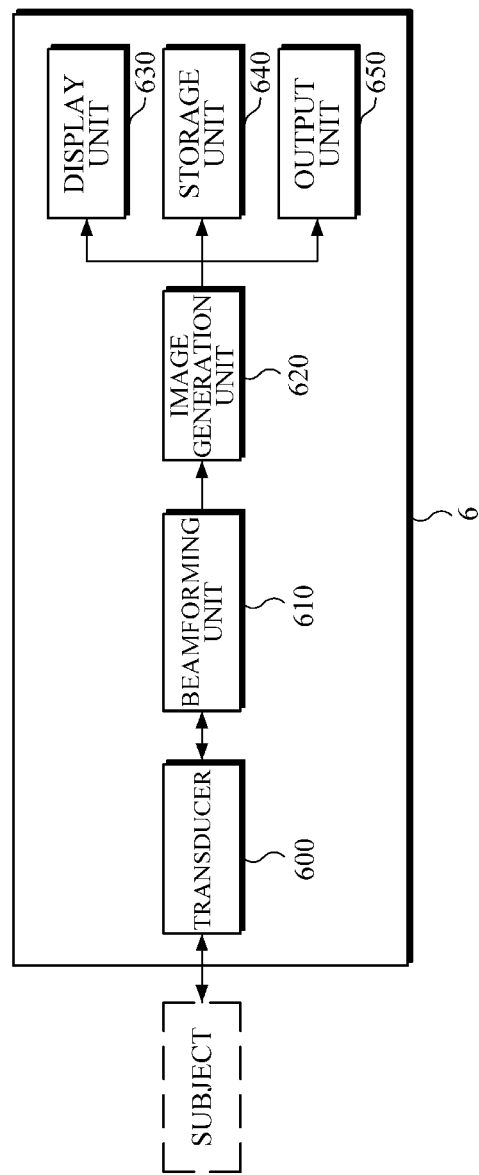


FIG. 7

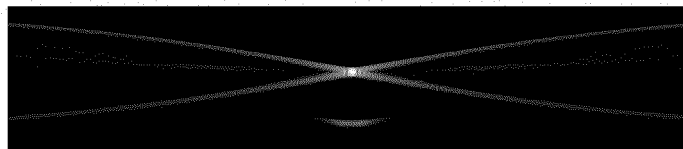

(a)

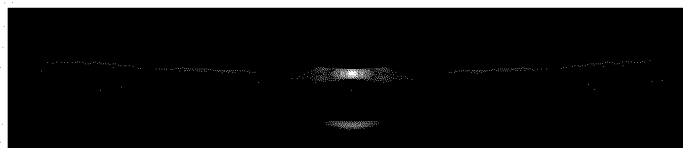

(b)

FIG. 8


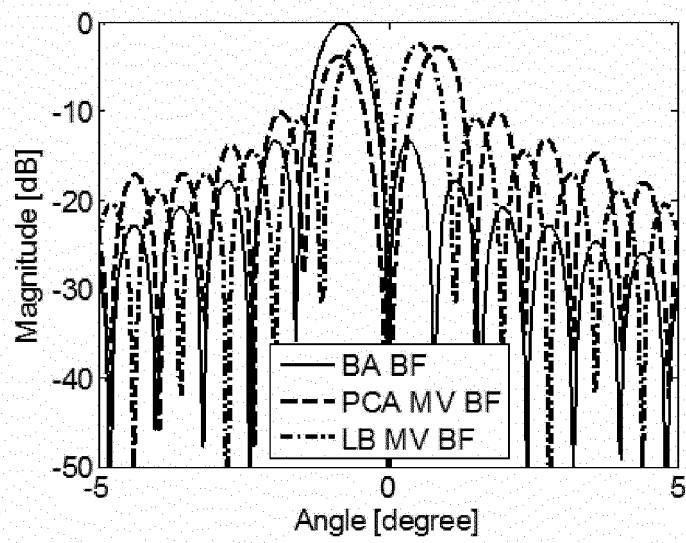


FIG. 9

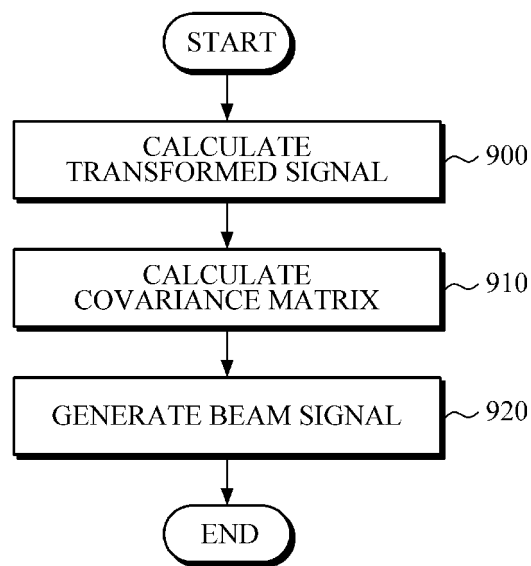

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2015/003036

A. CLASSIFICATION OF SUBJECT MATTER

A61B 8/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B 8/00; G10L 11/00; H04W 8/02; A61B 6/00; G06T 5/00; G06T 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models: IPC as above

Japanese Utility models and applications for Utility models: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS (KIPO internal) & Keywords: low frequency, transform function, spatial smoothing, spatial covariance matrix, weight, beamforming, ultrasonic wave

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004-0220800 A1 (KONG, Dong - Geon et al.) 04 November 2004 See abstract, paragraph [0015], claims 1-7 and figures 2-6.	1-32
A	KR 10-2014-0143807 A (MAUI IMAGING, INC.) 17 December 2014 See abstract, paragraphs [0073], [0138], [0139] and figures 1a-2.	1-32
A	US 8761477 B2 (WALKER, William F. et al.) 24 June 2014 See abstract, column 13, line 28-column 16, line 65 and figures 1A-6.	1-32
A	JP 2009-502354 A (VERATHON INC.) 29 January 2009 See abstract, paragraphs [0016]-[0052] and figures 1A-20.	1-32
A	JP 2012-513816 A (MEDICAL VISION IMAGING SOLUTION LTD.) 21 June 2012 See abstract, paragraph [0036], claims 1-10 and figures 1A-5.	1-32

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 DECEMBER 2015 (23.12.2015)

Date of mailing of the international search report

23 DECEMBER 2015 (23.12.2015)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Seonsa-ro, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2015/003036

Patent document cited in search report	Publication date	Patent family member	Publication date
US 2004-0220800 A1	04/11/2004	EP 1473964 A2 EP 1473964 A3 JP 2004-334218 A JP 4248445 B2 KR 10-0621076 B1 US 7567678 B2	03/11/2004 09/08/2006 25/11/2004 02/04/2009 08/09/2006 28/07/2009
KR 10-2014-0143807 A	17/12/2014	CN 104203110 A EP 2833791 A1 JP 2015-512301 A WO 2013-148673 A1	10/12/2014 11/02/2015 27/04/2015 03/10/2013
US 8761477 B2	24/06/2014	EP 1949298 A2 EP 1949298 A4 US 2010-0142781 A1 WO 2007-035765 A2 WO 2007-035765 A3	30/07/2008 07/04/2010 10/06/2010 29/03/2007 12/07/2007
JP 2009-502354 A	29/01/2009	AU 2003-237819 A1 AU 2003-254372 A1 AU 2003-261357 A1 AU 2003-296928 A1 CA 2526297 A1 CA 2534287 A1 CA 2541798 A1 CA 2587137 A1 CA 2598335 A1 CA 2616541 A1 CA 2617622 A1 CA 2631937 A1 CA 2671708 A1 CA 2688758 A1 CA 2688778 A1 CA 2732997 A1 EP 1521548 A1 EP 1538986 A2 EP 1538986 B1 EP 1551305 A1 EP 1596718 A2 EP 1689298 A1 EP 1781176 A2 EP 1781176 B1 EP 1784129 A2 EP 1784129 B1 EP 1819279 A2 EP 1819279 B1 EP 1909648 A2 EP 1909648 A4 EP 2097009 A2	22/12/2003 11/03/2004 23/02/2004 07/06/2004 18/12/2003 12/02/2004 21/05/2004 19/05/2005 01/09/2005 08/02/2007 09/03/2006 15/06/2006 10/07/2008 27/11/2008 27/11/2008 11/02/2010 13/04/2005 15/06/2005 15/06/2011 13/07/2005 23/11/2005 16/08/2006 09/05/2007 13/04/2011 16/05/2007 25/05/2011 22/08/2007 05/01/2011 16/04/2008 13/01/2010 09/09/2009

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2015/003036

Patent document cited in search report	Publication date	Patent family member	Publication date
		EP 2155067 A2	24/02/2010
		EP 2155068 A1	24/02/2010
		EP 2186483 A1	19/05/2010
		EP 2323559 A1	25/05/2011
		JP 2005-528950 A	29/09/2005
		JP 2005-534462 A	17/11/2005
		JP 2005-535420 A	24/11/2005
		JP 2007-522884 A	16/08/2007
		JP 2007-524474 A	30/08/2007
		JP 2008-511408 A	17/04/2008
		JP 2008-522661 A	03/07/2008
		JP 2009-279435 A	03/12/2009
		JP 2010-207596 A	24/09/2010
		JP 2010-514524 A	06/05/2010
		JP 2010-527277 A	12/08/2010
		JP 2010-527278 A	12/08/2010
		JP 2011-530352 A	22/12/2011
		JP 2012-101103 A	31/05/2012
		JP 2012-101104 A	31/05/2012
		JP 4430532 B2	10/03/2010
		JP 4549853 B2	22/09/2010
		JP 5406272 B2	05/02/2014
		JP 5443883 B2	19/03/2014
		JP 5538997 B2	02/07/2014
		JP 5632278 B2	26/11/2014
		JP 5646447 B2	24/12/2014
		JP 5658151 B2	21/01/2015
		KR 10-0941208 B1	10/02/2010
		US 2003-0229281 A1	11/12/2003
		US 2004-0024302 A1	05/02/2004
		US 2004-0024315 A1	05/02/2004
		US 2004-0121578 A1	24/06/2004
		US 2004-0127796 A1	01/07/2004
		US 2004-0127797 A1	01/07/2004
		US 2004-0267123 A1	30/12/2004
		US 2005-0215896 A1	29/09/2005
		US 2005-0228278 A1	13/10/2005
		US 2005-0251039 A1	10/11/2005
		US 2006-0006765 A1	12/01/2006
		US 2006-0025689 A1	02/02/2006
		US 2006-0079775 A1	13/04/2006
		US 2006-0111633 A1	25/05/2006
		US 2006-0235301 A1	19/10/2006
		US 2007-0004983 A1	04/01/2007
		US 2007-0100236 A1	03/05/2007
		US 2007-0232908 A1	04/10/2007
		US 2007-0276247 A1	29/11/2007
		US 2007-0276254 A1	29/11/2007
		US 2008-0139934 A1	12/06/2008
		US 2008-0139938 A1	12/06/2008

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2015/003036

Patent document cited in search report	Publication date	Patent family member	Publication date
		US 2008-0146932 A1	19/06/2008
		US 2008-0146939 A1	19/06/2008
		US 2008-0181479 A1	31/07/2008
		US 2008-0242985 A1	02/10/2008
		US 2008-0249414 A1	09/10/2008
		US 2008-0262356 A1	23/10/2008
		US 2009-0062644 A1	05/03/2009
		US 2009-0105585 A1	23/04/2009
		US 2009-0112089 A1	30/04/2009
		US 2009-0264757 A1	22/10/2009
		US 2010-0036242 A1	11/02/2010
		US 2010-0036252 A1	11/02/2010
		US 2010-0198075 A1	05/08/2010
		US 2010-0204581 A1	12/08/2010
		US 2011-0004101 A1	06/01/2011
		US 6676605 B2	13/01/2004
		US 6803308 B2	12/10/2004
		US 6884217 B2	26/04/2005
		US 7004904 B2	28/02/2006
		US 7041059 B2	09/05/2006
		US 7087022 B2	08/08/2006
		US 7450746 B2	11/11/2008
		US 7520857 B2	21/04/2009
		US 7611466 B2	03/11/2009
		US 7727150 B2	01/06/2010
		US 7744534 B2	29/06/2010
		US 7749165 B2	06/07/2010
		US 7819806 B2	26/10/2010
		US 8016760 B2	13/09/2011
		US 8133181 B2	13/03/2012
		US 8167803 B2	01/05/2012
		US 8221321 B2	17/07/2012
		US 8221322 B2	17/07/2012
		US 8308644 B2	13/11/2012
		US 8435181 B2	07/05/2013
		WO 03-103499 A1	18/12/2003
		WO 2004-012584 A2	12/02/2004
		WO 2004-012584 A3	06/05/2004
		WO 2004-017834 A1	04/03/2004
		WO 2004-041094 A2	21/05/2004
		WO 2004-041094 A3	08/07/2004
		WO 2005-000390 A2	06/01/2005
		WO 2005-000390 A3	31/03/2005
		WO 2005-044109 A1	19/05/2005
		WO 2005-079487 A2	01/09/2005
		WO 2005-079487 A3	13/11/2008
		WO 2005-107581 A2	17/11/2005
		WO 2005-107581 A3	08/03/2007
		WO 2006-017168 A2	16/02/2006
		WO 2006-017168 A3	04/05/2006

Form PCT/ISA/210 (patent family annex) (January 2015)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2015/003036

Patent document cited in search report	Publication date	Patent family member	Publication date
		WO 2006-026605 A2	09/03/2006
		WO 2006-026605 A3	22/02/2007
		WO 2006-031526 A2	23/03/2006
		WO 2006-031526 A3	15/03/2007
		WO 2006-062867 A2	15/06/2006
		WO 2006-062867 A3	09/08/2007
		WO 2007-016369 A2	08/02/2007
		WO 2007-016369 A3	23/04/2009
		WO 2007-103737 A2	13/09/2007
		WO 2007-103737 A3	19/06/2008
		WO 2008-073560 A2	19/08/2008
		WO 2008-073560 A3	04/12/2008
		WO 2008-083386 A2	10/07/2008
		WO 2008-083386 A3	28/08/2008
		WO 2008-144449 A2	27/11/2008
		WO 2008-144452 A1	27/11/2008
		WO 2008-144570 A1	27/11/2008
		WO 2010-017508 A1	11/02/2010
JP 2012-513816 A	21/06/2012	CA 2748234 A1	01/07/2010
		CN 101919230 A	15/12/2010
		CN 101919230 B	13/02/2013
		CN 102203826 A	28/09/2011
		CN 102203826 B	18/02/2015
		EP 2238742 A2	13/10/2010
		EP 2238742 B1	14/05/2014
		EP 2380132 A2	26/10/2011
		JP 2011-508334 A	10/03/2011
		JP 5531368 B2	25/06/2014
		JP 5753791 B2	22/07/2015
		US 2010-0272340 A1	28/10/2010
		US 2011-0268328 A1	03/11/2011
		US 8582916 B2	12/11/2013
		US 8605970 B2	10/12/2013
		WO 2009-081410 A2	02/07/2009
		WO 2009-081410 A3	11/03/2010
		WO 2010-073251 A2	01/07/2010
		WO 2010-073251 A3	16/09/2010

专利名称(译)	波束形成装置，超声波成像装置和波束形成方法允许简单的空间平滑操作		
公开(公告)号	EP3278734A4	公开(公告)日	2018-10-10
申请号	EP2015887806	申请日	2015-03-27
[标]申请(专利权)人(译)	爱飞纽医疗器械贸易有限公司 翰林大学校产学协力团		
申请(专利权)人(译)	ALPINION MEDICAL SYSTEMS CO., LTD. 工业学术合作的基础上，翰林大学		
当前申请(专利权)人(译)	升鹏医疗系统有限公司		
[标]发明人	CHANG SUN YEOB BAE MOO HO		
发明人	CHANG, SUN-YEOB BAE, MOO-HO		
IPC分类号	A61B8/00		
CPC分类号	A61B8/5207 A61B8/54 G01S7/52046 G01S15/8927 G01S15/8977 G01S15/89 A61B5/0456 A61B5/204 A61B8/0883 A61B8/4455 A61B8/483 A61B8/488 G06T5/002 G06T5/50		
优先权	PCT/KR2015/003036 2015-03-27 WO		
其他公开文献	EP3278734A1		
外部链接	Espacenet		

摘要(译)

公开了一种允许简单空间平滑操作的波束形成装置，超声成像装置和波束形成方法。根据本发明实施例的波束形成设备包括：空间平滑单元，用于使用由低频分量配置的变换函数将接收信号变换到另一空间，通过使用变换函数的空间平滑操作计算变换信号。变换空间，估计平均空间协方差矩阵；加权值运算单元，用于根据空间平滑运算估计的平均空间协方差矩阵运算变换信号的加权值；和使用变换信号和变换信号的加权值产生波束信号的合成单元。