

(19)



(11)

EP 2 139 055 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.01.2017 Bulletin 2017/01

(51) Int Cl.:
H01L 51/52 (2006.01)

(21) Application number: **09251628.5**

(22) Date of filing: **23.06.2009**

(54) **Organic light emitting diode display and method of manufacturing the same**

Organische lichtemittierende Diodenanzeige und Herstellungsverfahren dafür

Affichage à diode électroluminescente organique et son procédé de fabrication

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **26.06.2008 KR 20080061125**

(43) Date of publication of application:
30.12.2009 Bulletin 2009/53

(73) Proprietor: **Samsung Display Co., Ltd.
Gyeonggi-do (KR)**

(72) Inventors:
• **Lee, Duk-Jin**
Samsung Mobile Display Co., Ltd.
Yongin-si,
Gyeonggi-do (KR)
• **Kwak, Noh Min**
Samsung Mobile Display Co., Ltd.
Yongin-si,
Gyeonggi-do (KR)

- **Jung, Woo-Suk**
Samsung Mobile Display Co., Ltd.
Yongin-si,
Gyeonggi-do (KR)
- **Park, Sang-Hun**
Samsung Mobile Display Co., Ltd.
Yongin-si,
Gyeonggi-do (KR)
- **Jung, Kyu-Ho**
Samsung Mobile Display Co., Ltd.
Yongin-si,
Gyeonggi-do (KR)

(74) Representative: **Mounteney, Simon James**
Marks & Clerk LLP
90 Long Acre
London
WC2E 9RA (GB)

(56) References cited:
WO-A1-2007/066424 JP-A- 2005 189 597
JP-A- 2008 090 053 US-A1- 2002 015 005

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 139 055 B1

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] The present invention relates to an organic light emitting diode (OLED) display and a method of manufacturing the same. More particularly, the present invention relates to an OLED display and a method of manufacturing the same in which stability and reliability of a display panel assembly are improved.

Description of the Related Art

[0002] An organic light emitting diode (OLED) display includes a plurality of organic light emitting diodes having a hole injection electrode, an organic emission layer, and an electron injection electrode. The OLED display emits light by energy which is generated when excitons, which are generated when electrons and holes are coupled within the organic emission layer, fall from an excited state to a ground state, thereby forming an image.

[0003] Therefore, because the OLED display (unlike a liquid crystal display (LCD)) has self-luminance characteristics and does not require a separate light source, the thickness and weight thereof can be reduced. Furthermore, because the OLED display represents high quality characteristics, such as low power consumption, high luminance and a high reaction speed, the OLED display has been in the spotlight as the next generation display device for portable electronic devices.

[0004] In general, the OLED display includes a display panel assembly in which the organic light emitting diodes are formed and a printed circuit board (PCB) which is electrically connected to the display panel assembly through a flexible printed circuit board (FPCB). Furthermore, the OLED display also includes a support member for supplementing mechanical strength and stability of the display panel assembly by coupling to the display panel assembly, and a cover window for covering one surface of the display panel assembly which displays an image.

[0005] In the display panel assembly, the cover window is generally disposed separate by a predetermined separation space from the display panel assembly. Light which is emitted from the display panel assembly is emitted to the outside via the separation space and the cover window. Therefore, there is a problem in that visibility of an image which is displayed by the OLED display is deteriorated due to a difference in refractive indexes of the cover window and the separation space, deterioration of a refractive index due to the separation space, and reflection of light occurring in the cover window and a display panel assembly surface.

[0006] Furthermore, there is a problem in that an entire thickness of the OLED display becomes large due to the separation space between the cover window and the display panel assembly.

[0007] US 2002/0015005 discloses a liquid crystal display device having a liquid crystal panel on a substrate and a holding member disposed over the panel and the substrate. The liquid crystal panel and the holding member may be attached as appropriate using, for example, adhesive tape (two-faced tape), adhesive agent, an engaging structure, or the like.

[0008] JP 2008-90053 discloses a liquid crystal display device having a display panel between a casing and an overlying protective panel. The protective panel is stuck around the circumference of the casing by adhesive or double-sided tape and is also stuck to the entire display surface of the liquid crystal display panel. The purpose of this is matching the refractive index of the glass to reduce optical losses caused by reflections at boundaries if an air gap is provided.

[0009] WO 2007/066424 discloses a liquid crystal display panel having an adhesive resin provided over a mounting region of a substrate, covering an integrated circuit chip and filling the space between the mounting region and the cover plate.

[0010] The above information disclosed in this section is provided only for enhancement of an understanding of the background of the invention, and therefore it may contain information that does not form the prior art which is already known to a person of ordinary skill in the art.

SUMMARY OF THE INVENTION

[0011] The present invention has been developed in an effort to provide an organic light emitting diode (OLED) display and a method of manufacturing the same having the advantages of improved stability and reliability of a display panel assembly.

[0012] The present invention has also been developed in an effort to provide an OLED display and a method of manufacturing the same having the advantages of stably covering an integrated circuit chip in a display panel assembly, and stably coupling a cover window and the display panel assembly.

[0013] The present invention has been developed in an effort to further provide an OLED display and a method of

manufacturing the same having the advantage of minimizing an entire thickness thereof.

[0014] The present invention has also been developed in an effort to provide an OLED display and a method of manufacturing the same having the advantage of improved productivity.

[0015] An embodiment of the present invention provides an OLED display according to claim 1.

[0016] The adhesive layer may include an acryl-based resin and cover the integrated circuit chip.

[0017] The cover window may be transparent.

[0018] The cover window may include a light transmitting portion corresponding to a central portion of the display area and a light blocking portion corresponding to an edge of the display area and the mounting area.

[0019] The predetermined distance may be greater than $200\mu\text{m}$.

[0020] Another embodiment of the present invention provides a method of manufacturing an OLED display according to claim 6.

[0021] The adhesive material may include an acryl-based resin, and the adhesive layer may be formed by curing the adhesive material through radiating ultraviolet rays (UV) or applying heat to the adhesive material.

[0022] The method may further include allowing a part of an adhesive material which is provided on the cover window to flow and to contact a part of the display panel assembly, and then coupling the cover window and the display panel assembly.

[0023] The predetermined distance may be greater than $200\mu\text{m}$.

[0024] According to the present invention, the OLED display can have a display panel assembly having improved stability and reliability.

[0025] Furthermore, the OLED display can have a cover window and a display panel assembly which are stably coupled to each other, and an integrated circuit chip which is stably covered by the cover window.

[0026] Furthermore, the entire thickness of the OLED display can be minimized. In addition, productivity of the OLED display can be improved. Moreover, the OLED display can be effectively manufactured.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] A more complete appreciation of the present invention, and many of the attendant advantages thereof, will be readily apparent as the present invention becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or similar components, wherein:

FIG. 1 is an exploded perspective view of an organic light emitting diode (OLED) display according to an embodiment of the present invention.

FIG. 2 is a top plan view illustrating a coupled state of the OLED display of FIG. 1.

FIG. 3 is a cross-sectional view of the OLED taken along line III-III of FIG. 2.

FIG. 4 is a cross-sectional view of the OLED taken along line IV-IV of FIG. 2.

FIG. 5 is a diagram of a pixel circuit of a display panel assembly shown in FIG. 1.

FIG. 6 is a partially-enlarged view of the display panel assembly shown in FIG. 1.

FIGS. 7 thru 9 are cross-sectional views sequentially illustrating a method of manufacturing the OLED display of FIG. 1.

DETAILED DESCRIPTION OF THE INVENTION

[0028] The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. The present invention is not limited to the embodiments, but may be embodied in various forms.

[0029] Furthermore, because the size and thickness of each element displayed in the drawings are randomly displayed for better understanding and ease of description, the present invention is not limited thereto.

[0030] Accordingly, the drawings and description are to be regarded as illustrative in nature and not restrictive. Like reference numerals designate like elements throughout the specification.

[0031] In addition, in the drawings, the thickness of layers, films, panels, regions, etc., are exaggerated for clarity. It will be understood that, when an element such as a layer, film, region or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0032] FIG. 1 is an exploded perspective view of an organic light emitting diode (OLED) display according to an embodiment of the present invention, FIG. 2 is a top plan view illustrating a coupled state of the OLED display of FIG. 1, FIG. 3 is a cross-sectional view of the OLED taken along line III-III of FIG. 2, and FIG. 4 is a cross-sectional view of the OLED taken along line IV-IV of FIG. 2.

[0033] As shown in FIGS. 1 and 2, the OLED display 100 includes a display panel assembly 50, a cover window 10, and an adhesive layer 20. The OLED display 100 further includes a support member 70, a PCB 30, and an FPCB 35.

[0034] The display panel assembly 50 includes a first substrate 51, a second substrate 52, and an integrated circuit chip 40. The first substrate 51 has a display area DA and a mounting area NA. The second substrate 52 has a size smaller than that of the first substrate 51, and is attached to the display area DA of the first substrate 51. The first substrate 51 and the second substrate 52 are coupled by a sealant (not shown) disposed along an edge of the second substrate 52. The integrated circuit chip 40 is mounted in the mounting area NA of the first substrate 51. In this case, the integrated circuit chip 40 is mounted on a surface having a direction equal to that of an attaching surface of the second substrate 52 in the first substrate 51. The second substrate 52 and the integrated circuit chip 40 are adjacently disposed.

[0035] The first substrate 51 includes pixels (shown in FIGS. 5 and 6) disposed in a matrix form in the display area DA. The first substrate 51 further includes a scan driver (not shown) and a data driver (not shown) disposed in the display area DA or the mounting area NA to drive pixels. The first substrate 51 further includes pad electrodes (not shown) disposed in the mounting area NA. The integrated circuit chip 40 is mounted in the mounting area NA of the first electrode 51 so as to be electrically connected to the pad electrode (not shown). The first substrate 51 further includes a wire (not shown) for connecting the integrated circuit chip 40, the scan driver (not shown), and the data driver (not shown).

[0036] The second substrate 52 is bonded to the first substrate 51 so as to seal up and protect pixels, circuits, and wires formed in the first substrate 51 from the outside. The display panel assembly 50 further includes a polarizing plate 58 (shown in FIG. 3) attached to one surface of the second substrate 52 for suppressing reflection of external light. However, the polarizing plate 58 is not always necessary and may be omitted.

[0037] The integrated circuit chip 40 is mounted in the mounting area NA (FIG. 1) of the first substrate 51 using a chip on glass (COG) method.

[0038] The support member 70 receives and supports the display panel assembly 50. The support member 70 includes a bottom portion 71 and a side wall 72. The bottom portion 71 is formed in parallel with the first substrate 51 of the display panel assembly 50. That is, the display panel assembly 50 is received in the support member 70 so that the first substrate 51 may be seated in the bottom portion 71. The side wall 72 is extended and protrudes from the bottom portion 71 so as to surround side surfaces of the first substrate 51 and the second substrate 52. In this case, the side wall 72 is formed apart by a predetermined separation distance GB from edges of the first substrate 51 and the second substrate 52. It is preferable that the predetermined separation distance GB be greater than 200 μ m, and a reason thereof is described later.

[0039] The support member 70 has an opening 725 formed in a part of the side wall 72 adjacent to the mounting area NA of the first substrate 51 so that the FPCB 35 may be connected to the mounting area NA of the first substrate 51.

[0040] The support member 70 may be formed using various methods and with several materials. As an example, the support member 70 may be made of a material having high rigidity, i.e., a metal material such as stainless steel, cold rolling steel, aluminum, aluminum alloy, nickel alloy, magnesium, and magnesium alloy. The support member 70 having the bottom portion 71 and the side wall 72 may be formed by molding a metal plate made of such a metal material by a well-known deep drawing process or bending process. When molded by a deep drawing process, corners of the side wall 72 can be connected without a joint.

[0041] The PCB 30 includes electronic elements (not shown) for processing a driving signal and a connector 36 for receiving an external signal. One side of the FPCB 35 is connected to the mounting area NA of the first substrate 51 and the other side thereof is connected to the PCB 30. That is, the FPCB 35 electrically connects the PCB 30 and the display panel assembly 50. Therefore, a driving signal generated in the PCB 30 is transferred to an integrated circuit chip 40 or a driver (not shown) of the first substrate 51 through the FPCB 35.

[0042] As shown in FIG. 3, the FPCB 35 is bent and the printed circuit board PCB 30 is disposed on a rear surface of the support member 70.

[0043] The cover window 10 (FIG. 1) is disposed opposite the second substrate 52 and the integrated circuit chip 40, and entirely covers the display panel assembly 50. Specifically, the cover window 10 covers one surface of the display panel assembly 50 in an image display direction. The cover window 10 may be made of a transparent material, such as glass or plastic.

[0044] Furthermore, as shown in FIG. 3, the cover window 10 includes a light blocking portion BA corresponding to an edge of the display panel assembly 50 including the mounting area NA of the first substrate 51, and a light transmitting portion TA corresponding to a central portion of the display panel assembly 50. That is, the light blocking portion BA corresponds to an edge of the display area DA and the mounting area NA, and the light transmitting portion TA corresponds to a central portion of the display area DA. The light blocking portion BA performs the functions of blocking unnecessary light and covering a portion which does not display an image in the display panel assembly 50.

[0045] However, the present invention is not limited thereto. Therefore, the cover window 10 may be entirely transparent and formed without the light blocking portion BA. In this case, the OLED display 100 may further include a separate light blocking member.

[0046] The adhesive layer 20 may be made of a material including an acryl-based resin which is cured by ultraviolet (UV) or heat. Furthermore, the adhesive layer 20 has relatively higher elasticity than that of the cover window 10 and the support member 70.

[0047] As shown in FIGS. 1, 3 and 4, the adhesive layer 20 fills up a space between the second substrate 52 and the cover window 10 and a space between the mounting area NA of the first substrate 51 and the cover window 10. Furthermore, the adhesive layer 20 fills up a space between the side wall 72 of the support member 70 and edges of the first substrate 51 and the second substrate 52.

[0048] In this way, the adhesive layer 20 couples the cover window 10 and the display panel assembly 50 by filling up a space between the display panel assembly 50 and the cover window 10, and couples the support member 70 and the display panel assembly 50, and the support member 70 and the cover window 10, by filling up a space between the edge of the display panel assembly 50 and the side wall 72 of the support member 70.

[0049] Furthermore, the adhesive layer 20 fully covers and protects the mounting area NA of the first substrate 51 including the integrated circuit chip 40. That is, the adhesive layer 20 suppresses corrosion of the mounting area NA while mechanically protecting the integrated circuit chip 40. Accordingly, the display panel assembly 50 may render unnecessary a separate protective layer for protecting a circuit, a wire, and a pad formed in the mounting area NA of the first substrate 51.

[0050] Because the adhesive layer 20 prevents unnecessary separation of the display panel assembly 50 from the support member 70 and the cover window 10, and has relatively excellent elasticity, the adhesive layer 20 protects the display panel assembly 50, thereby improving mechanical stability and reliability of the OLED display 100. That is, the adhesive layer 20 protects the display panel assembly 50 from external impact. Accordingly, the OLED display 100 may render unnecessary a separate reinforcement for protecting the display panel assembly 50.

[0051] Furthermore, the adhesive layer 20 suppresses penetration of moisture into the display panel assembly 50, thereby improving environmental stability and reliability.

[0052] As described above, the adhesive layer 20 should be able to have a minimum thickness for preventing separation of elements and protecting the display panel assembly 50 from an external impact. Therefore, it is preferable to secure a separation distance GB between the side wall 72 of the support member 70 and the edge of the display panel assembly 50 to be greater than 200 μ m in order to secure a minimum space in which the adhesive layer 20 is to be formed so that the adhesive layer 20 may have enough thickness.

[0053] Furthermore, it is preferable that a refractive index of the adhesive layer 20 be similar to that of the cover window 10. This is because the adhesive layer 20 fills up a space between the second substrate 52 and the cover window 10, and thus, when refractive indexes of the adhesive layer 20 and the cover window 10 become similar, reflection of light due to a difference in refractive indexes can be minimized. Because the refractive index of an acryl-based resin used as a material of the adhesive layer 20 is relatively more similar to that of the cover window 10 than air, and since the adhesive layer 10 fills up a space between the second substrate 52 and the cover window 10, reflection of light due to a difference between the refractive indexes can be effectively reduced.

[0054] In addition, as described above, because the OLED display 100 may render unnecessary a separate reinforcement for improving mechanical and environmental stability of a separate protective layer and the panel assembly 50 for protecting the integrated circuit chip 40, etc., productivity thereof can be improved.

[0055] By such a configuration, the OLED display 100 can have a display panel assembly 50 having improved stability and reliability.

[0056] That is, the display panel assembly 50, the cover window 10 and the support member 70 are stably coupled by the adhesive layer 20, and the mounting area NA of the first substrate 51 including the integrated circuit chip 40 is stably covered by the adhesive layer 20. Furthermore, an external impact applied to the display panel assembly 50 can be absorbed by the adhesive layer 20.

[0057] Because the cover window 10 is effectively fixed by the adhesive layer 20, an entire thickness of the OLED display 100 can be minimized.

[0058] Referring to FIGS. 5 and 6, an internal structure of the display panel assembly 50 will be described hereinafter.

[0059] The display panel assembly 50 has a plurality of pixels and displays an image. As shown in FIGS. 5 and 6, the pixel includes an organic light emitting diode L1 and driving circuits T1, T2, and C1. The pixel is generally formed in the first substrate 51. That is, the first substrate 51 includes a substrate member 511, and the driving circuits T1, T2 and C1 and the organic light emitting diode L1 which are formed on the substrate member 511.

[0060] The organic light emitting diode L1 includes an anode 544, an organic emission layer 545, and a cathode 546. The driving circuits include at least two thin film transistors T1 and T2 and at least one storage capacitor C1. The thin film transistor basically includes a switching transistor T1 and a driving transistor T2.

[0061] The switching transistor T1 is connected to a scan line SL1 and a data line DL1, and transmits a data voltage which is inputted to the data line DL1 to the driving transistor T2 according to a switching voltage which is inputted to the scan line SL1. The storage capacitor C1 is connected to the switching transistor T1 and a power source line VDD, and stores a voltage corresponding to a difference between a voltage received from the switching transistor T1 and a

voltage supplied to the power source line VDD.

[0062] The driving transistor T2 is connected to the power source line VDD and the storage capacitor C1 so as to supply an output current IOELD, which is proportional to a square of a difference between a voltage stored in the storage capacitor C1 and a threshold voltage, to the organic light emitting diode L1, and the organic light emitting diode L1 emits light by the output current IOELD. The driving transistor T2 includes a source electrode 533, a drain electrode 532, and a gate electrode 531, and the anode 544 of the organic light emitting diode L1 is connected to the drain electrode 532 of the driving transistor T2. The configuration of the pixel is not limited to the above-described example, and can be variously changed.

[0063] The second substrate 52 covers the first substrate 51 in which the organic light emitting diode L1 and the driving circuits T1, T2, and C1 are formed.

[0064] Referring to FIGS. 7 thru 9, a method of manufacturing the OLED display 100 of FIG. 1 is described hereinafter.

[0065] First, after the display panel assembly 50 is provided, the display panel assembly 50 is received in the support member 70 (see FIG. 1). A detailed structure of the display panel assembly 50 and the support member 70 has already been described.

[0066] Next, as shown in FIG. 7, after the cover window 10 is provided and a necessary quantity of the adhesive material 25 is determined, the adhesive material 25 is coated on one surface of the cover window 10. In FIG. 7, the cover window 10 includes the light blocking portion BA and the light transmitting portion TA, but the present invention is not limited thereto. Therefore, the cover window 10 may be entirely transparent.

[0067] Next, as shown in FIG. 8, the cover window 10 is coupled to the display panel assembly 50 so that one surface of the cover window 10, in which the adhesive material 25 is provided, may be opposite the second substrate 52 and the integrated circuit chip 40. In this case, the light blocking portion BA of the cover window 10 is disposed so as to correspond to each of the mounting area NA (shown in FIG. 1) of the first substrate 10 and an edge of the second substrate 52.

[0068] Furthermore, as shown in FIG. 8, the cover window 10 and the display panel assembly 50 are not directly coupled to each other, a part of the adhesive material 25 coated on the cover window 10 is flown and contacts the display panel assembly 50, and then the cover window 10 and the display panel assembly 50 are coupled to each other.

[0069] When the cover window 10 and the display panel assembly 50 are coupled using such a method, a bubble can be prevented from being generated in an interface of the adhesive material 25 and the display panel assembly 50.

[0070] Next, by pressurizing the cover window 10, the adhesive material 25 is diffused so as to fill up the space between the second substrate 52 and the cover window 10, the space between the mounting area NA of the first substrate 51 and the cover window 10, and the space between the side wall 72 of the support member 70 and an edge of the display panel assembly 50.

[0071] Next, as shown in FIG. 9, the adhesive layer 20 is completed by curing the adhesive material 25. In this case, the adhesive material 25 can completely be cured through two curing processes. The two curing processes include a preliminary curing process and a curing process. The preliminary curing process is performed using ultraviolet (UV), and the curing process is performed using UV or heat.

[0072] Furthermore, as shown in FIG. 9, UV rays are radiated onto the adhesive material 25 via the cover window 10, but the present invention is not limited thereto. Therefore, UV rays may be radiated in various directions in consideration of the structure of the support member 70 and the cover window 10. When UV rays are radiated in a sidewise direction of the display panel assembly 50, UV rays may be radiated with a moving method using an optical fiber.

[0073] The OLED display 100 having improved stability and reliability is manufactured using such a manufacturing method.

[0074] That is, the display panel assembly 50, the cover window 10 and the support member 70 are stably coupled by the adhesive layer 20, and the mounting area NA of the first substrate 51 including the integrated circuit chip 40 is stably covered by the adhesive layer 20. Furthermore, an external impact applied to the display panel assembly 50 can be absorbed by the adhesive layer 20.

[0075] In addition, because the cover window 10 is effectively fixed by the adhesive layer 20, an entire thickness of the OLED display 100 can be minimized.

[0076] Moreover, by shortening the manufacturing process, productivity can be improved.

[0077] Referring to Table 1 below, optical characteristics of an exemplary embodiment according to the present invention and a Comparative Example are described hereinafter. In the display area DA, the space between the cover window 10 and the display panel assembly 50 is filled with an adhesive layer which is entirely made of a polymer material, such as acryl-based resin, in the exemplary embodiment, and is filled with air in the Comparative Example.

Table 1

	Comparative Example	Experimental Example
luminance [cd/m ²]	180	206

(continued)

	Comparative Example	Experimental Example
contrast ratio of external light @ 10,000 lux	1.74	2.45
representation of external light color @ 10,000	5.3%	14.5%
transmittance of cover window [%]	91.8%	91.8%
reflection ratio of cover window and display panel assembly [%]	7.44%	4.35%

[0078] As shown in Table 1, the exemplary embodiment has excellent optical characteristics compared to those of the Comparative Example.

Claims

1. An organic light emitting diode (OLED) display, comprising:

a display panel assembly (50) comprising a first substrate (51) having a display area and a mounting area, a second substrate (52) coupled to the display area of the first substrate, and an integrated circuit chip (40) mounted in the mounting area of the first substrate;

a support member (70) which receives and supports the display panel assembly (50), wherein the support member (70) comprises a bottom portion (71) formed in parallel with the first substrate (51), and a side wall (72) which extends from the bottom portion (71) and which surrounds side surfaces of the first substrate (51) and the second substrate (52); and

a cover window (10) disposed opposite the second substrate (52) and the integrated circuit chip (40), and covering the display panel assembly (50); **characterised in that:**

the side wall (72) is formed apart by a predetermined distance from edges of the first substrate (51) and the second substrate (52); and

the display further comprises an adhesive layer (20) which fills a space between the second substrate (52) and the cover window (10), and a space between the mounting area of the first substrate (51) and the cover window (10) wherein the adhesive layer (20) fills up a space between the side wall (72) and edges of the first substrate (51) and the second substrate (52).

2. An OLED display according to claim 1, wherein the adhesive layer (20) comprises an acryl-based resin and covers the integrated circuit chip.

3. An OLED display according to claim 1 or 2, wherein the cover window (10) is transparent.

4. An OLED display according to any preceding claim, wherein the cover window (10) comprises a light transmitting portion corresponding to a central portion of the display area and a light blocking portion corresponding to an edge of the display area and the mounting area.

5. An OLED display according to any preceding claim, wherein the predetermined distance is greater than 200 μm .

6. A method of manufacturing an organic light emitting diode (OLED) display, comprising the steps of:

providing a display panel assembly (50) which includes a first substrate (51) having a display area and a mounting area, a second substrate (52) coupled to the display area of the first substrate, and an integrated circuit chip (40) mounted in the mounting area of the first substrate (51);

receiving the display panel assembly (50) in a support member (70) which comprises a bottom portion (71) formed in parallel with the first substrate (51), and a side wall (72) which extends from the bottom portion (71) and which surrounds side surfaces of the first substrate (51) and the second substrate (52);

disposing the side wall (72) apart by a predetermined distance from edges of the first substrate (51) and the second substrate (52);

providing a cover window (10);

providing an adhesive material (25) on one surface of the cover window (10);

coupling the cover window (10) to the display panel assembly (50) so that said one surface of the cover window

(10) on which the adhesive material (20) is provided is opposite the second substrate (52) and the integrated circuit chip (40);

further **characterized by** diffusing the adhesive material (25) so as to fill up a space between the second substrate (52) and the cover window (10) and a space between the mounting area of the first substrate (51) and the cover window (10), including a space between the side wall (72) and the edges of the first substrate (51) and the second substrate (52); and forming an adhesive layer (20) by curing the adhesive material.

7. A method according to claim 6, wherein the adhesive material (25) includes an acryl-based resin, and the adhesion layer (20) is formed by curing the adhesive material (25) through one of radiating ultraviolet (UV) rays and applying heat to the adhesive material (25).

8. A method according to claim 6 or 7, further comprising the steps of allowing a part of the adhesive material (25) provided on the cover window (10) to flow and to contact a part of the display panel assembly (50), and then coupling the cover window (10) and the display panel assembly (50). 1400099-1-SMOUNTEN

9. A method according to claim 6, 7 or 8, wherein the predetermined distance is greater than 200 μm .

Patentansprüche

1. Organische lichtemittierende Diodenanzeige (OLED-Anzeige), umfassend:

eine Anzeigefeldbaugruppe (50), umfassend ein erstes Substrat (51) mit einem Anzeigebereich und einem Montagebereich, ein an den Anzeigebereich des ersten Substrats gekoppeltes zweites Substrat (52) und einen in dem Montagebereich des ersten Substrats montierten integrierten Schaltkreis-Chip (40);

ein Tragelement (70), das die Anzeigefeldbaugruppe (50) aufnimmt und trägt, wobei das Tragelement (70) umfasst: einen Bodenabschnitt (71), der parallel zu dem ersten Substrat (51) ausgebildet ist, und eine Seitenwand (72), welche sich von dem Bodenabschnitt (71) aus erstreckt und welche Seitenflächen des ersten Substrats (51) und des zweiten Substrats (52) umgibt; und

ein Abdeckfenster (10), das gegenüber dem zweiten Substrat (52) und dem integrierten Schaltkreis-Chip (40) angeordnet ist und die Anzeigefeldbaugruppe (50) abdeckt; **dadurch gekennzeichnet, dass:**

die Seitenwand (72) in einem vorgegebenen Abstand von Rändern des ersten Substrats (51) und des zweiten Substrats (52) ausgebildet ist; und

die Anzeige ferner eine Haftschrift (20) umfasst, die einen Raum zwischen dem zweiten Substrat (52) und dem Abdeckfenster (10) und einen Raum zwischen dem Montagebereich des ersten Substrats (51) und dem Abdeckfenster (10) ausfüllt, wobei die Haftschrift (20) einen Raum zwischen der Seitenwand (72) und Rändern des ersten Substrats (51) und des zweiten Substrats (52) ausfüllt.

2. OLED-Anzeige nach Anspruch 1, wobei die Haftschrift (20) ein Harz auf Acrylbasis umfasst und den integrierten Schaltkreis-Chip abdeckt.

3. OLED-Anzeige nach Anspruch 1 oder 2, wobei das Abdeckfenster (10) transparent ist.

4. OLED-Anzeige nach einem der vorangehenden Ansprüche, wobei das Abdeckfenster (10) umfasst: einen lichtdurchlässigen Abschnitt, der einem Mittelabschnitt des Anzeigebereichs entspricht, und einen lichtsperrenden Abschnitt, der einem Rand des Anzeigebereichs und des Montagebereichs entspricht.

5. OLED-Anzeige nach einem der vorangehenden Ansprüche, wobei der vorgegebene Abstand größer als 200 μm ist.

6. Verfahren zur Herstellung einer organischen lichtemittierenden Diodenanzeige (OLED-Anzeige), umfassend die folgenden Schritte:

Bereitstellen einer Anzeigefeldbaugruppe (50), die einschließt: ein erstes Substrat (51) mit einem Anzeigebereich und einem Montagebereich, ein an den Anzeigebereich des ersten Substrats gekoppeltes zweites Substrat (52) und einen in dem Montagebereich des ersten Substrats (51) montierten integrierten Schaltkreis-Chip (40); Aufnehmen der Anzeigefeldbaugruppe (50) in einem Tragelement (70), das umfasst: einen Bodenabschnitt

(71), der parallel zu dem ersten Substrat (51) ausgebildet ist, und eine Seitenwand (72), welche sich von dem Bodenabschnitt (71) aus erstreckt und welche Seitenflächen des ersten Substrats (51) und des zweiten Substrats (52) umgibt;

Anordnen der Seitenwand (72) in einem vorgegebenen Abstand von Rändern des ersten Substrats (51) und des zweiten Substrats (52);

Bereitstellen eines Abdeckfensters (10);

Bereitstellen eines haftenden Materials (25) auf einer Oberfläche des Abdeckfensters (10);

Koppeln des Abdeckfensters (10) an die Anzeigefeldbaugruppe (50), so dass die besagte eine Oberfläche des Abdeckfensters (10), auf der das haftende Material (20) bereitgestellt wird, dem zweiten Substrat (52) und dem integrierten Schaltkreis-Chip (40) gegenüberliegt;

ferner **gekennzeichnet durch**

Diffundieren des haftenden Materials (25), um einen Raum zwischen dem zweiten Substrat (52) und dem Abdeckfenster (10) und einen Raum zwischen dem Montagebereich des ersten Substrats (51) und dem Abdeckfenster (10), einschließlich eines Raums zwischen der Seitenwand (72) und den Rändern des ersten Substrats (51) und des zweiten Substrats (52), auszufüllen; und

Ausbilden einer Haftschrift (20) **durch** Aushärten des haftenden Materials.

7. Verfahren nach Anspruch 6, wobei das haftende Material (25) ein Harz auf Acrylbasis einschließt und die Haftschrift (20) durch Aushärten des haftenden Materials (25) mittels Abstrahlen von Ultraviolettstrahlen (UV-Strahlen) oder Wärmebehandlung des haftenden Materials (25) ausgebildet wird.

8. Verfahren nach Anspruch 6 oder 7, ferner umfassend die folgenden Schritte:

Zulassen, dass ein Teil des auf dem Abdeckfenster (10) bereitgestellten haftenden Materials (25) fließt und mit einem Teil der Anzeigefeldbaugruppe (50) in Kontakt tritt, und anschließendes Koppeln des Abdeckfensters (10) und der Anzeigefeldbaugruppe (50).

9. Verfahren nach Anspruch 6, 7 oder 8, wobei der vorgegebene Abstand größer als 200 µm ist.

Revendications

1. Afficheur à diode électroluminescente organique (OLED), comprenant :

un ensemble formant panneau d'affichage (50) comprenant un premier substrat (51) ayant une zone d'affichage et une zone de montage, un deuxième substrat (52) couplé à la zone d'affichage du premier substrat, et une puce de circuit intégré (40) montée dans la zone de montage du premier substrat ;

un élément de support (70) qui reçoit et supporte l'ensemble formant panneau d'affichage (50), l'élément de support (70) comprenant une partie inférieure (71) formée parallèlement au premier substrat (51), et une paroi latérale (72) qui s'étend depuis la partie inférieure (71) et qui entoure des surfaces latérales du premier substrat (51) et du deuxième substrat (52) ; et

une fenêtre de protection (10) disposée en position opposée au deuxième substrat (52) et à la puce de circuit intégré (40), et recouvrant l'ensemble formant panneau d'affichage (50) ;

caractérisé en ce que :

la paroi latérale (72) est formée de manière espacée d'une distance prédéterminée des bords du premier substrat (51) et du deuxième substrat (52) ; et

l'afficheur comprend en outre une couche adhésive (20) qui remplit un espace entre le deuxième substrat (52) et la fenêtre de protection (10), et un espace compris entre la zone de montage du premier substrat (51) et la fenêtre de protection (10), dans lequel la couche adhésive (20) remplit un espace compris entre la paroi latérale (72) et des bords du premier substrat (51) et du deuxième substrat (52).

2. Afficheur OLED selon la revendication 1, dans lequel la couche adhésive (20) comprend une résine acrylique et recouvre la puce de circuit intégré.

3. Afficheur OLED selon la revendication 1 ou 2, dans lequel la fenêtre de protection (10) est transparente.

4. Afficheur OLED selon l'une quelconque des revendications précédentes, dans lequel la fenêtre de protection (10)

comprend une partie transmettant la lumière correspondant à une partie centrale de la zone d'affichage et une partie opaque à la lumière correspondant à un bord de la zone d'affichage et de la zone de montage.

5. Afficheur OLED selon l'une quelconque des revendications précédentes, dans lequel la distance prédéterminée est supérieure à 200 μm .

6. Procédé de fabrication d'un afficheur à diode électroluminescente organique (OLED), comprenant les étapes consistant à :

fournir un ensemble formant panneau d'affichage (50) qui comprend un premier substrat (51) ayant une zone d'affichage et une zone de montage, un deuxième substrat (52) couplé à la zone d'affichage du premier substrat, et une puce de circuit intégré (40) montée dans la zone de montage du premier substrat (51) ;
recevoir l'ensemble formant panneau d'affichage (50) dans un élément de support (70) qui comprend une partie inférieure (71) formée parallèlement au premier substrat (51) et une paroi latérale (72) qui s'étend depuis la partie inférieure (71) et qui entoure des surfaces latérales du premier substrat (51) et du deuxième substrat (52) ;
disposer la paroi latérale (72) de manière espacée d'une distance prédéterminée des bords du premier substrat (51) et du deuxième substrat (52) ;
fournir une fenêtre de protection (10) ;
fournir un matériau adhésif (25) sur une surface de la fenêtre de protection (10) ;
coupler la fenêtre de protection (10) à l'ensemble formant panneau d'affichage (50) de façon que ladite surface de la fenêtre de protection (10) sur laquelle le matériau adhésif (20) est fourni soit en position opposée au deuxième substrat (52) et à la puce de circuit intégré (40) ;

caractérisé en outre par :

la diffusion du matériau adhésif (25) de façon à remplir un espace compris entre le deuxième substrat (52) et la fenêtre de protection (10) et un espace compris entre la zone de montage du premier substrat (51) et la fenêtre de protection (10), comportant un espace compris entre la paroi latérale (72) et les bords du premier substrat (51) et du deuxième substrat (52) ; et
former une couche adhésive (20) en durcissant le matériau adhésif.

7. Procédé selon la revendication 6, dans lequel le matériau adhésif (25) comprend une résine acrylique, et la couche adhésive (20) est formée en durcissant le matériau adhésif (25) soit par projection de rayons ultraviolets (UV) soit par application de chaleur au matériau adhésif (25).

8. Procédé selon la revendication 6 ou 7, comprenant en outre les étapes consistant à permettre à une partie du matériau adhésif (25) fourni sur la fenêtre de protection (10) de s'écouler et de venir au contact d'une partie de l'ensemble formant panneau d'affichage (50), puis à coupler la fenêtre de protection (10) et l'ensemble formant panneau d'affichage (50).

9. Procédé selon la revendication 6, 7 ou 8, dans lequel la distance prédéterminée est supérieure à 200 μm .

FIG.1

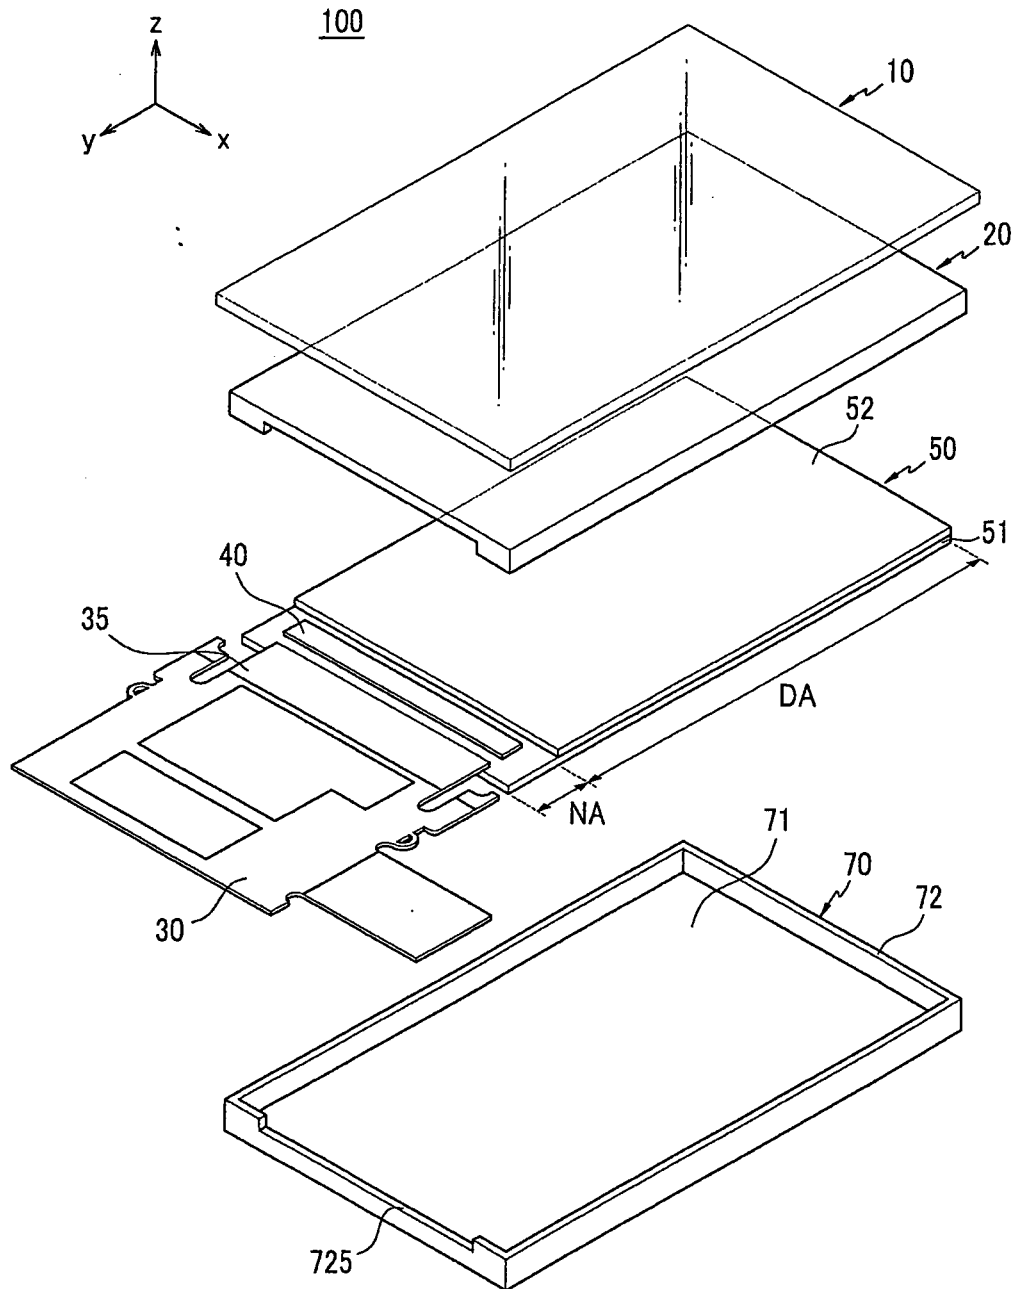


FIG.2

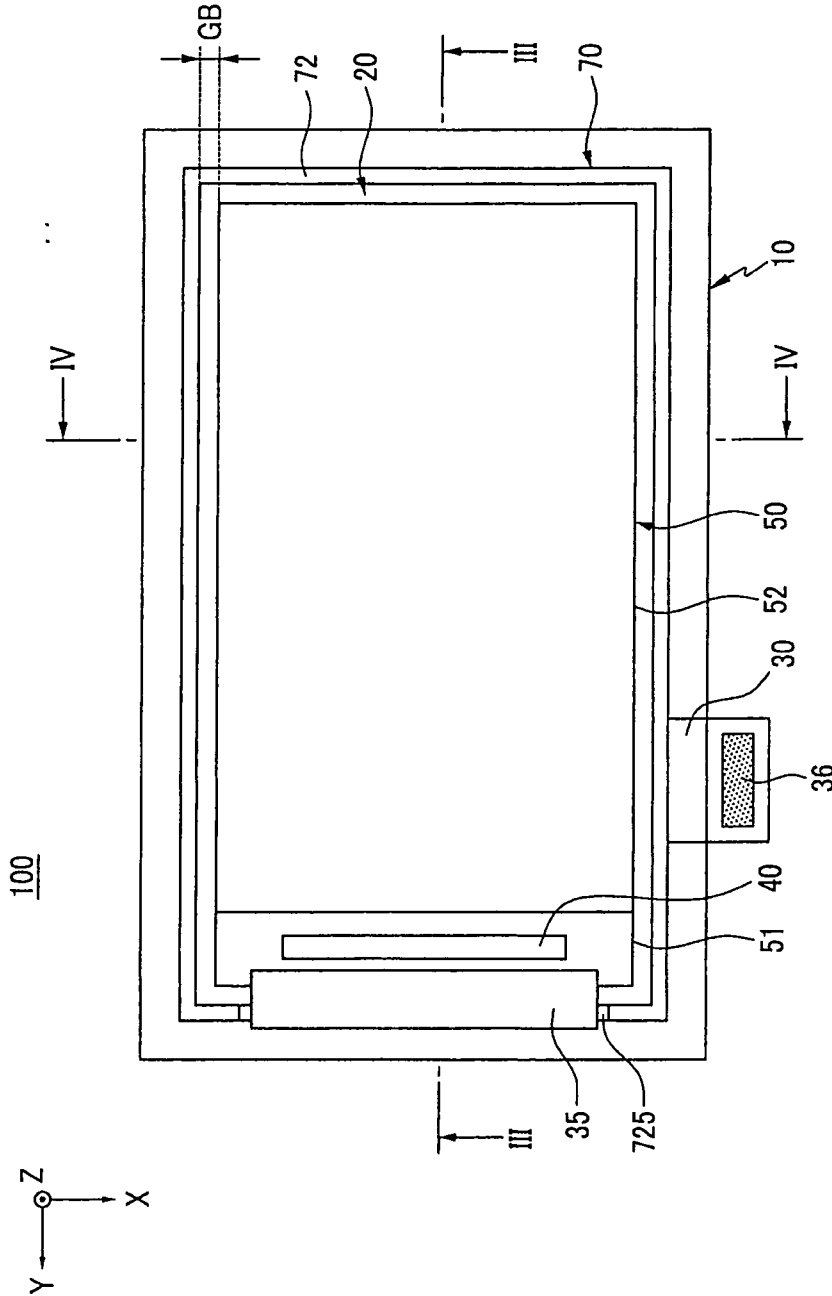


FIG. 3

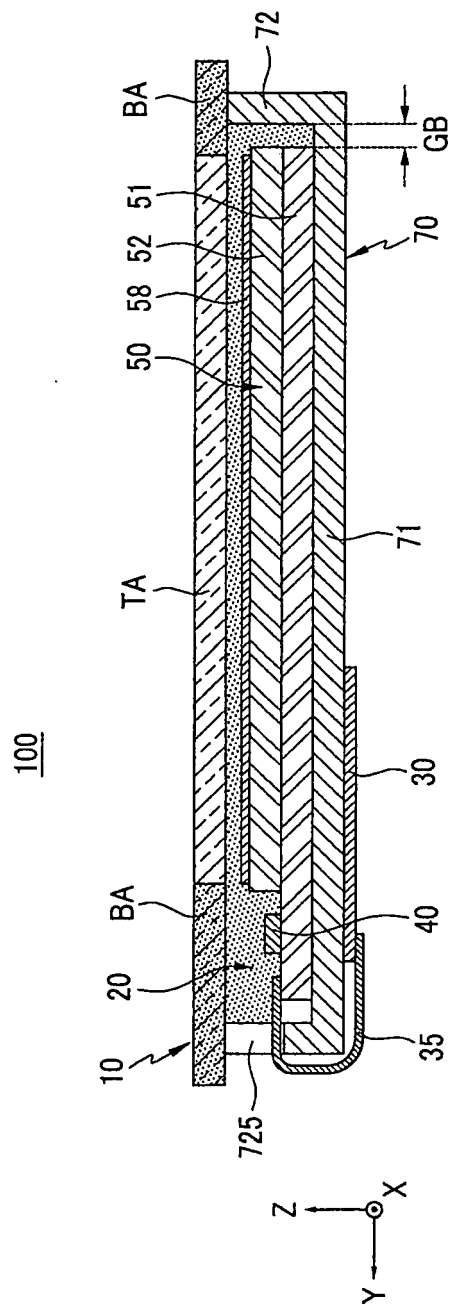


FIG.4

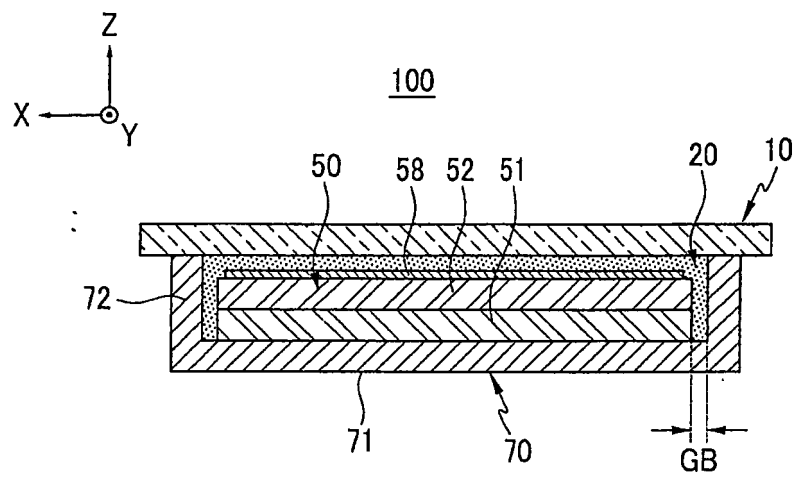


FIG.5

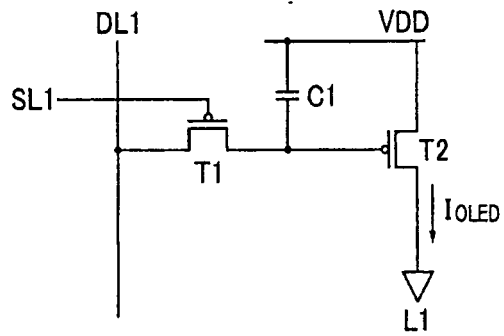


FIG.6

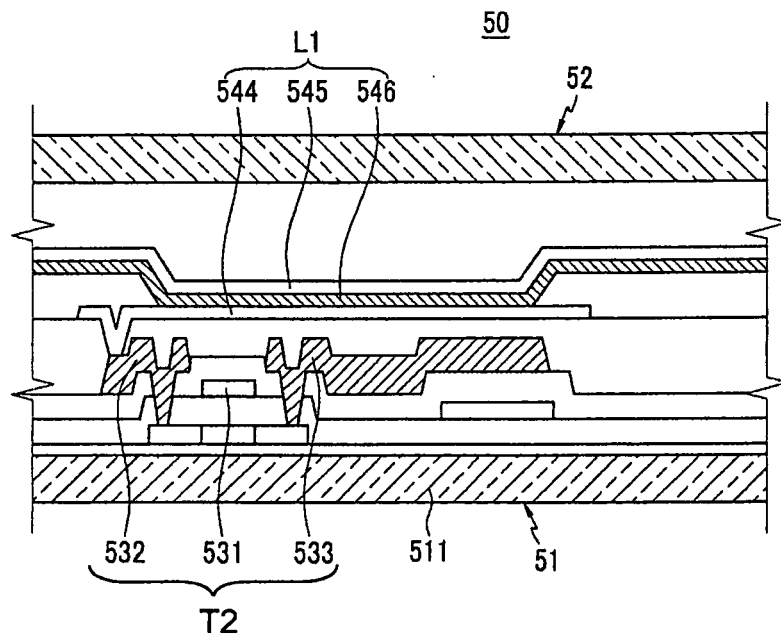


FIG.7

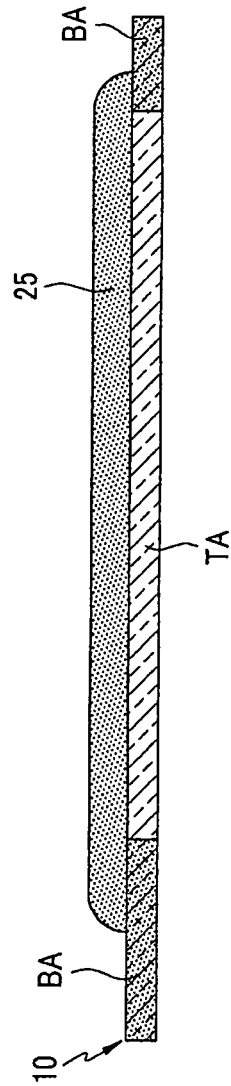


FIG. 8


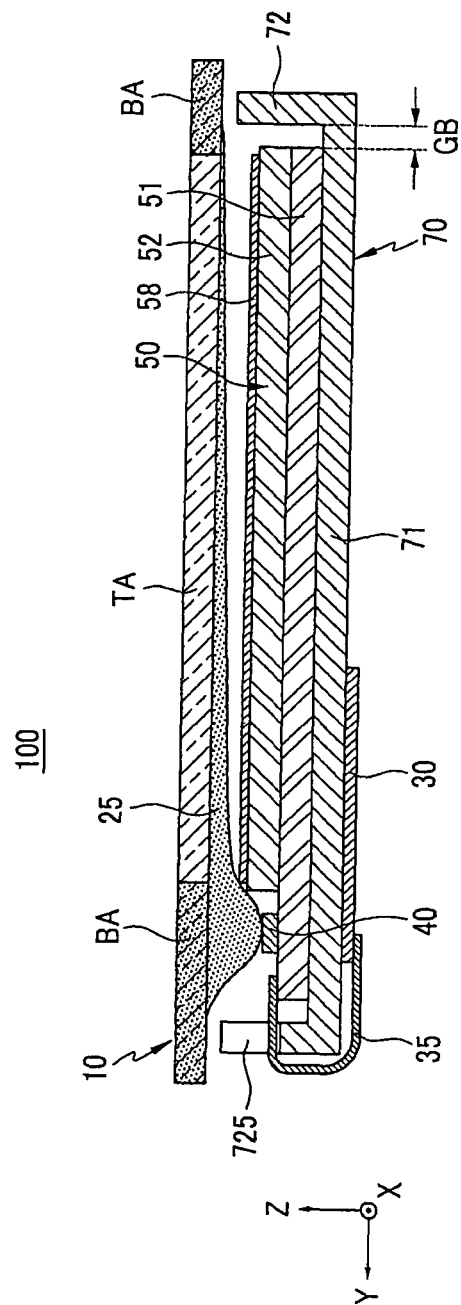


FIG. 9

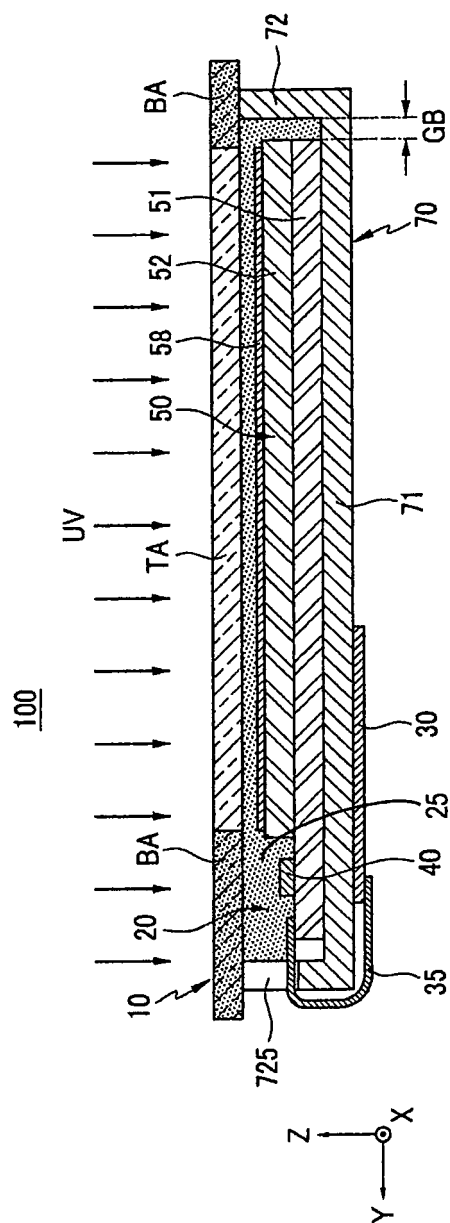

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20020015005 A [0007]
- JP 2008090053 A [0008]
- WO 2007066424 A [0009]

专利名称(译)	有机发光二极管显示器及其制造方法		
公开(公告)号	EP2139055B1	公开(公告)日	2017-01-04
申请号	EP2009251628	申请日	2009-06-23
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星移动显示器有限公司.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
发明人	LEE, DUK-JIN SAMSUNG MOBILE DISPLAY CO., LTD. KWAK, NOH MIN SAMSUNG MOBILE DISPLAY CO., LTD. JUNG, WOO-SUK SAMSUNG MOBILE DISPLAY CO., LTD. PARK, SANG-HUN SAMSUNG MOBILE DISPLAY CO., LTD. JUNG, KYU-HO SAMSUNG MOBILE DISPLAY CO., LTD.		
IPC分类号	H01L51/52		
CPC分类号	H01L51/524 H01L51/0097 H01L2224/80862 H01L2224/80874 H05B33/04		
优先权	1020080061125 2008-06-26 KR		
其他公开文献	EP2139055A3 EP2139055A2		
外部链接	Espacenet		

摘要(译)

有机发光二极管 (OLED) 显示器及其制造方法。OLED显示器包括：显示面板组件，包括具有显示区域和安装区域的第一基板 (51)，连接到第一基板的显示区域的第二基板 (52)，以及安装的集成电路芯片 (40) 在第一基板的安装区域中;盖窗 (10)，与第二基板和集成电路芯片相对设置并覆盖显示面板组件;粘合层 (20) 填充第二基板和覆盖窗之间的空间，以及第一基板的安装区域和覆盖窗之间的空间。



EP 2 139 055 B1

EP 2 139 055 B1

(11) EP 2 139 055 B1

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent: 04.01.2017. Bulletin 2017/01

(51) Int. Cl. H01L 51/52 (2006.01)

(21) Application number: 09251628.5

(22) Date of filing: 23.06.2009

(54) Organic light emitting diode display and method of manufacturing the same
Organische leuchtende Diodenanzeigegeräte und Herstellungsverfahren dafür
Affichage à diode électroluminescente organique et son procédé de fabrication

(84) Designated Contracting States: AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU LV MC MK MT NL NO PL PT RO SE SI SK TR

(30) Priority: 26.06.2008 KR 20080061125

(43) Date of publication of application: 30.12.2009. Bulletin 2009/53

(73) Proprietor: Samsung Display Co., Ltd. Gyeonggi-do (KR)

(72) Inventors: Lee, Duk-Jin Samsung Mobile Display Co., Ltd. Yongin-si, Gyeonggi-do (KR) Kwak, Noh Min Samsung Mobile Display Co., Ltd. Yongin-si, Gyeonggi-do (KR)

(74) Representative: Mouniey, Simon James Marks & Clerk LLP 90 Long Acre London WC2E 9RA (GB)

(56) References cited: WO-A1-2007/06424 JP-A-2005 199 597 JP-A-2008 050 053 US-A1-2002 015 005

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention)

Printed by: Jouve, 75001 PARIS (FR)