



(11) **EP 3 226 298 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
04.10.2017 Bulletin 2017/40

(51) Int Cl.:
H01L 27/32 ^(2006.01) **H01L 51/56** ^(2006.01)
H01L 51/50 ^(2006.01)

(21) Application number: **15794042.0**

(86) International application number:
PCT/CN2015/073570

(22) Date of filing: **03.03.2015**

(87) International publication number:
WO 2016/082364 (02.06.2016 Gazette 2016/22)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(72) Inventors:
• **BAI, Shanshan**
Beijing 100176 (CN)
• **Ji, Fengli**
Beijing 100176 (CN)
• **LIU, Jiantao**
Beijing 100176 (CN)
• **XU, Jingbo**
Beijing 100176 (CN)
• **LIANG, Yinan**
Beijing 100176 (CN)


(30) Priority: **28.11.2014 CN 201410714887**

(71) Applicants:
• **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)
• **Ordos Yuansheng Optoelectronics Co., Ltd.**
Ordos, Inner Mongolia 017020 (CN)

(74) Representative: **Klunker IP**
Patentanwälte PartG mbB
Destouchesstraße 68
80796 München (DE)

(54) **ORGANIC ELECTROLUMINESCENCE DISPLAY DEVICE, DRIVING METHOD THEREOF AND RELATED APPARATUS**

(57) An organic light emitting diode display device and a display apparatus, and a mask for fabricating a sub-pixel of the organic light emitting diode display device are provided. Each pixel unit group (11) includes a first sub-pixel unit group (111) and a second sub-pixel unit group (112) which are disposed adjacently along a first direction and include three sub-pixels of different colors, respectively; and the three sub-pixels in the first sub-pixel unit group (111) and the three sub-pixels in the second sub-pixel unit group (112) are staggered along a second direction, and a color of any sub-pixel on a base substrate 10 is different from a color of any other sub-pixel adjacent to the sub-pixel. The organic light emitting diode display device ensures that the sub-pixels of a same color are staggered regularly on the base substrate, which increases strength of the mask, and is conducive to fabrication of the sub-pixel of a small size, so that the resolution of the organic light emitting diode display device can be improved.

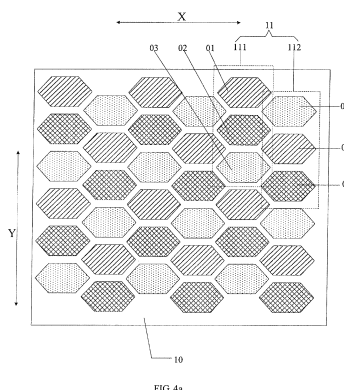

EP 3 226 298 A1

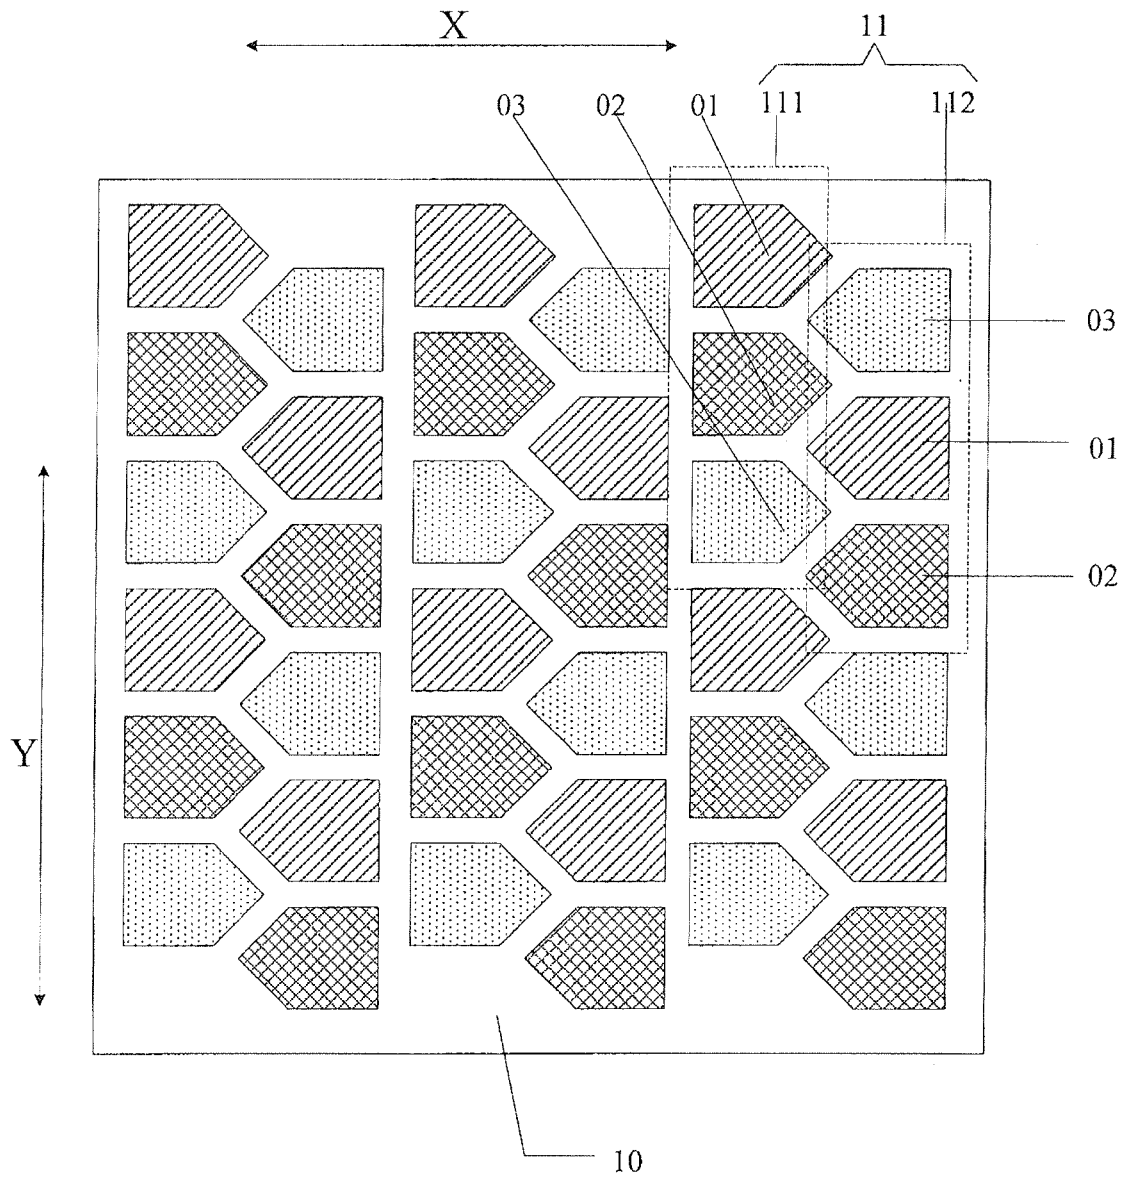


FIG. 4b

Description

TECHNICAL FIELD

[0001] Embodiments of the present disclosure relate to an organic light emitting diode display device, a driving method thereof and a related apparatus.

BACKGROUND

[0002] An Organic Light Emitting Diode (OLED) display device is one of hotspots in a research field of flat-panel displays; as compared with a liquid crystal display, the OLED display device has advantages of low power consumption, low production cost, self-luminous, a wide viewing angle and a fast response speed; and currently, in the field of flat-panel display such as a mobile phone, a Personal Digital Assistant (PDA) and a digital camera, the OLED display device has begun to replace a traditional liquid crystal display.

[0003] A structure of the OLED display device mainly comprises: a base substrate and pixels arranged in a matrix on the base substrate, wherein, for each of the pixels, an organic light emitting diode structure is generally formed in a corresponding pixel position on an array substrate with an organic material by using an evaporation filming technology through a fine mask. For color display, it is necessary to colorize the OLED display device. Therein, a color picture using a side-by-side mode has the better effect. The side-by-side mode refers to that within one pixel range, there are three sub-pixels, i.e., red, green and blue (R, G and B) sub-pixels, and each sub-pixel has an independent organic light emitting diode structure. Since organic light emitting materials of the three sub-pixels, i.e., red, green and blue sub-pixels are different, in a fabrication procedure, it is necessary to respectively evaporate three different types of organic light emitting materials for the three primary colors, i.e., red, green and blue sub-pixels in the corresponding positions by a mask, and then a color mixing ratio of a combination of the three colors is adjusted, so as to produce a true color.

[0004] A technical focus for fabricating an OLED display device of high Pixel Per Inch (PPI) lies in a fine mask with a good mechanical stability, and a key of the fine mask lies in an arrangement mode of pixels and sub-pixels.

SUMMARY

[0005] A first aspect of the present disclosure provides an organic light emitting diode display device, comprising a base substrate and a plurality of pixel unit groups arranged in a matrix on the base substrate, and each of the pixel unit groups including a first sub-pixel unit group and a second sub-pixel unit group which are disposed adjacently along a first direction, and each of the first sub-pixel unit group and the second sub-pixel unit group

comprising three sub-pixels of different colors, wherein, the first sub-pixel unit group includes a first sub-pixel, a second sub-pixel and a third sub-pixel sequentially arranged along a second direction, and the second sub-pixel unit group includes a third sub-pixel, a first sub-pixel and a second sub-pixel sequentially arranged along the second direction; the three sub-pixels in the first sub-pixel unit group and the three sub-pixels in the second sub-pixel unit group are staggered along the second direction, and a color of any sub-pixel on the base substrate is different from a color of any other sub-pixel adjacent to the sub-pixel; and each of the sub-pixels in the pixel unit group has a shape of polygon with the number of sides greater than or equal to four.

[0006] A second aspect of the present disclosure provides a display apparatus, comprising the above-described organic light emitting diode display device provided by the embodiment of the present disclosure.

[0007] A third aspect of the present disclosure provides a mask for fabricating a sub-pixel of an organic light emitting diode display device, comprising a substrate, and a plurality of opening regions of a same size arranged in a plurality of columns sequentially along a preset direction on the substrate, wherein, the opening regions have a shape of parallel hexagon, and adjacent sides of the adjacent opening regions are parallel; a center of any opening region in an odd-numbered column is located on a midnormal of a connection line between centers of two opening regions in an even-numbered column adjacent to the opening region in the odd-numbered column, and a center of any opening region in an even-numbered column is located on a midnormal of a connection line between centers of two opening regions in an odd-numbered column adjacent to the opening region in the even-numbered column; and a width between two adjacent opening regions in a same column is greater than or equal to 2 times a maximum opening width of the opening region along the preset direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] In order to clearly illustrate the technical solution of the embodiments of the present disclosure, the drawings of the embodiments will be briefly described in the following; it is obvious that the described drawings are only related to some embodiments of the present disclosure and thus are not limitative of the present disclosure.

FIG. 1 is a structural schematic diagram of a pixel arrangement of an organic light emitting diode display device;

FIG. 2 is one mask used for fabricating the organic light emitting diode display device as shown in FIG. 1; FIG. 3 is another mask used for fabricating the organic light emitting diode display device as shown in FIG. 1;

FIG. 4a is a structural schematic diagram I of an organic light emitting diode display device provided by

an embodiment of the present disclosure;

FIG. 4b is a structural schematic diagram II of the organic light emitting diode display device provided by the embodiment of the present disclosure;

FIG. 5 is a structural schematic diagram I of one of pixel unit groups in an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 6 is a structural schematic diagram III of an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 7 is a structural schematic diagram IV of an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 8 is a specific structural schematic diagram II of one of pixel unit groups in an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 9 is a specific structural schematic diagram III of one of pixel unit groups in an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 10 is a specific structural schematic diagram IV of one of pixel unit groups in an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 11 is a specific structural schematic diagram V of one of pixel unit groups in an organic light emitting diode display device provided by an embodiment of the present disclosure;

FIG. 12 is a structural schematic diagram of a mask provided by an embodiment of the present disclosure;

FIG. 13 to FIG. 15 are respectively structural schematic diagrams of an array substrate prepared sequentially by using the mask as shown in FIG. 12.

DETAILED DESCRIPTION

[0009] In an OLED display device, an arrangement mode of a pixel array is generally a side-by-side mode, and as shown in FIG. 1, the OLED display device comprises a base substrate 1, and pixel units 2 arranged in a matrix on the base substrate 1, one pixel unit 2 including three sub-pixels, i.e., red (R), green (G) and blue (B) sub-pixels parallel to each other. In order to form the pixel arrangement structure, a corresponding mask is shown in FIG. 2, in which FIG. 2 schematically shows a mask for forming one sub-pixel (R sub-pixel) in the pixel arrangement structure shown in FIG. 1. Since patterns of the sub-pixels are same, a mask of a same structure may be used for forming the remaining (G and B) sub-pixels.

[0010] In FIG. 2, the mask includes a metal substrate 3 and a rectangular opening 4 thereon; and since a same column of sub-pixels in the display device share a same opening, a length of the opening 4 of the mask is larger. For a low-resolution display device, since the number of pixels is smaller, a width of a metal strip between adjacent

openings 4 in the mask is larger, so that fabrication and use management of the mask is easier. However, with increasing resolution of the display device, the width of the metal strip between adjacent openings in the mask becomes smaller, which results in that, during using the mask, the metal strip between the adjacent openings is susceptible to outside influence and easy to deformation, so as to cause cross-contamination of organic light emitting materials of different colors between the sub-pixels and then occurrence of color mixing, resulting in a low product yield.

[0011] For the above-described problem, a mask as shown in FIG. 3 is proposed to form the pixel arrangement structure shown in FIG. 1. As shown in FIG. 3, in the mask, a metal bridge 5 is added in a position between the sub-pixels shown in FIG. 1 corresponding to the opening in the mask shown in FIG. 2, to connect adjacent metal strips, and a long-strip opening 4 as shown in FIG. 2 is changed into a plurality of openings 6 corresponding to the sub-pixels shown in FIG. 1. Although the method can make a shape of a long metal strip in the mask more stable, yet during fabricating the sub-pixel, in order to avoid a shielding effect generated by the metal bridge for the sub-pixel during evaporation, a sufficient distance must be maintained between the sub-pixel and the metal bridge, so that a size of the sub-pixel is reduced, so as to influence an aperture ratio of the OLED display device.

[0012] In order to make objects, technical details and advantages of the embodiments of the present disclosure apparent, the technical solutions of the embodiment will be described in a clearly and fully understandable way in connection with the drawings related to the embodiments of the present disclosure. It is obvious that the described embodiments are just a part but not all of the embodiments of the present disclosure. Based on the described embodiments of the present disclosure, those ordinarily skilled in the art can obtain other embodiment(s), without any inventive work, which should be within the protective scope of the present disclosure.

[0013] Unless otherwise specified, the technical terms or scientific terms here should be of general meaning as understood by those ordinarily skilled in the art. In the specification and claims of the present disclosure of the patent application, words such as "first", "second" and the like do not denote any order, quantity, or importance, but rather are used for distinguishing different components. Similarly, words such as "one", "a/an" or "the" or the like do not denote quantitative limitation, but rather indicate there is at least one. Words such as "include" or "comprise" and the like denote that elements or objects appearing before the words of "include" or "comprise" cover the elements or the objects enumerated after the words of "include" or "comprise" or equivalents thereof, not exclusive of other elements or objects. Words such as "connected" or "connecting" and the like are not limited to physical or mechanical connections, but may include electrical connection, either direct or indirect. Words such as "up", "down", "left", "right" and the like are only used

for expressing relative positional relationship, when the absolute position is a described object is changed, the relative positional relationship may also be correspondingly changed.

[0014] Embodiments of the present disclosure provide an organic light emitting diode display device, a display apparatus comprising the organic light emitting diode display device, and a mask for fabricating a sub-pixel of an organic light emitting diode display device. The organic light emitting diode display device having a new pixel arrangement mode is provided, so that a mask is fabricated more easily and has a high mechanical stability, so as to improve resolution and production efficiency of the organic light emitting diode display device, and achieve an objective of reducing production cost.

[0015] An embodiment of the present disclosure provides an organic light emitting diode display device, as shown in FIG. 4a and FIG. 4b, comprising a base substrate 10 and a plurality of pixel unit groups 11 arranged in a matrix on the base substrate 10, and each pixel unit group 11 including a first sub-pixel unit group 111 and a second sub-pixel unit group 112 which are disposed adjacently along a first direction X and include three sub-pixels of different colors, respectively.

[0016] The first sub-pixel unit group 111 includes a first sub-pixel 01, a second sub-pixel 02 and a third sub-pixel 03 of different colors sequentially arranged along a second direction Y;

[0017] The second sub-pixel unit group 112 includes the third sub-pixel 03, the first sub-pixel 01 and the second sub-pixel 02 sequentially arranged along the second direction Y;

[0018] The three sub-pixels in the first sub-pixel unit group 111 and the three sub-pixels in the second sub-pixel unit group 112 are staggered along the second direction Y, and a color of any sub-pixel on the base substrate 10 is different from a color of any other sub-pixel adjacent to the sub-pixel;

[0019] And the sub-pixels in the pixel unit group 11 have a same shape, all present a shape of polygon with the number of sides greater than or equal to four.

[0020] In the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, each pixel unit group includes a first sub-pixel unit group and a second sub-pixel unit group which are arranged along a first direction and include three sub-pixels of different colors, respectively; the sub-pixels in the first sub-pixel unit group and the sub-pixels in the second sub-pixel unit group are staggered along a second direction, and a color of any sub-pixel on the base substrate is different from a color of any other sub-pixel adjacent to the sub-pixel; and thus, it is ensured that the sub-pixels of a same color are staggered regularly on the base substrate. Further, when a corresponding mask is fabricated, as shown in FIG. 12 (wherein FIG. 12 only shows a schematic diagram of an opening region in the mask corresponding to the sub-pixels of one color), a distance between adjacent opening regions 101 in the

mask corresponding to the sub-pixels of the same color is relatively large, which increases strength of the mask, and is conducive to fabrication of the sub-pixel of a small size, so that the resolution of the organic light emitting diode display device can be improved.

[0021] In the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, by using a mode that the first sub-pixel unit group and the second sub-pixel unit group in the same pixel unit group share a sub-pixel, for example, any two adjacent sub-pixels in the first sub-pixel unit group share a sub-pixel having a color different from that of the two sub-pixels in the second sub-pixel unit group, and any two adjacent sub-pixels in the second sub-pixel unit group share a sub-pixel having a color different from that of the two sub-pixels in the first sub-pixel unit group, so that a virtual display resolution of the screen can be improved. For example, when the original number of pixels is N, N being an integer greater than or equal to 2, after the above-described mode that the same pixel unit group shares the sub-pixel is used for the organic light emitting diode display device according to the present disclosure, the number of the pixels can be increased to $3N/2$.

[0022] For example, in the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, as shown in FIG. 6, in the first direction X, a distance x_1 between centers of two adjacent first sub-pixels 01, a distance x_2 between centers of two adjacent second sub-pixels 02 and a distance x_3 between centers of two adjacent third sub-pixels 03 are equal. Thereby, the sub-pixels on the array substrate are uniformly arranged, which not only can reduce difficulty in fabricating the organic light emitting diode display device, but also can reduce difficulty in fabricating the mask.

[0023] For example, in the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, the first sub-pixel, the second sub-pixel and the third sub-pixel may correspond to a red (R) sub-pixel, a green (G) sub-pixel and a blue (B) sub-pixel. That is, in the embodiments of the present disclosure, the first sub-pixel is one of the red (R) sub-pixel, the green (G) and the blue (B) sub-pixel, the second sub-pixel is one of the red (R) sub-pixel, the green (G) and the blue (B) sub-pixel, and the third sub-pixel is one of the red (R) sub-pixel, the green (G) and the blue (B) sub-pixel, and colors of the first sub-pixel, the second sub-pixel and the third sub-pixel are all different.

[0024] For example, in the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, the first direction is perpendicular to the second direction. All illustrations are provided in the embodiment of the present disclosure with a case where the first direction is perpendicular to the second direction as an example.

[0025] For example, the first direction is selected as

one of a row direction and a column direction of the organic light emitting diode display device, and the second direction is selected as the other direction.

[0026] For example, in the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, as shown in FIG. 5, in a same pixel unit group 11, distances between a center of any sub-pixel in the first sub-pixel unit group 111 and centers of two sub-pixels adjacent to the sub-pixel in the second sub-pixel unit group 112 have equal components y in the second direction Y , and distances between a center of any sub-pixel in the second sub-pixel unit group 112 and centers of two sub-pixels adjacent to the sub-pixel in the first sub-pixel unit group 111 have equal components y in the second direction Y .

[0027] For example, in order to reduce the difficulty in fabricating a mask, and increase a light emitting area of the sub-pixel, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, as shown in FIG. 4a, the sub-pixels all have a shape of parallel hexagon, and adjacent sides of adjacent sub-pixels are parallel; or, as shown in FIG. 4b, the sub-pixels all have a shape of pentagon, and adjacent sides of adjacent sub-pixels are parallel.

[0028] For example, in the above-described organic light emitting diode display device provided by the embodiments of the present disclosure, when the sub-pixels all have a shape of parallel hexagon, as shown in FIG. 4a, there are two parallel sides of the parallel hexagon extending along the first direction, and the remaining four sides have an equal length. Thus, adjacent sides between the opening regions of the mask corresponding to the adjacent sub-pixels coincide. Thereby, the light emitting area of the sub-pixel on the base substrate can be increased to a maximum extent, and by setting the sub-pixel to have a shape of parallel hexagon, a distance between the opening regions of the mask corresponding to the adjacent sub-pixels of a same color may be relatively large, which thus can further increase the strength of the mask, facilitate fabricating the sub-pixel of a small size, and can further improve the resolution of the organic light emitting diode display device.

[0029] For example, in the above-described organic light emitting diode display device provided by embodiments of the present disclosure, when the sub-pixels have a shape of pentagon, as shown in FIG. 4b, a better shape for the pentagon is to have two adjacent right angles, and two parallel sides constituting the two right angles are equal with each other. Thus, the two parallel sides in the pentagon extend along the first direction, so that adjacent sides between the opening regions of the mask corresponding to the adjacent sub-pixels can coincide. Thereby, the light emitting area of the sub-pixel on the base substrate can be increased to a maximum extent, and by setting the sub-pixel to have a shape of the above-described pentagon, a distance between the opening regions of the mask corresponding to the adjacent sub-pixel of a same color may be relatively large,

which thus can further increase the strength of the mask, facilitate fabricating the sub-pixel of a small size, and can further improve the resolution of the organic light emitting diode display device.

[0030] Further, in order to reduce the number of the masks fabricated, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, in a same pixel unit group, sizes and shapes of all of the sub-pixels are same. Thus, in the organic light emitting diode display device, arrangement positions of the sub-pixels of the same color present a same rule, and the sizes of the sub-pixels are also the same, that is, arrangement rules of the three types of sub-pixels of different colors are the same, and in this way, when the sub-pixels of different colors are being fabricated, a same mask can be used, so as to reduce the number of the masks fabricated.

[0031] For example, in order to prolong a service life of the organic light emitting diode display device, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, in a same pixel unit group, a size of the red sub-pixel is equal to a size of the green sub-pixel, and a size of the blue sub-pixel is greater than a size of the red sub-pixel. This is because a service life of a blue light emitting material used for fabricating the blue sub-pixel is generally shortest, the service life of the organic light emitting diode display device primarily depends on the service life of the blue sub-pixel; under a condition that a same display luminance is achieved, when the size of the blue sub-pixel is increased, luminance of the blue sub-pixel can be reduced; and by reducing current density flowing through the blue sub-pixel, the service life of the blue sub-pixel can be extended, so as to further extend the service life of the organic light emitting diode display device.

[0032] For example, in order that the sub-pixels in the organic light emitting diode display device emit light, a pixel circuit for driving them to emit light is also needed; the pixel circuit is generally located below a light emitting layer, and the pixel circuit is electrically connected with an anode of the corresponding sub-pixel through a contact hole in a planarization layer located above the pixel circuit.

[0033] Thus, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, as shown in FIG. 7, each pixel unit group 11 further includes the contact hole and the pixel circuit corresponding to the sub-pixels in a one-to-one correspondence relationship, each of the sub-pixels being electrically connected with the corresponding pixel circuit through the corresponding contact hole; wherein, **[0034]** A first contact hole V1 corresponding to the first sub-pixel 01 in the first sub-pixel unit group 111, a second contact hole V2 corresponding to the second sub-pixel 02 in the first sub-pixel unit group 111, and a third contact hole V3 corresponding to the third sub-pixel 03 in the second sub-pixel unit group 112 are aligned in the first

direction X;

[0035] A fourth contact hole V4 corresponding to the third sub-pixel 03 in the first sub-pixel unit group 111, a fifth contact hole V5 corresponding to the first sub-pixel 01 in the second sub-pixel unit group 112, and a sixth contact hole V6 corresponding to the second sub-pixel 02 in the second sub-pixel unit group 112 are aligned in the first direction X;

[0036] And the first contact hole V1 and the fourth contact hole V4 are aligned in the second direction Y, the second contact hole V2 and the fifth contact hole V5 are aligned in the second direction Y, and the third contact hole V3 and the sixth contact hole V6 are aligned in the second direction Y.

[0037] For example, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, two adjacent contact holes extending along the first direction have an equal distance; and two adjacent contact holes extending along the second direction have an equal distance. Thus, the contact holes on the base substrate are arranged in a matrix, so as to reduce difficulty in fabricating the contact hole, and to reduce difficulty in wiring in a back plate of the organic light emitting diode display device.

[0038] In order to further reduce the difficulty in fabrication, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, sizes of the contact holes are consistent.

[0039] Upon actual implementation, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, in each pixel unit group, as shown in FIG. 7 to FIG. 9,

[0040] The first contact hole V1 is located between the first sub-pixel 01 and the second sub-pixel 02 in the first sub-pixel unit group 111, and the second contact hole V2 and the third contact hole V3 are respectively located on both sides of the third sub-pixel 03 in the first direction X in the second sub-pixel unit group 112;

[0041] The fourth contact hole V4 and the fifth contact hole V5 are respectively located on both sides of the third sub-pixel 03 in the first direction X in the first sub-pixel unit group 111; and the sixth contact hole V6 is located between the first sub-pixel 01 and the second sub-pixel 02 in the second sub-pixel unit group 112.

[0042] In order to increase the light emitting area of the organic light emitting diode display device, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, as shown in FIG. 8, in each pixel unit group 11,

[0043] The first sub-pixel 01 and the second sub-pixel 02 have a shape of parallel hexagon, and the first sub-pixel 01 and the second sub-pixel 02 have their adjacent sides parallel; the third sub-pixel 03 in the first sub-pixel unit group 111 has a "boat" shape formed after the parallel hexagon misses a corner, wherein the corner missed in the parallel hexagon constituting the third sub-pixel 03 is adjacent to the second sub-pixel 02 in the first sub-

pixel unit group 111; and a shape of the third sub-pixel 03 in the second sub-pixel unit group 112 after rotating 180 degrees along the first direction X is same as the shape of the third sub-pixel 03 in the first sub-pixel unit group 111;

[0044] The third contact hole V3 is located on the corner side missed in the parallel hexagon constituting the third sub-pixel 03 in the second sub-pixel unit group 112; the second contact hole V2 is located between the first contact hole V1 and the third contact hole V3; the fourth contact hole V4 is located on the corner side missed in the parallel hexagon constituting the third sub-pixel 03 in the first sub-pixel unit group 111; and the fifth contact hole V5 is located between the fourth contact hole V4 and the sixth contact hole V6.

[0045] Alternatively, in order to increase the light emitting area of the organic light emitting diode display device, in the above-described organic light emitting diode display device provided by embodiments of the present disclosure, as shown in FIG. 9, in each pixel unit group,

[0046] The second sub-pixel 02 has a shape of parallel hexagon; the first sub-pixel 01 in the first sub-pixel unit group 111 has a "boat" shape formed after the parallel hexagon misses a corner, wherein the corner missed in the parallel hexagon constituting the first sub-pixel 01 approximates to the second sub-pixel 02 in the first sub-pixel unit group 111; a shape of the first sub-pixel 01 in the first sub-pixel unit group 111 after rotating 180 degrees along the second direction Y is same as the shape of the third sub-pixel 03 in the first sub-pixel unit group 111; a shape of the first sub-pixel 01 in the second sub-pixel unit group 112 after rotating 180 degrees along the first direction X is same as the shape of the first sub-pixel 01 in the first sub-pixel unit group 111; and a shape of the third sub-pixel 03 in the second sub-pixel unit group 112 after rotating 180 degrees along the first direction X is same as the shape of the third sub-pixel 03 in the first sub-pixel unit group 111;

[0047] The first contact hole V1 is located on the corner side missed in the parallel hexagon constituting the first sub-pixel 01 in the first sub-pixel unit group 111; the third contact hole V3 is located on the corner side missed in the parallel hexagon constituting the third sub-pixel 03 in the second sub-pixel unit group 112; the second contact hole V2 is located between the first contact hole V1 and the third contact hole V3; the sixth contact hole V6 is located on the corner side missed in the parallel hexagon constituting the first sub-pixel 01 in the second sub-pixel unit group 112; the fourth contact hole V4 is located on the corner side missed in the parallel hexagon constituting the third sub-pixel 03 in the first sub-pixel unit group 111; and the fifth contact hole V5 is located between the fourth contact hole V4 and the sixth contact hole V6.

[0048] When being specifically implemented, the above-described organic light emitting diode display device provided by the embodiment of the present disclosure may further be as shown in FIG. 10, and in each pixel unit group,

[0049] The first contact hole V1 is located between the first sub-pixel 01 and the second sub-pixel 02 in the first sub-pixel unit group 111, and the second contact hole V2 and the third contact hole V3 are respectively located on both sides of the third sub-pixel 03 in the first direction X in the second sub-pixel unit group 112; the fourth contact hole V4 is surrounded by the third sub-pixel 03 in the first sub-pixel unit group 111; and both the fifth contact hole V5 and the sixth contact hole V6 are located between the first sub-pixel 01 and the second sub-pixel 02 in the second sub-pixel unit group 112.

[0050] For example, upon actual implementation, in order to increase the light emitting area of the organic light emitting diode display device, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, as shown in FIG. 10, in each pixel unit group,

[0051] Both the first sub-pixel 01 and the second sub-pixel 02 have a shape of parallel hexagon; the third sub-pixel 03 in the first sub-pixel unit group 111 has a shape of hollow parallel hexagon, and the third sub-pixel 03 in the second sub-pixel unit group 112 have a shape of hourglass.

[0052] Alternatively, when being specifically implemented, the above-described organic light emitting diode display device provided by the embodiment of the present disclosure may further be as shown in FIG. 11, and in each pixel unit group,

[0053] Both the first contact hole V1 and the second contact hole V2 are located between the first sub-pixel 01 and the second sub-pixel 02 in the first sub-pixel unit group 111; the third contact hole V3 is surrounded by the third sub-pixel 03 in the second sub-pixel unit group 112; the fourth contact hole V4 and the fifth contact hole V5 are respectively located on both sides of the third sub-pixel 03 in the first direction X in the first sub-pixel unit group 111; and the sixth contact hole V6 is located between the first sub-pixel 01 and the second sub-pixel 02 in the second sub-pixel unit group 112.

[0054] For example, upon actual implementation, in order to increase the light emitting area of the organic light emitting diode display device, as shown in FIG. 11, in each pixel unit group,

[0055] Both the first sub-pixel 01 and the second sub-pixel 02 have a shape of parallel hexagon; the third sub-pixel 03 in the first sub-pixel unit group 111 has a shape of hourglass, and the third sub-pixel 03 in the second sub-pixel unit group 112 have a shape of hollow parallel hexagon.

[0056] For example, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, according to service life and display effect of the sub-pixels of different colors, the third sub-pixel is a green sub-pixel. Thereby, a size of the green sub-pixel is respectively less than sizes of the red sub-pixel and the blue sub-pixel.

[0057] For example, in the above-described organic light emitting diode display device provided by the em-

bodiment of the present disclosure, in order to reduce the number of times for fabricating the mask, the size of the blue sub-pixel is equal to the size of the red sub-pixel.

[0058] Alternatively, for example, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, in order to ensure the service life of the organic light emitting diode display device, the size of the blue sub-pixel is greater than the size of the red sub-pixel.

[0059] It should be noted that, in the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, it is illustrated with a case where the sub-pixel is a parallel hexagon as an example, and a circle or an ellipse formed by rounding the hexagon also belongs to the protection scope of the embodiment of the present disclosure, which will not be limited here.

[0060] An embodiment of the present disclosure further provides a driving method of any of the above-described organic light emitting diode display devices, comprising: in a same pixel unit group, a first sub-pixel unit group and a second sub-pixel unit group sharing at least one sub-pixel. For example, a first sub-pixel and a second sub-pixel in the first sub-pixel unit group share a third sub-pixel in the second sub-pixel unit group, or a second sub-pixel and a third sub-pixel in the first sub-pixel unit group share a first sub-pixel in the second sub-pixel unit group, or a first sub-pixel and a second sub-pixel in the second sub-pixel unit group share a third sub-pixel in the first sub-pixel unit group, or a first sub-pixel and a third sub-pixel in the second sub-pixel unit group share a second sub-pixel in the first sub-pixel unit group. Therefore, after the above-described mode that the same pixel unit group shares sub-pixels is used, for example, when the number of original pixels is N (N being an integer greater than or equal to 2), the number of the pixels can be increased to $3N/2$, so that the virtual display resolution of the screen can be improved.

[0061] The above-described driving method provided by the embodiment of the present disclosure, by using the mode that the same pixel unit group shares sub-pixels, can improve the virtual display resolution of the screen, and can increase the original number of the pixels by $3/2$ times.

[0062] An embodiment of the present disclosure further provides a display apparatus, comprising the above-described organic light emitting diode display device provided by the embodiment of the present disclosure, and the display apparatus may be: a mobile phone, a tablet computer, a television, a monitor, a notebook computer, a digital photo frame, a navigator, or any other product or component having a display function. For all the other essential composite parts of the display apparatus, those ordinarily skilled in the art should understand that there are the same, which will not be repeated here, and should not be a limitation to the present disclosure. The embodiment of the above-described organic light emitting diode display device may be referred to for implementation of

the display apparatus, and repeated parts will not be illustrated here.

[0063] An embodiment of the present disclosure further provides a mask for fabricating a sub-pixel of an organic light emitting diode display device, as shown in FIG. 12, comprising: a substrate 100, and a plurality of opening regions 101 of a same size arrange in a plurality of columns sequentially along a preset direction Z on the substrate 100, wherein, the opening regions 101 all have a shape of parallel hexagon, and adjacent sides of the adjacent opening regions 101 are parallel;

[0064] A center of any opening region 101 in an odd-numbered column is located on a midnormal of a connection line between centers of two opening regions 101 in even-numbered columns adjacent to the opening region 101 in the odd-numbered column, and a center of any opening region 101 in an even-numbered column is located on a midnormal of a connection line between centers of two opening regions 101 in odd-numbered columns adjacent to the opening region 101 in the even-numbered column;

[0065] And a width between two adjacent opening regions in a same column is greater than or equal to 2 times a maximum opening width of the opening region along the preset direction Z.

[0066] In the above-described mask provided by the embodiment of the present disclosure, the opening regions are in a shape of parallel hexagon, and a distance between the adjacent opening regions is relatively large, which thus can further increase the strength of the mask, facilitate fabricating the sub-pixel of a small size, and can further facilitate preparing the organic light emitting diode display device of a high resolution.

[0067] For example, in the above-described mask provided by the embodiment of the present disclosure, a width between the two adjacent opening regions along the preset direction is generally decided by an arrangement mode of the sub-pixels of the organic light emitting diode display device to be prepared; it is assumed that two sub-pixels of other colors are disposed between two adjacent sub-pixels of the same color in the organic light emitting diode display device, then, the width between the two adjacent opening regions along the preset direction in the mask should ensure a width sufficient to dispose two opening regions; in addition, for the organic light emitting diode display device, there is a distance of a certain width between the adjacent sub-pixels, and thus, the width between the two adjacent opening regions along the preset direction in the mask should ensure that at least two other sub-pixels can be disposed.

[0068] For example, when the above-described mask provided by the embodiment of the present disclosure is used for preparing the organic light emitting diode display device, when a sub-pixel array is formed, and when sub-pixels of other colors need to be formed after the sub-pixels of one color are formed, it is not necessary to fabricate a mask separately again for the sub-pixels of other colors, but it is only necessary to move the mask hori-

zontally to a certain position, in order to form the sub-pixels of other colors, so that the number of the masks prepared can be reduced. The specific schematic diagrams are shown in FIG. 13 to FIG. 15, and the hexagonal dashed boxes in the diagrams represent the opening region 101 of a corresponding mask, wherein, FIG. 13 is an array substrate 10 after the first sub-pixel 01 is formed by using the mask shown in FIG. 12; FIG. 14 is an array substrate 10 after the second sub-pixel 02 is formed on the basis of the array substrate 10 of FIG. 13, after the above-described mask is moved; and FIG. 15 is an array substrate 10 after the third sub-pixel 03 is formed on the basis of the array substrate 10 of FIG. 14, after the above-described mask is moved, that is, one of the above-described organic light emitting diode display devices according to the embodiments of the present disclosure.

[0069] In the above-described mask provided by embodiments of the present disclosure, a shielding effect will be caused by an edge of the opening region to the sub-pixel during evaporation, and thus, an area of the sub-pixel corresponding to the opening region of the mask is less than an area of the opening region.

[0070] For example, in the above-described mask provided by the embodiment of the present disclosure, a width between two adjacent opening regions in a same column is equal to 2 times the maximum opening width of the opening region along the preset direction. Thus, when the sub-pixel arrangement shown in FIG. 15 is formed on the array substrate 10 by using the above-described mask, as can be seen from the arrangement of the dashed box in FIG. 15, the above-described masks used when each type of sub-pixel is being formed overlap with one another, and adjacent sides of the opening regions 101 in the mask corresponding to the adjacent sub-pixels coincide, so as to ensure an aperture ratio of the array substrate.

[0071] The embodiments of the present disclosure provide the organic light emitting diode display device, the display apparatus, and the mask for fabricating the sub-pixel of the organic light emitting diode display device; each pixel unit group includes the first sub-pixel unit group and the second sub-pixel unit group which are disposed adjacently along the first direction and include three sub-pixels of different colors, respectively; the sub-pixels in the first sub-pixel unit group and the sub-pixels in the second sub-pixel unit group are staggered along the second direction, and the color of any sub-pixel on the base substrate is different from the color of other sub-pixel adjacent to the sub-pixel; and thus, it is ensured that the sub-pixels of a same color are staggered regularly on the base substrate. Further, when the corresponding mask is fabricated, the distance between adjacent opening regions in the mask corresponding to the sub-pixels of the same color is relatively large, which increases the strength of the mask, and is conducive to fabrication of the sub-pixel of a small size, so that the resolution of the organic light emitting diode display device can be improved.

[0072] The foregoing embodiments merely are exemplary embodiments of the present disclosure, and not intended to define the scope of the present disclosure, and the scope of the disclosure is determined by the appended claims.

[0073] This application claims priority of Chinese Patent Application No. 201410714887.0 filed on November 28, 2014, the disclosure of which is incorporated herein by reference in its entirety as part of the present application.

Claims

- 1. An organic light emitting diode display device, comprising a base substrate and a plurality of pixel unit groups arranged in a matrix on the base substrate, and each of the pixel unit groups including a first sub-pixel unit group and a second sub-pixel unit group which are disposed adjacently along a first direction, and each of the first sub-pixel unit group and the second sub-pixel unit group comprising three sub-pixels of different colors, wherein, the first sub-pixel unit group includes a first sub-pixel, a second sub-pixel and a third sub-pixel sequentially arrange along a second direction, and the second sub-pixel unit group includes a third sub-pixel, a first sub-pixel and a second sub-pixel sequentially arrange along the second direction; the three sub-pixels in the first sub-pixel unit group and the three sub-pixels in the second sub-pixel unit group are staggered along the second direction, and a color of any sub-pixel on the base substrate is different from a color of any other sub-pixel adjacent to the sub-pixel; and each of the sub-pixels in the pixel unit group has a shape of polygon with the number of sides greater than or equal to four.
- 2. The organic light emitting diode display device according to claim 1, wherein, in the first direction, a distance between centers of two adjacent first sub-pixels, a distance between centers of two adjacent second sub-pixels and a distance between centers of two adjacent third sub-pixels are equal.
- 3. The organic light emitting diode display device according to claim 2, wherein, the first sub-pixel, the second sub-pixel and the third sub-pixel are constituted by a red sub-pixel, a green sub-pixel and a blue sub-pixel.
- 4. The organic light emitting diode display device according to claim 3, wherein, in a same pixel unit group, distances between a center of any sub-pixel in the first sub-pixel unit group and centers of two sub-pixels adjacent to the sub-pixel in the second sub-pixel unit group have equal components in the

- second direction, and distances between a center of any sub-pixel in the second sub-pixel unit group and centers of two sub-pixels adjacent to the sub-pixel in the first sub-pixel unit group have equal components in the second direction.
- 5. The organic light emitting diode display device according to claim 4, wherein, each of the sub-pixels has a shape of parallel hexagon or pentagon, and adjacent sides of adjacent sub-pixels are parallel.
- 6. The organic light emitting diode display device according to claim 3, wherein, each of the pixel unit groups further includes a contact hole and a pixel circuit corresponding to the sub-pixels in a one-to-one correspondence relationship, each of the sub-pixels being electrically connected with the corresponding pixel circuit through the corresponding contact hole; wherein, a first contact hole corresponding to the first sub-pixel in the first sub-pixel unit group, a second contact hole corresponding to the second sub-pixel in the first sub-pixel unit group, and a third contact hole corresponding to the third sub-pixel in the second sub-pixel unit group are aligned in the first direction; a fourth contact hole corresponding to the third sub-pixel in the first sub-pixel unit group, a fifth contact hole corresponding to the first sub-pixel in the second sub-pixel unit group, and a sixth contact hole corresponding to the second sub-pixel in the second sub-pixel unit group are aligned in the first direction; and the first contact hole and the fourth contact hole are aligned in the second direction, the second contact hole and the fifth contact hole are aligned in the second direction, and the third contact hole and the sixth contact hole are aligned in the second direction.
- 7. The organic light emitting diode display device according to claim 6, wherein, two adjacent contact holes extending along the first direction have an equal distance, and two adjacent contact holes extending along the second direction have an equal distance.
- 8. The organic light emitting diode display device according to claim 7, wherein, in each of the pixel unit groups: the first contact hole is located between the first sub-pixel and the second sub-pixel in the first sub-pixel unit group, and the second contact hole and the third contact hole are respectively located on both sides of the third sub-pixel in the first direction in the second sub-pixel unit group; the fourth contact hole and the fifth contact hole are respectively located on both sides of the third sub-pixel in the first direction in the first sub-pixel unit group; and the sixth contact hole is located

between the first sub-pixel and the second sub-pixel in the second sub-pixel unit group.

- 9. The organic light emitting diode display device according to claim 8, wherein, in each of the pixel unit groups:

the first sub-pixel and the second sub-pixel have a shape of parallel hexagon, and adjacent sides of the first sub-pixel and the second sub-pixel are parallel; the third sub-pixel in the first sub-pixel unit group has a "boat" shape formed after the parallel hexagon misses a corner, wherein the corner missed in the parallel hexagon constituting the third sub-pixel approximates to the second sub-pixel in the first sub-pixel unit group; and a shape of the third sub-pixel in the second sub-pixel unit group after rotating 180 degrees along the first direction is same as the shape of the third sub-pixel in the first sub-pixel unit group;

the third contact hole is located on the corner side missed in the parallel hexagon constituting the third sub-pixel in the second sub-pixel unit group; the second contact hole is located between the first contact hole and the third contact hole; the fourth contact hole is located on the corner side missed in the parallel hexagon constituting the third sub-pixel in the first sub-pixel unit group; and the fifth contact hole is located between the fourth contact hole and the sixth contact hole.

- 10. The organic light emitting diode display device according to claim 8, wherein, in each of the pixel unit groups:

the second sub-pixel has a shape of parallel hexagon; the first sub-pixel in the first sub-pixel unit group has a "boat" shape formed after the parallel hexagon misses a corner, wherein the corner missed in the parallel hexagon constituting the first sub-pixel approximates to the second sub-pixel in the first sub-pixel unit group; a shape of the first sub-pixel in the first sub-pixel unit group after rotating 180 degrees along the second direction is same as the shape of the third sub-pixel in the first sub-pixel unit group; a shape of the first sub-pixel in the second sub-pixel unit group after rotating 180 degrees along the first direction is same as the shape of the first sub-pixel in the first sub-pixel unit group; and a shape of the third sub-pixel in the second sub-pixel unit group after rotating 180 degrees along the first direction is same as the shape of the third sub-pixel in the first sub-pixel unit group; the first contact hole is located on the corner side missed in the parallel hexagon constituting

the first sub-pixel in the first sub-pixel unit group; the third contact hole is located on the corner side missed in the parallel hexagon constituting the third sub-pixel in the second sub-pixel unit group; the second contact hole is located between the first contact hole and the third contact hole; the sixth contact hole is located on the corner side missed in the parallel hexagon constituting the first sub-pixel in the second sub-pixel unit group; the fourth contact hole is located on the corner side missed in the parallel hexagon constituting the third sub-pixel in the first sub-pixel unit group; and the fifth contact hole is located between the fourth contact hole and the sixth contact hole.

- 11. The organic light emitting diode display device according to claim 7, wherein, in each of the pixel unit groups:

the first contact hole is located between the first sub-pixel and the second sub-pixel in the first sub-pixel unit group, and the second contact hole and the third contact hole are respectively located on both sides of the third sub-pixel in the first direction in the second sub-pixel unit group; the fourth contact hole is surrounded by the third sub-pixel in the first sub-pixel unit group; and both the fifth contact hole and the sixth contact hole are located between the first sub-pixel and the second sub-pixel in the second sub-pixel unit group.

- 12. The organic light emitting diode display device according to claim 11, wherein, in each of the pixel unit groups:

both the first sub-pixel and the second sub-pixel have a shape of parallel hexagon; the third sub-pixel in the first sub-pixel unit group has a shape of hollow parallel hexagon, and the third sub-pixel in the second sub-pixel unit group has a shape of hourglass.

- 13. The organic light emitting diode display device according to claim 7, wherein, in each of the pixel unit groups:

both the first contact hole and the second contact hole are located between the first sub-pixel and the second sub-pixel in the first sub-pixel unit group; the third contact hole is surrounded by the third sub-pixel in the second sub-pixel unit group; the fourth contact hole and the fifth contact hole are respectively located on both sides of the third sub-pixel in the first direction in the first sub-pixel unit group; and the sixth contact hole is located between the first sub-

pixel and the second sub-pixel in the second sub-pixel unit group.

- 14. The organic light emitting diode display device according to claim 13, wherein, in each of the pixel unit groups: 5

both the first sub-pixel and the second sub-pixel have a shape of parallel hexagon; the third sub-pixel in the first sub-pixel unit group has a shape of hourglass, and the third sub-pixel in the second sub-pixel unit group has a shape of hollow parallel hexagon. 10

- 15. The organic light emitting diode display device according to any one of claims 1 to 14, wherein, the third sub-pixel is a green sub-pixel. 15

- 16. A display apparatus, comprising the organic light emitting diode display device according to any one of claims 1 to 15. 20

- 17. A mask for fabricating a sub-pixel of an organic light emitting diode display device, comprising: a substrate, and a plurality of opening regions of a same size arranged in a plurality of columns sequentially along a preset direction on the substrate, wherein, the opening regions have a shape of parallel hexagon, and adjacent sides of the adjacent opening regions are parallel; 25 30
 - a center of any opening region in an odd-numbered column is located on a midnormal of a connection line between centers of two opening regions in an even-numbered column adjacent to the opening region in the odd-numbered column, and a center of any opening region in an even-numbered column is located on a midnormal of a connection line between centers of two opening regions in an odd-numbered column adjacent to the opening region in the even-numbered column; 35 40
 - and a width between two adjacent opening regions in a same column is greater than or equal to 2 times a maximum opening width of the opening region along the preset direction. 45

50

55

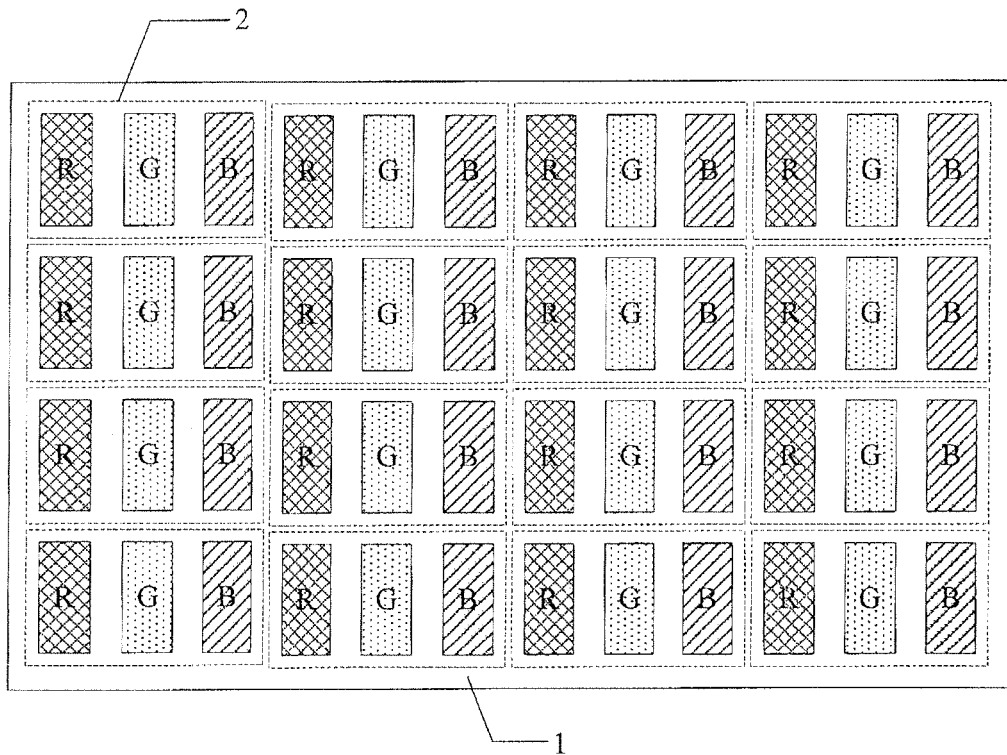


FIG. 1

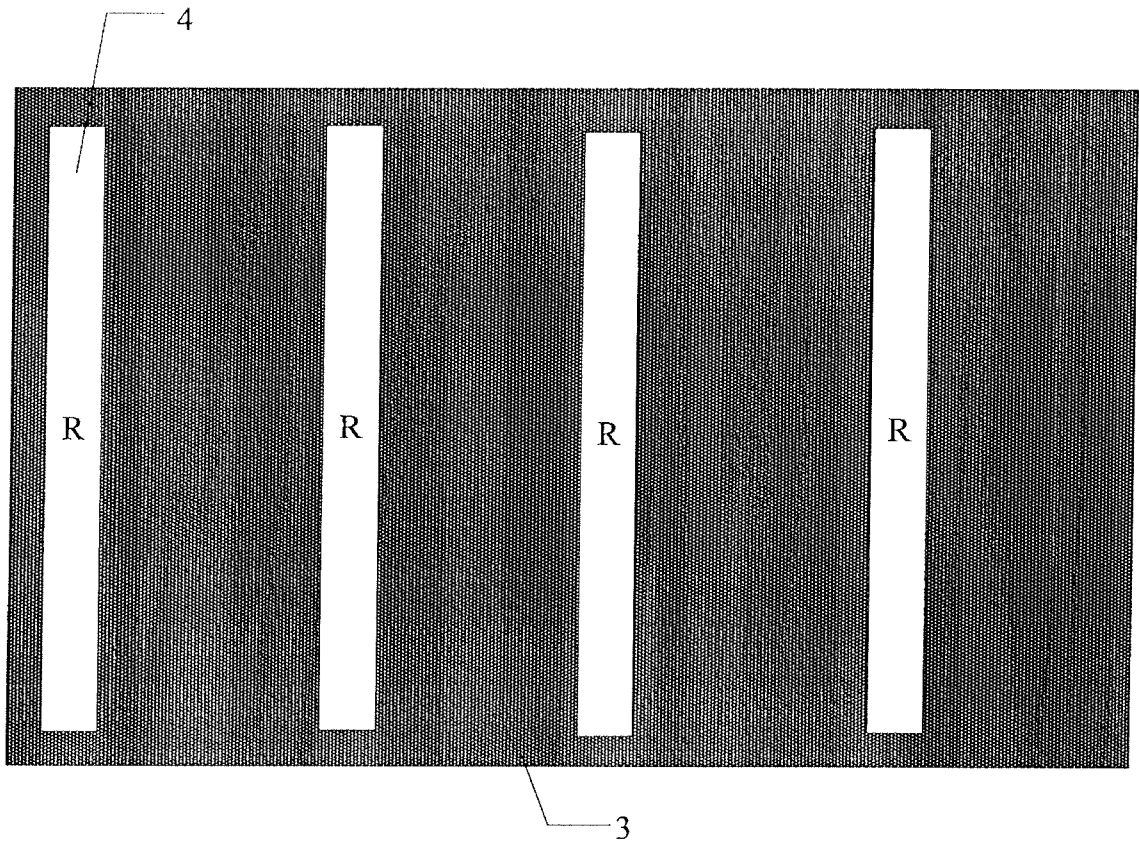


FIG. 2

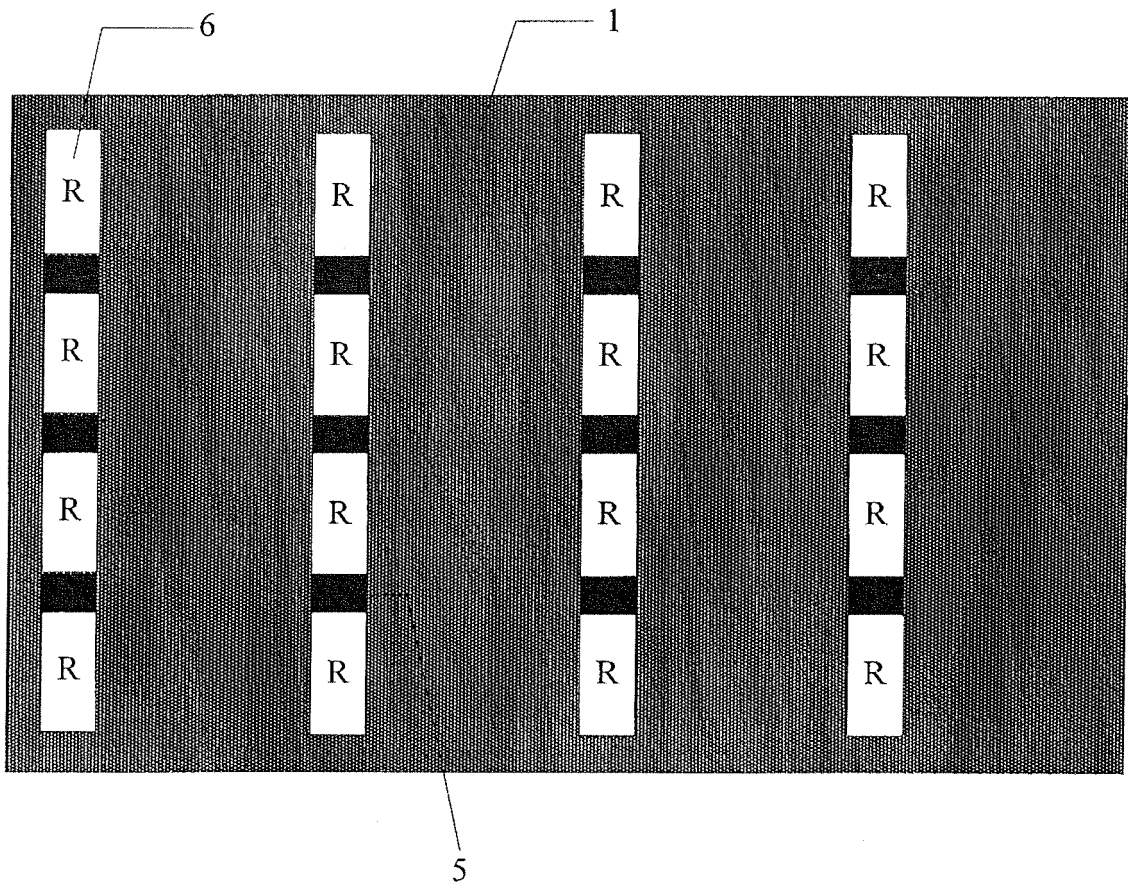


FIG. 3

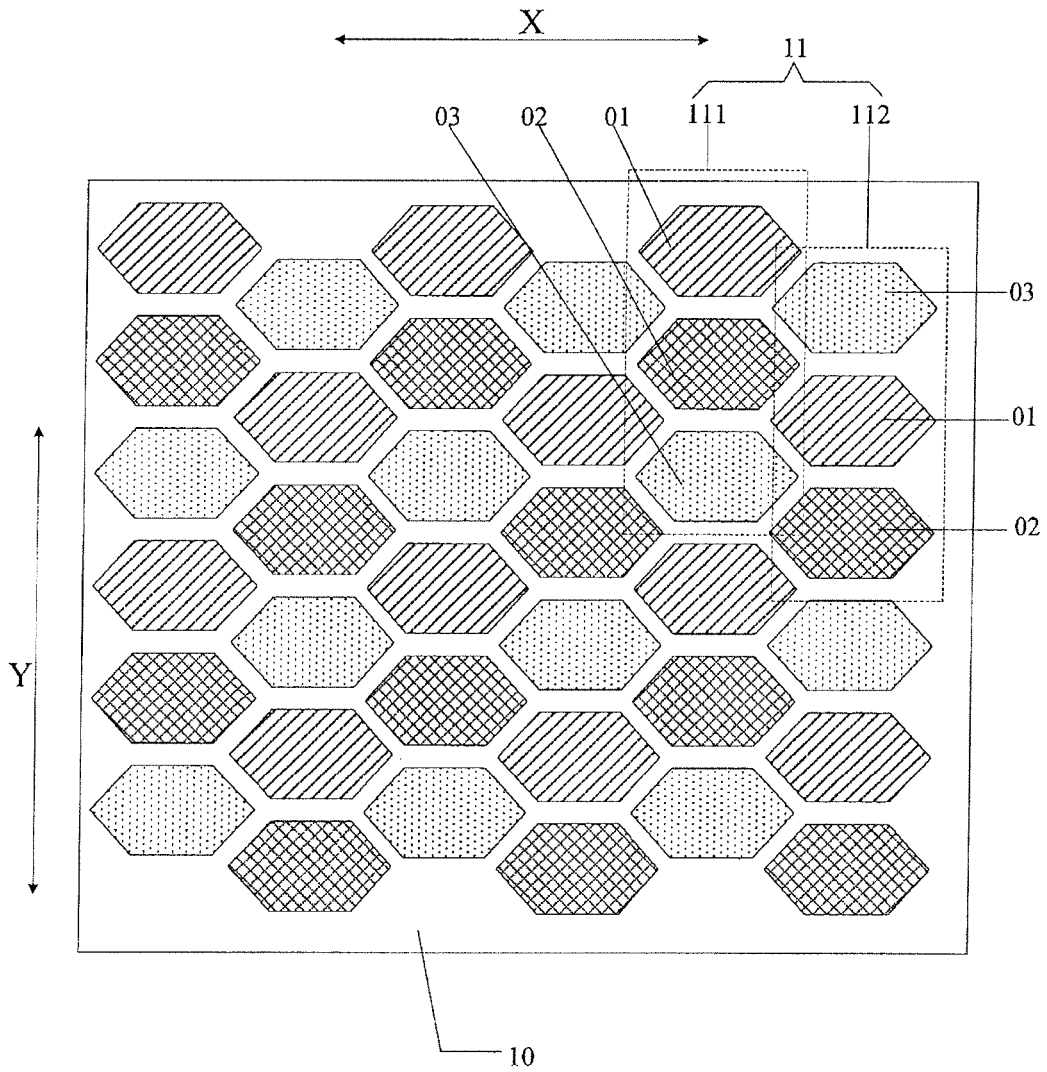


FIG. 4a

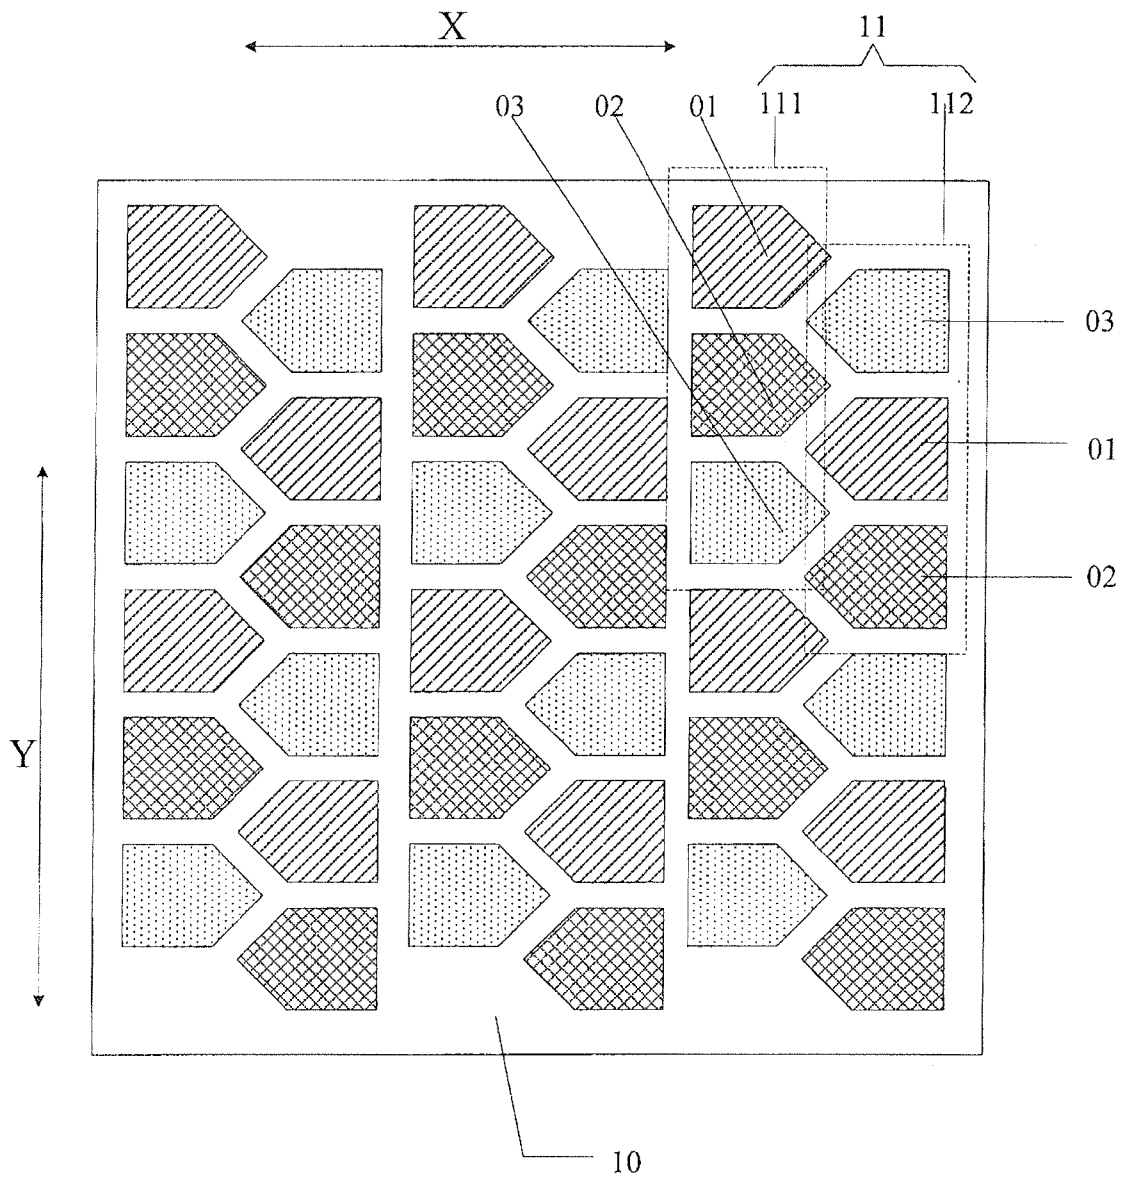


FIG. 4b

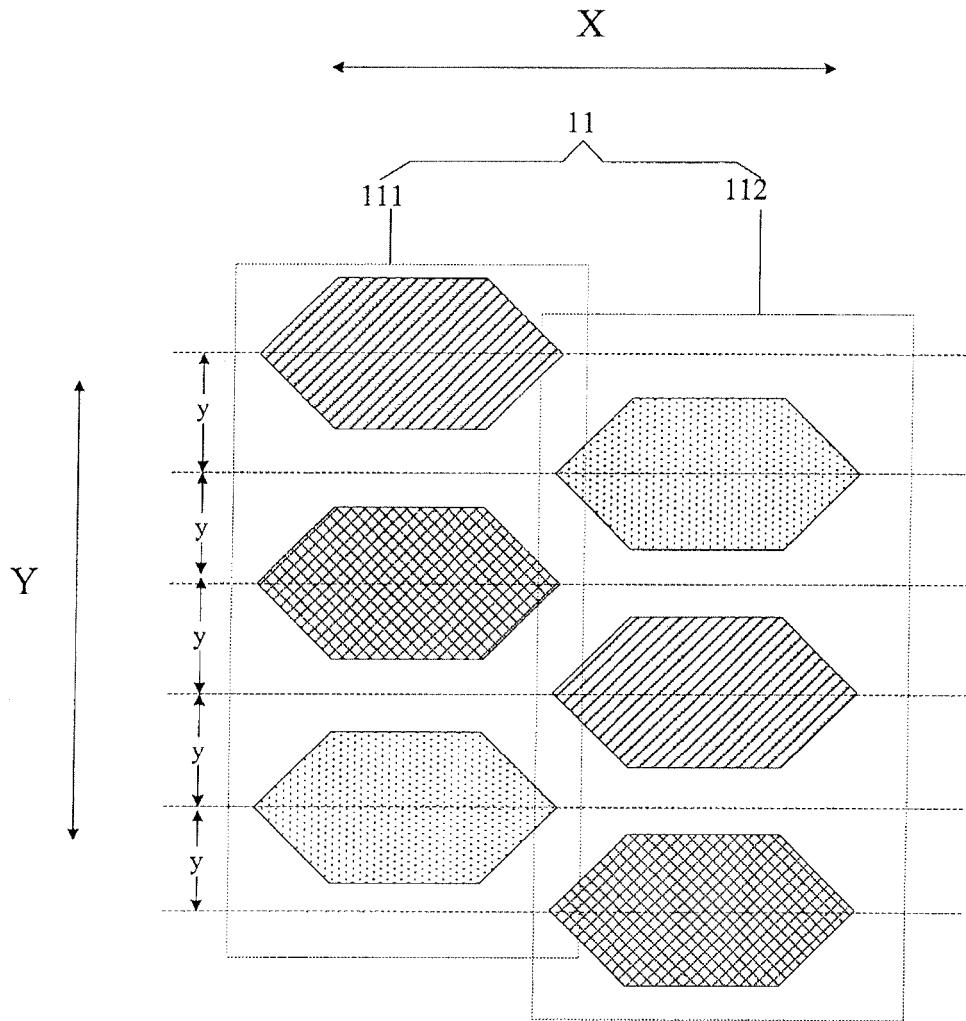


FIG. 5

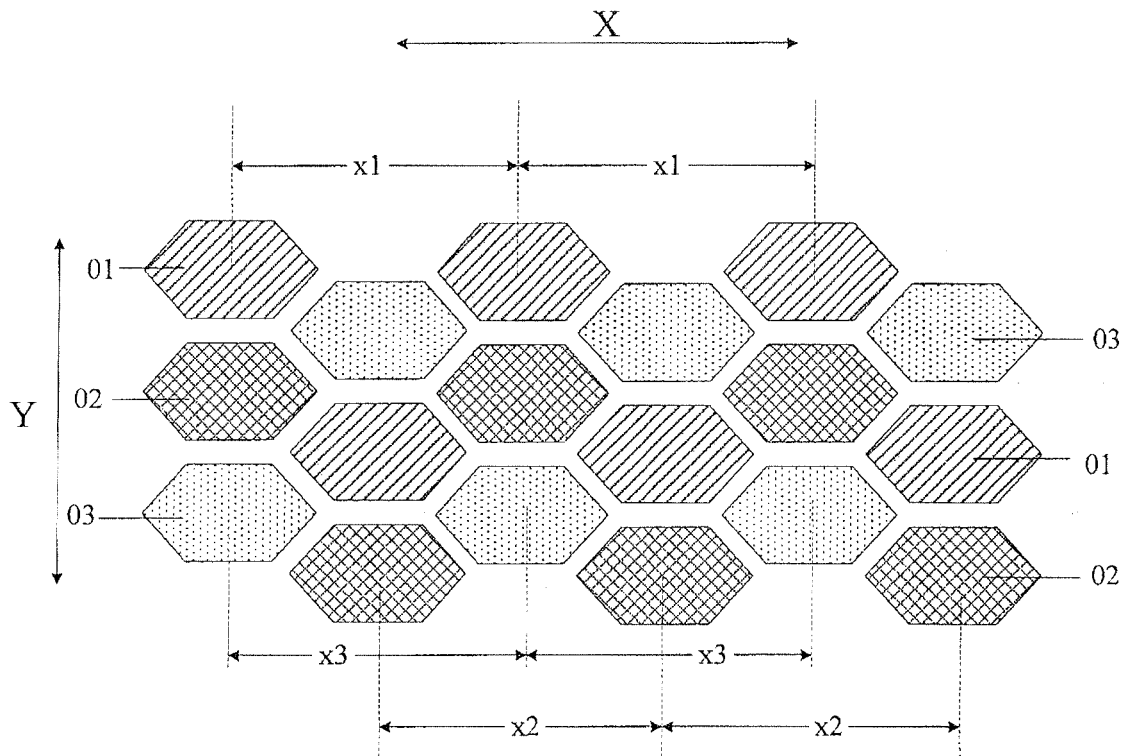


FIG. 6

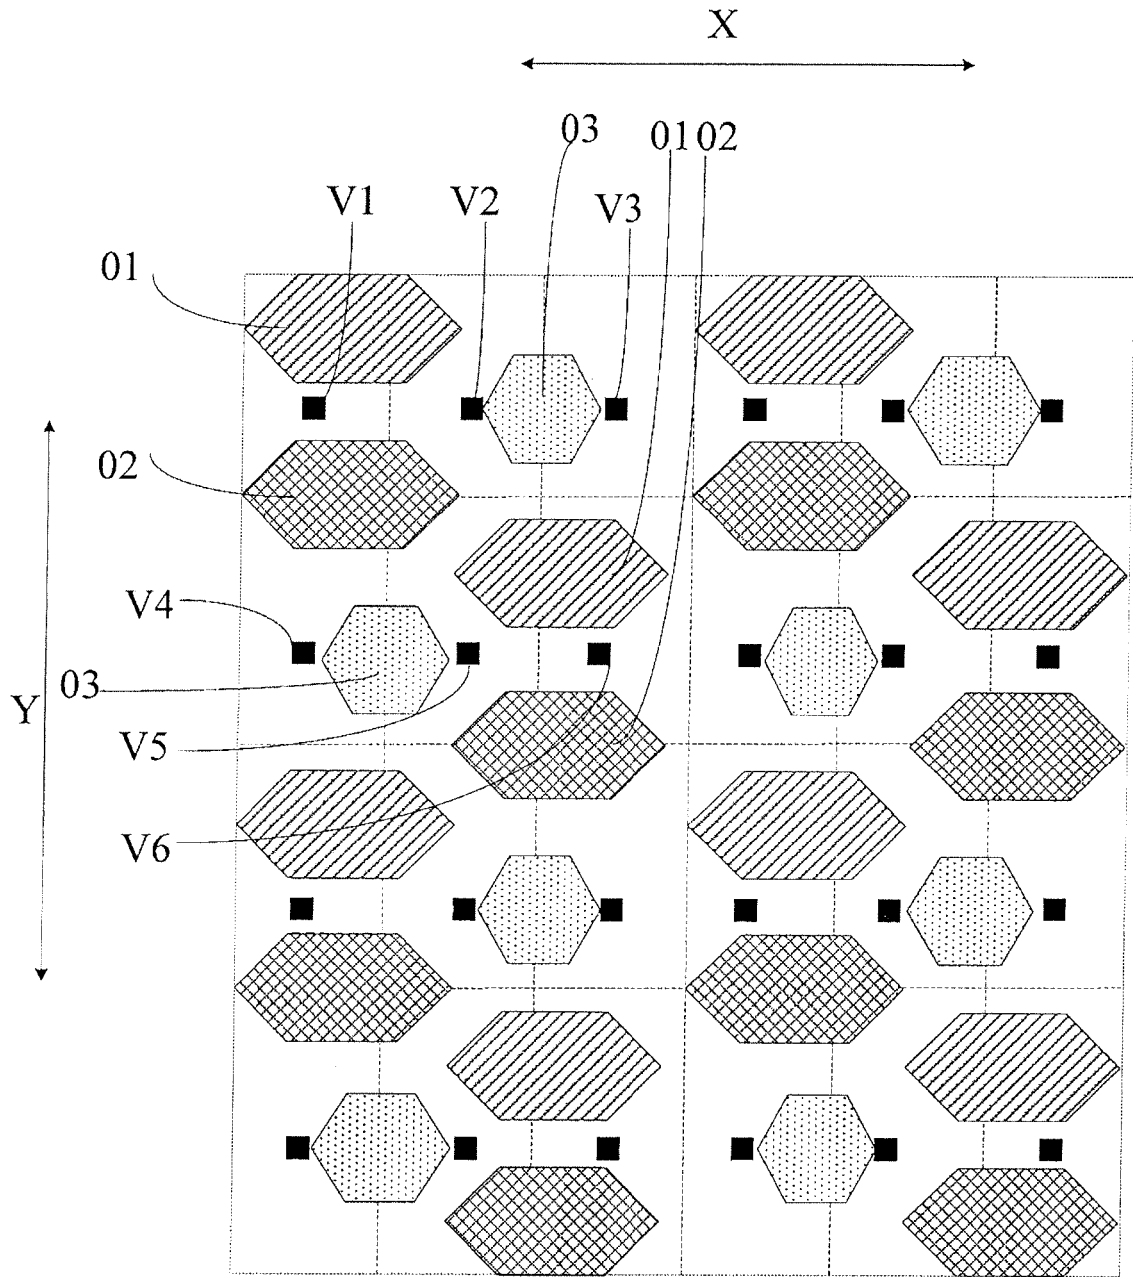


FIG. 7

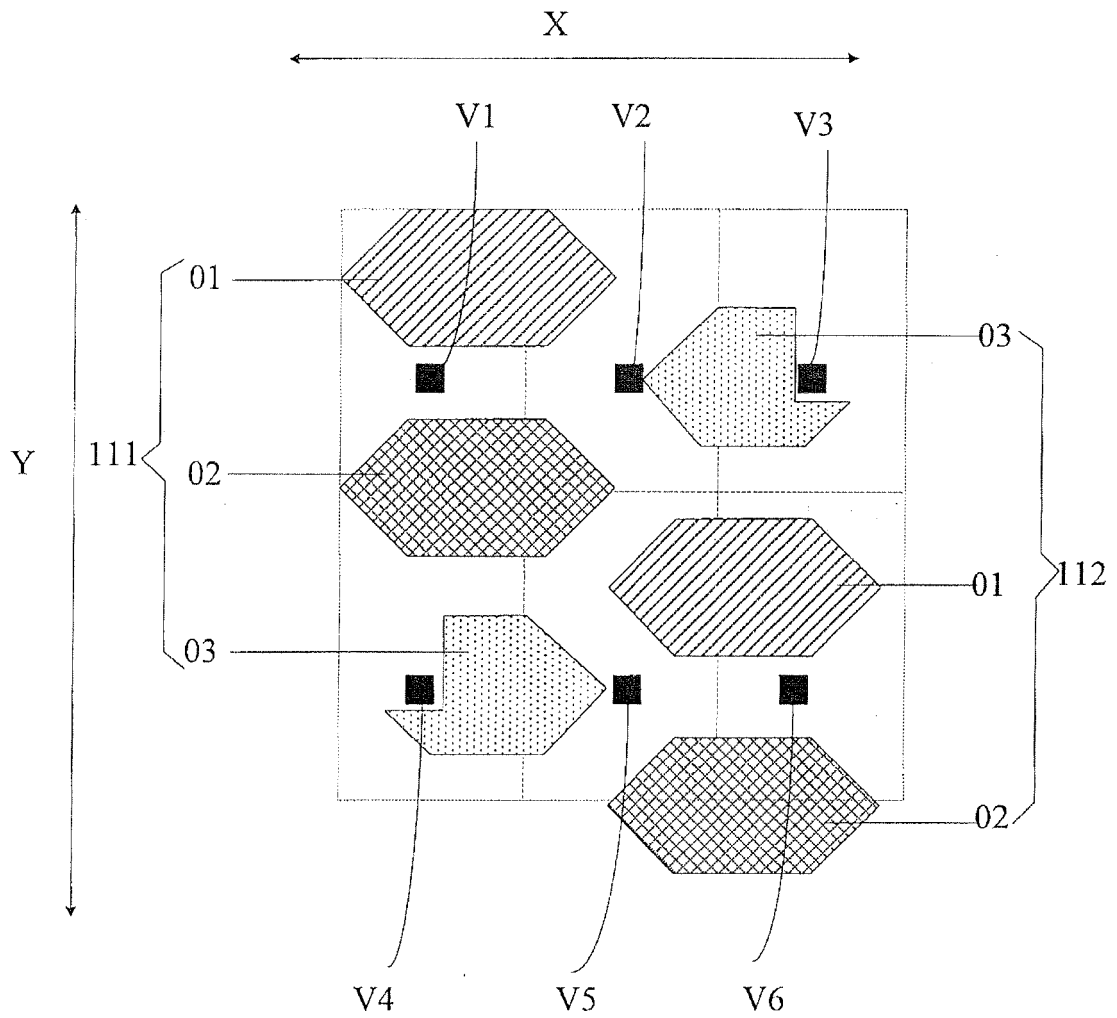


FIG. 8

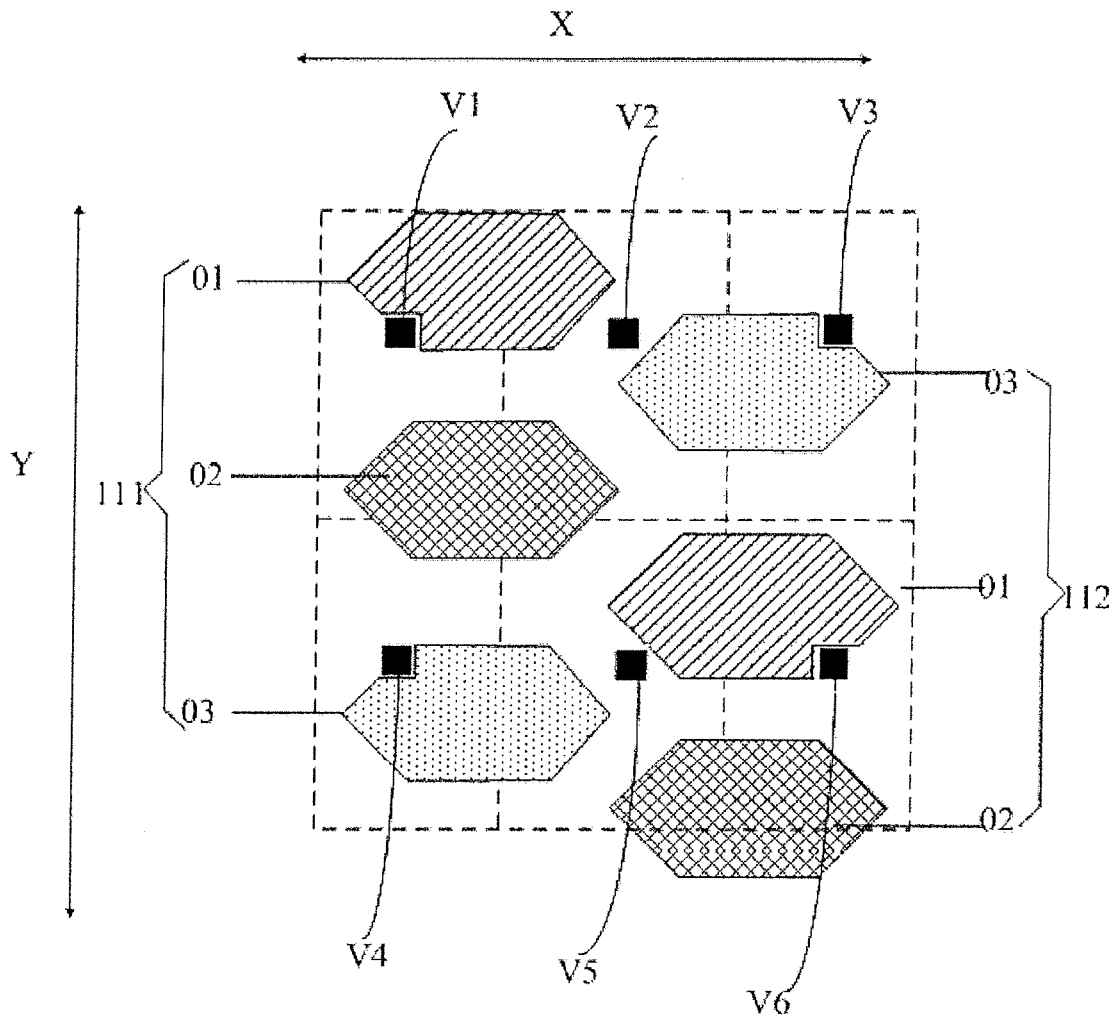


FIG. 9

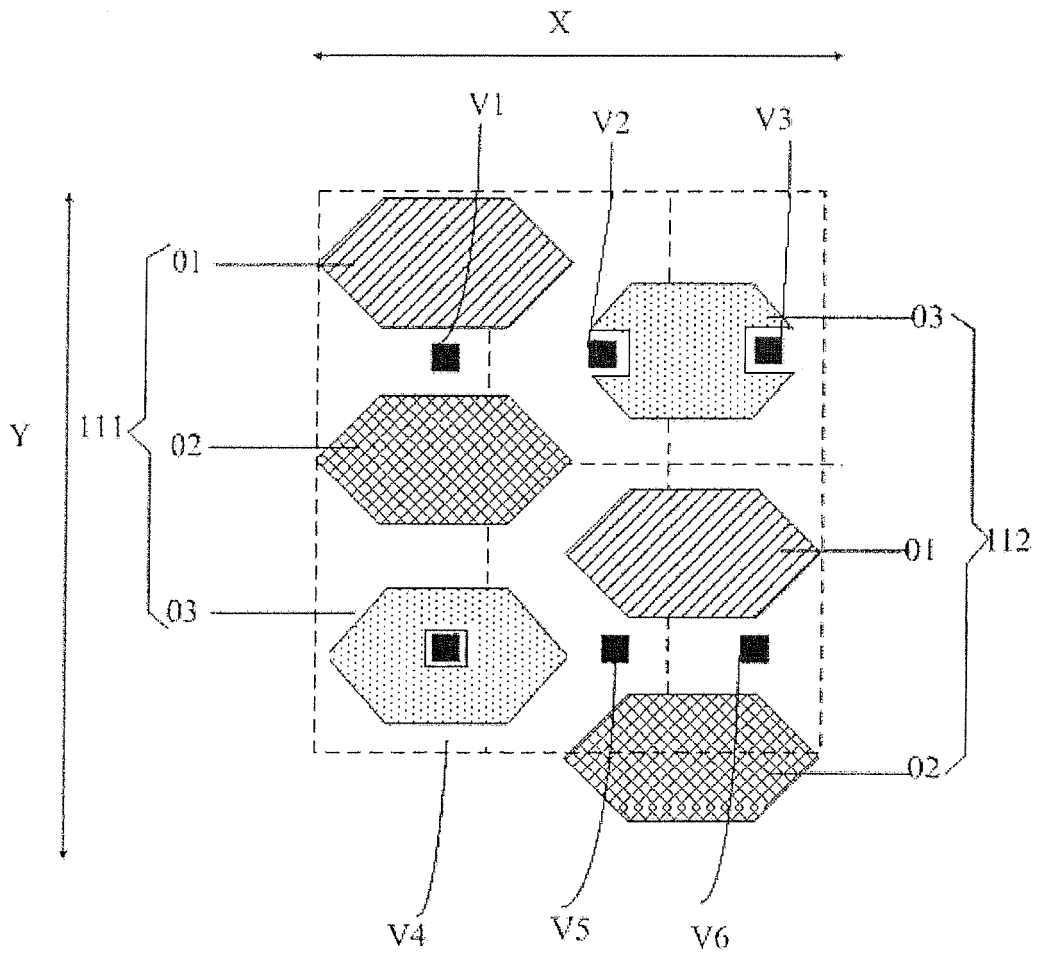


FIG. 10

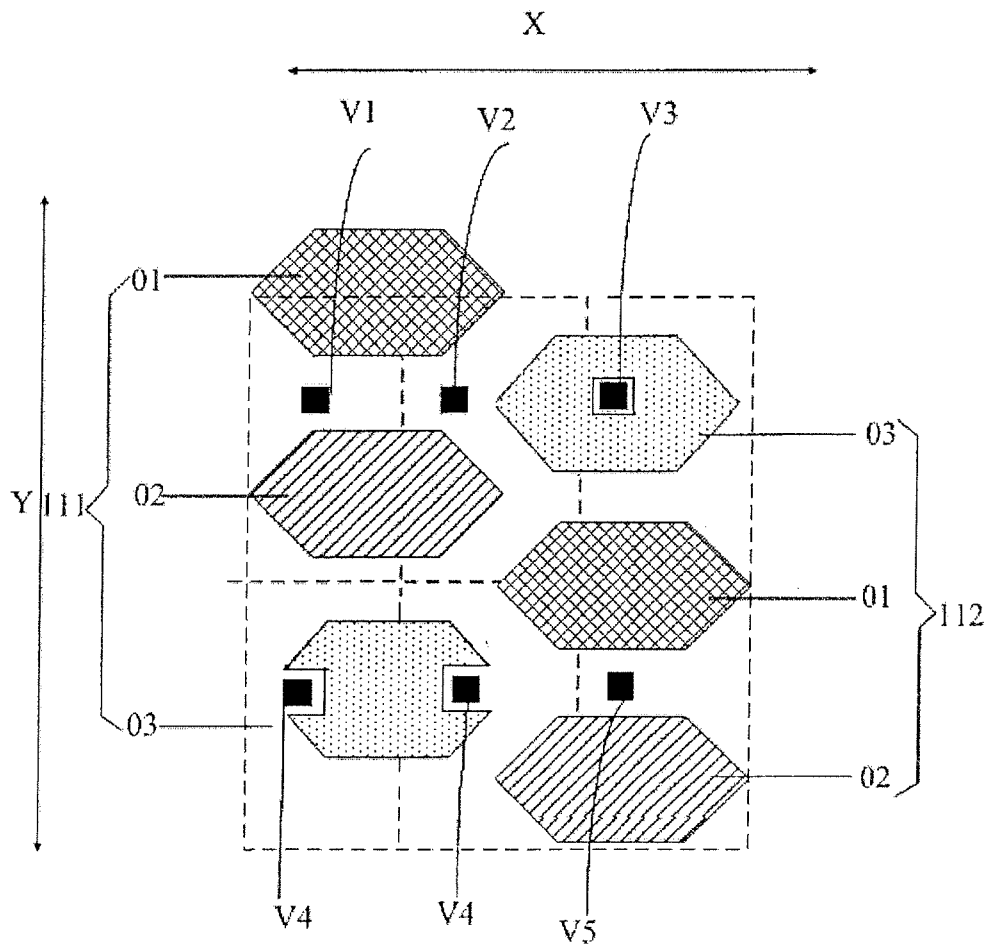


FIG. 11

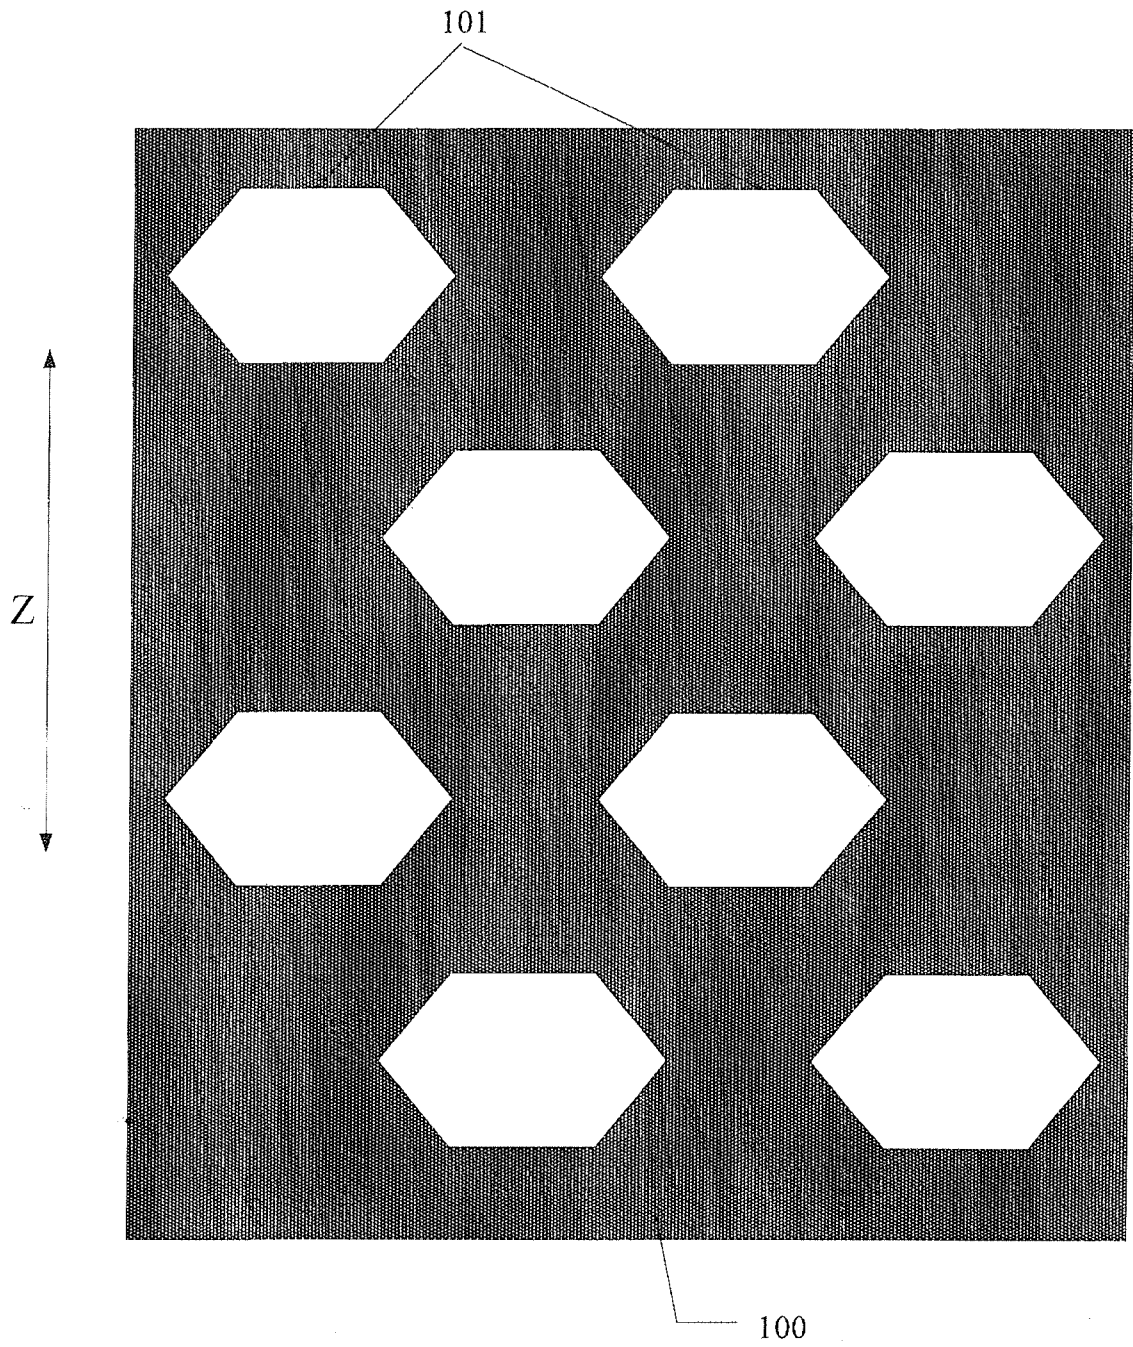


FIG. 12

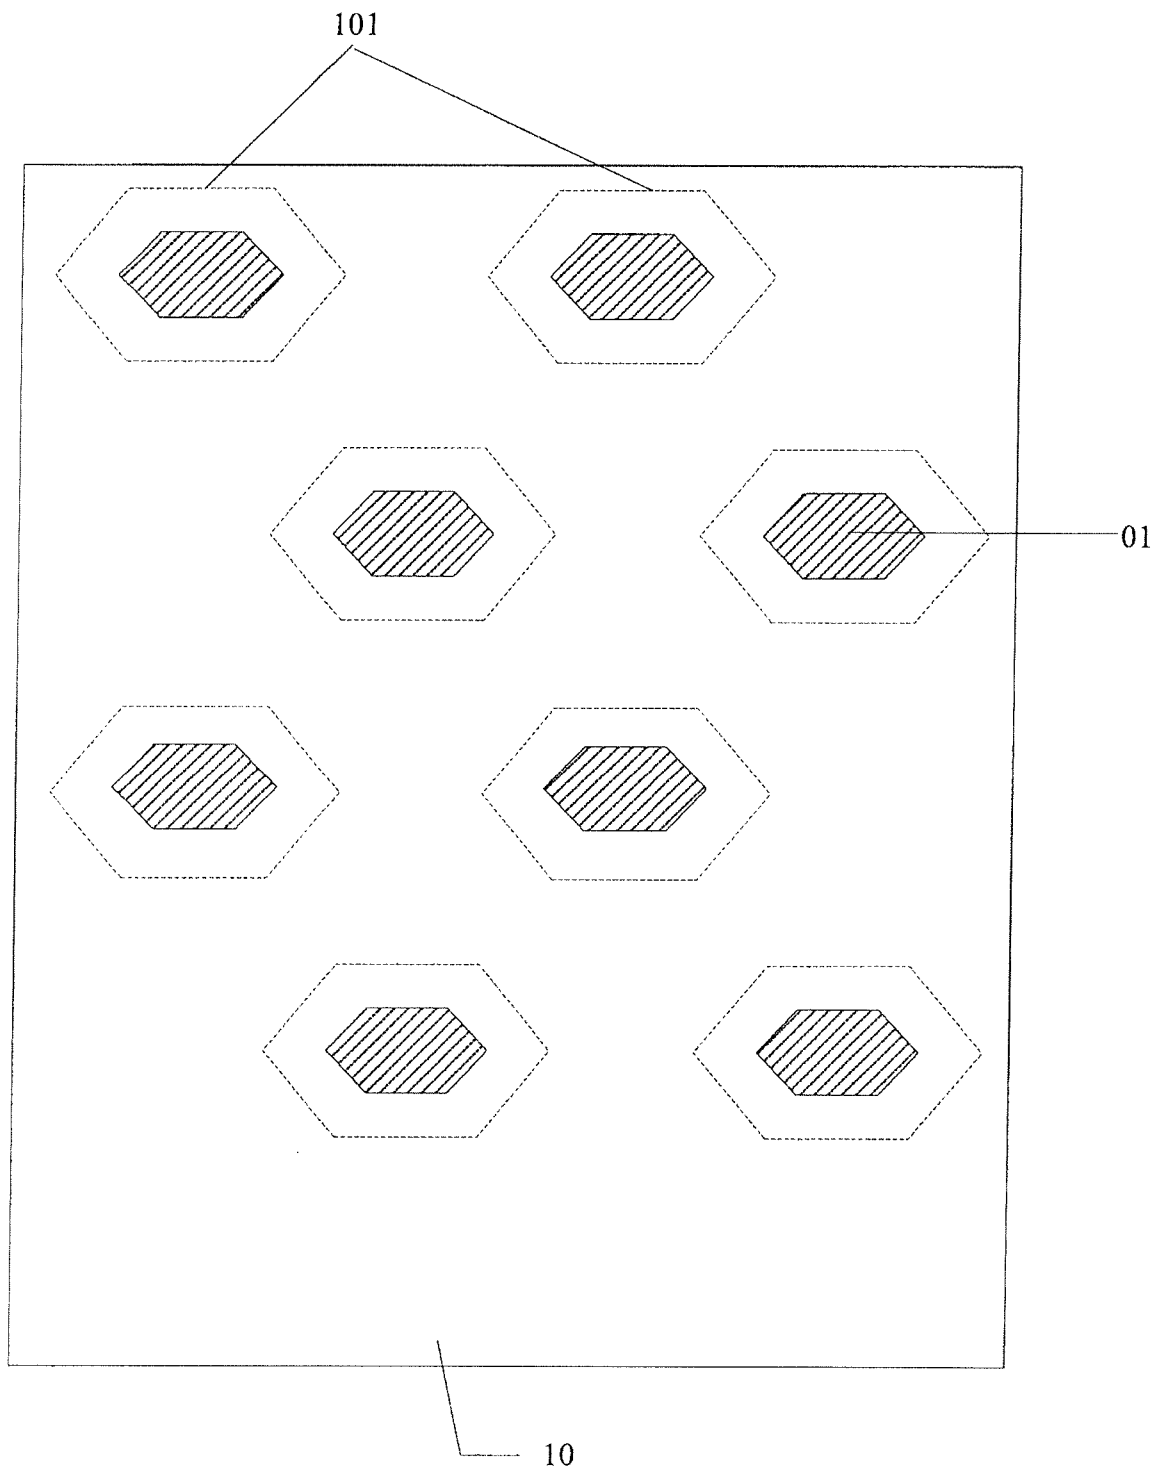


FIG. 13

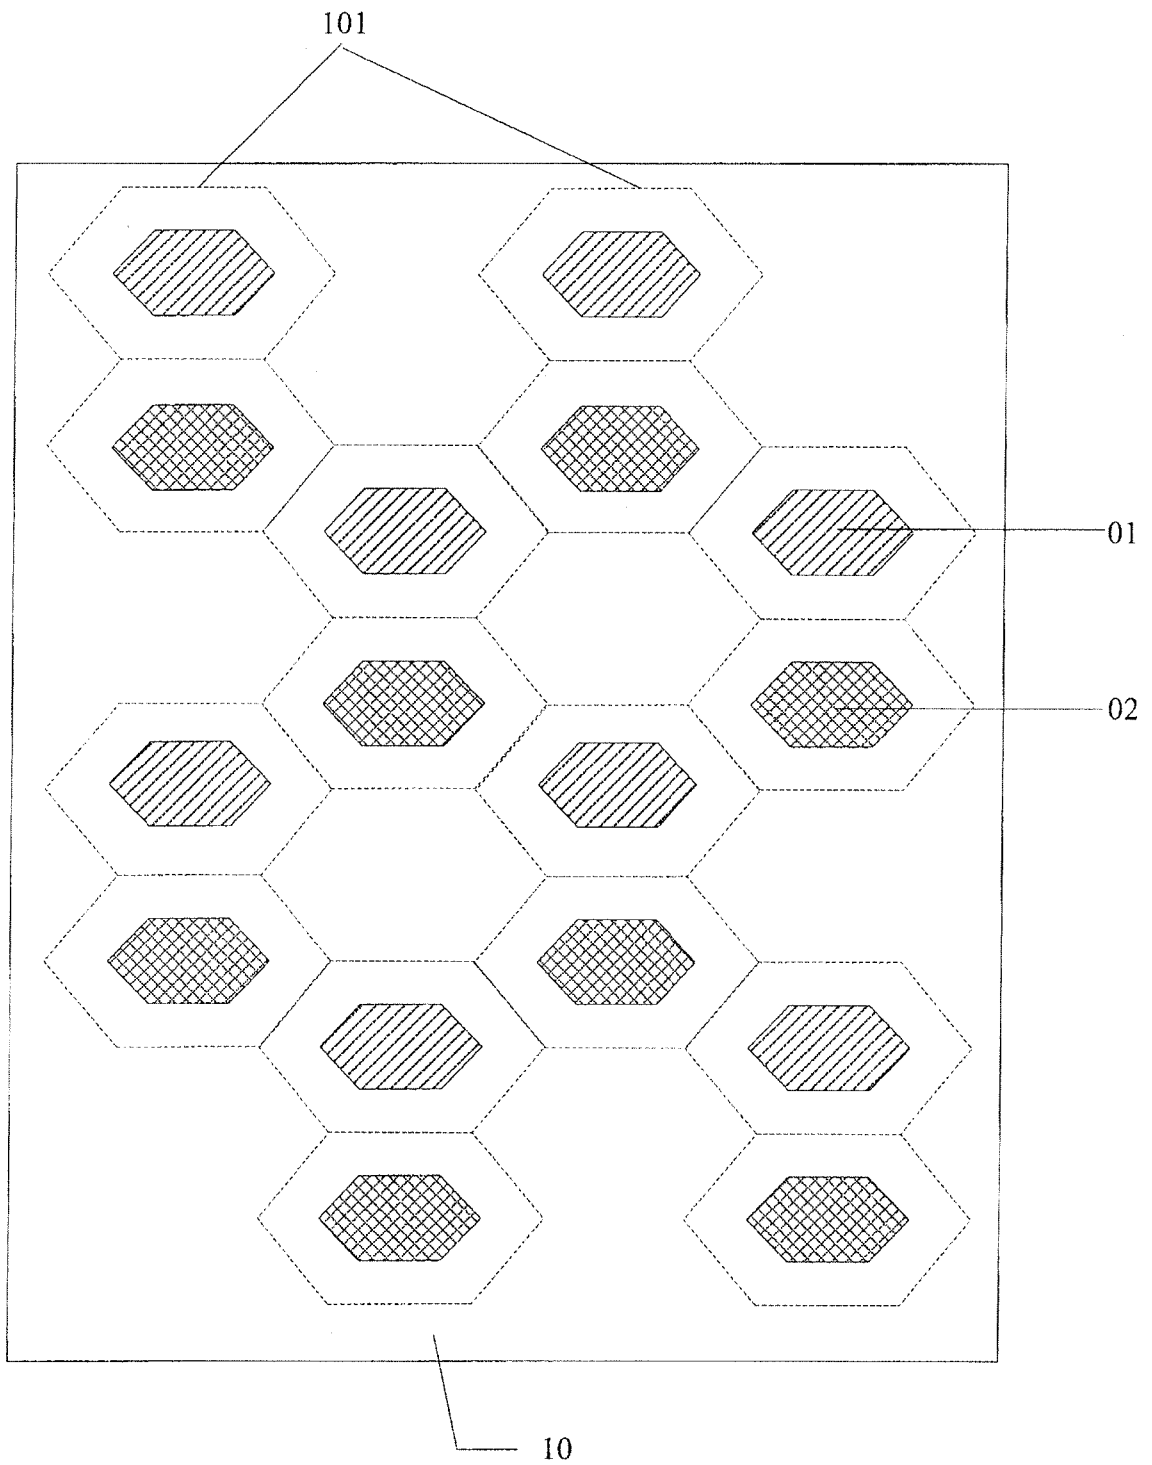


FIG. 14

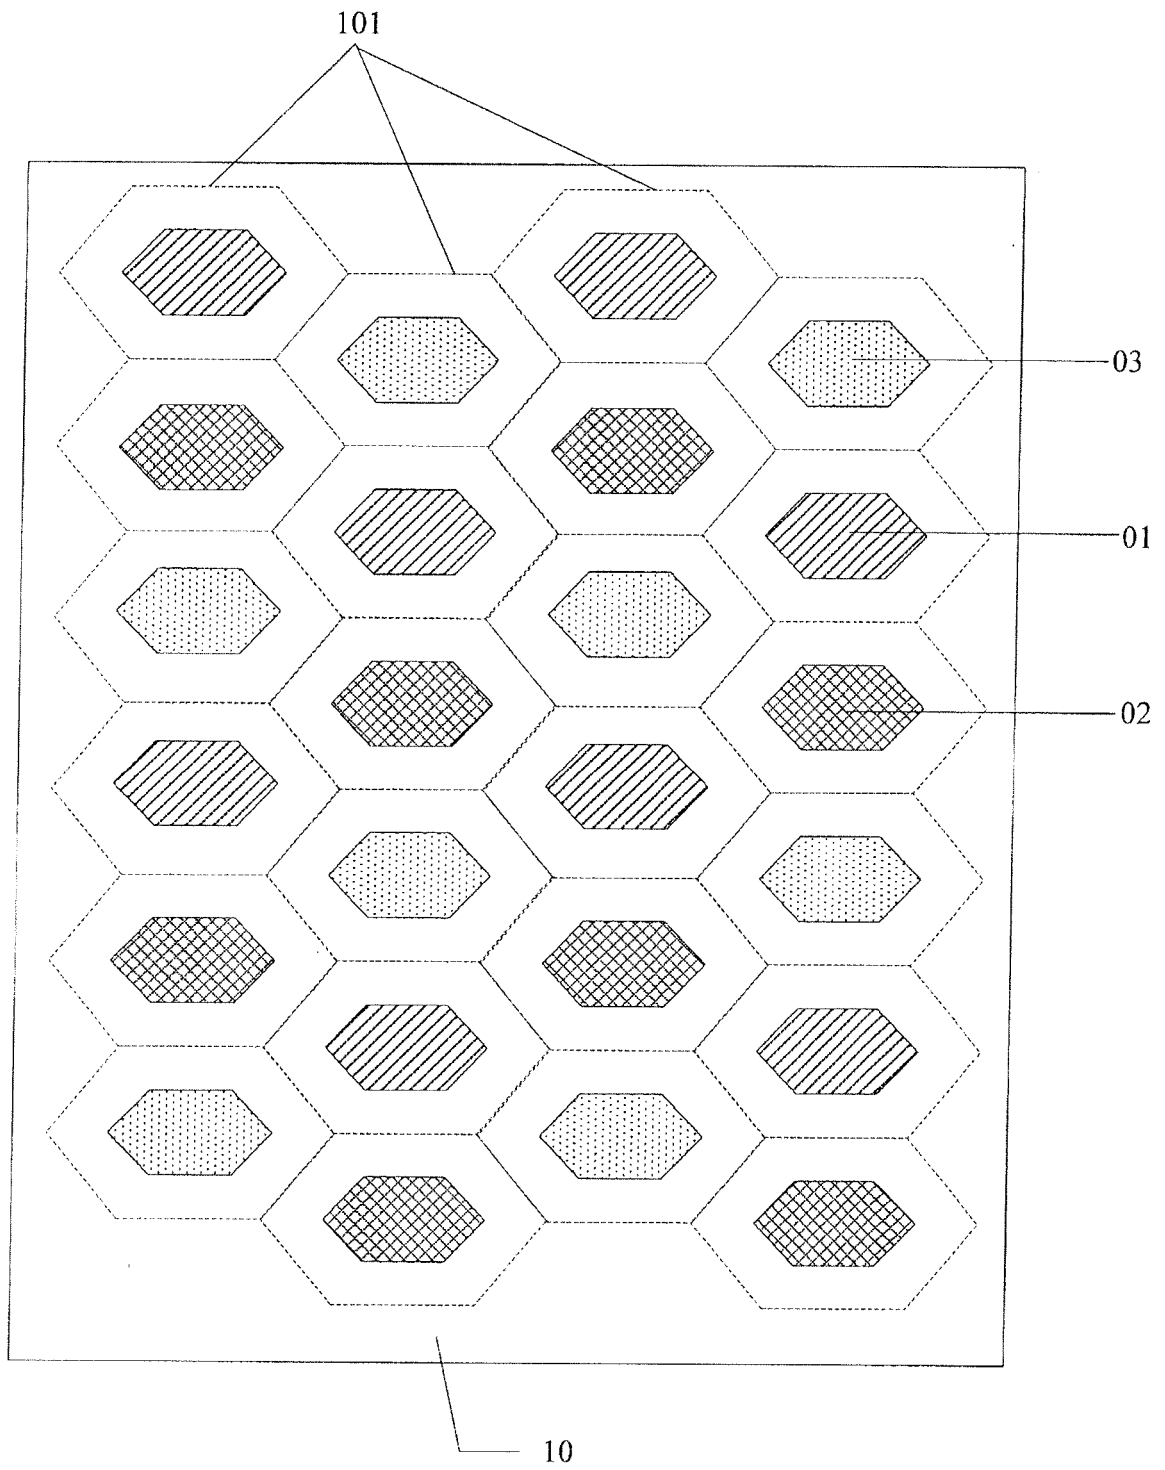


FIG. 15

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/073570

A. CLASSIFICATION OF SUBJECT MATTER		
H01L 27/32 (2006.01) i; H01L 51/56 (2006.01) i; H01L 51/50 (2006.01) i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC: H01L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNABS, CNTXT, DWPI: OLED, organic light emitting diode, red, blue, green, pixel, sub-pixel?, across, hexagon, pentagon, rhombus, diamond, honeycomb, mask		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104362170 A (BOE TECHNOLOGY GROUP CO., LTD. et al.) 18 February 2015 (18.02.2015) the whole document	1-17
X	CN 103366683 A (SHANGHAI HEHUI OPTOELECTRONIC CO., LTD.) 23 October 2013 (23.10.2013) description, paragraphs [0068] to [0089], figure 5(a)	1-8, 15-17
X	US 2013300956 A1 (CHEN et al.) 14 November 2013 (14.11.2013) description, paragraphs [0028] to [0036], figures 3 to 5	1-8, 15-17
A	JP 2007017477 A (SEIKO EPSON CORP. et al.) 25 January 2007 (25.01.2007) the whole document	1-17
A	US 2003201445 A1 (PARK et al.) 30 October 2003 (30.10.2003) the whole document	1-17
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier application or patent but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 21 August 2015	Date of mailing of the international search report 02 September 2015	
Name and mailing address of the ISA State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No. (86-10) 62019451	Authorized officer XU, Xiaoling Telephone No. (86-10) 62089121	

Form PCT/ISA /210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2015/073570

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 104362170 A	18 February 2015	None	
CN 103366683 A	23 October 2013	US 2015015466 A1	15 January 2015
		KR 20150007992 A	21 January 2015
		JP 2015018242 A	29 January 2015
		TW 201503343 A	16 January 2015
		CN 103366683 B	29 October 2014
US 2013300956 A1	14 November 2013	TW 201346411 A	16 November 2013
JP 2007017477 A	25 January 2007	None	
US 2003201445 A1	30 October 2003	JP 2004006337 A	08 January 2004
		CN 1454030 A	05 November 2003
		JP 3993129 B2	17 October 2007
		KR 20030084233 A	01 November 2003
		TW 595026 B	21 June 2004
		TW 200306679 A	16 November 2003
		US 2005116236 A1	02 June 2005
		US 7279715 B2	09 October 2007
		KR 100464864 B1	06 January 2005
		CN 100403857 C	16 July 2008
		US 6870186 B2	22 March 2005

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201410714887 [0073]

专利名称(译)	有机电致发光显示装置，其驱动方法和相关装置		
公开(公告)号	EP3226298A1	公开(公告)日	2017-10-04
申请号	EP2015794042	申请日	2015-03-03
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 鄂尔多斯市源盛光电有限责任公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
[标]发明人	BAI SHANSHAN JI FENGLI LIU JIANTAO XU JINGBO LIANG YINAN		
发明人	BAI, SHANSHAN JI, FENGLI LIU, JIANTAO XU, JINGBO LIANG, YINAN		
IPC分类号	H01L27/32 H01L51/56 H01L51/50 G09G3/3208		
CPC分类号	G09G3/3208 H01L27/3218 H01L27/326 H01L27/3276 H01L51/0011 Y10T428/24306 H01L27/32 H01L51/50 H01L51/56 H01L2227/323		
优先权	201410714887.0 2014-11-28 CN		
其他公开文献	EP3226298A4		
外部链接	Espacenet		

摘要(译)

提供有机发光二极管显示装置和显示装置，以及用于制造有机发光二极管显示装置的子像素的掩模。每个像素单元组(11)包括第一子像素单元组(111)和第二子像素单元组(112)，它们分别沿第一方向相邻设置，并包括三个不同颜色的子像素;第一子像素单元组(111)中的三个子像素和第二子像素单元组(112)中的三个子像素沿第二方向交错，任意子像素的颜色为基础衬底10不同于与子像素相邻的任何其他子像素的颜色。有机发光二极管显示装置确保相同颜色的子像素在基础基板上规则地交错，这增加了掩模的强度，并且有助于制造小尺寸的子像素，从而使得可以改善有机发光二极管显示装置的分辨率。

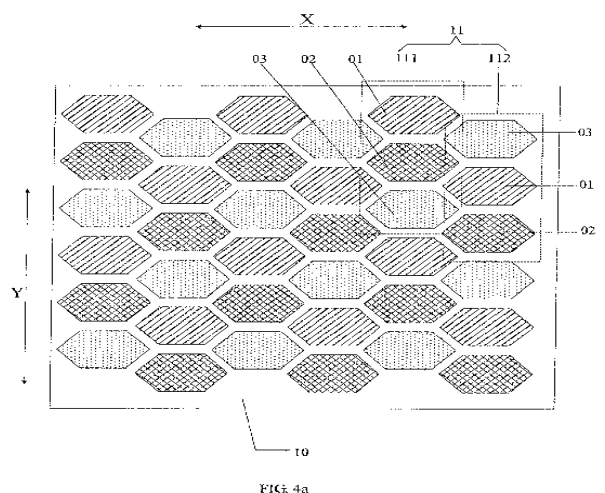


FIG. 4a