

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11)



EP 1 445 624 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

11.08.2004 Bulletin 2004/33

(51) Int Cl. 7: G01S 7/52

(21) Application number: 04250581.8

(22) Date of filing: 04.02.2004

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR

Designated Extension States:

AL LT LV MK

(30) Priority: 06.02.2003 JP 2003029405

(71) Applicant: GE Medical Systems Global

Technology Company LLC

Waukesha, Wisconsin 53188 (US)

(72) Inventor: Amemiya, Shinichi

Hino-shi Tokyo 191-8503 (JP)

(74) Representative: Pedder, James Cuthbert

London Patent Operation,

General Electric International, Inc.,


15 John Adam Street

London WC2N 6LU (GB)

(54) Power source for an ultrasonic diagnostic apparatus

(57) For the purpose of reducing the size and power consumption of a power source in an ultrasonic diagnostic apparatus, charge pump circuits (50 and 60) are connected to a transmitter power source (14). A regulator in the transmitter power source (14) drives the charge pump circuit (50) to generate a positive bias voltage +HV2 higher than a positive voltage +HV1 generated by the transmitter power source (14). The regulator in the transmitter power source (14) also drives the charge pump circuit (60) to generate a negative bias voltage -HV2 lower than a negative voltage -HV1 generated by the transmitter power source (14).

FIG. 3

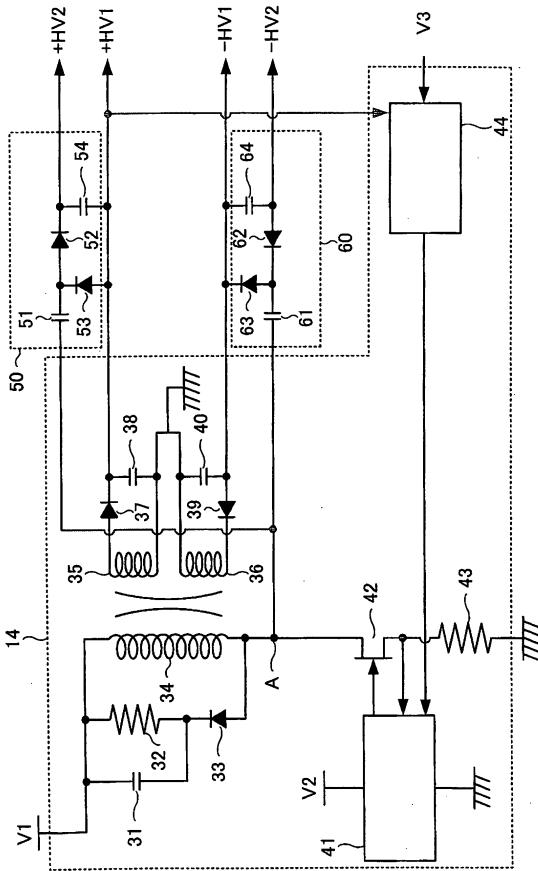

Description

[0001] The present invention relates to an ultrasonic diagnostic apparatus for transmitting ultrasonic signals from ultrasonic transducers toward a subject to be examined, and receiving reflected waves of the ultrasonic signals for display, and more particularly to an ultrasonic diagnostic apparatus of small size and low power consumption.

[0002] Conventionally, an ultrasonic diagnosis for imaging the interior of a subject by applying ultrasound to a region to be examined in the subject with an abutting ultrasonic probe, and producing an image of echo signals of reflected waves of the applied ultrasound is commonly used. Since ultrasound is harmless to a living body, the ultrasonic diagnostic apparatus is especially useful for medical applications and is used for detection of foreign material in the living body, determination of lesion degree, observation of a tumor or a fetus, and the like.

[0003] In recent years, size and weight reduction of an ultrasonic diagnostic apparatus is desired. An ultrasonic diagnostic apparatus of small size and light weight overall will desirably provide an ultrasonic diagnostic apparatus that can be easily carried. A problem in reducing the size and weight of the ultrasonic diagnostic apparatus is especially in a power source section. Since the ultrasonic diagnostic apparatus requires provision of a transmitter power source for ultrasonic transducers, and in addition, a bias power source for an analog switch, attempts have been made to reduce the size of these power sources.

[0004] A conventional method for reducing the size of the power source involves generating transmitter power source from a bias power source for an analog switch (for example, see Japanese Patent Application Laid Open No. 2002-306475).

[0005] In the conventional ultrasonic diagnostic apparatus, however, although size reduction of the apparatus is achieved by combining the transmitter power source and bias power source, a problem of a large power loss arises.

[0006] Specifically, since it is necessary for the voltage of the bias power source to be higher than that of the transmitted power source, the conventional ultrasonic diagnostic apparatus is configured to obtain the transmitter power source from the bias power source via a voltage drop circuit (direct current stabilizing power source circuit). In such a configuration, if the voltage supplied from the transmitter power source to the ultrasonic transducers is low, the voltage difference between the bias power source and transmitter power source becomes large, resulting in the large power loss.

[0007] Such a power loss leads to a problem of shorter usable time and larger heat generation in a portable ultrasonic diagnostic apparatus in which the ultrasonic transducers are driven by a battery.

[0008] Therefore, the present invention seeks to pro-

vide an ultrasonic diagnostic apparatus comprising a power source of small size and low power consumption.

[0009] The present invention of a first aspect for solving the aforementioned problems and attaining the object is an ultrasonic diagnostic apparatus for transmitting ultrasonic signals from ultrasonic transducers toward a subject to be examined, and receiving reflected waves of said ultrasonic signals for display, characterized in comprising: an analog switch for switching ultrasonic transducers for transmission of said ultrasonic signals and reception of said reflected waves; a transmitter power source for supplying a high voltage to a transmitter circuit for causing said ultrasonic transducers to drive said ultrasonic signals; and a bias power source generating circuit for generating a bias power source for said analog switch from said transmitter power source.

[0010] According to the invention of the first aspect, in the ultrasonic diagnostic apparatus, a bias power source is generated by a bias power source generating circuit from a transmitter power source for use in transmission of ultrasonic signals, and the power is supplied to the analog switch; and therefore, no separate power source for the bias voltage for the analog switch is needed, and the power source can be reduced in size.

[0011] The present invention of a second aspect is characterized in that: in the invention of the first aspect, said bias power source generating circuit comprises a positive bias power source generating circuit for outputting a voltage value higher than a positive voltage value of said transmitter power source; and a negative bias power source generating circuit for outputting a voltage lower than a negative voltage value of said transmitter power source.

[0012] According to the present invention of the second aspect, in the ultrasonic diagnostic apparatus, a positive bias power source circuit generates a voltage higher than a positive voltage value of the transmitter power source, and a negative bias power source circuit generates a voltage lower than a negative voltage value of the transmitter power source; and therefore, a bias voltage of sufficient magnitude as compared with the transmission voltage can be obtained.

[0013] The present invention of a third aspect is characterized in that: in the invention of the first or second aspect, said positive bias power source generating circuit comprises a positive charge pump circuit that uses the positive voltage of said transmitter power source as a reference; said negative bias power source generating circuit comprises a negative charge pump circuit that uses the negative voltage value of said transmitter power source as a reference; and said bias power source generating circuit uses outputs of said positive charge pump circuit and said negative charge pump circuit as the bias power source for said analog switch.

[0014] According to the present invention of the third aspect, in the ultrasonic diagnostic apparatus, a charge pump circuit that uses the positive voltage of the transmitter power source as a reference generates a voltage

higher than the positive voltage of the transmitter power source, and a charge pump circuit that uses the negative voltage of the transmitter power source as a reference generates a voltage lower than the negative voltage of the transmitter power source; and therefore, a bias power source for the analog switch is obtained with a simple configuration, and power consumption in the power source is reduced. Accordingly, the ultrasonic diagnostic apparatus is reduced in overall size and reduction in power consumption is achieved.

[0015] The present invention of a fourth aspect is characterized in that: in the invention of the first, second or third aspect, said apparatus further comprises a transmission voltage control section for variably controlling the voltage value of said transmitter power source.

[0016] According to the present invention of the fourth aspect, the ultrasonic diagnostic apparatus is capable of arbitrarily controlling the transmission voltage by a transmission voltage control section, and the bias voltage is generated based on the transmission voltage; and therefore, power consumption in the power source is minimized. Thus, by applying the present invention to a battery-driven ultrasonic diagnostic apparatus, a portable ultrasonic diagnostic apparatus that can be operated over a long time is obtained.

[0017] The present invention of a fifth aspect is characterized in that: in the invention of the third or fourth aspect, a driving circuit for said charge pump shares a driving circuit in said transmitter power source.

[0018] According to the present invention of the fifth aspect, the shared use of a driving circuit enables size reduction and high efficiency, and is suitable for a portable ultrasonic diagnostic apparatus.

[0019] The present invention of a sixth aspect is characterized in that: in the invention of the first - fifth aspects, said transmitter power source comprises a stabilizing power source circuit for decreasing the positive voltage value supplied to said transmitter circuit, and a stabilizing power source circuit for increasing the negative voltage value supplied to said transmitter circuit.

[0020] According to the present invention of the sixth aspect, in the ultrasonic diagnostic apparatus, the transmitter power source can be provided with a voltage drop circuit to reduce noise in the transmission voltage.

[0021] According to the present invention, a charge pump circuit is connected to a transmitter power source for generating a voltage supplied to ultrasonic transducers, and an output of the charge pump circuit is employed as a bias power source for an analog switch, and therefore, an effect is obtained that there is provided an ultrasonic diagnostic apparatus having a power source section reduced in size and having reduced power consumption.

[0022] The invention will now be described in greater detail, by way of example, with reference to the drawings, in which:-

Figure 1 is an explanatory diagram for explaining

the overall configuration of an ultrasonic diagnostic apparatus in accordance with an embodiment of the present invention.

5 Figure 2 shows the internal configuration of an analog switch shown in Figure 1.

Figure 3 shows the circuit configuration of a power source section shown in Figure 1.

10 Figure 4 shows the circuit configuration of a power source section having charge pump circuits of multi-stage configuration.

15 Figure 5 illustrates variation of the power source circuit shown in Figure 3.

Figure 6 shows a noise removing circuit for use in the transmitter power source.

20 **[0023]** An ultrasonic diagnostic apparatus in accordance with an embodiment of the present invention will now be described in detail with reference to the appended drawings.

25 **[0024]** Figure 1 is an explanatory diagram for explaining the overall configuration of an ultrasonic diagnostic apparatus in accordance with an embodiment of the present invention. In Figure 1, an ultrasonic diagnostic apparatus 1 is connected to a monitor 2, a control unit 3 and an ultrasonic probe 18. For the monitor 2, any monitor, such as a CRT or liquid crystal monitor, may be used. The control unit 3 may be a general-purpose input device such as a keyboard or mouse, or may be provided with a dedicated console panel.

30 **[0025]** The ultrasonic diagnostic apparatus 1 also comprises therein a control section 11, an image processing section 12, a power source section 13, an analog switch 16 and a transmission/reception beamformer 17. Moreover, the power source section 13 has therein a transmitter power source 14 and a bias power source 15.

35 **[0026]** In a diagnosis using the ultrasonic diagnostic apparatus 1, first, transmitter power $\pm HV1$ is supplied from the transmitter power source 14 to the transmission/reception beamformer 17. The transmission/reception beamformer 17 uses the transmitter power source $\pm HV1$ to transmit ultrasonic signals from ultrasonic transducers in the ultrasonic probe 18 connected via the analog switch 16 and a connection cable 19. The ultrasonic transducers then receive reflected waves of the transmitted ultrasonic signals, and input them to the transmission/reception beamformer via the connection cable 19 and analog switch 16.

40 **[0027]** The transmission/reception beamformer 17 transmits the input reflected waves to the image processing section 12, which produces an ultrasonic image based on the reflected waves. The control section 11 displays on the monitor 2 the ultrasonic image pro-

duced by the image processing section 12 based on the input from the control unit 3.

[0028] The analog switch 16 conducts switching of ultrasonic transducers to be connected to the transmission/reception beamformer 17. Since ultrasonic transducers for transmitting ultrasonic signals are selected by the switching by the analog switch 16, an area to be examined can be scanned by appropriately operating the analog switch 16.

[0029] Figure 2 shows the internal configuration of the analog switch 16. As shown, the analog switch 16 comprises therein a plurality of switches 16a. If the transmission/reception beamformer 17 has 63 channels and the ultrasonic probe 18 has 124 ultrasonic transducers, for example, the number of switches 16a included in the analog switch 16 is 124. The analog switch 16 selects ultrasonic transducers to be connected to the transmission/reception beamformer 17 by turning on selected switches 16a. Moreover, the analog switch 16 changes ultrasonic transducers for transmitting ultrasonic signals by changing switches 16a that are turned on, and an ultrasonic scan is thus conducted.

[0030] The analog switch 16 is supplied with a bias voltage $\pm HV2$ by the bias power source 15. The bias voltage $\pm HV2$ is in a range that is desirably 10 — 20V positively and negatively larger than the transmission voltage $\pm HV1$ output by the transmitter power source 14. For example, if the transmission voltage $\pm HV1$ is -100V — +100V, the bias voltage $\pm HV2$ is -120V — +120V.

[0031] The amplitude range of the bias voltage $\pm HV2$ is made larger than that of the transmission voltage $\pm HV1$ for preventing an increase of on-resistance in the analog switch 16 due to reduction in bias voltage.

[0032] Next, a specific configuration of the power source section 13 will be described. Figure 3 shows a circuit configuration of the power source section 13 shown in Figure 1. In Figure 3, the power source section 13 comprises charge pump circuits 50 and 60 connected to the transmitter power source 14, and outputs of the charge pump circuits 50 and 60 are used as the bias power source 15.

[0033] Specifically, a regulator circuit comprised of capacitors 31, 38 and 40, diodes 33, 37 and 39, a resistance 32, and inductors 34, 35 and 36 is formed in the transmitter power source 14, and the transmitter power source 14 outputs the transmission voltage $\pm HV1$ from a direct current power source V1.

[0034] Moreover, the transmitter power source 14 is controlled by a transistor 42, an SW power source control IC 41, a resistance 43 and a feedback circuit 44. More particularly, the transmission voltage $+HV1$ and a comparison voltage V3 are input to the feedback circuit 44, which inputs the transmission voltage $+HV1$ and comparison voltage V3 to the SW power source control IC 41.

[0035] On the other hand, the SW power source control IC 41 conducts switching control of the transistor 42

to control the operation of the regulator circuit. By controlling the transistor 42 so that the transmission voltage $+HV1$ input from the feedback circuit 44 is a constant multiple of the comparison voltage V3, the transmission voltage $\pm HV1$ can be controlled to a desired value. It is thus possible to adjust the ultrasonic signal output transmitted from the ultrasonic transducers to an optimum value by enabling control of the transmission voltage value.

[0036] The charge pump circuit 50 is formed from capacitors 51 and 54 and diodes 52 and 53. The charge pump circuit 50 is connected to a point A between the regulator circuit and transistor 42, and driven by the regulator circuit to output a voltage higher than the transmission voltage $+HV1$ as the positive bias voltage $+HV2$.

[0037] Likewise, the charge pump circuit 60 is formed from capacitors 61 and 64 and diodes 62 and 63. The charge pump circuit 60 is connected to the point A between the regulator circuit and transistor 42, and driven by the regulator circuit to output a voltage lower than the transmission voltage $-HV1$ as the negative bias voltage $-HV2$.

[0038] By thus adding the charge pump circuits 50 and 60 to the transmitter power source 14 and driving the charge pump circuits 50 and 60 by the regulator in the transmitter power source 14, the bias voltage $+HV2$ higher than the transmission voltage $+HV1$ and the bias voltage $-HV2$ lower than the transmission voltage $-HV1$ can be obtained.

[0039] Desirably, the bias voltage $+HV2$ is 10 — 20V higher than the transmission voltage $+HV1$, and the bias voltage $-HV2$ is 10 — 20V lower than the transmission voltage $-HV1$. Therefore, if a desired bias voltage cannot be obtained by the one-stage charge pump circuit for the transmission voltage $\pm HV1$, a multi-stage configuration in which the charge pump circuit 50 or 60 is connected with an additional charge pump circuit may be employed.

[0040] A circuit configuration of the multi-stage power source section 13 in which the charge pump circuits are connected with additional charge pump circuits is shown in Figure 4. In the power source section shown in Figure 4, the charge pump circuit 50 is connected with an additional charge pump circuit 55 and the charge pump circuit 60 is connected with an additional charge pump circuit 65.

[0041] Particularly, the charge pump circuit 55 is formed from a capacitor 56 and diodes 57 and 58, and outputs a voltage still higher than the bias voltage $+HV2$ as a positive bias voltage $+HV3$. The charge pump circuit 65 is formed from a capacitor 66 and diodes 67 and 68, and outputs a voltage still lower than the bias voltage $-HV2$ as a negative bias voltage $-HV3$.

[0042] By thus using a multi-stage charge pump in which a charge pump circuit is connected with an additional charge pump circuit, the positive bias voltage can be increased to a desired value and the negative bias

voltage can be decreased to a desired value.

[0043] Although the charge pump is shown as having a dual-stage configuration in Figure 4, additional charge pump circuits may be added as needed. Moreover, in Figure 4, the bias voltage $\pm HV2$ output by the charge pump circuits 50 and 60 and the bias voltage $\pm HV3$ output by the charge pump circuits 55 and 65 are separately output.

[0044] Therefore, in the power source circuit shown in Figure 4, any one of $\pm HV2$ and $\pm HV3$ may be employed as a bias voltage depending upon the required voltage. The selection of the bias voltage can be made by any switching means such as a switch. Moreover, if the value $\pm HV3$ is constantly used as the bias voltage, the switching means and output terminals for $\pm HV2$ are not needed.

[0045] Although the charge pump circuits 50 and 60 are connected to the point A between the regulator and transistor in the power source circuit shown in Figure 3, the connecting position for the charge pumps is not limited to the point A.

[0046] A variation of the power source circuit is shown in Figure 5. In Figure 5, the charge pump circuit 50 is connected to a point B between the inductor 35 and diode 37 in the transmitter power source 14. The charge pump circuit 60 is connected to a point C between the inductor 35 and diode 39 in the transmitter power source 14.

[0047] When the charge pump circuit 50 is connected to the point B, its output $+HV2$ is again sufficiently higher than the transmission voltage $+HV1$. Similarly, when the charge pump circuit 60 is connected to the point C, its output $-HV2$ is sufficiently lower than the transmission voltage $-HV1$. Therefore, points to which the charge pump circuits 50 and 60 are to be connected can be freely designed taking the overall circuit configuration and the like into account.

[0048] Next, the output of the transmitter power source 14 will be described. The transmission voltage $\pm HV1$ output by the transmitter power source 14 is supplied to the ultrasonic transducers for use in transmission of ultrasonic signals, and therefore, removal of noise from the transmission voltage $\pm HV1$ is important. To remove noise from the transmission voltage $\pm HV1$, a voltage drop circuit or a filter circuit is needed.

[0049] Figure 6 shows an exemplary circuit for use in the noise removal for the transmitter power source 14. Figure 6(a) is a circuit configuration in which a voltage drop circuit is employed for the noise removing circuit. As shown, the voltage drop circuit 70 is made from a transistor 71 and a feedback circuit 72. The feedback circuit 72 conducts switching control of the transistor 71 with reference to a voltage $V4$, and the value of voltage $+HV1$ is reduced by a predetermined amount to output a voltage $+HV1a$. A similar voltage drop circuit is connected to the voltage $-HV1$, and the value of voltage $-HV1$ is increased by a predetermined amount to output a voltage $-HV1a$.

[0050] By supplying the voltage $+HV1a$ and $-HV1a$ to the transmission/reception beamformer 17, power source with lower noise than in supplying the voltage $\pm HV1$ is achieved. Preferably, the difference between the voltages $+HV1$ and $+HV1a$ is of the order of 3 V.

[0051] Figure 6(b) is a circuit configuration in which a filter circuit is employed for the noise removing circuit. As shown, the filter circuit 75 is made from an inductor 76 and a capacitor 77. The filter circuit 75 outputs a voltage $+HV1b$ obtained by removing noise of predetermined frequency from the voltage $+HV1$. A similar filter circuit is connected to the voltage $-HV1$, and a voltage $-HV1b$ obtained by removing noise of predetermined frequency from the voltage $-HV1$ is output.

[0052] By supplying the voltage $+HV1b$ and $-HV1b$ to the transmission/reception beamformer 17, power source with lower noise than in supplying the voltage $\pm HV1$ is achieved. The frequency of noise removed by the filter circuit is determined by the inductor 76 and capacitor 77.

[0053] As described above, in the ultrasonic diagnostic apparatus in accordance with the present embodiment, the charge pump circuits are connected to the transmitter power source for the transmission/reception beamformer 17, and outputs of the charge pump circuits are employed as a bias power source for the analog switch, and therefore, the power source section is reduced in size and power consumption is reduced.

[0054] Moreover, since a charge pump circuit for generating a positive bias voltage and that for generating a negative bias voltage each can be made by two capacitors and two diodes, the power source section can be constructed with a simple configuration and at a low cost. Although a driving circuit for the charge pump may be separately provided, it is possible to use an output of the switching driving circuit in the transmitter power source. Furthermore, a circuit design with a high degree of freedom can be realized by using a multi-stage configuration of the charge pump or changing connection points between the charge pumps and transmitter power source.

[0055] In addition, since the low power consumption of such a configuration reduces the amount of heat generation from the power source section, no large cooling means is needed. While cooling means such as forced air cooling is needed if the amount of heat generation from the power source section is large, such cooling means is not needed, and hence, the ultrasonic diagnostic apparatus is further reduced in size.

[0056] The size reduction and lowering of power consumption of the power source section itself, and, in addition, the fact that no cooling means is needed, enable the ultrasonic diagnostic apparatus to have smaller overall size and longer battery operation time, and therefore, a small portable ultrasonic diagnostic apparatus can be implemented.

[0057] Although the analog switch 16 is provided inside the ultrasonic diagnostic apparatus 1 in the present

embodiment, the present invention may be applied without limitation on the position of the analog switch; for example, the analog switch may be provided inside the ultrasonic probe.

[0058] Moreover, a charge pump circuit is employed in the present invention. This is because a capacitor used in the charge pump is smaller and cheaper than a small-size transformer. The basic efficacy of the present invention is, however, obtainable by constructing the bias power source from the transmitter power source using the small-size transformer.

5 wherein said transmitter power source comprises a stabilizing power source circuit for decreasing and stabilizing the positive voltage value supplied to said transmitter circuit, and a stabilizing power source circuit for increasing and stabilizing the negative voltage value supplied to said transmitter circuit.

10

Claims

15

1. An ultrasonic diagnostic apparatus for transmitting ultrasonic signals from ultrasonic transducers toward a subject to be examined, and receiving reflected waves of said ultrasonic signals for display, comprising:
an analog switch for switching ultrasonic transducers for transmission of said ultrasonic signals and reception of said reflected waves;
a transmitter power source for supplying a high voltage to a transmitter circuit for causing said ultrasonic transducers to drive said ultrasonic signals; and
a bias power source generating circuit for generating a bias power source for said analog switch from said transmitter power source.
2. The ultrasonic diagnostic apparatus of claim 1, wherein said bias power source generating circuit comprises a positive bias power source generating circuit for outputting a voltage value higher than a positive voltage value of said transmitter power source, and a negative bias power source generating circuit for outputting a voltage lower than a negative voltage value of said transmitter power source.
3. The ultrasonic diagnostic apparatus of claim 1, wherein a circuit for generating said bias power source from said transmitter power source is a charge pump.
4. The ultrasonic diagnostic apparatus of claim 1, wherein said apparatus is a transmission voltage control circuit for variably controlling the voltage value of said transmitter power source.
5. The ultrasonic diagnostic apparatus of claim 3 or 4, wherein a driving circuit for said charge pump shares a driving circuit in said transmitter power source.
6. The ultrasonic diagnostic apparatus of claim 1,

20

25

30

35

40

45

50

55

FIG. 1

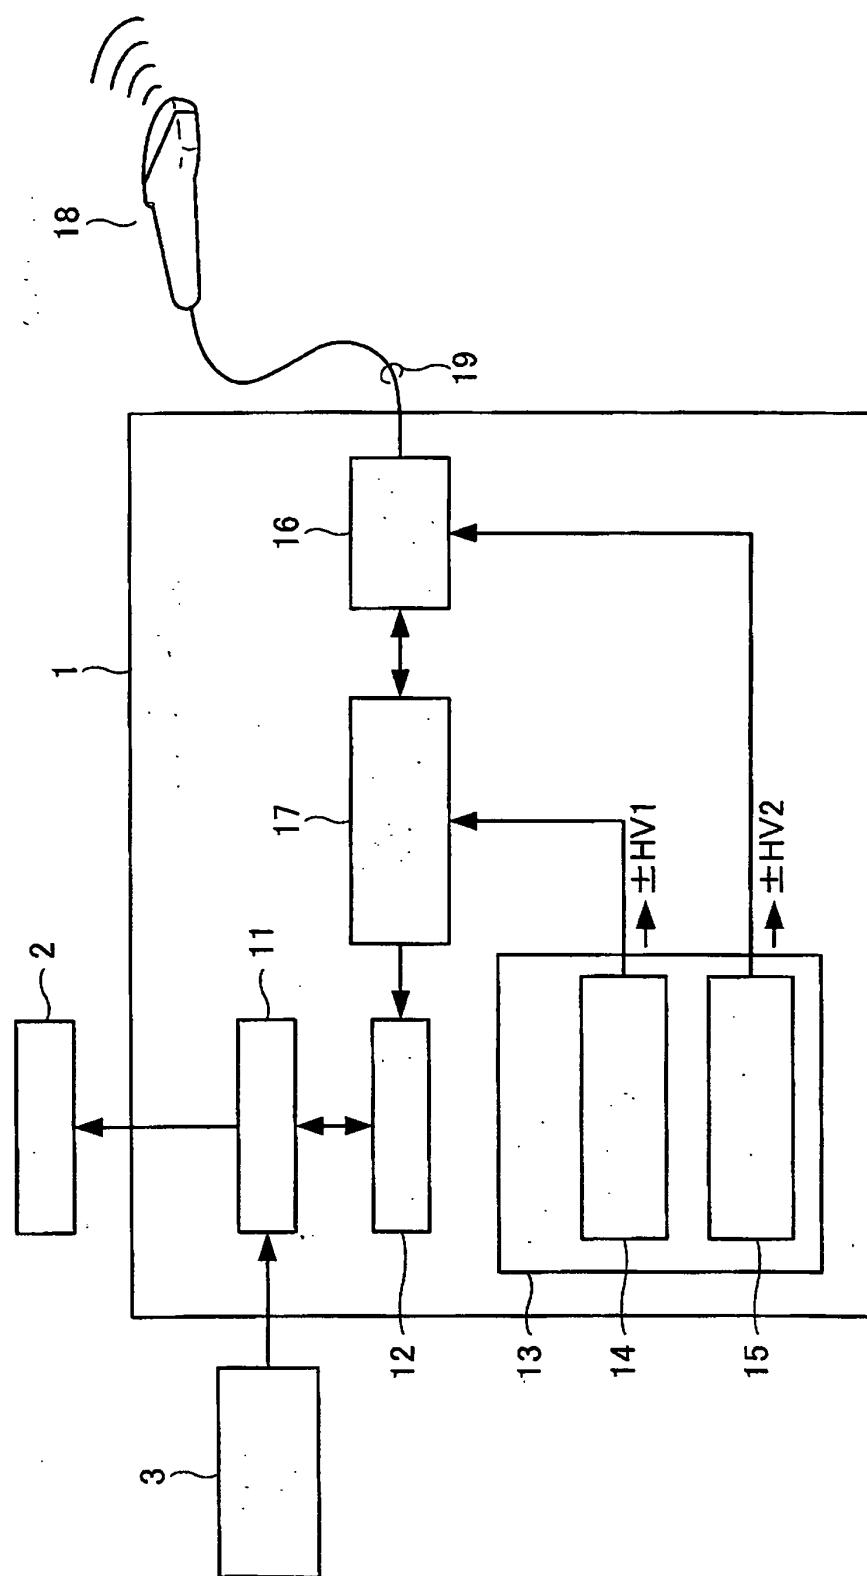


FIG. 2

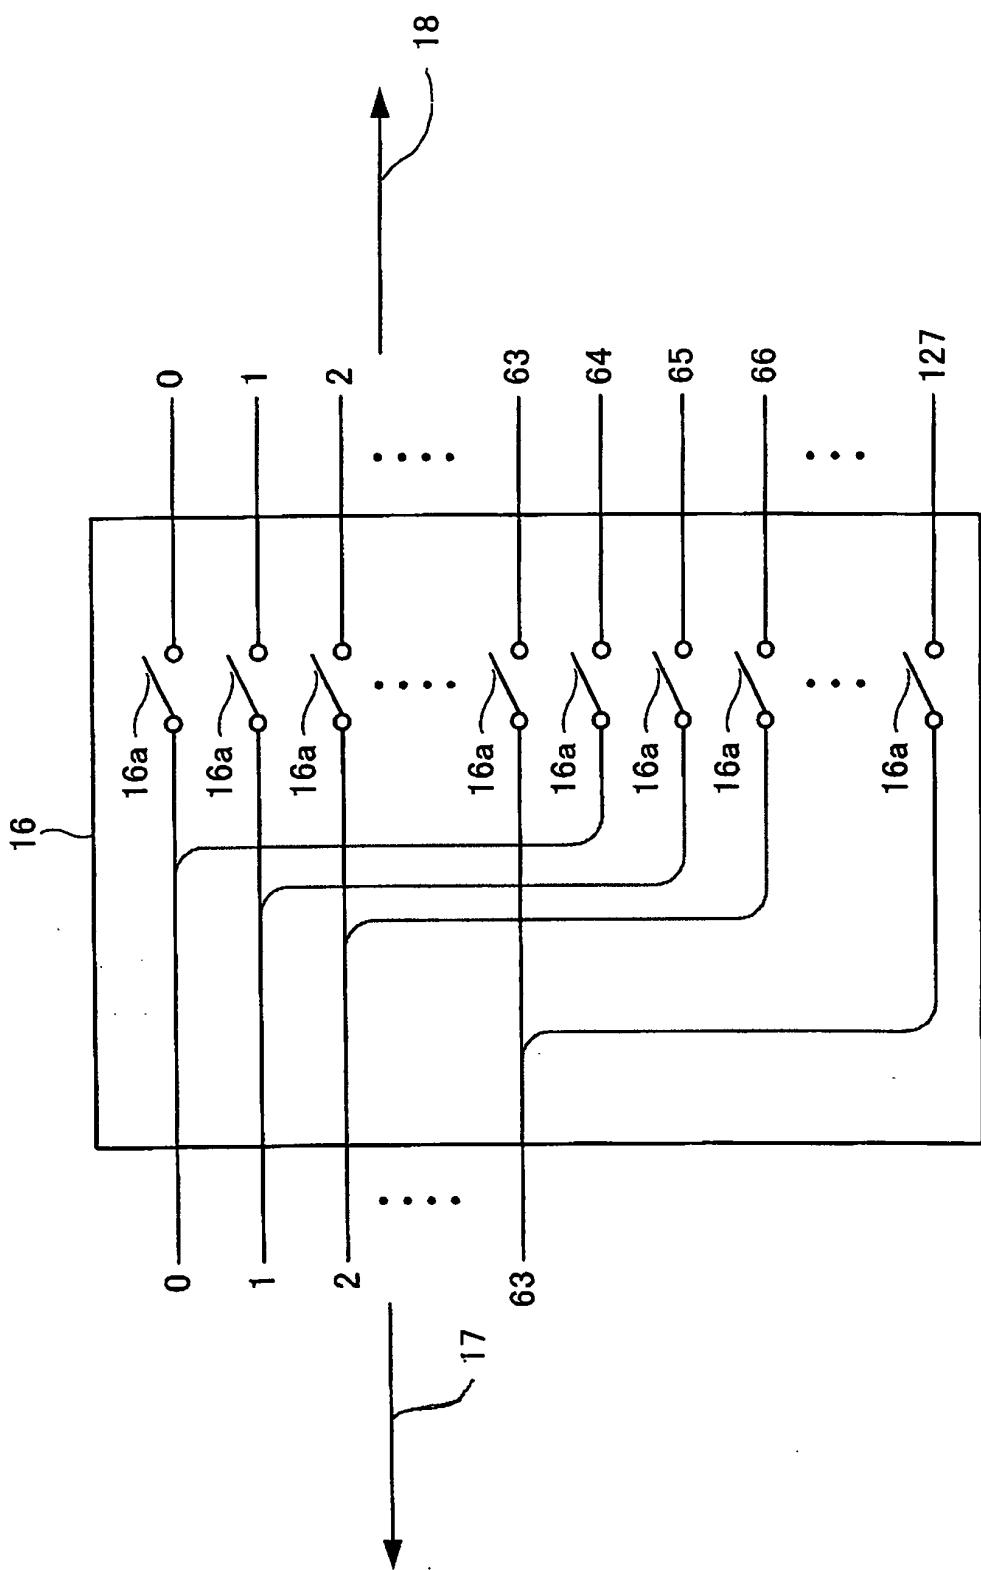


FIG. 3

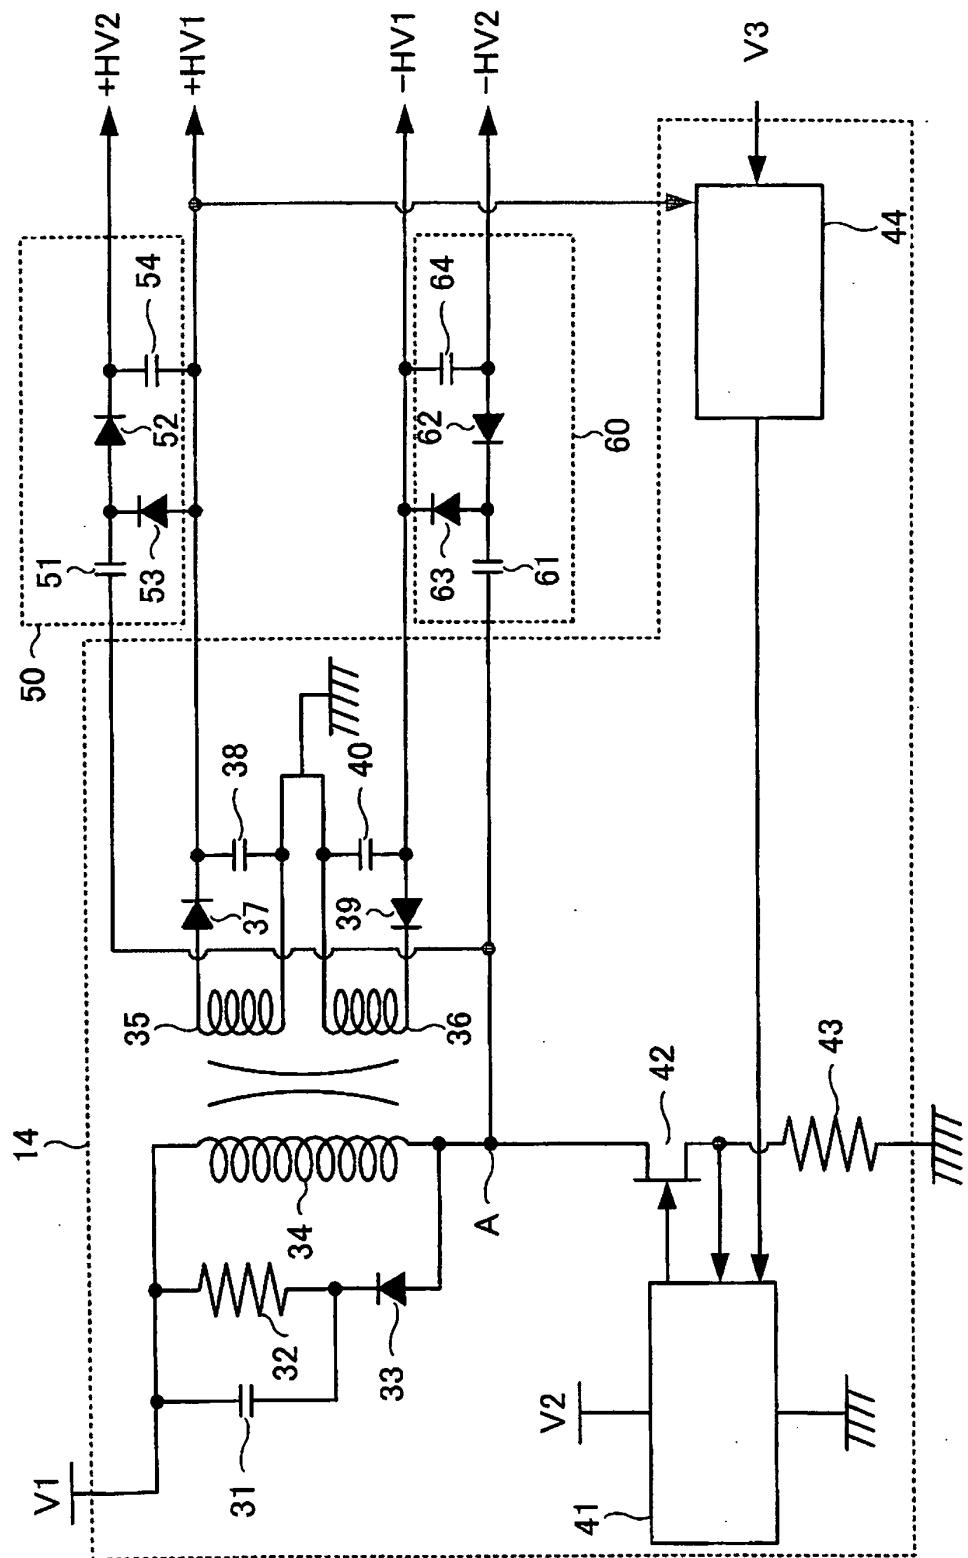


FIG. 4

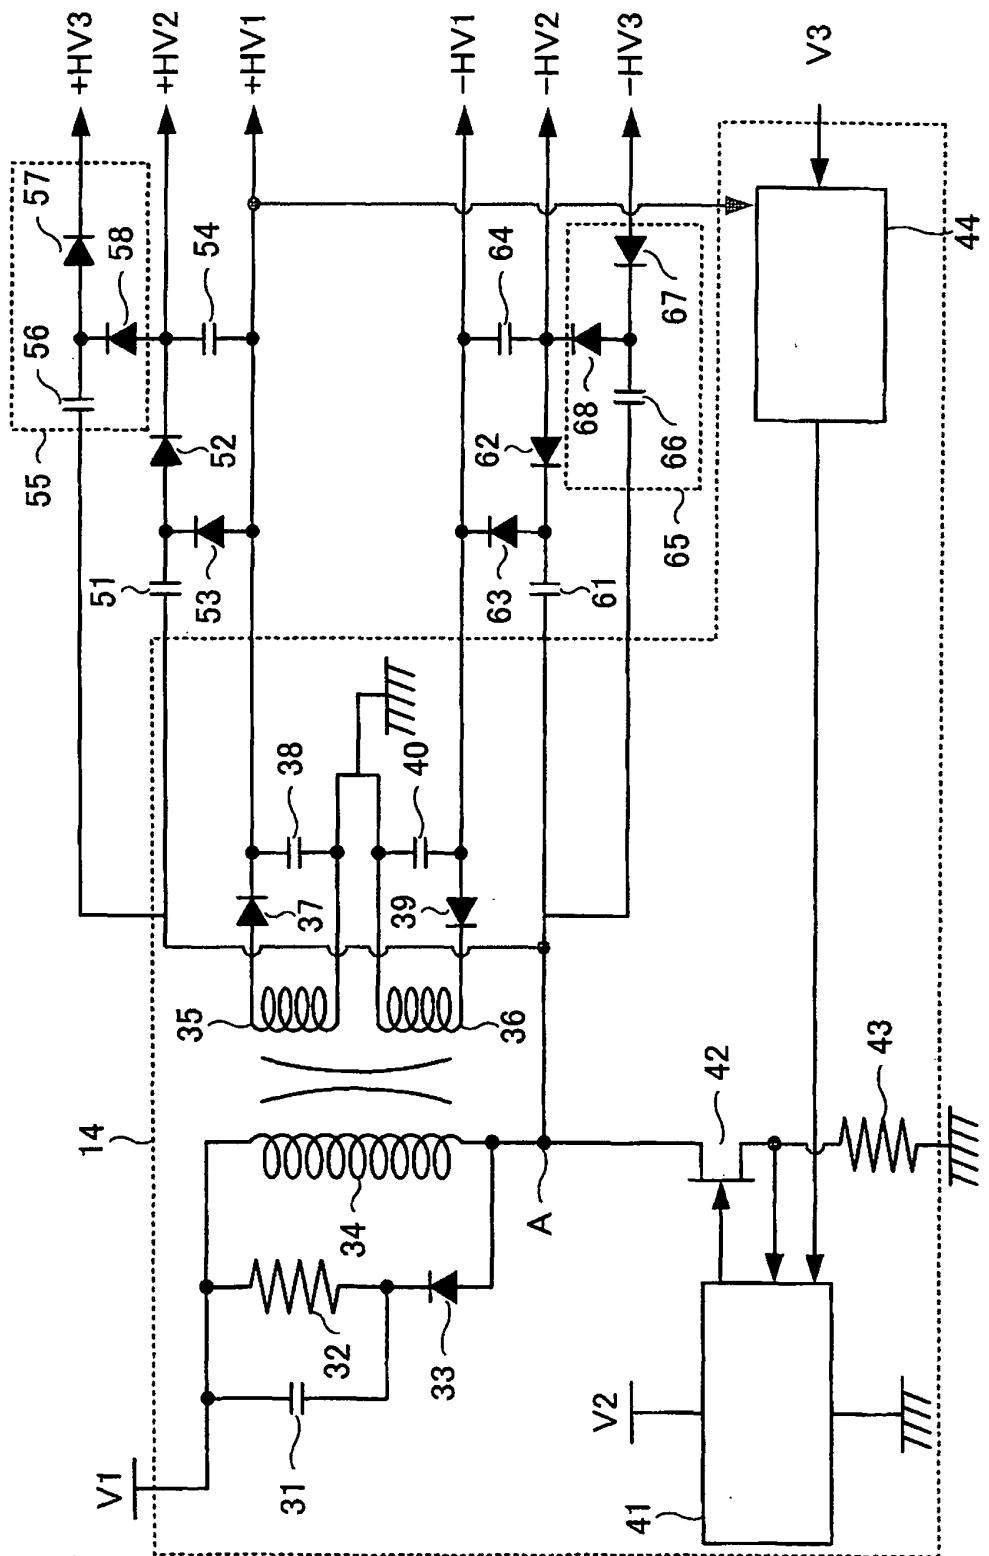


FIG. 5


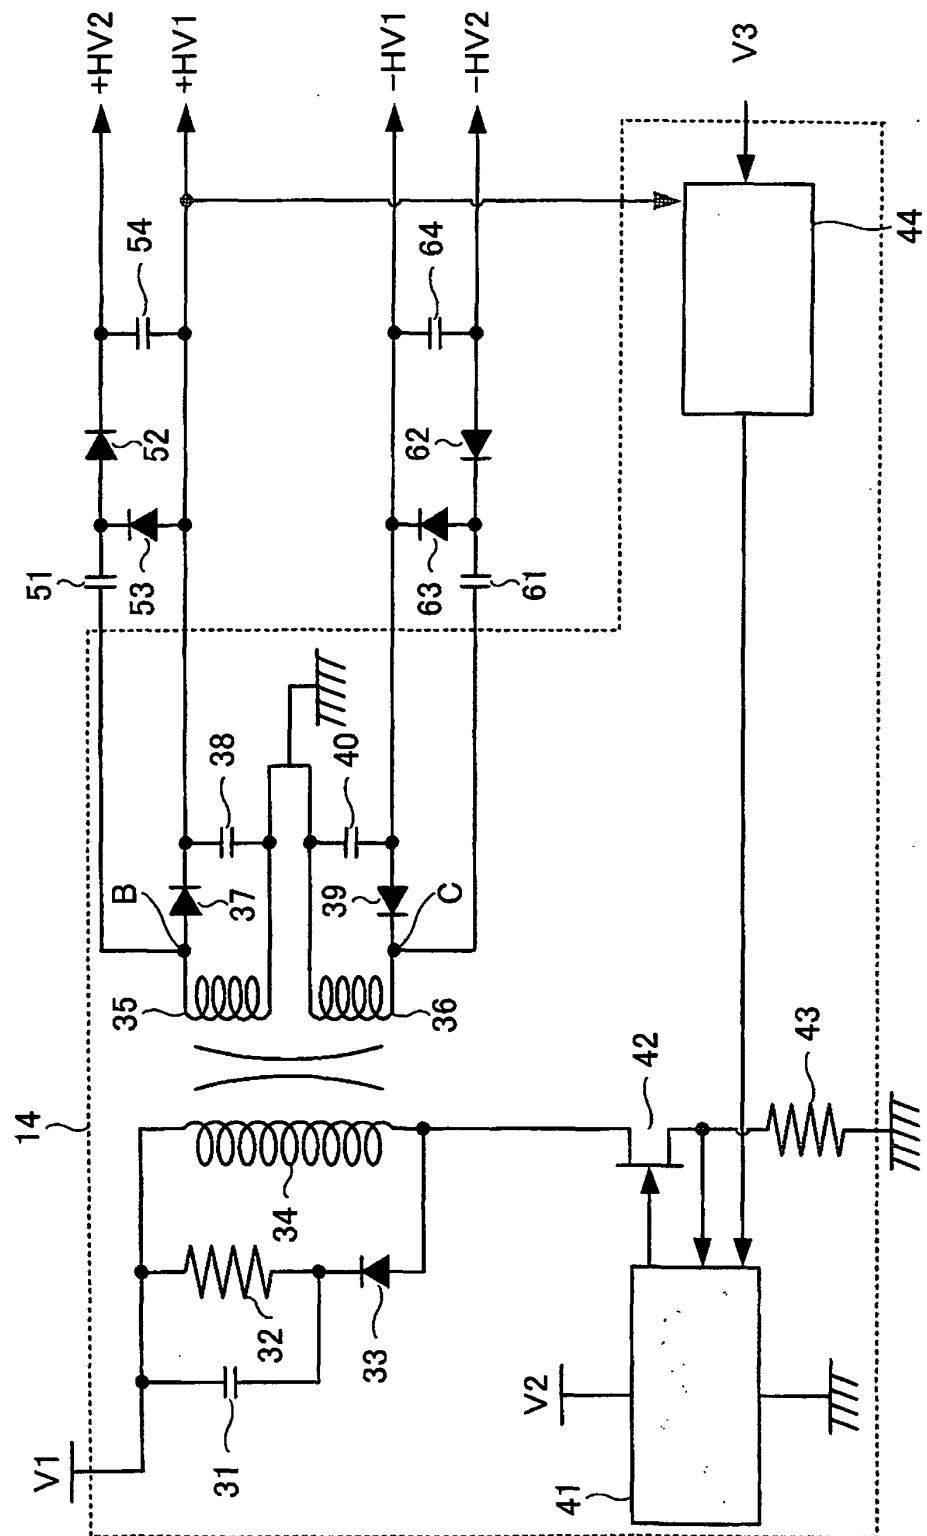


FIG. 6

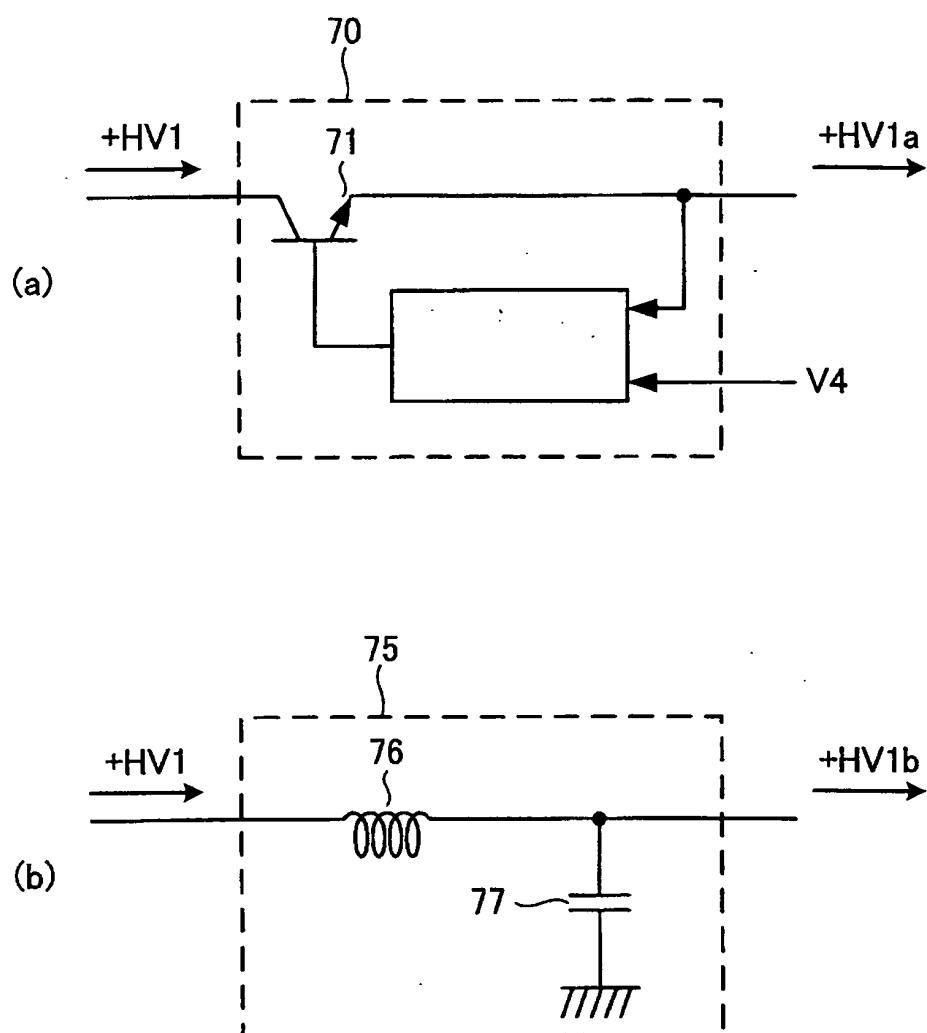

专利名称(译)	超声诊断设备的电源		
公开(公告)号	EP1445624A2	公开(公告)日	2004-08-11
申请号	EP2004250581	申请日	2004-02-04
申请(专利权)人(译)	GE医疗系统的全球技术公司LLC		
当前申请(专利权)人(译)	GE医疗系统的全球技术公司LLC		
[标]发明人	AMEMIYA SHINICHI		
发明人	AMEMIYA, SHINICHI		
IPC分类号	A61B8/00 B06B1/02 G01S7/524 G01S7/52		
CPC分类号	B06B1/0215 A61B8/44 B06B2201/76 G01S7/52019		
优先权	2003029405 2003-02-06 JP		
其他公开文献	EP1445624A3 EP1445624B1		
外部链接	Espacenet		

摘要(译)

为了减小超声波诊断装置中的电源的尺寸和功耗，电荷泵电路 (50 和 60) 连接到发射器电源 (14)。发射器电源 (14) 中的调节器驱动电荷泵电路 (50) 以产生高于由发射器电源 (14) 产生的正电压+ HV1 的正偏置电压+ HV2。发射器电源 (14) 中的调节器还驱动电荷泵电路 (60) 以产生低于由发射器电源 (14) 产生的负电压-HV1 的负偏置电压-HV2。

FIG. 3

