



(19) Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 814 157 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.08.2007 Bulletin 2007/31

(51) Int Cl.:
H01L 27/32 (2006.01)

(21) Application number: 07101057.3

(22) Date of filing: 24.01.2007

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(30) Priority: 27.01.2006 KR 20060008769

(71) Applicant: **Samsung SDI Co., Ltd.**
Suwon-si
Gyeonggi-do (KR)

(72) Inventor: **LEE, Jong Woo**
Gyeonggi-do (KR)

(74) Representative: **Hengelhaupt, Jürgen et al**
Anwaltskanzlei
Gulde Hengelhaupt Ziebig & Schneider
Wallstrasse 58/59
10179 Berlin (DE)


(54) Sheet unit including a plurality of organic light emitting display panels and fabricating method of the same

(57) The invention relates to a sheet unit including a first organic light emitting display unit (150a) and an adjacent second organic light emitting display unit (150b), wherein the first and second display units (150a, 150b) are sharing a common first substrate (100) and a common second substrate (200). The sheet unit is being characterized in that
(i) the first and second display units (150a, 150b) are further sharing a common reinforcing member (152) being

disposed between the first and second substrate (100, 200), being arranged between the first and second display units (150a, 150b) and being formed of a light cured material; and

(ii) a shielding pattern (153) is formed longitudinally on a surface of the reinforcing member (152) adjacent to the first and/or second substrate (100, 200) thereby dividing the surface of the reinforcing member (152) into a first portion and second portion.

FIG. 4

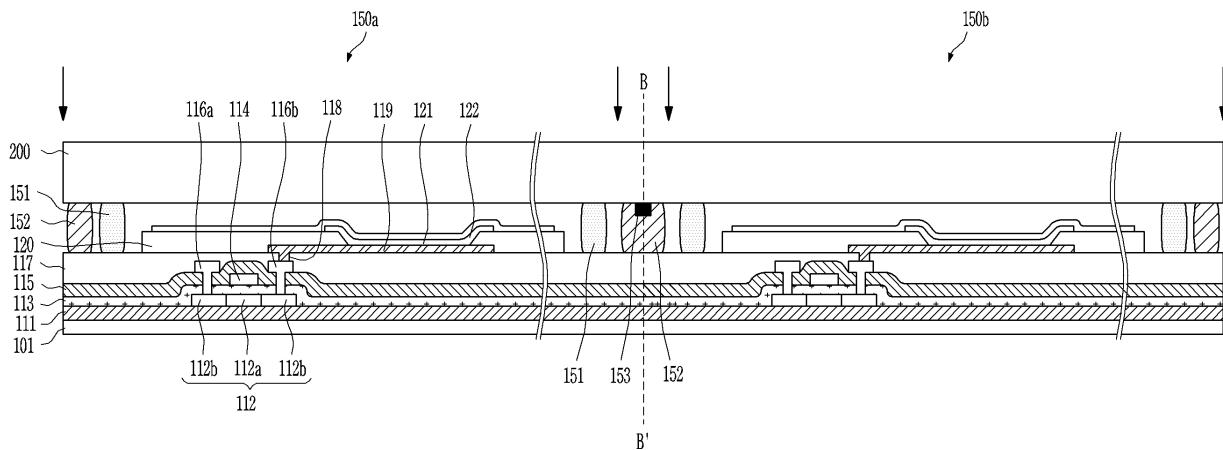

Description

[0001] The present invention relates to a sheet unit including a plurality of organic light emitting display panels as well as to a fabricating method thereof.

Discussion of Related Art

[0002] In recent years, organic light emitting display using organic light emitting diode has been watched. The organic light emitting display is an emissive display, which electrically excites organic compound having fluorescent characteristic to emit light. The organic light emitting display can drive with a low voltage, has excellent light-emission, a wide angle of visibility, and a high-speed response. The organic light emitting display includes a plurality of pixels formed on a substrate. Each of the pixels includes an organic light emitting diode and a thin film transistor (TFT) for driving the organic light emitting diode. Since such an organic light emitting diode is susceptible to oxygen and water, a sealing structure has been proposed to prevent the oxygen and moisture from contacting the organic material by covering a deposition substrate with a metal cap having absorbent or a sealing glass substrate. U.S. Patent No. 6,998,776 discloses a structure for sealing an organic light emitting diode with a frit.

[0003] Generally, the organic light emitting display are manufactured by cutting (i. e. scribing along a scribing line and then cutting along said scribing line) a sheet unit bearing a plurality of display panels into single display units. To lessen impacts applied to the frit during the cutting process it is known to provide a reinforcing member in each display panel. The reinforcing members are arranged in a peripheral region of the display panels. In the state of art each display panel in the sheet unit is provided with at least one separate reinforcing member to ensure that the cutting process does not impact the frit. More precisely, a first display panel and an adjacent second display panel each having a reinforcing member being arranged in the peripheral regions of the first and second display panels such that they face each other. During the cutting process the sheet unit will be scribed along a scribing line between the adjacent reinforcing members of the first and second display panel and the cut along the scribing line.

[0004] In principle and for purpose of simplifying the manufacturing process, it might be thinkable to unify the two adjacent reinforcing members of the first and second display panels to provide one common reinforcing member. During the cutting process the sheet unit will be scribed along a scribing line which follows the common reinforcing member. However, it has been shown that such a cutting process may result in damage such as crack.

SUMMARY OF CERTAIN INVENTIVE ASPECTS

[0005] One aspect of the present invention provides an organic light emitting display and a fabricating method of the same, which may easily control a process, and improve a printing characteristic by forming two specific continuously arranged display panels to share with a reinforcing member. One aspect of the present invention provides an organic light emitting display and a fabricating method of the same, which may partially cure a shared reinforcing member using a metal pattern formed at one region of the reinforcing member that allows a cutting process of a substrate to be easily performed.

[0006] According to a first aspect of the present invention there is provided a sheet unit including a first organic light emitting display unit and an adjacent second organic light emitting display unit, wherein the first and second display units are sharing a common first substrate and a common second substrate. The sheet unit being characterized in that

- 25 (i) the first and second display units are further sharing a common reinforcing member being disposed between the first and second substrate, being arranged between the first and second display units and being formed of a light cured material; and
- 30 (ii) a shielding pattern is formed longitudinally on a surface of the reinforcing member adjacent to the first and/or second substrate thereby dividing the surface of the reinforcing member into a first portion and second portion.

[0007] The shielding pattern may be made of a material impermeable for ultra-violet light. Preferably, the shielding pattern is made of a metal, especially copper or aluminum.

[0008] The reinforcing member may be made of a light cured, especially ultra-violet light cured resin. Preferably, the reinforcing member is made of at least one of a resin selected from the group consisting of an epoxy resin, an poly(acrylate), poly(urethane acrylate) and poly(acrylate cyanide).

[0009] Preferably, the shielding pattern is positioned in a middle of the reinforcing member.

[0010] According to a second aspect of the present invention there is provided a method for fabricating a sheet unit including a first organic light emitting display unit and an adjacent second organic light emitting display unit, the method comprising the steps of:

50 (a) providing a sheet unit including a first organic light emitting display unit and an adjacent second organic light emitting display unit, wherein the first and second display units are sharing a common first substrate and a common second substrate, and wherein

55 (i) the first and second display units are further

sharing a common reinforcing member being disposed between the first and second substrate, being arranged between the first and second display units and being formed of a light curable material; and

(ii) a shielding pattern is formed longitudinally on a surface of the reinforcing member adjacent to the first and/or second substrate thereby dividing the surface of the reinforcing member into a first portion and second portion; and

(b) curing the reinforcing member by irradiation of light through the first and/or second substrate which is adjacent to the shielding pattern.

[0011] Preferably, step (b) is performed by ultra-violet light.

[0012] Another aspect of the invention is to provide an organic light emitting display unit received by cutting the above mentioned sheet unit along its shielding pattern. When cutting the inventive sheet unit, the cutting line for separating common substrates into a plurality of displays units are shielded. The common reinforcing member between two substrates is divided into two separate parts each now positioned on a side surface of the resulting two display units. Thus, the resulting display units are cut by accuracy and damages of the sealed substrates could be avoided. The display units received could be distinguish from common display units in that the side surfaces still wear at least parts of the shielding pattern.

[0013] One aspect of the present invention provides an organic light emitting display, which may comprise: a first mother substrate including a first display panel and a second display panel, the first display panel having a first pixel region and a non-pixel region, and the second display panel being arranged sequential to the first display panel, and having a second pixel region and a second non-pixel region; a second mother substrate sealed to the first mother substrate in order to at least seal the first pixel region and the second pixel region; a frit disposed between the first non-pixel region and the second non-pixel region of the first mother substrate, and the second mother substrate, for adhering the first and second mother substrates to each other; a reinforcing member formed along a peripheral region of the frit to be shared by one region of the first non-pixel region and the second non-pixel region; and a metal pattern formed at least one region among regions shared with the reinforcing member to shield a cutting line.

[0014] One aspect of the present invention provides a method for fabricating an organic light emitting display including a first mother substrate including a first display panel and a second display panel, the first display panel having a first pixel region and a non-pixel region, and the second display panel being arranged sequential to the first display panel, and having a second pixel region and a second non-pixel region; and a second mother substrate sealed to the first mother substrate in order to at

least seal the first pixel region and the second pixel region, which may comprise the steps of: (i) forming a metal pattern extending from one region of the second mother substrate; (ii) forming a frit between the first and second non-pixel regions and the second mother substrate and sintering the formed frit at a predetermined temperature; (iii) forming a reinforcing member to be shared by one of the first and second non-pixel regions along a peripheral region of the frit; (iv) sealing the second mother substrate to the first mother substrate so that the pixel region is sealed; (v) curing the reinforcing member; (vi) sintering the frit; and (vii) cutting the sealed first and second substrates along a formation region of the metal pattern to form a plurality of display panels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] These and other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of embodiments, taken in conjunction with the accompanying drawings of which:

FIG. 1a to FIG. 1d are perspective views showing a plurality of organic light emitting display devices and a fabricating method thereof according to an embodiment of the present invention;

FIG. 2 is an enlarged perspective view showing a part A of FIG. 1c;

FIG. 3 is a cross-sectional view showing an organic light emitting display according to an embodiment of the present invention;

FIG. 4 is a cross-sectional view showing an unfinished product to be cut in accordance with one embodiment;

FIG. 5A is a schematic exploded view of a passive matrix type organic light emitting display device in accordance with one embodiment;

FIG. 5B is a schematic exploded view of an active matrix type organic light emitting display device in accordance with one embodiment;

FIG. 5C is a schematic top plan view of an organic light emitting display in accordance with one embodiment;

FIG. 5D is a cross-sectional view of the organic light emitting display of FIG. 5C, taken along the line d-d; and

FIG. 5E is a schematic perspective view illustrating mass production of organic light emitting devices in accordance with one embodiment.

DETAILED DESCRIPTION OF EMBODIMENTS

[0016] Hereinafter, embodiments according to the present invention will be described with reference to the accompanying drawings.

[0017] An organic light emitting display (OLED) is a display device comprising an array of organic light emit-

ting diodes. Organic light emitting diodes are solid state devices which include an organic material and are adapted to generate and emit light when appropriate electrical potentials are applied.

[0018] OLEDs can be generally grouped into two basic types dependent on the arrangement with which the stimulating electrical current is provided. Fig. 5A schematically illustrates an exploded view of a simplified structure of a passive matrix type OLED 1000. Fig. 5B schematically illustrates a simplified structure of an active matrix type OLED 1001. In both configurations, the OLED 1000, 1001 includes OLED pixels built over a substrate 1002, and the OLED pixels include an anode 1004, a cathode 1006 and an organic layer 1010. When an appropriate electrical current is applied to the anode 1004, electric current flows through the pixels and visible light is emitted from the organic layer.

[0019] Referring to Fig. 5A, the passive matrix OLED (PMOLED) design includes elongate strips of anode 1004 arranged generally perpendicular to elongate strips of cathode 1006 with organic layers interposed therebetween. The intersections of the strips of cathode 1006 and anode 1004 define individual OLED pixels where light is generated and emitted upon appropriate excitation of the corresponding strips of anode 1004 and cathode 1006. PMOLEDs provide the advantage of relatively simple fabrication.

[0020] Referring to Fig. 5B, the active matrix OLED (AMOLED) includes localdriving circuits 1012 arranged between the substrate 1002 and an array of OLED pixels. An individual pixel of AMOLEDs is defined between the common cathode 1006 and an anode 1004, which is electrically isolated from other anodes. Each driving circuit 1012 is coupled with an anode 1004 of the OLED pixels and further coupled with a data line 1016 and a scan line 1018. In embodiments, the scan lines 1018 supply scan signals that select rows of the driving circuits, and the data lines 1016 supply data signals for particular driving circuits. The data signals and scan signals stimulate the local driving circuits 1012, which excite the anodes 1004 so as to emit light from their corresponding pixels.

[0021] In the illustrated AMOLED, the local driving circuits 1012, the data lines 1016 and scan lines 1018 are buried in a planarization layer 1014, which is interposed between the pixel array and the substrate 1002. The planarization layer 1014 provides a planar top surface on which the organic light emitting pixel array is formed. The planarization layer 1014 may be formed of organic or inorganic materials, and formed of two or more layers although shown as a single layer. The local driving circuits 1012 are typically formed with thin film transistors (TFT) and arranged in a grid or array under the OLED pixel array. The local driving circuits 1012 may be at least partly made of organic materials, including organic TFT. AMOLEDs have the advantage of fast response time improving their desirability for use in displaying data signals. Also, AMOLEDs have the advantages of consuming less power than passive matrix OLEDs.

[0022] Referring to common features of the PMOLED and AMOLED designs, the substrate 1002 provides structural support for the OLED pixels and circuits. In various embodiments, the substrate 1002 can comprise rigid or flexible materials as well as opaque or transparent materials, such as plastic, glass, and/or foil. As noted above, each OLED pixel or diode is formed with the anode 1004, cathode 1006 and organic layer 1010 interposed therebetween. When an appropriate electrical current is applied to the anode 1004, the cathode 1006 injects electrons and the anode 1004 injects holes. In certain embodiments, the anode 1004 and cathode 1006 are inverted; i.e., the cathode is formed on the substrate 1002 and the anode is opposingly arranged.

[0023] Interposed between the cathode 1006 and anode 1004 are one or more organic layers. More specifically, at least one emissive or light emitting layer is interposed between the cathode 1006 and anode 1004. The light emitting layer may comprise one or more light emitting organic compounds. Typically, the light emitting layer is configured to emit visible light in a single color such as blue, green, red or white. In the illustrated embodiment, one organic layer 1010 is formed between the cathode 1006 and anode 1004 and acts as a light emitting layer.

[0024] Hole transporting and/or injection layers can be interposed between the light emitting layer 1010 and the anode 1004. Electron transporting and/or injecting layers can be interposed between the cathode 1006 and the light emitting layer 1010. The electron injection layer facilitates injection of electrons from the cathode 1006 toward the light emitting layer 1010 by reducing the work function for injecting electrons from the cathode 1006. Similarly, the hole injection layer facilitates injection of holes from the anode 1004 toward the light emitting layer 1010. The hole and electron transporting layers facilitate movement of the carriers injected from the respective electrodes toward the light emitting layer.

[0025] In some embodiments, a single layer may serve both electron injection and transportation functions or both hole injection and transportation functions. In some embodiments, one or more of these layers are lacking. In some embodiments, one or more organic layers are doped with one or more materials that help injection and/or transportation of the carriers. In embodiments where only one organic layer is formed between the cathode and anode, the organic layer may include not only an organic light emitting compound but also certain functional materials that help injection or transportation of carriers within that layer.

[0026] There are numerous organic materials that have been developed for use in these layers including the light emitting layer. Also, numerous other organic materials for use in these layers are being developed. In some embodiments, these organic materials may be

macromolecules including oligomers and polymers. In some embodiments, the organic materials for these layers may be relatively small molecules. The skilled artisan will be able to select appropriate materials for each of these layers in view of the desired functions of the individual layers and the materials for the neighboring layers in particular designs.

[0027] In operation, an electrical circuit provides appropriate potential between the cathode 1006 and anode 1004. This results in an electrical current flowing from the anode 1004 to the cathode 1006 via the interposed organic layer(s). In one embodiment, the cathode 1006 provides electrons to the adjacent organic layer 1010. The anode 1004 injects holes to the organic layer 1010. The holes and electrons recombine in the organic layer 1010 and generate energy particles called "excitons." The excitons transfer their energy to the organic light emitting material in the organic layer 1010, and the energy is used to emit visible light from the organic light emitting material. The spectral characteristics of light generated and emitted by the OLED 1000, 1001 depend on the nature and composition of organic molecules in the organic layer(s). The composition of the one or more organic layers can be selected to suit the needs of a particular application by one of ordinary skill in the art.

[0028] OLED devices can also be categorized based on the direction of the light emission. In one type referred to as "top emission" type, OLED devices emit light and display images through the cathode or top electrode 1006. In these embodiments, the cathode 1006 is made of a material transparent or at least partially transparent with respect to visible light. In certain embodiments, to avoid losing any light that can pass through the anode or bottom electrode 1004, the anode may be made of a material substantially reflective of the visible light. A second type of OLED devices emits light through the anode or bottom electrode 1004 and is called "bottom emission" type. In the bottom emission type OLED devices, the anode 1004 is made of a material which is at least partially transparent with respect to visible light. Often, in bottom emission type OLED devices, the cathode 1006 is made of a material substantially reflective of the visible light. A third type of OLED devices emits light in two directions, e.g. through both anode 1004 and cathode 1006. Depending upon the direction(s) of the light emission, the substrate may be formed of a material which is transparent, opaque or reflective of visible light.

[0029] In many embodiments, an OLED pixel array 1021 comprising a plurality of organic light emitting pixels is arranged over a substrate 1002 as shown in Fig. 5C. In embodiments, the pixels in the array 1021 are controlled to be turned on and off by a driving circuit (not shown), and the plurality of the pixels as a whole displays information or image on the array 1021. In certain embodiments, the OLED pixel array 1021 is arranged with respect to other components, such as drive and control electronics to define a display region and a non-display region. In these embodiments, the display region refers

to the area of the substrate 1002 where OLED pixel array 1021 is formed. The non-display region refers to the remaining areas of the substrate 1002. In embodiments, the non-display region can contain logic and/or power supply circuitry. It will be understood that there will be at least portions of control/drive circuit elements arranged within the display region. For example, in PMOLEDs, conductive components will extend into the display region to provide appropriate potential to the anode and cathodes. In AMOLEDs, local driving circuits and data/scan lines coupled with the driving circuits will extend into the display region to drive and control the individual pixels of the AMOLEDs.

[0030] One design and fabrication consideration in OLED devices is that certain organic material layers of OLED devices can suffer damage or accelerated deterioration from exposure to water, oxygen or other harmful gases. Accordingly, it is generally understood that OLED devices be sealed or encapsulated to inhibit exposure to moisture and oxygen or other harmful gases found in a manufacturing or operational environment. Fig. 5D schematically illustrates a cross-section of an encapsulated OLED device 1011 having a layout of Fig. 5C and taken along the line d-d of Fig. 5C. In this embodiment, a generally planar top plate or substrate 1061 engages with a seal 1071 which further engages with a bottom plate or substrate 1002 to enclose or encapsulate the OLED pixel array 1021. In other embodiments, one or more layers are formed on the top plate 1061 or bottom plate 1002, and the seal 1071 is coupled with the bottom or top substrate 1002, 1061 via such a layer. In the illustrated embodiment, the seal 1071 extends along the periphery of the OLED pixel array 1021 or the bottom or top plate 1002, 1061.

[0031] In embodiments, the seal 1071 is made of a frit material as will be further discussed below. In various embodiments, the top and bottom plates 1061, 1002 comprise materials such as plastics, glass and/or metal foils which can provide a barrier to passage of oxygen and/or water to thereby protect the OLED pixel array 1021 from exposure to these substances. In embodiments, at least one of the top plate 1061 and the bottom plate 1002 are formed of a substantially transparent material.

[0032] To lengthen the life time of OLED devices 1011, it is generally desired that seal 1071 and the top and bottom plates 1061, 1002 provide a substantially non-permeable seal to oxygen and water vapor and provide a substantially hermetically enclosed space 1081. In certain applications, it is indicated that the seal 1071 of a frit material in combination with the top and bottom plates 1061, 1002 provide a barrier to oxygen of less than approximately 10^{-3} cc/m²-day and to water of less than 10^{-6} g/m²-day. Given that some oxygen and moisture can permeate into the enclosed space 1081, in some embodiments, a material that can take up oxygen and/or moisture is formed within the enclosed space 1081.

[0033] The seal 1071 has a width W, which is its thickness in a direction parallel to a surface of the top or bottom

substrate 1061, 1002 as shown in Fig. 5D. The width varies among embodiments and ranges from about 300 μm to about 3000 μm , optionally from about 500 μm to about 1500 μm . Also, the width may vary at different positions of the seal 1071. In some embodiments, the width of the seal 1071 may be the largest where the seal 1071 contacts one of the bottom and top substrate 1002, 1061 or a layer formed thereon. The width may be the smallest where the seal 1071 contacts the other. The width variation in a single cross-section of the seal 1071 relates to the cross-sectional shape of the seal 1071 and other design parameters.

[0034] The seal 1071 has a height H , which is its thickness in a direction perpendicular to a surface of the top or bottom substrate 1061, 1002 as shown in Fig. 5D. The height varies among embodiments and ranges from about 2 μm to about 30 μm , optionally from about 10 μm to about 15 μm . Generally, the height does not significantly vary at different positions of the seal 1071. However, in certain embodiments, the height of the seal 1071 may vary at different positions thereof.

[0035] In the illustrated embodiment, the seal 1071 has a generally rectangular cross-section. In other embodiments, however, the seal 1071 can have other various cross-sectional shapes such as a generally square cross-section, a generally trapezoidal cross-section, a cross-section with one or more rounded edges, or other configuration as indicated by the needs of a given application. To improve hermeticity, it is generally desired to increase the interfacial area where the seal 1071 directly contacts the bottom or top substrate 1002, 1061 or a layer formed thereon. In some embodiments, the shape of the seal can be designed such that the interfacial area can be increased.

[0036] The seal 1071 can be arranged immediately adjacent the OLED array 1021, and in other embodiments, the seal 1071 is spaced some distance from the OLED array 1021. In certain embodiment, the seal 1071 comprises generally linear segments that are connected together to surround the OLED array 1021. Such linear segments of the seal 1071 can extend, in certain embodiments, generally parallel to respective boundaries of the OLED array 1021. In other embodiment, one or more of the linear segments of the seal 1071 are arranged in a non-parallel relationship with respective boundaries of the OLED array 1021. In yet other embodiments, at least part of the seal 1071 extends between the top plate 1061 and bottom plate 1002 in a curvilinear manner.

[0037] As noted above, in certain embodiments, the seal 1071 is formed using a frit material or simply "frit" or glass frit," which includes fine glass particles. The frit particles includes one or more of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li_2O), sodium oxide (Na_2O), potassium oxide (K_2O), boron oxide (B_2O_3), vanadium oxide (V_2O_5), zinc oxide (ZnO), tellurium oxide (TeO_2), aluminum oxide (Al_2O_3), silicon dioxide (SiO_2), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P_2O_5) ruthenium oxide (Ru_2O), ru-

bidium oxide (Rb_2O), rhodium oxide (Rh_2O), ferrite oxide (Fe_2O_3), copper oxide (CuO), titanium oxide (TiO_2), tungsten oxide (WO_3), bismuth oxide (Bi_2O_3), antimony oxide (Sb_2O_3), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate, etc. In embodiments, these particles range in size from about 2 μm to about 30 μm , optionally about 5 μm to about 10 μm , although not limited only thereto. The particles can be as large as about the distance between the top and bottom substrates 1061, 1002 or any layers formed on these substrates where the frit seal 1071 contacts.

[0038] The frit material used to form the seal 1071 can also include one or more filler or additive materials. The filler or additive materials can be provided to adjust an overall thermal expansion characteristic of the seal 1071 and/or to adjust the absorption characteristics of the seal 1071 for selected frequencies of incident radiant energy. The filler or additive material(s) can also include inversion and/or additive fillers to adjust a coefficient of thermal expansion of the frit. For example, the filler or additive materials can include transition metals, such as chromium (Cr), iron (Fe), manganese (Mn), cobalt (Co), copper (Cu), and/or vanadium. Additional materials for the filler or additives include ZnSiO_4 , PbTiO_3 , ZrO_2 , eucryptite.

[0039] In embodiments, a frit material as a dry composition contains glass particles from about 20 to 90 about wt%, and the remaining includes fillers and/or additives. In some embodiments, the frit paste contains about 10-30 wt% organic materials and about 70-90% inorganic materials. In some embodiments, the frit paste contains about 20 wt% organic materials and about 80 wt% inorganic materials. In some embodiments, the organic materials may include about 0-30 wt% binder(s) and about 70-100 wt% solvent(s). In some embodiments, about 10 wt% is binder(s) and about 90 wt% is solvent(s) among the organic materials. In some embodiments, the inorganic materials may include about 0-10 wt% additives, about 20-40 wt% fillers and about 50-80 wt% glass powder. In some embodiments, about 0-5 wt% is additive(s), about 25-30 wt% is filler(s) and about 65-75 wt% is the glass powder among the inorganic materials.

[0040] In forming a frit seal, a liquid material is added to the dry frit material to form a frit paste. Any organic or inorganic solvent with or without additives can be used as the liquid material. In embodiments, the solvent includes one or more organic compounds. For example, applicable organic compounds are ethyl cellulose, nitro cellulose, hydroxyl propyl cellulose, butyl carbitol acetate, terpineol, butyl cellulose, acrylate compounds.

50 Then, the thus formed frit paste can be applied to form a shape of the seal 1071 on the top and/or bottom plate 1061, 1002.

[0041] In one exemplary embodiment, a shape of the seal 1071 is initially formed from the frit paste and interposed between the top plate 1061 and the bottom plate 1002. The seal 1071 can in certain embodiments be pre-cured or pre-sintered to one of the top plate and bottom plate 1061, 1002. Following assembly of the top plate

1061 and the bottom plate 1002 with the seal 1071 interposed therebetween, portions of the seal 1071 are selectively heated such that the frit material forming the seal 1071 at least partially melts. The seal 1071 is then allowed to resolidify to form a secure joint between the top plate 1061 and the bottom plate 1002 to thereby inhibit exposure of the enclosed OLED pixel array 1021 to oxygen or water.

[0042] In embodiments, the selective heating of the frit seal is carried out by irradiation of light, such as a laser or directed infrared lamp. As previously noted, the frit material forming the seal 1071 can be combined with one or more additives or filler such as species selected for improved absorption of the irradiated light to facilitate heating and melting of the frit material to form the seal 1071.

[0043] In some embodiments, OLED devices 1011 are mass produced. In an embodiment illustrated in Fig. 5E, a plurality of separate OLED arrays 1021 is formed on a common bottom substrate 1101. In the illustrated embodiment, each OLED array 1021 is surrounded by a shaped frit to form the seal 1071. In embodiments, common top substrate (not shown) is placed over the common bottom substrate 1101 and the structures formed thereon such that the OLED arrays 1021 and the shaped frit paste are interposed between the common bottom substrate 1101 and the common top substrate. The OLED arrays 1021 are encapsulated and sealed, such as via the previously described enclosure process for a single OLED display device. The resulting product includes a plurality of OLED devices kept together by the common bottom and top substrates. Then, the resulting product is cut into a plurality of pieces, each of which constitutes an OLED device 1011 of Fig. 5D. In certain embodiments, the individual OLED devices 1011 then further undergo additional packaging operations to further improve the sealing formed by the frit seal 1071 and the top and bottom substrates 1061, 1002.

[0044] When cutting the resulting product into a plurality of OLED devices with frit seals, the damages such as crack may occur due to, for example, stress concentration. These damages may lead to a physical breakage of the devices and to decrease of reliability.

[0045] FIG. 1a to FIG. 1d are perspective views showing a sheet unit including a plurality of organic light emitting display devices and a fabricating method thereof according to an embodiment of the present invention. FIG. 2 is an enlarged perspective view showing a part A of FIG. 1 c. With reference to FIG. 1 a to FIG. 1 d, FIG. 2 and FIG. 4, hereinafter, two display panels among a plurality of organic light emitting display panels 150 arranged side by sides are referred to as "first display panel 150a" and "second display panel 150b".

[0046] With respect to FIG. 2 and 4 a sheet unit includes at least a first display unit 150a and an adjacent second display unit 150b. The first and second display units 150a, 150b are sharing a common first substrate 100 and a common second substrate 200. The first and

second display units 150a, 150b are further sharing a common reinforcing member 152 being disposed between the first and second substrate 150a, 150b, being arranged between the first and second display units 100,

5 200 and being formed of a light cured material. A shielding pattern (see especially FIG. 4) is formed longitudinally on a surface of the reinforcing member 152 adjacent to the second substrate 200 thereby dividing the surface of the reinforcing member into a first portion and second portion.

[0047] Thus, the first substrate 100 includes at least a first display panel 150a and a second display panel 150b (see especially FIG. 3). The first display panel 150a includes a first pixel region 100a and a non-pixel region 100b. The second display panel 150a is arranged next to the first display panel, and includes a second pixel region 100a and a second non-pixel region 100b. The second substrate 200 is attached to the first substrate 100 to seal at least the first pixel region 100a and the second pixel region 100b. The shielding pattern 153 is formed one region of the second substrate 200. The shielding pattern 153 is formed to shield a cutting line B-B' (see FIG. 2 and 4) for separating common substrates 100 and 200 into a plurality of display panels 150. In one embodiment, the cutting line B-B' is positioned in the middle of the first non-pixel region 100b and the second non-pixel region 100b.

[0048] In the illustrated embodiment, the shielding pattern 153 is shown in the drawings to extend on the second substrate 200, although not limited thereto. When the ultra-violet rays are irradiated to the reinforcing member 152 through the second substrate 200, the shielding pattern 153 extending from one region of the second substrate 200 prevents a part of the reinforcing member 152 of the cutting line B-B' from being completely cured. That is, in one embodiment, the shielding pattern 153 may be formed to extend on the first substrate 100 (not shown). Here, the shielding pattern 153 functions as a mask. Accordingly, in a process of curing the reinforcing member 152 using ultra-violet rays, when the ultra-violet rays are irradiated to the reinforcing member 152 through the first substrate 100, the shielding pattern 153 extending on the first substrate 100 prevents a part of the reinforcing member 152 of the cutting line B-B' from being completely cured. In a device in which the reinforcing members 152 are completely cured, cutting process may result in damages of the sealed substrates 100 and 200 such as a crack. Here, the shielding pattern 153 is formed by a metal material capable of blocking of ultra-violet rays. The shielding pattern 153 is formed by at least one metal material selected from a copper or aluminum.

[0049] Next, frits 151 are formed at one side of the second substrate 200 to seal at least a pixel region 100a of the first substrate 100. That is, the frits 151 are coated along peripheral regions corresponding to a plurality of display panels (not shown). Here, each of the frit 151 includes filler (not shown) and an absorbent (not shown). The filler adjusts a coefficient of thermal expansion. The

absorbent absorbs a laser or an infrared ray. In one embodiment, when a temperature of heat applied to a glass material is suddenly reduced, the frit material in a glass power is produced. In general, a glass powder including an oxide powder is used. Further, when organic materials are added to the frit 151, a paste in a gel state is formed. After forming a frit material on the substrate, when the frit is sintered at a predetermined temperature, organic materials become extinct in the air, the paste in the gel state is cured and exits as a frit 151 in a solid state. In one embodiment, a temperature of sintering the frit 151 ranges from 300 °C to 700°C.

[0050] Then, a reinforcing member 152 is formed to extend along a peripheral region of the frit 151. Here, the reinforcing member 152 functions to lessen impacts applied to the frit 151 in a process of cutting the sealed substrates 100 and 200 into a plurality of display panels after the laser or the infrared ray was irradiated to the frit 151. Moreover, the reinforcing member 152 is further formed along an inner edge of the second substrate 200 so as to seal the second substrate 200 to the first substrate 100. Here, the reinforcing member 152 may be formed using a screen printing or dispensing method. The screen printing is provided by providing a mask having a desired design pattern at a metal sheet having a net structure and covering parts except the pattern using emulsion solution, and squeezing the reinforcing material by means of a squeezer, thereby resulting in a desired pattern of the reinforcing material on a second substrate. The dispensing is accomplished by placing the reinforcing material to have a predetermined shape and amount by means of a machine having a nozzle. At least one resin material selected from the group consisting of an epoxy resin, poly(acrylate), poly(urethane acrylate), and poly(acrylate cyanide) may be used as the reinforcing member 150 (FIG. 1a).

[0051] In a next process step, a first substrate 100 is arranged. Here, the first substrate 100 includes a first display panel 150a and a second display panel 150b. The first display panel 150a includes first pixel regions 100a and non-pixel regions 100b. The second display panel 150b is arranged next to the first display panel 150, and includes first pixel regions 100a and non-pixel regions 100b. At this time, to encapsulate a plurality of pixel regions 100a formed on the first substrate 100, a plurality of pixel regions 100a are arranged to face toward the second substrate 200 (FIG. 1 b). Next, the first substrate 100 and the second substrate 200 are attached to each other, and the reinforcing member 152 is cured by irradiation of ultra-violet through the second substrate 200. Then, a laser or infrared ray is irradiated to the frit 151 to be melted and resolidified. This causes the first substrate 100 and the second substrate 200 to be sealed (FIG. 1 c).

[0052] The sealed substrates 100 and 200 are cut to be separated into a plurality of display panels 150. At this time, the first display panel 150a and the second display panel 150b are cut along the shielding pattern 153 formed

at one region of shared non-pixel regions 150b. During the ultra-violet ray irradiation, the reinforcing members 152 in cutting regions were not completely cured, and thus, a cutting process can be easily accomplished without the damages such as a crack.

[0053] FIG. 3 is a cross-sectional view for showing an organic light emitting display according to an embodiment of the present invention. With reference to FIG. 3, the organic light emitting display device according to an embodiment of the present invention includes a first substrate 100, a frit 151, a reinforcing member 152, a metal pattern 153, and a second substrate 200.

[0054] With reference to FIG. 4, the first substrate 100 includes a deposition substrate 101 and at least one organic light emitting diode. The at least one organic light emitting diode is formed on the deposition substrate 101. First, a buffer layer 111 is formed on the deposition layer 101. The deposition substrate 101 is formed by a glass. The buffer layer 111 is formed by an insulating material such as silicon oxide SiO_2 , or silicon nitride SiN_x . On the other hand, the buffer layer 111 prevents the deposition substrate 101 from being damaged due to external heat and the like.

[0055] A semiconductor layer 112 is formed on at least one region of the buffer layer 111. The semiconductor layer 112 includes an active layer 112a and a source/drain region 112b. A gate insulation layer 113 is formed on the buffer layer 111 to have the semiconductor layer 112. A gate electrode 114 is formed on one region of the gate insulation layer 113. The gate electrode 114 has a size corresponding to a width of the active layer 112a. An interlayer insulation 115 is formed on the gate insulation layer 113 to have the gate electrode 114. Source and drain electrodes 116a and 116b are formed on a predetermined region of the interlayer insulation 115. The source and drain electrodes 116a and 116b are coupled to one exposed region of the source/drain region 112b. A planarization layer 117 is formed on the interlayer insulation 115 to have the source and drain electrodes 116a and 116b.

[0056] A first electrode 119 is formed on one region of the planarization layer 117. Here, the first electrode 119 is coupled with any one exposed region of the source and drain electrodes 116a and 116b through a via hole 118. A pixel definition film 120 is formed on the planarization layer 117 to have the first electrode 119. The pixel definition film 120 includes an opening portion (not shown) exposes at least one region of the first electrode 119. An organic layer 121 is formed on the opening portion of the pixel definition film 120. A second electrode layer 122 is formed on the pixel definition film 120 to have the organic layer 121. The frit 151 is disposed between the non-pixel region 100b of the first substrate 100 and the second substrate 200, and seals the first substrate 100 and the second substrate 200 to each other. The frit 151 may be coated so that pixel regions 100a formed at the first substrate 100 and a scan driver 400 are sealed. In an embodiment, the frit 151 is coated, thereby causing

at least the pixel regions 100a to be sealed. The reinforcing member 152 is spaced along a peripheral region of the frit 151. At this time, the reinforcing member 152 functions to lessen impacts applied to the frit 151 or the substrates during the process of cutting the sealed substrates 100 and 200 into a plurality of display panels or devices after the laser irradiates to the frit 151.

[0057] The shielding pattern 153 is formed at one region of a non-pixel region 150b disposed between the first display panel 150a and the second display panel 150b which are arranged side by side. At this time, the shielding pattern 153 may be selectively formed on the first substrate 100 or the second substrate 200 in accordance with an irradiation direction of ultra-violet ray. In one embodiment, the shielding pattern 153 can be also formed on both of the first substrate 100 and the second substrate 200. In certain embodiments, when the shielding pattern 153 is formed on the first substrate 100, it can be made of either the same metal as that of the source and drain electrodes 116a and 116b, or the same metal as that of the gate electrode 114. In this case, without adding an additional formation process of the shielding pattern 153, the shielding pattern 153 can be formed simultaneously with either a formation process of the source/drain electrodes 116a and 116b, or a formation process of the gate electrode 114. In order to protect the aforementioned structures formed on the first substrate 100 from external oxygen and moisture, the second substrate 200 is attached to the first substrate 100 by means of the frit 151. In one embodiment, the second substrate 200 is formed by at least one material selected from the group consisting of silicon oxide SiO_2 , silicon nitride SiN_x , and silicon oxynitride SiO_xN_y .

[0058] According to the organic light emitting display and a method for fabricating the same, by forming a common reinforcing member at non-pixel regions of two specific display panels arranged side by side, a process may be easily controlled and a printing characteristic may be enhanced. Further, a cutting process of sealed substrates can be easily performed by using a metal pattern formed on the shared reinforcing member. That is, the metal pattern functions as a mask causing the reinforcing member not to be completely cured, thereby improving an impact resistance of the sealed substrates.

Claims

1. A sheet unit including a first organic light emitting display unit (150a) and an adjacent second organic light emitting display unit (150b), wherein the first and second display units (150a, 150b) are sharing a common first substrate (100) and a common second substrate (200), the sheet unit being **characterized in that**
 - (i) the first and second display units (150a, 150b) are further sharing a common reinforcing mem-

ber (152) being disposed between the first and second substrate (100, 200), being arranged between the first and second display units (150a, 150b) and being formed of a light cured material; and

(ii) a shielding pattern (153) is formed longitudinally on a surface of the reinforcing member (152) adjacent to the first and/or second substrate (100, 200) thereby dividing the surface of the reinforcing member (152) into a first portion and second portion.

2. The sheet unit of claim 1, wherein the shielding pattern (153) is made of a material impermeable for ultra-violet light.
3. The sheet unit of claim 2, wherein the shielding pattern (153) is made of a metal.
4. The sheet unit of claim 3, wherein the shielding pattern (153) is made of copper or aluminum.
5. The sheet unit of any of claims 1 to 4, wherein the reinforcing member (152) is made of a light cured, especially ultra-violet light cured resin.
6. The sheet unit of any of claim 5, wherein the reinforcing member (152) is made of at least one of a resin selected from the group consisting of an epoxy resin, an poly(acrylate), poly(urethane acrylate) and poly(acrylate cyanide).
7. The sheet unit of any of the preceding claims, wherein the shielding pattern (153) is positioned in a middle of the reinforcing member (152).
8. A method for fabricating a sheet unit including a first organic light emitting display unit (150a) and an adjacent second organic light emitting display unit (150b), the method comprising the steps of:
 - (a) providing a sheet unit including the first organic light emitting display unit (150a) and the adjacent second organic light emitting display unit (150b), wherein the first and second display units (150a, 150b) are sharing a common first substrate (100) and a common second substrate (200), and wherein
 - (i) the first and second display units (150a, 150b) are further sharing a common reinforcing member (152) being disposed between the first and second substrate (100, 200), being arranged between the first and second display units (150a, 150b) and being formed of a light curable material; and
 - (ii) a shielding pattern (153) is formed longitudinally on a surface of the reinforcing

member (152) adjacent to the first and/or second substrate (100, 200) thereby dividing the surface of the reinforcing member (152) into a first portion and second portion; and

5

(b) curing the reinforcing member (152) by irradiation of light through the first and/or second substrate (100, 200) which is adjacent to the shielding pattern (153).

10

9. The method as claimed in claim 8, wherein step (b) is performed by ultra-violet light.

10. Organic light emitting display unit received by cutting a sheet unit according to any of claims 1 to 7 along its shielding pattern (153).

15

20

25

30

35

40

45

50

55

10

FIG. 1A

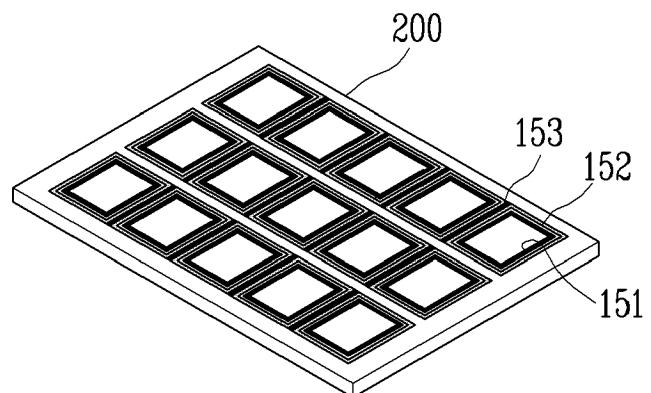


FIG. 1B

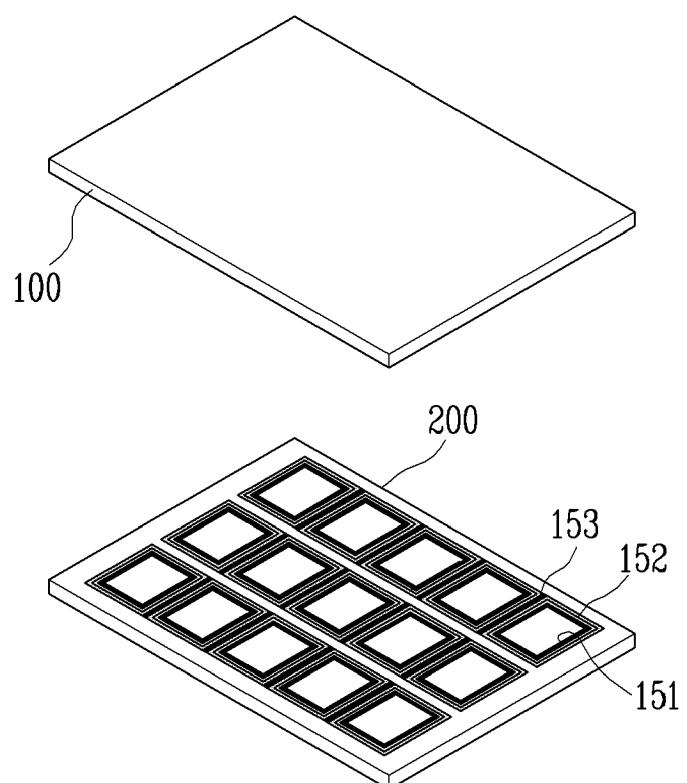


FIG. 1C

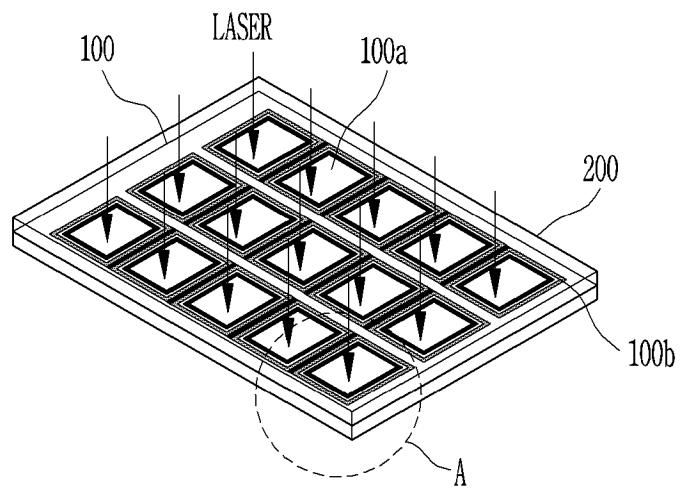


FIG. 1D

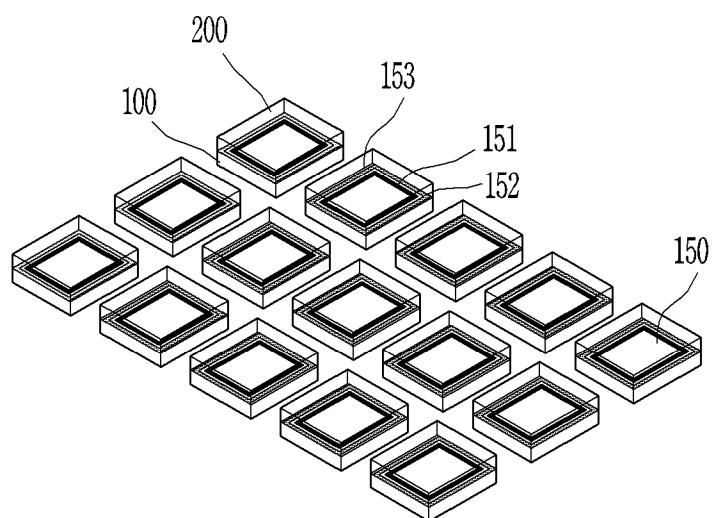


FIG. 2

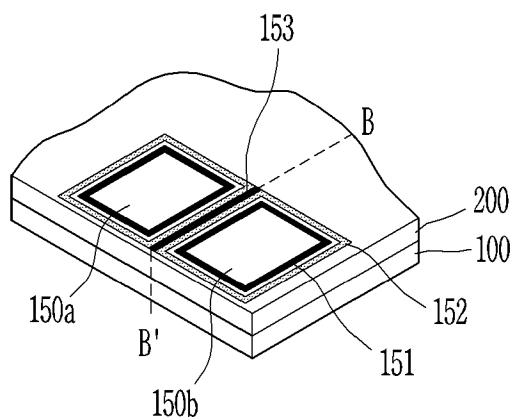


FIG. 3

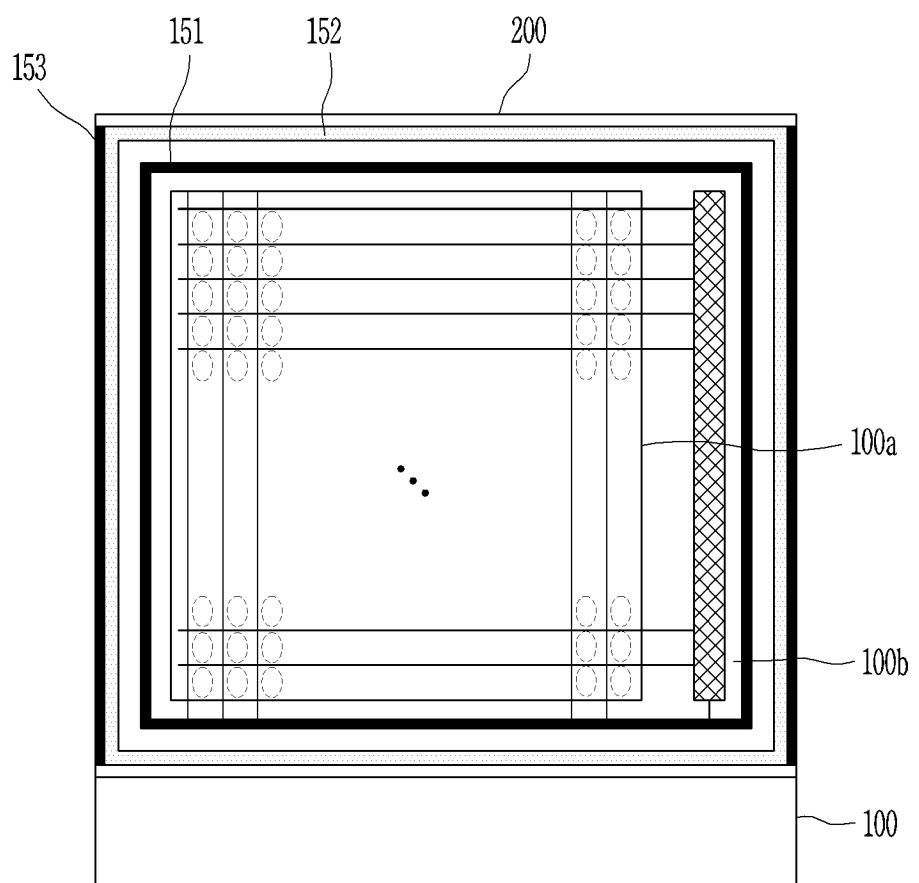


FIG. 4

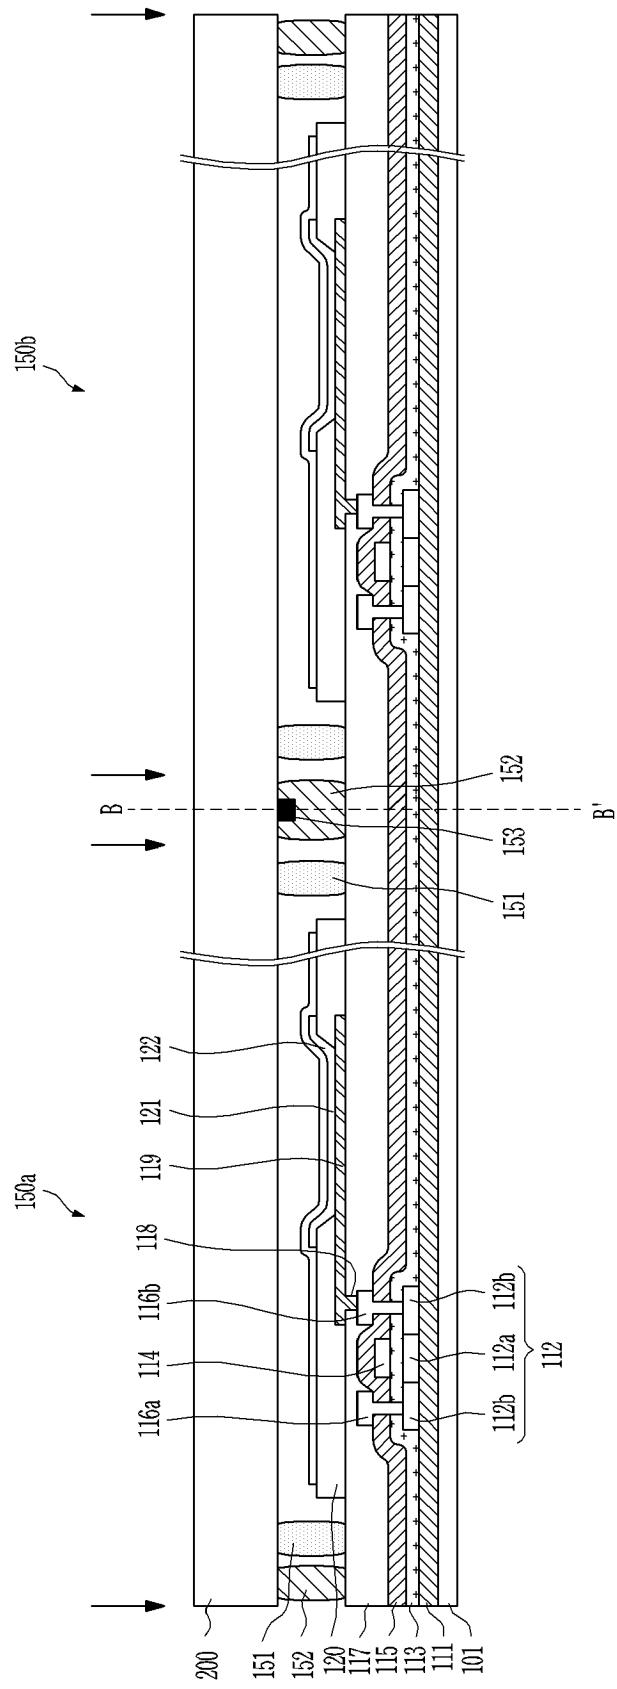
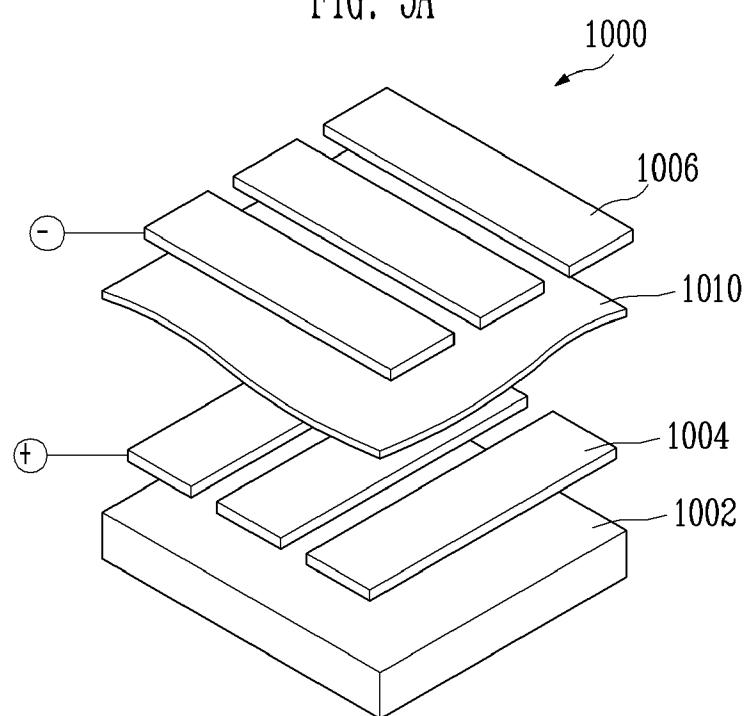


FIG. 5A



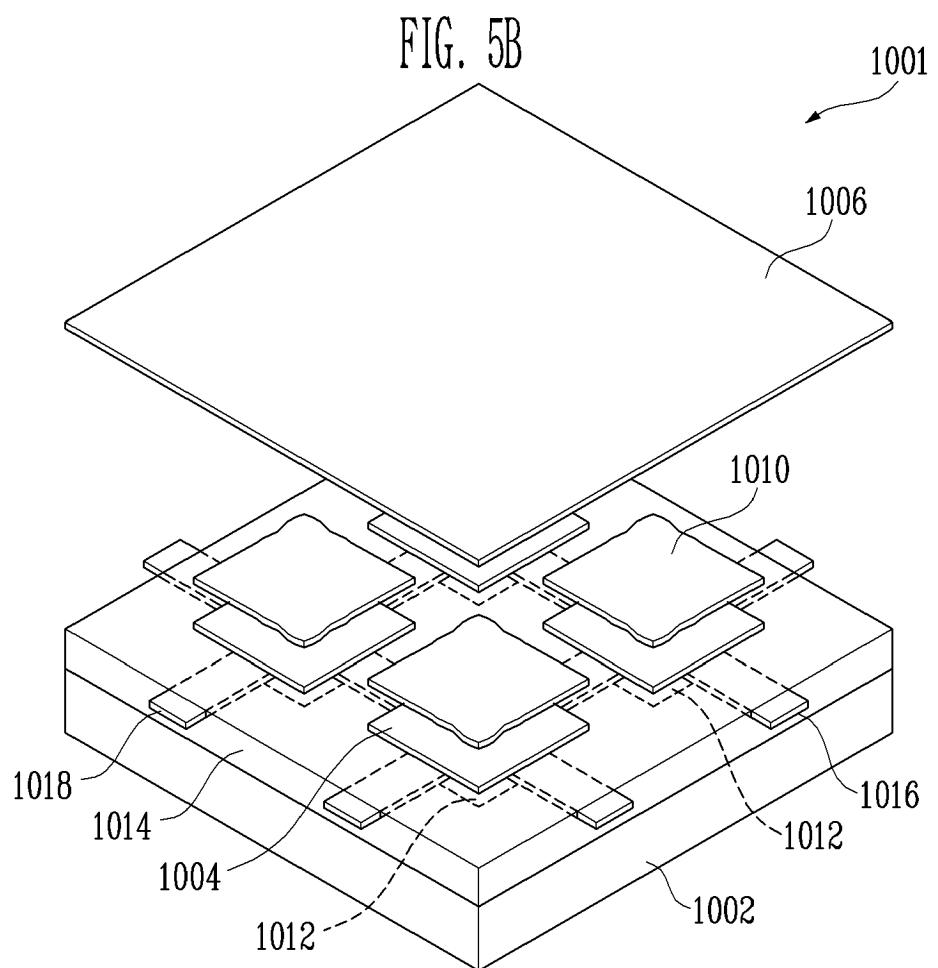


FIG. 5C

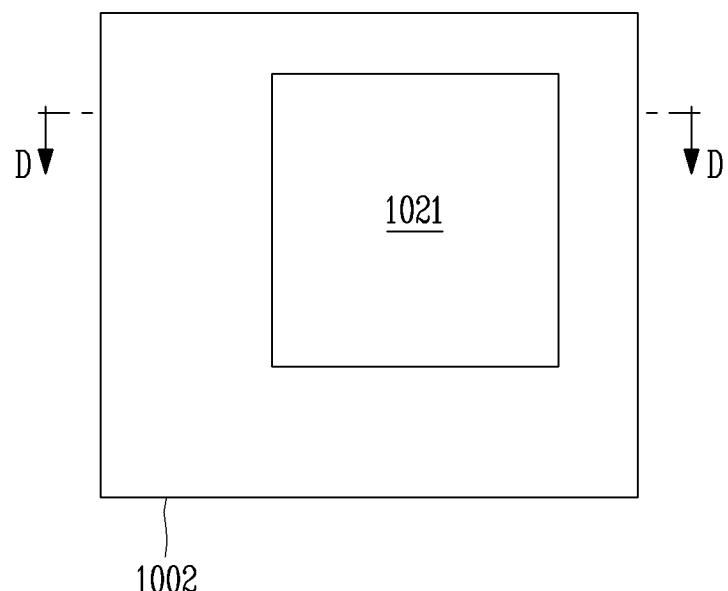


FIG. 5D


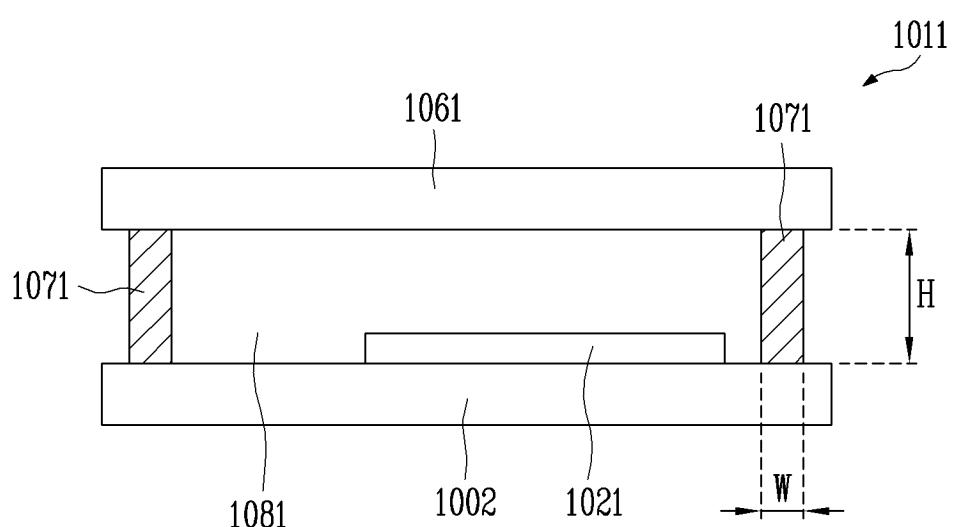


FIG. 5E

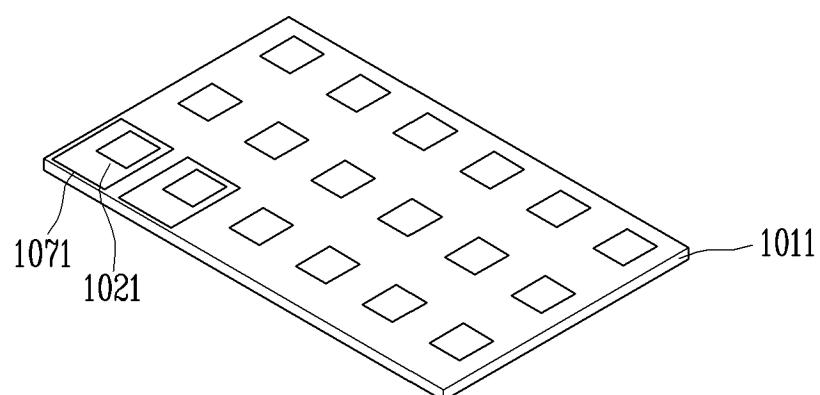

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6998776 B [0002]

专利名称(译)	片单元包括多个有机发光显示面板及其制造方法		
公开(公告)号	EP1814157A2	公开(公告)日	2007-08-01
申请号	EP2007101057	申请日	2007-01-24
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE JONG WOO		
发明人	LEE, JONG WOO		
IPC分类号	H01L27/32 B28D5/00 H01L51/52 H01L51/56		
CPC分类号	H01L51/5246 H01L27/3244 H01L27/3281 H01L51/0024 H01L51/56 H01L2251/566		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020060008769 2006-01-27 KR		
其他公开文献	EP1814157A3		
外部链接	Espacenet		

摘要(译)

本发明涉及一种包括第一有机发光显示单元 (150a) 和相邻的第二有机发光显示单元 (150b) 的片单元，其中第一和第二显示单元 (150a , 150b) 共用共同的第一基板 (100) 和共同的第二基板 (200)。片单元的特征在于：(i) 第一和第二显示单元 (150a , 150b) 进一步共用设置在第一和第二基板 (100,200) 之间的公共加强构件 (152)，布置在第一和第二基板之间。第二显示单元 (150a , 150b)，由光固化材料形成；(ii) 在加强构件 (152) 的与第一和/或第二基板 (100,200) 相邻的表面上纵向形成屏蔽图案 (153)，从而将加强构件 (152) 的表面分成第一部分和第二部分。

