



(11)

EP 2 296 442 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
16.03.2011 Bulletin 2011/11

(51) Int Cl.:
H05B 33/10 (2006.01) G09F 9/30 (2006.01)
H01L 27/32 (2006.01) H01L 51/50 (2006.01)
H05B 33/12 (2006.01) H05B 33/22 (2006.01)

(21) Application number: 09754421.7

(22) Date of filing: 25.05.2009

(86) International application number:
PCT/JP2009/002300

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

Designated Extension States:

AL BA RS

(30) Priority: 29.05.2008 JP 2008141291

(71) Applicant: **Panasonic Corporation**
Kadoma-shi
Osaka 571-8501 (JP)

(72) Inventors:

- HAYATA, Hiroshi
Osaka 540-6207 (JP)
- SUZUKI, Naoki
Osaka 540-6207 (JP)
- KANATA, Yoshio
Osaka 540-6207 (JP)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)**

(54) ORGANIC ELECTROLUMINESCENT DISPLAY AND MANUFACTURING METHOD THEREFOR

(57) This invention provides a means for suppressing streaks of light emission in an organic EL display having an organic light-emitting layer formed by coating by an ink jet method. A manufacturing process of the organic EL display of this invention includes: preparing a display substrate having two or more linear banks in parallel to each other, and two or more pixel regions arranged in a region between the linear banks; arranging an ink jet head such that the alignment direction of nozzles and the line direction of the linear banks are in parallel; and relatively moving the ink jet head in a direction perpendicular to the line direction of the linear banks and discharging the ink from the nozzles to apply the ink to every region defined by the linear banks.

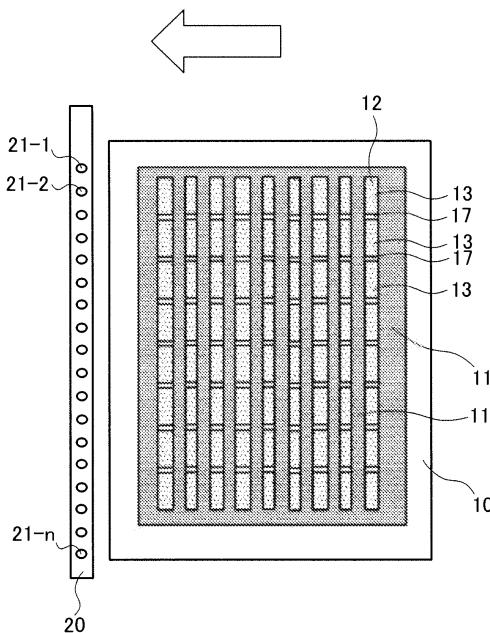


FIG.3A

Description

Technical Field

5 [0001] The present invention relates to a method of manufacturing an organic electroluminescent (EL) display. More particularly, the invention relates to a method of manufacturing an organic EL display in which an organic light-emitting layer is formed by a coating method (more specifically by an ink jet method).

Background Art

10 [0002] Organic EL displays can be broadly classified, according to methods with which their organic light-emitting layers are formed, into the following two types. One type employs a method of forming an organic light-emitting layer by deposition, which is used in the case where the organic light-emitting layer is made of a low-molecular-weight organic material. The other type employs a method of forming an organic light-emitting layer by a solvent coating method, which is often used in the case where the organic light-emitting layer is made of a polymeric organic material as well as a low-molecular-weight organic material.

15 [0003] As one of representative measures for forming an organic light-emitting layer by a solvent coating method, there is a method of discharging droplets of ink containing an organic light-emitting material into pixel regions of a display substrate using an ink jet device to form an organic light-emitting layer (see Patent Document 1). In the discharged droplet, an organic light-emitting material and a solvent are included.

20 [0004] The ink jet device includes an ink jet head having two or more nozzles. While controlling a positional relationship between the nozzles of the ink jet head and the display substrate, the ink jet device discharges ink from the nozzles. It is known that there are variations in size among droplets discharged from nozzles that the ink jet head has (see Patent Document 2). Reported in Patent Document 2 is a technique of causing a plurality of droplets to land on one pixel region and adjusting the landing position of each droplet, thereby improving film uniformity in the pixel region.

25 [0005] On the other hand, a pixel region of a display substrate into which droplets are discharged is often defined by a partition, referred to as a "bank". This is for the purpose of causing discharged ink to position-selectively remain in the pixel region. A plurality of pixels are arranged on the substrate in rows of respective colors (R, G or B) such that they form a stripe pattern. As one of methods of discharging droplets onto a display substrate having banks that partition pixels, a method of discharging droplets while causing an ink jet head of an ink jet device to scan in a direction perpendicular to the longitudinal direction of the stripe is known (see Patent Documents 4 to 6).

30 [0006] Further, as another of the methods of discharging droplets onto a display substrate having banks that each partition pixels, a method of combining an ink jet head of an ink jet device that scans in a direction perpendicular to the longitudinal direction of the stripe and an ink jet head of the ink jet device that scans in the longitudinal direction of the stripe so as to apply droplets is known (see Patent Document 7).

35 [0007] On the other hand, banks may define a linear region including a group of pixels of the same color (for example, R: red, G: green, or B: blue) arranged in a row, among pixels arranged in the form of stripes (see Patent Document 3). The bank that defines the linear region may be referred to as a "linear bank". That is, an organic light-emitting layer of R, G or B is formed in every region (hereinafter also referred to as a "linear region") defined by the linear bank.

40

Prior Art References

[0008]

45 Patent Document 1: Japanese Patent Application Laid-Open No.2004-362818
 Patent Document 2: Japanese Patent Application Laid-Open No.2003-266669
 Patent Document 3: US Patent No.7091660
 Patent Document 4: Japanese Patent Application Laid-Open No.2008-15309
 Patent Document 5: U.S. Patent Application Publication No.2008/0113282
 50 Patent Document 6: Japanese Patent Application Laid-Open No.2008-108570
 Patent Document 7: Japanese Patent Application Laid-Open No.2007-80545

Disclosure of Invention

55 Problems to be Solved by the Invention

[0009] In the case of forming an organic light-emitting layer on a display substrate having linear banks formed thereon using an ink jet device, as shown in FIG.1,

1) ink jet head 120 of the ink jet device is arranged in an upper portion (or a lower portion) with respect to a line direction of linear banks 111 of display substrate 100 (at this point, preferably, the arrangement is made so that the line direction of linear banks 111 and an alignment direction of nozzles 121 are perpendicular to each other),
 5 2) while ink jet head 120 is relatively moved in parallel to the line direction of linear banks 111 (that is, while transporting substrate 100 in the direction shown by an arrow),
 3) droplets are discharged from nozzles 121 into linear region 110 defined by linear banks 111 to form an organic light-emitting layer.

10 [0010] In this way, the relative movement of the ink jet head in parallel to the line direction of the linear banks prevents ink to be applied into one linear region from erroneously intruding into the adjacent linear region. That is, in a color display, for example, a linear region in which an R organic light-emitting layer is formed, a linear region in which a G organic light-emitting layer is formed, and a linear region in which a B organic light-emitting layer is formed are repeatedly arranged, so that a stripe pattern is formed. Therefore, ink containing an organic light-emitting material must be reliably prevented from leaking into the adjacent linear region to cause color mixture. For this purpose, ink is discharged while an ink jet head is relatively moved in parallel to the line direction of the linear banks.

15 [0011] In this case, droplets are always discharged from the same nozzles into one linear region defined by linear banks. That is, for every region defined by linear banks, its corresponding nozzles that supply (discharge) droplets into the region is set.

20 [0012] As described above, it is difficult to set the sizes of all nozzles that an ink jet head has to be strictly fixed. Typically, it is said that the dimension error resulting from machining of a nozzle is about $\pm 5\%$. Therefore, according to the foregoing method, the amount of supplied ink slightly differs from one region defined by linear banks to another. The difference in amount of supplied ink causes formed organic light-emitting layers to have different thicknesses; the difference in thickness among organic light-emitting layers leads to differences in amount of emitted light, intensity of emitted light and wavelength of emitted light. When the amount of emitted light, the intensity of emitted light, and the wavelength of emitted light differ from one region defined by linear banks to another as mentioned above, it has been found that a person visually recognizes the differences as a streak when a display is driven.

25 [0013] An object of the invention is to suppress non-uniformity in thickness of an organic light-emitting layer from one line to another even when an organic light-emitting layer is formed on a display substrate having linear banks by applying ink onto the substrate using ink jetting with an ink jet head having non-uniformity of nozzles. This allows an organic EL display having high image quality without streaks to be manufactured. Further, an object of a preferred aspect of the invention is to provide a method of manufacturing a high definition organic EL display in which color mixture is suppressed.

Means for Solving the Problems

30 [0014] That is, a first aspect of the invention relates to a method of manufacturing an organic EL display as follows.

[1] A method of manufacturing an organic EL display, comprising:

35 preparing a display substrate having a substrate, two or more linear banks arranged on the substrate and being in parallel to each other, and two or more pixel regions arranged in linear regions defined by the linear banks; arranging an ink jet head which has two or more nozzles aligned in a row at a given pitch and to which ink containing an organic light-emitting material is supplied, to a side with respect to a line direction of the linear banks; and

40 relatively moving the ink jet head in a direction perpendicular to the line direction of the linear banks and discharging the ink from the nozzles to apply the ink to every linear region defined by the linear banks.

[0015]

[2] The manufacturing method as described in [1], further comprising waiting until the ink applied to the linear regions defined by the linear banks becomes uniform and then drying a solvent contained in the ink.

[3] The manufacturing method as described in [1], wherein a distance from a nozzle at one end to a nozzle at another end, among the nozzles arranged in the ink jet head, is equal to or greater than a length in the line direction of the linear regions of the substrate.

[0016]

[4] The manufacturing method as described in [1], wherein a speed of relatively moving the ink jet head in the direction perpendicular to the line direction of the linear banks

is inconstant; and

the speed of relatively moving while the ink is discharged from the nozzles to the linear region defined by the linear banks is lower than the speed of relatively moving while the ink is not discharged.

[5] The manufacturing method according to claim 1, wherein the ink discharged from the nozzles lands on a forward side in the linear regions defined by the linear banks, with respect to a relative moving direction of the display substrate to the ink jet head.

[6] The manufacturing method according to claim 1, wherein:

as to a set of the linear banks defining one of the linear regions, a linear region side of one linear bank has lower wettability than a linear region side of the other linear bank, the one linear bank being forward in the relative moving direction of the display substrate with respect to the inkjet head, the other linear bank being rear in the relative moving direction of the display substrate with respect to the inkjet head.

[0017] A second aspect of the invention relates to an organic EL display as follows.

15 [7] An organic EL display, comprising:

a substrate;
a plurality of linear banks arranged on the substrate and being in parallel to each other;
two or more pixel regions arranged in a linear region defined by the linear banks; and
20 a linear organic light-emitting layer arranged in the linear region including the pixel regions,
wherein contacts between the linear organic light-emitting layer and the linear banks have a fixed height in a line direction.

25 [8] The manufacturing method according to claim 1, wherein:

the linear region includes at least a first linear region and a second linear region, the first linear region provided at one end of the substrate, the second linear region provided at an opposite end of the substrate, wherein a contact between the linear organic light-emitting layer arranged in the first linear region and the linear bank at the one end side of the substrate is lower in height than a contact between the linear organic light-emitting layer arranged in the second linear region and the linear bank at the opposite end side of the substrate.

Advantageous Effects of Invention

[0018] According to a method of the invention, although organic light-emitting layers are formed on a display substrate having linear banks by an ink jet method, variations in thickness of the organic light-emitting layer from one linear region to another can be suppressed. An organic EL display without luminance unevenness is therefore obtained. Further, according to a preferred method of the invention, a high definition organic EL display in which color mixture is suppressed is obtained.

40 Brief Description of Drawings

[0019]

45 FIG.1 shows a state in which an organic light-emitting layer is formed in a line shape by coating by a typical ink jet method;

FIG.2A shows an arrangement state of organic light-emitting layers; and FIG.2B shows an arrangement state of linear banks and pixel regions;

FIG.3A shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method in the invention;

50 FIG.3B shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.3C shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.4 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

55 FIG.5 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.6 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method in

the invention;

FIG.7 illustrates that the states of landing ink droplets vary depending on substrate transport speeds;

FIG.8 shows a state of adjusting landing positions of ink droplets to prevent color mixture;

FIG.9 shows a state of obtaining uniformity of a coated film utilizing surface tension of ink with respect to a bank;

5 FIG.10 illustrates a simulation of leveling of ink discharged into linear regions;

FIG.11 is a graph showing a relationship among surface tension of ink with respect to a linear region (coating region), ink viscosity, and time until a coated film is leveled: where symbol \diamond is a plot in the case where surface tension of the coated film is 20 dyn/cm; symbol \square is a plot in the case where surface tension of the coated film is 30 dyn/cm; and symbol Δ is a plot in the case where surface tension of the coated film is 40 dyn/cm;

10 FIG.12 shows cross-sections perpendicular to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of an organic EL display of the invention;

FIG.13 shows cross-sections perpendicular to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of a conventional organic EL display;

15 FIG.14 shows cross-sections in parallel to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of an organic EL display of the invention;

FIG.15 shows cross-sections in parallel to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of a conventional organic EL display;

FIG. 16 schematically shows a state of manufacturing linear banks by a printing method; and

FIG.17 shows a state when depositing a cathode electrode by sputtering.

20

Best Mode for Carrying Out the Invention

[0020] An organic EL display manufactured by the invention has two or more linear banks arranged in parallel to each other. The linear bank may be forward tapered or reverse tapered, and preferably forward tapered. The material for a first bank may be any material as long as it has insulating properties; however it is preferable that the material be an insulating resin (such as polyimide). The surface of the linear bank may be subjected to a fluoridation process using fluorine gas plasma or the like to reduce its wettability.

[0021] The line direction of the linear bank may be any direction. Typically, the linear bank is in parallel to the short axis direction of a display or in parallel to its long axis direction.

[0022] An organic light-emitting layer is arranged in a line shape in a region (linear region) sandwiched between linear banks adjacent to each other. FIG.2A shows a state of an organic EL display in which a cathode electrode and the like are omitted to expose organic light-emitting layers. As shown in FIG.2A, R organic light-emitting layer 15R, G organic light-emitting layer 15G or B organic light-emitting layer 15B is formed in each linear region 12, and they are repeatedly arranged (forming a stripe pattern). It is preferable that the thickness of an organic light-emitting layer be from about 50 to 100 nm (for example, 60 nm).

[0023] FIG.2B shows a state in which organic light-emitting layers 15R, 15G, and 15B are omitted to expose pixel region 13. As shown in FIG.2B, two or more pixel regions 13 are arranged in rows in linear region 12. Pixel regions 13 are not independently partitioned so that a liquid in the each pixel is not interfere with movement to adjacent pixel. Pixel regions 13 are linked to one another so that the liquid can move among them through gaps 17. In other words, ink discharged into linear region 12 can freely move in linear region 12.

[0024] In each pixel region 13, at least a pixel electrode (typically an anode electrode) is arranged. In the case of employing an active type, an anode electrode is independently arranged in every pixel region while in the case of employing a passive type, anode electrodes are arranged in a stripe pattern. In the case of employing bottom emission, an anode electrode needs to be a transparent electrode, and may be an indium-tin-oxide (ITO) electrode or the like. In the case of employing top emission, an anode electrode is preferably a reflecting electrode, and may be a silver electrode, a silver-palladium-copper alloy (also referred to as "APC") electrode or the like. In the case of employing an active type, an anode electrode is connected to a drain electrode of a thin film transistor (TFT).

[0025] A hole transport layer and an electron blocking layer may be arranged on and above the anode electrode. The hole transport layer is a layer made of a hole transfer material. The materials for the hole transport layer may be oxide such as WO_x (tungsten oxide), MoO_x (molybdenum oxide) or VO_x (vanadium oxide), or a combination of these materials. The hole transfer material may be poly(3,4-ethylenedioxythiophene) doped with polyethylene sulfonate (referred to as "PEDOT-PSS"), or its derivative (such as copolymer). The thickness of a hole transport layer is typically 10 nm or more and 100 nm or less, and can be about 30 nm.

[0026] The electron blocking layer has a role that blocks electrons from being transported to the hole transport layer and a role that transports holes to an organic light-emitting layer with efficiency, and is made of, for example, a polyaniline material. The thickness of an electron blocking layer is typically 10 nm or more and 100 nm or less, and can be about 40 nm.

[0027] As such, the organic light-emitting layer is arranged over the whole linear region including two or more pixel regions aligned in a row. That is, the organic light-emitting layer extends over two or more pixel regions aligned in a row.

[0028] A method of manufacturing an organic EL display panel according to the invention includes 1) preparing a display substrate before organic light-emitting layers are formed (see FIG.2B), 2) arranging an ink jet head beside the prepared display substrate, and 3) applying ink containing an organic light-emitting material by ink jetting to form an organic light-emitting layer.

5 [0029] The display substrate before forming organic light-emitting layers is, for example, the substrate shown in FIG. 2B, and includes a substrate, a plurality of linear banks in parallel to each other, and a plurality of pixel regions arranged in linear regions sandwiched between the linear banks. In pixel regions 13 at this point, for example, anode electrodes are exposed, hole injection transport layers are exposed, or electron blocking layers are exposed.

10 [0030] In the ink jet head arranged beside the substrate, a plurality of nozzles are arranged in a row. Ink containing an organic light-emitting material is supplied to the head, and the ink is discharged as droplets from the nozzles.

15 [0031] The organic light-emitting material contained in ink is preferably a polymeric luminescent material, and examples of the polymeric luminescent material include poly phenylene vinylene (PPV) and its derivatives, poly acetylene and its derivatives, polyphenylene and its derivatives, poly para phenyleneethethylene and its derivatives, poly 3-hexyl thiophene (P3HT) and its derivatives, poly fluorene (PF) and its derivatives, and the like.

20 [0032] The ink jet head is arranged beside the substrate. Specifically, the ink jet head is arranged in a side with respect to the line direction of the linear banks, and more specifically in a side with respect to the line direction of a linear bank at the farthest end among a plurality of linear banks. The alignment direction of nozzles of the arranged ink jet may be in parallel to the line direction of linear banks of the substrate (see FIG.3).

25 [0033] As shown in FIG.3A, it is preferable that among nozzles 21 (21-1 to 21-n) arranged in ink jet head 20, a distance from nozzle 21-1 at one end to nozzle 21-n at the other end be equal to or greater than the length in the line direction of linear region 12 of substrate 10. This is because ink can be applied over the whole linear region 12 at a time. When the alignment direction of nozzles 21 of ink jet head 20 is inclined with respect to the line direction of linear region 12, it is preferable that "the component in the foregoing line direction of the distance from nozzles 21-1 to nozzle 21-n" be equal to or greater than the length in the line direction of linear region 12.

30 [0034] As shown in FIG.3B, ink jet head 20 may be arranged so as to be inclined with respect to the line direction. This can decrease the pitch of droplet landing in one linear region, enabling the time required for leveling to be reduced. However, the inclining of ink jet head 20 causes time differences in landing of droplets on the same linear region. Therefore, an ink droplet that has first landed on a region dries and increases its viscosity until the final ink droplet lands on the region, which interferes with leveling after droplets are connected. To solve this drawback, as shown in FIG.3C, a plurality of ink jet heads (20-1 to 20-6) may be arranged so as to be each inclined with respect to the line direction. This enables reduction of the time differences in droplet landing to shorten the time required for connecting droplets over the whole linear region. The leveling in the linear region can therefore be ensured. If a plurality of ink jet heads are overlapped, the time required for connecting droplets over the whole linear region can further be shortened.

35 [0035] Applying ink in this way allows ink discharged from all nozzles to be leveled in the linear region even if there are variations in discharge caused by size variations among nozzles. Variations in applied film thickness can therefore be suppressed. However, it is not necessarily required for ink amount corresponding to the desired film thickness to be applied in a single scan. The applying of ink to the whole linear region 12 may be completed by repeating scanning a plurality of times. If ink is applied by repeating scanning a plurality of times, however, the viscosity of the ink applied in the former scanning may increase to suppress leveling in its connection portion with ink applied in the latter scanning. 40 Therefore, in the case of using a solvent that easily evaporates, such as ink solvent of an organic light-emitting material, it is desirable that ink be applied over the whole linear region in a single scan.

45 [0036] It is preferable that the pitch between nozzles 21 arranged in a row in ink jet head 20 be from 10 to 50 μm , and be, for example, about 20 μm . This is for the purpose of causing ink discharged from nozzles 21 to be mutually connected at the point on which the ink lands. It is also preferable that the amount of ink per droplet of the droplets discharged from nozzles 21 be from 1 to 15 pl, and be, for example, 3 pl.

50 [0037] It is preferable that droplets land also on gap 17 between the pixel regions shown in FIG.2B. The landing of droplets on gap 17 makes it possible to connect ink of the pixel regions to level them with reliability, even though wettability of pixel regions 12 differ from that of gap 17 between the pixel regions. It is also preferable that an electron blocking layer be provided in the whole linear region before a light-emitting layer is applied to make the wettability of pixel regions 12 equal to the wettability of gap 17 between the pixel regions. As a result, ink of the pixel regions can be connected with reliability to improve leveling.

55 [0038] It is preferable that the height of gap 17 between the pixel regions be greater to some extent than the height of pixel regions 13. However, the difference in height is set so as not to be too large, and the applied film immediately after the applying of ink covers gap 17 so as to avoid interfering with leveling. Thus, while achieving leveling, ink is concentrated into pixel region 13 in a drying process to effectively use an ink material.

[0039] Next, ink jet head 20 is moved relatively with respect to display substrate 10 in a direction perpendicular to the line direction of linear banks 11 of display substrate 10. Ink jet head 20 may be moved, or substrate 10 may be transported, or both of them may be moved. When, as a result of the relative movement of ink jet head 20, nozzles 21 of ink jet head

20 reach one of linear regions 12 (see FIG.4), droplets of ink are discharged from nozzles 21.

[0040] The amount of applied ink is from 100 to 500 pl per pixel. A plurality of droplets may be discharged from one nozzle into one pixel, thereby supplying the required amount of ink.

5 **[0041]** The discharged droplets of ink land on linear region 12. As mentioned above, there are two or more pixel regions 13 in linear region 12, and droplets that have landed on one pixel region can move (wet and spread) to the adjacent pixel region. Since droplets can move between pixel regions, the thickness of the whole applied film formed in linear region 12 is made uniform (see FIG.10).

10 **[0042]** That is, as mentioned above, the amount of droplets discharged from nozzles 21 of ink jet head 20 may differ from one nozzle to another. According to the invention, the thickness of the applied film is made uniform (leveled) in linear region 12. Therefore, even though there is a difference among the amounts of droplets from nozzles 21, the applied film in linear region 12 is made uniform.

15 **[0043]** Upon completion of discharging of droplets of ink into one linear region 12, ink jet head 20 is further relatively moved so as to move nozzles 21 of ink jet head 20 to next linear region 12 into which droplets of ink are to be discharged (see FIG. 5). Typically, R ink, G ink and B ink are applied by their respective individual scans, and therefore droplets of ink are discharged into every three linear regions. When nozzles 21 reach desired linear region 12, droplets of ink are discharged again to cause the droplets to land on linear region 12. This is repeated to apply ink to all linear regions 12 into which the ink is to be applied (see FIG.6).

20 **[0044]** Since ink is supplied into every linear region 12 in succession in this way, all the linear regions are coated by discharging from the same nozzles. The same amount of ink can therefore be supplied to all linear regions 12. In other words, variations in thickness of the applied film from one linear region to another are reduced. Consequently, streaks can be prevented from occurring when the regions constitute a display.

25 **[0045]** Further, the other color ink is applied in the same way as mentioned above, so that ink of all of R, G and B is applied.

30 **[0046]** As described above, the line direction of the linear banks of an organic EL display according to the invention may be in parallel to the short axis direction of the display, or may also be in parallel to the long axis direction. If the line direction of the linear banks is in parallel to the short axis direction, an ink jet head for scanning can be made in a smaller size. In the case where light emission unevenness slightly occurs because of variations in nozzles, the light emission unevenness occurs in a small region and therefore is not conspicuous. On the other hand, if the line direction of the linear banks is in parallel to the long axis direction, the scanning distance of an ink jet head is shortened. This enables coating to be completed in a short time to improve productivity, and also enables drying unevenness during coating to be suppressed.

Color Mixture Prevention

35 **[0047]** If ink is supplied into every linear region 12 in succession as described above, a risk of erroneously mixing ink into the adjacent linear region increases, while variations in thickness of the applied film from one linear region to another are reduced. The mixture of ink into the adjacent linear region causes color mixture, remarkably reducing the image quality as a display. In particular, if the speed of relative movement of the ink jet head and the substrate is increased in order to increase productivity, the occurrence rate of color mixture increases. That is, as shown in FIG.7A, when the speed of relative movement is low, a droplet lands within desired linear region 12 with more reliability while, as shown in FIGS.7B and 7C, as the relative movement speed increases, the area for landing of a droplet expands in the direction of the movement, and it may be difficult for a droplet to land within desired linear region 12 (see FIG.7C).

40 **[0048]** To prevent color mixture as mentioned above, it can be considered to change the relative movement speed (e.g., the transport speed of the substrate) depending on whether ink is discharged from nozzles or not. In other words, when the position of nozzles corresponds to the linear region, the relative movement speed is decreased so as to cause droplets discharged from nozzles to land on the linear region with reliability. On the other hand, during movement of the nozzles from the linear region into which ink has been applied to the next linear region, it is preferable that the relative movement speed be increased to increase productivity. The relative movement speed (preferably the transport speed of the substrate) when droplets are discharged is preferably from 50 to 300 mm/s, while the relative movement speed (preferably the transport speed of the substrate) when droplets are not discharged is not particularly limited, and is, for example, 400 mm/s or more.

45 **[0049]** To prevent color mixture as mentioned above, as shown in FIGS.8A and 8B, ink droplet 14 may be landed on the forward side in the transport direction of the substrate (on the rear side in the movement direction of the ink jet head) in linear region 12. The ink unevenly distributed in the forward in the transport direction of the substrate naturally spreads toward the rear in the transport direction by wind pressure caused by transport of the substrate, thereby enabling formation of applied film 16 (FIG.8C). The substrate itself may optionally be tilted so as to raise the forward in the transport direction of the substrate after the ink application.

50 **[0050]** Further, as shown in FIG.9, the surface tension (wettability) of linear bank 11 may be utilized. In FIG.9A, the

wettability of the surface on the side of region 12 of linear bank 11a is equal to the wettability of the surface on the side of region 12 of linear bank 11b. The linear bank 11a is forward in the transport direction (see arrow) of substrate 10, and the linear bank 11b is rear in the transport direction of substrate 10. As shown in FIG.9A, an ink droplet that has landed in the forward in the transport direction of the substrate does not spread evenly, and therefore the thickness of organic light-emitting layer 15 is unlikely to become uniform, as shown in FIG.9B.

[0051] On the other hand, in FIG.9C, linear banks 11 define linear region 12, and the wettability of surface 30 on the side of region 12 of linear bank 11b is higher than the wettability of the surface on the side of region 12 of linear bank 11a. The linear bank 11b is rear in the transport direction of the substrate, and the linear bank 11a is forward in the transport direction of the substrate. As shown in FIG.9C, ink can wet and spread over the whole linear region 12 even though an ink droplet lands in the forward in the transport direction of the substrate. As a result, organic light-emitting layer 15 having a uniform film thickness is obtained as shown in FIG.9D.

[0052] It is preferable that a manufacturing method according to the invention be carried out in this way by combining measures for reliably preventing color mixture.

15 Waiting

[0053] It is preferable that after ink is discharged to a linear region (including a plurality of pixel regions), it be waited until the thickness of an applied film of the ink is made uniform (leveled), and then a solvent of the ink be removed. Specifically, waiting refers to that the substrate is left in the atmosphere or in an inert gas atmosphere.

[0054] The time for waiting varies mainly depending on the viscosity of ink and the surface tension of the ink with respect to a region to which the ink is applied. The viscosity of ink containing an organic light-emitting material to be applied by an ink jet device is from about 5 to 20 cps. The surface tension of ink with respect to a region to which the ink is applied is from 20 to 40 dyn/cm. Hereinbelow, results of the time until the applied film is made uniform obtained by a simulation using the theory of Orchard are shown.

[0055] Three pixel regions 13 arranged in the region (linear region) defined by the linear banks are assumed (see FIG.10). A length 1 in FIG.10 is about 1 mm. The state in which applied film 16 having $\pm 100\%$ variations is formed in this region is set as the initial state (FIG.10A). The time from the initial state to a state in which variations of the applied film is leveled to $\pm 1\%$ (FIG.10B) is obtained. The result is shown in a graph of FIG. 11.

[0056] The vertical axis of the graph in FIG.11 indicates time (sec) required for leveling; and the horizontal axis indicates the viscosity (cps) of ink constituting an applied film. Plots of 0 represent results in the case where the surface tension of the applied region is 20 dyn/cm; plots of \square represent results in the case where the surface tension of the applied region is 30 dyn/cm; and plots of Δ represent results in the case where the surface tension of the coated region is 40 dyn/cm.

[0057] As shown in the graph of FIG.11, it is found that leveling is completed in 5 to 20 seconds in any case. Accordingly, it is found that the thickness of the coated film becomes uniform after waiting for 5 to 20 seconds after applying of ink.

[0058] As a matter of course, the waiting time may be affected by evaporation of a solvent from the applied film, and therefore is adjusted in accordance with the actual conditions.

[0059] After waiting, with the whole display substrate placed in the high-temperature environment or in the reduced-pressure environment, the solvent is removed from a leveled applied film (drying process). Thereby, an organic light-emitting layer is formed. In this way, an organic light-emitting layer having a highly uniform thickness is formed in each linear region, and variations in thickness of the organic light-emitting layer among linear regions are reduced.

[0060] After the organic light-emitting layers are formed, an electron injection transport layer, an opposite electrode (typically a cathode electrode) and the like are layered to produce an organic EL device, and further a sealing film, a glass substrate and the like are arranged, thereby manufacturing a display.

[0061] The material of a cathode electrode layer differs depending on whether the display is a bottom emission type or a top emission type. In the case of the top emission type, the cathode electrode needs to be transparent, and therefore it is preferable that an ITO electrode, an indium zinc oxide (IZO) electrode or the like be formed. It is preferable that a buffer layer and the like be formed between the organic light-emitting layer and the cathode electrode layer. On the other hand, in the case of the bottom emission type, the cathode electrode need not be transparent, and an electrode made of any material may be used.

[0062] The cathode electrode may be formed on the organic light-emitting layer arranged in each pixel region, and is sometimes formed so as to cover all pixels included in one linear region. The cathode electrode is typically formed by a sputtering method or a deposition method. Further, the cathode electrode need not always be separated by linear region. That is, when an anode electrode is controlled independently for every pixel electrode as in an active-matrix type, a TFT element that drives the pixel electrode is independent, and therefore the cathode electrode can be shared among a plurality of linear regions.

[0063] An organic EL display panel of the invention may be sealed by further providing a cover material to a surface on which the cathode electrode is formed. With the cover material, intrusion of moisture and oxygen is suppressed.

[0064] The organic EL display panel of the invention can be manufactured as described above, and can have structural

features in a relationship between organic light-emitting layers formed in linear regions by coating and linear banks.

[0065] A first feature of the organic EL display panel of the invention is that the heights of contacts between an organic light-emitting layer arranged in each linear region and linear banks are fixed in the line direction. As shown in FIG.12, when attention is focused on one linear region (linear region X, Y or Z), the thickness of organic light-emitting layer 15 is fixed in the line direction. That is, regarding organic light-emitting layer 15 formed in each linear region (linear region X, Y or Z) in FIG.12-1, a cross-section along the line A-A (FIG.12-2), a cross-section along the line B-B (FIG.12-3), and a cross-section along the line C-C (FIG.12-4) are approximately identical to one another; the heights of contacts between organic light-emitting layer 15 and linear banks 111 are fixed in the line direction. The fixed height means that a difference between the minimum height and the maximum height is within 20% (preferably 10%) of the film thickness with a pixel of the organic light-emitting layer serving as the center. This is because according to a method of the invention, there is no large difference in the drying environment for a coating liquid in one linear region.

[0066] In contrast, in an organic light-emitting layer formed by providing a coating liquid along the line direction of linear banks, variations in the line direction easily occur among the heights of contacts between the organic light-emitting layer and linear banks in one linear region (see FIG.13). That is, regarding an organic light-emitting layer formed in each linear region (X', Y' or Z') in FIG.13-1, a cross-section along the line A'-A' (FIG.13-2), a cross-section along the line B'-B' (FIG.13-3), and a cross-section along the line C'-C' (FIG.13-4) are not fixed, and variations are large. For example, when attention is focused on linear region X', a cross-section in A' is stranded on a side surface of bank 111 at the right side; a cross-section in C' is not stranded on a side surface of bank 111. In the case of providing a coating liquid along the line direction, there is a large difference in the drying environment of the coating liquid in one linear region, and therefore such variations occur.

[0067] The organic EL display panel having banks sometimes deteriorates gradually in its long-term use. It is considered that one of causes of the deterioration is that an outflow from the bank acts on the organic light-emitting layer. The outflow from the bank is, for example, moisture and an organic matter containing a hydroxyl group. The degree of deterioration of the organic light-emitting layer because of an outflow from the bank is considered to be affected by a positional relationship between the organic light-emitting layer and the bank.

[0068] The distance between pixels adjacent to each other in each linear region is very short. Therefore, when a difference occurs in the degree of deterioration of the pixels to cause a difference in light-emitting characteristic, the difference is visually recognized with ease as light emission unevenness of a display.

[0069] As mentioned above, in the organic EL display of the invention, the heights of contacts between the an organic light-emitting layer and linear banks can be fixed in every linear region. Therefore, the degree of progress of long-term deterioration can be the same among organic light-emitting devices included in one linear region. Accordingly, light emission unevenness of a display can be suppressed even in the long-term use.

[0070] A second feature of the organic EL display panel of the invention is as follows. The height of contact between an organic light-emitting layer formed in a linear region on one end of a display panel and linear bank are greater than the height of contact between an organic light-emitting layer formed in a linear region on the other end of the display panel and linear banks. As shown in FIG.12-1, since the drying speed of a coating liquid applied to linear region X in an end on a side (right side) where coating of substrate 100 starts is rapid, organic light-emitting layer 15 formed by drying is likely to be stranded on a side surface of bank 111 (see FIGS.12-2 to 12-4). On the other hand, since the drying speed of a coating liquid applied to linear region Z in an end on a side (left side) opposite to the side where coating of substrate 100 starts is slow, formed organic light-emitting layer 15 is unlikely to be stranded on a side surface of bank 111.

[0071] As a matter of course, the film thickness profile of an organic light-emitting layer in each pixel affects the light-emitting characteristic. Moreover, even with a difference of the film thickness profile that is not visually recognized as the light-emitting characteristic, the heat generation characteristic may be varied. Specifically, since organic light-emitting layer 15 formed in linear region X arranged in one end (on a side where coating starts) of a display panel in FIG.12-1 tends to have a large film thickness distribution, the amount of heat generation of an organic light-emitting device in linear region X is relatively large. On the other hand, since organic light-emitting layer 15 formed in linear region Z arranged in the other end of the display panel has a suppressed film thickness distribution, the amount of heat generation of organic light-emitting device 15 in linear region Z is relatively small.

[0072] Thus, when the organic EL display of the invention is driven, heat is easily generated from one end to produce a flow of heat therefrom (see arrow H). If such a flow of heat does not exist, a temperature distribution in the form of a concentric circle around the vicinity of the center of the panel occurs. The use in a long period is likely to cause light emission unevenness corresponding to this temperature distribution. The light emission unevenness in the form of a concentric circle around the vicinity of the center of the panel is easy to visually recognize. When a flow of heat occurs as in the display of the invention, the temperature distribution is not in the form of a concentric circle around the center of the panel. In this case, even if light emission unevenness occurs, it is difficult to visually recognize the unevenness.

[0073] One of the sealing structure of the organic EL display is a structure referred to as a "can sealing structure." The can sealing structure is a structure that puts a sealing can on a display substrate on which an organic light-emitting device is formed, so that the organic light-emitting device is protected from the external environment. In the can sealing

structure, heat tends to stay inside the sealing can. When a flow of heat is produced inside the sealing can, a heat distribution is made uniform by convection. Further, moisture and oxygen gas present in the interior of the sealing can move by the flow of heat. When an adsorbent that absorbs moisture and oxygen gas is arranged at a downstream position, moisture and oxygen gas can be removed with efficiency.

5 [0074] A third feature of the organic EL display of the invention is that film thickness profiles in the line direction of organic light-emitting layers formed in linear regions are similar to one another. That is, as shown in FIG.14-1, any one of organic light-emitting layers 15 formed in linear regions is relatively thick at one position (G) in the line direction; it is relatively thin at another position (H) in the line direction (see FIGS.14-2 to 14-4). FIG.14-2 is a cross-sectional view taken along the line D-D of FIG.14-1; FIG.14-3 is a cross-sectional view taken along the line E-E of FIG.14-1; FIG.14-4 is a cross-sectional view taken along the line F-F of FIG.14-1.

10 [0075] As described above, nozzles of an ink jet head vary in size, and their sizes are not necessarily constant. According to a coating method of the invention, droplets simultaneously fall over the whole one linear region, and the thickness of the coated film is made uniform (leveled). Therefore, the thickness of an organic light-emitting layer is made uniform over the whole linear region. However, variations in the sizes of nozzles, variations in the temperatures of nozzles 15 and variations in the drying states of nozzles, which have no influence on light-emitting characteristic, are reflected in the thickness of an organic light-emitting layer to cause a distribution of the thickness.

15 [0076] Even if the organic light-emitting layer of the organic EL display of the invention has a distribution in thickness, thickness distributions in the line direction of organic light-emitting layers of any linear regions are similar (see FIGS. 20 14-2 to 14-4). That is, positions in the line direction of the thickest portions or the thinnest portions of organic light-emitting layers in linear regions are exactly aligned or vary within a distance 2 to 8 times as long as the nozzle pitch. Therefore, even if a stress is applied to a display such that the display is curved in the line direction (bent around an axis perpendicular to the line direction), deformations in the thickness direction in all linear regions are the same. This suppresses damage to organic light-emitting layers.

25 [0077] On the other hand, as shown in FIG.15-1, in organic light-emitting layers 15 formed by providing a coating liquid along the line direction of linear banks, their film thickness profiles in the line direction differ from one linear region to another and are not similar (FIGS. 15-2 to 15-4). That is, FIG.15-2 is a cross-sectional view taken along the line D'-D' of FIG.15-1; FIG.15-3 is a cross-sectional view taken along the line E'-E' of FIG.15-1; FIG.15-4 is a cross-sectional view (FIG.15-4) taken along the line F'-F' of FIG.15-1. The film thickness profiles of any organic light-emitting layers 15 differ from one another. In such a case, when a stress is applied to a display such that the display is curved in the line direction (bent around an axis perpendicular to the line direction), deformations in the thickness direction greatly differ from one adjacent linear region to another. This adds damage to organic light-emitting layers.

30 [0078] The organic EL display panel can be made as a flexible display (e.g., a roll display or a folding display). As a usage of a flexible display, for example, it is conceivable to bend the display in parallel with the extending direction of linear banks. If the thickness profile of an organic light-emitting layer in one linear region distinctly differs from the thickness profile of an organic light-emitting layer in another linear region, the organic light-emitting layer in the one linear region is likely to be broken upon bending the display in parallel with the extending direction of linear banks. In a method of coating along the line direction of linear banks, an organic light-emitting layer having a distinctly different thickness profile is sometimes formed because of variations in ink jet nozzles. In this case, the whole organic light-emitting layer is broken. As a result, the quality as a display cannot be ensured. In the organic EL display of the invention, 40 even if there are variations in the nozzles of an ink jet head, a coating liquid applied into a linear region is made even. This makes it difficult to form an organic light-emitting layer having a distinctly different thickness profile. As mentioned above, in the organic EL display of the invention, thickness profiles in the line direction of organic light-emitting layers in linear regions are similar. Therefore, even if each of the organic light-emitting layers has portion having a distinct thickness can be formed, the portions are aligned along the line perpendicular to the line direction. Therefore, the organic light-emitting layer is unlikely to be broken with bending the display in parallel with the extending direction of linear banks.

45 [0079] Linear banks of the organic EL display of the invention may be formed by a photolithography method, and may also be formed by a printing method. Examples of the printing method include a gravure offset printing method. As shown in FIG.16, according to a printing method, a bank material (e.g., a resin material) placed on the surface of printing cylinder 200, so-called cylinder, is transferred onto substrate 100 to form linear banks 111. The shapes of linear banks 111 formed by the printing method are precisely the same in the line direction. That is, variations in shape in the line direction 50 are the same for any linear banks 111.

55 [0080] When by a method of the invention ink is applied in each linear region of linear banks formed by a printing method, through leveling of the coating liquid the shape profile of the organic light-emitting layer is hard to be reflected by the variations in shape in the linear bank. On the other hand, if an organic light-emitting layer is formed by supplying a coating liquid along the line direction of linear banks to each linear region defined by linear banks formed by a printing method, not only the shape profile of the organic light-emitting layer is likely to be reflected by the variations in shape in the linear bank, but also the variations of nozzles of an ink jet head and the shape variations in the line direction of linear banks might be combined together.

[0081] The organic EL display panel of the invention is sometimes provided with a color filter for every pixel in order to increase color purity. The color filter is made of a colored layer arranged between linear banks adjacent to each other. In the case of forming a colored layer of this color filter by an ink jet method, variations of nozzles of an ink jet head sometimes cause unevenness in the color filter. To address this, when an organic light-emitting layer is formed by coating

5 liquid along the direction perpendicular to the line direction of linear banks as in the invention, it is preferable that a color filter be formed by coating liquid along the line direction of linear banks. This is for the purpose of suppressing combining of mutual variations. For the sake of cost reduction, a colored layer of the color filter is sometimes applied along linear regions in succession by a dispenser or the like. In this case, it is preferable that an organic light-emitting layer be formed by coating in a direction perpendicular to the linear banks so that mutual variations are not combined together.

10 [0082] The cathode electrode of the organic EL display of the invention is sometimes deposited by sputtering. For example, in the case of a top emission type organic EL display, ITO, which is a transparent electrode, is sometimes deposited as a cathode electrode by sputtering. Sputtering deposition can be performed, for example, using a magnetron sputtering device, which transports a member on which a cathode electrode is to be deposited (a display substrate on which an organic light-emitting device with no cathode electrode) to cause it to pass through a sputter region. Since the

15 environment of the sputter region is not necessarily uniform (with variations), slight streaks can occur along the transport direction in a film formed by sputtering.

20 [0083] In the case where an organic light-emitting layer is formed by coating liquid along the direction perpendicular to the line direction of linear banks as in the invention, as shown in FIG.17, when a cathode electrode is deposited by sputtering, it is preferable that substrate 100 be transported along the line direction of linear banks (i.e., the longitudinal direction of organic light-emitting layer 15) to pass through sputter region 300. This is for the purpose of suppressing combining of variations of nozzles of an ink jet head and variations in the sputter region together.

25 [0084] In the case of an active-matrix organic EL display, cathode electrodes of all organic light-emitting pixels can be made conductive. When the substrate is transported along the line direction of linear banks to pass through a sputter region, the coverage is increased to suppress thinning or cutting of the deposited cathode on the bank. Therefore, conductivity of the cathode electrode can be improved.

30 [0085] Further, the organic EL display of the invention can have a sealing resin layer that seals an organic light-emitting device formed on a substrate. To seal the organic light-emitting device with resin layer, for example, sealing resin can be applied to a display substrate on which an organic light-emitting device is arranged; and placing a sealing substrate (glass substrate) on the display substrate, a gap between the display substrate and the sealing substrate is filled with sealing resin. When the display substrate and the sealing substrate are brought into close contact to each other, the sealing resin spreads in the gap along the line direction of linear banks. Since the sealing resin spreads along the line direction, streaks in the line direction sometimes occur in the formed sealing resin layer.

35 [0086] As mentioned above, the organic light-emitting layer of the organic EL display of the invention is formed by coating liquid along the direction perpendicular to the line direction of linear banks, and therefore streaks in the line direction are unlikely to occur. Therefore, light emission unevenness due to streaks in the foregoing sealing resin can be suppressed. In contrast, in the organic light-emitting layer formed by providing a coating liquid along the line direction of linear banks, streaks in the line direction are likely to occur. Therefore, there is a potential of emphasizing light emission unevenness in combination with streaks of the foregoing sealing resin.

40 Industrial Applicability

[0087] With a manufacturing method of the invention, a high definition organic EL display without streaks is provided.

45 [0088] This application claims the benefit of priority based on Japanese Patent Application No.2008-141291, filed on May 29, 2008. The disclosure of the application including the specification and drawings of the application is incorporated herein by reference in its entirety.

Description of Reference Numerals

[0089]

50	100	substrate
	110	linear region
55	111	linear bank
	120	ink jet head

121	nozzle
10	substrate
5 11	linear bank
12	linear region
10 13	pixel region
14	ink droplet
15, 15R, 15G, 15B	organic light-emitting layer
15 16	applied film
17	gap
20 20	ink jet head
21	nozzle
200	printing cylinder
25 300	sputter region

Claims

30 1. A method of manufacturing an organic EL display, comprising:

35 preparing a display substrate having a substrate, two or more linear banks arranged on the substrate and being in parallel to each other, and two or more pixel regions arranged in linear regions defined by the linear banks; arranging an ink jet head that has two or more nozzles aligned in a row at a given pitch and to which ink containing an organic light-emitting material is supplied, to a side with respect to a line direction of the linear banks; and relatively moving the ink jet head in a direction perpendicular to the line direction of the linear banks and discharging the ink from the nozzles to apply the ink to every linear region defined by the linear banks.

40 2. The manufacturing method according to claim 1, further comprising waiting until the ink applied to the linear regions defined by the linear banks becomes uniform, and then drying a solvent contained in the ink.

45 3. The manufacturing method according to claim 1, wherein a distance from a nozzle at one end to a nozzle at another end, among the nozzles arranged in the ink jet head, is equal to or greater than a length in the line direction of the linear regions of the substrate.

4. The manufacturing method according to claim 1, wherein a speed of relatively moving the ink jet head in the direction perpendicular to the line direction of the linear banks is inconstant; and the speed of relatively moving while the ink is discharged from the nozzles to the linear region defined by the linear banks is lower than the speed of relatively moving while the ink is not discharged.

50 5. The manufacturing method according to claim 1, wherein the ink discharged from the nozzles lands on a forward side in the linear regions defined by the linear banks, with respect to a relative moving direction of the display substrate to the ink jet head.

55 6. The manufacturing method according to claim 1, wherein:

as to a set of the linear banks defining one of the linear regions, a linear region side of one linear bank has

lower wettability than a linear region side of the other linear bank,
the one linear bank being forward in the relative moving direction of the display substrate with respect to the
inkjet head, the other linear bank being rear in the relative moving direction of the display substrate with respect
to the inkjet head.

5

7. An organic EL display, comprising:

a substrate;
a plurality of linear banks arranged on the substrate and being in parallel to each other;
10 two or more pixel regions arranged in a linear region defined by the linear banks; and
a linear organic light-emitting layer arranged in the linear region including the pixel regions,
wherein contacts between the linear organic light-emitting layer and the linear banks have a fixed height in a
line direction.

15

8. The manufacturing method according to claim 1, wherein:

the linear region includes at least a first linear region and a second linear region, the first linear region provided
at one end of the substrate, the second linear region provided at an opposite end of the substrate, wherein
20 a contact between the linear organic light-emitting layer arranged in the first linear region and the linear bank
at the one end side of the substrate is lower in height than a contact between the linear organic light-emitting
layer arranged in the second linear region and the linear bank at the opposite end side of the substrate.

25

30

35

40

45

50

55

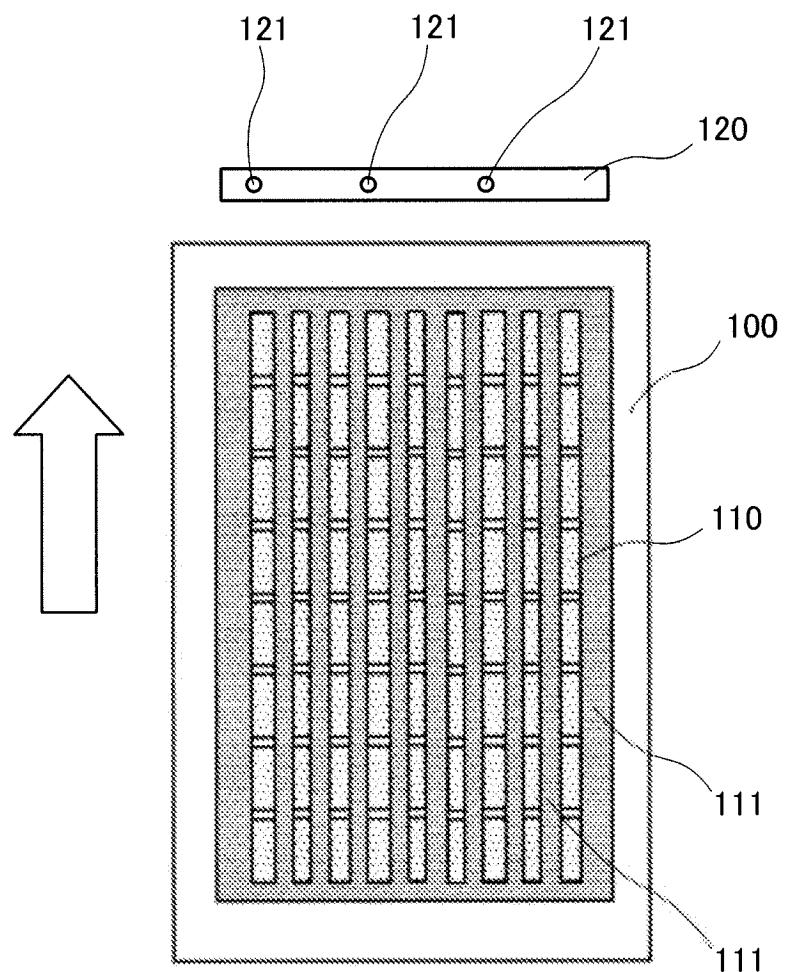


FIG.1

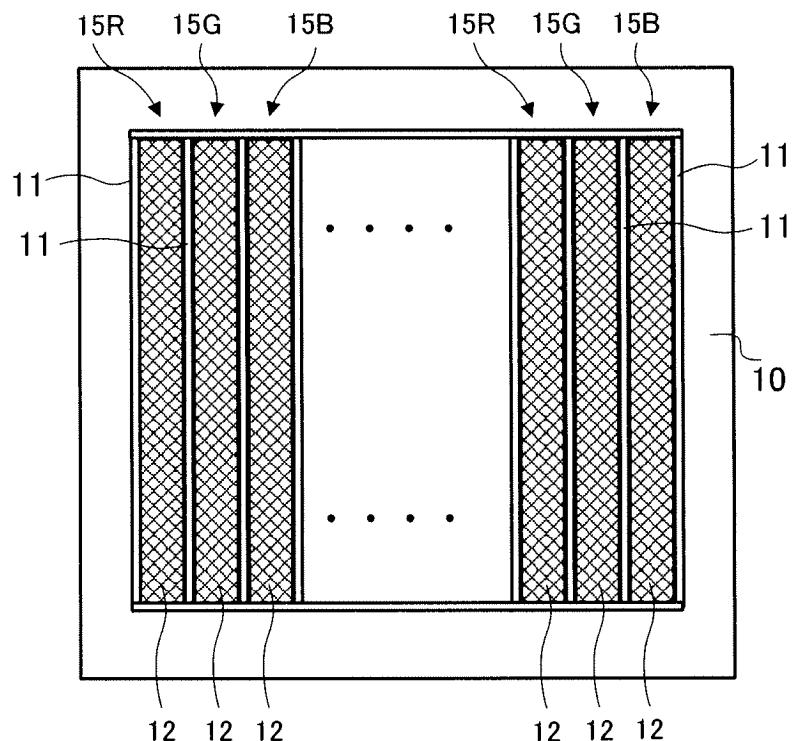


FIG.2A

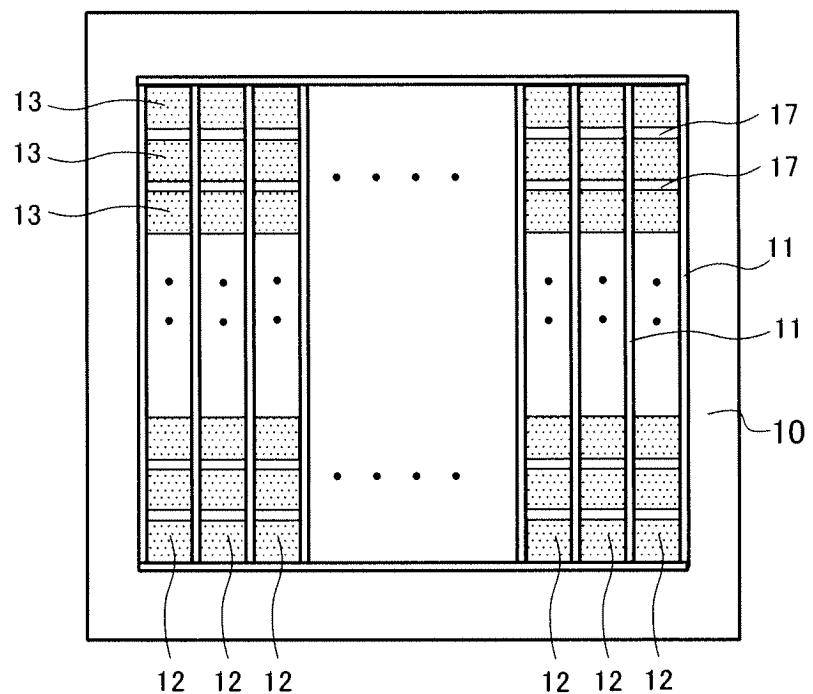


FIG.2B

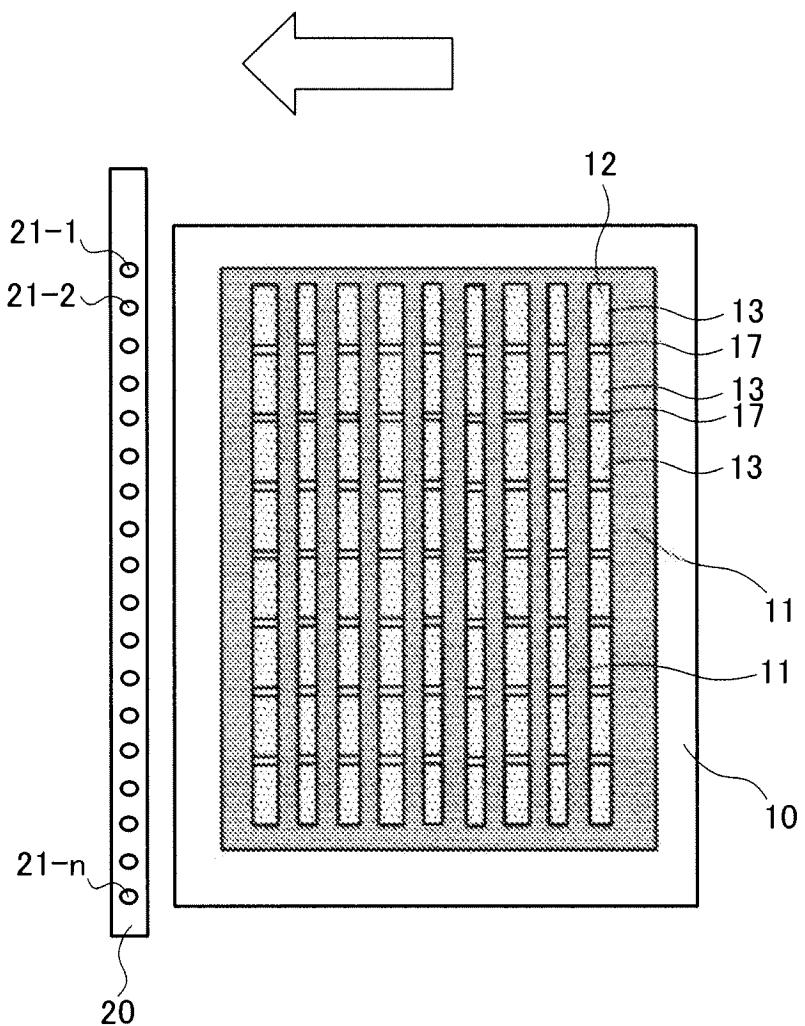


FIG.3A

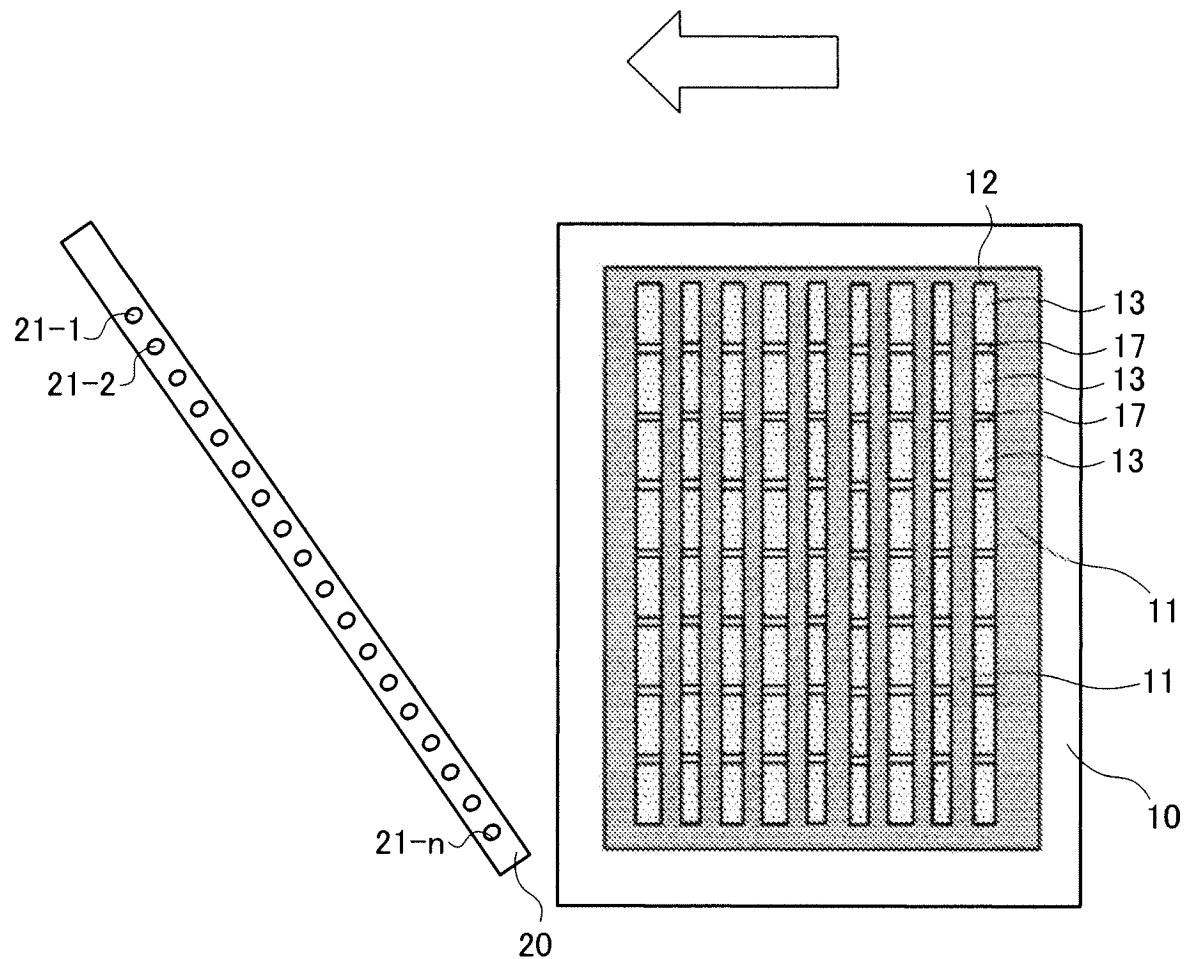


FIG.3B

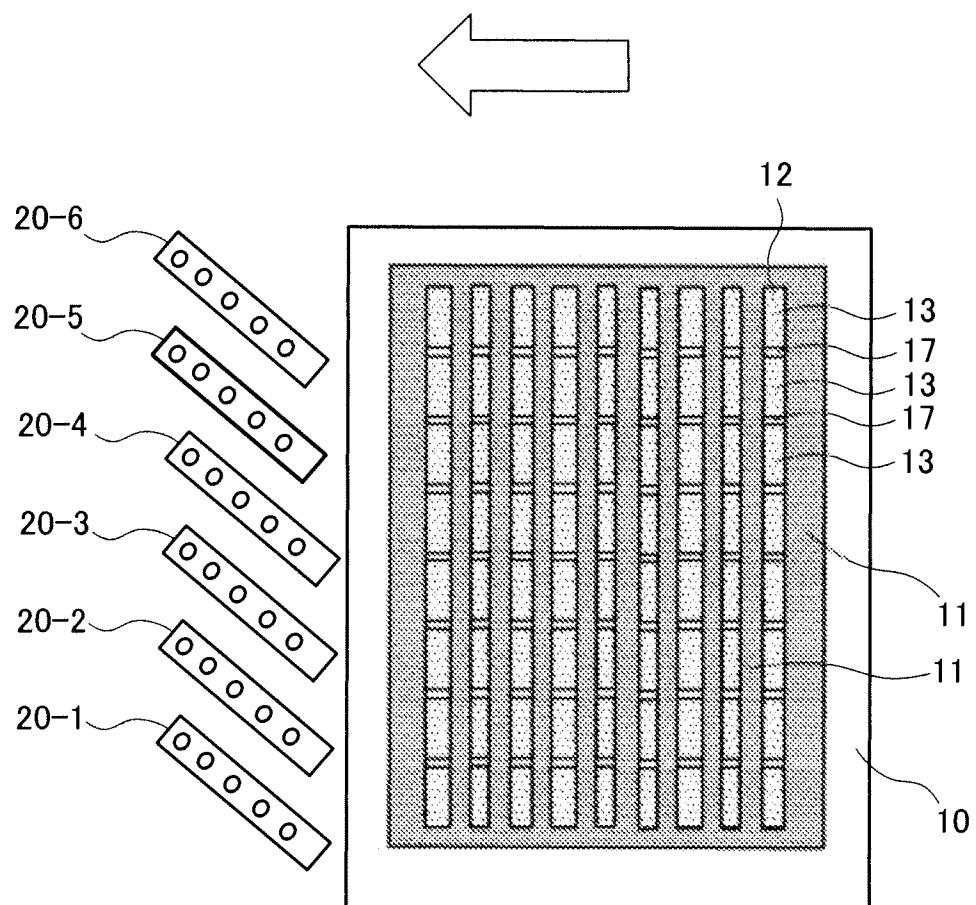


FIG.3C

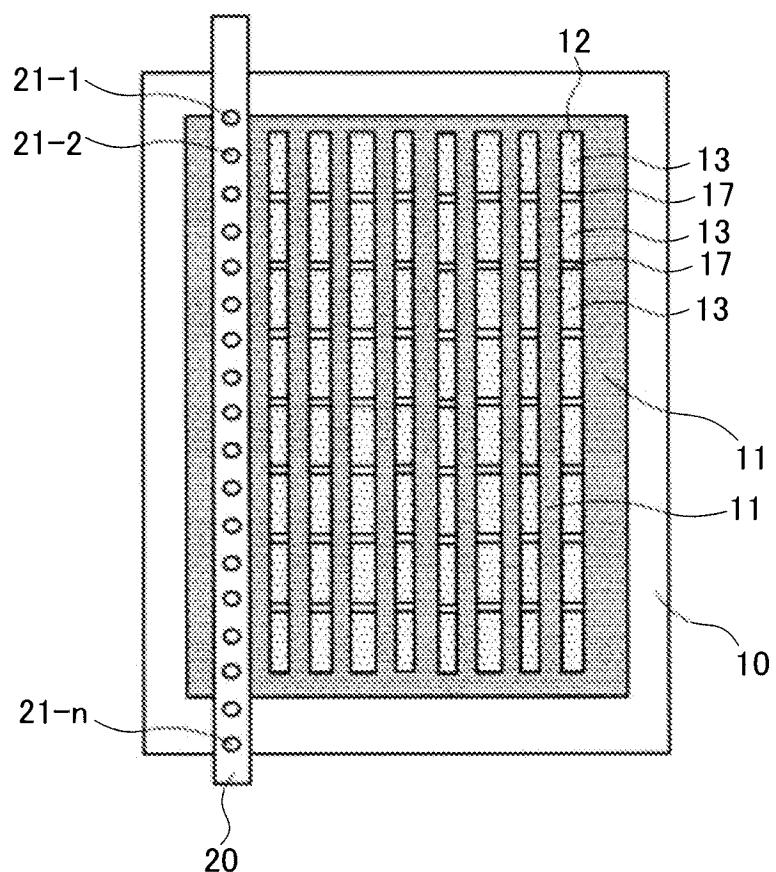


FIG.4

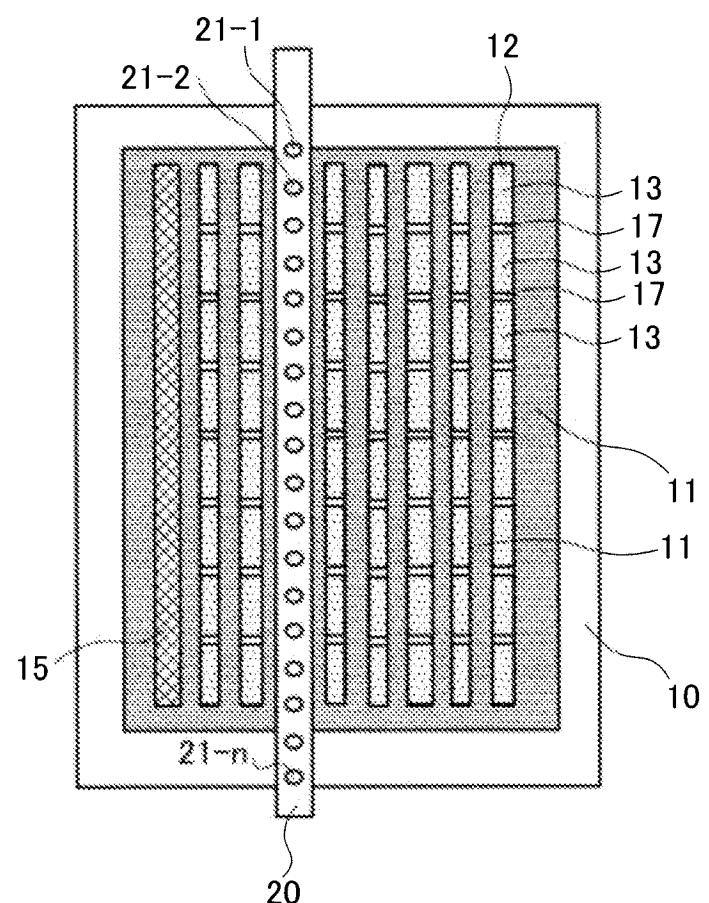


FIG.5

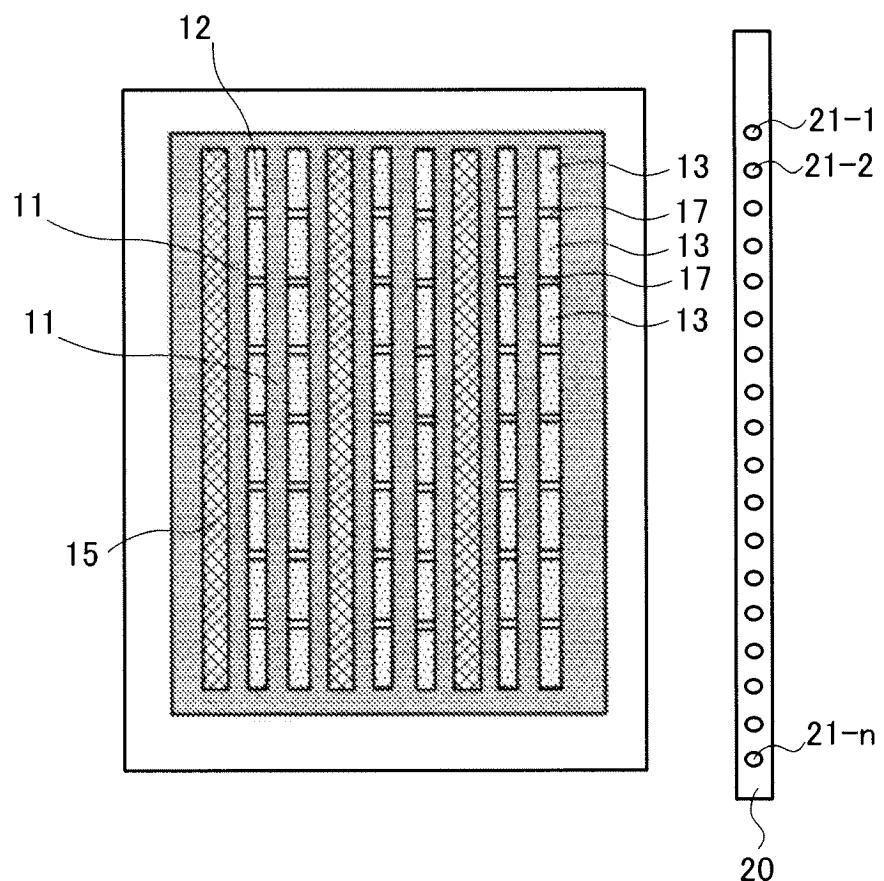


FIG.6

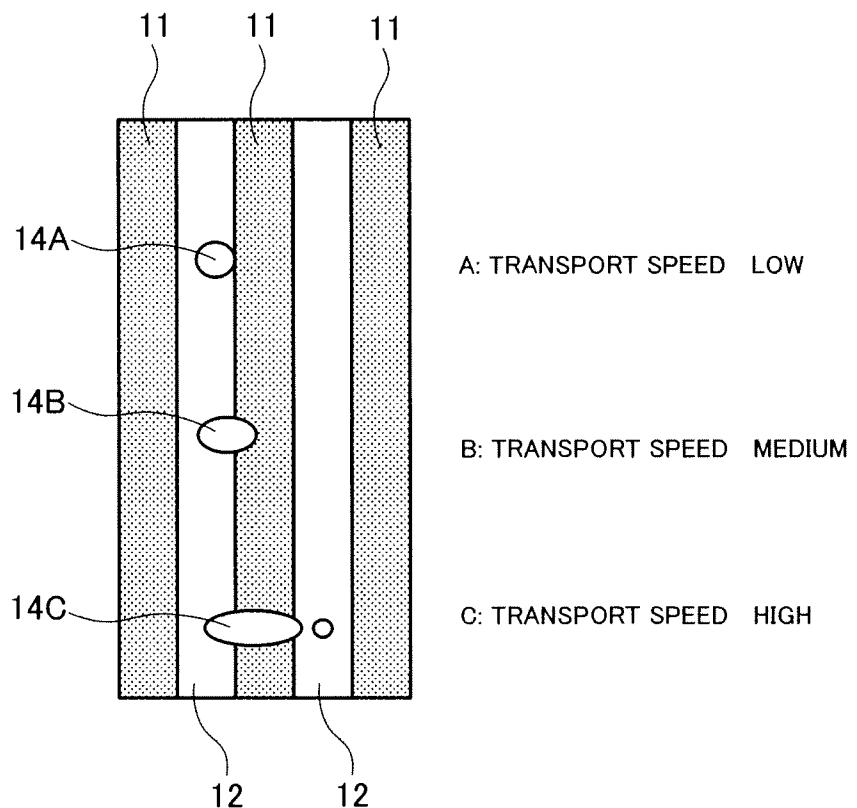
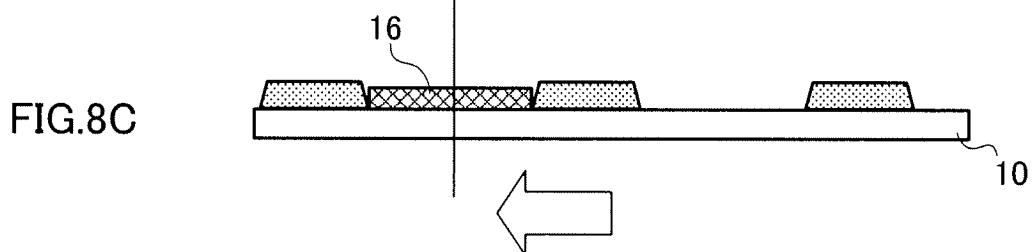
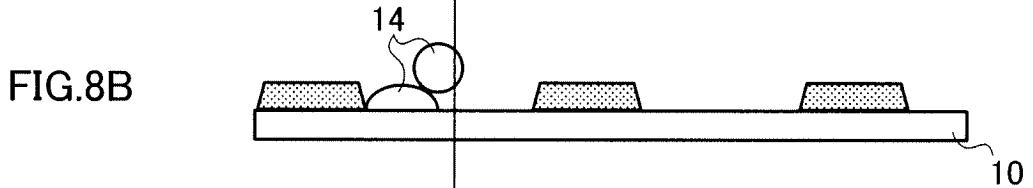
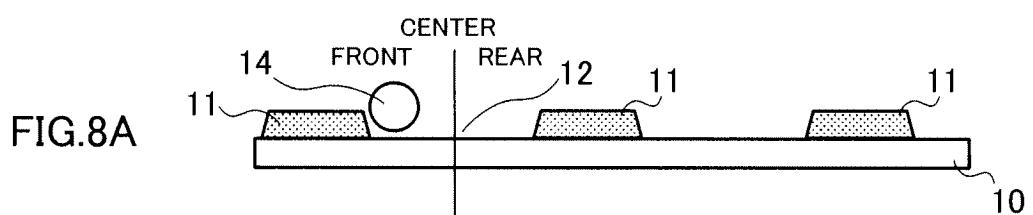

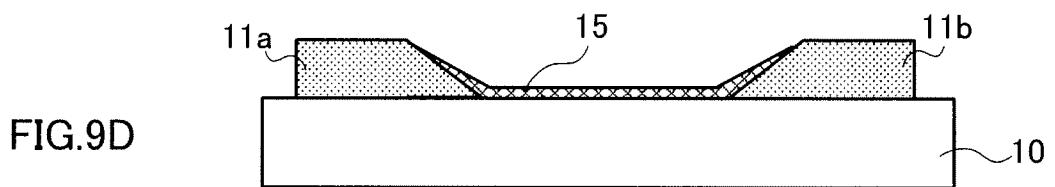
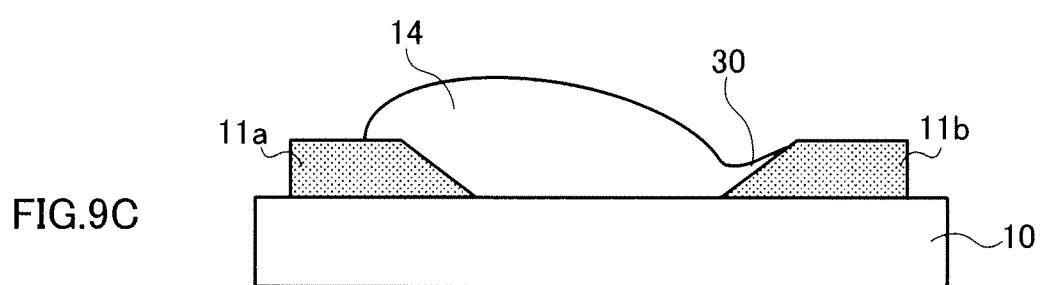
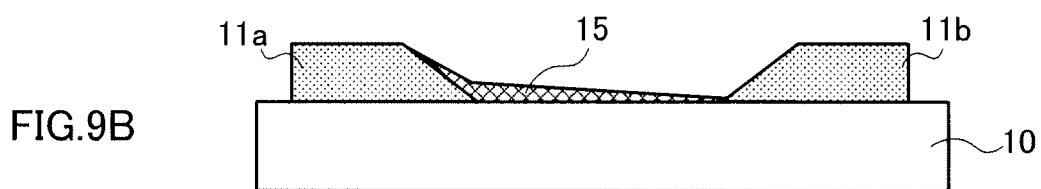
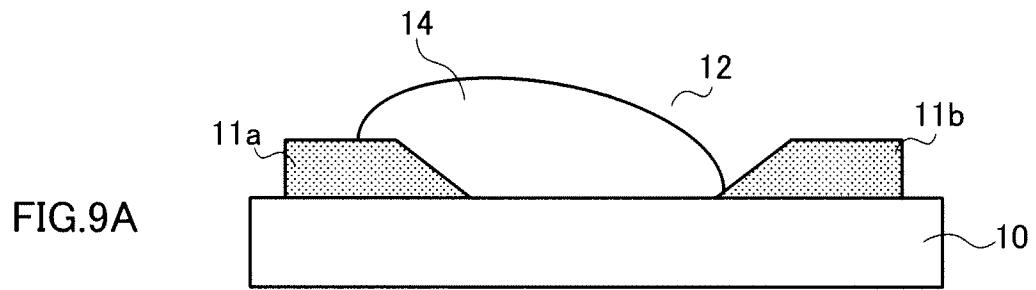


FIG.7





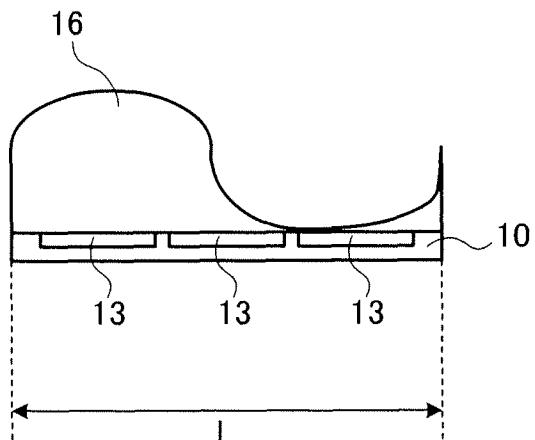


FIG.10A

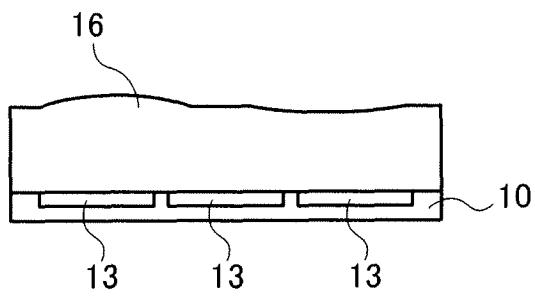


FIG.10B

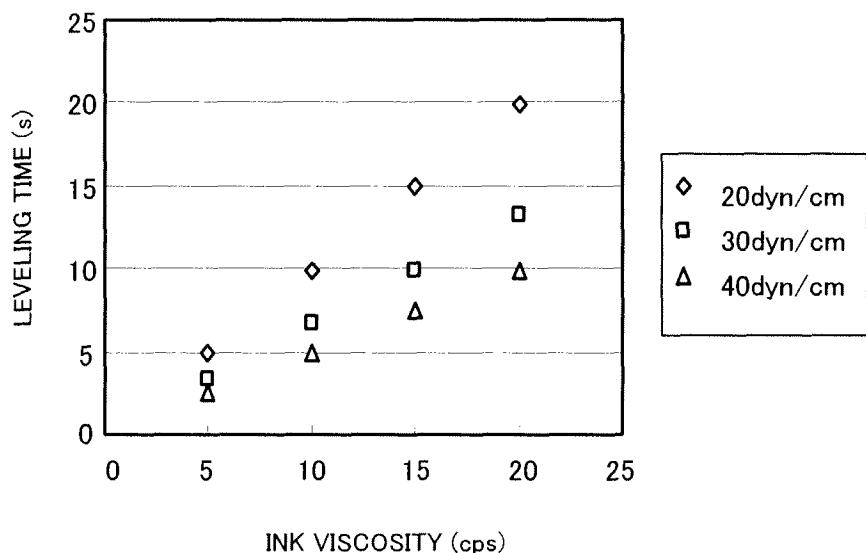


FIG.11

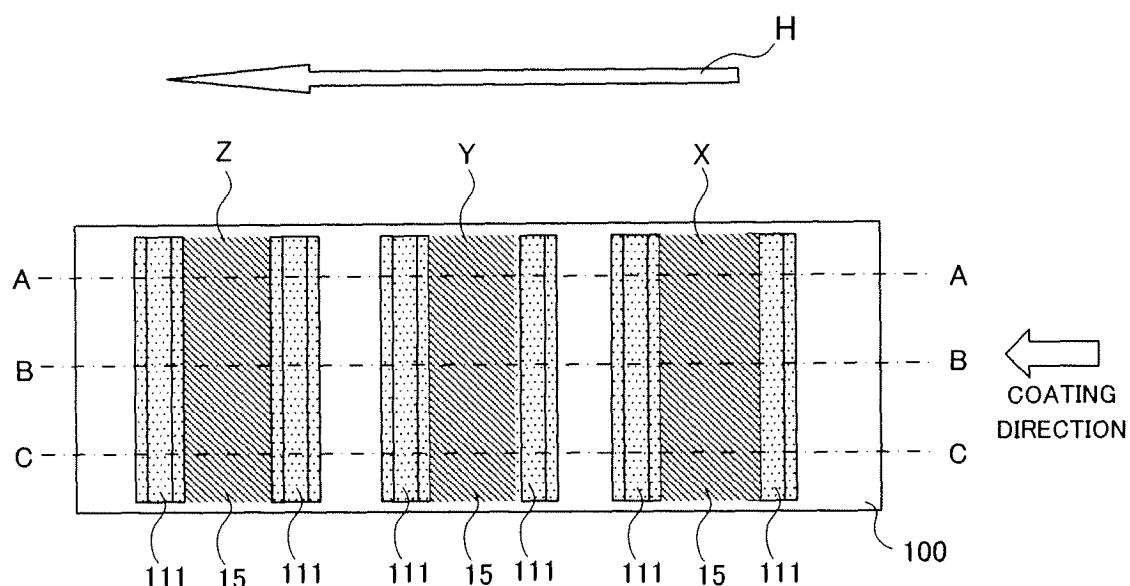


FIG.12-1

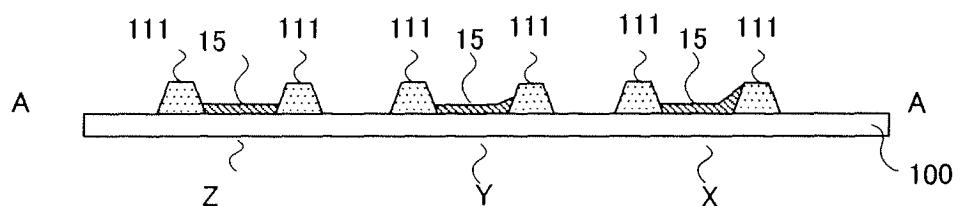


FIG.12-2

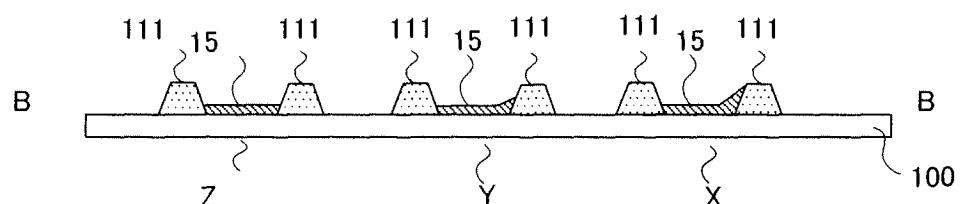


FIG.12-3

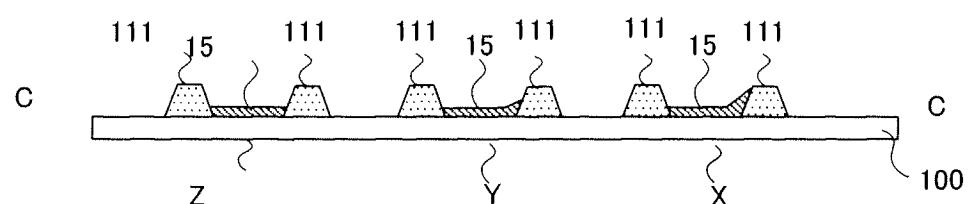


FIG.12-4

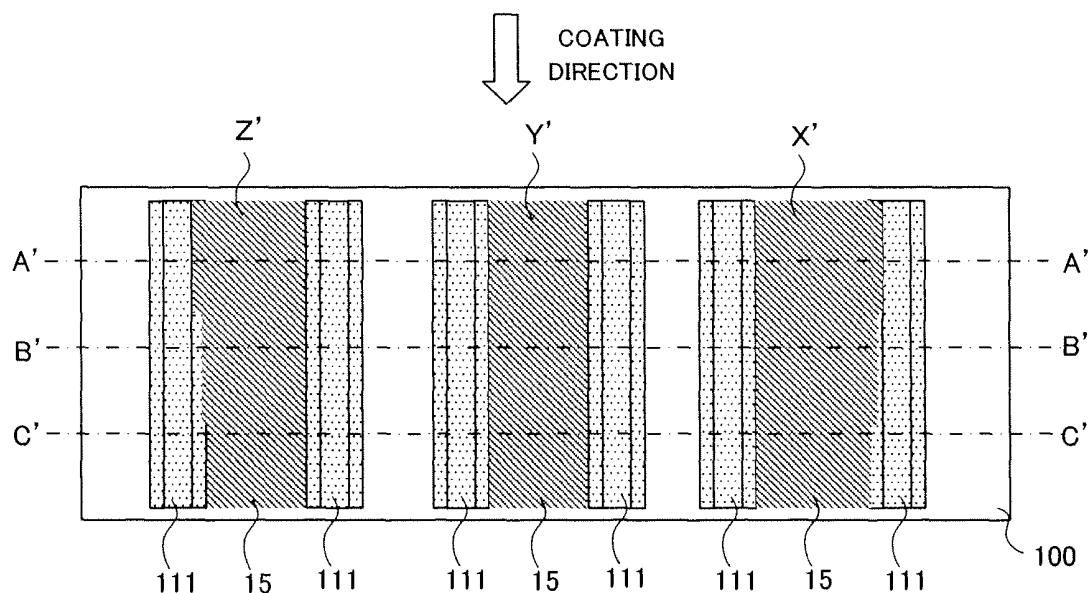


FIG.13-1

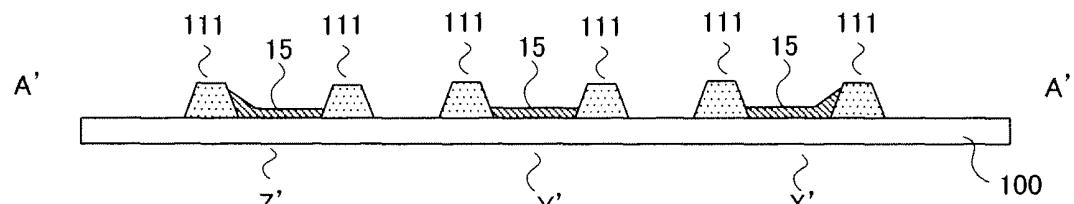


FIG.13-2

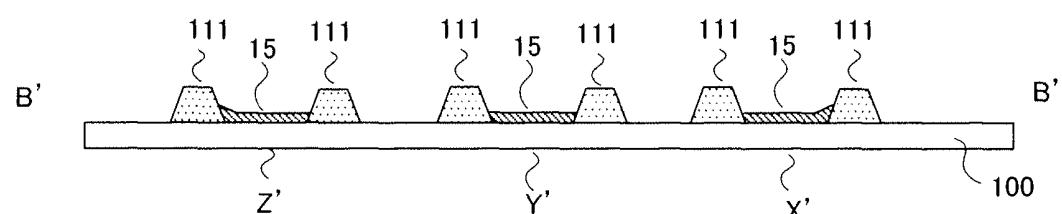


FIG.13-3

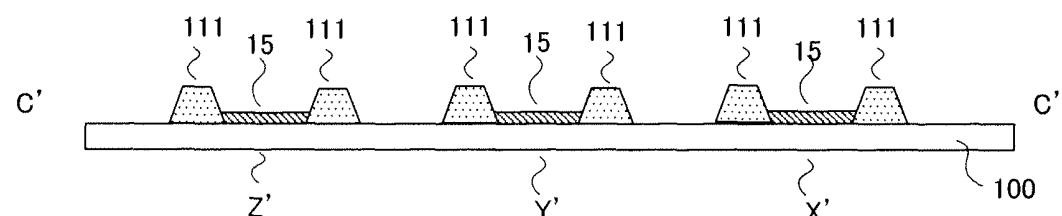


FIG.13-4

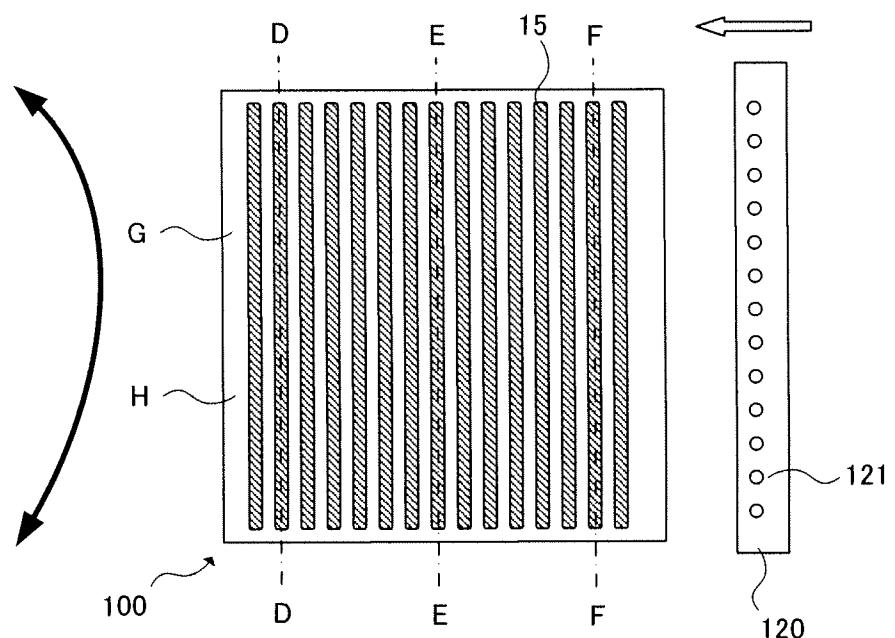


FIG.14-1

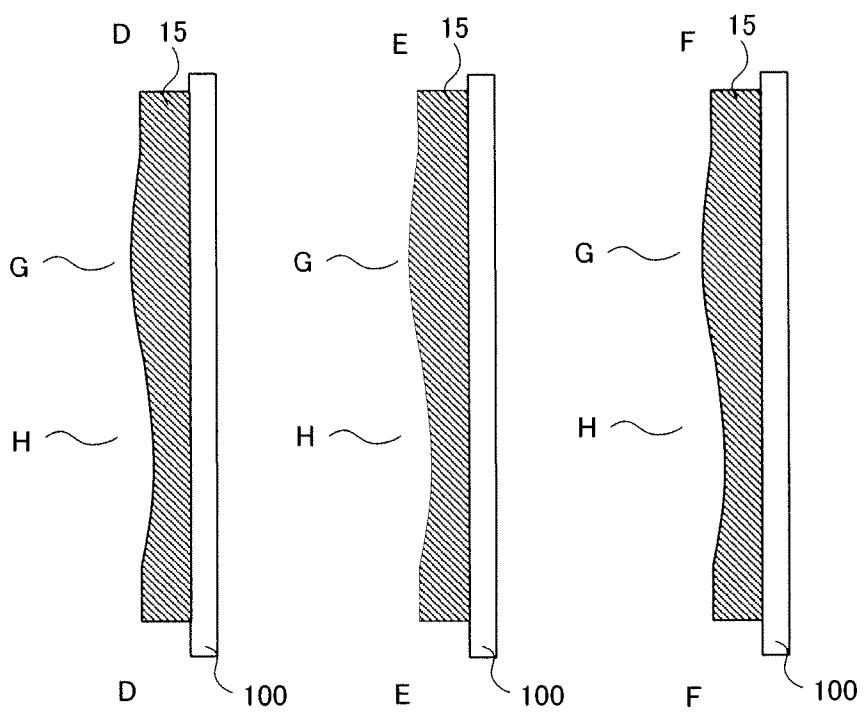


FIG.14-2

FIG.14-3

FIG.14-4

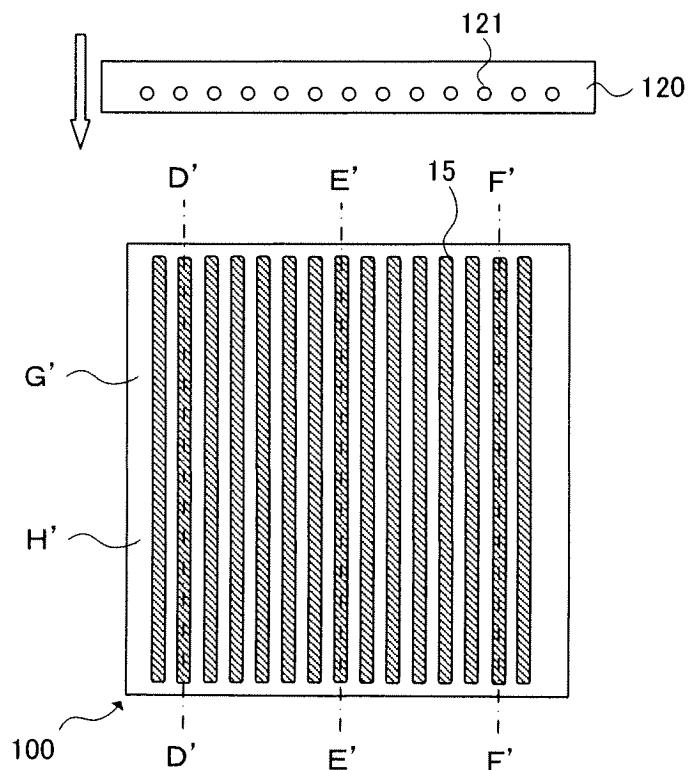


FIG.15-1

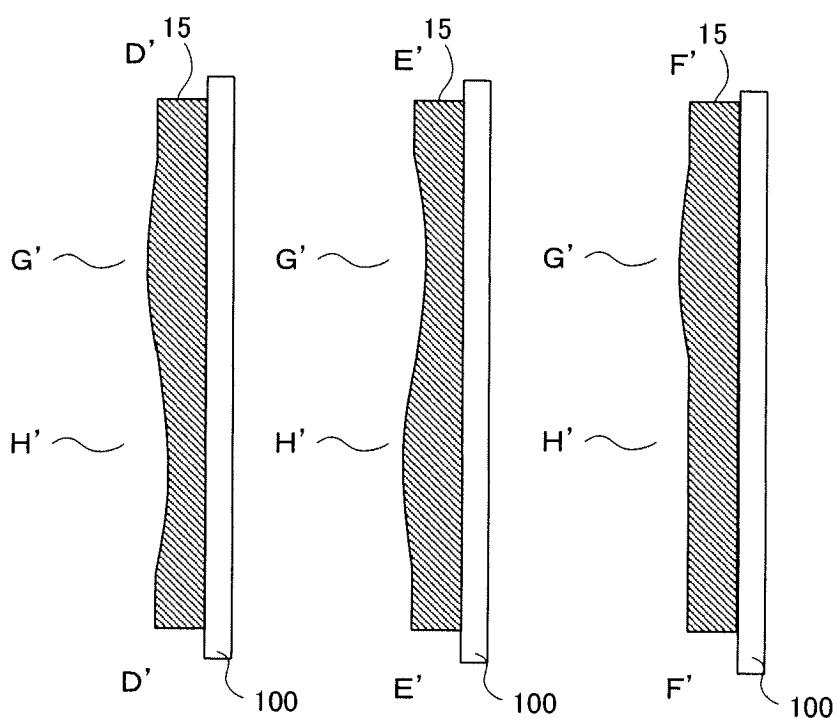


FIG.15-2

FIG.15-3

FIG.15-4

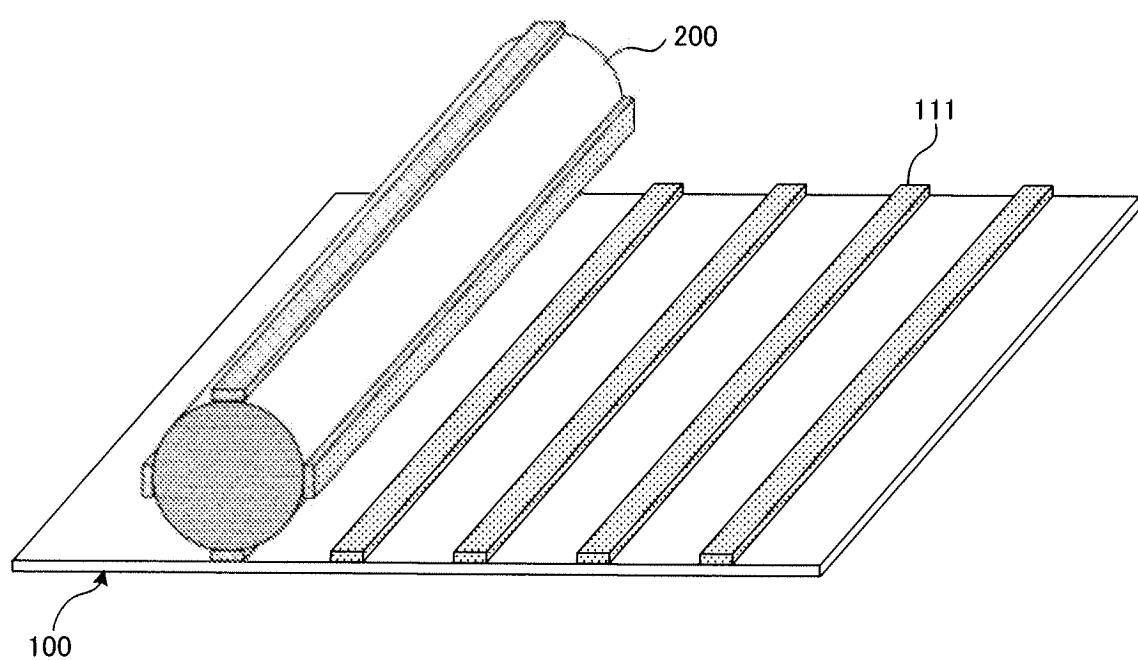


FIG.16

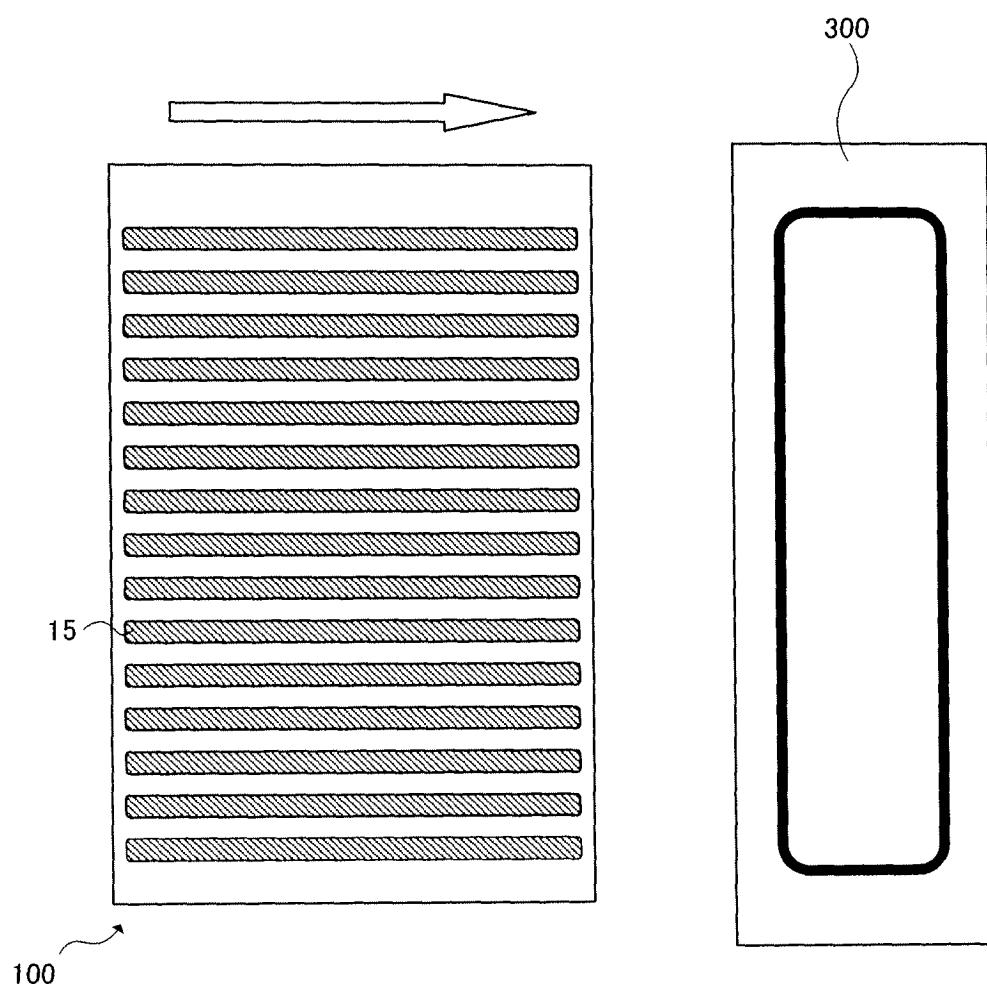


FIG.17

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP2009/002300												
A. CLASSIFICATION OF SUBJECT MATTER H05B33/10(2006.01)i, G09F9/30(2006.01)i, H01L27/32(2006.01)i, H01L51/50(2006.01)i, H05B33/12(2006.01)i, H05B33/22(2006.01)i														
According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H05B33/10, G09F9/30, H01L27/32, H01L51/50, H05B33/12, H05B33/22														
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2009 Kokai Jitsuyo Shinan Koho 1971-2009 Toroku Jitsuyo Shinan Koho 1994-2009														
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;">Category*</th> <th style="text-align: left; padding: 2px;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="text-align: left; padding: 2px;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">X</td> <td style="padding: 2px;">JP 2003-208979 A (Casio Computer Co., Ltd.), 25 July, 2003 (25.07.03), Par. Nos. [0095] to [0100]; Fig. 6 (Family: none)</td> <td style="text-align: center; padding: 2px;">1, 7</td> </tr> <tr> <td style="text-align: center; padding: 2px;">Y</td> <td style="padding: 2px;">JP 2004-90621 A (Canon Inc.), 25 March, 2004 (25.03.04), Fig. 26 & US 7111755 B2 & KR 10-2004-0005620 A & CN 1480327 A</td> <td style="text-align: center; padding: 2px;">3 2, 4-6, 8</td> </tr> <tr> <td style="text-align: center; padding: 2px;">A</td> <td style="padding: 2px;">JP 2004-71222 A (Seiko Epson Corp.), 04 March, 2004 (04.03.04), Par. Nos. [0043], [0084]; Fig. 18 & US 2004/0056915 A1</td> <td style="text-align: center; padding: 2px;">1-8</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	JP 2003-208979 A (Casio Computer Co., Ltd.), 25 July, 2003 (25.07.03), Par. Nos. [0095] to [0100]; Fig. 6 (Family: none)	1, 7	Y	JP 2004-90621 A (Canon Inc.), 25 March, 2004 (25.03.04), Fig. 26 & US 7111755 B2 & KR 10-2004-0005620 A & CN 1480327 A	3 2, 4-6, 8	A	JP 2004-71222 A (Seiko Epson Corp.), 04 March, 2004 (04.03.04), Par. Nos. [0043], [0084]; Fig. 18 & US 2004/0056915 A1	1-8
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	JP 2003-208979 A (Casio Computer Co., Ltd.), 25 July, 2003 (25.07.03), Par. Nos. [0095] to [0100]; Fig. 6 (Family: none)	1, 7												
Y	JP 2004-90621 A (Canon Inc.), 25 March, 2004 (25.03.04), Fig. 26 & US 7111755 B2 & KR 10-2004-0005620 A & CN 1480327 A	3 2, 4-6, 8												
A	JP 2004-71222 A (Seiko Epson Corp.), 04 March, 2004 (04.03.04), Par. Nos. [0043], [0084]; Fig. 18 & US 2004/0056915 A1	1-8												
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		<input type="checkbox"/> See patent family annex.												
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed														
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family														
Date of the actual completion of the international search 19 August, 2009 (19.08.09)		Date of mailing of the international search report 01 September, 2009 (01.09.09)												
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer												
Facsimile No.		Telephone No.												

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP2009/002300
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2008-108570 A (Sharp Corp.), 08 May, 2008 (08.05.08), Figs. 21 to 25 (Family: none)	1-8

Form PCT/ISA/210 (continuation of second sheet) (April 2007)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004362818 A [0008]
- JP 2003266669 A [0008]
- US 7091660 B [0008]
- JP 2008015309 A [0008]
- US 20080113282 A [0008]
- JP 2008108570 A [0008]
- JP 2007080545 A [0008]
- JP 2008141291 A [0088]

专利名称(译)	有机电致发光显示器及其制造方法		
公开(公告)号	EP2296442A1	公开(公告)日	2011-03-16
申请号	EP2009754421	申请日	2009-05-25
[标]申请(专利权)人(译)	松下电器产业株式会社		
申请(专利权)人(译)	松下电器产业株式会社		
当前申请(专利权)人(译)	PANASONIC知识产权管理有限公司 , LT		
[标]发明人	HAYATA HIROSHI SUZUKI NAOKI KANATA YOSHIO		
发明人	HAYATA, HIROSHI SUZUKI, NAOKI KANATA, YOSHIO		
IPC分类号	H05B33/10 G09F9/30 H01L27/32 H01L51/50 H05B33/12 H05B33/22		
CPC分类号	H01L51/0005 H01L27/3211 H01L27/3246 H01L51/56		
优先权	2008141291 2008-05-29 JP		
其他公开文献	EP2296442A4 EP2296442B1		
外部链接	Espacenet		

摘要(译)

本发明提供了一种抑制有机EL显示器中发光条纹的方法，该有机EL显示器具有通过喷墨方法涂覆形成的有机发光层。本发明的有机EL显示器的制造方法包括：准备具有两个或更多个彼此平行的线性堤的显示基板，以及布置在线性堤之间的区域中的两个或更多个像素区域；布置喷墨头使得喷嘴的排列方向和线性排的线方向平行；并且在垂直于线性排的线方向的方向上相对移动喷墨头并从喷嘴排出墨水以将墨水施加到由线性排限定的每个区域。

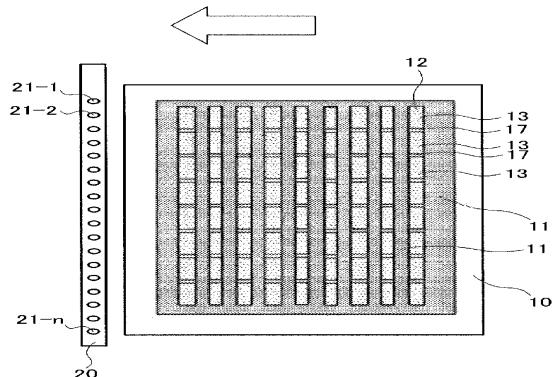


FIG.3A