



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.09.2013 Bulletin 2013/37

(51) Int Cl.:
H01L 27/32 (2006.01)

(21) Application number: **13157562.3**

(22) Date of filing: **04.03.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME

(72) Inventor: **Lee, Sang-Shin**
Yongin-City (KR)

(74) Representative: **Gulde Hengelhaupt Ziebig & Schneider**
Patentanwälte - Rechtsanwälte
Wallstrasse 58/59
10179 Berlin (DE)

(30) Priority: **06.03.2012 KR 20120022967**


(71) Applicant: **Samsung Display Co., Ltd.**
Yongin-City, Gyeonggi-Do, 446-711 (KR)

(54) **Pixel arrangement structure for organic light emitting display device**

(57) A pixel arrangement structure of an OLED display is provided. The pixel arrangement structure includes: a first pixel (100) having a center coinciding with a center of a virtual square (VS); a second pixel (200) separated from the first pixel (100) and having a center

at a first vertex (P1) of the virtual square (VS); and a third pixel (300) separated from the first pixel (100) and the second pixel (200), and having a center at a second vertex (P2) neighboring the first vertex (P1) of the virtual square (VS).

FIG.1

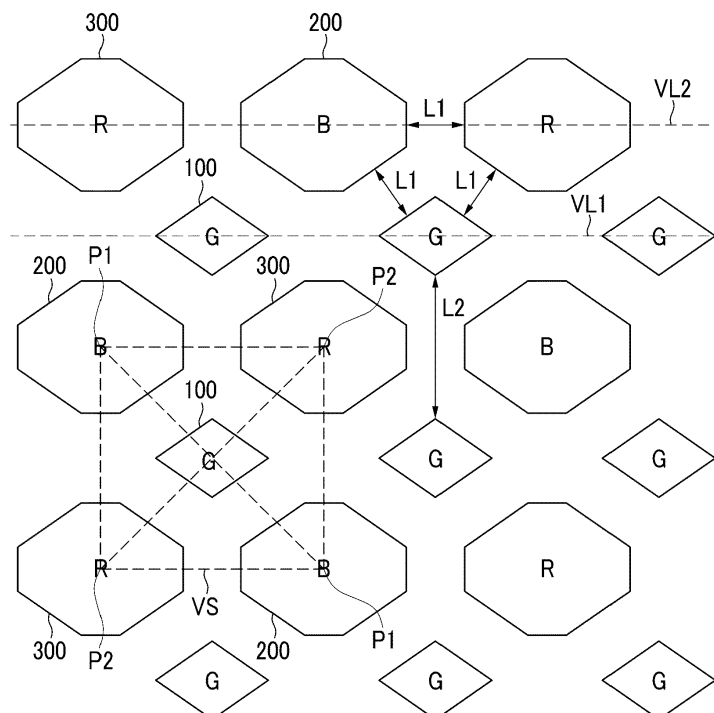

Description

BACKGROUND

1. Field

[0001] Aspects of embodiments of the present invention relate generally to a pixel arrangement structure of an organic light emitting diode (OLED) display.

2. Description of the Related Art

[0002] A display device is a device that displays an image. Recently, an OLED display has been drawing attention. The OLED display has a self-luminous characteristic. Because the OLED display does not need a separate light source, unlike a liquid crystal display, it can have a relatively smaller thickness and weight than liquid crystal displays. In addition, the OLED display exhibits high-quality characteristics such as low power consumption, high luminance, high response speed, etc.

[0003] In general, the OLED display includes a plurality of pixels for emitting light of different colors. The plurality of pixels emit light to display an image. Here, the pixel refers to a minimum unit for displaying the images. For instance, there may be a gate line, a data line, and a power line such as a driving power line to drive each pixel. In addition, there may be an insulation layer such as a pixel definition layer to define an area and a shape of each pixel. Further, each pixel may be positioned between its neighboring pixels.

[0004] An organic emission layer included in the pixel of an OLED display may be deposited and formed by using a mask such as a fine metal mask (FMM). When reducing a gap between the neighboring pixels to obtain a high aperture ratio of the pixel, deposition reliability may be deteriorated. On the other hand, when increasing the gap between the pixels to improve the deposition reliability, the aperture ratio of the pixel may be deteriorated.

[0005] The above information disclosed in this Background section is only for enhancement of understanding of the background of the invention. Therefore, it may contain information that does not form the prior art that is already known in this country to a person of ordinary skill in the art.

SUMMARY

[0006] Aspects of embodiments of the present invention relate generally to a pixel arrangement structure of an OLED display. More particularly, aspects relate to a pixel arrangement structure of an OLED display for displaying images by emitting light through a plurality of pixels. An exemplary embodiment of the present invention provides a pixel arrangement structure for an OLED display having an improved aperture ratio of a pixel while efficiently setting up a gap between the pixels.

[0007] According to an exemplary embodiment of the

present invention, a pixel arrangement structure of an organic light emitting diode display is provided. The pixel arrangement structure includes: a first pixel having a center coinciding with a center of a virtual square; a second pixel separated from the first pixel and having a center at a first vertex of the virtual square; and a third pixel separated from the first pixel and the second pixel, and having a center at a second vertex neighboring the first vertex of the virtual square.

5 [0008] The second pixel may include a pair of second pixels. The second pixels may be separated from each other by the first pixel.

10 [0009] The third pixel may include a pair of third pixels. The third pixels may be separated from each other by the first pixel.

15 [0010] The second pixels and the third pixels may enclose the first pixel in the virtual square.

[0011] The first pixel, the second pixels, and the third pixels may have polygonal shapes. The second pixels and the third pixels may have a larger area than the first pixel.

20 [0012] The first pixel may have a quadrilateral shape. The second pixels and the third pixels may have hexagonal or octagonal shapes.

25 [0013] The second pixels and the third pixels may have octagonal shapes.

[0014] The second pixels and the third pixels may have a same area. A distance between the first pixel and the second pixels, a distance between the first pixel and the third pixels, and a distance between the second pixels and the third pixels may be a same first length.

30 [0015] The first pixel may include a plurality of first pixels. The plurality of first pixels may have a same quadrilateral shape. A distance between neighboring ones of the plurality of first pixels may be a second length that is longer than the first length.

35 [0016] The second pixels may have a larger area than the third pixels. A distance between the second pixels and the third pixels may be a first length. A distance between the first pixel and the second pixels, and a distance between the first pixel and the third pixels may be a same second length.

40 [0017] The first pixel may include a plurality of first pixels. The plurality of first pixels may have a same quadrilateral shape. A distance between neighboring ones of the plurality of first pixels may be a third length that is longer than the first length and the second length.

45 [0018] The first pixel may include a plurality of first pixels. Neighboring ones of the plurality of first pixels may have quadrilateral shapes that are symmetrical to each other. A distance between the neighboring ones of the plurality of first pixels may be a third length that is longer than the first length and the second length.

[0019] The first pixel may include a plurality of first pixels. Neighboring ones of the plurality of first pixels may have quadrilateral shapes that are symmetrical to each other.

50 [0020] The second pixels may have a larger area than

the third pixels.

[0021] The third pixels may have a larger area than the second pixels.

[0022] The first pixel may have an octagonal shape, and the second pixels and the third pixels may have quadrilateral shapes.

[0023] The second pixels may have a larger area than the third pixels, a distance between the second pixels and the third pixels may be a first length, and a distance between the first pixel and the second pixels, and a distance between the first pixel and the third pixels may be a same second length.

[0024] The first pixel may comprise a plurality of first pixels, neighboring ones of the plurality of first pixels may have octagonal shapes that are symmetrical to each other, and a distance between the neighboring ones of the plurality of first pixels may be a third length that is longer than the first length and the second length.

[0025] The first pixel, the second pixel, and the third pixel may be configured to emit different color lights.

[0026] The first pixel, the second pixel, and the third pixel may be configured to emit green light, blue light, and red light, respectively.

[0027] According to an exemplary embodiment of the present invention, the pixel arrangement structure of the OLED display improves the aperture ratio of the pixel while efficiently setting up the gap between the pixels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] FIG. 1 is a view of a pixel arrangement structure of an OLED display according to a first exemplary embodiment.

[0029] FIG. 2 is a view of a pixel arrangement structure of an OLED display according to a second exemplary embodiment.

[0030] FIG. 3 is a view of a pixel arrangement structure of an OLED display according to a third exemplary embodiment.

[0031] FIG. 4 is a view of a pixel arrangement structure of an OLED display according to a fourth exemplary embodiment.

[0032] FIG. 5 is a view of a pixel arrangement structure of an OLED display according to a fifth exemplary embodiment.

DETAILED DESCRIPTION

[0033] Several exemplary embodiments according to the present invention are described hereinafter in detail with reference to the accompanying drawings to allow a person of ordinary skill in the art to practice the invention without undue experimentation. The present invention can be embodied in several different forms, and is not limited to exemplary embodiments that are described herein.

[0034] In order to clarify the description of embodiments of the present invention, parts that are not related

to the embodiments may be omitted. In addition, the same elements or equivalents are referred to with the same reference numerals throughout the specification. For example, the same reference numerals are used for the elements having the same constructions throughout. Such elements are representatively described in a first exemplary embodiment, and in remaining exemplary embodiments, only different constructions from those of the first exemplary embodiment may be described.

[0035] Further, since sizes and thicknesses of constituent members shown in the accompanying drawings are arbitrarily given for better understanding and ease of description, the present invention is not limited to the illustrated sizes and thicknesses. In addition, unless explicitly described to the contrary, the word "comprise" and variations such as "comprises" or "comprising" will be understood to imply the inclusion of stated elements but not the exclusion of any other elements.

[0036] Nevertheless, even though each of the pixels are drawn as stereotypical polygonal shapes in the drawings, the present invention is not limited to this shape. That is, the shapes of the pixels may be modified to avoid interference with the other components of the OLED (e.g., wirings) within the scope of the appended claims.

[0037] A pixel arrangement structure (or pixel arrangement) of an OLED display according to a first exemplary embodiment will be described with reference to FIG. 1. FIG. 1 is a view schematically showing a portion of pixels forming an OLED display.

[0038] As shown in FIG. 1, the pixel arrangement structure of the OLED display includes a plurality of first pixels 100, a plurality of second pixels 200, and a plurality of third pixels 300. Here, the pixel refers to a minimum unit for displaying an image (for example, the minimum addressable unit of the display).

[0039] Further, among the first pixels 100, the second pixels 200, and the third pixels 300, power lines for driving each of the pixels, such as a gate line, a data line, a driving power line, and the like, may be located. In addition, an insulation layer, such as a pixel defining layer, for defining each of the pixels may be disposed. Finally, an OLED including an anode, an organic emission layer, and a cathode to correspond to each of the first pixels 100, the second pixels 200, and the third pixels 300 may be disposed. These configurations are technologies known in the art and further description thereof is omitted for ease of description. A shape of each of the pixels may be defined by the power lines, the pixel defining layer, the anode, or the like, but is not limited thereto.

[0040] In the pixel arrangement of FIG. 1, each of the first pixels 100 has a smaller area than neighboring second pixels 200 and third pixels 300, and has a quadrilateral (i.e., four-sided) shape among polygon shapes. For example, in the pixel arrangement of FIG. 1, each of the first pixels 100 has the same quadrilateral shape (e.g., a square or rhombus). The first pixels 100 are spaced apart from each other and arranged in rows, such as along a first virtual straight line VL1. The first pixels 100 emit

green light, and may include an organic emission layer for emitting green light.

[0041] The second pixels 200 are arranged diagonally with respect to the first pixels 100, such as at first vertices P1 along one diagonal of a virtual square VS having one of the first pixels 100 as a center point (or center) of the virtual square VS. In a similar fashion, the third pixels 300 are arranged diagonally with respect to the first pixels 100, such as at second vertices P2 along the other diagonal of the virtual square VS.

[0042] In the virtual square VS, each of the second pixels 200 is separated from the first pixel 100, and is centered at one of the first vertices P1 of the virtual square VS. Each of the second pixels 200 has a larger area than the neighboring first pixel 100 and has an octagonal (i.e., eight-sided) shape. In FIG. 1, the second pixels 200 each have the same octagonal shape. In addition, the second pixels 200 are arranged diagonally and separated from each other by the first pixels 100. The second pixels 200 emit blue light, and may include an organic emission layer for emitting blue light.

[0043] In a similar fashion, in the virtual square VS, each of the third pixels 300 is separated from the first pixel 100 and the second pixels 200, and is centered at one of the second vertices P2 neighboring the first vertices P1 of the virtual square VS. Each of the third pixels 300 has a larger area than the neighboring first pixel 100 and the same area as each of the second pixels 200. Further, the third pixels have an octagonal shape (e.g., similar to or the same as the second pixels 200). In FIG. 1, the third pixels 300 each have the same octagonal shape. In addition, the third pixels 300 are arranged diagonally and separated from each other by the first pixels 100. The third pixels 300 emit red light, and may include an organic emission layer for emitting red light.

[0044] The third pixels 300 and the second pixels 200 are spaced apart from each other and alternately arranged in rows, such as along a second virtual straight line VL2. In a similar fashion, the third pixels 300 and the second pixels 200 are spaced apart from each other and alternately arranged in columns. Accordingly, in the virtual square VS, two of the second pixels 200 have their corresponding centers positioned at the first vertices P1 and two of the third pixels 300 have their corresponding centers positioned at the second vertices P2 to enclose a corresponding one of the first pixels 100 (e.g., in the virtual square VS).

[0045] As described above, the center of each of the second pixels 200 is positioned at one of the first vertices P1 of the virtual square VS. In addition, the center of the corresponding first pixel 100 is the center of the virtual square VS. Further, the center of each of the third pixels 300 is positioned at one of the second vertices P2. Moreover, the second pixels 200 and the third pixels 300 each have the same area.

[0046] As a non-limiting example, the distance (e.g., a shortest distance) between one of the first pixels 100 and an adjacent one of the second pixels 200 is a first length

L1, the distance between one of the first pixels 100 and an adjacent one of the third pixels 300 is the same first length L1, and the distance between one of the second pixels 200 and an adjacent one of the third pixels 300 is the same first length L1, as shown in FIG. 1. In addition, the distance (e.g., a shortest distance) between the neighboring first pixels 100 is a second length L2 that is longer than the first length L1. It should be noted that L1, L2, L3, ... may be used throughout to represent shortest distances between corresponding pixels.

[0047] Therefore, the gap of the first length L1 is formed between adjacent pairs of the first pixels 100 and the second pixels 200, between adjacent pairs of the first pixels 100 and the third pixels 300, and between adjacent pairs of the second pixels 200 and the third pixels 300. In addition, the gap of the second length L2 that is longer than the first length L1 is formed between the neighboring ones of the first pixels 100. This results in improved deposition reliability when using a fine metal mask to form the green, blue, and red organic emission layers respectively included in the first pixels 100, the second pixels 200, and the third pixels 300.

[0048] In addition, by enclosing each of the first pixels 100 by a pair of the second pixels 200 and a pair of the third pixels 300, the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300 may be improved. Accordingly, a manufacturing time and manufacturing cost of the entire OLED display may be reduced and the display quality of the image of the OLED display may be improved.

[0049] As described above, in the pixel arrangement structure of the OLED display of FIG. 1, the first pixels 100, the second pixels 200, and the third pixels 300 have polygonal shapes (e.g., the first pixels have a quadrilateral shape and the second pixels 200 and the third pixels 300 have an octagonal shape). In addition, it is worth considering that the deposition process of the organic emission layer is one of the unique manufacturing characteristics of the OLED display. Accordingly, to improve the deposition reliability of the organic emission layer in the deposition process using the fine metal mask and to improve the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300, the center of each of the first pixels 100 is positioned at the center of a virtual square VS formed by a first pair of diagonal vertices P1 and a second pair of diagonal vertices P2. In the virtual square VS, the centers of a pair of the second pixels 200 are positioned at the first vertices P1, and the centers of a pair of the third pixels 300 are positioned at the second vertices P2.

[0050] In addition, in the pixel arrangement structure of the OLED display of FIG. 1, the first pixels 100, the second pixels 200, and the third pixels 300 respectively emit green, blue, and red light. However, in pixel arrangement structures of other OLED displays, the first pixels 100, the second pixels 200, and the third pixels 300 may emit light of different colors. For example, at least one of the second pixels 200 or the third pixels may emit white

light.

[0051] Next, a pixel arrangement structure of an OLED display according to a second exemplary embodiment will be described with reference to FIG. 2. Parts that are different from the exemplary embodiment of FIG. 1 will be described, while the description of parts that are equivalent to the first exemplary embodiment may be omitted. For better comprehension and ease of description, constituent elements of the second exemplary embodiment that are the same as or similar to those of the first embodiment of FIG. 1 will have the same reference numerals.

[0052] As shown in FIG. 2, the pixel arrangement structure of the OLED display includes a plurality of first pixels 100, a plurality of second pixels 200, and a plurality of third pixels 300. The plurality of first pixels 100 have the same quadrilateral shape (e.g., a parallelogram). In addition, the second pixels 200 have a larger area than the third pixels 300. The second pixels 200 and the third pixels 300 may have polygonal shapes, such as octagonal or hexagonal (i.e., six-sided).

[0053] In a similar fashion to that of FIG. 1, the centers of a pair of the second pixels 200 are positioned at first vertices P1 along one diagonal of a virtual square VS having a center coinciding with a center of one of the first pixels 100. In addition, the centers of a pair of the third pixels 300 are positioned at second vertices P2 along another diagonal of the virtual square VS. However, in FIG. 2, the second pixels 200 have a larger area than the third pixels 300.

[0054] As a non-limiting example, the distance between adjacent ones of the second pixels 200 and the third pixels 300 is a third length L3, while the distance between each of the first pixels 100 and adjacent ones of the second pixels 200 or the third pixels 300 have a same fourth length L4. In addition, the distance between neighboring ones of the first pixels 100 is a fifth length L5 that is longer than the third length L3 and the fourth length L4.

[0055] Accordingly, the gap of the fourth length L4 is formed between adjacent pairs of the first pixels 100 and the second pixels 200, and between adjacent pairs of the first pixels 100 and the third pixels 300. In addition, the gap of the third length L3 is formed between adjacent pairs of the second pixels 200 and the third pixels 300. Further, the gap of the fifth length L5 that is longer than the third length L3 and the fourth length L4 is formed between the neighboring ones of the first pixels 100. This results in improved deposition reliability in the deposition process using the fine metal mask to form the green, blue, and red organic emission layers respectively included in the first pixels 100, the second pixels 200, and the third pixels 300.

[0056] In addition, by enclosing each of the first pixels 100 by a pair of the second pixels 200 and a pair of the third pixels 300, the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300 may be improved. Accordingly, the manufacturing time and the

manufacturing cost of the OLED display may be reduced and the display quality of the image of the OLED display may be improved.

[0057] Further, in the pixel arrangement structure of the OLED display of FIG. 2, the second pixels 200 that emit blue have the shortest life span among the first pixels 100, the second pixels 200, and the third pixels 300. Accordingly, the second pixels 200 have a larger area than the third pixels 300, thereby suppressing the deterioration of the life span of the OLED display. That is, the pixel arrangement structure of the OLED display of FIG. 2 provides improved life span.

[0058] Next, a pixel arrangement structure of an OLED display according to a third exemplary embodiment will be described with reference to FIG. 3. Parts that are different from the above exemplary embodiments will be described, while the description of parts that are equivalent to the above exemplary embodiments may be omitted. For better comprehension and ease of description, constituent elements of the third exemplary embodiment that are the same as or similar to the above exemplary embodiments will have the same reference numerals.

[0059] As shown in FIG. 3, the pixel arrangement structure of the OLED display includes a plurality of first pixels 100, a plurality of second pixels 200, and a plurality of third pixels 300. Among the plurality of first pixels 100, the neighboring first pixels 100 have a quadrilateral shape (e.g., parallelogram) and are symmetrical to each other. In addition, the second pixels 200 have a larger area than the third pixels 300. The second pixels 200 and the third pixels may have polygonal shapes (e.g., hexagonal or octagonal).

[0060] In a similar fashion to that of FIGs. 1-2, the centers of a pair of the second pixels 200 are positioned at first vertices P1 along one diagonal of a virtual square VS having a center coinciding with a center of one of the first pixels 100. In addition, the centers of a pair of the third pixels 300 are positioned at second vertices P2 along another diagonal of the virtual square VS. However, in FIG. 3, the neighboring first pixels 100 have a quadrilateral shape and are symmetrical to each other, while the second pixels 200 have a larger area than the third pixels 300. This results in improved deposition reliability in the deposition process using the fine metal mask to form the green, blue, and red organic emission layers respectively included in the first pixels 100, the second pixels 200, and the third pixels 300.

[0061] In addition, by placing each of the first pixels 100 between a pair of the second pixels 200 and between a pair of the third pixels 300, the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300 may be improved. Accordingly, the manufacturing time and the manufacturing cost of the OLED display may be reduced and the display quality of the image of the OLED display may be improved.

[0062] Further, in the pixel arrangement structure of the OLED display of FIG. 3, the second pixels 200 that emit blue have the shortest life span among the first pixels

100, the second pixels 200, and the third pixels 300. Accordingly, the second pixels 200 have a larger area than the third pixels 300, thereby suppressing the deterioration of the life span of the OLED display. That is, the pixel arrangement structure of the OLED display provides improved life span.

[0063] Next, a pixel arrangement structure of an OLED display according to a fourth exemplary embodiment will be described with reference to FIG. 4. Parts that are different from the above exemplary embodiments will be described, while the description of parts that are equivalent to the above exemplary embodiments may be omitted. For better comprehension and ease of description, constituent elements of the fourth exemplary embodiment that are the same as or similar to the above exemplary embodiments will have the same reference numerals.

[0064] As shown in FIG. 4, the pixel arrangement structure of the OLED display includes a plurality of first pixels 100, a plurality of second pixels 200, and a plurality of third pixels 300. Among the plurality of first pixels 100, the neighboring first pixels 100 have a quadrilateral shape (e.g., parallelogram) and are symmetrical to each other. In addition, the third pixels 300 have a larger area than the second pixels 200. The second pixels 200 and the third pixels may have polygonal shapes (e.g., hexagonal or octagonal).

[0065] In a similar fashion to that of FIGs. 1-3, the centers of a pair of the second pixels 200 are positioned at the first vertices P1 along one diagonal of a virtual square VS having a center coinciding with a center of one of the first pixels 100. In addition, the centers of a pair of the third pixels 300 are positioned at second vertices P2 along another diagonal of the virtual square VS. However, in FIG. 4, the neighboring first pixels 100 have a quadrilateral shape and are symmetrical to each other, while the third pixels 300 have a larger area than the second pixels 200. This results in improved deposition reliability in the deposition process using the fine metal mask to form the green, blue, and red organic emission layers respectively included in the first pixels 100, the second pixels 200, and the third pixels 300.

[0066] In addition, by enclosing each of the first pixels 100 by a pair of the second pixels 200 and a pair of the third pixels 300, the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300 may be improved. Accordingly, the manufacturing time and the manufacturing cost of the OLED display may be reduced and the display quality of the image of the OLED display may be improved.

[0067] Next, a pixel arrangement structure of an OLED display according to a fifth exemplary embodiment will be described with reference to FIG. 5. Parts that are different from the above exemplary embodiments will be described, while the description of parts that are equivalent to the above exemplary embodiments may be omitted. For better comprehension and ease of description, constituent elements of the fifth exemplary embodiment

that are the same as or similar to the above exemplary embodiments will have the same reference numerals.

[0068] As shown in FIG. 5, the pixel arrangement structure of the OLED display includes a plurality of first pixels 100, a plurality of second pixels 200, and a plurality of third pixels 300. Among the plurality of first pixels 100, the neighboring first pixels 100 have an octagonal shape and are symmetrical to each other. In addition, the second pixels 200 have a larger area than the third pixels 300. The second pixels 200 and the third pixels 300 may have quadrilateral shapes (e.g., rhombus).

[0069] In a similar fashion to that of FIGs. 1-3, the centers of a pair of the second pixels 200 are positioned at the first vertices P1 along one diagonal of a virtual square VS having a center coinciding with a center of one of the first pixels 100. In addition, the centers of a pair of the third pixels 300 are positioned at second vertices P2 along another diagonal of the virtual square VS. However, in FIG. 5, the neighboring first pixels 100 have an octagonal shape and are symmetrical to each other, while the second pixels 200 have a larger area than the third pixels 300. This results in improved deposition reliability in the deposition process using the fine metal mask to form the green, blue, and red organic emission layers respectively included in the first pixels 100, the second pixels 200, and the third pixels 300.

[0070] In addition, by enclosing each of the first pixels 100 by a pair of the second pixels 200 and a pair of the third pixels 300, the aperture ratio of the first pixels 100, the second pixels 200, and the third pixels 300 may be improved. Accordingly, the manufacturing time and the manufacturing cost of the OLED display may be reduced and the display quality of the image of the OLED display may be improved.

[0071] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, and equivalents thereof.

Claims

1. A pixel arrangement structure of an organic light emitting diode display, comprising:

at least one first pixel (100) having a center coinciding with a center of a virtual square (VS);
 at least one second pixel (200) separated from the first pixel (100) and having a center at a first vertex (P1) of the virtual square (VS); and
 at least one third pixel (300) separated from the first pixel (100) and the second pixel (200), and having a center at a second vertex (P2) neighboring the first vertex (P1) of the virtual square (VS).

2. The pixel arrangement structure of claim 1, comprising at least one pair of second pixels (200) arranged at the vertices of a diagonal of the virtual square (VS), wherein the second pixels (200) are separated from each other by the first pixel (100). 5
3. The pixel arrangement structure of claim 2, comprising at least one pair of third pixels (300) arranged at the vertices of a diagonal of the virtual square (VS), wherein the third pixels (300) are separated from each other by the first pixel (100). 10
4. The pixel arrangement structure of one of the preceding claims, wherein the at least one first pixel (100), the second pixels (200), and the third pixels (300) have polygonal shapes, and the second pixels (200) and the third pixels (300) have a larger area than the first pixel. 15
5. The pixel arrangement structure of claim 4, wherein the at least one first pixel (100) has a quadrilateral shape, and the second pixels (200) and the third pixels (300) have hexagonal or octagonal shapes. 20
6. The pixel arrangement structure of claim 5, wherein the second pixels (200) and the third pixels (300) have octagonal shapes. 25
7. The pixel arrangement structure of one of the preceding claims, comprising a plurality of first pixels (100), wherein a distance between one of the second pixels (200) and an adjacent third pixel (300) is a first length (L1, L3), a distance between the first pixel (100) and the second pixels (200) and a distance between the first pixel (100) and the third pixels (300) is a same second length (L1, L4), and a distance between neighboring ones of the plurality of first pixels (100) is a third length (L1, L5), wherein the third length (L1, L5) is longer than the first length (L1, L3) and the second length (L1, L4). 30 35 40
8. The pixel arrangement structure of claim 7, wherein: 45
the second pixels and the third pixels have a same area, and
the first length (L1) is the same as the second length (L1). 50
9. The pixel arrangement structure of claim 7, wherein the second pixels (200) have a larger area than the third pixels (300) or the third pixels (300) have a larger area than the second pixels (200). 55
10. The pixel arrangement structure of one of claims 7 to 9, wherein
- the plurality of first pixels (100) have a same quadrilateral shape, or
neighboring ones of the plurality of first pixels (100) have quadrilateral shapes that are symmetrical to each other.
11. The pixel arrangement structure of one of the preceding claims, wherein the at least one first pixel (100) has a octagonal shape, and the second pixels (200) and the third pixels (300) have quadrilateral shapes.
12. The pixel arrangement structure of claim 11, wherein neighboring ones of the plurality of first pixels (100) have octagonal shapes that are symmetrical to each other.
13. The pixel arrangement structure of one of the preceding claims, wherein the first pixel (100), the second pixel (200), and the third pixel (300) are configured to emit light of different colors.
14. The pixel arrangement structure of claim 13, wherein the first pixel (100), the second pixel (200), and the third pixel (300) are configured to emit green light, blue light, and red light, respectively.
15. An organic light emitting diode display comprising:
a plurality of pixels (100, 200, 300) including an anode, an organic emission layer, and a cathode; and
a pixel defining layer for insulating the pixels (100, 200, 300) from one another;
wherein the pixels (100, 200, 300) are arranged according to the pixel arrangement structure of one of the preceding claims.

FIG.1

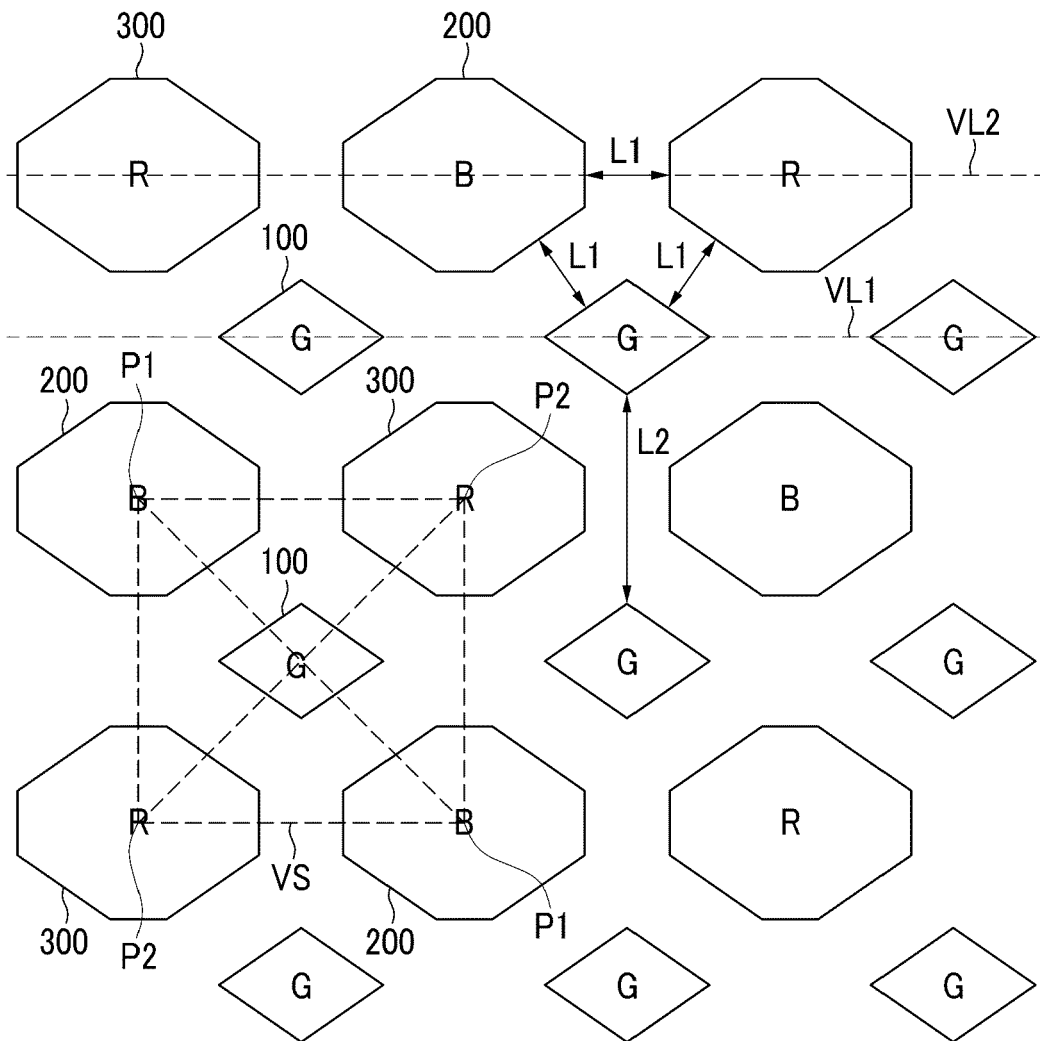


FIG.2

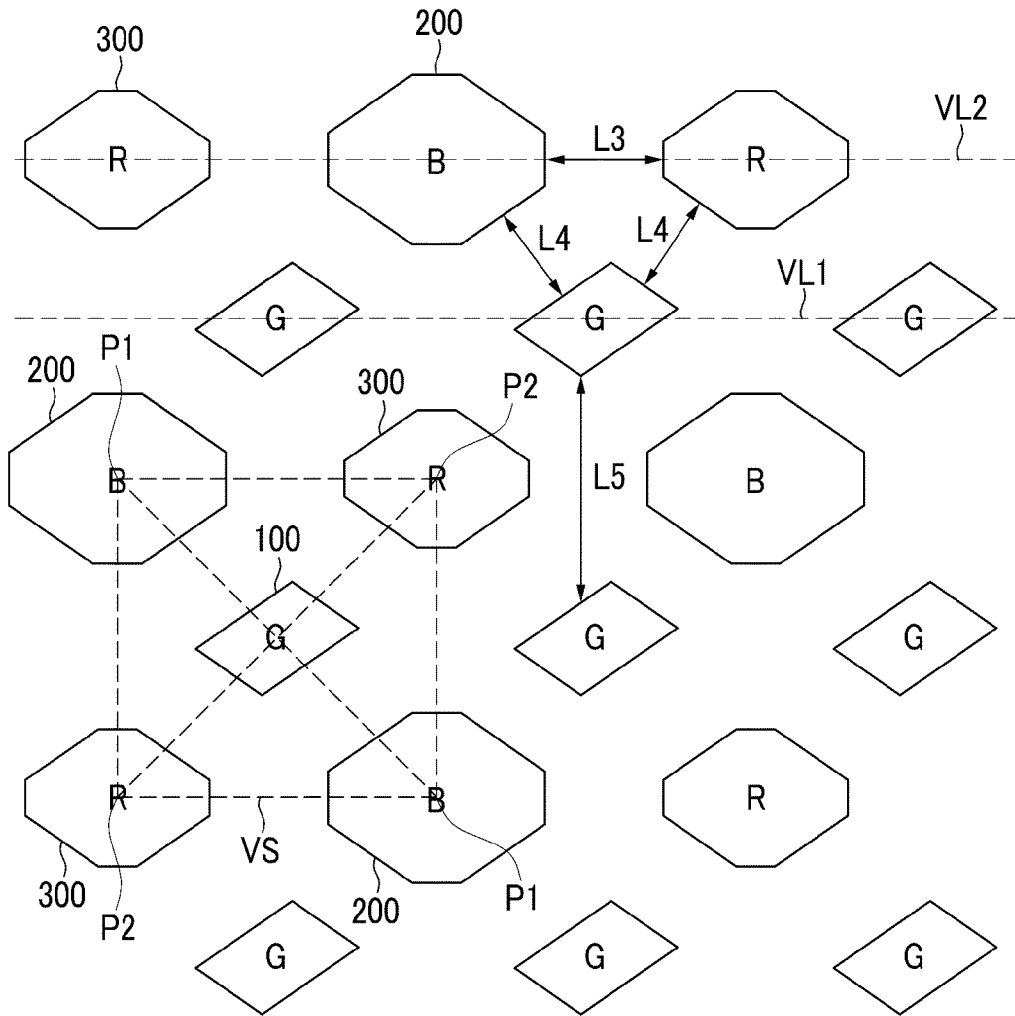


FIG.3


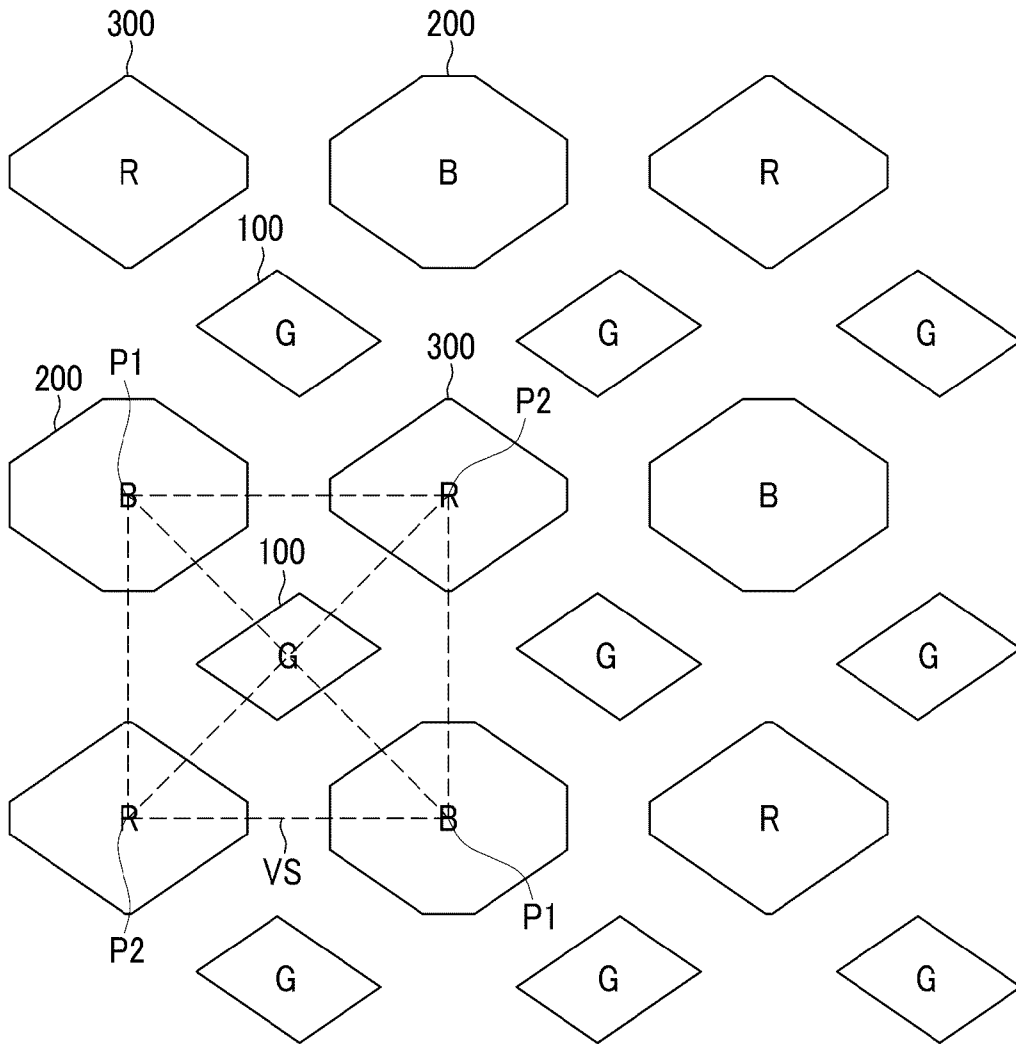


FIG.4



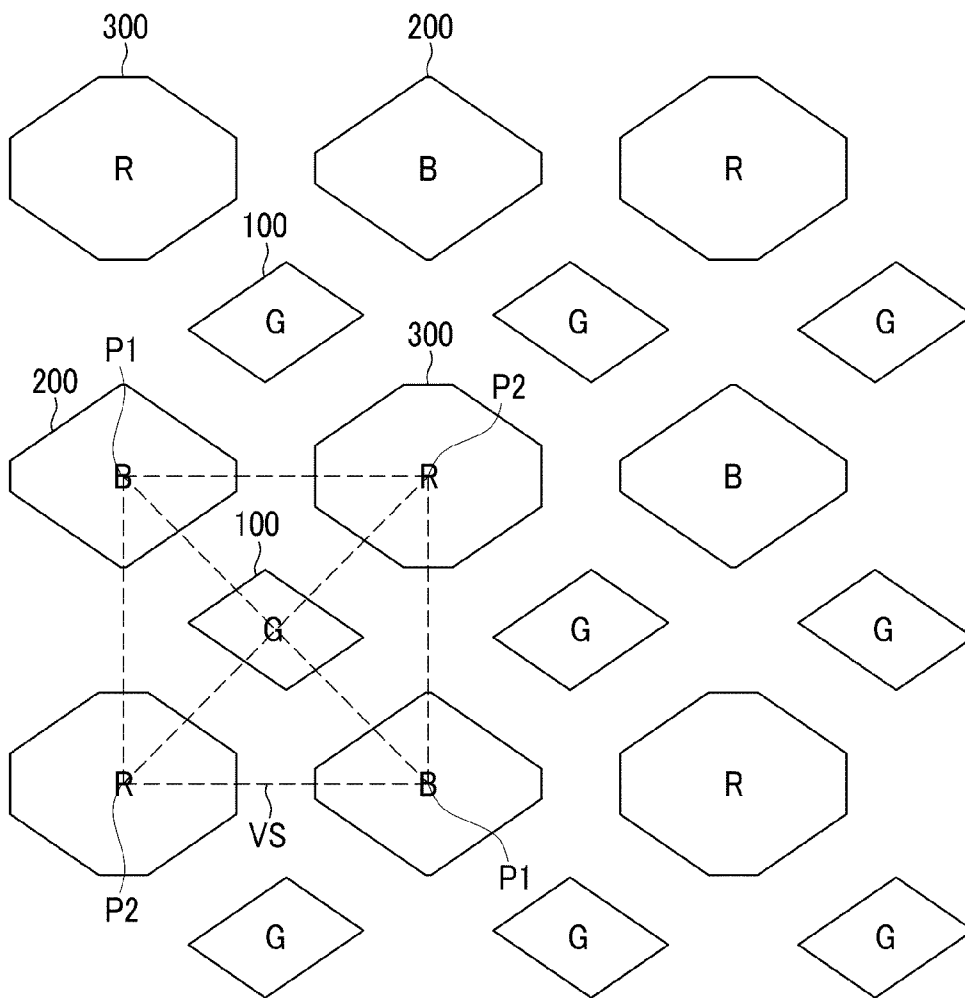

EUROPEAN SEARCH REPORT

Application Number
EP 13 15 7562

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2002/015110 A1 (BROWN ELLIOTT CANDICE HELLEN [US]) 7 February 2002 (2002-02-07) * paragraphs [0002], [0014], [0040] - [0044]; figures 1,2,3 *	1-8, 10-13,15	INV. H01L27/32
X	US 2005/001542 A1 (KIGUCHI HIROSHI [JP]) 6 January 2005 (2005-01-06) * paragraphs [0014], [0062], [0073], [0117] - [0119]; figures 10a,10b *	1-3,7,8, 10,13,15	
X	US 2004/108818 A1 (COK RONALD S [US] ET AL) 10 June 2004 (2004-06-10) * paragraphs [0001], [0032]; figure 5 *	1-3,7,9, 10,13,15	
X	US 2002/070909 A1 (ASANO MITSURU [JP] ET AL) 13 June 2002 (2002-06-13) * paragraphs [0041], [0049]; figures 5,6a,9a *	1,7,8, 13-15	
X	GB 2 437 110 A (CAMBRIDGE DISPLAY TECH [GB]) 17 October 2007 (2007-10-17) * figures 5, 7 * * page 9, last paragraph - page 10, paragraph 3 * * page 11, last paragraph - page 12, paragraph 1 * * page 13, paragraph 4 *	1-3,7,8, 10,13,15	TECHNICAL FIELDS SEARCHED (IPC) H01L
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 27 June 2013	Examiner De Laere, Ann
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 13 15 7562

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-06-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002015110 A1	07-02-2002	CN 101320150 A	10-12-2008
		EP 2410510 A1	25-01-2012
		EP 2410511 A1	25-01-2012
		JP 4806514 B2	02-11-2011
		JP 2004507773 A	11-03-2004
		JP 2011209754 A	20-10-2011
		KR 20080106593 A	08-12-2008
		US 7274383 B1	25-09-2007
		US 2002015110 A1	07-02-2002
		US 2005248262 A1	10-11-2005
US 2005001542 A1	06-01-2005	CN 1550846 A	01-12-2004
		CN 101110444 A	23-01-2008
		JP 4366988 B2	18-11-2009
		JP 2004335169 A	25-11-2004
		KR 20040094628 A	10-11-2004
		TW 1267685 B	01-12-2006
		US 2005001542 A1	06-01-2005
US 2004108818 A1	10-06-2004	TW 1336601 B	21-01-2011
		US 2004108818 A1	10-06-2004
		WO 2004053827 A2	24-06-2004
US 2002070909 A1	13-06-2002	CN 1376014 A	23-10-2002
		JP 3620490 B2	16-02-2005
		JP 2002221917 A	09-08-2002
		KR 20020040613 A	30-05-2002
		TW 522749 B	01-03-2003
		US 2002070909 A1	13-06-2002
GB 2437110 A	17-10-2007	CN 101449382 A	03-06-2009
		EP 2011153 A2	07-01-2009
		GB 2437110 A	17-10-2007
		JP 5175837 B2	03-04-2013
		JP 2009533810 A	17-09-2009
		KR 20080111130 A	22-12-2008
		US 2009302331 A1	10-12-2009
		WO 2007128971 A2	15-11-2007

专利名称(译)	用于有机发光显示装置的像素排列结构		
公开(公告)号	EP2637209A1	公开(公告)日	2013-09-11
申请号	EP2013157562	申请日	2013-03-04
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO., LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO., LTD.		
[标]发明人	LEE SANG SHIN		
发明人	LEE, SANG-SHIN		
IPC分类号	H01L27/32		
CPC分类号	H01L27/3216 H01L27/3218 H01L51/5203		
优先权	1020120022967 2012-03-06 KR		
其他公开文献	EP2637209B1		
外部链接	Espacenet		

摘要(译)

提供了一种OLED显示器的像素排列结构。像素排列结构包括：第一像素（100），其中心与虚拟正方形（VS）的中心重合；第二像素（200），与第一像素（100）分离，并且具有位于虚拟正方形（VS）的第一顶点（P1）的中心；第三像素（300）与第一像素（100）和第二像素（200）分离，并且具有与虚拟正方形（VS）的第一顶点（P1）相邻的第二顶点（P2）的中心。

FIG. 1

