



US 20190176193A1

(19) **United States**(12) **Patent Application Publication**
SHULEPOV et al.(10) **Pub. No.: US 2019/0176193 A1**(43) **Pub. Date: Jun. 13, 2019**(54) **BROADBAND ULTRASOUND TRANSDUCER****Publication Classification**

(71) Applicant: **KONINKLIJKE PHILIPS N.V.**,
Eindhoven (NL)

(72) Inventors: **Sergei SHULEPOV**, Eindhoven (NL);
Petrus Henricus Maria
TIMMERMANS, Teteringen (NL);
Peter DIRKSEN, Hilversum (NL)

(51) **Int. Cl.**
B06B 1/02 (2006.01)
G01N 29/24 (2006.01)
G01S 15/89 (2006.01)
A61B 8/00 (2006.01)

(52) **U.S. Cl.**
CPC **B06B 1/0292** (2013.01); **A61B 8/4483**
(2013.01); **G01S 15/8925** (2013.01); **G01N**
29/2406 (2013.01)

(73) Assignee: **Koninklijke Philips N.V.**, Eindhoven
(NL)

(21) Appl. No.: **16/309,170**

(22) PCT Filed: **Jun. 13, 2017**

(86) PCT No.: **PCT/EP2017/064363**

§ 371 (c)(1),


(2) Date: **Dec. 12, 2018**

(30) **Foreign Application Priority Data**

Jun. 13, 2016 (EP) 16174192.1

(57) **ABSTRACT**

A transducer array (10) is disclosed comprising a plurality of CMUT cells (100, 100', 100''), each CMUT cell comprising a first electrode (110) supported by a substrate (101) and a second electrode (120) supported by a membrane suspended over a cavity (105) between the first electrode and the second electrode, the plurality of CMUT cells comprising a first group of CMUT cells (100) each having a membrane comprising a first layer stack (130); and a second group of CMUT cells (100') each having membrane comprising a second layer stack (130'), the second layer stack including a layer (135) of a material having a higher density than any of the layers in the first layer stack. Also disclosed is a device comprising such a transducer array, an ultrasound imaging system including such a transducer array and a method of operating such an ultrasound imaging system.

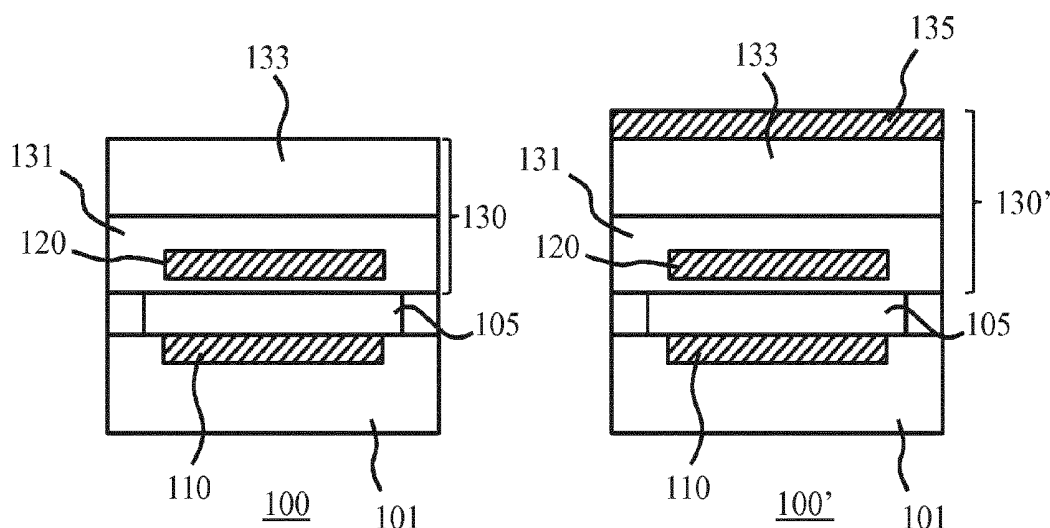

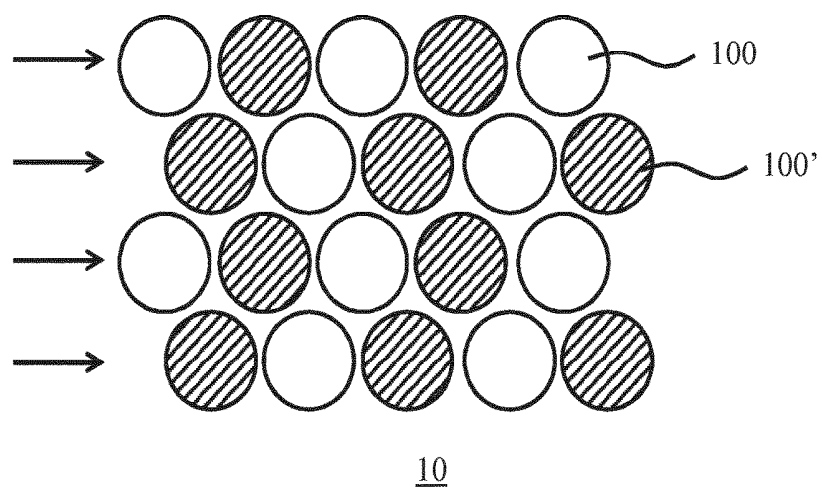


FIG. 1

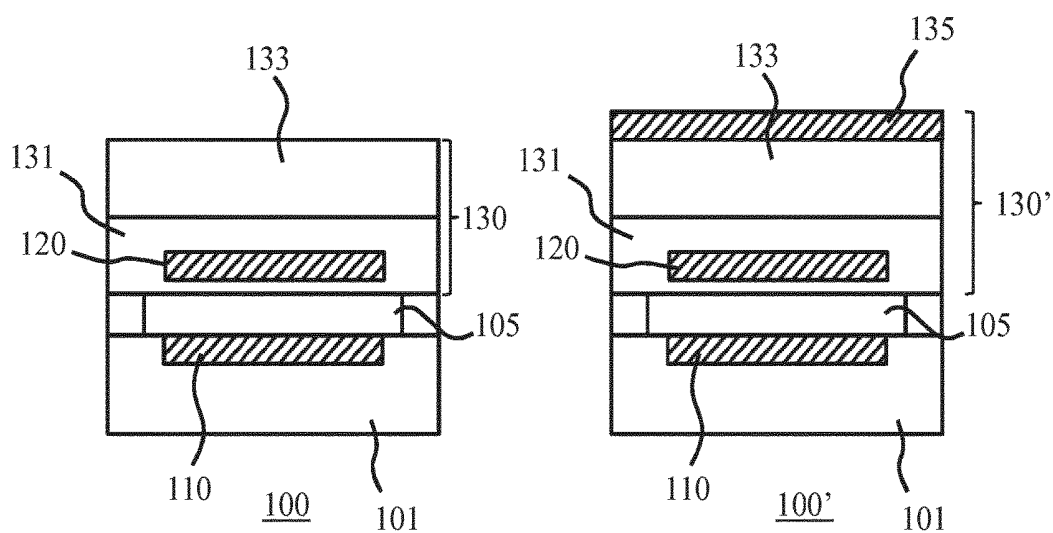


FIG. 2

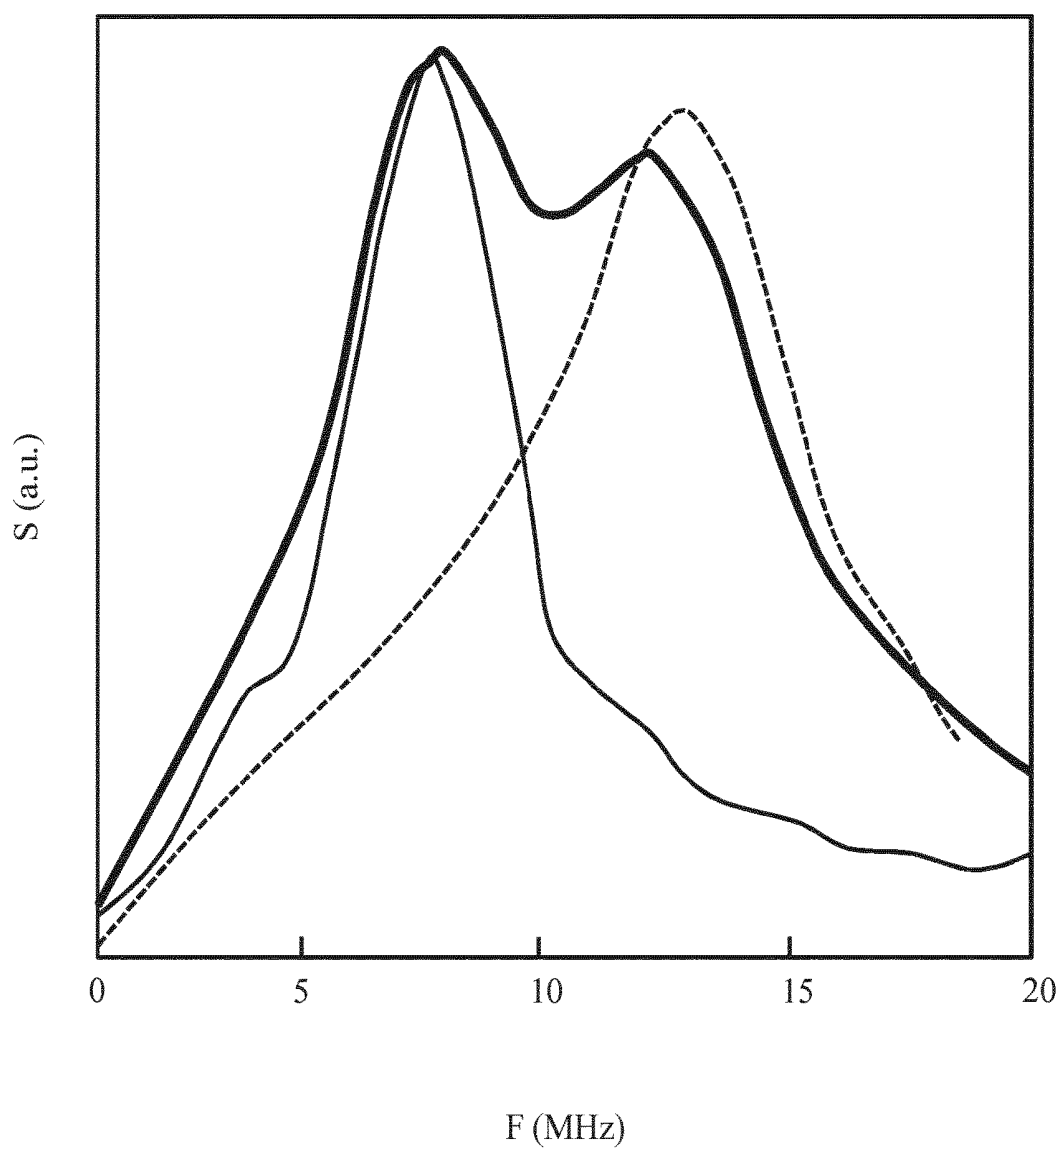


FIG. 3

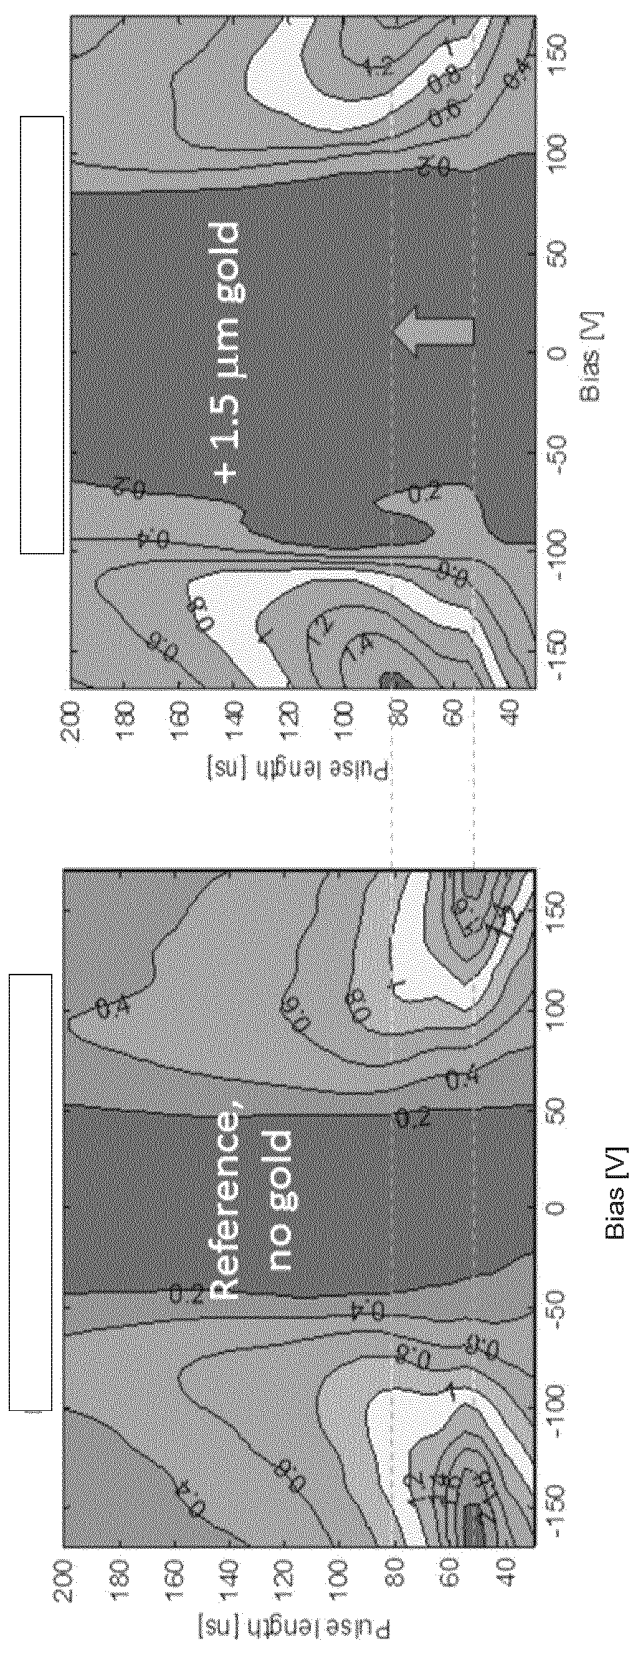


FIG. 4

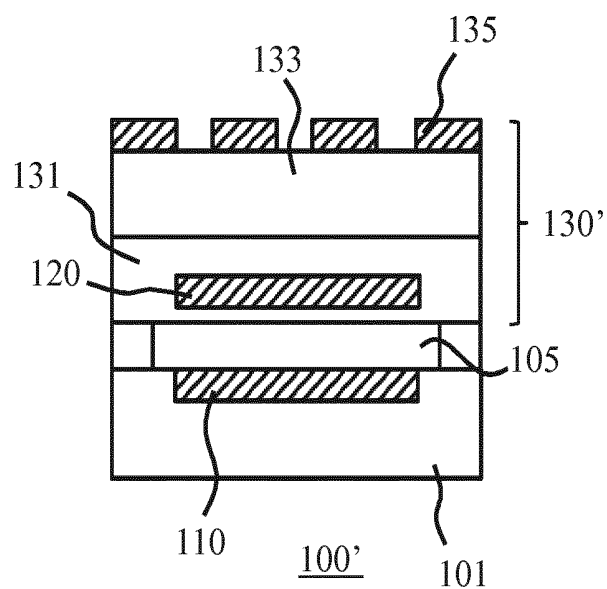


FIG. 5


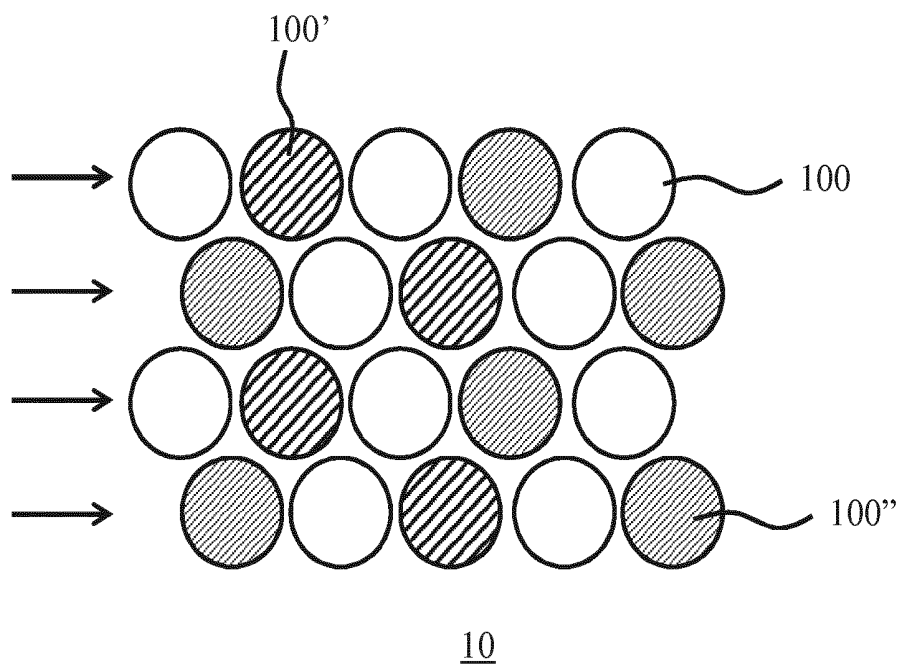


FIG. 6

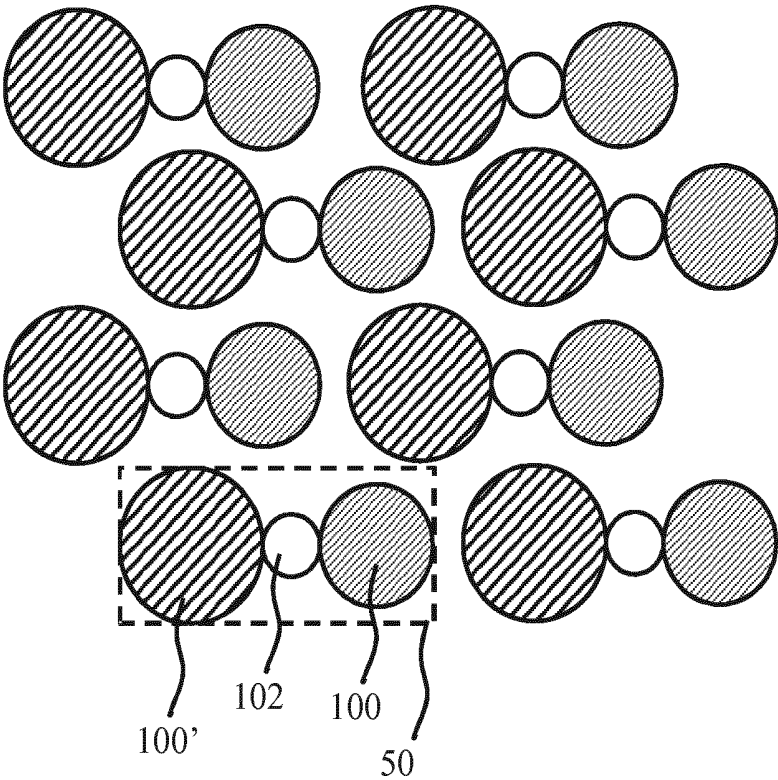

10

FIG. 7

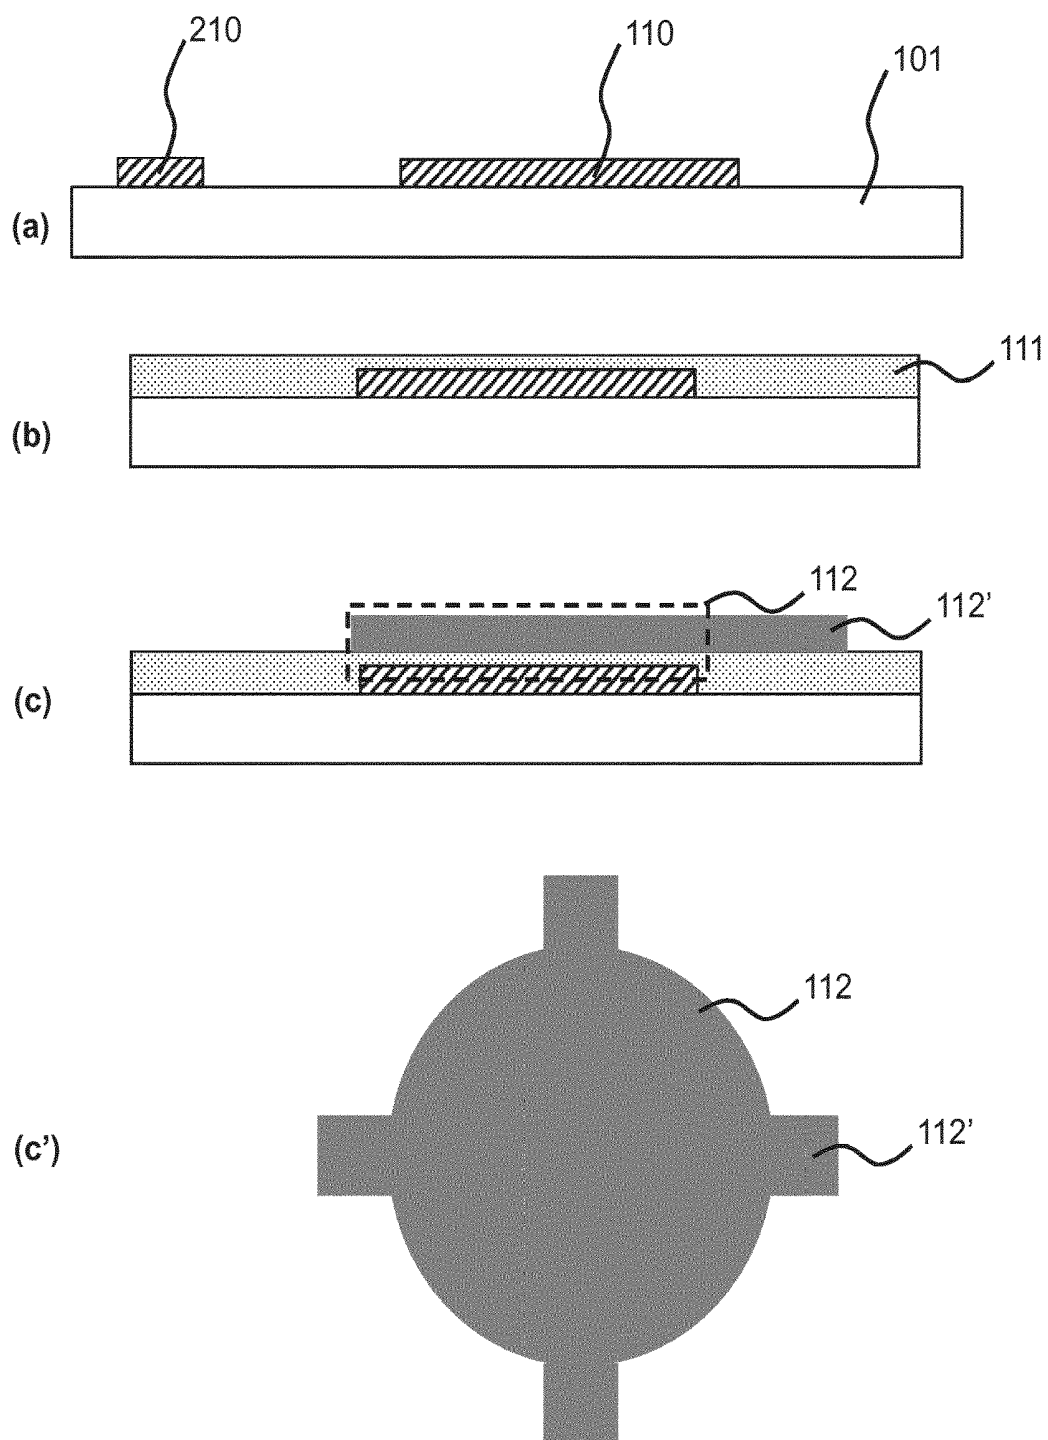


FIG. 8

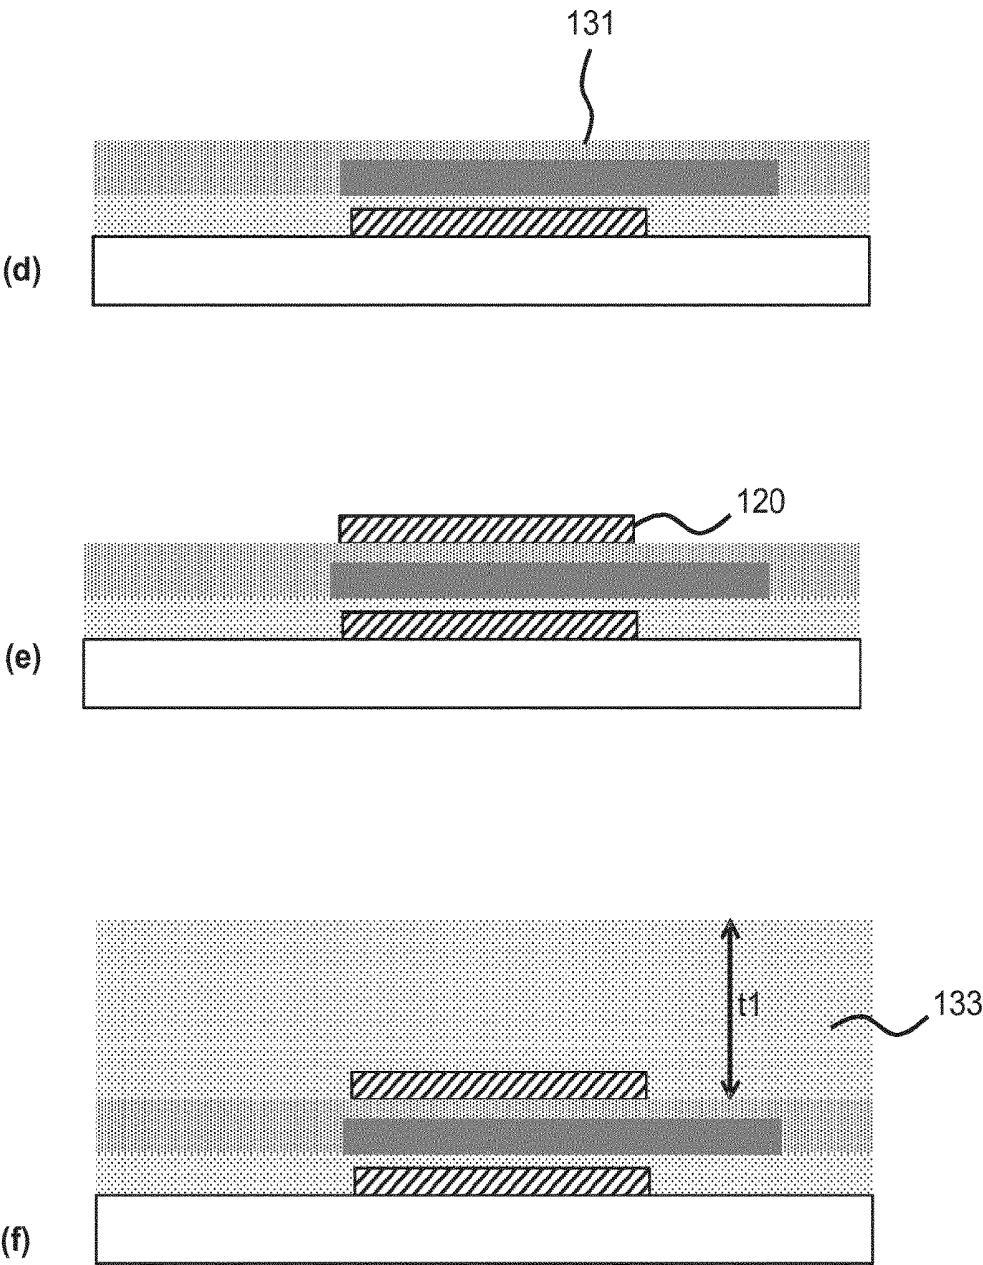


FIG. 8 (continued)

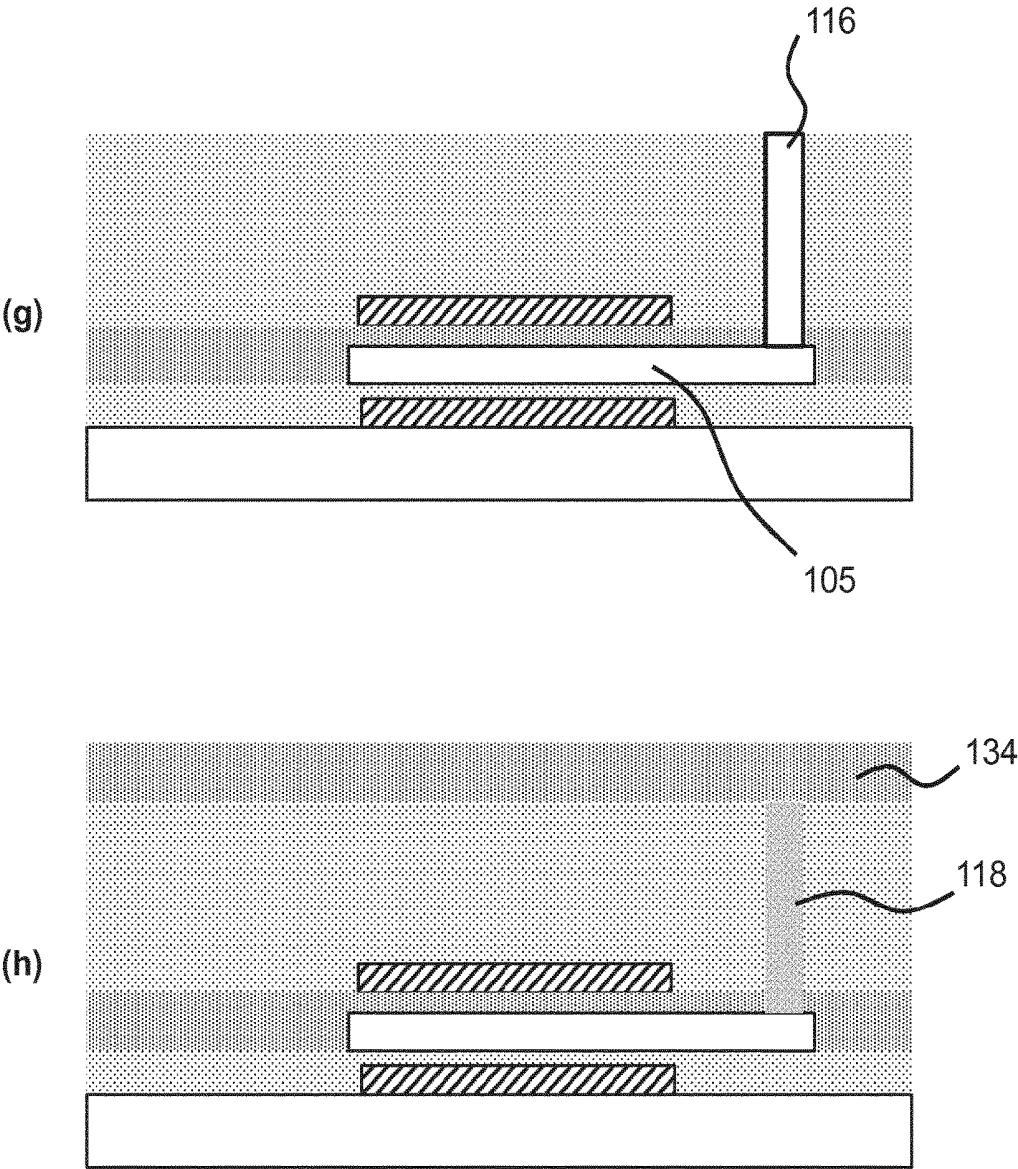


FIG. 8 (continued)

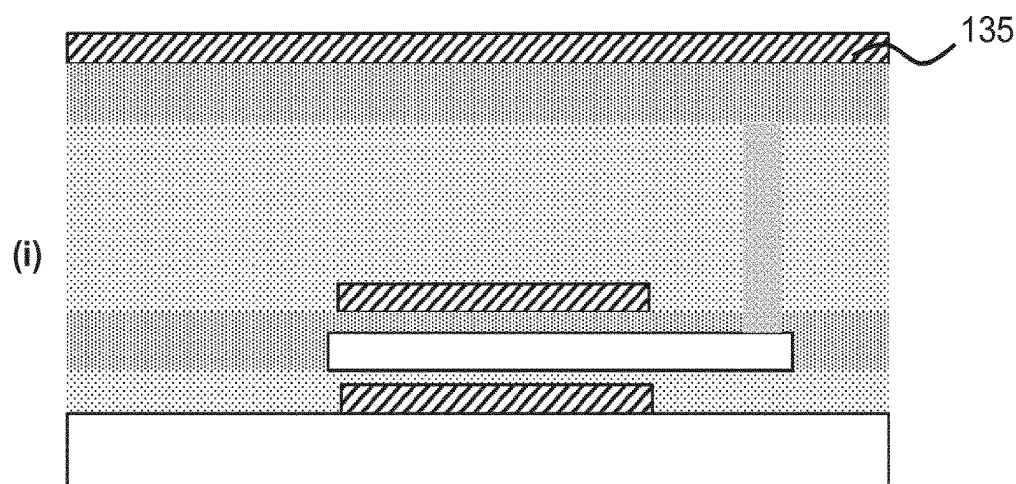


FIG. 8 (continued)



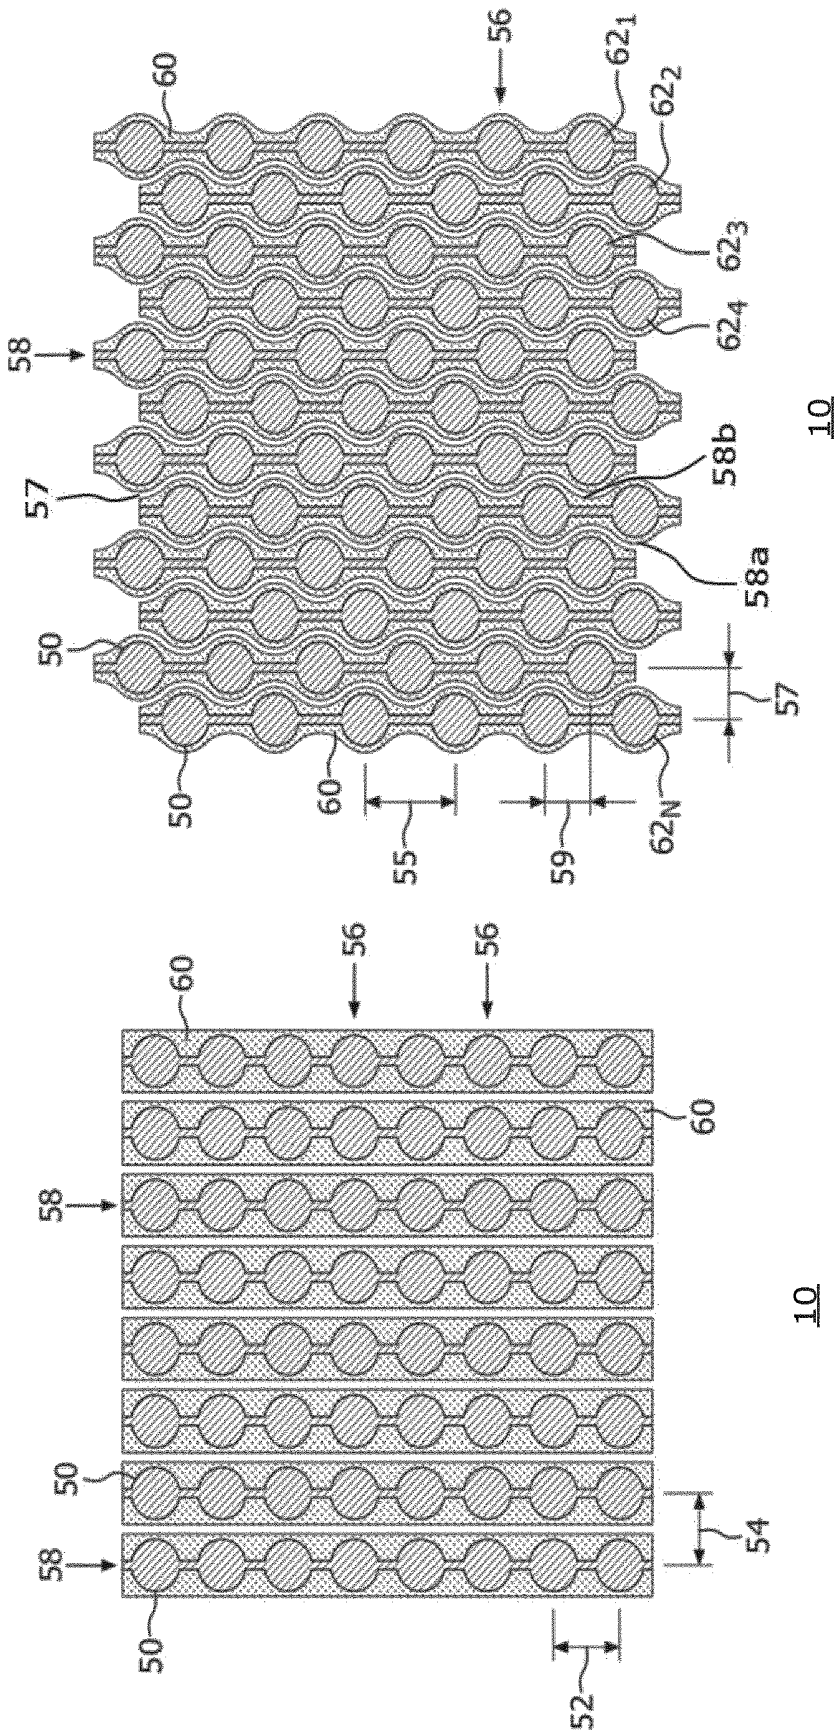


FIG. 9


FIG. 10

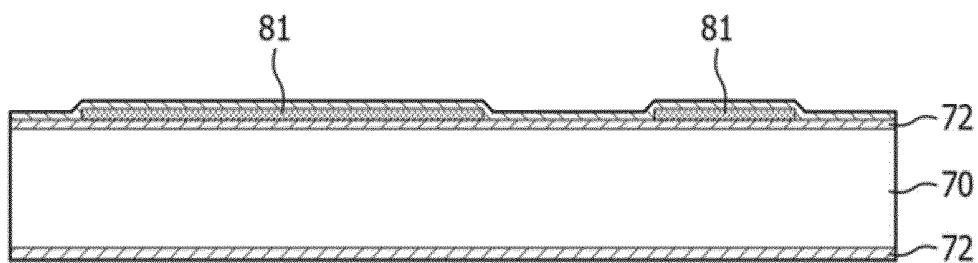

(a)

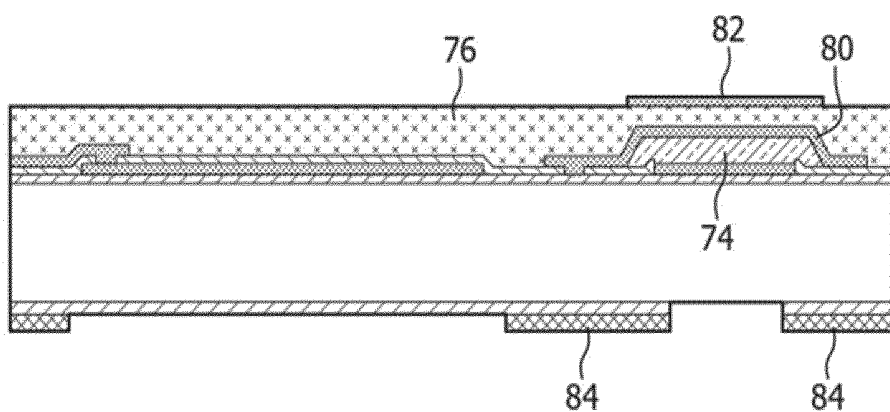

(b)

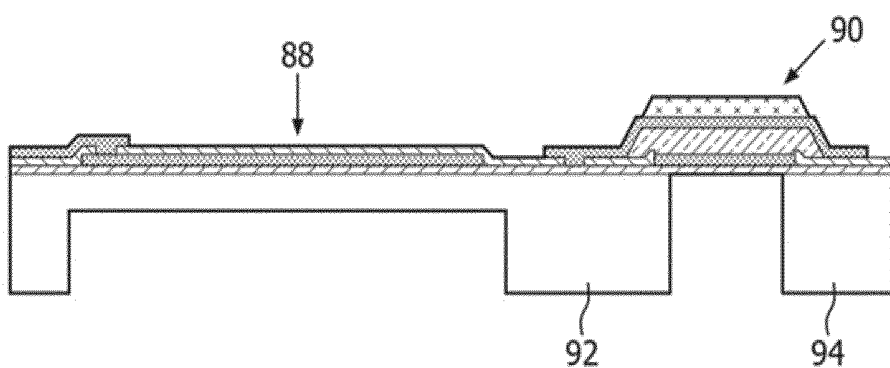

(c)

FIG. 11

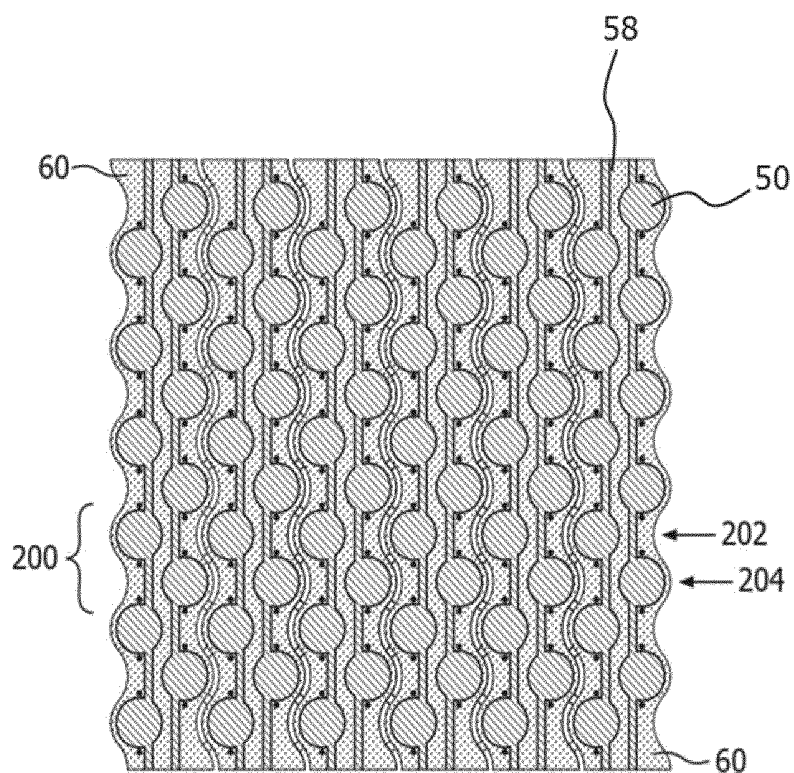


FIG. 12

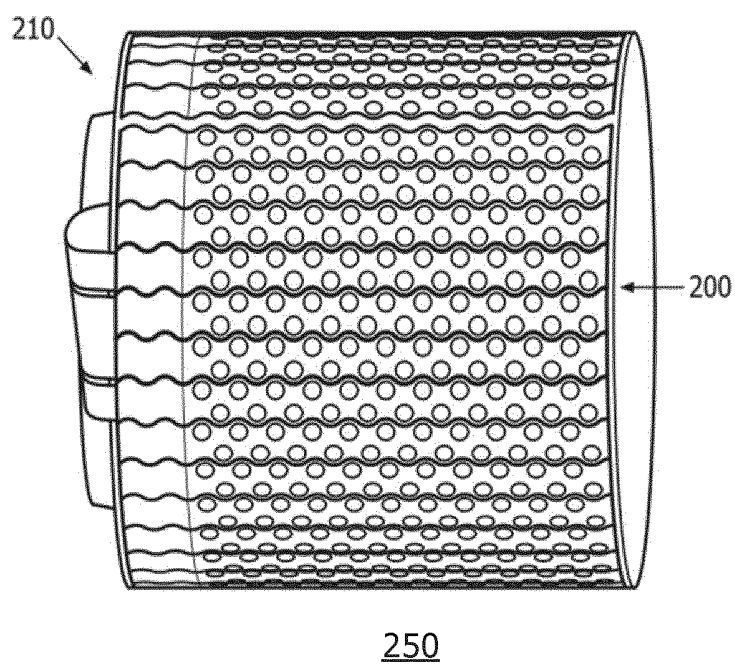


FIG. 13

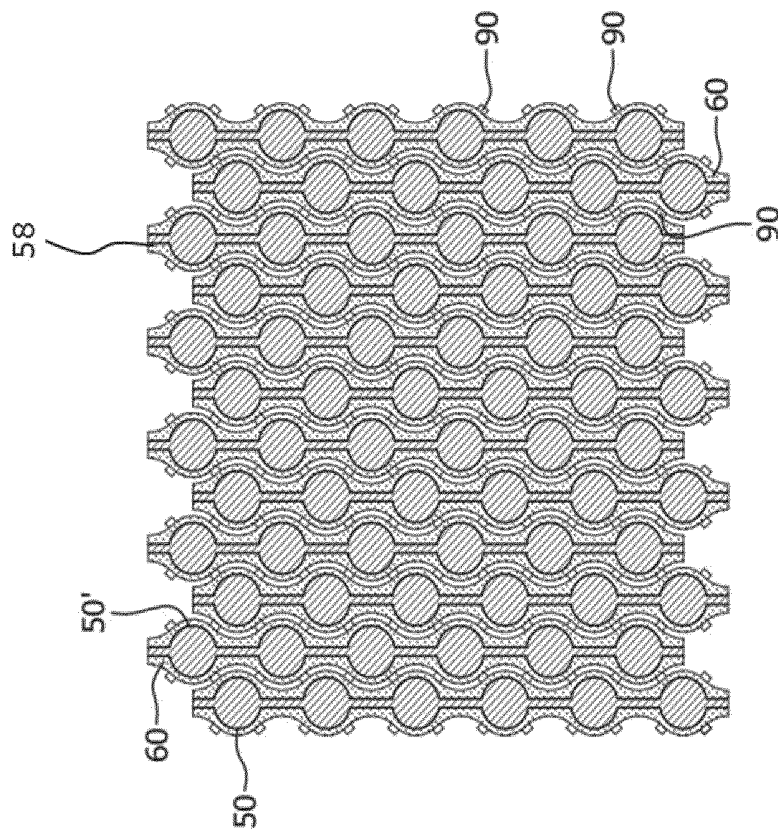


FIG. 14


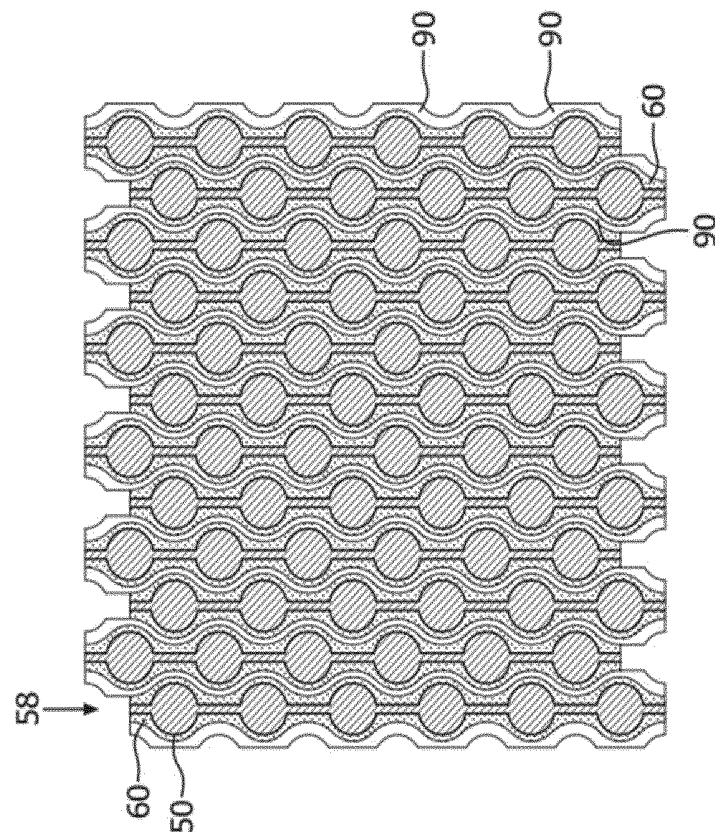


FIG. 15

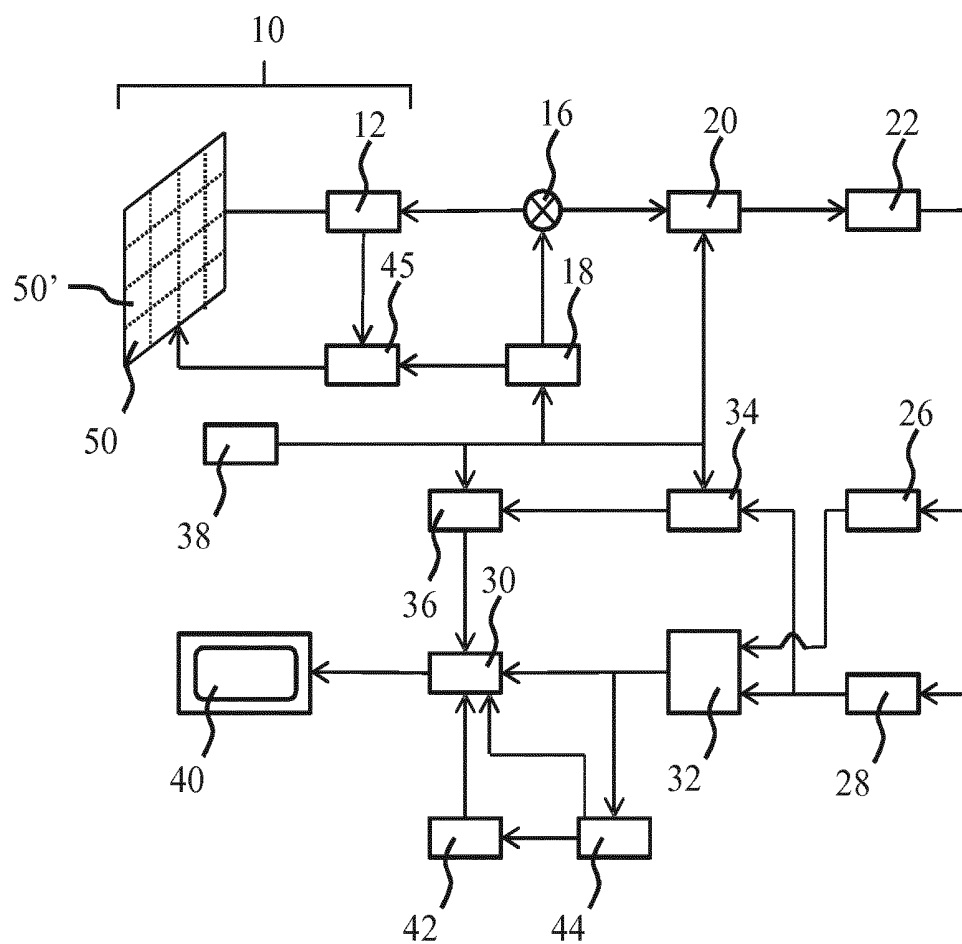

1

FIG. 16

BROADBAND ULTRASOUND TRANSDUCER

FIELD OF THE INVENTION

[0001] The present invention relates to a transducer array comprising a plurality of CMUT cells, each CMUT cell comprising a first electrode supported by a substrate and a second electrode supported by a membrane suspended over a cavity between the first electrode and the second electrode, the plurality of CMUT cells comprising a first group of CMUT cells and a second group of CMUT cells different to the first group of CMUT cells.

[0002] The present invention further relates to a device comprising such a transducer array.

[0003] The present invention still further relates to an ultrasound imaging system comprising such a transducer array.

[0004] The present invention still further relates to a method of operating such an ultrasound imaging system.

BACKGROUND OF THE INVENTION

[0005] Ultrasonic transducers used for medical imaging have numerous characteristics that lead to the production of high quality diagnostic images. Among these are broad bandwidth, affecting resolution and high sensitivity, which combined with pressure output affects depth of field, to low level acoustic signals at ultrasonic frequencies. Conventionally the piezoelectric materials which possess these characteristics have been made of PZT and PVDF materials, with PZT being particularly popular as the material of choice. However, PZT suffers from a number of notable drawbacks. Firstly, the ceramic PZT materials require manufacturing processes including dicing, matching layer bonding, fillers, electroplating and interconnections that are distinctly different and complex and require extensive handling, all of which can result in transducer stack unit yields that are lower than desired. This manufacturing complexity increases the cost of the final transducer probe and puts design limitations on the minimum spacing between the elements as well as the size of the individual elements. Moreover, PZT materials have a poorly matched impedance to water or biological tissue, such that matching layers need to be added to the PZT materials in order to obtain the desired acoustic impedance matching with the medium of interest.

[0006] As ultrasound system mainframes have become smaller and dominated by field programmable gate arrays (FPGAs) and software for much of the signal processing functionality, the cost of system mainframes has dropped with the size of the systems. Ultrasound systems are now available in inexpensive portable, desktop and handheld form, for instance for use as ultrasound diagnostic imaging systems or as ultrasound therapeutic systems in which a particular (tissue) anomaly is ablated using high-energy ultrasound pulses. As a result, the cost of the transducer probe is an ever-increasing percentage of the overall cost of the system, an increase which has been accelerated by the advent of higher element-count arrays used for 3D imaging in the case of ultrasound diagnostic imaging systems. The probes used for ultrasound 3D imaging with electronic steering rely on specialized semiconductor devices application-specific integrated circuits (ASICs) which perform microbeam forming for two-dimensional (2D) arrays of transducer elements. Accordingly it is desirable to be able to manufacture transducer arrays with improved yields and at

lower cost to facilitate the need for low-cost ultrasound systems, and preferably by manufacturing processes compatible with semiconductor production.

[0007] Recent developments have led to the prospect that medical ultrasound transducers can be batch manufactured by semiconductor processes. Desirably these processes should be the same ones used to produce the ASIC circuitry needed by an ultrasound probe such as a CMOS process. These developments have produced micromachined ultrasonic transducers or MUTs, the preferred form being the capacitive MUT (CMUT). CMUT transducers are tiny diaphragm-like devices with electrodes that convert the sound vibration of a received ultrasound signal into a modulated capacitance. For transmission the capacitive charge applied to the electrodes is modulated to vibrate/move the diaphragm of the device and thereby transmit an ultrasound wave. Since these diaphragms are manufactured by semiconductor processes the devices generally have dimensions in the 10-500 micrometer range, with spacing between the individual diaphragms less than a few micrometers. Many such individual CMUTs can be connected together and operated in unison as a single transducer element. For example, four to sixteen CMUTs can be coupled together to function in unison as a single transducer element. A typical 2D transducer array can have 2000-3000 CMUT transducer elements.

[0008] The manufacture of CMUT transducer-based ultrasound systems is therefore more cost-effective compared to PZT-based systems. Moreover, due to the materials used in such semiconductor processes, the CMUT transducers exhibit much improved acoustic impedance matching to water and biological tissue, which obviates the need for a matching layer and yields an improved effective bandwidth.

[0009] One of the main challenges in developing effective ultrasound systems, and in particular CMUT transducer-based ultrasound systems is to provide systems with excellent image resolution and good depth-of-field in case of an ultrasound diagnostic imaging system. These are conflicting requirements, as higher frequency pulsed ultrasound leads to improved resolution but shorter depth-of-field due to the frequency dependent attenuation of the medium. In order to obtain high resolution in depth, high pressure short pulses are desired which require a large bandwidth. Although in principle CMUT transducers can generate a broad spectrum of frequencies the bandwidth is limited because the frequency at which they operate efficiently depends strongly on the applied static bias voltage over the CMUT. Efforts have been made to increase the operational bandwidth of CMUT-based ultrasound transducer arrays by differentiating the CMUT cells within the array such that the array comprises groups of CMUT cells with different spring constants. For example, U.S. Pat. No. 5,870,351 discloses a broadband micro-fabricated ultrasonic transducer which includes a plurality of resonant membranes of different sizes (diameters) and/or shapes to broaden the frequency response of the ultrasound transducer.

[0010] US 2014/0010388 A1 discloses a capacitive transducer having broadband frequency characteristics. The capacitive transducer includes an element which has multiple kinds of cells, each cell including: a first electrode; a vibrating film including a second electrode, the second electrode being opposed to the first electrode with a gap; and a support portion that supports the vibrating film so as to form the gap. The multiple kinds of cells have different

ratios of an area of one of the first electrode and the second electrode to an area of the gap when viewed from a normal direction of the vibrating film. In addition, the spring constant of some of the cells may be altered by an additional layer on the vibrating films (membranes) of the cells.

[0011] As is well-known per se, the acoustic power (output pressure) produced by the CMUT cells may be optimized by operating the CMUT cells in so-called collapse mode in which the CMUT cells are driven by a bias voltage that drives a central part of the diaphragm or flexible membrane across the gap onto the opposing substrate and provided with a stimulus having a set frequency that causes the diaphragm or flexible membrane to resonate at the set frequency. This is for instance demonstrated by K. K. Park et al. in "Comparison of conventional and collapse-mode CMUT in 1-D array configuration", as retrieved from the Internet on 9 Jun. 2015 from URL: http://www-kyg.stanford.edu/khuriyakub/opencms/Downloads/11_Park_02.pdf.

[0012] However, in order to safeguard the lifetime of the CMUT cells, it is imperative that the central regions of the cells are kept in contact with the opposing substrate. As the bias voltage at which the CMUT cells collapse onto the opposing substrate is directly proportional to the spring constant of the cells, it is undesirable to have CMUT cells with significantly different spring constants within the transducer array, as this can cause some of the CMUT cells to temporarily release from the opposing substrate in collapse mode when a single bias voltage is applied to all CMUT cells, which increases the risk of premature cell failure, as previously explained.

SUMMARY OF THE INVENTION

[0013] The present invention seeks to provide a transducer array comprising a plurality of CMUT cells that combines broadband characteristics and an excellent lifetime when operated in collapse mode.

[0014] The present invention further seeks to provide a device comprising such a transducer array.

[0015] The present invention further seeks to provide an ultrasound imaging system comprising such a device and/or transducer array.

[0016] The present invention further seeks to provide a method of operating such an ultrasound imaging system.

[0017] According to an aspect, there is provided a transducer array comprising a plurality of CMUT cells, each CMUT cell comprising a first electrode supported by a substrate and a second electrode supported by a membrane suspended over a cavity between the first electrode and the second electrode, the plurality of CMUT cells comprising a first group of CMUT cells each having a membrane comprising a first layer stack; and a second group of CMUT cells each having membrane comprising a second layer stack, the second layer stack including a layer of a material having a higher density than any of the layers in the first layer stack, wherein the membranes of the first group of CMUT cells have a first spring constant and the membranes of the second group of CMUT cells have a second spring constant that is no more than 20% different to the first spring constant. The present invention is based on the insight that the provision of a (thin) layer of a high density material to selected CMUT cells in order to differentiate the CMUT cells of the transducer array may be used to significantly increase the mass of the membranes of the selected CMUT cells without significantly increasing the spring constant of these membranes.

Consequently, CMUT cells of the transducer array may still collapse at approximately the same bias voltage yet exhibit different resonance frequencies due to the difference in mass of the membranes of the first group and second group of CMUT cells respectively, thereby yielding a transducer array that can be safely operated in collapse mode and that exhibits an increased bandwidth, i.e. broadband characteristics, compared to CMUT transducer arrays in which all CMUT cells have the same geometry. For this reason, the material preferably also has a lower Young's modulus compared to the material of any of the layers of the first layer stack, such that the high density material has a minimal contribution to the overall bending stiffness of the membranes of the second group of CMUT cells. For example, the material having a higher density than any of the layers in the first layer stack may have a density in excess of 7 g/cm³, preferably a density in excess of 10 g/cm³ and a Young's modulus of less than 200 GPa, preferably a Young's modulus of less than 100 GPa.

[0018] Preferably, the second spring constant is no more than 10% different to the first spring constant to ensure that all CMUT cells of the transducer array enter collapse mode at approximately the same bias voltage. In some embodiments, the spring constant of the membranes of the first group of CMUT cells is the same as the spring constant of the membranes of the second group of CMUT cells. The tuning of the spring constant of the respective membranes may be achieved by selecting the materials and tuning the thickness of the layers of these materials in the membranes of the first group and second group of CMUT cells respectively.

[0019] For example, the first layer stack may comprise a layer of a dielectric material to a first thickness; and the second layer stack may comprise a layer of the dielectric material to a second thickness that is smaller than the first thickness. The second thickness may be chosen such that the combination of the dielectric material layer to the second thickness in the second layer stack and the thickness of the layer of the material having a higher density than any of the layers in the first layer stack provides (approximately) the same contribution to the overall spring constant of the membranes of the CMUT cells in the second group as the layer of the dielectric material to the first thickness achieves for the membranes of the CMUT cells in the first group.

[0020] Alternatively, the second layer stack may be the same as the first layer stack apart for the layer of the material having a higher density than any of the layers in the first layer stack being an additional layer. This provides an ultrasound transducer array that may be manufactured in a particularly straightforward manner, e.g. by the selective deposition of the layer of the high density material to the CMUT cells of the second group.

[0021] The transducer array may comprise a plurality of transducer elements, wherein each transducer element comprises at least one CMUT cell of the first group and at least one CMUT cell of the second group.

[0022] In an embodiment, the CMUT cells of the first group each have a first diameter and the CMUT cells of the second group each have a second diameter that is different to the first diameter. In collapse mode, the resonance frequency of the CMUT cells becomes largely independent of cell diameter, such that the addition of the high density material layer to the second group of CMUT cells introduces an alternative design freedom to achieve broadband charac-

teristics in an ultrasound transducer array operable in collapse mode having CMUT cells of different diameters.

[0023] The layer of a material having a higher density than any of the layers in the first layer stack may be a continuous layer or may be a patterned layer. Patterning the layer may be used to further tune the mass of the membranes of the CMUT cells to which the layer is applied. For example, the second group of CMUT cells may comprise a first sub group in which the membranes of the CMUT cells comprise a continuous layer of the high density material and a second sub group in which the membranes of the CMUT cells comprise a patterned layer of the high density material. In this manner, the frequency characteristics of the ultrasound transducer array may be tuned in a more fine-grained manner.

[0024] In an embodiment, the layer of a material having a higher density than any of the layers in the first layer stack is a metal layer, preferably a gold layer or a platinum layer. Metals may be used due to their high density, which makes these materials particularly suitable for use as a high density material layer. In the context of the present application, the term metal also includes metal alloys.

[0025] In a particularly advantageous embodiment, the CMUT cells or transducer elements are arranged in a staggered array comprising a first column of spaced CMUT cells or transducer elements on at least one silicon island; a second column of spaced CMUT cells or transducer elements on at least one further silicon island, the second column being staggered in alignment with the first column such that cells of the second column are partially located in spaces between successive cells of the first column, the first column and the second column being spaced apart by a gap; and a flexible foil retaining the respective silicon islands, the flexible foil comprising conductive interconnects.

[0026] By staggering such columns, the cells or transducer elements of one column can be interspersed among the cells or transducer elements of an adjacent column, providing a smaller array pitch in both the steered direction without necessarily increasing the pitch in the unsteered direction. To be able to bend the array for curved array and catheter applications the elements of the array are fabricated on silicon islands of as few as one or several cells or transducer elements per island, and the islands are joined by an integral flexible foil overlay that facilitates a continuous sideways looking array of CMUT cells or transducer elements to be fully wrapped around a 3-dimensional body, e.g. a cylindrical body such as a catheter sheath without discontinuities between array domains. This therefore facilitates the generation of ultrasound images with improved image quality and reduced image artefacts such as grating lobes due to the reduced pitch between CMUT cells or transducer elements. The first group of CMUT cells and the second group of CMUT cells or the transducer elements preferably are each arranged at a constant pitch in the staggered array to optimize performance of the transducer array.

[0027] In an embodiment, the first column of spaced CMUT cells or transducer elements is located on a first silicon island having opposing meandering edges, each edge meandering outwardly around one of the CMUT cells or transducer elements and meandering inwardly into a space between the CMUT cells or transducer elements; the second column of spaced CMUT cells or transducer elements is located on a second silicon island having opposing meandering edges, each edge meandering outwardly around one

of the CMUT cells or transducer elements and meandering inwardly into a space between the CMUT cells or transducer elements; and the first silicon island is arranged adjacent to the second silicon island such that an outwardly meandering edge portion of the first silicon island slots into an inwardly meandering edge portion of the second silicon island.

Such an array benefits from the structural integrity provided by each silicon island carrying a plurality (i.e. a column) of CMUT cells or transducer elements, with the shape of the silicon islands facilitating a particular dense packing of the silicon islands to yield the staggered array of CMUT cells or transducer elements. In addition, due to the fact that the silicon islands may be arranged along the length of a catheter, the resulting transducer array combines good structural integrity with excellent flexibility of the array.

[0028] The first silicon island and the second silicon island each may comprise at least a pair of said columns of spaced CMUT cells or transducer elements, wherein the columns in said pair are staggered. This limits the number of separate silicon islands in the array whilst still providing excellent flexibility of the array due to the limited width of the respective silicon islands.

[0029] Such a silicon-island based embodiment of the ultrasound transducer array may, in a further aspect, form part of a catheter comprising an external sheath, with the CMUT transducer array wrapped around the external sheath such that the respective columns of the array extend in a length direction of the catheter. Such a catheter benefits from improved imaging capability due to the continuous nature of the CMUT transducer array wrapped around its external sheath.

[0030] The catheter may additionally comprise a further CMUT transducer array at a distal end of the catheter, e.g. at the distal tip of the catheter, to further enhance the imaging capability of the catheter. Such a catheter for instance may be able to generate look-ahead images with the further CMUT transducer array as well as 360° images with the CMUT transducer array.

[0031] In some embodiments, the catheter may be an intra-cardiac or an intravascular catheter.

[0032] In alternative embodiments, the transducer array may form part of a device which further includes a controller configured to control the CMUT transducer array. The device may, for instance, include a probe comprising the CMUT transducer array. The probe may, for example, be a needle-like probe, a TEE (transesophageal echocardiography)-probe or a diagnostic ultrasound probe.

[0033] According to a further aspect, there is provided an ultrasound imaging system comprising a patient interface module and the transducer array or the catheter according to any of the described embodiments of the present invention. Such an ultrasound imaging system benefits from the improved broadband characteristics of the ultrasound transducer array as provided by the differentiated CMUT cells of the array.

[0034] The ultrasound imaging system preferably further comprises a power supply adapted to operate the CMUT cells in a collapse mode during at least one of an ultrasound transmission mode and an ultrasound reception mode. The ultrasound transducer array is particularly suitable for such collapse mode operation due to the comparable spring constants (bending stiffness) of the respective CMUT cell membranes within the ultrasound transducer array as explained above.

[0035] According to yet another aspect, there is provided a method of operating such an ultrasound imaging system, the method comprising applying, during an ultrasound transmission mode of the ultrasound imaging system, a control signal to the CMUT cells, the control signal comprising a DC component forcing the CMUT cells into a collapse mode and an AC component forcing the collapsed CMUT cells to resonate, wherein the CMUT cells of the first group and the CMUT cells of the second group resonate at different resonance frequencies. This operating method ensures that the ultrasound imaging system achieves broadband characteristics in collapse mode without significantly compromising the lifetime of the array.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] Embodiments of the invention are described in more detail and by way of non-limiting examples with reference to the accompanying drawings, wherein:

[0037] FIG. 1 schematically depicts a top view of an ultrasound transducer array according to an embodiment;

[0038] FIG. 2 schematically depicts a cross-section of an ultrasound transducer array according to an embodiment;

[0039] FIG. 3 is a graph depicting an operating characteristic of an ultrasound transducer array according to an embodiment;

[0040] FIG. 4 is an output pressure contour plot of a CMUT array with (right pane) and without (left pane) a high density layer of its CMUT membranes;

[0041] FIG. 5 schematically depicts a cross-section of part of an ultrasound transducer array according to another embodiment;

[0042] FIG. 6 schematically depicts a top view of an ultrasound transducer array according to another embodiment;

[0043] FIG. 7 schematically depicts a top view of an ultrasound transducer array according to yet another embodiment;

[0044] FIG. 8 schematically depicts an example manufacturing process for such an ultrasound transducer array;

[0045] FIG. 9 is a plan view of a symmetrically arranged CMUT array of rows and columns of CMUT cells according to an embodiment;

[0046] FIG. 10 is a plan view of a CMUT array configured with staggered rows of cells with the cells of adjacent rows and columns interspersed within each other according to another embodiment;

[0047] FIG. 11 illustrates steps in the fabrication of a flexible interconnect of adjacent cell silicon islands according to an embodiment;

[0048] FIG. 12 illustrates the operation of adjacent staggered rows of CMUTs as a single row of transducer elements in accordance with an embodiment;

[0049] FIG. 13 illustrates the CMUT array of FIG. 12 when wrapped in a cylindrical configuration;

[0050] FIG. 14 is a plan view of a CMUT array according to an embodiment of the present invention with each cell located on its own silicon island and with a flexible foil overlay joined by flexible metallic bridges;

[0051] FIG. 15 is a plan view of a CMUT array according to an embodiment of the present invention with multiple cells located on each silicon island and with a flexible foil overlay joined by flexible metallic bridges; and

[0052] FIG. 16 is a block diagram of an ultrasound imaging system according to an embodiment.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0053] It should be understood that the Figures are merely schematic and are not drawn to scale. It should also be understood that the same reference numerals are used throughout the Figures to indicate the same or similar parts.

[0054] In the context of the present application, where reference is made to a membrane, this is a deformable structure that spans the gap or cavity over the substrate of a capacitive micromachined ultrasound transducer (CMUT), and that supports, e.g. embeds one of the electrodes of the CMUT, e.g. an electrode opposing a further electrode on the substrate and separated therefrom by a gap or cavity.

[0055] In the context of the present application, where reference is made to a membrane layer stack, this is intended to include membranes formed of a single layer as well as membranes formed of multiple layers, but excluding the electrode embedded in or otherwise supported by the membrane.

In the context of the present application, where reference is made to a CMUT element or transducer element, this may equate to a single CMUT cell or to a cluster of CMUT cells arranged to be operated in unison, e.g. arranged to be addressed by a single control signal.

[0056] FIG. 1 schematically depicts a top view of an ultrasound transducer array 10 according to an embodiment. The ultrasound transducer array 10 comprises a plurality of CMUT cells, which are divided in a first group of CMUT cells 100 and a second group of CMUT cells 100', here shown to have a circular shape by way of non-limiting example only. Other shapes may be contemplated for the CMUT cells 100, 100'. The cells 100, 100' may be arranged to be addressed individually although preferably clusters of cells are addressable in unison, i.e. as a transducer element, with a cluster comprising both cells 100, 100', preferably an equal number of cells 100, 100' such that each transducer element exhibits the same broadband characteristics, which will be explained in more detail below. The ultrasound transducer array 10 may be an array of such transducer elements. The CMUT cells 100, 100' may be arranged in a staggered fashion as shown in FIG. 1 to increase the cell density of the ultrasound transducer array 10. Cells 100, 100' in a single row may be clustered, e.g. addressed by a single row address signal, as indicated by the horizontal arrows. FIG. 2 schematically depicts a cross-section of a CMUT cell 100 of the first group and a CMUT cell 100' of the second group respectively. Each CMUT cell comprises a first electrode 110 supported by a substrate 101 and a second electrode 120 opposing the first electrode 110 and separated therefrom by a cavity 105.

[0057] In the first group of CMUT cells 100, the second electrode 120 is supported by a flexible membrane comprising a first layer stack 130, which for example includes a first layer 131 and a second layer 133 of an electrically insulating or dielectric material such as silicon oxide, silicon nitride and so on. In some applications, e.g. low-frequency applications, the first layer stack 130 may have a thickness well in excess of 1 micron, e.g. a thickness in the range of 5-20 microns. In some other applications, e.g. high-frequency applications, the first layer stack 130 may have a thickness of less than 2 microns. The second electrode 120 may be embedded in the flexible membrane comprising the first layer stack 130 such that the second electrode 120 is separated from the cavity 105 by a thin layer of dielectric

material, for example to prevent a short circuit between the first electrode **110** and the second electrode **120** upon a central region of the flexible membrane contacting the substrate **101**, e.g. during operation of the CMUT cells **100**, **100'** of the ultrasound transducer array **10** in collapse mode. **[0058]** In the second group of CMUT cells **100'**, the second electrode **120** is supported by a flexible membrane comprising a second layer stack **130'**, which includes a layer **135** of a material having a higher density than any of the layers in the first layer stack **130**. The layer **135** will be referred to as the mass layer **135** in the remainder of this description. The mass layer **135** is present in the membrane layer stack **130'** of the second group of CMUT cells **100'** to increase the mass of the membrane layer stack **130'** without significantly affecting its bending stiffness, which bending stiffness largely defines the spring constant of the CMUT cells **100**, **100'**, in particular when the CMUT cells **100**, **100'** are operated in a collapse mode in which a central part of the membranes is permanently collapsed onto the substrate **101**, with the peripheral portion of the membranes around the central portion oscillating to generate an ultrasound pulse having a desired frequency spectrum in a transmission mode of the ultrasound transducer **10** or resonating in response to a pulse echo having a desired frequency spectrum being received in a reception mode of the ultrasound transducer **10**. As such collapse mode operation is well-known per se, this will not be explained in further detail for the sake of brevity only.

The center frequency F_c of a circular CMUT cell membrane may be approximated by the following equation (1):

$$F_c \approx \frac{2}{R^2} \sqrt{\frac{D}{\rho \cdot t}} \frac{1}{(1-x^2)}$$

In this equation, R is the membrane radius, ρ is the membrane density, D is the flexural rigidity (spring constant) of the membrane, t is the membrane thickness and x is the ratio R_c/R wherein R_c is the radius of the central portion of the membrane collapsed onto the substrate **101** ($R_c=0$ when the membrane is not in collapse). As can be derived from this equation, the resonance frequency of the membrane depends on both the flexural rigidity (spring constant) D and the density ρ of the membrane. However, the energy or force required to collapse the membrane onto the substrate **101**, e.g. to force the CMUT cell into collapse mode, is dominated by the flexural rigidity D of the membrane. Therefore, embodiments of the present invention are directed to increasing the mass of the layer stack **130'** of the second group of CMUT cells **100'** compared to the mass of the layer stack **130** of the first group of CMUT cells **100** whilst minimizing the difference in spring constants between the membranes comprising the first layer stack **130** and the second layer stack **130'** respectively.

The flexural rigidity D of the membrane may be expressed by the effective Young's modulus E_{eff} of the membrane layer stack (equation (2)):

$$D = \frac{E_{eff} \cdot t^3}{12(1-\mu^2)}$$

In this equation, μ is the Poisson ratio. The effect of the addition of a mass layer **135** to the effective Young's modulus may be approximated by the following equation (3):

$$E_{eff} \approx \frac{E_1 \cdot t_1 + E_2 \cdot t_2}{(t_1 + t_2)}$$

In this equation, E_1 and t_1 are the Young's modulus and thickness respectively of the membrane stack and E_2 and t_2 are the Young's modulus and thickness respectively of the mass layer **135**. For example, for a (multi-layer) silicon nitride membrane stack having a thickness of 3 microns and a gold mass layer having a thickness of 1 micron, the effective Young's modulus compared to a membrane stack only containing the silicon nitride layer(s) to a thickness of 3 microns is increased by 20%.

[0059] In an embodiment, the respective layer compositions of the first layer stack **130** and the second layer stack **130'** are chosen such that the membranes of the first group of CMUT cells **100** have a first spring constant (effective Young's modulus) and the membranes of the second group of CMUT cells **100'** have a second spring constant (effective Young's modulus) that is no more than 20% different to the first spring constant. More preferably, the membranes of the second group of CMUT cells **100'** have a second spring constant that is no more than 10% different to the first spring constant. In some embodiments, the first spring constant and the second spring constant are approximately the same, i.e. are less than 1% different to each other. This is particularly advantageous where the transducer elements of the transducer array **10** are formed by clusters of the CMUT cells **100** and **100'**, which transducer elements are typically addressed by a single control signal, e.g. a single bias voltage to drive the respective CMUT cells of the transducer element into collapse mode, as the comparable spring constants of the CMUT cells **100** and **100'** ensure that all cells of the transducer element can remain collapsed onto the substrate **101** during operation of the transducer element, e.g. in a transmission mode or a reception mode of the ultrasound transducer array **10**, i.e. exhibit comparable dynamic 'collapse' behaviour.

[0060] Any suitable 'heavy' material, i.e. a material having a relatively high density, such as a density of at least 7 g/cm³, preferably a density of at least 10 g/cm³, more preferably a density of at least 15 g/cm³ may be used as the mass layer **135**. The mass layer preferably further has a Young's modulus of less than 200 GPa. Dense materials having a Young's modulus of less than 100 GPa are particularly preferred. The Young's modulus may be determined (e.g. by room temperature) using a nano-indentation measurement as per ISO14577 or ASTM E2546-07, for example. The material may be an elemental material or a composite or alloy material. The material for example may be a metal (or metal alloy) having a high density and a low Young's modulus, e.g. gold or platinum, with gold being considered particularly suitable. It is nevertheless reiterated for the avoidance of doubt that the mass layer **135** is not necessarily a metal or metal alloy; the use of any suitable material having a suitably high density and low Young's modulus may be contemplated.

As shown in FIG. 2, the second layer stack **130'** may be identical to the first layer stack **130** but further include the

mass layer 135. In such an embodiment, the spring constant of the second layer stack 130' will differ by a small amount from the spring constant of the first layer stack 130 due to the presence of the additional mass layer 135. For this reason, the thickness of the mass layer 135 preferably is kept as small as possible to minimize the impact on the bending stiffness, i.e. spring constant, of the second layer stack 130'.

[0061] However, it should be understood that the layer composition of the first layer stack 130 may be more substantially different to the layer composition of the second layer stack 130'; for example, the first layer stack 130 may comprise one or more layers of a dielectric material having a different thickness than the corresponding layers in the second layer stack 130' and/or the first layer stack 130 may comprise one or more layers of a dielectric material not present in the second layer stack 130' or vice versa. Although this may require a more involved manufacturing process, in this manner the respective bending stiffnesses, i.e. spring constants, of the first layer stack 130 and the second layer stack 130' including the mass layer 135 may be tuned to have a minimal difference, e.g. be (approximately) identical. As a simple example, the first layer stack 130 may comprise a layer of a dielectric material to a first thickness and the second layer stack may comprise a layer of the same dielectric material to a second thickness that is smaller than the first thickness, wherein the second thickness may be chosen such that the combination of the layer of the dielectric material to the second thickness and the mass layer 135 exhibit a bending stiffness that is (approximately) the same as the bending stiffness of the layer of the dielectric material to the first thickness in the first layer stack 130.

[0062] FIG. 3 depicts the FEM-calculated frequency response of an ultrasound transducer array of CMUT cells 100 all having the same membrane without a mass layer (dashed line), the frequency response of an ultrasound transducer array of CMUT cells 100' all having this membrane onto which a mass layer 135 consisting of a 1.5 micron thick gold layer is formed (thin solid line) and the frequency response of an ultrasound transducer array comprising an alternating pattern of such CMUT cells 100 and CMUT cells 100' (thick solid line). The frequency response was obtained by driving the respective transducer arrays in collapse mode with a DC bias voltage and by applying an AC stimulus to the collapsed CMUT cells of the respective transducer arrays.

[0063] As can be seen from FIG. 3, the application of the mass layer 135 shifts the peak resonance frequency of the CMUT cells 100 from about 13 MHz to about 7 MHz for the CMUT cells 100' including the mass layer 135. The combination of the CMUT cells 100 and the CMUT cells 100' in the single ultrasound transducer array identified by the thick solid line exhibits a frequency response having a bandwidth that is nearly doubled compared to the ultrasound transducer arrays comprising CMUT cells 100 or CMUT cells 100' only. This clearly demonstrates that the presence of the first group of CMUT cells 100 as well as the second group of CMUT cells 100' within a single transducer array 10 improves the broadband characteristics of this array. It is further noted that the deployment of such multiple groups of cells within a single transducer array 10 may further be used to shape the frequency response of such an array. For example, the frequency response may be shaped to have an asymmetric profile towards a low point, e.g. -3 dB, in the frequency response. Such an asymmetric profile for example

may facilitate a more harmonic wave shape at the first harmonic frequency of the array.

[0064] FIG. 4 is a contour plot of the output pressure of a transducer array 10 solely comprising the first group of CMUT cells 100 (left pane) and of a transducer array 10 solely comprising the second group of CMUT cells 100' including the mass layer 135 in their respective membranes (right pane). The horizontal axis depicts the applied bias voltage [V] and the vertical axis depicts the generated pulse length [ns]. The lower dashed line horizontally extending through both contour plots denotes the central frequency of the first group of CMUT cells 100 and the upper dashed line horizontally extending through both contour plots denotes the central frequency of the second group of CMUT cells 100'. As indicated by the block arrow, the central frequency of such CMUT cells may be effectively shifted to a lower value by the inclusion of a mass layer 135 in such cells, thereby demonstrating that the broadband characteristics of an ultrasound transducer array 10 may be increased by the inclusion of multiple groups of CMUT cells within the array, wherein only some of the groups have membranes including such a mass layer 135.

[0065] FIG. 5 schematically depicts a cross-section of another embodiment of a CMUT cell 100', in which the mass layer 135 is a patterned layer. This for example may be advantageous in case the second group of CMUT cells 100' is to be divided into a first sub group in which the respective membranes of the CMUT cells 100' have a mass layer 135 of a first mass and a second sub group in which the respective membranes of the CMUT cells 100' have a mass layer 135 of a second mass that is smaller than the first mass. Rather than having to deploy mass layers 135 of different thicknesses to achieve such different masses, the respective mass layers 135 may be formed to a single thickness, with the mass layers 135 of the CMUT cells 100' of the second sub group being patterned in order to reduce the mass of these layers. As will be immediately apparent to the skilled person, the pattern density and/or shape may be controlled in order to tune the reduction in mass of the mass layers 135 of the CMUT cells 100' of the second sub group. The patterned layer in some embodiments may be a pattern of concentric rings or a radial pattern of spokes or strips radially extending from the center of the membrane upper surface. A particular pattern may be chosen to impart a desirable stress profile onto the membrane, as will be readily understood by the skilled person.

[0066] In this manner, an ultrasound transducer array 10 may be formed in which multiple groups of CMUT cells including mass layers 135 of different masses are present. FIG. 6 schematically depicts an example embodiment of such an ultrasound transducer array 10, in which the array comprises a first group of CMUT cells 100 without a mass layer in their respective membranes, a second group of CMUT cells 100' including a continuous mass layer 135 in their respective membranes and a third group of CMUT cells 100'' including a patterned mass layer 135 in their respective membranes. The inclusion of multiple groups of CMUT cells having different central frequencies allows for a fine-grained tuning of the desired frequency characteristics, e.g. broadband characteristics, of the ultrasound transducer array 10. It will be immediately apparent to the skilled person that although the example ultrasound transducer array 10 in FIG. 6 comprises two different groups of CMUT cells including mass elements of different mass, embodiments in which

such an ultrasound transducer array comprises more than two different groups of CMUT cells including mass elements of different mass, e.g. three groups, four groups, five groups, and so on, are equally feasible.

[0067] In an alternative embodiment, which is schematically depicted in FIG. 7, the first group of CMUT cells **100** and the second group of CMUT cells **100'** have different diameters. A pair of CMUT cells **100** and **100'** may form a unit cell (transducer element) **50**. An interconnection **102** may be present within the unit cell **50**, e.g. in between the CMUT cells **100**, **100'**, to connect the CMUT cells to circuitry in the underlying substrate, e.g. an ASIC or the like. In this embodiment, the pitch between CMUT cells within a single group preferably is constant to ensure that the frequency characteristics of the ultrasound transducer array **10** across its transducer surface are substantially homogenous. The use of groups of CMUT cells having different diameters provides additional design freedom when adding the mass layer **135** to selected group(s) of the CMUT cells. This may be used to compensate for the fact that during collapse mode, the center frequency of CMUT cells becomes largely independent of membrane radius. This can be understood from Equation (1), where the collapse radius R_c for a small radius membrane is much smaller than for a large radius membrane, such that the term $(1-x^2)$ compensates the term R^2 in equation (1), thus leading to the center frequency becoming largely insensitive to the membrane radius when the CMUT cells are operated in collapse mode.

[0068] FIG. 8 schematically depicts a non-limiting example embodiment of a CMUT transducer array manufacturing method. The method proceeds in step (a) with the provision of a substrate **101**, which may be any suitable substrate such as a silicon substrate, a silicon-on-insulator substrate, a silicon germanium substrate, a gallium nitride substrate and so on. A silicon-based substrate may for instance be used in a CMOS manufacturing process. The substrate **101** may comprise several structures, such as semiconductor devices, a metallization stack interconnecting the semiconductor devices and/or the CMUT cells, a passivation stack over the metallization stack and so on. The substrate **101** may for instance be the substrate of an application specific integrated circuit (ASIC) including the CMUT cells **100**, **100'** and **100''** if present on its layer stack, e.g. passivation and/or planarization stack, wherein the CMUT cells may be connected to signal processing circuitry on the substrate **101** by the metallization stack. The provision of such substrates **101** is well-known per se and belongs to the routine skills of the skilled artisan such that the provision of suitable substrates **101** will not be discussed in further detail for the sake of brevity only.

[0069] A first electrode **110** is formed on the substrate **101**, which electrode may be formed from any suitable electrically conductive material, e.g. metals or metal alloys, doped semiconductor materials such as doped poly-silicon, (semi) conducting oxides and so on. It is for instance particularly advantageous to use metals that are readily available in the manufacturing technology of choice, as this requires minimal redesign of the manufacturing flow, which is attractive from a cost perspective. For example, in a CMOS process, conductive materials such as Al, W, Cu, Ti, TiN and so on, as well as combinations of such materials, may be used to form the first electrode **110**.

The formation of the first electrode **110** may form part of the formation of a first electrode arrangement over the substrate

101, which first electrode arrangement includes the respective first electrodes **110** of the CMUT cells **100**, **100'**, **100''**.

[0070] The first electrode **110**, and the substrate **300** may subsequently optionally be covered by an electrically insulating (dielectric) material layer **111**. This is shown in step (b). Such a dielectric layer **111** for instance may be used to electrically insulate the first electrode **110** from its counter electrode **120** (see below) to reduce the risk of short circuits between the electrodes during the operation of the CMUT cell. In addition, the dielectric layer **111** may be used to protect the first electrode **110** and the substrate **101** from damage during the removal of the sacrificial material to form the cavity over the first electrode **110**.

[0071] Although the dielectric layer **111** is shown to cover the entire substrate surface **101**, it is equally feasible to provide a patterned dielectric layer **111** in which only certain parts of the substrate **101** together with the first electrode **110** are covered by the dielectric layer **111**. Any suitable dielectric material may be used for the protection of the first electrode **110** and the substrate **101**, e.g. one or more materials selected from silicon nitride (Si_3N_4), silicon oxide (Sift), aluminium oxide (Al_2O_3), hafnium oxide (HfO_2) or the like, although it is emphasized that the suitable dielectric materials are not limited to these example materials. In addition, mixtures or laminates of the aforementioned dielectric materials may be used for the protection of the first electrode **110**. As such a dielectric layer **111** may be formed in any suitable manner, e.g. using suitable deposition techniques such as ALD, (PE)ALD, PLD, PVD, LPCVD and PECVD, its formation will not be explained in further detail for the sake of brevity.

[0072] In step (c), a sacrificial material is formed, e.g. through a suitable deposition technique, on the substrate **101** including the first electrode **110** and the optional dielectric layer **111**. The sacrificial material is patterned to include a first region **112** over the first electrode **110** from which the cavity is formed and may further comprise a second region **112'** outside the intended cavity area acting as a channel through which the sacrificial material may be removed. The height of the sacrificial material layer corresponding to the gap height of the cavity to be formed is typically in the range of 100-1,000 nm although it should be understood that values outside this range may also be contemplated.

[0073] In an embodiment, the first region **112** is a circular region with the second region **112'** extending from the first region **112** in the form of one or more teeth-like protrusions, e.g. 2-8 of such protrusions. A top-view of such a sacrificial material portion is shown in step (c'), in which four of such protrusions are shown by way of non-limiting example only. The teeth-like second regions **112'** are typically used as cavity access platforms outside the membrane to be formed through which access to the first portion **112** can be provided for opening or releasing the cavity.

[0074] In principle, any suitable sacrificial material may be used, although for device performance reasons it is preferable to use sacrificial materials that can be effectively removed in a subsequent etching step. For instance, the use of metals such as Al, Cr and Mo, Ti and (Ti)W or non-metals such as amorphous silicon or silicon oxide may be contemplated. Materials such as Al, amorphous silicon and silicon oxide are for instance readily available in CMOS processes, and of these materials Al can be particularly effectively removed by etching. The patterned sacrificial material may be formed in any suitable manner, e.g. using suitable depo-

sition and patterning techniques and its formation will not be explained in further detail for the sake of brevity.

[0075] It will be understood that the diameter of the first region **112** defines the diameter of the cavity of a CMUT cell **100**, **100'**, **100''** to be formed. In an embodiment, the diameter is selected in a range of 20-500 micron, more preferably in a range of 50-300 micron, although it should be understood that larger diameters may also be contemplated, e.g. diameters up to 1,000 micron.

[0076] In step (d), a first dielectric layer **131** of the membrane to be formed is deposited over the first region **112** and the second region **112'** of the sacrificial material and the exposed portions of the dielectric layer **111** if present. As the first dielectric layer **131** and the dielectric layer **111** are both exposed to the etch recipe for removing the sacrificial layer, the first dielectric layer **131** and the dielectric layer **111** may be of the same material, although it is of course also plausible to use different materials for the first dielectric layer **131** and the dielectric layer **111** respectively. In an embodiment, the first dielectric layer **131** and the dielectric layer **111** each comprise at least one layer formed any suitable dielectric material, such as a silicon oxide layer, e.g., Sift, a silicon nitride layer, e.g., Si_3N_4 or the like, an aluminium oxide (Al_2O_3) layer, a hafnium oxide (HfO_2) layer and so on. Many other suitable dielectric layer materials will be apparent to the skilled person. Preferably, deposition techniques such as PECVD and ALD are used to form the dielectric layers as these techniques can be performed at temperatures below 400°C ., which makes them compatible with CMOS manufacturing processes. The first dielectric layer **131** may be formed as a layer stack, e.g. an oxide-nitride stack or an oxide-nitride-oxide stack. Similarly, the optional dielectric layer **111** may be formed as such a stack. It is reiterated that any suitable dielectric material may be used for the optional dielectric layer **111** and the first dielectric layer **131**. In addition, mixtures or laminates, e.g. ALD laminates, of the aforementioned dielectric materials may be used for these dielectric layers.

[0077] After the formation of the first dielectric layer **131**, the second electrode arrangement including the second electrodes **120** is formed on the first dielectric layer **131** as shown in step (e) such that each second electrode **120** is oriented opposite a first electrode **110**. The second electrode arrangement preferably is formed of the same electrically conductive material as the first electrode arrangement, although it should be understood that the second electrode arrangement and the first electrode arrangement alternatively may be formed of different materials. The second electrode arrangement may for instance be formed from any suitable electrically conductive material such as Al, W, Cu, Ti, TiN and so on, as well as combinations of such materials. The second electrode arrangement may be formed using well-known techniques that are not further explained for the sake of brevity only. The first electrode arrangement including the first electrodes **110** and the second electrode arrangement including the second electrodes **120** may be formed to any suitable thickness, e.g. 50-250 nm thickness. Other suitable thicknesses may be contemplated, e.g. depending on the application domain.

[0078] After the formation of the second electrode **120**, the method proceeds as shown in step (f), in which the second dielectric layer **133** is formed. In an optional embodiment, the second dielectric layer **133** is formed to a first thickness t_1 , which exceeds the thickness of the first portion

112 of the sacrificial material in between the first electrode **110** and the second electrode **120** such that upon formation of the cavity **130** the height g of the cavity gap is substantially smaller than the thickness t_1 , i.e. $g/t_1 \ll 1$. Preferably $t_1 \geq 3g$, more preferably $t_1 \geq 5g$. This ensures that during the release of the cavity **105** in step (g), i.e. by formation of the access or via **116** and the subsequent removal of the first portion **112** and the second portion **112'** of the sacrificial material, the membrane exhibits excellent membrane robustness during the cavity release step as $g \ll t_1$ at the stage of removal of the sacrificial material to form the cavity **105**. Moreover, because the second dielectric layer **133** is formed, e.g. deposited, prior to the release of the cavity **105**, a membrane with excellent flatness characteristics is obtained as the presence of the sacrificial material prevents deformation of the first dielectric layer **131** during the formation of the second dielectric layer **133**.

[0079] The first portion **112** and the second portions **112'** of the sacrificial material are subsequently removed as shown in step (g) by the formation of the access or via **116** using a suitable etch recipe to form the cavity **105** in between the first electrode **110** and the second electrode **120** embedded in between the first dielectric layer **131** and the second dielectric layer **133** of the membrane layer stack **130** of the CMUT cells **100**, **100'**. Suitable etch recipes for such conventional sacrificial materials are well-known per se and the skilled person will have no difficulty selecting an appropriate etch recipe using his common general knowledge.

[0080] The thickness of the layer stacks **130** may be further increased during the sealing of the access or via **116** in step (h) by the formation of the further dielectric layer **134** including the plug **118** in the access or via **116**. The further dielectric layer **134** may be substantially thinner than the second dielectric layer **133**. The further dielectric layer **134** may be formed to a thickness of at least twice the height, e.g. 3-4 times the height, of the cavity **105** to effectively seal the access or via **116**.

[0081] In step (i), a mass layer **135** is applied to selected membrane layer stacks **130** in order to form the membrane layer stacks **130'** of the second group of CMUT elements **100**. Such a mass layer **135** may be selectively applied in any suitable manner, e.g. by applying a mask layer across the membrane layer stacks **130**, and patterning this mask layer to expose the membrane layer stacks **130** to which the mass layer **135** is applied, after which application the mask layer may be removed. Other suitable techniques for selectively applying the mass layer **135** will be immediately apparent to the skilled person. Although not explicitly shown, a further differentiation in the second group of CMUT cells **100'** may be achieved by patterning selected mass layers **135** to form a first sub group and a second sub group of CMUT cells comprising mass layers **135** with different masses as previously explained.

[0082] At this point it is emphasized that steps (a)-(i) schematically depict an advantageous but non-limiting example of forming one or more CMUT cells **100**, **100'** and **100''** if present on a substrate **101**. Many alternative routes will be apparent to the skilled person.

[0083] A notable process variation is that the access or via **116** may be sealed in any suitable manner using any suitable material, e.g. by depositing and patterning a dedicated sealing layer such as a metal or dielectric layer to form the plug **118**. It is furthermore noted that the cavity **105** may be released at any suitable point in the CMUT manufacturing

process, e.g. prior to the formation of the second dielectric layer **133**. Another notable process variation is that the first electrode **110** and/or the second electrode **120** may or may not be separated from the cavity **130** by a dielectric layer, as this is a typical design choice. As previously mentioned, a dielectric layer, i.e. an electrically insulating layer, may be provided over the first electrode **110** and/or the second electrode **120** to prevent direct contact between the first electrode **110** and the second electrode **120** during operation of the CMUT cells **100**, **100'** and **100''** if present.

[0084] The membrane stacks **130** may be formed in any suitable manner, e.g. by a single dielectric layer rather than a stack of dielectric layers, and so on. Such process choices fall within the routine skills of the skilled person and will therefore not explicitly mentioned in detail for the sake of brevity only. As previously mentioned, not all CMUT cells **100**, **100'** may have the same membrane stack **130**. It is equally feasible to, in addition to the presence of the mass layer **135** in the second group of CMUT cells **100'**, to have different layers and/or different layer thicknesses between the layer stack **130** and **130'** respectively.

[0085] Also, it should be understood that alternative designs of the individual CMUT cells **100** are of course equally feasible. The design of the CMUT cells **100** is not particularly relevant to the present invention, and any suitable design of the cells may be contemplated; for example, 3-electrode CMUT cells **100** in which an intermediate electrode is located between the bottom electrode **110** and the cavity **105** are equally feasible. Such 3-electrode CMUT cells for instance may be contemplated to provide a stimulus and a bias voltage through separate electrodes, e.g. to reduce the risk of membrane sticking to the bottom of the CMUT cell.

[0086] At this point it is further noted that although not shown in the various embodiments, it should be understood that the CMUT cells **100**, **100'** and **100''** if present manufactured in accordance with embodiments may comprise additional circuit elements, which may be integrated on the substrate **101** or may be provided on a separate substrate and integrated into a single package with one or more of the CMUT devices from a wafer manufactured in accordance with embodiments of the present invention. Such additional circuitry may be instance be an IC, e.g. an ASIC, for controlling the one or more CMUT cells **100**, **100'** and **100''** if present and/or processing the signals generated by the one or more CMUT cells **100**, **100'** and **100''** if present, e.g. to control transmission and/or reception modes of the one or more CMUT cells **100**, **100'** and **100''** if present. Other suitable embodiments of the CMUT cells **100**, **100'** and **100''** if present and/or an ultrasound transducer array **10** comprising such cells will be immediately apparent to the skilled person.

[0087] It is furthermore noted that in the aforementioned manufacturing process, a wafer processed during the manufacturing process may contain a single die, i.e. a single device, in which case the substrate **101** corresponds to the wafer, or a plurality of dies that may be singulated in any suitable manner, e.g. diced, after the completion of the device manufacturing process, in which case the substrate **101** corresponds to a part of the wafer, an example embodiment of which will be described in more detail below.

[0088] FIG. 9 is a plan view of a two dimensional transducer array **10** of the previously described groups of circular CMUT elements **50** (which each may contain CMUT cells

100, **100'** and **100''** if present as previously explained) according to an embodiment. The array is configured in the conventional manner of symmetrically aligned rows **56** and columns **58** of CMUT elements. In this example each column **58** is covered with an integral flexible foil containing embedded metal tracks, which allow the columns to be bent in a cylindrical shape. The flexible foil will be described in greater detail below. In this example the array is dimensioned to have the same pitch in both the row and column directions, as indicated by arrow **52** which denotes the pitch in the column direction and arrow **54** which denotes the pitch in the row direction. The columns **58** may be formed as separate substrate islands, e.g. separate silicon islands or strips, such that the transducer array **10** may be wrapped around a three dimensional body, e.g. a cylindrical body such as an external sheath of a catheter.

[0089] FIG. 10 is a plan view of a two-dimensional ultrasound transducer array **10** that is configured in accordance with a preferred embodiment. As shown in FIG. 10, the rows **56** and columns **58** of the groups of CMUT elements **50** are staggered in alignment, as is well-known per se. The staggered alignment in this example is accommodated by increasing the spacing **55** between CMUT elements **50** in the columnar direction, which enables adjacent columns and rows to be further interspersed with each other. In an embodiment, the spacing **55** is at least the diameter D of a CMUT element **50**. In the transducer array **10** comprising transducer elements **50** having multiple groups of CMUT cells **100**, **100'**, (**100''** and so on), the pitch between CMUT cells **100**, **100'** of the same group preferably is constant in the array such that the array exhibits uniform broadband characteristics over the total transducer area of the array.

In the illustrated example the transducer elements **50** are so tightly interspersed that a tangential line from cell to cell in the column or row direction would actually intersect a cell of the adjacent staggered row or column. The interspersion of transducer elements **50** allows for an increase in the density of CMUT elements within the transducer array **10** without requiring an increase in the vertical spacing (i.e. in the column direction) between transducer elements **50**, at least up to the point where the closest packing of transducer elements **50** is achieved. Beyond this point, the pitch between successive CMUT elements **50** in the columnar direction may be increased as arrow **55** shows to facilitate a further decrease in horizontal spacing, as indicated by arrows **57** and **59**, but this will reduce the overall CMUT density of the transducer array. At least at its closest packing, the CMUT transducer array **10** of FIG. 10 has a greater cell density than the CMUT transducer array **10** of FIG. 9.

[0090] In FIG. 10, each column **58** of CMUT elements **50** is located on a separate substrate island, i.e. a separate piece of silicon die. The respective substrate islands, e.g. silicon islands, are characterized by having a meandering edge structure in the length direction of, i.e. along, the columns **58**, with edge portions **58A** meandering outwardly around transducer elements **50** and edge portions **58B** meandering inwardly into a space between neighboring CMUT cells **50**, **50'** in a column **58**. In other words, the columns **58** have wave-shaped opposing edges in the column direction where the wave peaks coincide with the CMUT cells **50**, **50'** and the wave valleys coincide with the spacings **55** in between the CMUT elements **50**.

[0091] A neighboring column **58** is arranged such that an outwardly meandering edge portion of its silicon island

aligns with, i.e. slots into, an inwardly meandering edge portion of a neighboring silicon island, thereby forming the staggered rows of CMUT elements **50** by the staggered alignment of the CMUT elements **50** between neighboring columns **58**. Neighboring silicon islands are typically separated by a gap **57**, to facilitate out-of-plane bending of the silicon islands respective to each other, e.g. when wrapping the CMUT transducer array **10** around a three dimensional body such as a cylindrical body, e.g. a catheter sheath.

[0092] In order to retain the relative positions of the substrate islands respective to each other, the CMUT transducer array **10** further comprises a flexible foil **60** onto which the substrate islands are mounted. The flexible foil **60** for instance may comprise a so-called flex-to-rigid foil in which a metal layer or metal layer stack, e.g. metal tracks, is embedded in or covered by a polymer layer or polymer layer stack, which polymer typically is electrically insulating in order to protect the metal layer from accidental short circuits. A non-limiting example of a suitable polymer for such a flexible foil **60** is polyimide, as it is well-known per se that polyimide is compatible with many semiconductor manufacturing processes such as a CMOS manufacturing process. Other suitable polymers, e.g. parylene, will be immediately apparent to the skilled person. A non-limiting example of a suitable metal is aluminium or any other metal commonly used in semiconductor manufacturing processes. The compatibility of such materials with existing semiconductor manufacturing processes facilitates the manufacture of the CMUT transducer array using existing semiconductor manufacturing processes rather than having to redesign or redevelop such manufacturing processes, which would increase the cost of the CMUT transducer array **10**.

[0093] The provision of the CMUT elements **50** on a plurality of adjacent meandering substrate islands interconnected via a flexible foil **60** allows for the out-of-plane bending of the CMUT transducer array **10** in the row direction of the array whilst providing structural integrity in the column direction of the array, which for example is particularly advantageous when wrapping the array around a catheter such as an intra-vascular catheter or an intra-cardiac catheter. For example, the CMUT transducer array **10** may be wrapped around the external sheath of such a catheter, with the silicon island columns **58** aligning in a length direction of the catheter, i.e. CMUT transducer array **10** being bent out-of-plane and is wrapped around the catheter sheath in its row direction. Due to the provision of a large number of relatively narrow silicon islands, a near-cylindrical configuration of the CMUT transducer array **10** may be achieved when wrapping the CMUT transducer array **10** around a cylindrical body such as a catheter sheath, with the further advantage that such a CMUT transducer array is continuous over the entire surface of such a body, e.g. does not contain discontinuities between adjacent rectangular silicon islands forming part of the CMUT transducer array, as for instance is the case in EP 2 455 133 A1.

[0094] In accordance with a further aspect of the present invention, advantage is taken of this decreased spacing **57** and **59** by operating the array of FIG. **10** so that an operational row of transducer elements **50** is not a horizontal row **56** of elements but an interspersed combination of two (or more) adjacent staggered rows. This is contrary to the conventional wisdom of diced piezoceramic transducer elements, in which an operational row of elements is a perfectly linear row of elements. In the example of FIG. **10**, an

operational row of elements is formed by staggered rows of elements. For instance, one operational row in FIG. **4** comprises transducer elements **62₁**, **62₂**, **62₃**, **62₄**, . . . **62_N** of two adjacent staggered rows, i.e. the M^{th} operational row comprises the M^{th} CMUT element **50** of each column **58** of CMUT elements **50**, with M being a positive integer, with each row typically forming a meandering annular row when wrapped around a catheter. The tighter spacing of the staggered rows enables an operational row of 96 cells to be provided where the standard symmetrical alignment would only accommodate 64 cells, for instance, and the staggered configuration of the operational row still is capable of providing acoustic signals for highly resolved images with lower clutter due to the reduced grating lobes in the antenna pattern. Such a staggered row for instance may be addressed by sequentially activating the appropriate CMUT elements **50** of neighboring columns **58**, e.g. sequentially activate transducer elements **62₁**, **62₂**, **62₃**, **62₄**, . . . **62_N** of the N columns **58**.

[0095] In the embodiment of FIG. **10**, the respective substrate, e.g. silicon, islands are retained by a continuous flexible foil **60**. In an alternative embodiment, the flexible foil **60** may be patterned such that the flexible foil **60** comprises a plurality of recesses aligning with the gaps **57**, with respective bridge portions or bridges extending across the gaps **57** to interconnect different regions of the flexible foil **60**, e.g. different regions retaining different substrate (silicon) islands. This further increases the flexibility of the CMUT transducer array **10** but may be less robust.

[0096] FIG. **11** illustrates several process steps in the formation of a flexible foil bridge joining two silicon islands on which CMUT elements **50** are located. FIG. **11(a)** shows a silicon wafer **70** with thermal silicon dioxide layers **72** grown on the top and bottom sides. Patterned aluminum areas **81** are sputtered on the top side using standard lithography. A patterned area of polyimide **74** is laid over one of the aluminum areas on the top side, which pattern defines the bridges in the flexible foil. In case of a continuous flexible foil, the polyimide **74** may be a continuous sheet. An aluminum layer **80** is deposited over the polyimide **74** and a second polyimide layer **76** is laid over the aluminum. Another layer of aluminum **82** is patterned over the aluminum layer **80** for use as a mask during etching, all as shown in FIG. **11(b)**.

[0097] Finally, as shown in FIG. **11(c)**, the silicon wafer **70** is etched away from the back in areas outside the masked by thick resist areas **84**, both under CMUT location **88** and under the flexible bridge **74**, **80**, **76**. The polyimide layer **76** on either side of the flexible bridge **90** on the top side is patterned away on either side of etch mask layer **82**, which is then itself etched away. The result is two separate silicon islands **92** and **94**, joined by a flexible bridge **90**. The flexible bridge **90** and others like it enable an array of such CMUT-populated islands to be wrapped in a cylindrical shape, fitting the needs of an intra-cardiac catheter transducer.

[0098] As previously mentioned, an operational row **200** of acoustic transducer elements **50** is formed, not by a straight line of transducer elements as in the conventional manner, but by two or more adjacent staggered rows **202** and **204** of CMUT cells **50**, **50'**. FIG. **12** schematically depicts an alternative embodiment of an ultrasound transducer array **10** in which each silicon island column **58** comprises a pair of CMUT element **50** comprising columns arranged in a staggered arrangement, i.e. the area of a CMUT element **50** in a

first column extends into the space between neighboring CMUT element **50** in the neighboring column, preferably such that a tangent between these neighboring CMUT cells intersects the area of the CMUT element **50** extending into the space between these neighboring CMUT elements.

[0099] As before, the silicon island columns **58** have a meandering edge structure in the length direction of, i.e. along, the columns **58**, with edge portions meandering outwardly around CMUT elements **50** and edge portions meandering inwardly into a space between neighboring CMUT elements **50** in a column **58**. A neighboring column **58** is arranged such that an outwardly meandering edge portion of its silicon island aligns with, i.e. slots into, an inwardly meandering edge portion of a neighboring silicon island, thereby forming the staggered rows of CMUT elements **50** by the staggered alignment of the CMUT elements **50** between neighboring columns **58**. Neighboring silicon islands are typically separated by a gap **57**, to facilitate out-of-plane bending of the silicon islands respective to each other, e.g. when wrapping the CMUT transducer array **10** around a catheter sheath as previously explained.

[0100] This embodiment has the advantage of providing larger, i.e. wider, silicon islands, which improves the structural rigidity of such islands, whilst still providing an ultrasound transducer array with excellent flexibility in the row direction. This embodiment is particularly advantageous where the circumference of a body, e.g. a catheter sheath, around which the transducer array is to be wrapped, is many times the width of a single silicon island, such that many silicon islands are to be wrapped around the body, and such that substantially continuous transducer rows are provided around the body.

[0101] As before, the direction of operational row **200** is the in-plane, beam-steering direction, i.e. beam steering typically takes place perpendicular to the columns **58**. The separate silicon islands are overlaid with a flexible foil **60**, e.g. a continuous foil as shown in the drawing or a patterned foil containing bridge portions **90** across the gaps between neighboring silicon islands, to retain the respective orientation of the silicon islands and to enable the two dimensional transducer array **10** to be bent into a cylindrical shape around a distal tip **210** of a catheter **250** as shown in FIG. **13**. It should be understood that the array is wrapped around the distal tip **210** by way of non-limiting example only; it is for instance equally feasible to wrap the transducer array **10** around any other part of the catheter **250**, even though it is preferred that the array **10** is located proximal to the distal tip of the catheter **250**. In some embodiments, the catheter **250** may comprise a further ultrasound transducer array (not shown) on the distal tip **210**, e.g. a planar ultrasound transducer array having a circular circumference in addition to the wraparound ultrasound transducer array **10**, such that the catheter **250** can generate images of a body portion ahead of the catheter as well as around the catheter, which for instance is particularly advantageous in intra-cardiac imaging. In some embodiments, the catheter **250** therefore may be an intra-cardiac or intravascular catheter.

[0102] FIGS. **14** and **15** are plan views of two CMUT arrays **10** according to further embodiments of the present invention. In FIG. **14** each CMUT element **50** is fabricated on its own substrate, e.g. silicon, island **92** (see FIG. **11**). Each column **58** of CMUT elements **50** is overlaid with a strip **60** of flexible foil and the foil strips of adjacent columns are interconnected by flexible bridges **90** which are formed

as shown in FIG. **11**. The flexible foil strip **60** can comprise a conductive material, such as aluminum, which allows either to address ultrasound elements together within the column, or keeping the elements at the same potential, such as ground. The individual addressing of the elements **50** in the transducer array **10** may be realized via the integrated circuitry. The flexible bridges thus help maintain the orientations of the elements **50** of the transducer array **10** while permitting the array to be flexed and bent in a curved configuration. In particular, in this embodiment the CMUT transducer array **10** may be bent in the row direction as well as in the column direction due to each column **58** being formed by multiple substrate islands interconnected by the bridge structures **90** in the flexible foil strip **60**.

[0103] FIG. **15** shows a similar CMUT array **10**, except that there are two CMUT elements **50**, **50'** on each substrate, e.g. silicon, island **92**. For instance, CMUT elements **50** and **50'** of adjacent columns of elements are both located on the same silicon island. The two adjacent columns are overlaid with a flexible foil strip **60**, and adjacent foil strips are interconnected by flexible bridges **90** which permit bending of the CMUT transducer array **10** into a curved or cylindrical shape.

[0104] As before, it should be understood that instead of a flexible foil strip **60** having discrete portions interconnected by bridge structures **90**, a continuous flex foil may be used to retain the respective substrate islands. Such an alternative embodiment is more robust but may have more limited flexibility. This however may not be problematic if the curvature of the body onto which the CMUT transducer array **10** is to be fitted is relatively limited.

[0105] At this point, it is further noted that although the embodiments in FIG. **9-15** have been described in terms of CMUT elements **50** comprising clusters of CMUT cells **100**, **100'**, it is equally feasible that each CMUT element **50** comprises a single CMUT cell, e.g. a CMUT cell **100** or a CMUT cell **100'**, in which the transducer array **10** typically comprises an alternating pattern of CMUT cells **100**, **100'** as the CMUT elements **50**.

[0106] FIG. **16** schematically depicts an example embodiment of an ultrasonic diagnostic imaging system **1** with an ultrasound transducer array **10**, e.g. an array of ultrasound transducer element tiles (transducer elements) comprising multiple CMUT cells **100** and/or **100'** connected together and operated in unison as a single transducer element, in block diagram form. The array **10** may form part of an ultrasound probe such as a catheter **250** as previously explained. In FIG. **16**, the transducer array **10** is provided for transmitting ultrasonic waves and receiving echo information. As previously explained, the transducer array **10** may be a one- or a two-dimensional array of ultrasound transducer element tiles capable of scanning in a 2D plane or in three dimensions for 3D imaging.

[0107] The transducer array **10** may be coupled to a microbeam former **12**, which may be integrated in a probe or catheter **250**, which controls transmission and reception of signals by the ultrasound transducer cells **100** (or clusters thereof). Microbeam formers are capable of at least partial beam forming of the signals received by groups or "patches" of transducer element tiles for instance as described in U.S. Pat. No. 5,997,479 (Savord et al.), U.S. Pat. No. 6,013,032 (Savord), and U.S. Pat. No. 6,623,432 (Powers et al.)

[0108] The microbeam former **12** may be coupled by a probe cable, e.g. coaxial wire, to a terminal, e.g. a patient

interface module or the like, comprising a transmit/receive (T/R) switch **16** which switches between transmission and reception modes and protects the main beam former **20** from high energy transmit signals when a microbeam former is not present or used and the transducer array **10** is operated directly by the main system beam former **20**. The transmission of ultrasonic beams from the transducer array **10** under control of the microbeam former **12** may be directed by a transducer controller **18** coupled to the microbeam former by the T/R switch **16** and the main system beam former **20**, which receives input from the user's operation of the user interface or control panel **38**. One of the functions controlled by the transducer controller **18** is the direction in which beams are steered and focused. Beams may be steered straight ahead from (orthogonal to) the transducer array **10**, or at different angles for a wider field of view. The transducer controller **18** may be coupled to control the voltage source **45** for the ultrasound transducer array **10**. For instance, the power supply **45** sets the DC and AC bias voltage(s) that are applied to CMUT elements of a CMUT array **10**, e.g. to operate the one or more CMUT cells **100**, **100'** of the CMUT elements in collapse mode, as is well-known per se.

[0109] To this end, the power supply **45** may optionally comprise separate stages for providing the DC and AC or stimulus components respectively of the drive voltage of the CMUT cells **100**, e.g. in transmission mode. A first stage may be adapted to generate the static (DC) voltage component and a second stage may be adapted to generate an alternating variable voltage component or stimulus having a set alternating frequency, which signal typically is the difference between the overall drive voltage and the aforementioned static component thereof. The static or bias component of the applied drive voltage preferably meets or exceeds the threshold voltage when forcing the CMUT elements into their collapsed states, i.e. when operating the CMUT elements in collapsed mode. This has the advantage that the first stage may include relatively large capacitors, e.g. smoothing capacitors, in order to generate a particularly low-noise static component of the overall voltage, which static component typically dominates the overall voltage such that the noise characteristics of the overall voltage signal will be dominated by the noise characteristics of this static component.

[0110] Other suitable embodiments of the power supply **45** should be apparent, such as for instance an embodiment in which the power supply **45** contains three discrete stages including a first stage for generating the static DC component of the CMUT drive voltage, a second stage for generating the variable DC component of the drive voltage and a third stage for generating the frequency modulation or stimulus component of the signal, e.g. a pulse circuit or the like. It is summarized that the power supply **45** may be implemented in any suitable manner.

[0111] The partially beam-formed signals produced by the microbeam former **12** may be forwarded to the main beam former **20** where partially beam-formed signals from individual patches of transducer elements are combined into a fully beam-formed signal. For example, the main beam former **20** may have 128 channels, each of which receives a partially beam-formed signal from a patch of dozens or hundreds of ultrasound transducer cells **100**, **100'**. In this

way the signals received by thousands of transducer elements of a transducer array **10** can contribute efficiently to a single beam-formed signal.

[0112] The beam-formed signals are coupled to a signal processor **22**. The signal processor **22** can process the received echo signals in various ways, such as bandpass filtering, decimation, I and Q component separation, and harmonic signal separation which acts to separate linear and nonlinear signals so as to enable the identification of nonlinear (higher harmonics of the fundamental frequency) echo signals returned from tissue and microbubbles.

The signal processor **22** optionally may perform additional signal enhancement such as speckle reduction, signal compounding, and noise elimination. The bandpass filter in the signal processor **22** may be a tracking filter, with its pass-band sliding from a higher frequency band to a lower frequency band as echo signals are received from increasing depths, thereby rejecting the noise at higher frequencies from greater depths where these frequencies are devoid of anatomical information.

[0113] The processed signals may be forwarded to a B-mode processor **26** and optionally to a Doppler processor **28**. The B-mode processor **26** employs detection of an amplitude of the received ultrasound signal for the imaging of structures in the body such as the tissue of organs and vessels in the body. B-mode images of structure of the body may be formed in either the harmonic image mode or the fundamental image mode or a combination of both for instance as described in U.S. Pat. No. 6,283,919 (Roundhill et al.) and U.S. Pat. No. 6,458,083 (Jago et al.).

[0114] The Doppler processor **28**, if present, processes temporally distinct signals from tissue movement and blood flow for the detection of the motion of substances, such as the flow of blood cells in the image field. The Doppler processor typically includes a wall filter with parameters which may be set to pass and/or reject echoes returned from selected types of materials in the body. For instance, the wall filter can be set to have a passband characteristic which passes signal of relatively low amplitude from higher velocity materials while rejecting relatively strong signals from lower or zero velocity material.

[0115] This passband characteristic will pass signals from flowing blood while rejecting signals from nearby stationary or slowly moving objects such as the wall of the heart. An inverse characteristic would pass signals from moving tissue of the heart while rejecting blood flow signals for what is referred to as tissue Doppler imaging, detecting and depicting the motion of tissue. The Doppler processor may receive and process a sequence of temporally discrete echo signals from different points in an image field, the sequence of echoes from a particular point referred to as an ensemble. An ensemble of echoes received in rapid succession over a relatively short interval can be used to estimate the Doppler shift frequency of flowing blood, with the correspondence of the Doppler frequency to velocity indicating the blood flow velocity. An ensemble of echoes received over a longer period of time is used to estimate the velocity of slower flowing blood or slowly moving tissue.

[0116] The structural and motion signals produced by the B-mode (and Doppler) processor(s) are coupled to a scan converter **32** and a multiplanar reformatter **44**. The scan converter **32** arranges the echo signals in the spatial relationship from which they were received in a desired image format. For instance, the scan converter may arrange the

echo signal into a two dimensional (2D) sector-shaped format, or a pyramidal three dimensional (3D) image.

The scan converter can overlay a B-mode structural image with colors corresponding to motion at points in the image field with their Doppler-estimated velocities to produce a color Doppler image which depicts the motion of tissue and blood flow in the image field. The multiplanar reformatter **44** will convert echoes which are received from points in a common plane in a volumetric region of the body into an ultrasonic image of that plane, for instance as described in U.S. Pat. No. 6,443,896 (Detmer). A volume renderer **42** converts the echo signals of a 3D data set into a projected 3D image as viewed from a given reference point as described in U.S. Pat. No. 6,530,885 (Entrekin et al.)

[0117] The 2D or 3D images are coupled from the scan converter **32**, multiplanar reformatter **44**, and volume renderer **42** to an image processor **30** for further enhancement, buffering and temporary storage for display on an image display **40**. In addition to being used for imaging, the blood flow values produced by the Doppler processor **28** and tissue structure information produced by the B-mode processor **26** are coupled to a quantification processor **34**. The quantification processor produces measures of different flow conditions such as the volume rate of blood flow as well as structural measurements such as the sizes of organs and gestational age. The quantification processor may receive input from the user control panel **38**, such as the point in the anatomy of an image where a measurement is to be made.

[0118] Output data from the quantification processor is coupled to a graphics processor **36** for the reproduction of measurement graphics and values with the image on the display **40**. The graphics processor **36** can also generate graphic overlays for display with the ultrasound images. These graphic overlays can contain standard identifying information such as patient name, date and time of the image, imaging parameters, and the like. For these purposes the graphics processor receives input from the user interface **38**, such as patient name.

The user interface is also coupled to the transmit controller **18** to control the generation of ultrasound signals from the transducer array **10** and hence the images produced by the transducer array and the ultrasound system. The user interface is also coupled to the multiplanar reformatter **44** for selection and control of the planes of multiple multiplanar reformatted (MPR) images which may be used to perform quantified measures in the image field of the MPR images.

[0119] As will be understood by the skilled person, the above embodiment of an ultrasonic diagnostic imaging system **1** is intended to give a non-limiting example of such an ultrasonic diagnostic imaging system. The skilled person will immediately realize that several variations in the architecture of the ultrasonic diagnostic imaging system are feasible without departing from the teachings of the present invention. For instance, as also indicated in the above embodiment, the microbeam former **12** and/or the Doppler processor **28** may be omitted, the ultrasound transducer array **10** may not have 3D imaging capabilities and so on. Other variations will be apparent to the skilled person.

The ultrasound transducer array **10** according to embodiments of the present invention may form part of a catheter as previously explained. As will be readily understood by the skilled person, such a transducer array may form part of any type of investigative device, e.g. an ultrasound probe, an ultrasound matrix probe, an ultrasound catheter, an ultra-

sound needle, and so on. Such an ultrasound transducer array **10** may be used in any suitable ultrasound imaging technique.

[0120] It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word “comprising” does not exclude the presence of elements or steps other than those listed in a claim. The word “a” or “an” preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

1. A transducer array comprising a plurality of CMUT cells suitable for a collapsed operation mode, each CMUT cell comprising a first electrode supported by a substrate and a second electrode supported by a membrane suspended over a cavity between the first electrode and the second electrode, the plurality of CMUT cells comprising:

a first group of CMUT cells each having a membrane comprising a first layer stack; and

a second group of CMUT cells each having membrane comprising a second layer stack, the second layer stack including a layer of a material having a higher density than any of the layers in the first layer stack,

wherein the membranes of the first group of CMUT cells have a first spring constant and the membranes of the second group of CMUT cells have a second spring constant that is no more than 20% different to the first spring constant.

2. The transducer array of claim 1, wherein the second spring constant is no more than 10% different to the first spring constant.

3. The transducer array of claim 1, wherein:

the first layer stack comprises a layer of a dielectric material to a first thickness; and

the second layer stack comprises a layer of the dielectric material to a second thickness that is smaller than the first thickness; or

the second layer stack is the same as the first layer stack apart for the layer of the material having a higher density than any of the layers in the first layer stack being an additional layer.

4. The transducer array of claim 1, comprising a plurality of transducer elements, each transducer element comprising at least one CMUT cell of the first group and at least one CMUT cell of the second group.

5. The transducer array of claim 1, wherein the CMUT cells of the first group each have a first diameter and the CMUT cells of the second group each have a second diameter that is different to the first diameter.

6. The transducer array of claim 1, wherein the layer of a material having a higher density than any of the layers in the first layer stack has a density in excess of 7 g/cm³, preferably a density in excess of 10 g/cm³ and a Young's modulus of less than 200 GPa, preferably a Young's modulus of less than 100 GPa.

7. The transducer array of claim 1, wherein the layer of a material having a higher density than any of the layers in the first layer stack is a metal layer or metal alloy layer, preferably wherein the metal layer is a gold layer or a platinum layer.

8. The transducer array of claim 1, of a material having a higher density than any of the layers in the first layer stack is a patterned layer.

9. The transducer array of claim 1, wherein the CMUT cells are arranged in a staggered array comprising:

a first column of spaced CMUT cells or transducer elements on at least one silicon island;

a second column of spaced CMUT cells or transducer elements on at least one further silicon island, the second column being staggered in alignment with the first column such that cells of the second column are partially located in spaces between successive cells of the first column, the first column and the second column being spaced apart by a gap; and

a flexible foil retaining the respective silicon islands, the flexible foil comprising conductive interconnects.

10. The transducer array of claim 9, wherein the first group of CMUT cells and the second group of CMUT cells are each arranged at a constant pitch in the staggered array.

11. The transducer array of claim 9, wherein:

the first column of spaced CMUT cells or transducer elements is located on a first silicon island having opposing meandering edges, each edge meandering outwardly around one of the CMUT cells or transducer elements and meandering inwardly into a space between the CMUT cells or transducer elements;

the second column of spaced CMUT cells or transducer elements is located on a second silicon island having opposing meandering edges, each edge meandering outwardly around one of the CMUT cells or transducer

elements and meandering inwardly into a space between the CMUT cells or transducer elements; and the first silicon island is arranged adjacent to the second silicon island such that an outwardly meandering edge portion of the first silicon island slots into an inwardly meandering edge portion of the second silicon island.

12.-15. (canceled)

16. A system comprising

a transducer array comprising plurality of CMUT cells suitable for a collapsed operation mode, each CMUT cell comprising a first electrode supported by a substrate and a second electrode supported by a membrane suspended over a cavity between the first electrode and the second electrode, the plurality of CMUT cells comprising:

a first group of CMUT cells each having a membrane comprising a first layer stack; and

a second group of CMUT cells each having membrane comprising a second layer stack, the second layer stack including a layer of a material having a higher density than any of the layers in the first layer stack,

wherein the membranes of the first group of CMUT cells have a first spring constant and the membranes of the second group of CMUT cells have a second spring constant that is no more than 20% different to the first spring constant; and

a controller configured to control the transducer array.

17. The system of claim 16, further comprising a power supply adapted to operate the CMUT cells in a collapse mode during at least one of an ultrasound transmission mode and an ultrasound reception mode.

18. The system of claim 16, wherein the transducer array is included in a probe.

* * * * *

专利名称(译)	宽带超声换能器		
公开(公告)号	US20190176193A1	公开(公告)日	2019-06-13
申请号	US16/309170	申请日	2017-06-13
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	SHULEPOV SERGEI TIMMERMANS PETRUS HENRICUS MARIA DIRKSEN PETER		
发明人	SHULEPOV, SERGEI TIMMERMANS, PETRUS HENRICUS MARIA DIRKSEN, PETER		
IPC分类号	B06B1/02 G01N29/24 G01S15/89 A61B8/00		
CPC分类号	B06B1/0292 G01N29/2406 G01S15/8925 A61B8/4483		
优先权	2016174192 2016-06-13 EP		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种换能器阵列 (10)，其包括多个CMUT单元 (100,100 “)，每个CMUT单元包括第一电极 (110) 由基板 (101) 支撑，第二电极 (120) 由悬浮在空腔上的膜支撑 (105) 在第一电极和第二电极之间，多个CMUT单元包括第一组CMUT单元 (100)，每个CMUT单元具有包括第一层堆叠的膜 (130) ;第二组CMUT单元 (100 ') 各自具有包括第二层堆叠 (130 ') 的膜，第二层堆叠包括层 (135)) 具有比第一层堆叠中的任何层更高密度的材料。还公开了一种包括这种换能器阵列的装置，包括这种换能器阵列的超声成像系统和操作这种超声成像系统的方法。

