



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.08.2018 Bulletin 2018/35

(51) Int Cl.:
H01L 27/32 (2006.01)

(21) Application number: **18158958.1**

(22) Date of filing: **27.02.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD TN

- **Ryu, Jekil**
Yongin-si, Gyeonggi-do (KR)
- **Choe, Wonkyu**
Yongin-si, Gyeonggi-do (KR)
- **Choi, Jungho**
Yongin-si, Gyeonggi-do (KR)
- **Kim, Mugyeom**
Yongin-si, Gyeonggi-do (KR)
- **Jeong, Changyong**
Yongin-si, Gyeonggi-do (KR)

(30) Priority: **28.02.2017 KR 20170026462**

(71) Applicant: **Samsung Display Co., Ltd.**
Gyeonggi-do 17113 (KR)

(74) Representative: **Gulde & Partner**
Patent- und Rechtsanwaltskanzlei mbB
Wallstraße 58/59
10179 Berlin (DE)


(72) Inventors:
• **Seo, Kiseong**
Yongin-si, Gyeonggi-do (KR)

(54) **DISPLAY APPARATUS**

(57) A display apparatus includes a display region (DA) and a peripheral region (PA) adjacent to the display region. The display apparatus further includes a first flexible substrate (110), a driving circuit (DC), a conductive pattern (160), a conductive line (CL), a light-emitting device (OLED), and a support substrate (180). The first flexible substrate includes a first surface and a second surface opposite the first surface. The second surface includes, in the peripheral region, a cavity extending into

the first flexible substrate. The DC is on the first surface and includes at least one transistor. The CP is in the cavity and is partially exposed by the cavity. The conductive line electrically connects the CP to the DC. The light-emitting device is in the display region and is electrically connected to the DC. The support substrate is on the second surface. In a view normal to the second surface, the support substrate is spaced apart from the CP.

FIG. 3

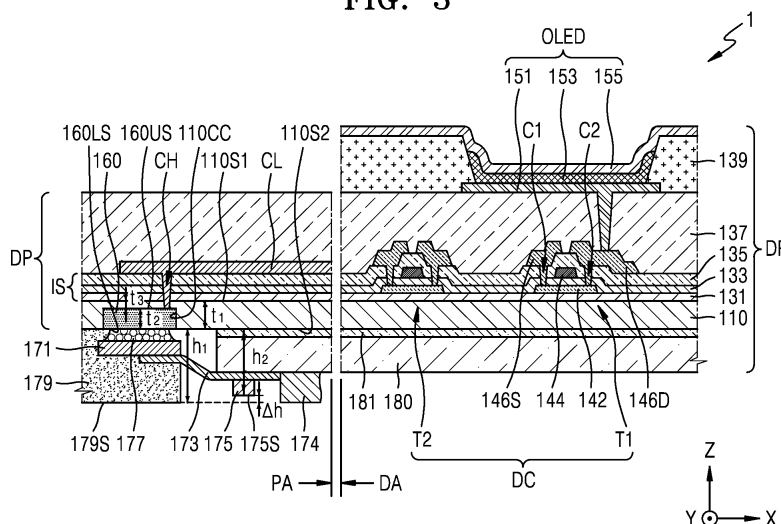

Description

[0001] The disclosure generally relates to a display apparatus and a method of manufacturing the same, and more particularly, to a display apparatus having a peripheral region of a reduced area and a method of manufacturing the same.

BACKGROUND

[0002] Display apparatuses include, for example, liquid crystal displays, organic light-emitting displays, plasma displays, field emission displays, electrophoretic displays, electrowetting displays, and the like. Display apparatuses typically include a display panel and a controller that controls an operation of the display panel. A portion of the controller used to drive the display panel may be included as a component that is independent from the display panel, and the portion of the controller may be connected to a pad formed on the display panel. Consumers may also demand display apparatuses with a small bezel. When a bezel is enlarged, a display region that displays an image looks relatively small, and the display apparatus may appear excessively large as compared with the display region.

[0003] The above information disclosed in this section is only for enhancement of an understanding of the background of the inventive concepts, and, therefore, it may contain information that does not form prior art already known to a person of ordinary skill in the art.

SUMMARY

[0004] Some exemplary embodiments are capable of providing a display apparatus having an area-minimized (or reduced) peripheral region through connection of an external circuit terminal to a conductive pattern exposed at a back surface of a display panel of the display apparatus.

[0005] Some exemplary embodiments are capable of providing a method of manufacturing a display apparatus having an area-minimized (or area-reduced) peripheral region via connection to an external circuit terminal through a conductive pattern exposed at a back surface of a display panel of the display apparatus.

[0006] Additional aspects will be set forth in the detailed description which follows, and, in part, will be apparent from the disclosure, or may be learned by practice of the inventive concepts.

[0007] According to some exemplary embodiments, a display apparatus includes a display region and a peripheral region adjacent to the display region. The display apparatus further includes a first flexible substrate, a driving circuit, a conductive pattern, a conductive line, a light-emitting device, and a support substrate. The first flexible substrate includes a first surface and a second surface opposite the first surface. The second surface includes, in the peripheral region, a cavity extending into the first

flexible substrate. The driving circuit is on the first surface and includes at least one transistor. The conductive pattern is in the cavity and is partially exposed by the cavity. The conductive line electrically connects the conductive pattern to the driving circuit. The light-emitting device is in the display region and is electrically connected to the driving circuit. The support substrate is on the second surface. In a view normal to the second surface, the support substrate is spaced apart from the conductive pattern.

[0008] According to some exemplary embodiments, a method of manufacturing a display apparatus including a display region and a peripheral region, includes: forming a second flexible substrate on a carrier substrate; forming a conductive pattern on the second flexible substrate in the peripheral region; forming a first flexible substrate on the second flexible substrate; forming, on a first surface of the first flexible substrate, a driving circuit including at least one transistor, and a conductive line electrically connecting the conductive pattern to the driving circuit; forming, in the display region, a light-emitting device electrically connected to the driving circuit; exposing the conductive pattern by removing the carrier substrate and at least a portion of the second flexible substrate; and forming a support substrate on a second surface of the first flexible substrate such that the conductive pattern is exposed, the second surface being opposite the first surface.

[0009] The foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The accompanying drawings, which are included to provide a further understanding of the inventive concepts, and are incorporated in and constitute a part of this specification, illustrate exemplary embodiments of the inventive concepts, and, together with the description, serve to explain principles of the inventive concepts.

FIG. 1 is a schematic plan view of a display apparatus according to some exemplary embodiments.

FIG. 2 is a schematic view of a portion of a back surface of the display apparatus of FIG. 1 according to some exemplary embodiments.

FIG. 3 is a partial cross-sectional view of the display apparatus of FIG. 1 taken along a first direction according to some exemplary embodiments.

FIG. 4 is a partial cross-sectional view of the display apparatus of FIG. 1 taken along a second direction according to some exemplary embodiments.

FIGS. 5A, 5B, 5C, 5D, 5E, 5F, 5G, 5H, 5I, 5J, and 5K are cross-sectional views of the display apparatus of FIG. 1 at various stages of manufacture according to some exemplary embodiments.

FIG. 6 is a schematic cross-sectional view of a pe-

peripheral region of a display apparatus according to some exemplary embodiments.

FIG. 7 is a schematic cross-sectional view of a peripheral region of a display apparatus according to some exemplary embodiments.

FIG. 8 is a schematic cross-sectional view of a peripheral region of a display apparatus according to some exemplary embodiments.

FIGS. 9A, 9B, and 9C are cross-sectional views of the display apparatus of FIG. 8 at various stages of manufacture according to some exemplary embodiments.

FIGS. 10A and 10B are schematic cross-sectional views of a peripheral region of a display apparatus according to some exemplary embodiments.

FIGS. 11A and 11B are cross-sectional views of the display apparatus of FIG. 10A at various stages of manufacture according to some exemplary embodiments.

FIGS. 12A, 12B, and 12C are cross-sectional views of the display apparatus of FIG. 10A at various stages of manufacture according to some exemplary embodiments.

FIG. 13 is a schematic cross-sectional view of a peripheral region of a display apparatus according to some exemplary embodiments.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0011] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of various exemplary embodiments. It is apparent, however, that various exemplary embodiments may be practiced without these specific details or with one or more equivalent arrangements. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring various exemplary embodiments. Further, various exemplary embodiments may be different, but do not have to be exclusive. For example, specific shapes, configurations, and characteristics of an exemplary embodiment may be implemented in another exemplary embodiment without departing from the spirit and the scope of the disclosure.

[0012] Unless otherwise specified, the illustrated exemplary embodiments are to be understood as providing exemplary features of varying detail of some exemplary embodiments. Therefore, unless otherwise specified, the features, components, modules, layers, films, panels, regions, aspects, etc. (hereinafter individually or collectively referred to as "elements"), of the various illustrations may be otherwise combined, separated, interchanged, and/or rearranged without departing from the spirit and the scope of the disclosure.

[0013] The use of cross-hatching and/or shading in the accompanying drawings is generally provided to clarify boundaries between adjacent elements. As such, neither

the presence nor the absence of cross-hatching or shading conveys or indicates any preference or requirement for particular materials, material properties, dimensions, proportions, commonalities between illustrated elements, and/or any other characteristic, attribute, property, etc., of the elements, unless specified. Further, in the accompanying drawings, the size and relative sizes of elements may be exaggerated for clarity and/or descriptive purposes. When an exemplary embodiment may be implemented differently, a specific process order may be performed differently from the described order. For example, two consecutively described processes may be performed substantially at the same time or performed in an order opposite to the described order. Also, like reference numerals denote like elements.

[0014] When an element is referred to as being "on," "connected to," or "coupled to" another element, it may be directly on, connected to, or coupled to the other element or intervening elements may be present. When, however, an element is referred to as being "directly on," "directly connected to," or "directly coupled to" another element, there are no intervening elements present. Further, the X-axis, the Y-axis, and the Z-axis are not limited to three axes of a rectangular coordinate system, and may be interpreted in a broader sense. For example, the X-axis, the Y-axis, and the Z-axis may be perpendicular to one another, or may represent different directions that are not perpendicular to one another. For the purposes of this disclosure, "at least one of X, Y, and Z" and "at least one selected from the group consisting of X, Y, and Z" may be construed as X only, Y only, Z only, or any combination of two or more of X, Y, and Z, such as, for instance, XYZ, XYY, YZ, and ZZ. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0015] Although the terms "first," "second," etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are used to distinguish one element from another element. Thus, a first element discussed below could be termed a second element without departing from the teachings of the disclosure.

[0016] Spatially relative terms, such as "beneath," "below," "under," "lower," "above," "upper," "over," and the like, may be used herein for descriptive purposes, and, thereby, to describe one element's relationship to another element(s) as illustrated in the drawings. Spatially relative terms are intended to encompass different orientations of an apparatus in use, operation, and/or manufacture in addition to the orientation depicted in the drawings. For example, if the apparatus in the drawings is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the exemplary term "below" can encompass both an orientation of above and below. Furthermore, the apparatus may be otherwise oriented (e.g., rotated 90 degrees or at other orientations), and, as such, the spatially relative descriptors used here-

in interpreted accordingly.

[0017] The terminology used herein is for the purpose of describing particular embodiments and is not intended to be limiting. As used herein, the singular forms, "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. Moreover, the terms "comprises," "comprising," "includes," and/or "including," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, components, and/or groups thereof, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. It is also noted that, as used herein, the terms "substantially," "about," and other similar terms, are used as terms of approximation and not as terms of degree, and, as such, are utilized to account for inherent deviations in measured, calculated, and/or provided values that would be recognized by one of ordinary skill in the art.

[0018] Various exemplary embodiments are described herein with reference to sectional and/or exploded illustrations that are schematic illustrations of idealized exemplary embodiments and/or intermediate structures. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, exemplary embodiments disclosed herein should not be construed as limited to the particular illustrated shapes of regions, but are to include deviations in shapes that result from, for instance, manufacturing. In this manner, regions illustrated in the drawings are schematic in nature and shapes of these regions may not illustrate the actual shapes of regions of a device, and, as such, are not intended to be limiting.

[0019] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure is a part. Terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense, unless expressly so defined herein.

[0020] FIG. 1 is a schematic plan view of a display apparatus according to some exemplary embodiments. FIG. 2 is a schematic view of a portion of a back surface of the display apparatus of FIG. 1 according to some exemplary embodiments. FIG. 3 is a partial cross-sectional view of the display apparatus of FIG. 1 taken along a first direction according to some exemplary embodiments. FIG. 4 is a partial cross-sectional view of the display apparatus of FIG. 1 taken along a second direction according to some exemplary embodiments.

[0021] Referring to FIGS. 1-4, the display apparatus 1 includes a first flexible substrate 110 having a first surface 110S1 and a second surface 110S2 opposite to the first surface 110S1, the second surface 110S2 including a concave portion 110CC, a driving circuit unit (or driving

circuit) DC disposed on the first surface 110S1 of the first flexible substrate 110 and including at least one transistor (e.g., transistor T1), a conductive pattern 160 disposed in the concave portion 110CC included in the second surface 110S2 and partially exposed, a conductive line CL electrically connecting the conductive pattern 160 to the driving circuit unit DC, a light-emitting device OLED driven by the driving circuit unit DC, and a support substrate 180 disposed on the second surface 110S2 of the first flexible substrate 110 so as not to overlap with the conductive pattern 160. When "on the first surface 110S1 of the first flexible substrate 110" is set to be "above the first flexible substrate 110," "on the second surface 110S2 of the first flexible substrate 110" may be interpreted as "beneath the first flexible substrate 110."

[0022] The display apparatus 1 includes a display region DA where an image is displayed, and a peripheral region PA surrounding at least a portion of the display region DA. In the display region DA, a plurality of light-emitting devices OLED may be arranged. In the peripheral region PA, a pad for connecting, to a driving unit outside of a panel, conductive lines CL for transmitting an electrical signal to the driving circuit unit DC, which drives the light-emitting device OLED, namely, the conductive pattern 160, may be arranged.

[0023] According to some exemplary embodiments, the conductive pattern 160 may be arranged on a back surface of a display panel DP such that at least a portion of the conductive pattern 160 is exposed to the outside. The conductive pattern 160 may include a plurality of conductive patterns 160 respectively connected to a plurality of conductive lines CL for driving a plurality of pixels arranged on the display region DA. The plurality of conductive patterns 160 may include at least one of a conductive pattern connected to a scan line that transmits a scan signal, a conductive pattern connected to a data line that transmits a data signal, and a conductive pattern connected to a voltage line for applying a driving voltage. The back surface of the display panel DP denotes a surface opposite to a surface on which an image is displayed.

[0024] Referring to FIG. 3, the first flexible substrate 110 is arranged on the conductive pattern 160. Because the conductive pattern 160 is exposed at the back surface of the display panel DP, the first flexible substrate 110 may cover the conductive pattern 160 such that a lower surface 160LS of the conductive pattern 160 is exposed. In other words, the first flexible substrate 110 may cover an upper surface 160US and lateral surfaces of the conductive pattern 160, but not cover the lower surface 160LS of the conductive pattern 160. According to some exemplary embodiments, the first flexible substrate 110 may include the concave portion 110CC on the second surface 110S2 opposite to the first surface 110S1, and at least a portion of the conductive pattern 160 may be arranged in the concave portion 110CC. Accordingly, at least a portion of the conductive pattern 160 may be buried in the first flexible substrate 110.

[0025] The first flexible substrate 110 may include any suitable material. For example, the first flexible substrate 110 may include a polymer resin, such as polyethersulphone (PES), polyacrylate (PAR), polyetherimide (PEI), polyethylene naphthalate (PEN), polyethylene terephthalate (PET), polyphenylene sulfide (PPS), polyallylate, polyimide (PI), polycarbonate (PC), cellulose acetate propionate (CAP), and the like. According to some exemplary embodiments, the first flexible substrate 110 may include PI having good bending characteristics, and may have a thickness of several micrometers (μm) to several tens of micrometers (μm).

[0026] The driving circuit unit DC including the at least one transistor T1 may be disposed on the first surface 110S1 of the first flexible substrate 110, and the transistor T1 may include an active layer 142 including, for example, amorphous silicon, polycrystalline silicon, an organic semiconductor material, and/or the like, and a gate electrode 144 insulated from the active layer 142. According to some exemplary embodiments, the transistor T1 may further include a source electrode 146S and a drain electrode 146D. The source electrode 146S and the drain electrode 146D may be electrically connected to the active layer 142 via contact holes C1 and C2, respectively.

[0027] To secure insulation between the active layer 142 and the gate electrode 144, a gate insulation layer 133 may be between the active layer 142 and the gate electrode 144. The gate insulation layer 133 may include an inorganic material, such as silicon oxide, silicon nitride, and/or silicon oxynitride. An interlayer insulation layer 135 may be on the gate electrode 144 and may include an inorganic material, such as silicon oxide, silicon nitride, and/or silicon oxynitride, and the source electrode 146S and the drain electrode 146D may be on the interlayer insulation layer 135.

[0028] The driving circuit unit DC may further include a transistor T2 performing a switching function, a plurality of transistors, and at least one capacitor performing various other functions, in addition to the transistor T1. The driving circuit unit DC may be electrically connected to the light-emitting device OLED to drive the light-emitting device OLED.

[0029] A buffer layer 131 may be between the transistor T1 and the first flexible substrate 110 and may include an inorganic material, such as, silicon oxide, silicon nitride, and/or silicon oxynitride. The buffer layer 131 may increase smoothness of an upper surface of the first flexible substrate 110 and/or prevent, minimize, or reduce infiltration of impurities from the first flexible substrate 110 and the like into the active layer 142 of the transistor T1.

[0030] A planarization layer 137 may be disposed on the transistor T1. For example, when an organic light-emitting device is disposed over the transistor T1 as illustrated in FIG. 3, the planarization layer 137 may planarize an upper surface of the driving circuit unit DC including the transistor T1. The planarization layer 137 may be formed of an organic material, such as, acryl, PI,

benzocyclobutene (BCB), or hexamethyldisiloxane (HMDSO). Although the buffer layer 131, the gate insulation layer 133, the interlayer insulation layer 135, and the planarization layer 137 are single layers in FIG. 3, they may be multi-layers.

[0031] The conductive line CL may be disposed on the first surface 110S1 of the first flexible substrate 110. The conductive line CL is electrically connected to the driving circuit unit DC and the conductive pattern 160 to electrically connect the driving circuit unit DC to the conductive pattern 160. The driving circuit unit DC may include a plurality of transistors, a capacitor, and a connection line that connects them, and thus, the conductive line CL may be a line that applies a scan signal, a data signal, or a voltage to the driving circuit unit DC. As shown in FIG. 4, the conductive line CL may include a plurality of conductive lines CL separated (or spaced apart) from each other, and the conductive pattern 160 may include a plurality of conductive patterns 160 respectively connected to the plurality of conductive lines CL and separated from each other.

[0032] The plurality of conductive lines CL may be one of a scan line, a data line, and a driving voltage line, or may be a combination of the scan line, the data line, and the driving voltage line. The plurality of conductive lines CL may be arranged on the same layer or on different layers. The plurality of conductive lines CL are insulated from each other. Although not shown in FIG. 4, the plurality of conductive lines CL may be aligned with and connected to terminals included in a connector 171 using a conductive adhesive 177. FIG. 4 does not illustrate the conductive adhesive 177, the connector 171, a flexible printed circuit board (PCB) 173, and a protection layer 179, and thereby, only illustrates some of the components arranged in the peripheral region PA.

[0033] According to some exemplary embodiments, the conductive line CL may be disposed on the same layer on which the source electrode 146S and the drain electrode 146D of the transistor T1 are disposed, and may include the same material as that used to form the source electrode 146S and the drain electrode 146D. For example, the conductive line CL may be a data line that transmits a data signal, and may include a first layer including titanium (Ti), a second layer including aluminum (Al), and a third layer including Ti. However, embodiments are not limited thereto or thereby, and the conductive line CL may be formed of at least one of aluminum (Al), platinum (Pt), palladium (Pd), silver (Ag), magnesium (Mg), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), chromium (Cr), calcium (Ca), molybdenum (Mo), titanium (Ti), tungsten (W), and copper (Cu) in a single-layered or multi-layered structure. However, embodiments are not limited thereto or thereby, and the conductive line CL may be arranged on the same layer on which the gate electrode 144 is arranged, and may include the same material as that used to form the gate electrode 144. For example, the gate electrode 144 and the conductive line CL may be formed of Mo.

[0034] Although not shown in FIGS. 1-4, the conductive line CL may extend from the display region DA to the peripheral region PA, and at least a portion of the conductive line CL may overlap the conductive pattern 160 in a plan view, e.g., when viewed in a direction normal to the first surface 110S1 of the first flexible substrate 110.

[0035] An insulation structure IS and at least a portion of the first flexible substrate 110 may be arranged between the conductive line CL and the conductive pattern 160, and the conductive line CL and the conductive pattern 160 may be electrically connected to each other via a contact hole CH formed in the insulation structure IS and the first flexible substrate 110. Although the insulation structure IS is shown including the buffer layer 131, the gate insulation layer 133, and the interlayer insulation layer 135 in FIG. 3, embodiments are not limited thereto or thereby. The insulation structure IS may refer to a layer including at least one of a buffer layer, a gate insulation layer, an interlayer insulation layer, and an additional insulation layer. In other words, insulation structures shown in drawings other than FIG. 3 are not limited to a structure including the buffer layer 131, the gate insulation layer 133, and the interlayer insulation layer 135.

[0036] The light-emitting device OLED may be disposed in the display region DA over the interlayer insulation layer 135. Although the light-emitting device OLED is an organic light-emitting device in FIG. 3, embodiments are not limited thereto or thereby, and the location of the light-emitting device OLED is also not limited to over the interlayer insulating layer 135.

[0037] The light-emitting device OLED includes a pixel electrode 151, an opposite electrode 155, and an intermediate layer 153 including an emission layer. The pixel electrode 151 contacts one of the source electrode 146S and the drain electrode 146D via a hole formed in the planarization layer 137, and is electrically connected to the transistor T1.

[0038] A pixel definition layer 139 may be disposed on the planarization layer 137. The pixel definition layer 139 defines a pixel by including a hole through which at least a center portion of the pixel electrode 151 is exposed. The pixel definition layer 139 prevents an arc from occurring on the edge of the pixel electrode 151 by increasing a distance between the edge of the pixel electrode 151 and the opposite electrode 155 disposed over the pixel electrode 151. The pixel definition layer 139 may be formed of an organic material, for example, PI or HMD-SO.

[0039] The pixel electrode 151 may be a reflection electrode including a reflection layer. For example, the reflection layer may include at least one of silver (Ag), magnesium (Mg), aluminum (Al), platinum (Pt), palladium (Pd), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), and chromium (Cr). A transparent or semitransparent electrode layer may be further formed on the reflection layer and may be formed of at least one of indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), indium oxide (In₂O₃), indium gallium oxide (IGO), and

aluminum zinc oxide (AZO). According to some exemplary embodiments, the pixel electrode 151 may include a triple layer of ITO/Ag/ITO.

[0040] The intermediate layer 153 of the light-emitting device OLED includes an organic emission layer, and may further include at least one of a hole injection layer (HIL), a hole transport layer (HTL), an electron transport layer (ETL), and an electron injection layer (EIL). However, embodiments are not limited thereto or thereby, and the intermediate layer 153 may further include various other functional layers. In other words, the intermediate layer 153 is not limited to the aforementioned structure, and may have any of various other structures. The intermediate layer 153 may include a single layer that covers a plurality of pixel electrodes 151 or may include patterned layers respectively corresponding to the plurality of pixel electrodes 151.

[0041] To emit white light, the organic emission layer may have a multi-layered structure in which a red light-emission layer, a green light-emission layer, and a blue light-emission layer are stacked, or have a single-layered structure including a red light-emission material, a green light-emission material, and a blue light-emission material. An organic light-emitting device having such an organic emission layer may further include a red color filter, a green color filter, and a blue color filter to thereby emit a full color.

[0042] The opposite electrode 155 may be a transparent (or semi-transparent) electrode. For example, the opposite electrode 155 may include at least one of Ag, Al, Mg, Li, Ca, Cu, LiF/Ca, LiF/Al, MgAg, and CaAg, and may be formed of a thin film having a thickness of several nanometers (nm) to several tens of nanometers (nm). According to some exemplary embodiments, the light-emitting device OLED may be of a top-emission type that emits light toward a front surface of the display panel DP, namely, in a third direction z.

[0043] An encapsulation layer (not shown) may be arranged on the light-emitting device OLED to cover the light-emitting device OLED. The encapsulation layer may protect the light-emitting device OLED from external moisture, oxygen, and/or other contaminants.

[0044] The support substrate 180 may be disposed on the second surface 110S2 of the first flexible substrate 110. Here, "on the second surface 110S2" denotes the side opposite to a side on which the light-emitting device OLED of the first flexible substrate 110 is disposed. The support substrate 180 may have higher stiffness than the first flexible substrate 110 and may include a polymer resin, such as PES, PAR, PEI, PEN, PET, PPS, polyallylate, PI, PC, or CAP. According to some exemplary embodiments, the support substrate 180 may include PEN or PET and may have a greater thickness than the first flexible substrate 110 including PI.

[0045] An adhesion layer 181 may be disposed between the support substrate 180 and the first flexible substrate 110. As will be described later, the support substrate 180 is a component that is formed on the second

surface 110S2 of the first flexible substrate 110 after the driving circuit unit DC and the light-emitting device OLED are formed on the first flexible substrate 110. For example, the support substrate 180 may be attached to the second surface 110S2 of the first flexible substrate 110 using the adhesion layer 181.

[0046] The support substrate 180 is not disposed in a region where the conductive pattern 160 is disposed. In other words, the support substrate 180 may be disposed such that the conductive pattern 160 is exposed. In other words, the support substrate 180 and the conductive pattern 160 may be arranged so as not to overlap with each other in a plan view.

[0047] The conductive pattern 160 of which the lower surface 160LS is exposed at the back surface of the display panel DP, namely, at the first flexible substrate 110, is electrically connected to the flexible PCB 173 for electrically connecting a main circuit unit (or main circuit) 174 to the conductive pattern 160. According to some exemplary embodiments, the conductive pattern 160 and the flexible PCB 173 may be electrically connected to each other by the connector 171, and the conductive adhesive 177 may be disposed between the connector 171 and the conductive pattern 160. An electronic chip 175 may be disposed on the flexible PCB 173.

[0048] However, the structure shown in FIG. 3 for connecting the conductive pattern 160 to the main circuit unit 174 is merely an example, and embodiments are not limited thereto or thereby. For instance, according to another exemplary embodiment, the electronic chip 175 may be disposed on the conductive pattern 160, and the electronic chip 175 and the main circuit unit 174 may be electrically connected to each other by the flexible PCB 173. A connector or the like rather than the conductive adhesive 177 may be used as connecting means.

[0049] According to some exemplary embodiments, the protection layer 179 for protecting exposed metal or the like may be disposed on the conductive pattern 160 and at least a portion of the flexible PCB 173. The protection layer 179 may be an inorganic insulation layer including silicon and the like. As shown in FIG. 2, the protection layer 179 may be disposed to cover at least a portion of the edge of the flexible PCB 173.

[0050] Referring to FIG. 3, the protection layer 179 and the electronic chip 175 are disposed at the outside of the flexible PCB 173, e.g., below the flexible PCB 173. In this case, a lower surface 175S of the electronic chip 175 may be disposed such that a distance from the lower surface 175S to the second surface 110S2 of the first flexible substrate 110 is less than from a lower surface 179S of the protection layer 179 to the second surface 110S2. By doing this, the protection layer 179 functions as a bumper to protect the electronic chip 175 from external impact. A distance by which the lower surface 175S of the electronic chip 175 may be closer to the second surface 110S2 of the first flexible substrate 110 than the lower surface 179S of the protection layer 179 may be a determined height Δh . In other words, a distance h_1 be-

tween the lower surface 179S of the protection layer 179 and the second surface 110S2 of the first flexible substrate 110 may be greater than a distance h_2 between the lower surface 175S of the electronic chip 175 and the second surface 110S2 of the first flexible substrate 110. The second surface 110S2 of the first flexible substrate 110, which is a base location, denotes a portion of the second surface 110S2 other than a portion on which the concave portion 110CC is disposed.

[0051] Referring to FIG. 3, a portion of the first flexible substrate 110 other than the portion including the concave portion 110CC may have a first thickness t_1 , the conductive pattern 160 may have a second thickness t_2 , and the second thickness t_2 may have a value of about 700 nm or less, but greater than 0 nm. The portion of the first flexible substrate 110 that is over the conductive pattern 160 has a third thickness t_3 . Although the third thickness t_3 is substantially the same as a difference between the first thickness t_1 and the second thickness t_2 in FIG. 3, embodiments are not limited thereto or thereby. In other words, the third thickness t_3 may vary according to the degree to which the conductive pattern 160 is buried in the first flexible substrate 110 and a bending shape of the upper surface of the first flexible substrate 110.

[0052] According to some exemplary embodiments, the first flexible substrate 110 may include a photosensitive organic material. In this case, regardless of the value of the third thickness t_3 , a hole corresponding to the contact hole CH for connecting the conductive line CL to the conductive pattern 160 may be easily formed in the first flexible substrate 110 using photolithography or the like. Via the hole corresponding to the contact hole CH, the conductive pattern 160 may be partially exposed. However, according to another embodiment, the first flexible substrate 110 may include an organic material other than the photosensitive organic material. In this case, the third thickness t_3 may have a relatively smaller value than the first thickness t_1 , for example, a value of several nm to several hundreds of nm.

[0053] By setting the third thickness t_3 to be relatively small, a portion of the first flexible substrate 110 corresponding to the contact hole CH is completely removed using, for instance, plasma processing and ashing, and, thus, the hole corresponding to the contact hole CH may be formed in the first flexible substrate 110. The viscosity of an organic material, for example, PI, used to form the first flexible substrate 110 may be 20000 centipoise (cP) or less, but greater than 0 cP so that the third thickness t_3 has a small value. In other words, the first flexible substrate 110 covering the conductive pattern 160 may be formed using an organic material having a low viscosity so that the third thickness t_3 of the portion of the first flexible substrate 110 over the conductive pattern 160 has a relatively small value. According to some exemplary embodiments, the third thickness t_3 of the portion of the first flexible substrate 110 over the conductive pattern 160 may be about a quarter of the second thickness t_2 of the conductive pattern 160, and may have a value

of about 150 nm or less, but greater than 0 nm. In this manner, the portion of the first flexible substrate 110 over the conductive pattern 160 may be easily removed using plasma processing and ashing; however, exemplary embodiments are not limited thereto or thereby. In another embodiment, the third thickness t_3 may be 0, which is described later.

[0054] According to some exemplary embodiments, the display apparatus 1 includes the conductive pattern 160 exposed at the back surface of the display panel DP and connects the flexible PCB 173 to the conductive pattern 160. Thus, the area of the peripheral region PA of the display apparatus 1 may be minimized or at least reduced.

[0055] FIGS. 5A, 5B, 5C, 5D, 5E, 5F, 5G, 5H, 5I, 5J, and 5K are cross-sectional views of the display apparatus of FIG. 1 at various stages of manufacture according to some exemplary embodiments. Accordingly, a process of manufacturing display apparatus 1 will be described in association with FIGS. 3 and 5A-5K.

[0056] Referring to FIG. 5A, a second flexible substrate 120 is formed on a carrier substrate 100 including glass and the like, and then the conductive pattern 160 is formed on the second flexible substrate 120. The second flexible substrate 120 may include the same material as that used to form the first flexible substrate 110. For example, the second flexible substrate 120 may include PI and may have a thickness t_{120} of about 0.1 μm or less. By forming the second flexible substrate 120 to have the thickness t_{120} of about 0.1 μm or less, when the carrier substrate 100 is removed, the second flexible substrate 120 may also be removed. This will be described later.

[0057] Referring to FIGS. 3 and 5B, the first flexible substrate 110 is formed on the second flexible substrate 120 to cover the conductive pattern 160. The first flexible substrate 110 may include PI. The first flexible substrate 110 may have the first thickness t_1 , which may be several μm to several tens of μm . In other words, the first thickness t_1 of the first flexible substrate 110 may be greater than the thickness t_{120} of the second flexible substrate 120. The concave portion 110CC may be formed in the second surface 110S2 of the first flexible substrate 110 by the conductive pattern 160. In other words, at least a portion of the conductive pattern 160 may be buried in the concave portion 110CC of the first flexible substrate 110. In this case, the conductive pattern 160 may have the second thickness t_2 , and a portion of the first flexible substrate 110 corresponding to the concave portion 110CC may have the third thickness t_3 .

[0058] Referring to FIG. 5C, the buffer layer 131, and the active layer 142 of the transistor T1 may be formed on the first flexible substrate 110. The buffer layer 131 may include an inorganic material, such as silicon oxide, silicon nitride, and/or silicon oxynitride, and may be a single layer or a multi-layer structure. The active layer 142 may include amorphous silicon, polycrystalline silicon, or oxide.

[0059] Referring to FIG. 5D, the gate insulation layer

133 may be formed on the buffer layer 131 to cover the active layer 142, and the gate electrode 144 may be formed on the gate insulation layer 133. After the gate electrode 144 is formed, the interlayer insulation layer 135 may be formed on the gate insulation layer 133 to cover the gate electrode 144. The gate insulation layer 133 and the interlayer insulation layer 135 may include an inorganic material, such as silicon oxide, silicon nitride, and/or silicon oxynitride, and may be a single layer or a multi-layer structure. The gate electrode 144 may be a single layer formed of Mo, but embodiments are not limited thereto or thereby.

[0060] Referring to FIG. 5E, contact holes C1 and C2 for connecting the source electrode 146S and the drain electrode 146D to the active layer 142, respectively, may be formed in the gate insulation layer 133 and the interlayer insulation layer 135. Simultaneously, holes for forming the contact hole CH may be respectively formed in portions of the buffer layer 131, the gate insulation layer 133, and the interlayer insulation layer 135 that are over the conductive pattern 160; however, exemplary embodiments are not limited thereto or thereby. For instance, the holes for forming the contact hole CH may be formed in one or more separate processes. It is noted, however, that because each of the buffer layer 131, the gate insulation layer 133, and the interlayer insulation layer 135 may include an inorganic material, the contact holes C1 and C2 and the holes may be simultaneously formed therein using a single photolithographic process.

[0061] Referring to FIG. 5F, a hole through which a portion of the upper surface of the conductive pattern 160 is exposed may be formed in the first flexible substrate 110. When the first flexible substrate 110 is a photosensitive organic material, the hole may be formed in the first flexible substrate 110 using photolithography. Accordingly, the holes respectively formed in the buffer layer 131, the gate insulation layer 133, the interlayer insulation layer 135, and the first flexible substrate 110 that overlap with each other in a plan view are combined to form the contact hole CH for connecting the conductive line CL to the conductive pattern 160.

[0062] When the first flexible substrate 110 is an organic material other than a photosensitive organic material, the third thickness t_3 of the area of the first flexible substrate 110 corresponding to the concave portion 110CC may have a relatively small value, for example, a value of about 150 nm or less. By setting the third thickness t_3 to be relatively small, a portion of the first flexible substrate 110 exposed via the holes respectively formed in the buffer layer 131, the gate insulation layer 133, the interlayer insulation layer 135 may be easily removed using plasma processing and ashing.

[0063] Referring to FIG. 5G, the source electrode 146S and the drain electrode 146D of the transistor T1, and the conductive line CL may be formed on the interlayer insulation layer 135. The conductive line CL may be a data line that transmits a data signal, and may include a first layer including Ti, a second layer including Al, and

a third layer including Ti. However, embodiments are not limited thereto or thereby, and the conductive line CL may be formed of any of various materials in a single-layered or multi-layered structure. The conductive line CL may be formed using the same process as the process for forming the gate electrode 144, and not using the same process as the process for forming the source electrode 146S and the drain electrode 146D, and the conductive line CL may be a line that transmits various signals, such as a scan line, a driving voltage line, etc., and, thereby, not the data line.

[0064] Referring to FIG. 5H, the planarization layer 137 may be formed on the interlayer insulation layer 135 to cover the driving circuit unit DC including, for instance, the transistors T1 and T2. The pixel electrode 151 and then the pixel definition layer 139 including a hole for exposing a central portion of the pixel electrode 151 may be formed on the planarization layer 137 in the display region DA. The intermediate layer 153 including the emission layer and then the opposite electrode 155 may be formed on the pixel electrode 151 exposed through the hole in the pixel definition layer 139. In this manner, the light-emitting device OLED may be formed in the display region DA.

[0065] Referring to FIGS. 5I and 5J, a laser may be radiated toward the carrier substrate 100 from below the carrier substrate 100, to thereby remove the carrier substrate 100 and the second flexible substrate 120 from the first flexible substrate 110. As noted in association with FIG. 5A, the second flexible substrate 120 may have the thickness t_{120} of about 0.1 μm or less, and the second flexible substrate 120 may be removed when the carrier substrate 100 is being removed. In other words, the characteristics of the second flexible substrate 120 can be changed by the laser radiation, and, as such, adhesiveness between the second flexible substrate 120 and the first flexible substrate 110 may be broken down. As such, the second flexible substrate 120 may serve as a sacrificial layer that is removed simultaneously with the carrier substrate 100; however, exemplary embodiments are not limited thereto or thereby. That is, the second substrate 120 may be removed separately from the carrier substrate 100. Nevertheless, by removing the carrier substrate 100 and the second flexible substrate 120, the conductive pattern 160 may be exposed through the back surface of the display panel DP, as seen in FIG. 5J.

[0066] Referring to FIG. 5K, the support substrate 180 may be formed on the second surface 110S2 of the first flexible substrate 110 using the adhesion layer 181. The support substrate 180 is not formed on a portion of the first flexible substrate 110 where the conductive pattern 160 is disposed. Accordingly, the conductive pattern 160 may not be covered by the support substrate 180, and may be exposed at the back surface of the display panel DP.

[0067] Referring back to FIG. 3, the connector 171 and the flexible PCB 173 may be connected to the exposed conductive pattern 160 using the conductive adhesive

177. The protection layer 179 may be formed to protect the connector 171, the conductive adhesive 177, and at least a portion of the flexible PCB 173. Further, an electronic chip 175 may be formed on the flexible PCB 173 and a main circuit 174 may be formed on the support substrate 180. The main circuit 174 may be connected to the electronic chip 175 via the flexible PCB 173.

[0068] Hereinafter, various figures will be described that illustrate only some of the structures of peripheral regions PA of display apparatuses according to some embodiments. The other structures, such as the display region DA (see, e.g., FIG. 3) and external circuit terminals bonded to the display panel DP (see, e.g., FIG. 3), may be the same as those described in association with FIG. 3 or may be structures modified from those described in association with FIG. 3 based on a known technology.

[0069] FIGS. 6 and 7 are schematic cross-sectional views of peripheral regions of display apparatuses according to various exemplary embodiments.

[0070] Referring to FIG. 6, the display apparatus 2 includes the first flexible substrate 110 including the concave portion 110CC located on the second surface 110S2, and the conductive pattern 160 is disposed in the concave portion 110CC. In other words, at least a portion of the conductive pattern 160 may be buried in the first flexible substrate 110. An adhesion layer 161 may be disposed between the conductive pattern 160 and the first flexible substrate 110. The adhesion layer 161 may prevent the conductive pattern 160 from being easily separated from the first flexible substrate 110. In this manner, the adhesion layer 161 may cover lateral surfaces and an upper surface of the conductive pattern 160 to prevent the conductive pattern 160 from being easily separated from the first flexible substrate 110. In other words, bondability between the conductive pattern 160 and the adhesion layer 161 and bondability between the adhesion layer 161 and the first flexible substrate 110 may be greater than bondability between the conductive pattern 160 and the first flexible substrate 110. The adhesion layer 161 may include a material that satisfies this condition.

[0071] According to some exemplary embodiments, the adhesion layer 161 may include an inorganic material capable of being strongly bonded with metal and the first flexible substrate 110 including an organic material. For example, the inorganic material may be SiNx, A-Si:H, and/or the like. According to some exemplary embodiments, the adhesion layer 161 may include an organic material, such as, hexamethyldisilazane (HMDS), HMD-SO, etc.

[0072] Referring to FIG. 7, an adhesion layer 161' may be disposed to cover not only the upper surface and lateral surfaces of the conductive pattern 160, but also cover the entire area (or some portion thereof) of the second surface 110S2 of the first flexible substrate 110. In this case, the adhesion layer 161' may also be disposed between the support substrate 180 and the first flexible substrate 110.

[0073] Referring to FIGS. 6 and 7, the first flexible sub-

strate 110 is disposed on an adhesion layer 161 or 161', the insulation structure IS is disposed on the first surface 110S1 of the first flexible substrate 110, and the conductive line CL is disposed on the insulation structure IS. The conductive line CL may be connected to the conductive pattern 160 via a contact hole CH formed in the insulation structure IS, the first flexible substrate 110, and the adhesion layer 161 or 161'. The methods of manufacturing the display apparatuses 2 and 3 are substantially the same as or similar to the method described in association with FIGS. 5A-5K, and may further include the operations of forming the adhesion layer 161 or 161' before the operation described in association with FIG. 5B. In other words, the adhesion layer 161 or 161' may be formed on the second flexible substrate 120 (see, e.g., FIG. 5A) to cover the conductive pattern 160, and then the first flexible substrate 110 may be formed.

[0074] In the process described in association with FIG. 5J, the carrier substrate 100 and the second flexible substrate 120 are removed, and the adhesion layer 161 or 161' may prevent the conductive pattern 160 together with the second flexible substrate 120 from being separated from the first flexible substrate 110 due to weak bondability between the conductive pattern 160 and the first flexible substrate 110. After the carrier substrate 100 and the second flexible substrate 120 are removed, the support substrate 180 may be formed on the second surface 110S2 of the first flexible substrate 110, and the adhesion layer 181 may be disposed between the first flexible substrate 110 and the support substrate 180. The adhesion layer 181 may be omitted according to a method of forming the support substrate 180 on the first flexible substrate 110.

[0075] FIG. 8 is a schematic cross-sectional view of a peripheral region of a display apparatus according to some exemplary embodiments. FIGS. 9A, 9B, and 9C are cross-sectional views of the display apparatus of FIG. 8 at various stages of manufacture according to some exemplary embodiments.

[0076] Referring to FIG. 8, the display apparatus 4 includes the first flexible substrate 110 including the concave portion 110CC located on the second surface 110S2, and the conductive pattern 160 is disposed in the concave portion 110CC. The second flexible substrate 120 is disposed on the second surface 110S2 of the first flexible substrate 110. The second flexible substrate 120 may include the same material as that used to form the first flexible substrate 110. For example, the first flexible substrate 110 and the second flexible substrate 120 may include PI. The thickness t_{120} of the second flexible substrate 120 may be less than the first thickness t_1 of the first flexible substrate 110, and the second flexible substrate 120 may not be arranged on a portion of the first flexible substrate 110 where the conductive pattern 160 is disposed. In other words, the second flexible substrate 120 may be disposed on the second surface 110S2 of the first flexible substrate 110 such that the conductive pattern 160 is exposed.

[0077] The support substrate 180 may be disposed on a lower surface of the second flexible substrate 120, and the adhesion layer 181 may be disposed between the second flexible substrate 120 and the support substrate 180. The support substrate 180 may include a material having greater stiffness than the first flexible substrate 110 and the second flexible substrate 120. A thickness of the support substrate 180 may be greater than the thickness t_{120} of the second flexible substrate 120. The support substrate 180 may not be disposed on an area where the conductive pattern 160 is disposed, and may be disposed such that at least a portion of the second flexible substrate 120 is exposed.

[0078] Referring to FIG. 9A, in the method of manufacturing the display apparatus 4 of FIG. 8, after the processes sequentially described in association with FIGS. 5A-5H, a laser may be radiated toward the carrier substrate 100 from below the carrier substrate 100. A second flexible substrate 120' not yet removed in FIG. 9A may have a greater thickness than the second flexible substrate 120 of FIG. 5A.

[0079] Referring to FIG. 9B, the carrier substrate 100 and a portion of the second flexible substrate 120' may be removed. At this time, only a portion 120" of the second flexible substrate 120' may be removed together with the carrier substrate 100. In other words, the second flexible substrate 120 remains on the second surface 110S2 of the first flexible substrate 110.

[0080] Referring to FIG. 9C, an area of the second flexible substrate 120 on the second surface 110S2 of the first flexible substrate 110 that is below the conductive pattern 160 may be removed such that the conductive pattern 160 is exposed. The second flexible substrate 120 may be removed using photolithography or using a mechanical method. Referring back to FIG. 8, the support substrate 180 may be formed on the lower surface of the second flexible substrate 120 using the adhesion layer 181.

[0081] FIGS. 10A and 10B are schematic cross-sectional views of a peripheral region of a display apparatus according to some exemplary embodiments. FIGS. 11A and 11B are cross-sectional views of the display apparatus of FIG. 10A at various stages of manufacture according to some exemplary embodiments.

[0082] Referring to FIG. 10A, the display apparatus 5 includes a first flexible substrate 110' having a first surface 110S1' and a second surface 110S2 opposite to the first surface 110S1', the second surface 110S2 including a hole 110H. The driving circuit unit DC of FIG. 3 may be disposed on the first surface 110S1' of the first flexible substrate 110' and may include, for instance, the at least one transistor T1 of FIG. 3. The display apparatus 5 may further include a conductive pattern 160 disposed in the hole 110H included in the second surface 110S2 and partially exposed, a conductive line CL electrically connecting the conductive pattern 160 to the driving circuit unit DC, the light-emitting device OLED of FIG. 3 driven by the driving circuit unit DC, and a support substrate

180 disposed on the second surface 110S2 of the first flexible substrate 110' so as not to overlap with the conductive pattern 160.

[0083] The other structures of the display apparatus 5 of FIG. 10A are substantially the same as those of the display apparatus 1 of FIG. 3. In other words, the display apparatus 5 of FIG. 10A is different from the display apparatus 1 of FIG. 3 only in that the first flexible substrate 110' includes the hole 110H instead of the concave portion 110CC, and the conductive pattern 160 is disposed in the hole 110H.

It is recognized that because the conductive pattern 160 includes metal and the first flexible substrate 110' includes an organic material, such as PI, bubbles may be generated between the conductive pattern 160 and the first flexible substrate 110'. In other words, due to weak bondability between the conductive pattern 160 and the first flexible substrate 110', the conductive pattern 160 may be easily separated from the first flexible substrate 110'. However, when the first flexible substrate 110' is not disposed on an upper surface of the conductive pattern 160, but the insulation structure IS including the buffer layer 131 of FIG. 3 including an inorganic material is disposed directly thereon, the conductive pattern 160 may not be separated from the display panel DP of FIG. 3 due to strong bondability between the conductive pattern 160 and the insulation structure IS.

Referring to FIG. 10B, the first flexible substrate 110' may include a plurality of holes 110H in which the plurality of conductive patterns 160 are respectively disposed, and the upper surface of the conductive patterns 160 may directly contact the insulation structure IS. In this manner, contact holes CH for connecting the conductive lines CL disposed on the insulation structure IS to the conductive patterns 160 may be easily formed. As such, the contact holes CH may be formed in the insulation structure IS using a single photolithography process, and the conductive lines CL may be formed on the insulation structure IS. Accordingly, the conductive patterns 160 and the conductive lines CL may be connected to each other.

[0084] Referring to FIG. 11A, the second flexible substrate 120 and the conductive pattern 160 may be formed on the carrier substrate 100, and then an organic material 110" used to form the first flexible substrate 110' may be deposited on the second flexible substrate 120. The organic material 110" may cover the upper surface and the lateral surfaces of the conductive pattern 160, and a portion of the organic material 110" on the conductive pattern 160 may have a thickness t that is relatively small. For example, the thickness t may be about 150 nm or less. After the organic material 110" is formed, the organic material 110" may undergo plasma processing. The organic material 110" may have viscosity of about

20000 cp or less such that the portion of the organic material 110" on the conductive pattern 160 is formed to have a small thickness t .

[0085] Referring to FIG. 11B, after plasma processing is performed on the organic material 110", ashing is performed to remove a portion of the organic material 110" deposited on the conductive pattern 160, thereby forming the first flexible substrate 110'. The first flexible substrate 110' may include the hole 110H corresponding to the portion in which the conductive pattern 160 is disposed.

[0086] FIGS. 12A, 12B, and 12C are cross-sectional views of the display apparatus of FIG. 10A at various stages of manufacture according to some exemplary embodiments.

[0087] Referring to FIGS. 12A and 12B, the second flexible substrate 120 and the conductive pattern 160 may be formed on the carrier substrate 100, and then hydrophobic processing may be performed on the conductive pattern 160. Using the hydrophobic processing, at least the upper surface 160US of the conductive pattern 160 may be configured to obtain a hydrophobic property. In other words, the upper surface 160US of the conductive pattern 160 is made to be hydrophobic.

[0088] Referring to FIG. 12C, the first flexible substrate 110' may be formed on the second flexible substrate 120. The first flexible substrate 110' may be formed of a material having low viscosity, and may not be formed on an upper surface 160US of the conductive pattern 160 that has undergone the hydrophobic processing. In other words, the first flexible substrate 110' may include the hole 110H corresponding to an area in which the conductive pattern 160 is disposed.

[0089] Referring back to FIG. 10A, the insulation structure IS may be formed on the first flexible substrate 110', the contact hole CH may be formed in the insulation structure IS. The conductive line CL may then be formed on the insulation structure IS. The carrier substrate 100 and the second flexible substrate 120 may be removed. Then, the support substrate 180 may be formed on the second surface 110S2 of the first flexible substrate 110.

[0090] FIG. 13 is a schematic cross-sectional view of a peripheral region of a display apparatus according to some exemplary embodiments.

[0091] Referring to FIG. 13, the display apparatus 6 includes the first flexible substrate 110' including the hole 110H located on the second surface 110S2, and the conductive pattern 160 is disposed in the hole 110H. The second flexible substrate 120 is disposed on the second surface 110S2 of the first flexible substrate 110'. The second flexible substrate 120 may include the same material as that used to form the first flexible substrate 110'. For example, the first flexible substrate 110 and the second flexible substrate 120 may include PI. The second flexible substrate 120 may not be disposed on the area where the conductive pattern 160 is disposed. In other words, the second flexible substrate 120 may be disposed on the second surface 110S2 of the first flexible substrate 110' such that the conductive pattern 160 is

exposed.

[0092] The support substrate 180 may be disposed on a lower surface of the second flexible substrate 120, and the adhesion layer 181 may be disposed between the second flexible substrate 120 and the support substrate 180. The support substrate 180 may include a material having greater stiffness than the first flexible substrate 110 and the second flexible substrate 120. The support substrate 180 may not be disposed on a portion where the conductive pattern 160 is disposed, and may be disposed such that at least a portion of the second flexible substrate 120 is exposed.

[0093] With reference to FIG. 3, the flexible PCB 173 and the like may be connected to the exposed conductive pattern 160 of FIG. 13, and, thus, may electrically connect the conductive pattern 160 to the main circuit unit 174 for controlling the display apparatus 6.

[0094] According to various exemplary embodiments, a display apparatus may include a conductive pattern 160 exposed at the back surface of a display panel DP to connect the flexible PCB 173 and the like to the conductive pattern 160. In this manner, the area of the peripheral region PA of the display apparatus may be minimized or at least reduced. Further, according to the various methods of manufacturing a display apparatus, the conductive pattern 160 may not be easily separated from the display panel DP, and the contact hole CH for connecting the conductive line CL to the conductive pattern 160 may be easily formed.

Claims

1. A display apparatus comprising:

a display region (DA); and
a peripheral region (PA) adjacent to the display region (DA),
wherein the display apparatus further comprises:

a first flexible substrate (110) comprising a first surface (110S1) and a second surface (110S2) opposite the first surface (110S1), the second surface (110S2) comprising, in the peripheral region (PA), a cavity extending into the first flexible substrate (110);
a driving circuit (DC) on the first surface (110S1), the driving circuit (DC) comprising at least one transistor;
a conductive pattern (160) in the cavity, the conductive pattern (160) being partially exposed by the cavity;
a conductive line (CL) electrically connecting the conductive pattern (160) to the driving circuit (DC);
a light-emitting device (OLED) in the display region (DA), the light-emitting device

(OLED) being electrically connected to the driving circuit (DC); and
a support substrate (180) on the second surface (110S2), and

wherein, in a view normal to the second surface (110S2), the support substrate (180) is spaced apart from the conductive pattern (160).

2. The display apparatus of claim 1, further comprising:

an insulation structure (IS) between the conductive pattern (160) and the conductive line (CL), wherein the insulation structure (IS) comprises a contact hole (CH), the conductive pattern (160) being electrically connected to the conductive line (CL) via the contact hole (CH).

3. The display apparatus of claim 2, wherein:

the insulation structure (IS) comprises a buffer layer (131), a gate insulation layer (133), and an interlayer insulation layer (135) sequentially on the first flexible substrate (110); and
the at least one transistor comprises:

an active layer (142) on the buffer layer (131); and
a gate electrode (144) on the gate insulation layer (133), the gate electrode (144) being insulated from the active layer (142) via the gate insulation layer (133).

4. The display apparatus of claim 3, wherein:

the conductive line (CL) is a signal line configured to apply a scan signal or a data signal to the driving circuit (DC); and
the conductive line (CL) is on a same layer as a layer on which the gate electrode (144) is formed or the conductive line (CL) is on the interlayer insulation layer (135).

5. The display apparatus of any of claims 1-4, further comprising:

an adhesion layer (161) between the conductive pattern (160) and the first flexible substrate (110).

6. The display apparatus of claim 5, wherein the adhesion layer (161) comprises an inorganic insulation material, the inorganic insulation material comprising SiNx or A-Si:H.

7. The display apparatus of any of claims 1-6, wherein:

the cavity forms a concave portion (110CC) in

- the first flexible substrate (110); and
a thickness of a portion of the first flexible substrate (110) overlapping the concave portion (110CC) is about 150 nm or less, but greater than 0 nm.
8. The display apparatus of any of claims 1-7, further comprising:
- a second flexible substrate (120) between the first flexible substrate (110) and the support substrate (180), the second flexible substrate (120) exposing the conductive pattern (160).
9. The display apparatus of claim 8, wherein materials of the first flexible substrate (110) and the second flexible substrate (120) are equivalent.
10. The display apparatus of any of claims 1-9, further comprising:
- a flexible printed circuit board , PCB, (173) electrically connected to the conductive pattern (160); and
an electronic chip (175) on the flexible PCB (173).
11. The display apparatus of claim 10, further comprising:
- a protection layer (179) covering an edge area of the flexible PCB (173),
wherein a distance between the second surface (110S2) of the first flexible substrate (110) and a lower surface of the protection layer (179) is greater than a distance between the second surface (110S2) of the first flexible substrate (110) and a lower surface of the electronic chip (175).
12. The display apparatus of any of claims 1-11, wherein:
- the conductive line (CL) comprises a plurality of conductive lines (CL) insulated from each other; and
the conductive pattern (160) comprises a plurality of conductive patterns (160) insulated from each other, the plurality of conductive patterns (160) being respectively and electrically connected to the plurality of conductive lines (CL).
13. The display apparatus of claim 12, wherein:
- the cavity comprises a plurality of cavities in the first flexible substrate (110); and
each of the plurality of conductive patterns (160) is in a respective cavity of the plurality of cavities.

14. The display apparatus of claim 2, wherein:

the cavity forms a hole through the first flexible substrate (110); and
an upper surface of the conductive pattern (160) contacts the insulation structure (IS).

15. The display apparatus of claim 14, wherein the upper surface of the conductive pattern (160) is hydrophobic.

FIG. 1

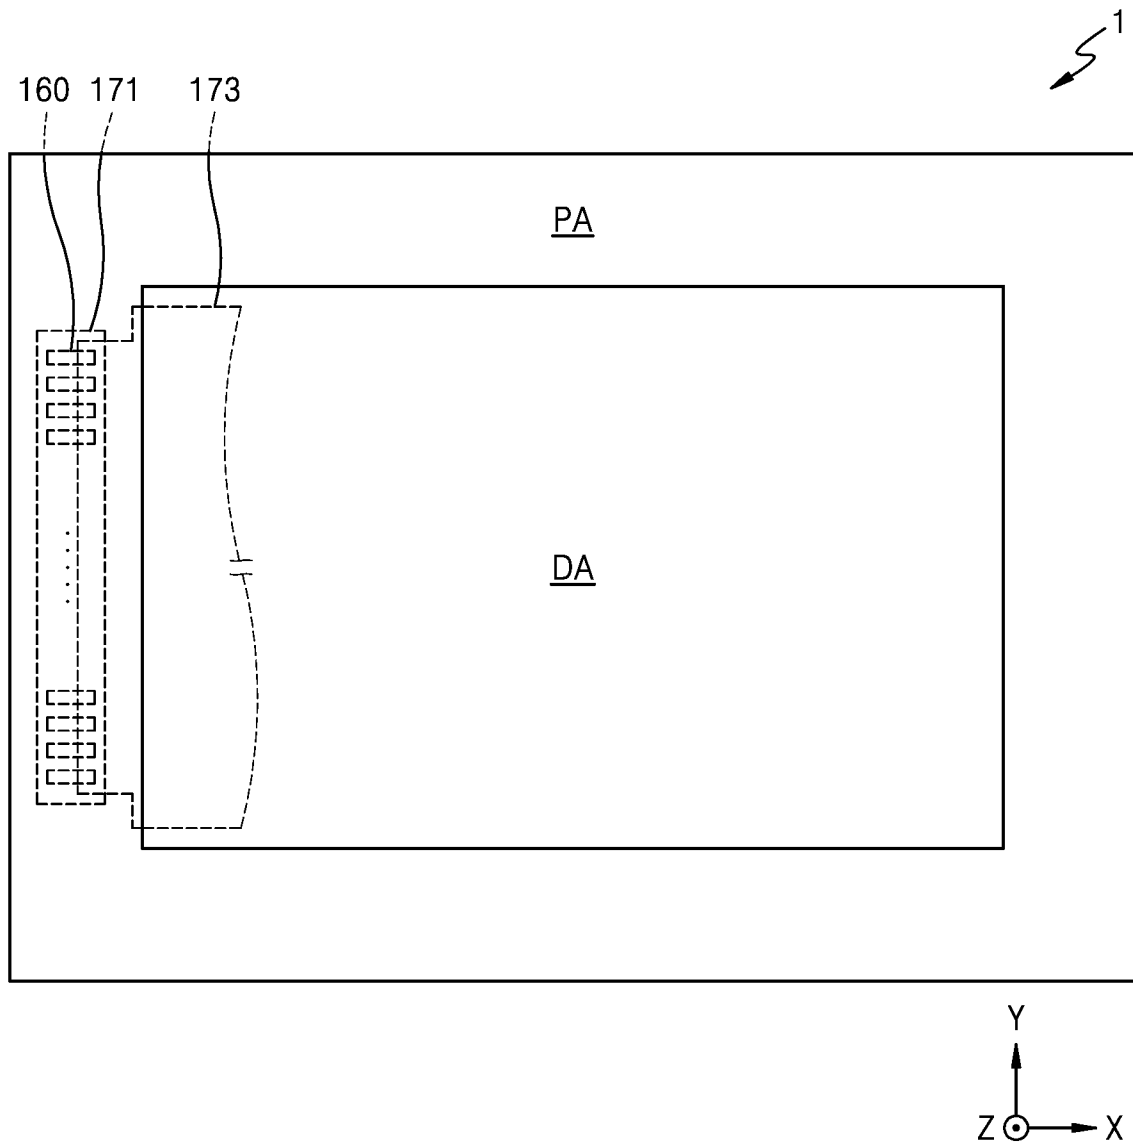


FIG. 2

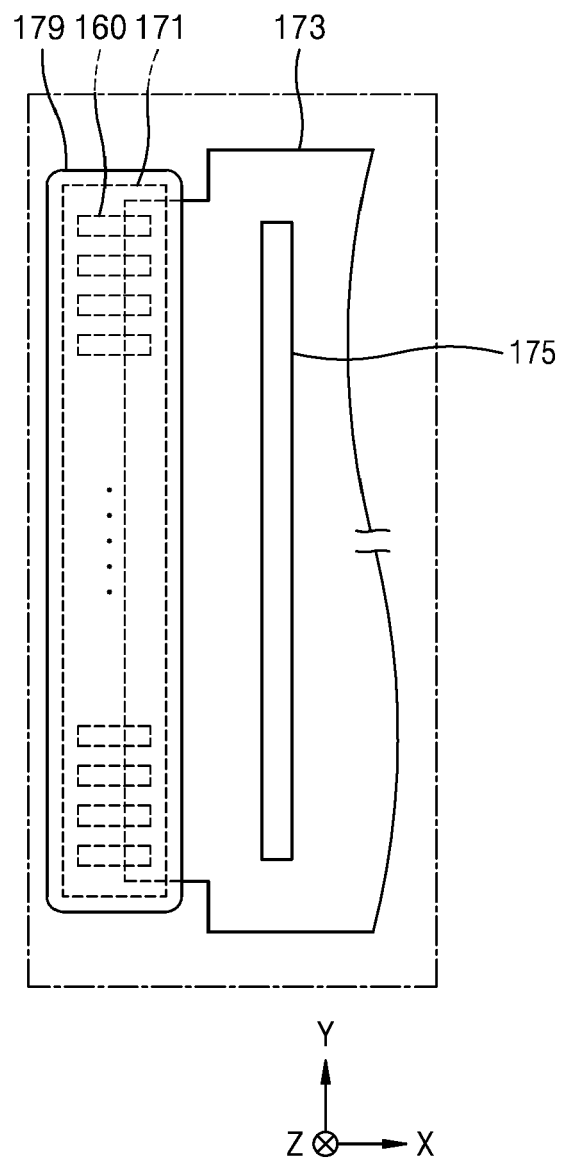


FIG. 3

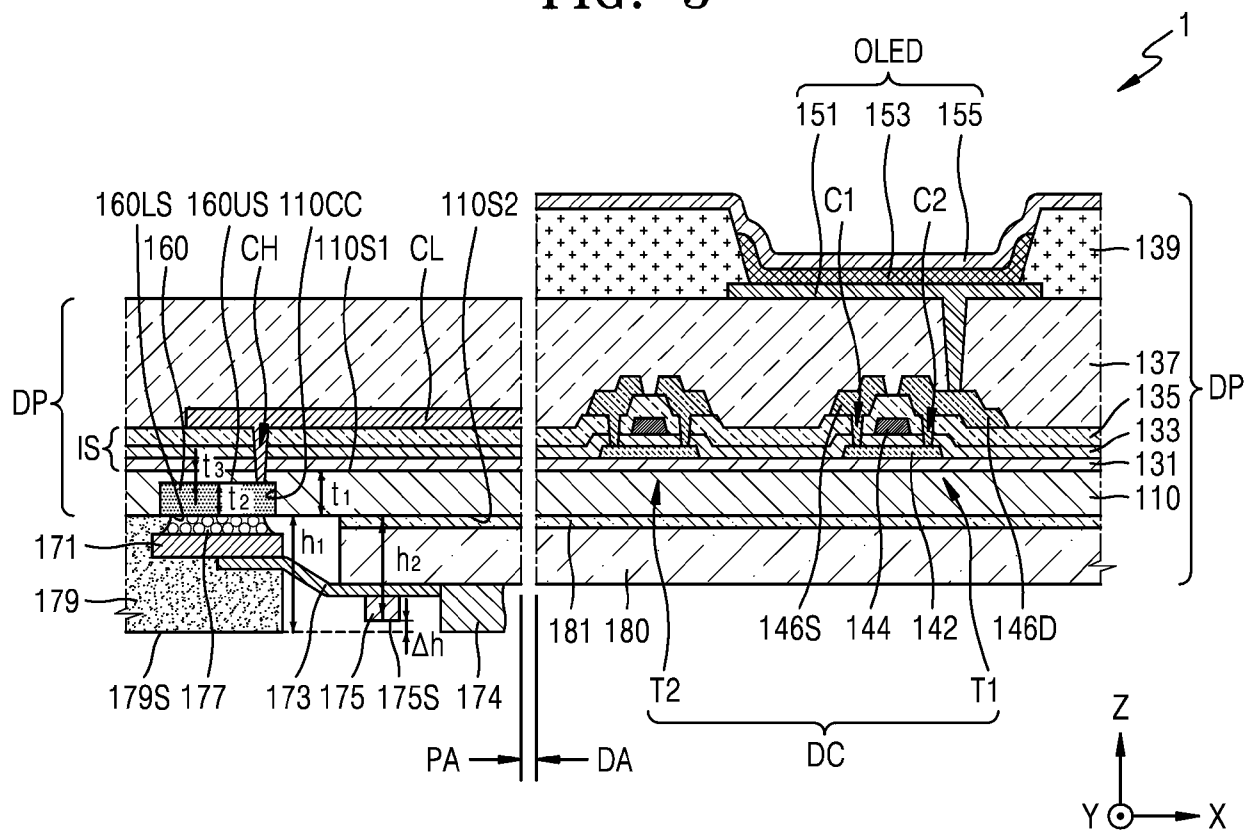


FIG. 4

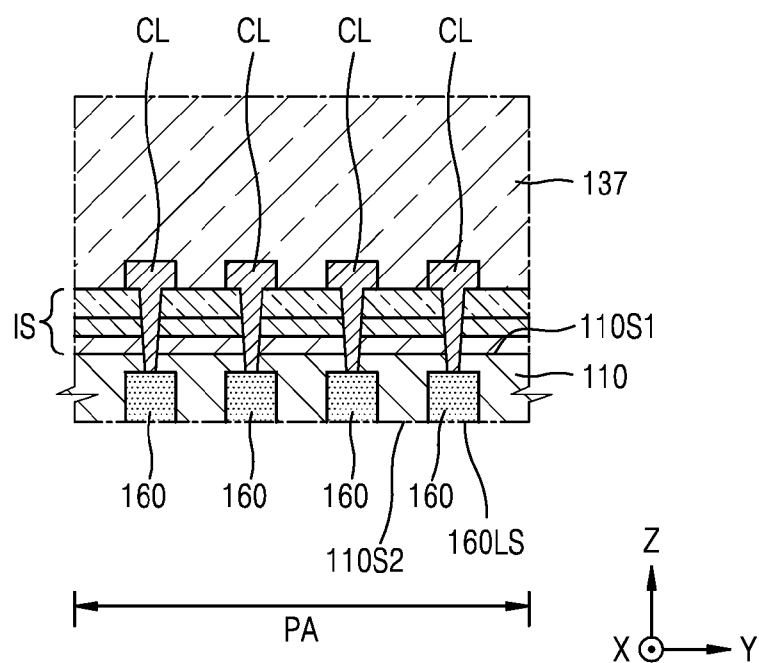


FIG. 5A

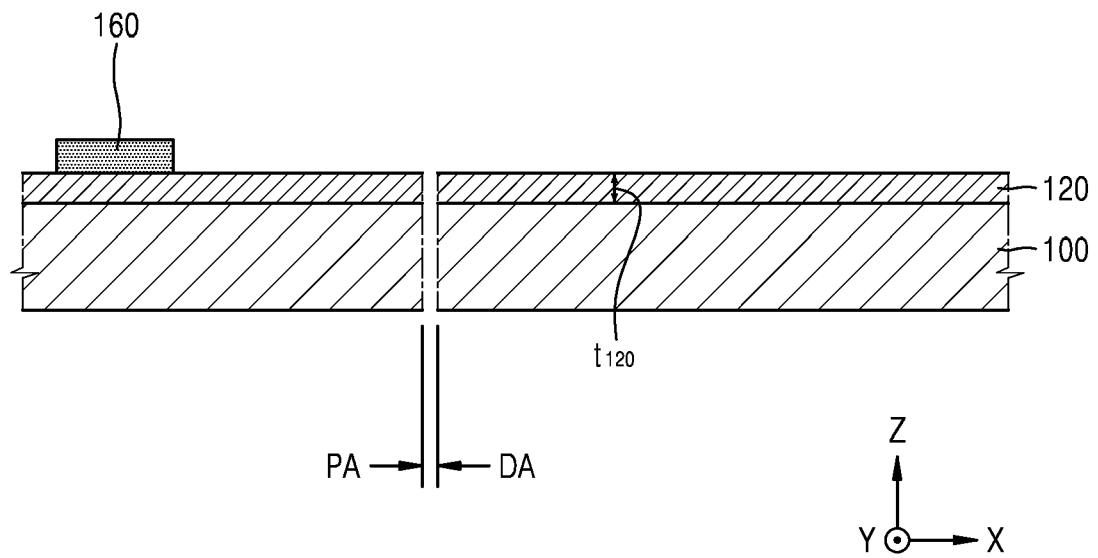


FIG. 5B

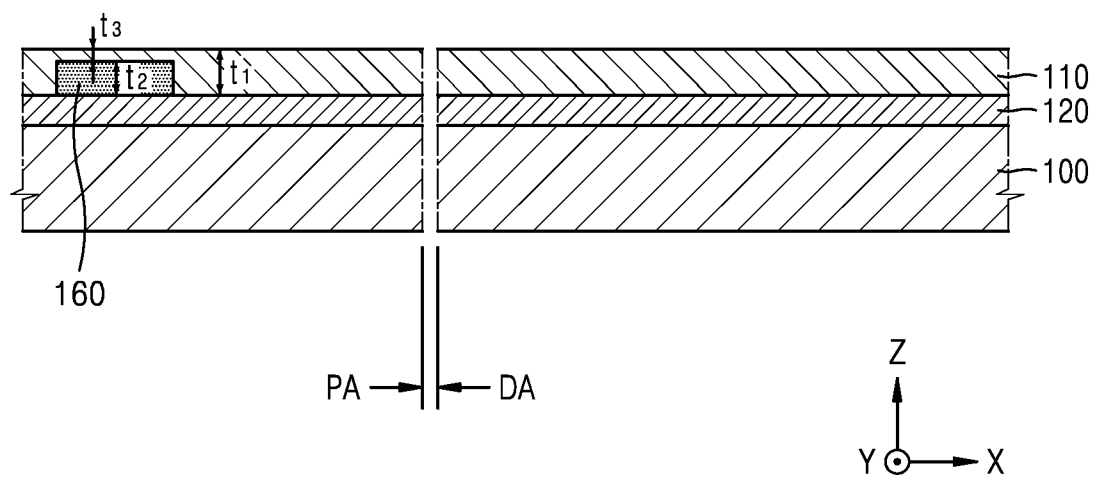


FIG. 5C

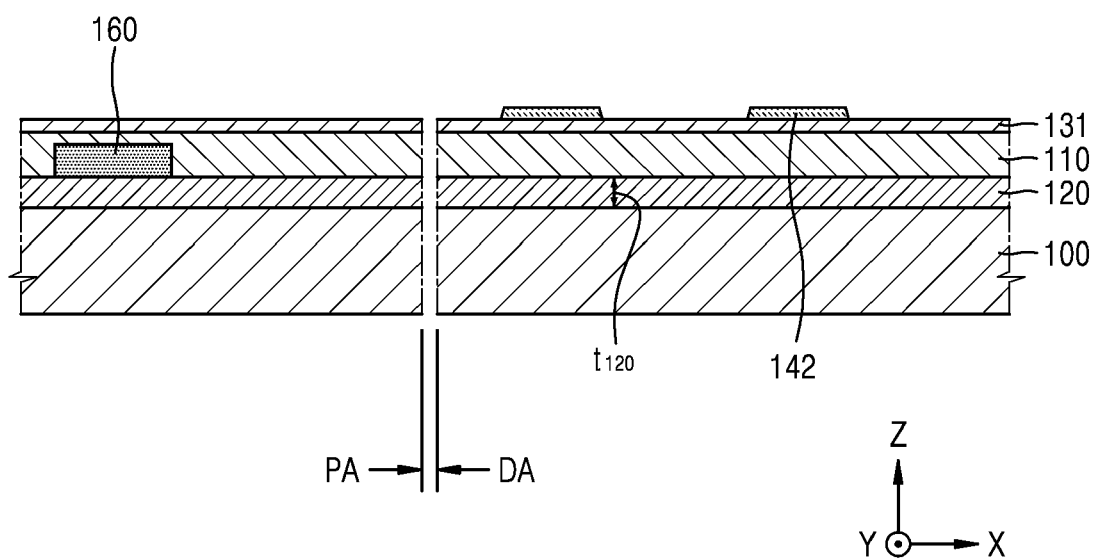


FIG. 5D

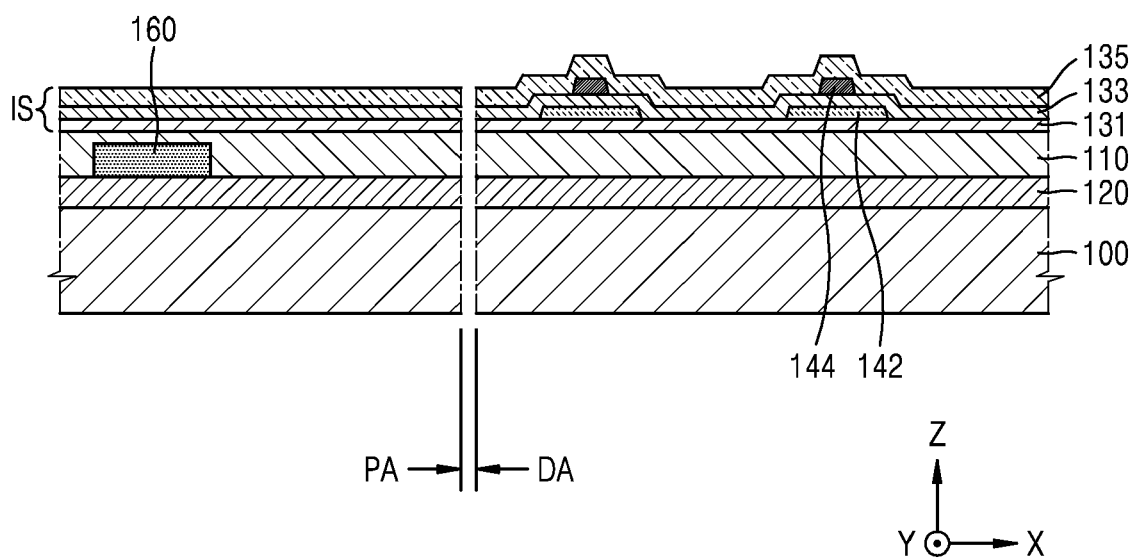


FIG. 5E

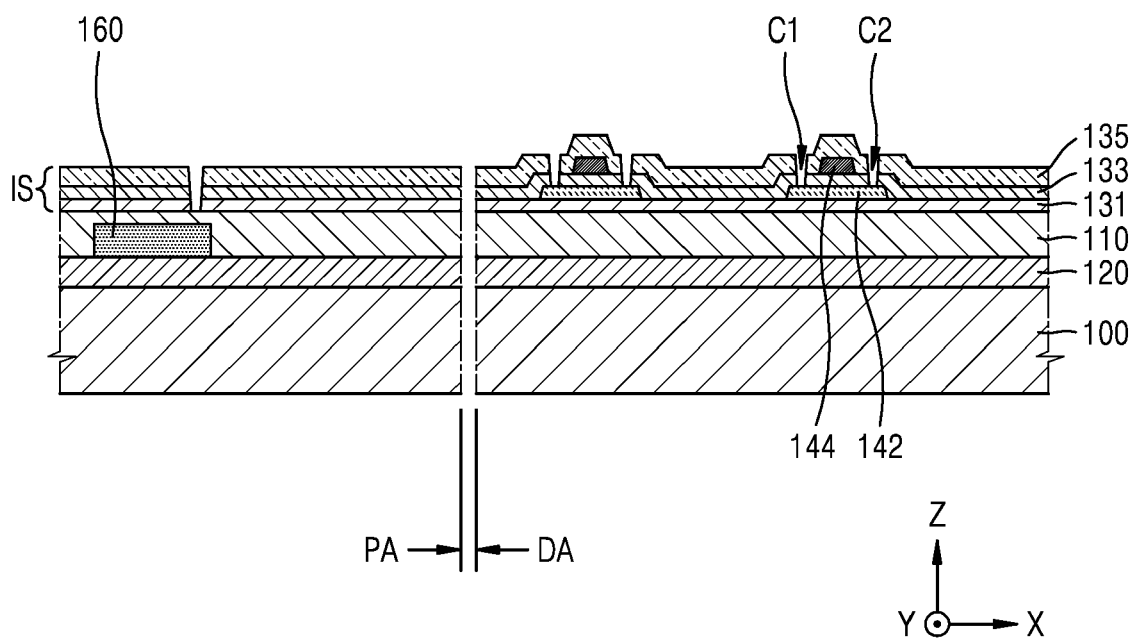


FIG. 5F

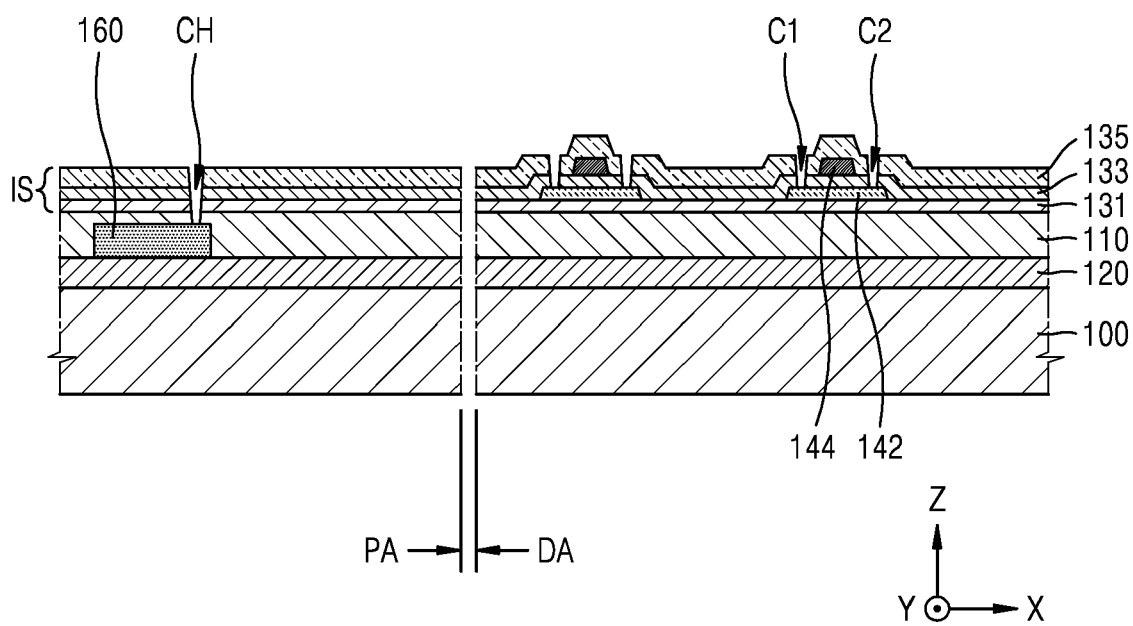


FIG. 5G

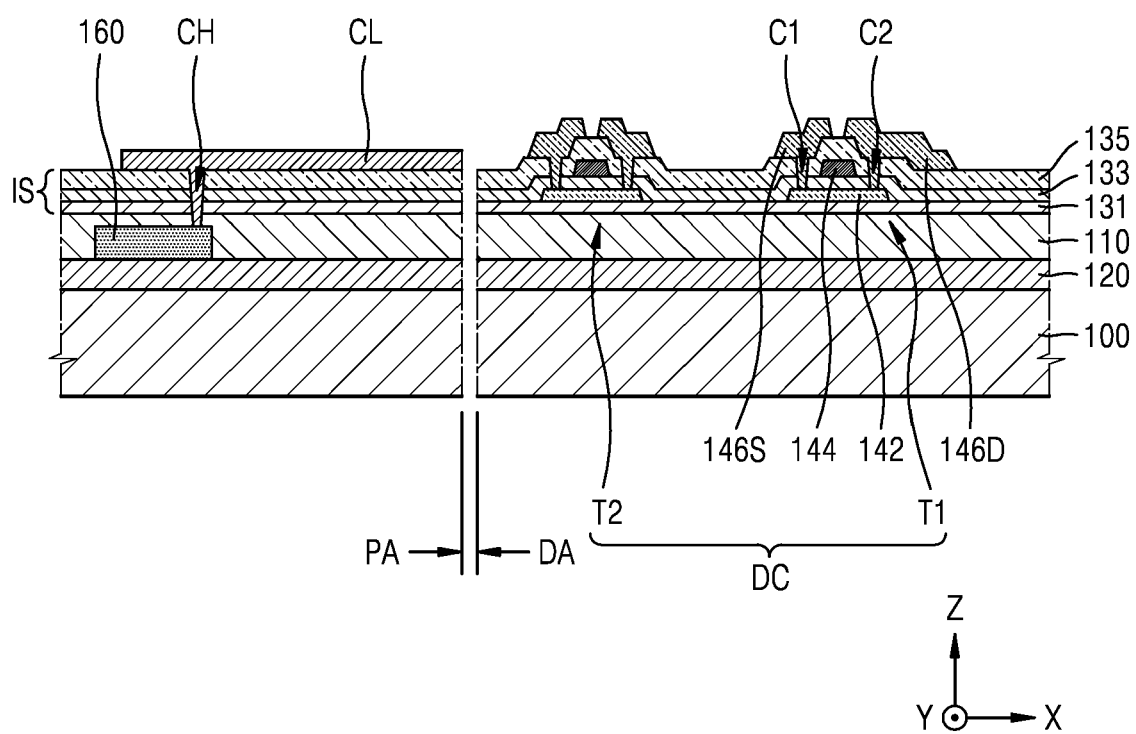


FIG. 5H

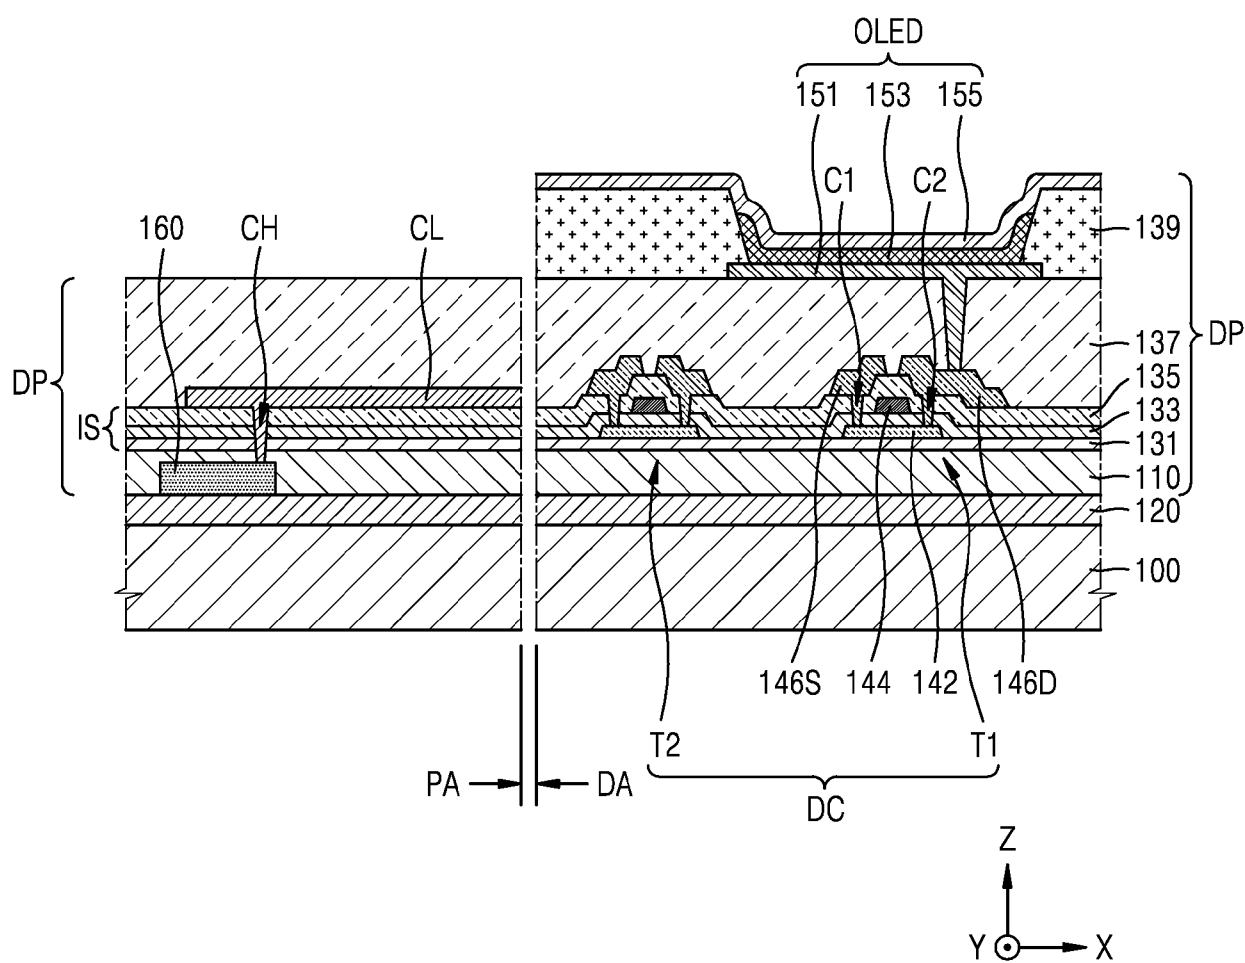


FIG. 5I

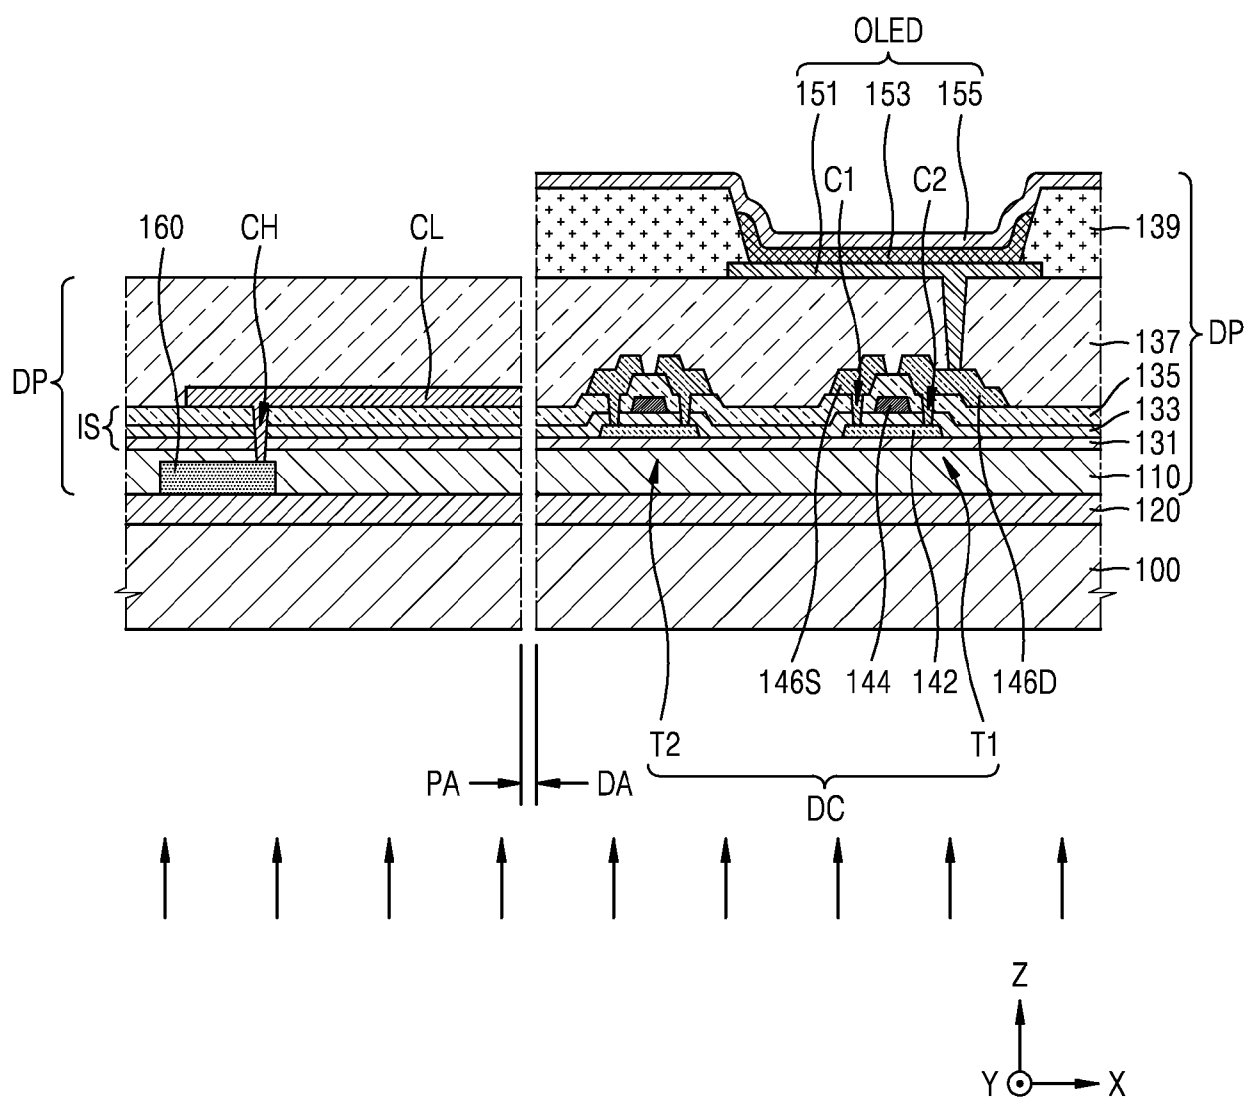


FIG. 5J

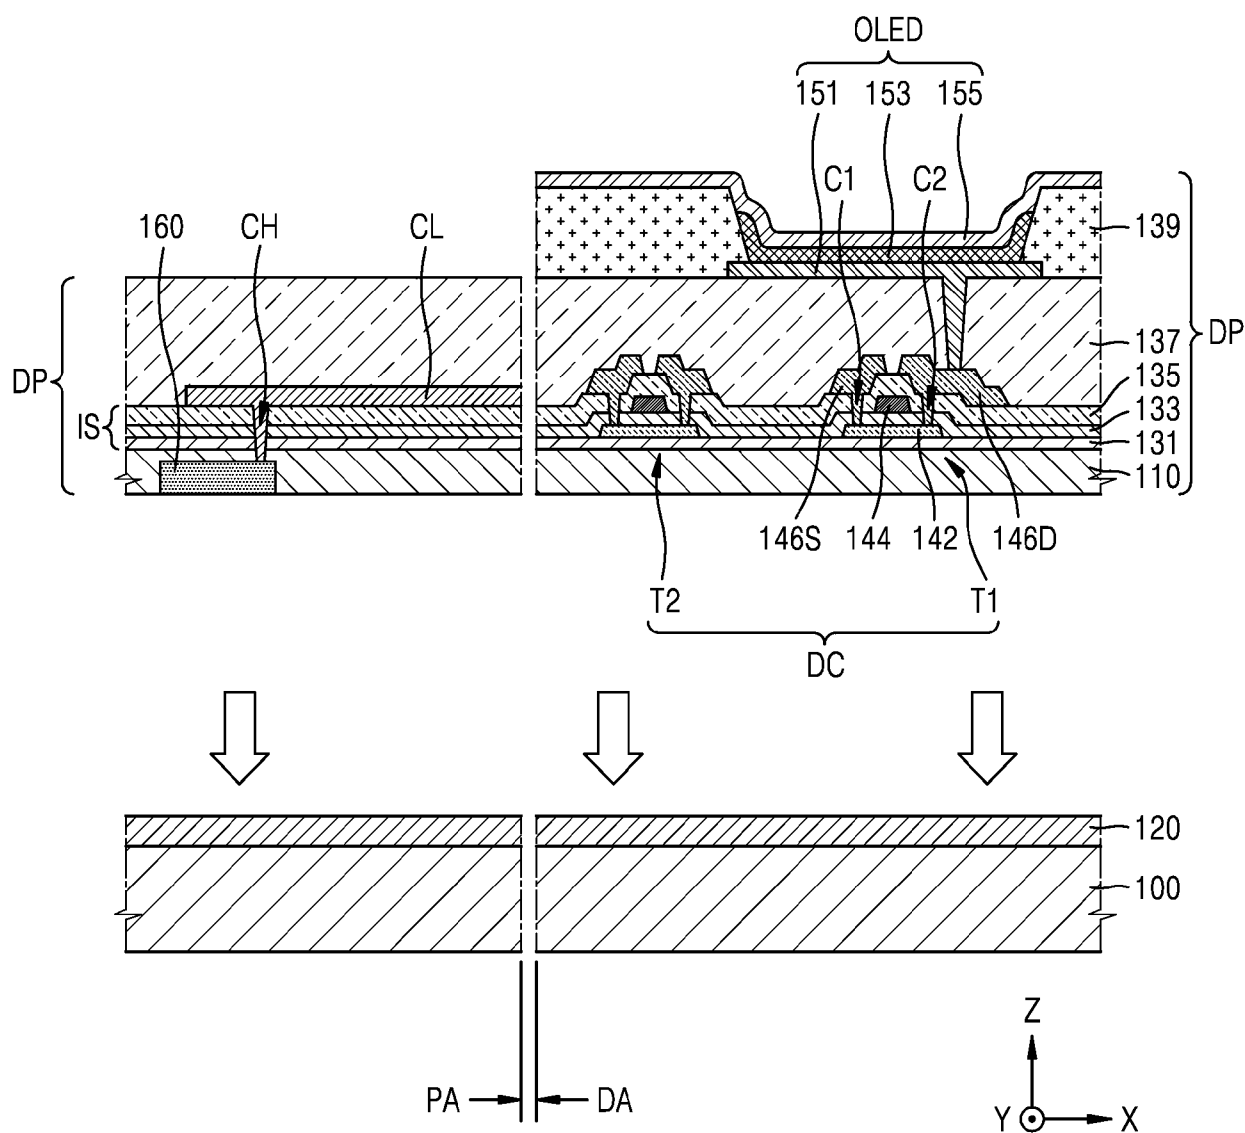


FIG. 5K

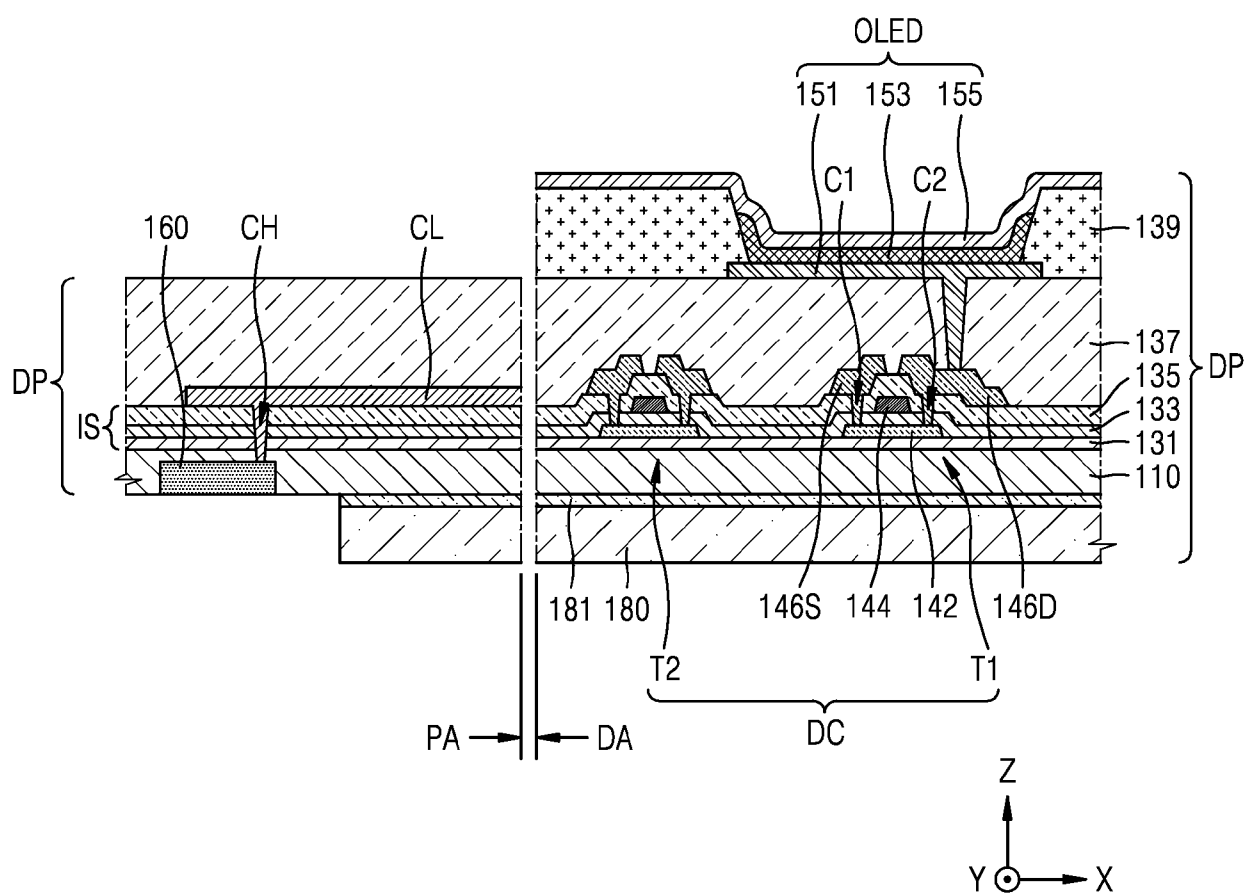


FIG. 6

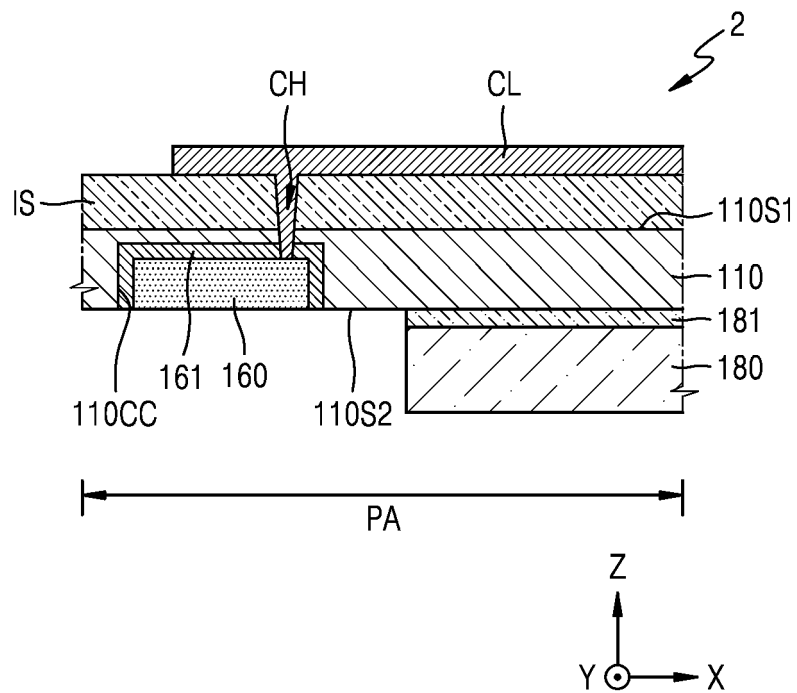


FIG. 7

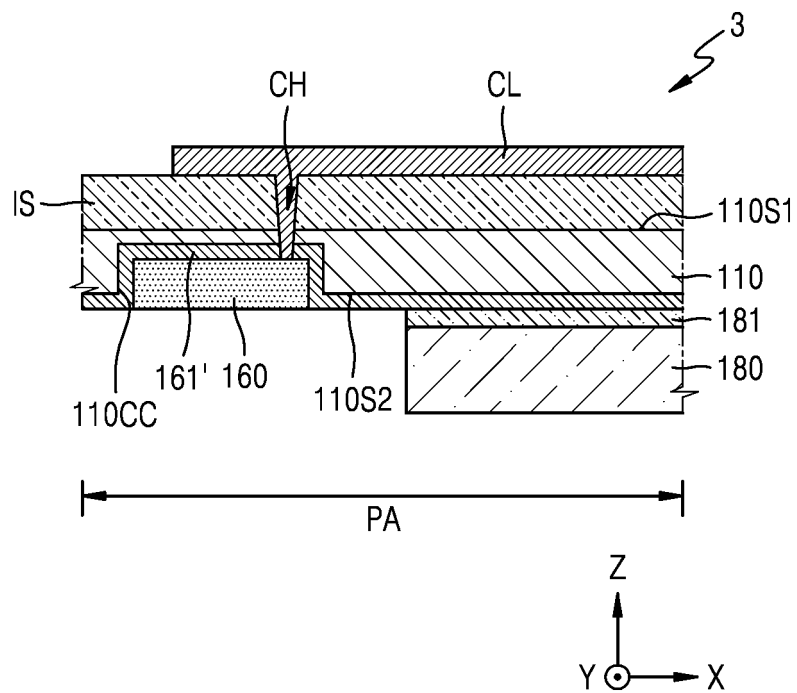


FIG. 8

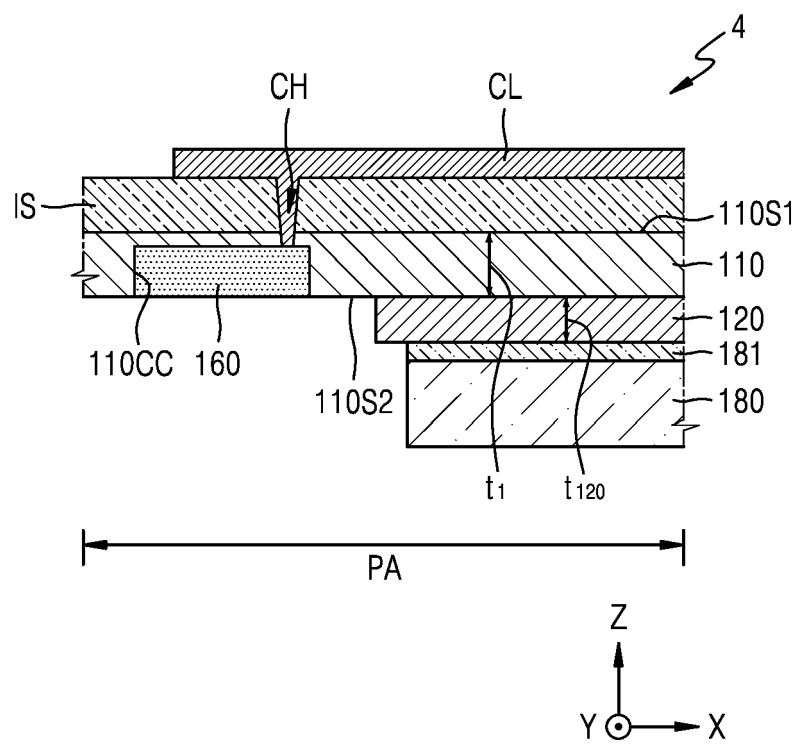


FIG. 9A

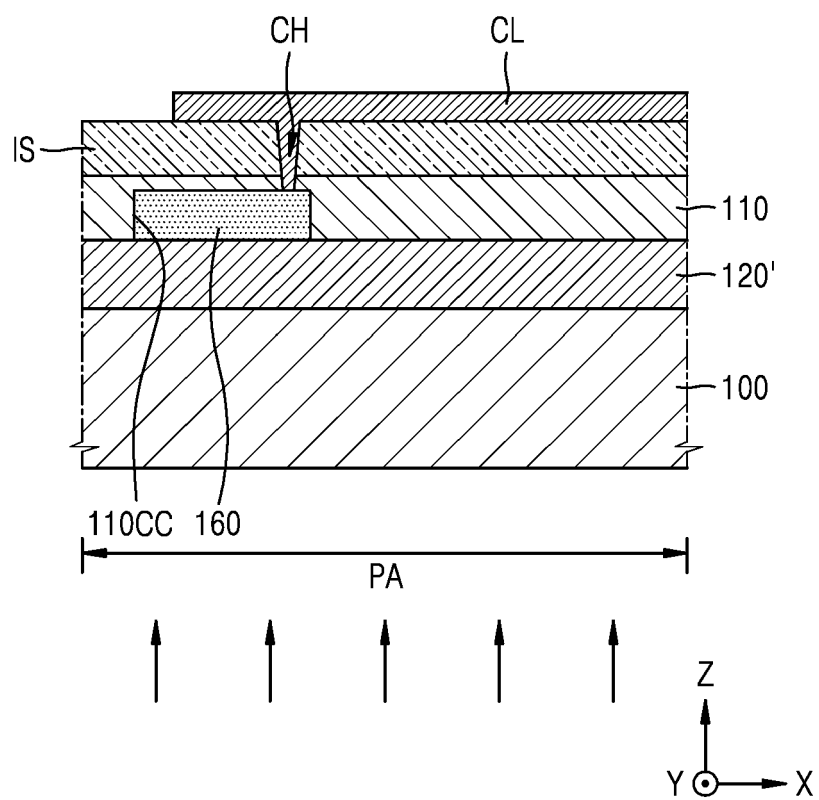


FIG. 9B

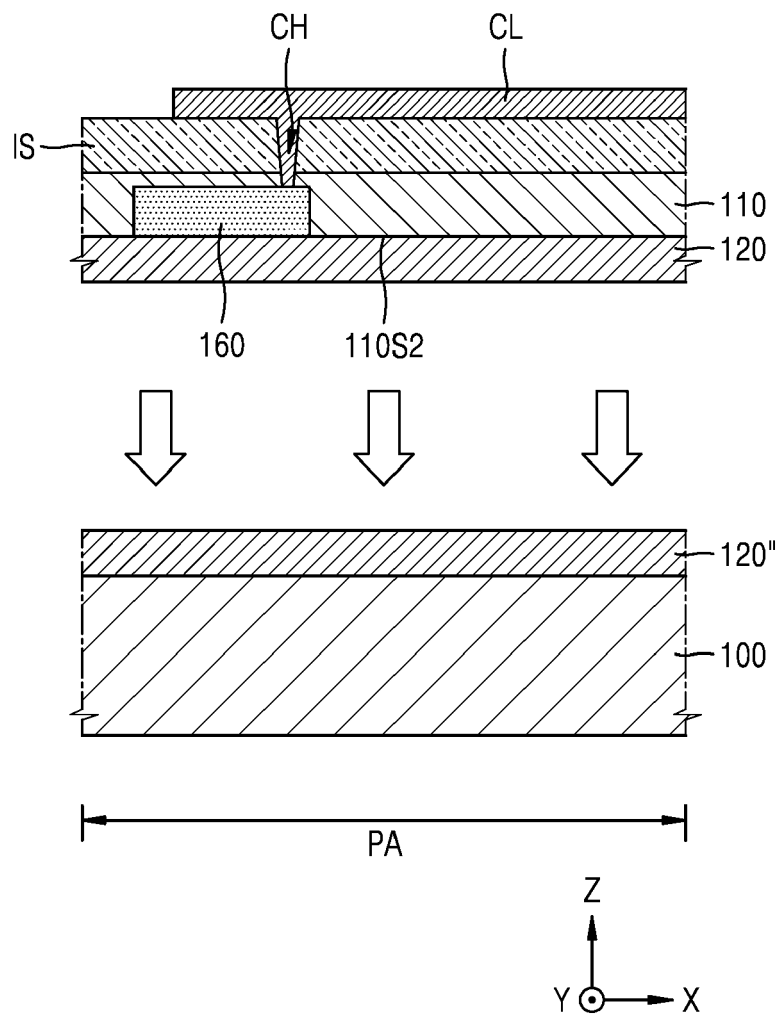


FIG. 9C

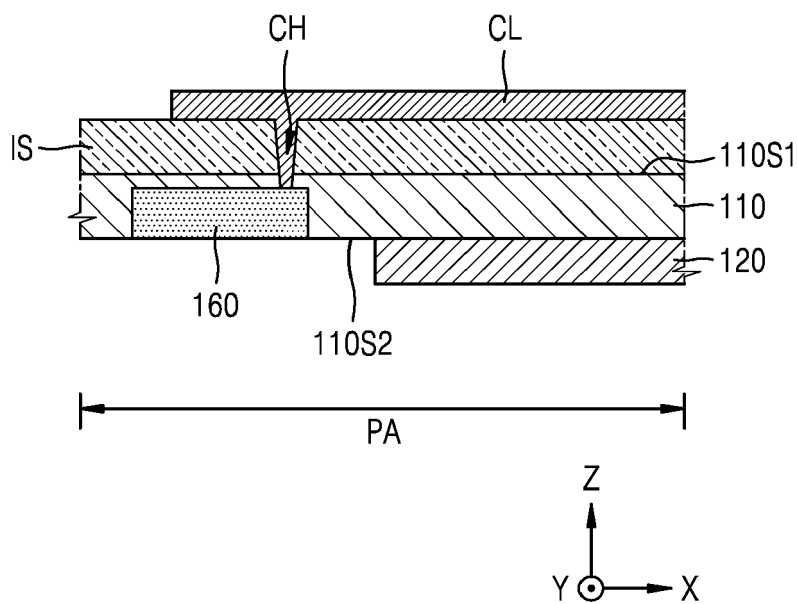


FIG. 10A

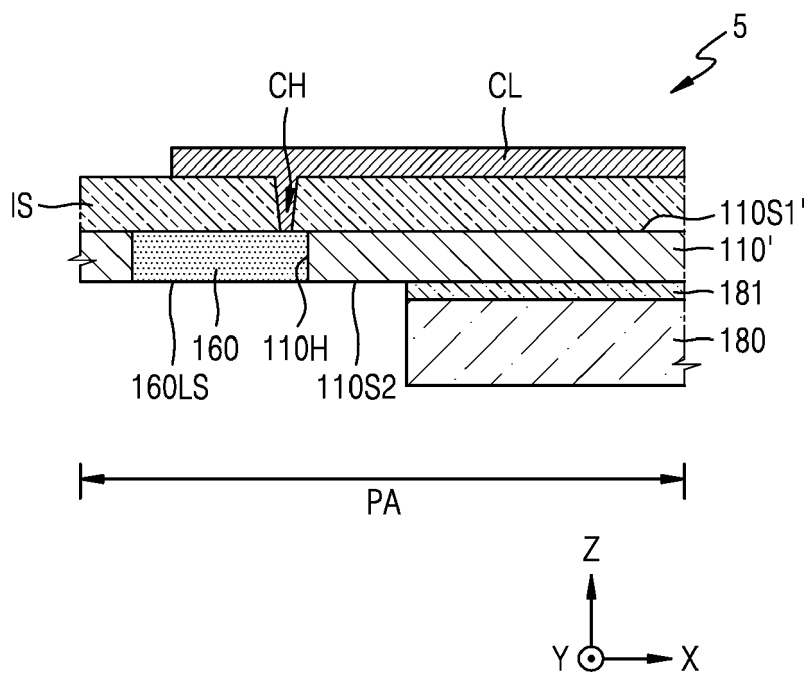


FIG. 10B

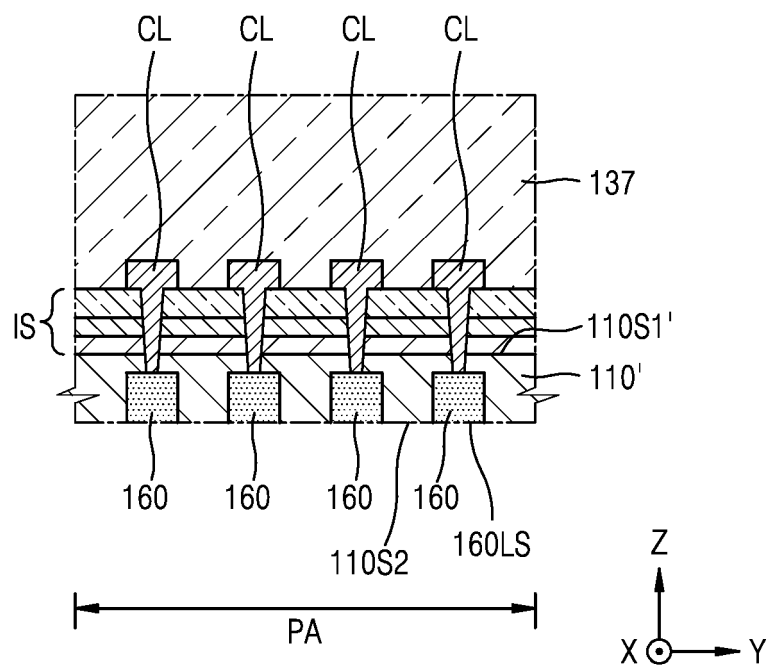


FIG. 11A

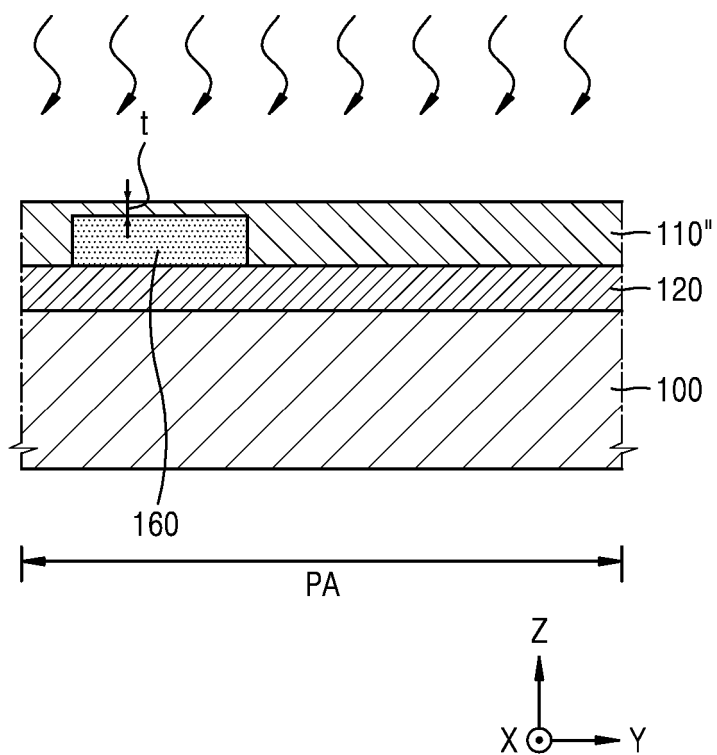


FIG. 11B

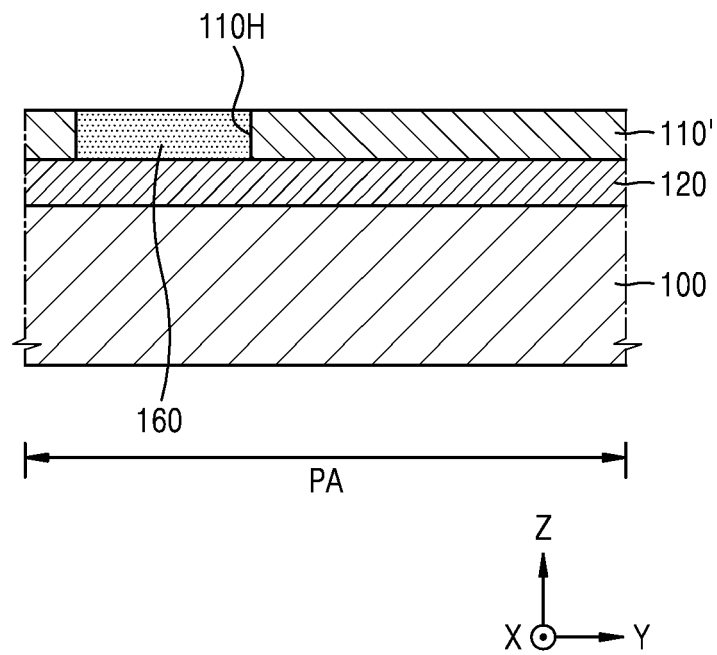


FIG. 12A

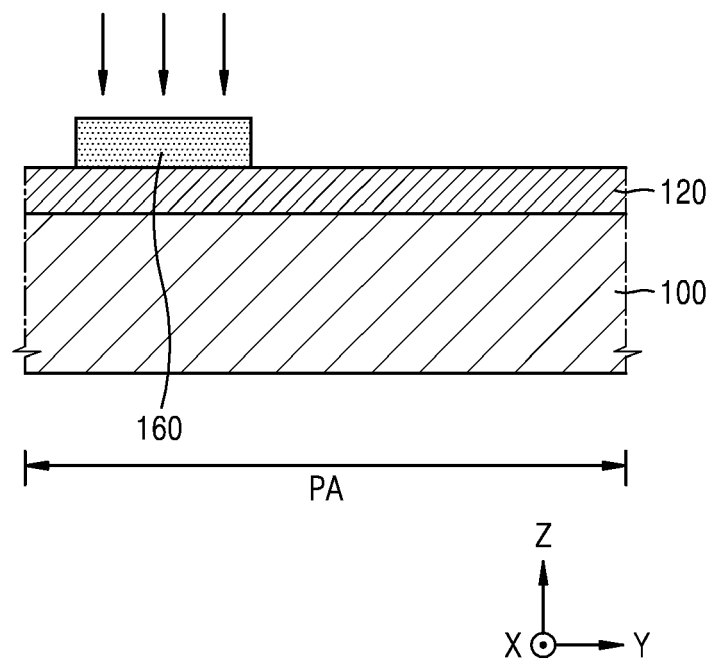


FIG. 12B

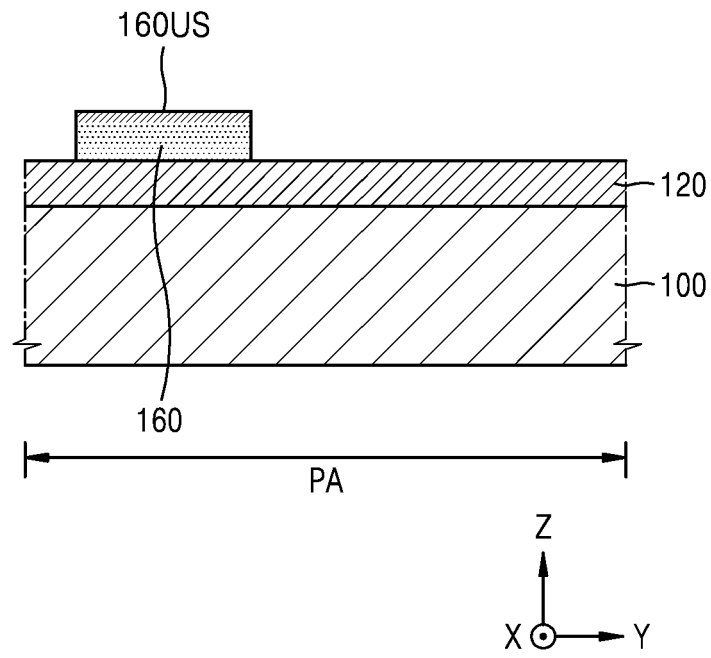


FIG. 12C


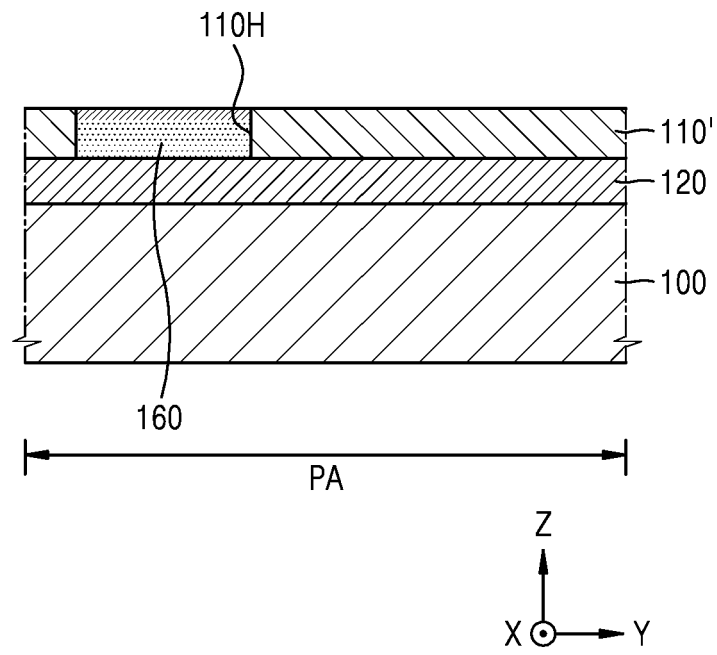


FIG. 13



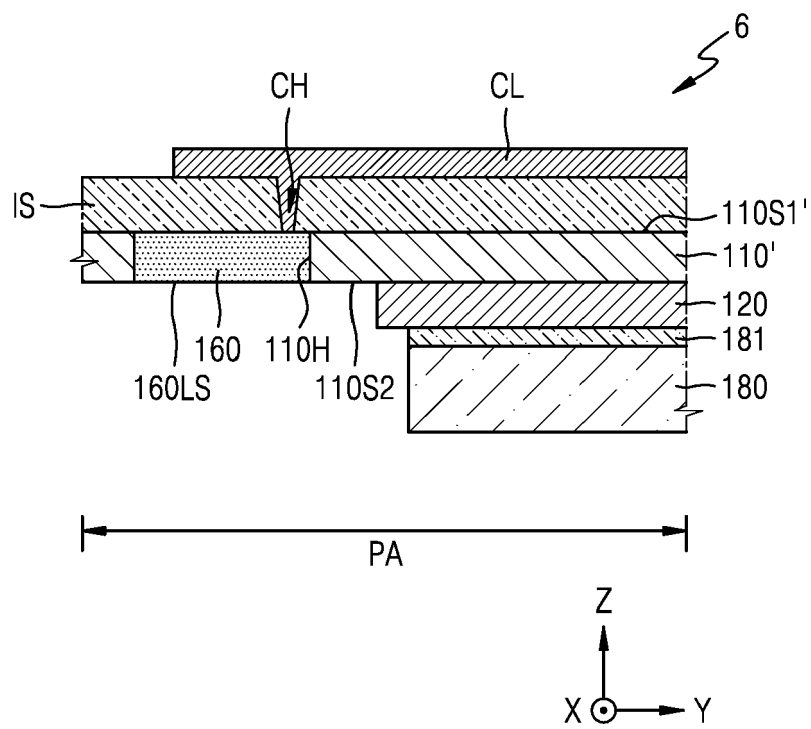

EUROPEAN SEARCH REPORT

Application Number
EP 18 15 8958

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2016/329386 A1 (SAUERS JASON C [US] ET AL) 10 November 2016 (2016-11-10)	1,10,12,13	INV. H01L27/32
Y	* paragraph [0038]; figures 4,5 *	2-4,14	
	* paragraph [0041] - paragraph [0045] *		
	* paragraph [0033] - paragraph [0034] *		
Y	US 2003/034497 A1 (YAMAZAKI SHUNPEI [JP] ET AL) 20 February 2003 (2003-02-20)	2,3,14	
	* paragraph [0168]; figure 9B *		
	* paragraph [0195] *		
	* paragraph [0202] *		
	* paragraph [0192] *		
Y	US 2012/140424 A1 (SATO TAKASHI [JP]) 7 June 2012 (2012-06-07)	4	
	* paragraph [0115]; figure 9 *		
	* paragraph [0210] *		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 July 2018	Examiner Beierlein, Udo
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 15 8958

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-07-2018

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016329386 A1	10-11-2016	NONE	

US 2003034497 A1	20-02-2003	CN 1392615 A	22-01-2003
		KR 20020097028 A	31-12-2002
		KR 20090033861 A	06-04-2009
		TW 548860 B	21-08-2003
		US 2003034497 A1	20-02-2003
		US 2005127371 A1	16-06-2005
		US 2008303408 A1	11-12-2008
		US 2011233557 A1	29-09-2011
		US 2012187388 A1	26-07-2012
		US 2013228763 A1	05-09-2013
		US 2014077199 A1	20-03-2014
		US 2014346488 A1	27-11-2014

US 2012140424 A1	07-06-2012	CN 102486906 A	06-06-2012
		JP 5757083 B2	29-07-2015
		JP 2012118341 A	21-06-2012
		US 2012140424 A1	07-06-2012

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	显示装置		
公开(公告)号	EP3367442A1	公开(公告)日	2018-08-29
申请号	EP2018158958	申请日	2018-02-27
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	SEO KISEONG RYU JEKIL CHOE WONKYU CHOI JUNGHO KIM MUGYEOM JEONG CHANGYONG		
发明人	SEO, KISEONG RYU, JEKIL CHOE, WONKYU CHOI, JUNGHO KIM, MUGYEOM JEONG, CHANGYONG		
IPC分类号	H01L27/32		
CPC分类号	H01L27/3276 H01L51/0097 Y02E10/549 H01L27/1214 H01L27/3244 H01L2227/323 H01L2227/326 H01L2251/5338 H01L2924/12041 H01L2924/12044		
优先权	1020170026462 2017-02-28 KR		
外部链接	Espacenet		

摘要(译)

一种显示装置，包括显示区域 (DA) 和与显示区域相邻的外围区域 (PA)。显示装置还包括第一柔性基板 (110)，驱动电路 (DC)，导电图案 (160)，导线 (CL)，发光器件 (OLED) 和支撑基板 (180)。第一柔性基板包括第一表面和与第一表面相对的第二表面。第二表面在外围区域中包括延伸到第一柔性基板中的腔。DC位于第一表面上并包括至少一个晶体管。CP位于空腔中并且部分地被空腔暴露。导线将CP电连接到DC。发光装置位于显示区域中并且电连接到DC。支撑基板位于第二表面上。在垂直于第二表面的视图中，支撑基板与CP间隔开。

