



(12) **EUROPEAN PATENT APPLICATION**  
 published in accordance with Art. 158(3) EPC

(43) Date of publication: **22.12.2004 Bulletin 2004/52**  
 (21) Application number: **03744996.4**  
 (22) Date of filing: **19.03.2003**  
 (51) Int Cl.7: **H05B 33/04, H05B 33/10**  
 (86) International application number: **PCT/JP2003/003311**  
 (87) International publication number: **WO 2003/081954 (02.10.2003 Gazette 2003/40)**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
 HU IE IT LI LU MC NL PT RO SE SI SK TR**  
 Designated Extension States:  
**AL LT LV MK**  
 (30) Priority: **25.03.2002 JP 2002082512**  
 (71) Applicant: **Pioneer Corporation**  
**Tokyo 153-8654 (JP)**


(72) Inventor: **KUBOTA, Hirofumi,**  
**PIONEER CORPORATION**  
**Tsurugashima-shi, Saitama 350-2288 (JP)**  
 (74) Representative:  
**Klingseisen, Franz, Dipl.-Ing. et al**  
**Patentanwälte,**  
**Dr. F. Zumstein,**  
**Dipl.-Ing. F. Klingseisen,**  
**Postfach 10 15 61**  
**80089 München (DE)**

(54) **ORGANIC ELECTROLUMINESCENCE DISPLAY PANEL AND METHOD FOR MANUFACTURING THE SAME**

(57) An organic electroluminescent display panel includes one or more organic electroluminescent elements and a substrate supporting them. Each organic electroluminescent element has first and second display electrodes and one or more organic functional layers of organic compounds sandwiched and layered between the first and second display electrodes, the organic func-

tional layers including a light-emitting layer. Such display panel has a high-molecular compound film covering the organic electroluminescent elements and a surface of the substrate around the one or more organic electroluminescent elements; and an inorganic barrier film covering the high-molecular compound film, an edge thereof, and a surface of the substrate around the high-molecular compound film.

FIG. 1

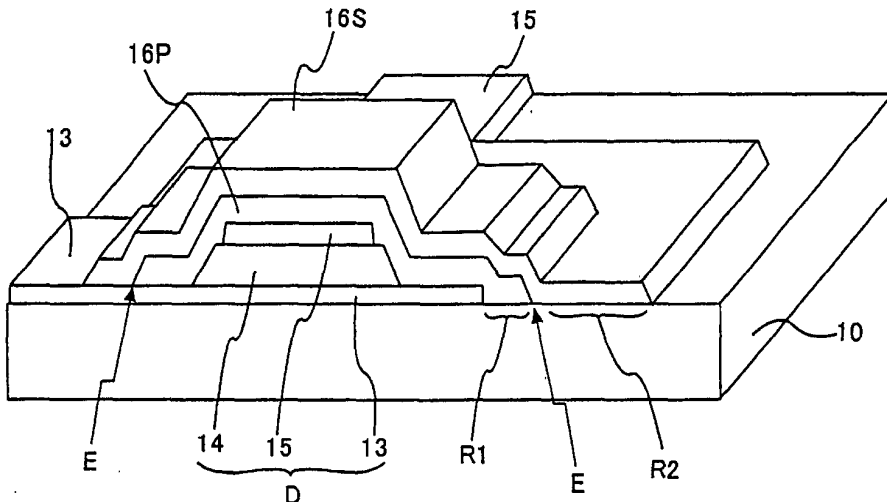

**Description**TECHNICAL FIELD

**[0001]** The present invention relates to an organic electroluminescent element (hereinafter referred to as an organic EL element) comprising one or more organic thin films (hereinafter referred to as an organic functional layer) including a light-emitting layer consisting of organic compound material which exhibits electroluminescence when electrical current is injected thereto. More particularly, the present invention relates to an electroluminescent display panel (hereinafter referred to as organic EL display panel) with one or more organic EL elements formed on a substrate.

BACKGROUND ART

**[0002]** The organic EL element fundamentally comprises an anode and a cathode with one or more organic functional layers layered between them. In the light-emitting layer of the organic EL element, an electron and a hole injected from both electrodes recombine with each other to form an exciton. When the exciton changes its state from an excited state to a basic state, it emits light. For example, an organic EL element has an anodic transparent electrode, an organic functional layer, and a cathodic metal electrode, which are sequentially deposited on a transparent substrate so as to emit light through the transparent substrate side. The organic functional layer can be formed in a laminate form of a single light-emitting layer, or of a three-layer structure which includes an organic hole transport layer, a light-emitting layer and an organic electron transport layer, or of a two-layer structure which includes an organic hole transport layer and a light-emitting layer. At least one of an electron injection layer, a hole injection layer and a carrier block layer may be inserted among the above-mentioned layered layers and both electrodes.

**[0003]** As organic EL display panels, for example, the matrix display type and the panel having a predetermined luminescence pattern are well known.

**[0004]** When this organic EL element is exposed to the atmosphere, it is easily degraded by water, gasses such as oxygen, and some type of molecule in the operating environment. In particular, the properties of the interface between the electrode of the organic EL element and the organic functional layer deteriorate markedly, and the luminescent properties, such as brightness and color, also deteriorate. To prevent such adverse influences, in the case of the organic EL display panel, the organic EL element is sealed with a single inorganic protective film, such as silicon oxide, to restrain its deterioration. However, such a protective film does not have sufficient barrier properties. That is, it is impossible to avoid the generation of pinholes in the inorganic barrier film. When pinholes are formed in the protective film, then water, oxygen or the like can penetrate the film,

and a non-luminescent spot of the organic EL element, a so-called dark spot, spreads out.

DISCLOSURE OF INVENTION

**[0005]** It is an object of the present invention to provide an organic EL element and an organic EL display panel having an excellent shielding effect against oxygen, water or the like to protect the organic functional layer and the electrode from them, and having degradation-resistant luminescent properties.

**[0006]** According to the present invention, there is provided an organic electroluminescent display panel comprising:

one or more organic electroluminescent elements each having first and second display electrodes and one or more organic functional layers of organic compounds sandwiched and layered between said first and second display electrodes, the organic functional layers including a light-emitting layer; and a substrate supporting said organic electroluminescent elements;

a high-molecular compound film covering said organic electroluminescent elements and a surface of the substrate around said one or more organic electroluminescent elements; and

an inorganic barrier film covering said high-molecular compound film, an edge thereof, and a surface of the substrate around said high-molecular compound film.

**[0007]** In the organic electroluminescent display panel according to the invention, said inorganic barrier film is made of silicon nitride or silicon oxynitride or silicon oxide.

**[0008]** In the organic electroluminescent display panel according to the invention, said inorganic barrier film is formed by a plasma chemical vapor deposition process or a sputter deposition process.

**[0009]** In the organic electroluminescent display panel according to the invention, said high-molecular compound film is formed by a plasma polymerization deposition process or a chemical vapor deposition process.

**[0010]** In the organic electroluminescent display panel according to the invention, said high-molecular compound film is made of polyparaxylylene.

**[0011]** In the organic electroluminescent display panel according to the invention, said substrate is a plastic substrate made of a high-molecular compound.

**[0012]** The organic electroluminescent display panel according to the invention further comprises an inorganic barrier film previously formed on the plastic substrate so as to cover a surface supporting said organic electroluminescent elements on said plastic substrate.

**[0013]** According to the present invention, there is provided method of manufacturing an organic electroluminescent display panel comprising one or more organ-

ic electroluminescent elements and a substrate supporting the organic electroluminescent elements, comprising the steps of:

forming one or more organic electroluminescent elements on a substrate, each having first and second display electrodes and one or more organic functional layers of organic compounds sandwiched and layered between said first and second display electrodes, the organic functional layers including a light-emitting layer;

forming a high-molecular compound film having an area larger than a display area including said organic electroluminescent elements and a surface of the substrate around said one or more organic electroluminescent elements; and

forming an inorganic barrier film having an area larger than the area of said high-molecular compound film so as to cover said high-molecular compound film, an edge thereof, and a surface of the substrate around said high-molecular compound film.

**[0014]** In the manufacturing method of the organic electroluminescent display panel according to the invention, the edge of said high-molecular compound film is so formed that said edge becomes gradually thinner.

**[0015]** In the manufacturing method of the organic electroluminescent display panel according to the invention, said inorganic barrier film is made of silicon nitride or silicon oxynitride or silicon oxide.

**[0016]** In the manufacturing method of the organic electroluminescent display panel according to the invention, said inorganic barrier film is formed by a plasma chemical vapor deposition process or a sputter deposition process.

**[0017]** In the manufacturing method of the organic electroluminescent display panel according to the invention, said high-molecular compound film is formed by a plasma polymerization deposition process or a chemical vapor deposition process.

#### BRIEF DESCRIPTION OF DRAWINGS

##### **[0018]**

Fig. 1 is a schematic perspective view of an organic EL element according to an embodiment of the present invention.

Figs. 2-4 are schematic perspective views each showing a substrate in the manufacturing process of an organic EL display panel according to the present invention.

Fig. 5 is a partial enlarged rear view of an organic EL display panel comprising a plurality of organic EL elements according to another embodiment of the present invention.

Fig. 6 is a schematic perspective view of an organic EL element according to another embodiment of the present invention.

#### 5 DETAILED DESCRIPTION OF THE INVENTION

**[0019]** The inventor conducted experiments on a two-layer sealed construction comprising a high-molecular compound film and an inorganic barrier film for an organic EL element because an inorganic barrier film cannot seal an organic EL element sufficiently. The experiments were conducted by changing the covering area of the high-molecular compound film and the inorganic barrier film. As a result, it was found that if the edge of the high-molecular compound film near the organic EL element is not covered with the inorganic barrier film, water and oxygen invade through the edge of the exposed high-molecular compound film and propagate in the high-molecular compound film to damage the organic EL element. Therefore, according to the present invention, the edge of the high-molecular compound film is covered with the inorganic barrier film, so water and oxygen cannot enter the organic EL element through the edge of the high-molecular compound film, and the organic EL element is protected.

**[0020]** An exemplary embodiment of the present invention is described below with reference to the accompanying drawings.

**[0021]** Fig. 1 shows an organic EL element D according to an embodiment of the present invention. The organic EL element of this embodiment comprises a first display electrode 13 (i.e., anode of a transparent electrode), one or more organic functional layers 14 containing a light-emitting layer of an organic compound or more, and a second display electrode 15 (i.e., cathode of a metallic electrode) formed on a substrate 10 made of glass, or the like. In addition, the organic EL element has a sealing film comprising a high-molecular compound film 16P and an inorganic barrier film 16S so layered that it covers the back of the second display electrode 15. The high-molecular compound film 16P covers the organic EL element D and a surrounding surface R1 of the substrate 10 encircling the organic EL element. The inorganic barrier film 16S covers the high-molecular compound film 16P and its edge E and a further surrounding surface R2 of the substrate 10 encircling the high-molecular compound film. The edge E of the high-molecular compound film 16P is so formed that it becomes gradually thinner so as to ensure the formation of a smooth inorganic surface of the inorganic barrier film 16S. Any material can be used for the substrate 10, so it can be selected from any inorganic material such as glass and any organic material such as a high-molecular compound.

**[0022]** For example, as shown in Fig. 2, in a manufacturing process for the organic EL element, the first display electrode 13 consisting of indium-tin oxide (ITO) is evaporated or sputtered on the substrate 10 to form a

thin film. The organic functional layers or laminate 14 is formed thereon by evaporating a hole injection layer consisting of copper phthalocyanine, a hole transport layer consisting of TPD (triphenylamine derivative), a light-emitting layer consisting of Alq3 (aluminum chelate complex), and an electron injection layer consisting of Li<sub>2</sub>O (lithium oxide) successively. In addition, the second display electrode 15 made of aluminum is formed by evaporation in such a manner that it faces the electrode pattern of the transparent electrode 13 and the organic functional layer 14.

**[0023]** Next, as shown in Fig. 3, a polyparaxylylene film is formed as the high-molecular compound film 16P on the organic EL element by the CVD (chemical vapor deposition) method. In this case, the high-molecular compound film 16P is formed on an area larger than a display area containing pixels or the organic EL element by a first opening mask M1.

**[0024]** Next, as shown in Fig. 4, a silicon nitride film is formed as the inorganic barrier film 16S on the high-molecular compound film 16P by the plasma CVD (plasma chemical vapor deposition) method. In this case, the organic EL element shown in Fig. 1 is formed by forming the inorganic barrier film 16S over an area larger than that of the high-molecular compound film 16P by means of a second opening mask M2. Because the aperture of second opening mask M2 is larger than that of the first opening mask M1, the inorganic barrier film 16S is so formed that it covers the edge of the high-molecular compound film 16P. A multilayer construction having alternate layer of high-molecular compound film 16P and inorganic barrier film 16S can be formed by repeating the above process.

**[0025]** The plasma polymerizing process for forming the high-molecular compound film 16P is a process in which organic molecules are converted into a plasma state and are polymerized by the coupling of the radicals generated. With the plasma polymerizing process, if a monomer has a vapor pressure, a fine, thin high-molecular compound film can be obtained without using a special polymerizing group such as a vinyl group. According to the embodiment, plasma polymerization is performed in an alternating current plasma polymerizing device. However, a direct-current plasma process using an anode and a cathode may also be used for plasma polymerization.

**[0026]** Examples of the raw material for the high-molecular compound film include a hydrocarbon monomer, such as methane, ethane, propane, butane, pentane, ethylene, propylene, butene, butadiene, acetylene, or methyl acetylene; a silicon monomer, such as hexamethyldisiloxane, triethoxyvinylsilane, polydimethylsiloxane, or tetramethoxysilane; and a hydrogen fluoride monomer, such as tetrafluoroethylene. A high-molecular compound film substantially consisting only of carbon and hydrogen is preferable because it can form a fine, hard film free from pinholes. The ratio of atoms (atomic composition ratio) of H/C=1.5 or smaller is pref-

erable because a three-dimensionally sufficiently cross-linked high-molecular compound film having excellent properties can be formed. Such a high-molecular compound film can be formed by decreasing the amount of the hydrocarbon monomer gas, by reducing the reaction pressure, and by increasing the electric power applied. That is, by reducing the reaction pressure and by increasing the electric power applied, the decomposition energy per monomer unit increases, so decomposition is accelerated and a cross-linked high-molecular compound film can be formed. In addition, a gas, such as hydrogen, inert gas or the like may be used as a carrier gas.

**[0027]** A high-molecular compound film formed by CVD (chemical vapor deposition) is preferable. Because a polyparaxylylene polymerized film, especially, a paraxylylene polymerized film or a chlorinated paraxylylene polymerized film, has extremely low gas and steam permeability, the mixing in of impurities can be restrained and a uniform film with fewer pinholes can be obtained. Examples of such xylene resins are Palylene N (polyparaxylylene), Palylene C (polymonochloroparaxylylene), and Palylene D (polydichloroparaxylylene) commercially available from Union Carbide Co., Ltd. in the U.S.A. Palylene C is preferable because of its low gas permeability. However, Palylene N will do because the SiN film is formed thereon. A high-molecular compound film such as polyparaxylylene film can be obtained by thermally decomposing a gas of a dimer under reduced pressure.

**[0028]** In the experiments, a predetermined organic functional layer was formed on the ITO anode surface of a glass substrate, and an aluminum cathode film was formed thereon to form an organic EL element. Next, a polyethylene high-molecular compound film was formed by plasma polymerization so as to cover the organic EL element. In addition, an inorganic barrier film of silicon nitride was formed on the entire surface thereof by plasma polymerization deposition method so as to cover the edge of the high-molecular compound film and the surrounding surface of the substrate to form an organic EL display panel according to the embodiment. For comparison's sake, an organic EL display panel in which the edge of the high-molecular compound film protruded from the inorganic barrier film was also formed. A 0.5 $\mu$ m-thick high-molecular compound film was formed by plasma-polymerization from 20 SCCM ethylene gas under the following conditions pressure was 0.9 Torr, RF power was 500 mW/cm<sup>2</sup>, frequency was 13.56 MHz, and temperature was room temperature. Its durability was tested by measuring the spread of the dark spot of the organic EL element in the atmosphere at 60 °C and 95% RH. According to the embodiment, the dark spot did not spread out, but the test piece for comparison showed the spread of the dark spot.

**[0029]** Fig. 5 is a partial enlarged rear view of an organic EL display panel comprising a plurality of organic EL elements. The organic EL display panel comprises

a plurality of organic EL elements arranged in the form of a matrix on the substrate 10. A row electrode 13 (a first display electrode of the anode) including a transparent electrode layer, an organic functional layer, and a column electrode 15 (a second display electrode) including a metallic electrode layer intersecting with said row electrode are formed successively on the substrate 10. Each row electrode is formed in the form of a band and arranged so that it is parallel with an adjacent row electrode with a predetermined interval between them. The same is true of the column electrodes. As described above, the display panel of the matrix display type has a picture display array comprising luminescent pixels of a plurality of organic EL elements formed at intersections of a plurality of rows and a plurality of columns. The organic EL display panel may comprise a plurality of partition walls 7 installed in parallel between the organic EL elements arranged on the substrate 10. The high-molecular compound film 16P and the inorganic barrier film 16S are formed on the second display electrode 15 and the partition wall 7 so as to cover a plurality of organic EL elements. Luminescent spots of red R, green G and blue B may be formed by selecting and laminating organic functional layer materials appropriately.

**[0030]** Fig. 6 shows an organic EL element according to another embodiment of the present invention. This organic EL element is the same as that of the embodiment in Fig. 1 except that the substrate 10 is made of plastic using synthetic resin, and its surface is covered with an inorganic barrier film 22 on the substrate consisting of an inorganic material, such as silicon nitride or silicon oxynitride or silicon oxide. An organic EL element electrode is formed on the inorganic barrier film 22 on the substrate. As the synthetic resin substrate, a film of polyethylene terephthalate, polyethylene-2, 6-naphthalate, polycarbonate, polysulfone, polyethersulfone, polyether ether ketone, polyphenoxyether, polyallylate, fluororesin, polypropylene or the like can be applied

**[0031]** It is preferable that the surface of the plastic substrate covered with the inorganic barrier film 22 on the substrate includes at least a surface in contact with the organic EL elements, a surface between the organic EL elements, a surface around the organic EL elements, and a surface on the reverse side of the surface in contact with the organic EL elements. These surfaces can prevent the invasion of outgas or the like from the plastic substrate into the organic functional layer. Warping of the plastic substrate can be prevented by covering both sides of the plastic substrate with the inorganic barrier film 22 on the substrate.

**[0032]** The above-mentioned embodiment employs plasma CVD as the inorganic barrier film forming process. However, any vapor deposition method, such as sputter deposition or vacuum evaporation may be used, if so desired.

**[0033]** In the case of the above-mentioned embodiment, the organic EL display panel of the simple matrix

display type was described. The present invention is also applicable to any panel substrate of the active matrix display type using TFT (thin film transistors) or the like.

**[0034]** According to the present invention, it is possible to prevent the invasion of water and oxygen through the edge of the high-molecular compound film, and a sealing construction with an efficient sealing effect against water and oxygen can be achieved, so the organic EL element is sufficiently protected. Therefore, a highly durable organic EL display panel can be provided. In addition, a highly reliable organic EL display panel can be provided by covering the edge of the high-molecular compound film of a multilayer protective film with a protective film of inorganic barrier film.

## Claims

1. An organic electroluminescent display panel comprising:

one or more organic electroluminescent elements each having first and second display electrodes and one or more organic functional layers of organic compounds sandwiched and layered between said first and second display electrodes, the organic functional layers including a light-emitting layer; and  
a substrate supporting said organic electroluminescent elements;  
a high-molecular compound film covering said organic electroluminescent elements and a surface of the substrate around said one or more organic electroluminescent elements; and  
an inorganic barrier film covering said high-molecular compound film, an edge thereof, and a surface of the substrate around said high-molecular compound film.

2. An organic electroluminescent display panel according to claim 1, wherein said inorganic barrier film is made of silicon nitride or silicon oxynitride or silicon oxide.

3. An organic electroluminescent display panel according to claim 1 or 2, wherein said inorganic barrier film is formed by a plasma chemical vapor deposition process or a sputter deposition process.

4. An organic electroluminescent display panel according to any one of claims 1-3, wherein said high-molecular compound film is formed by a plasma polymerization deposition process or a chemical vapor deposition process.

5. An organic electroluminescent display panel according to any one of claims 1-4, wherein said high-

molecular compound film is made of polyparaxylylene.

6. An organic electroluminescent display panel according to any one of claims 1-5, wherein said substrate is a plastic substrate made of a high-molecular compound. 5
7. An organic electroluminescent display panel according to claim 6, further comprising an inorganic barrier film previously formed on the plastic substrate so as to cover a surface supporting said organic electroluminescent elements on said plastic substrate. 10
8. A method of manufacturing an organic electroluminescent display panel comprising one or more organic electroluminescent elements and a substrate supporting the organic electroluminescent elements, comprising the steps of: 15
- forming one or more organic electroluminescent elements on a substrate, each having first and second display electrodes and one or more organic functional layers of organic compounds sandwiched and layered between said first and second display electrodes, the organic functional layers including a light-emitting layer; 25
- forming a high-molecular compound film having an area larger than a display area including said organic electroluminescent elements so as to cover said organic electroluminescent elements and a surface of the substrate around said one or more organic electroluminescent elements; and 30
- forming an inorganic barrier film having an area larger than the area of said high-molecular compound film so as to cover said high-molecular compound film, an edge thereof, and a surface of the substrate around said high-molecular compound film. 35 40
9. A manufacturing method according to claim 8, wherein the edge of said high-molecular compound film is so formed that said edge becomes gradually thinner. 45
10. A manufacturing method according to claim 8 or 9, wherein said inorganic barrier film is made of silicon nitride or silicon oxynitride or silicon oxide. 50
11. A manufacturing method according to any one of claims 8-10, wherein said inorganic barrier film is formed by a plasma chemical vapor deposition process or a sputter deposition process. 55
12. A manufacturing method according to any one of claims 8-11, wherein said high-molecular com-

pound film is formed by a plasma polymerization deposition process or a chemical vapor deposition process.

FIG. 1

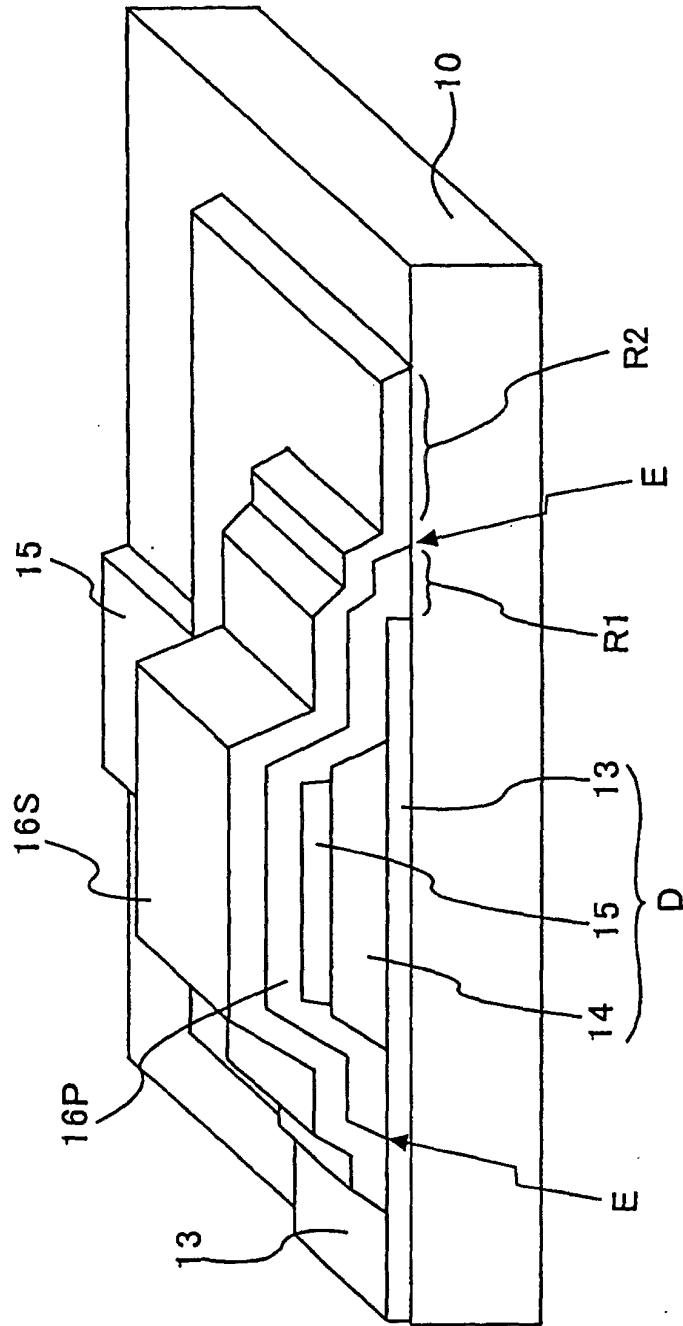


FIG. 2

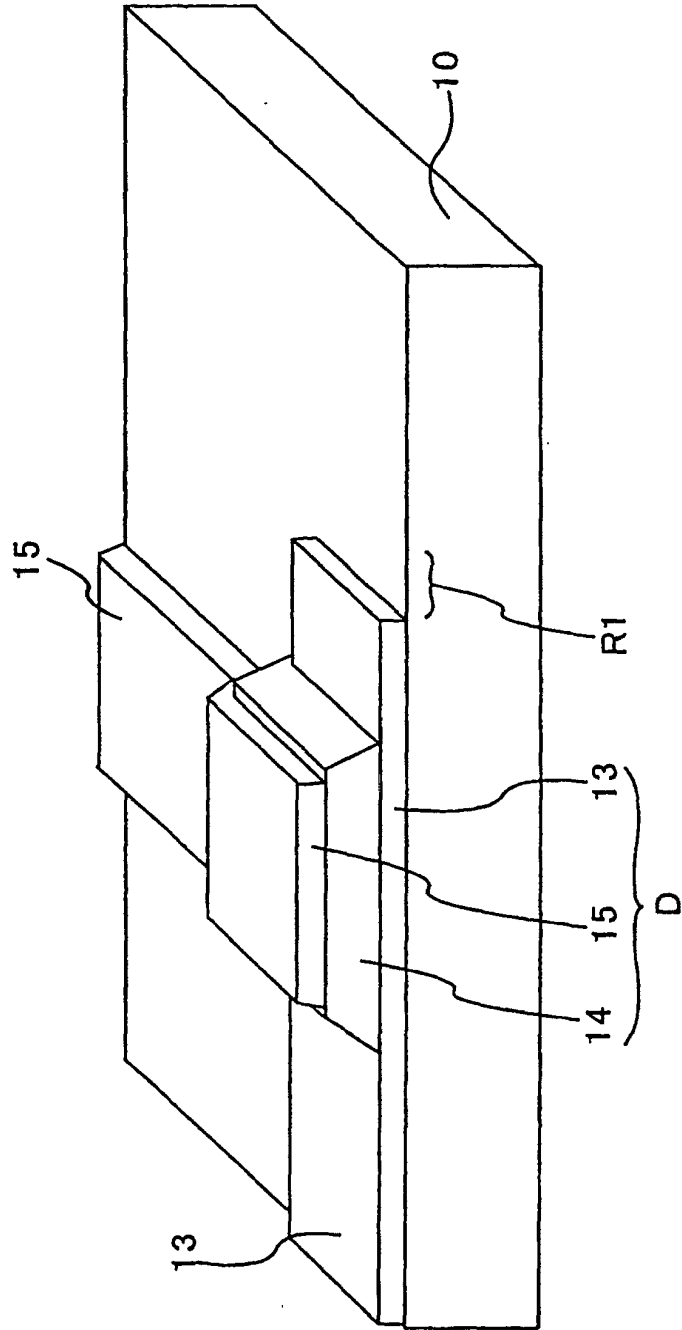




FIG. 4

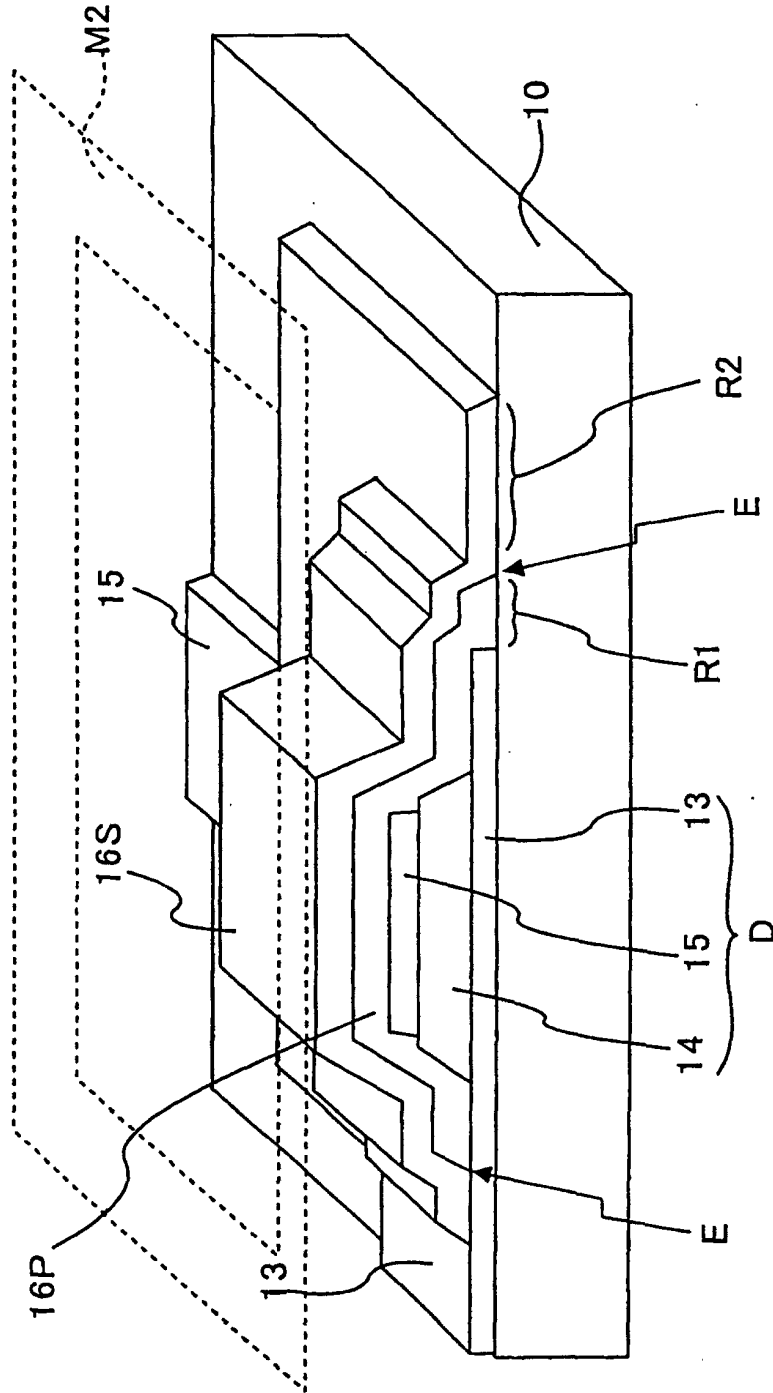


FIG. 5


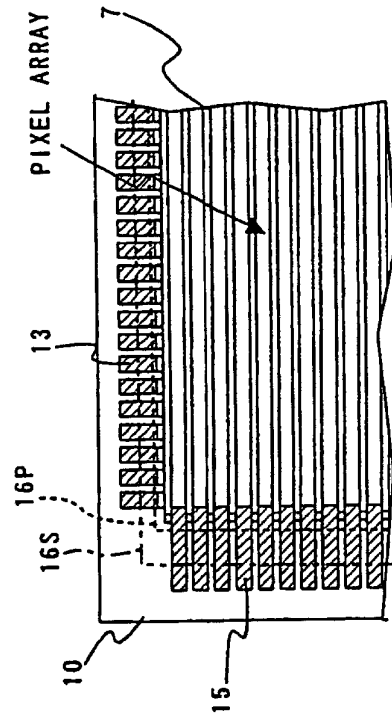


FIG. 6

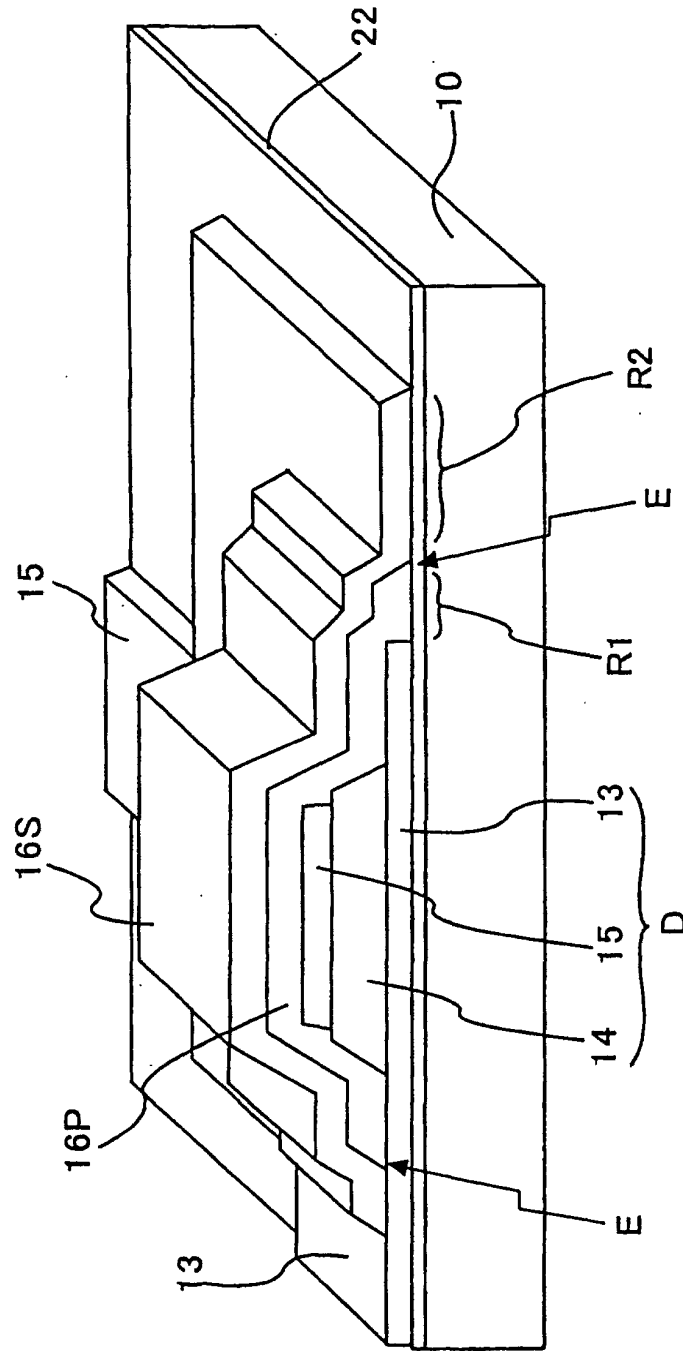

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/03311

| <p>A. CLASSIFICATION OF SUBJECT MATTER<br/>Int.Cl<sup>7</sup> H05B33/04, H05B33/10</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>   |  |   |  |   |  |  |   |  |  |  |  |   |  |     |
|---|--|---|--|---|--|--|---|--|--|--|--|---|--|-----|
| <p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols)<br/>Int.Cl<sup>7</sup> H05B33/00-33/28</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched<br/>                 Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2003<br/>                 Kokai Jitsuyo Shinan Koho 1971-2003 Toroku Jitsuyo Shinan Koho 1994-2003</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)</p>  |  |   |  |   |  |  |   |  |  |  |  |   |  |     |
| <p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>JP 2002-25765 A (Kyushu Matsushita Electric Co., Ltd.),<br/>25 January, 2002 (25.01.02),<br/>Full text; Fig. 2<br/>(Family: none)</td> <td>1-12</td> </tr> <tr> <td>Y</td> <td>JP 2000-68050 A (Casio Computer Co., Ltd.),<br/>03 March, 2000 (03.03.00),<br/>Claims; page 3, column 3, line 22 to column 4,<br/>line 36; all drawings<br/>(Family: none)</td> <td>1-12</td> </tr> <tr> <td>Y</td> <td>JP 4-137483 A (Toshiba Corp.),<br/>12 May, 1992 (12.05.92),<br/>Claims; Fig. 1<br/>(Family: none)</td> <td>4-5</td> </tr> </tbody> </table>   |  |   | Category*  | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No.  | Y  | JP 2002-25765 A (Kyushu Matsushita Electric Co., Ltd.),<br>25 January, 2002 (25.01.02),<br>Full text; Fig. 2<br>(Family: none)  | 1-12   | Y  | JP 2000-68050 A (Casio Computer Co., Ltd.),<br>03 March, 2000 (03.03.00),<br>Claims; page 3, column 3, line 22 to column 4,<br>line 36; all drawings<br>(Family: none) | 1-12   | Y | JP 4-137483 A (Toshiba Corp.),<br>12 May, 1992 (12.05.92),<br>Claims; Fig. 1<br>(Family: none) | 4-5 |
| Category*   | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No.   |  |   |  |  |   |  |  |  |  |   |  |     |
| Y   | JP 2002-25765 A (Kyushu Matsushita Electric Co., Ltd.),<br>25 January, 2002 (25.01.02),<br>Full text; Fig. 2<br>(Family: none)   | 1-12  |  |   |  |  |   |  |  |  |  |   |  |     |
| Y   | JP 2000-68050 A (Casio Computer Co., Ltd.),<br>03 March, 2000 (03.03.00),<br>Claims; page 3, column 3, line 22 to column 4,<br>line 36; all drawings<br>(Family: none)   | 1-12  |  |   |  |  |   |  |  |  |  |   |  |     |
| Y   | JP 4-137483 A (Toshiba Corp.),<br>12 May, 1992 (12.05.92),<br>Claims; Fig. 1<br>(Family: none)   | 4-5   |  |   |  |  |   |  |  |  |  |   |  |     |
| <p><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.</p>   |  |   |  |   |  |  |   |  |  |  |  |   |  |     |
| <p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier document but published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table> |  |   | "A" document defining the general state of the art which is not considered to be of particular relevance | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention | "E" earlier document but published on or after the international filing date | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone | "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art | "O" document referring to an oral disclosure, use, exhibition or other means | "&" document member of the same patent family  | "P" document published prior to the international filing date but later than the priority date claimed |   |  |     |
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |   |  |   |  |  |   |  |  |  |  |   |  |     |
| "E" earlier document but published on or after the international filing date  | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |   |  |   |  |  |   |  |  |  |  |   |  |     |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)   | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |   |  |   |  |  |   |  |  |  |  |   |  |     |
| "O" document referring to an oral disclosure, use, exhibition or other means  | "&" document member of the same patent family  |   |  |   |  |  |   |  |  |  |  |   |  |     |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |   |  |   |  |  |   |  |  |  |  |   |  |     |
| <p>Date of the actual completion of the international search<br/>28 April, 2003 (28.04.03)</p>  |  | <p>Date of mailing of the international search report<br/>20 May, 2003 (20.05.03)</p> |  |   |  |  |   |  |  |  |  |   |  |     |
| <p>Name and mailing address of the ISA/<br/>Japanese Patent Office</p>  |  | <p>Authorized officer</p>   |  |   |  |  |   |  |  |  |  |   |  |     |
| <p>Facsimile No.</p>  |  | <p>Telephone No.</p>  |  |   |  |  |   |  |  |  |  |   |  |     |

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/03311

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT |  |                       |
|---|--|-----------------------|
| Category*   | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
| Y   | JP 7-211455 A (Idemitsu Kosan Co., Ltd.),<br>11 August, 1995 (11.08.95),<br>Claims 1 to 2; page 5, column 8, lines 16 to 28<br>(Family: none)                              | 4-5,12                |
| Y   | JP 9-161967 A (Motorola, Inc.),<br>20 June, 1997 (20.06.97),<br>Claims; all drawings<br>& US 5686360 A & US 5757126 A<br>& EP 777280 A                                     | 6-7                   |
| Y   | JP 10-247587 A (TDK Corp.),<br>14 September, 1998 (14.09.98),<br>Claims 1, 4; page 9, column 15, line 27 to page 10,<br>column 17, line 16; all drawings<br>(Family: none) | 9                     |
| E,X   | JP 2002-117973 A (Toyota Central Research And<br>Development Laboratories, Inc.),<br>19 April, 2002 (19.04.02),<br>Full text; Figs. 2, 8<br>(Family: none)                 | 1-4,8,10-12           |

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

|                |   |         |            |
|----------------|---|---------|------------|
| 专利名称(译)        | 有机电致发光显示板及其制造方法                         |         |            |
| 公开(公告)号        | <a href="#">EP1489889A1</a>             | 公开(公告)日 | 2004-12-22 |
| 申请号            | EP2003744996                            | 申请日     | 2003-03-19 |
| [标]申请(专利权)人(译) | 日本先锋公司                                  |         |            |
| 申请(专利权)人(译)    | 先锋公司                                    |         |            |
| 当前申请(专利权)人(译)  | 先锋公司                                    |         |            |
| [标]发明人         | KUBOTA HIROFUMI PIONEER CORPORATION     |         |            |
| 发明人            | KUBOTA, HIROFUMI, PIONEER CORPORATION   |         |            |
| IPC分类号         | H05B33/04 H01L51/50 H01L51/52 H05B33/10 |         |            |
| CPC分类号         | H01L51/5256                             |         |            |
| 优先权            | 2002082512 2002-03-25 JP                |         |            |
| 其他公开文献         | EP1489889A4                             |         |            |
| 外部链接           | <a href="#">Espacenet</a>               |         |            |

摘要(译)

有机电致发光显示面板包括一个或多个有机电致发光元件和支撑它们的基板。每个有机电致发光元件具有第一和第二显示电极以及夹在第一和第二显示电极之间的有机化合物的一个或多个有机功能层，所述有机功能层包括发光层。这种显示面板具有覆盖有机电致发光元件的高分子化合物膜和围绕一个或多个有机电致发光元件的基板表面；和覆盖高分子化合物膜的无机阻挡膜，其边缘和高分子化合物膜周围的基板表面。

