



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11) EP 1 786 886 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
23.02.2011 Bulletin 2011/08

(21) Application number: **05808769.3**

(22) Date of filing: **01.09.2005**

(51) Int Cl.:
C09K 11/06 (2006.01)

(86) International application number:
PCT/KR2005/002896

(87) International publication number:
WO 2006/025700 (09.03.2006 Gazette 2006/10)

**(54) ANTHRACENE DERIVATIVES AND ORGANIC LIGHT EMITTING DEVICE USING THE SAME AS
A LIGHT EMITTING MATERIAL**

ANTHRACENDERIVATE UND DEREN VERWENDUNG ALS LICHTEMITTIERENDES MATERIAL IN
ORGANISCHER LICHTEMITTIERENDER VORRICHTUNG

DERIVES D'ANTHRACENE ET DISPOSITIF ORGANIQUE ELECTROLUMINESCENT LES
UTILISANT EN TANT QUE MATERIAU ELECTROLUMINESCENT

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **02.09.2004 KR 2004070100**

(43) Date of publication of application:
23.05.2007 Bulletin 2007/21

(73) Proprietor: **LG Chem, Ltd.**
Youngdungpo-gu
Seoul 150-721 (KR)

(72) Inventors:

- **KIM, Ji Eun;**
7-403 LG chemistry partner APT.,
Daejeon Metropolitan City 305-340 (KR)
- **SON, Se Hwan;**
102-704 Hyundai APT.,
Daejeon Metropolitan City 305-340 (KR)
- **LEE, Jae Chol;**
8-107 LG chemistry APT.,
Daejeon Metropolitan City 305-340 (KR)

- **BAE, Jae Soon;**
106-305 Expo APT.,
Daejeon Metropolitan City 305-761 (KR)
- **KIM, Kong Kyoom;**
107-703 Expo APT.,
Daejeon Metropolitan City 305-761 (KR)
- **KANG, Min Soo;**
114-1407 Han Maeul APT.,
Daejeon Metropolitan City 305-756 (KR)
- **JEON, Sang Young;**
Seoul 143-849 (KR)

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastraße 4
81925 München (DE)

(56) References cited:
**EP-A1- 0 726 500 WO-A-2005/100506
JP-A- 11 249 311 JP-A- 2004 059 535
US-A1- 2004 126 617 US-A1- 2005 113 477**

EP 1 786 886 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Technical Field**

5 [0001] The present invention relates to a novel compound and an organic light emitting device using the same. More particularly, the present invention pertains to novel anthracene derivatives having electroluminescence and an organic light emitting device using the same as a light emitting material.

Background Art

10 [0002] Generally, an organic light emitting device has a structure in which thin organic material layers are layered between two opposite electrodes, and the organic material layers may form a multilayered structure including different materials so as to increase the efficiency and stability of the device. For example, as shown in FIG. 1, the organic light emitting device may have a structure in which a substrate 101, an anode 102, a hole injection layer 103, a hole transport layer 104, a light emitting layer 105, an electron transport layer 106, and a cathode 107 are sequentially layered.

15 [0003] Meanwhile, an effort has been made to use a compound containing an anthracene group in an organic light emitting device since early in the 1960's. In the year 1965, Helfrich and Pope reported the realization of blue organic electroluminescence using a single crystal of anthracene for the first time. However, a high voltage is required to emit light using a single crystal of anthracene, and there are many problems in commercialization due to the short life of the


20 device (W. Helfrich, W. G. Schneider, Phys. Rev. Lett. 14, 229, 1965. M. Pope, H. Kallmann, J. Giachino, J. Chem. Phys., 42, 2540, 1965).

25 [0004] Recently, much effort has been made to introduce various substitutes to an anthracene molecule and apply the resulting molecule to an organic light emitting device. For example, US. Pat. Nos. 5,935,721 (Formula A), 5,972,247 (Formula B), 6,251,531 (Formula C), and 5,635,308 (Formula D), EP 0681019 (Formula E), and Korean Patent Registration No. 10-0422914 (Formula F) disclose anthracene derivatives as a blue light emitting material. Furthermore, EP 1009044 (Formula G) discloses an anthracene derivative as a hole transport material. Additionally, Japanese Patent Laid-Open Publication No. Hei.11-345686 (Formula H) discloses an anthracene derivative as an electron transport material and a blue light emitting material.

30

Formula A

35



40


45

50

55

Formula B

5



10

15

Formula C

20

25


30

Formula D

35

40

45



Formula E

50


55

5

10

15

Formula F



20


25

30

Formula G

35

40




R1~R4 = H, alkyl(C1~C5),
aryl(C5~C20),
heteroaryl(C5~C24)

45

Formula H

50

55



[0005] Additionally, Korean Patent Laid-Open Publication No. 10-2002-0003025 discloses an anthracene derivative as an electron transport material, and Korean Patent Registration No. 10-0422914 discloses a compound, in which an aryl group having a high melting point is introduced to a position 2 of anthracene, as a light emitting material.

[0006] WO 2005/100506 discloses anthracene derivatives for a light emitting layer.

[0007] US 2004/0126617 discloses anthracene derivables for organic electroluminescent devices.

Disclosure of Invention

5

Technical Problem

[0008] The present inventors have conducted studies into the synthesis of an anthracene derivative having a novel structure, resulting in the finding that it is possible to improve the life of an organic light emitting device and to realize low voltage driving when this compound is used as a light emitting material of the organic light emitting device.

[0009] Therefore, an object of the present invention is to provide an anthracene derivative having a novel structure and an organic light emitting device using the same.


Technical Solution

15

[0010] The present invention provides a compound having the following Formula 1.

Formula 1

20



25

[0011] In Formula 1, R1, R2, and R3 are each as defined in the appended Claim 1.

[0012] Furthermore, the present invention provides an organic light emitting device which comprises a first electrode, one or more organic material layers, and a second electrode which are sequentially layered. One or more layers of the organic material layers include the compound of Formula 1.

Brief Description of the Drawings

35

[0013]

FIGS. 1 to 5 illustrate examples of organic light emitting devices to which a novel compound according to the present invention is applied.

40

Best Mode for Carrying Out the Invention

[0014] Hereinafter, a detailed description of the present invention will be given.


[0015] As described above, anthracene has high light emitting efficiency, and has been known to be an important chemical structure capable of constituting an organic material layer of an organic light emitting device since the 1960's. Furthermore, many patent documents disclose that it is possible to increase the performance of an organic light emitting device by applying a substitute, particularly an aryl group, to positions 9 and 10 of anthracene.

[0016] The present inventors found that, if radicals which were selected from the group consisting of a phenyl group, a 1-naphthyl group, a 2-naphthyl group, and pyrene were symmetrically or asymmetrically applied to positions 9 and 10 of anthracene and if the radical which was selected from the group consisting of a phenyl group, a 1-naphthyl group, a 2-naphthyl group, and pyrene was applied to position 2 of anthracene as shown in the compound of the following Formula 1, the compound could be used as a light emitting material of the organic light emitting device.

55

Formula 1

5



10

[0017] In Formula 1, R1, R2, and R3 are each as defined in the appended Claim 1.


[0018] Furthermore, the present inventors found that the organic light emitting device using the compound of Formula 1 has a longer life span than a conventional organic light emitting device using an anthracene derivative which is substituted with aromatic hydrocarbons, and can be driven at a low voltage. Furthermore, they found that, if a predetermined fluorescent material is doped to a light emitting layer comprising the compound of Formula 1, it is possible to significantly increase the driving life of the device.

[0019] Examples of the compounds of above-mentioned Formula 1 are compounds of the following Formulae 2 to 14.

20

Formula 2


25



30

Formula 3


35



45

Formula 4

50




55

Formula 11

5

10




15

Formula 12

20


25



30

35

40




45

Formula a


50

55



Formula b


5



10

Formula c

15



20

[0021] For example. After dissolving 2-bromoanthraquinone completely in toluene, boronic acid, which is selected from the group consisting of phenylboronic acid, 1-naphthaleneboronic acid, and 2-naphthaleneboronic acid, a potassium carbonate solution, tetrakis(triphenylphosphine)palladium(0), and ethanol are added thereto, and reflux is conducted to produce the starting materials of Formula a to Formula c.

[0022] Subsequently, t-butyl lithium (5 eq. 1.7 M solution in hexane) and the starting materials of Formula a to Formula c are added to and reacted with a solution of aryl halides in THF at -78°C to produce dialcohols. The Dialcohols, potassium iodide, and sodium hypophosphite are recycled in acetic acid to produce the compound of Formula 1.

[0023] A more detailed description of the production will be given in the preparation examples, and it is to be understood that modifications of the methods disclosed in the preparation examples will be apparent to those skilled in the art.


[0024] The present invention provides an organic light emitting device which comprises a first electrode, one or more organic material layers, and a second electrode which are sequentially layered. One or more layers of the organic material layers comprise the compound of the above Formula 1.

[0025] The organic material layer of the organic light emitting device according to the present invention may have a single layer structure, or alternatively, a multilayered structure in which two or more organic material layers are layered. For example, the organic light emitting device of the present invention may have the organic material layers comprising a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer, and an electron injection layer. However, the structure of the organic light emitting device is not limited to this, but may comprise a smaller number of organic material layers. Illustrative, but non-limiting examples of the structures of the organic light emitting device according to the present invention are shown in FIGS. 1 to 5.


[0026] In the organic light emitting device having the multilayered structure, the compound of Formula 1 may be included in the light emitting layer. Additionally, the layer comprising the compound of Formula 1 may further comprise a light emitting guest material.

[0027] In the present invention, illustrative, but non-limiting examples of the light emitting guest material which is capable of being doped in the light emitting layer comprising the compound of the above Formula 1 include the following compounds.


50




55




5




15




20

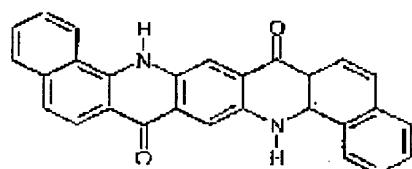

30




40



45


50

5

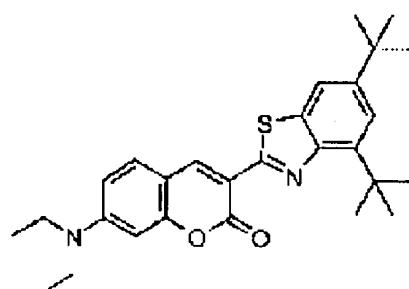

10


15

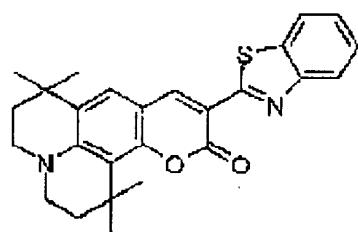

20


25

30

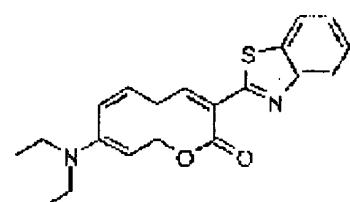


35

40




45


50




55




10

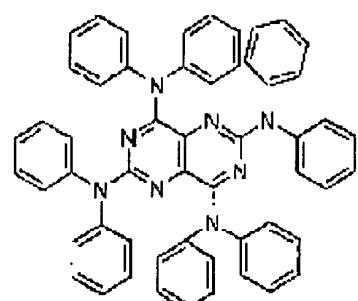


25

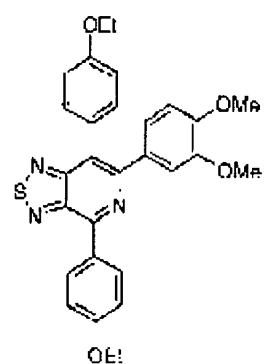

40

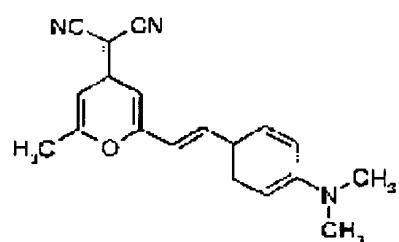

50

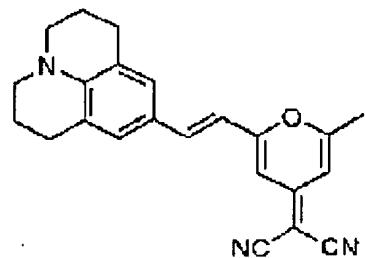


[0028] In the present invention, after a dopant as the light emitting guest material is selected, a compound which has a band gap matched with the selected dopant is selected, among the compounds of Formula 1 to be used as a light emitting host.

[0029] In the organic light emitting device of the present invention, when a predetermined dopant, for example, the dopant of the following Formula 15, is applied to the light emitting layer containing the compound of Formula 1, it is possible to significantly increase the life of the device.

Formula 15

10

15



[0030] In the organic light emitting device of the present invention, the layer comprising the compound of Formula 1 may be formed between an anode and a cathode through a vacuum deposition method or a solution coating method. Illustrative, but non-limiting examples of the solution coating method are a spin coating method, a dip coating method, a doctor blading method, an inkjet printing method, and a heat transcription method.

[0031] The organic light emitting device of the present invention can be produced using known materials and through a known process, except for one or more layers of organic material layers include the compound of Formula 1.

[0032] For example, the organic light emitting device of the present invention may be produced by sequentially layering a first electrode, an organic material layer, and a second electrode on a substrate. In connection with this, a physical vapor deposition (PVD) method, such as a sputtering method or an e-beam evaporation method, may be used, but the method is not limited to these.

30 Mode for the Invention

[0033] A better understanding of the present invention may be obtained in light of the following preparation examples and examples which are set forth to illustrate, but are not to be construed to limit the present invention.

35 Preparation of a starting material

Preparation of a starting material of Formula a


[0034]

40

Formula a

45

50




[0035] 2-bromoanthraquinone (24.2 mmol, 6.96 g) was completely dissolved in 120 mL of toluene, thereto phenylboronic acid (29.0 mmol, 3.54 g), 50 mL of 2M potassium carbonate solution, tetrakis(triphenylphosphine)palladium(0) (0.73 mmol, 0.84 g), and 10 mL of ethanol were added. Reflux was then conducted for 3 hours. After the reaction was completed, it was cooled to room temperature, filtered, and washed a few times using water and ethanol. A filtered solid product was separated using column chromatography and crystallized in ethanol to produce 5.10 g of the compound of Formula a (17.9 mmol, 74 %).

Preparation of a starting material of Formula b**[0036]**

5

Formula b

10



15

[0037] The procedure of producing the starting material of Formula a was repeated to produce 6.5 g of compound of Formula b (19.4 mmol, 80 %) except that 1-naphthaleneboronic acid (29.1 mmol, 5.00 g) was used instead of phenylboronic acid (29.0 mmol, 3.54 g).


20

Preparation of a starting material of Formula c**[0038]**

25

Formula c

30



35

[0039] The procedure of producing the starting material of Formula a was repeated to produce 6.5 g of the compound of Formula c (19.4 mmol, 80 %) except that 2-naphthaleneboronic acid (29.1 mmol, 5.00 g) was used instead of phenylboronic acid (29.0 mmol, 3.54 g).


40

PREPARATION EXAMPLE 1Preparation of a compound of Formula 2**[0040]**

45

Formula 2

50



55

[0041] Bromobenzene (8.7 mmol, 1.36 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (8.5 ml, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula a (2.90 mmol, 0.82 g) was added to the reactants. After 30 min, a cooling vessel was removed, and a reaction was conducted at room temperature for 3 hours. After the reaction was finished, NH₄ Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried, using anhydrous magnesium sulfate, and concentrated. After a small amount of ethyl ether was added thereto and stirring was conducted, petroleum ether was added and stirring was conducted. Subsequently, filtering and drying were conducted to obtain 1.00 g of dialcohols (2.27 mmol, 78 %).

[0042] The resulting dialcohols (1.0 g, 2.27 mmol), potassium iodide (3.77 g, 22.7 mmol), and sodium hypophosphite (4.81 g, 45.4 mmol) were recycled in 200 mL of acetic acid for 3 hours.


[0043] The resultant material was cooled to room temperature, filtered, washed a few times using water and methanol, and dried to obtain the compound of Formula 2 (0.85 g, 2.09 mmol, 92 %). MS [M+H] 407.

PREPARATION EXAMPLE 2

Preparation of a compound of Formula 3

[0044]

Formula 3



[0045] Bromobenzene (8.7 mmol, 1.36 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (8.5 ml, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula b (2.90 mmol, 0.97 g) was added to the reactants. After 30 min, a cooling vessel was removed, and the reaction was conducted at room temperature for 3 hours. After the reaction was finished, an NH₄Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried using anhydrous magnesium sulfate and concentrated. A small amount of ethyl ether and petroleum ether were sequentially added thereto, and stirring was conducted for 15 hours. The solid product was filtered and dried to produce 1.30 g of dialcohols (2.65 mmol, 91 %).

[0046] The resulting dialcohols (1.30 g, 2.65 mmol), potassium iodide (4.40 g, 26.5 mmol), and sodium hypophosphite (5.60 g, 53.0 mmol) were recycled in 200 mL of acetic acid for 3 hours. Subsequently, the resultant material was cooled to room temperature, filtered, washed a few times using water and methanol, and dried to produce the compound of Formula 3 (1.10 g, 2.41 mmol, 90 %). MS [M+H] 457.


PREPARATION EXAMPLE 3

Preparation of a compound of Formula 4

[0047]

Formula 4

5



10

[0048] The procedure of preparation example 2 was repeated to produce the compound of Formula 4 (1.10 g, 2.41 mmol, 90 %) except that the starting material of Formula c was used instead of the starting material of Formula b. MS [M+H] 457.

PREPARATION EXAMPLE 4 (For reference only and outside the scope of the invention)


20 Preparation of a compound of Formula 6

[0049]

25

Formula 6

30



35

[0050] 1-bromonaphthalene (8.70 mmol, 1.80 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (8.5 mL, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula b (2.90 mmol, 0.97 g) was added to the reactants. After 30 min, a cooling vessel was removed, and a reaction was conducted at room temperature for 3 hours. After the reaction was finished, NH₄ Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried using anhydrous magnesium sulfate and concentrated. A small amount of ethyl ether and petroleum ether were sequentially added thereto, and stirring was conducted for 15 hours. The solid product was filtered and dried to produce 1.50 g of dialcohols (2.54 mmol, 88 %).

[0051] The resulting dialcohols (1.50 g, 2.54 mmol), potassium iodide (4.21 g, 25.4 mmol), and sodium hypophosphite (5.38 g, 50.8 mmol) were recycled in 200 mL of acetic acid for 3 hours. The resultant material was cooled to room temperature, filtered, washed a few times using water and methanol, and dried to produce the compound of Formula 6 (1.30 g, 2.34 mmol, 92 %). MS [M+H] 557.

PREPARATION EXAMPLE 5 (For reference only and outside the scope of the invention)


50

Preparation of a compound of Formula 8

[0052]

55

Formula 8



15 [0053] 2-bromonaphthalene (8.70 mmol, 1.80 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (8.5 mL, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula a (2.90 mmol, 0.82 g) was added to the reactants. After 30 min, a cooling vessel was removed, and the reaction was conducted at room temperature for 3 hours. After the reaction was finished, an NH₄Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried using anhydrous magnesium sulfate and concentrated. A small amount of ethyl ether and petroleum ether were sequentially added thereto, and stirring was conducted for 15 hours. The solid product was filtered and dried to produce 1.40 g of dialcohols (2.58 mmol, 89 %).


20 [0054] The resulting dialcohols (1.40 g, 2.58 mmol), potassium iodide (4.28 g, 25.8 mmol), and sodium hypophosphite (5.46 g, 51.6 mmol) were recycled in 200 mL of acetic acid for 3 hours. The resultant material was cooled to room 25 temperature, filtered, washed a few times using water and methanol, and dried to produce the compound of Formula 8 (1.20 g, 2.37 mmol, 92 %). MS [M+H] 507.

PREPARATION EXAMPLE 6 (For reference only and outside the scope of the invention)

30 Preparation of a compound of Formula 9

[0055]

Formula 9




50 [0056] The procedure of preparation example 4 was repeated to produce the compound of Formula 9 (1.30 g, 2.34 mmol, 92 %) except that 2-bromonaphthalene was used instead of 1-bromonaphthalene. MS [M+H] 557.

PREPARATION EXAMPLE 7 (For reference only and outside the scope of the invention)

55 Preparation of a compound of Formula 10

[0057]

Formula 10




[0058] The procedure of preparation example 6 was repeated to produce the compound of Formula 10 (1.30 g, 2.34 mmol, 92 %) except that the starting material of Formula c was used instead of the starting material of Formula b. MS [M+H] 557.

PREPARATION EXAMPLE 8

Preparation of a compound of Formula 12

[0059]

Formula 12



[0060] Bromobenzene (9.87 mmol, 1.55 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (6.9 mL, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula c (8.97 mmol, 3.00 g) was added to the reactants. After 30 min, a cooling vessel was removed, and a reaction was conducted at room temperature for 3 hours. After the reaction was finished, an NH₄Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried using anhydrous magnesium sulfate, concentrated, separated using column chromatography, and dried to produce 1.40 g of alcohols (3.39 mmol, 38 %).

[0061] 2-bromonaphthalene (5.90 mmol, 1.22 g) was added to 50 mL of dried THF to be completely dissolved therein, and t-butyl lithium (5 mL, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, alcohols as described above (1.69 mmol, 0.70 g) were added to the reactants. After 30 min, a cooling vessel was removed, and a reaction was conducted at room temperature for 3 hours. After the reaction was finished, NH₄Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. A small amount of ethyl ether and petroleum ether were sequentially added thereto, and stirring was conducted for 15 hours. The solid product was filtered and dried to produce 0.64 g of dialcohols (1.18 mmol, 70 %).

[0062] The resulting dialcohols (0.64 g, 1.18 mmol), potassium iodide (1.97 g, 11.84 mmol), and sodium hypophosphite (2.50 g, 23.68 mmol) were recycled in 100 mL of acetic acid for 3 hours. The resultant material was cooled to room temperature, filtered, washed a few times using water and methanol, and dried to produce the compound of Formula 12 (0.50 g, 0.99 mmol, 84 %). MS [M+H] 507.

PREPARATION EXAMPLE 9

Preparation of a compound of Formula 14


5 [0063]

Formula 14

10

15

20



[0064] 1-bromopyrene (8.70 mmol, 2.5 g) was added to 100 mL of dried THF to be completely dissolved therein, and t-butyl lithium (8.5 mL, 1.7 M solution in hexane) was very slowly added thereto at - 78°C. After 1 hour, the starting material of Formula c (2.90 mmol, 1.0 g) was added to the reactants. After 30 min, a cooling vessel was removed, and a reaction was conducted at room temperature for 3 hours. After the reaction was finished, NH₄ Cl aqueous solution was added thereto, and extraction was conducted using ethyl ether. The extract was dried using anhydrous magnesium sulfate and concentrated. A small amount of ethyl ether and petroleum ether were sequentially added thereto, and stirring was conducted for 15 hours. The solid product was filtered and dried to produce 1.93 g of dialcohols (2.61 mmol, 90 %).

[0065] Dialcohols (1.93 g, 2.61 mmol), potassium iodide (4.33 g, 26.1 mmol), and sodium hypophosphite (5.53 g, 52.2 mmol) were recycled in 200 mL of acetic acid for 3 hours. The resultant material was cooled to room temperature, filtered, washed a few times using water and methanol, and dried to produce the compound of Formula 14 (1.69 g, 2.4 mmol, 92 %). MS [M+H] 704.

35 Preparation of an organic light emitting device


EXAMPLE 1

[0066] A glass substrate, on which ITO (indium tin oxide) was applied to a thickness of 1500 Å to form a thin film, was put in distilled water, in which a detergent was dissolved, and then washed using ultrasonic waves. A product manufactured by Fischer Inc. was used as a detergent, and distilled water was produced through filtering twice using a filter manufactured by Millipore Inc. After ITO was washed for 30 min, ultrasonic washing was conducted in distilled water twice for 10 min. After the washing using distilled water was finished, ultrasonic washing was conducted using a solvent, such as isopropyl alcohol, acetone, or methanol, and drying was then conducted. Subsequently, it was transported to a plasma washing machine. The substrate was washed using oxygen plasma for 5 min, and then transported to a vacuum evaporator.

[0067] Hexanitrile hexaaazatriphenylene of the following Formula was vacuum deposited to a thickness of 500 Å by heating on a transparent ITO electrode, which was prepared through the above procedure, to form a hole injection layer.


50

55

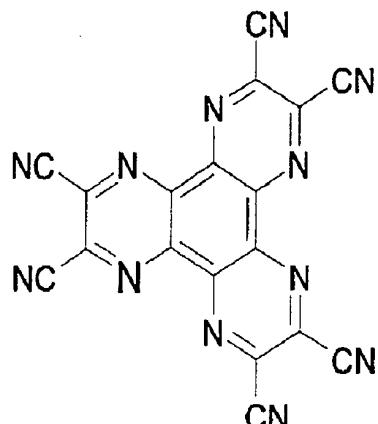

15

[0068] Subsequently, NPB (400 Å) which was a material for transporting holes was vacuum deposited on the hole injection layer, and the compound of Formula 4 produced in preparation example 3 was vacuum deposited thereonto in a thickness of 300 Å to form a light emitting layer. A compound of the following Formula for injecting and transporting electrons was vacuum deposited on the light emitting layer to a thickness of 200 Å.

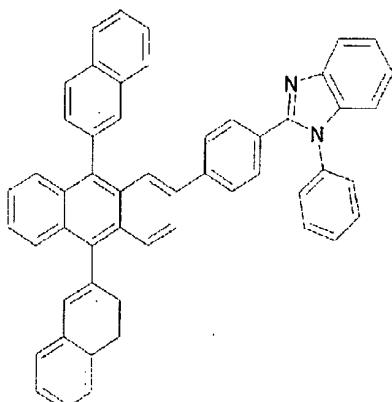

25

30

35

[0069] Lithium fluoride (LiF) and aluminum were sequentially deposited to thicknesses of 5 Å and 2500 Å, respectively, on the electron injection and transport layer to form a cathode, thereby the organic light emitting device was created.

40 [0070] In the above procedure, the deposition speed of an organic material was maintained at 1 Å/sec, and lithium fluoride and aluminum were deposited at a speed of 0.2 Å/sec and 3 - 7 Å/sec, respectively.

[0071] A forward electric field of 6.2 V was applied to the resulting organic light emitting device, and a blue spectrum having brightness of 1400 nit was observed at a current density of 100 mA/cm², and corresponded to x = 0.18 and y = 0.23 based on a 1931 CIE color coordinate. Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm², the time required to reduce brightness to 50 % of initial brightness was 600 hours.

EXAMPLE 2 For reference only and outside the scope of the invention

50 [0072] An organic light emitting device was produced through the same procedure as example 1 except that a light emitting layer was formed using the compound of Formula 9 produced in preparation example 6 instead of the compound of Formula 4.

[0073] A forward electric field of 6.7 V was applied to the resulting organic light emitting device, and a blue spectrum having brightness of 1380 nit, which corresponds to $x = 0.17$ and $y = 0.22$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm². Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm², the time required to reduce brightness to 50 % of initial brightness was 500 hours.

EXAMPLE 3 For reference only and outside the scope of the invention

[0074] An organic light emitting device was produced through the same procedure as example 1, except that the light emitting layer was formed using the compound of Formula 10 produced in preparation example 7 instead of the compound of Formula 4.

[0075] A forward electric field of 6.5 V was applied to the resulting organic light emitting device, and a blue spectrum having brightness of 1410 nit, which corresponds to $x = 0.17$ and $y = 0.22$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 450 hours.

EXAMPLE 4


[0076] An organic light emitting device was produced through the same procedure as example 1 except that the light emitting layer was formed using the compound of Formula 12 produced in preparation example 8 instead of the compound of Formula 4.

[0077] A forward electric field of 6.3 V was applied to the resulting organic light emitting device, and a blue spectrum having brightness of 1500 nit, which corresponds to $x = 0.17$ and $y = 0.21$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 260 hours.

EXAMPLE 5

[0078] An organic light emitting device was produced through the same procedure as example 1 except that the compound of Formula 15 was doped to the compound of Formula 4 produced in preparation example 3 at a ratio of 100:2 to form the light emitting layer to a thickness of 300 \AA instead of forming the light emitting layer using only the compound of Formula 4.

Formula 15



[0079] A forward electric field of 6.0 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 7200 nit, which corresponds to $x = 0.232$ and $y = 0.618$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 1250 hours.

EXAMPLE 6 For reference only and outside the scope of the invention

[0080] An organic light emitting device was produced through the same procedure as example 5 except that the light emitting layer was formed using the compound of Formula 9 produced in preparation example 6 instead of using the compound of Formula 4.

[0081] A forward electric field of 6.1 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 7100 nit, which corresponds to $x = 0.231$ and $y = 0.617$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 1200 hours.

EXAMPLE 7 For reference only and outside the scope of the invention

[0082] An organic light emitting device was produced through the same procedure as example 5 except that the light emitting layer was formed using the compound of Formula 10, produced in preparation example 7, instead of using the compound of Formula 4.

[0083] A forward electric field of 6.2 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 7000 nit, which corresponds to $x = 0.231$ and $y = 0.618$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 1200 hours.

5

EXAMPLE 8

[0084] An organic light emitting device was produced through the same procedure as example 5 except that the light emitting layer was formed using the compound of Formula 12, produced in preparation example 8, instead of using the compound of Formula 4.

[0085] A forward electric field of 6.0 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 7900 nit, which corresponds to $x = 0.249$ and $y = 0.617$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 800 hours.

15

EXAMPLE 9

[0086] An organic light emitting device was produced through the same procedure as example 1 except that the light emitting layer was formed using the compound of Formula 14 produced in preparation example 9 instead of using the compound of Formula 4.


[0087] A forward electric field of 7.25 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 2640 nit, which corresponds to $x = 0.44$ and $y = 0.36$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 300 hours.

25

COMPARATIVE EXAMPLE 1

[0088] An organic light emitting device was produced through the same procedure as example 5 except that the light emitting layer was formed using a compound of the following Formula, disclosed in US Patent No. 5,935,721, instead of using the compound of Formula 4.

35

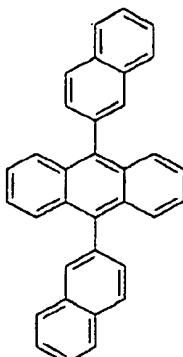


40

[0089] A forward electric field of 6.6 V was applied to the resulting organic light emitting device, and a green spectrum having brightness of 7000 nit, which corresponds to $x = 0.272$ and $y = 0.61$ based on a 1931 CIE color coordinate, was observed at a current density of 100 mA/cm^2 . Furthermore, when a constant direct current was applied to the device at a current density of 50 mA/cm^2 , the time required to reduce brightness to 50 % of initial brightness was 300 hours.

[0090] Materials of the light emitting layer, which were used in examples and the comparative example, along with test results, are summarized in the following Table 1.

55

Table 1

	Material of light emitting layer	Driving voltage(V)	Current density (mA/cm ²)	Color coordinate*	brightness (nit)	Life span** (hours)
5	Example 1	Formula 4	6.2	100 x=0.18y=0.23	1400	200
10	Example 2 ⁺	Formula 9	6.7	100 x=0.17y=0.22	1380	500
15	Example 3 ⁺	Formula 10	6.5	100 x=0.17y=0.22	1410	450
20	Example 4	Formula 12	6.3	100 x=0.17y=0.21	1500	260
25	Example 5	Formula 4,doping of green light emitting material ***	6.0	100 x=0.232y=0.618	7200	1250
30	Example 6 ⁺	Formula 9,doping of green light emitting material ***	6.1	100 x=0.231y=0.617	7100	1200
35	Example 7 ⁺	Formula 10,doping of green light emitting material ***	6.2	100 x=0.231y=0.618	7000	1200
40	Example 8	Formula 12,doping of green light emitting material ***	6.0	100 x=0.249y=0.617	7900	800
45	Example 9	Formula 14	7.25	50 x=0.44y=0.36	2640	300
50	Comparative Example 1	 doping of green light emitting material ***	6.6	100 x=0.272y=0.610	7000	300
55	Color coordinate*: based on 1931 CIE color coordinate Life span**: A time which is required to reduce brightness to 50 % of initial brightness when a constant direct current is applied at a current density of 50 mA/cm ² Green light emitting material***:					
	+(For reference only and outside the scope of the invention)					

[0091] From the above Table 1, it can be seen that, when the compound of the present invention is used as the sole light emitting material or light emitting host in the organic light emitting device, a life span of the device is significantly improved and it is possible to drive the device at a low voltage in comparison with a conventional anthracene derivative

which is substituted with aromatic hydrocarbons.


Industrial Applicability

5 [0092] A compound of the present invention can be used as a sole light emitting material or light emitting host of an organic light emitting device, and the organic light emitting device using the compound of the present invention has a long life span and can be driven at a low voltage.

10 **Claims**

1. A compound having the following Formula 1:

15 [Formula 1]




wherein:

30 R₁ is selected from the group consisting of a phenyl group and a pyrene, and


R₂ and R₃ each independently is selected from the group consisting of a phenyl group, an 1-naphthyl group, a 2-naphthyl group, and a pyrene.

35 2. The compound as set forth in claim 1, wherein the compound of Formula 1 is selected from a group consisting of compounds of the following Formulae 2 to 4, 11, 12 and 14:


40 **Formula 2**




45 **Formula 3**




50 **Formula 4**




5 Formula 11



10 Formula 12




15 and Formula 14

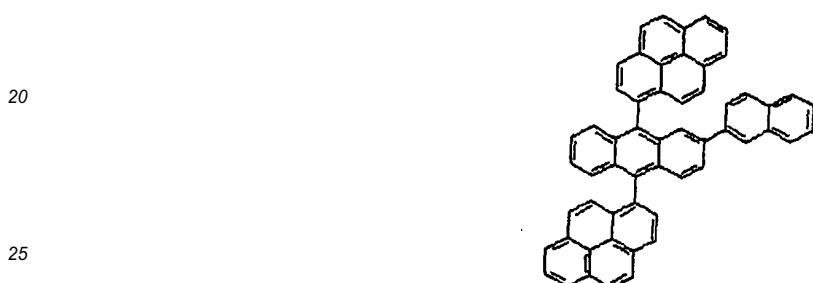

30 3. An organic light emitting device comprising a first electrode, one or more organic material layers, and a second electrode which are sequentially layered, wherein one or more layers of the organic material layers include a compound of Formula 1:

35 [Formula 1]



45 wherein:

40 R_1 is selected from the group consisting of a phenyl group and a pyrene, and
 R_2 and R_3 each independently is selected from the group consisting of a phenyl group, an 1-naphthyl group, a 2-naphthyl group, and a pyrene.

50 4. The organic light emitting device as set forth in claim 3, wherein said organic material layers comprise light emitting layers, and the light emitting layer comprises the compound of Formula 1.


55 5. The organic light emitting device as set forth in claim 3, wherein the organic material layer, which includes the compound of Formula 1, further comprises a light emitting guest material.

6. The organic light emitting device as set forth in claim 5, wherein said light emitting guest material is a compound

with the following Formula 15:

5 [Formula 15]

10




15

Patentansprüche

20 1. Verbindung der folgenden Formel (1):

25

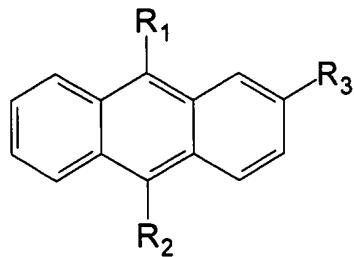

30

Formel (1)

35

worin:

40 R_1 aus der Gruppe bestehend aus einer Phenylgruppe und einem Pyren ausgewählt ist, und
 R_2 und R_3 jeweils unabhängig voneinander aus der Gruppe bestehend aus einer Phenylgruppe, einer 1-Naphthylgruppe, einer 2-Naphthylgruppe und einem Pyren ausgewählt sind.


45

2. Verbindung, wie in Anspruch 1 dargelegt, wobei die Verbindung der Formel (1) aus der Gruppe bestehend aus Verbindungen der folgenden Formeln (2) bis (4), (11), (12) und (14) ausgewählt ist:


50

55

5

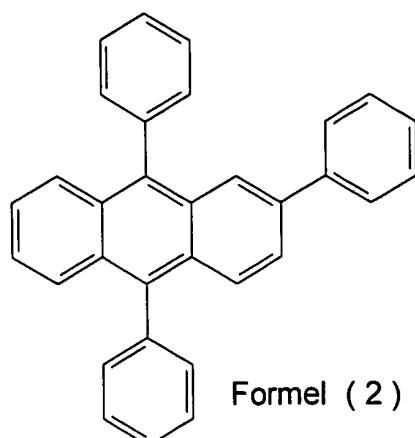


10

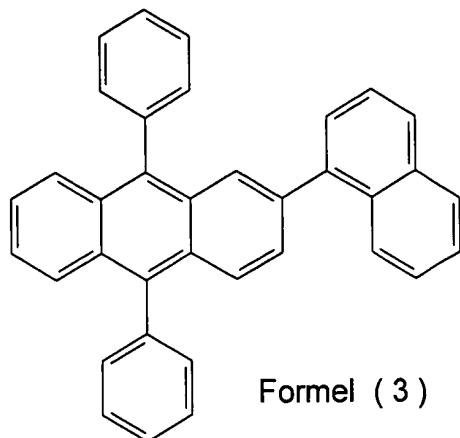


15

20

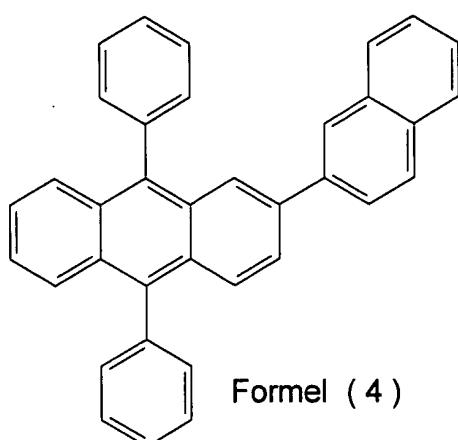


25

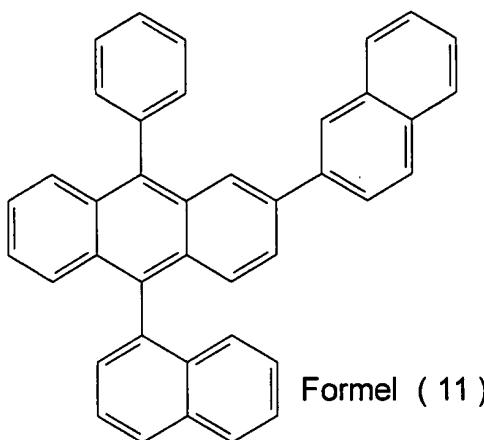


30

35

40

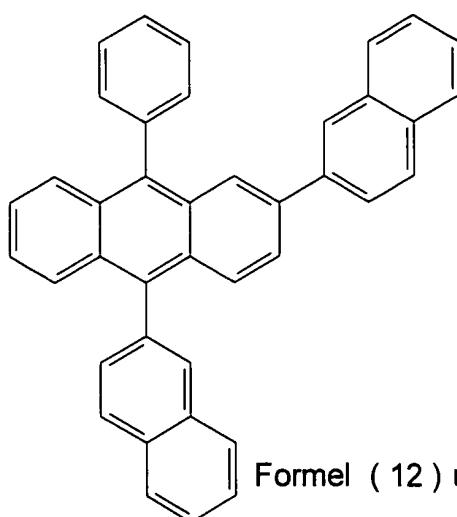

45

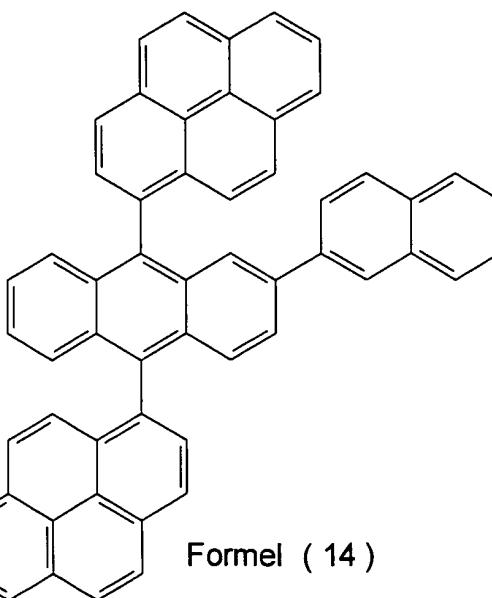


50

55

3. Organische lichtemittierende Vorrichtung, umfassend eine erste Elektrode, eine oder mehrere organische Materialschicht(en) und eine zweite Elektrode, die der Reihe nach überlagert sind, worin eine oder mehrere Schicht(en) der organischen Materialschichten eine Verbindung der Formel (1) einschliess(t/en):

5

10



15

Formel (1)

worin:

20 R_1 aus der Gruppe bestehend aus einer Phenylgruppe und einem Pyren ausgewählt ist, und
 R_2 und R_3 jeweils unabhängig voneinander aus der Gruppe bestehend aus einer Phenylgruppe, einer 1-Naphthylgruppe, einer 2-Naphthylgruppe und einem Pyren ausgewählt sind.


25 4. Organische lichtemittierende Vorrichtung, wie in Anspruch 3 dargelegt, wobei die organischen Materialschichten lichtemittierende Schichten umfassen und die lichtemittierenden Schichten die Verbindung der Formel (1) umfassen.

5. Organische lichtemittierende Vorrichtung, wie in Anspruch 3 dargelegt, wobei die organischen Materialschichten, die die Verbindung der Formel (1) einschliessen, ferner ein lichtemittierendes Gastmaterial umfassen.

30 6. Organische lichtemittierende Vorrichtung, wie in Anspruch 5 dargelegt, wobei das lichtemittierende Gastmaterial eine Verbindung der folgenden Formel (15) ist:

35

40

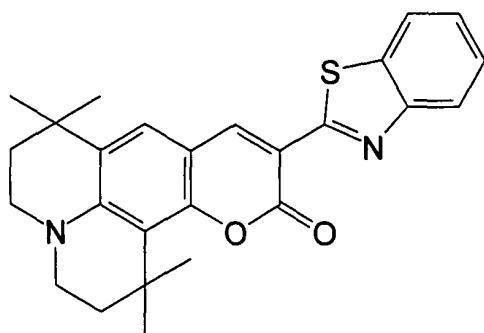

45

Formel (15)

50 **Revendications**


1. Composé ayant la Formule 1 suivants :

55

[Formule 1]

5

10



15

dans laquelle :

R_1 est choisi parmi le groupe consistant en un groupe phényle et un pyrène, et
 R_2 et R_3 chacun indépendamment est choisi parmi le groupe consistant en un groupe phényle, un groupe 1-naphtyle, un groupe 2-naphtyle, et un pyrène.

20

2. Composé selon la revendication 1, dans lequel le composé de Formule 1 est choisi parmi un groupe consistant en des composés des Formules 2 à 4, 11, 12 et 14 suivantes :




25

Formule 2

Formule 3

Formule 4

30



35



40

Formule 11

Formule 12

45

50




55

et Formule 14

5

10

15




3. Dispositif organique électroluminescent comprenant une première électrode, une ou plusieurs couches d'une matière organique, et une deuxième électrode qui sont déposées séquentiellement en couches, dans lequel une ou plusieurs couches des couches d'une matière organique inclut un composé de Formule 1 :

25

[Formule 1]

30

35



dans laquelle :

40 R₁ est choisi parmi le groupe consistant en un groupe phényle et un pyrène, et R₂ et R₃ chacun indépendamment est choisi parmi le groupe consistant en un groupe phényle, un groupe 1-naphtyle, un groupe 2-naphtyle, et un pyrène.

45 4. Dispositif organique électroluminescent selon la revendication 3, dans lequel lesdites couches d'une matière organique comprennent des couches électroluminescentes, et la couche électroluminescente comprend le composé de Formule 1.

50 5. Dispositif organique électroluminescent selon la revendication 3, dans lequel la couche d'une matière organique, qui inclut le composé de Formule 1, comprend en outre une matière incluse électroluminescente.


55 6. Dispositif organique électroluminescent selon la revendication 5, dans lequel ladite matière incluse électroluminescente est un composé avec la Formule 15 suivants :

55

[Formule 15]

5

10



15

20

25

30

35


40

45


50

55


[Fig. 1]

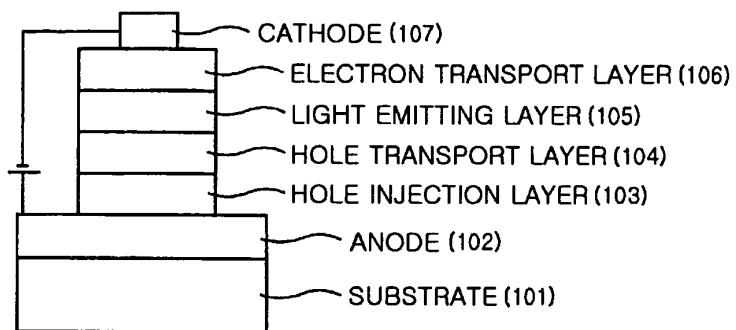


[Fig. 2]

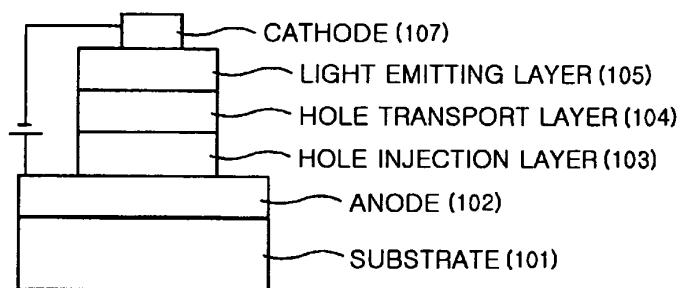


[Fig. 3]

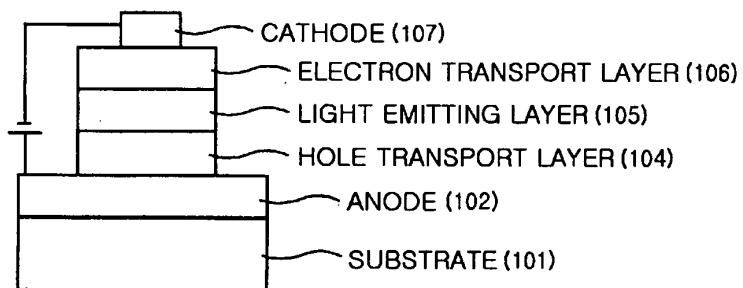

[Fig. 4]

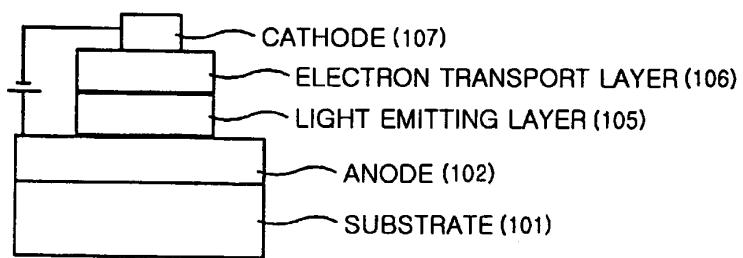

[Fig. 5]

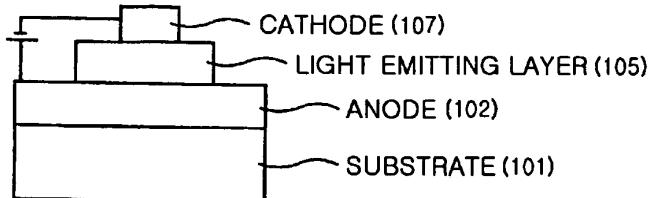

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5935721 A [0004] [0089]
- US 5972247 A [0004]
- US 6251531 B [0004]
- US 5635308 A [0004]
- EP 0681019 A [0004]
- KR 100422914 [0004] [0005]
- EP 1009044 A [0004]
- JP HEI11345686 B [0004]
- KR 1020020003025 [0005]
- WO 2005100506 A [0006]
- US 20040126617 A [0007]

Non-patent literature cited in the description

- **W. Helfrich ; W. G. Schneider.** *Phys. Rev. Lett.*, 1965, vol. 14, 229 [0003]
- **M. Pope ; H. Kallmann ; J. Giachino.** *J. Chem. Phys.*, 1965, vol. 42, 2540 [0003]

专利名称(译)	蒽衍生物和使用其作为发光材料的有机发光器件		
公开(公告)号	EP1786886A4	公开(公告)日	2009-04-29
申请号	EP2005808769	申请日	2005-09-01
[标]申请(专利权)人(译)	乐金化学股份有限公司		
申请(专利权)人(译)	LG化学有限公司		
当前申请(专利权)人(译)	LG化学有限公司		
[标]发明人	SON SE HWAN BAE JAE SOON KIM KONG KYEOM JEON SANG YOUNG		
发明人	KIM, JI EUN, 7-403 LG CHEMISTRY PARTNER APT. SON, SE HWAN LEE, JAE CHOL, 8-107 LG CHEMISTRY APT. BAE, JAE SOON KIM, KONG KYEOM KANG, MIN SOO, 114-1407 HAN MAEUL APT. JEON, SANG YOUNG		
IPC分类号	C09K11/06		
CPC分类号	C07C15/28 C07C15/38 C07C2603/24 C07C2603/50 C09K11/06 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1037 C09K2211/1088 H01L51/0058 H01L51/0071 H01L51/5012 H05B33 /14		
优先权	1020040070100 2004-09-02 KR		
其他公开文献	EP1786886A1 EP1786886B1		
外部链接	Espacenet		

摘要(译)

公开了式1的化合物和使用其的有机发光器件。在式1中，R 1，R 2和R 3各自独立地选自苯基，1-萘基，2-萘基和茈。

