



US 20050075568A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0075568 A1**
(43) **Pub. Date: Apr. 7, 2005**(54) **DOPPLER ULTRASOUND METHOD AND APPARATUS FOR MONITORING BLOOD FLOW****Publication Classification**(51) **Int. Cl.⁷** **A61B 8/02**(52) **U.S. Cl.** **600/453**(76) **Inventor: Mark A. Moehring, Seattle, WA (US)**


Correspondence Address:

Kimton N. Eng, Esq.
DORSEY & WHITNEY LLP
Suite 3400
1420 Fifth Avenue
Seattle, WA 98101 (US)(21) **Appl. No.: 10/612,822**(22) **Filed: Jul. 1, 2003****Related U.S. Application Data**

(63) Continuation of application No. 09/595,323, filed on Jun. 16, 2000, now Pat. No. 6,616,611, which is a continuation of application No. 09/190,402, filed on Nov. 11, 1998, now Pat. No. 6,196,972.

(57) **ABSTRACT**

A pulse Doppler ultrasound system and associated methods are described for monitoring blood flow. A graphical information display includes simultaneously displayed depth-mode and spectrogram displays. The depth-mode display indicates the various positions along the ultrasound beam axis at which blood flow is detected. These positions are indicated as one or more colored regions, with the color indicating direction of blood flow and varying in intensity as a function of detected Doppler ultrasound signal amplitude or detected blood flow velocity. The depth-mode display also includes a pointer whose position may be selected by a user. The spectrogram displayed corresponds to the location identified by the pointer. Embolus detection and characterization are also provided.

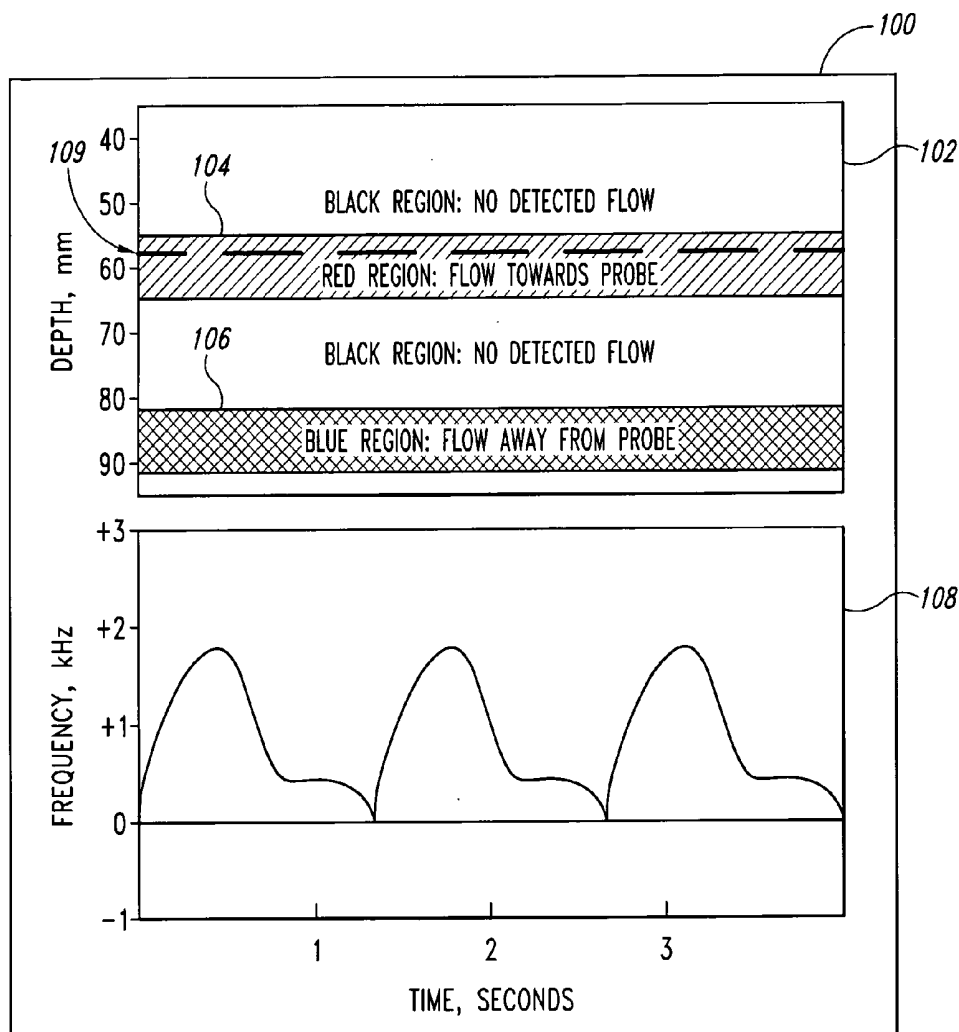

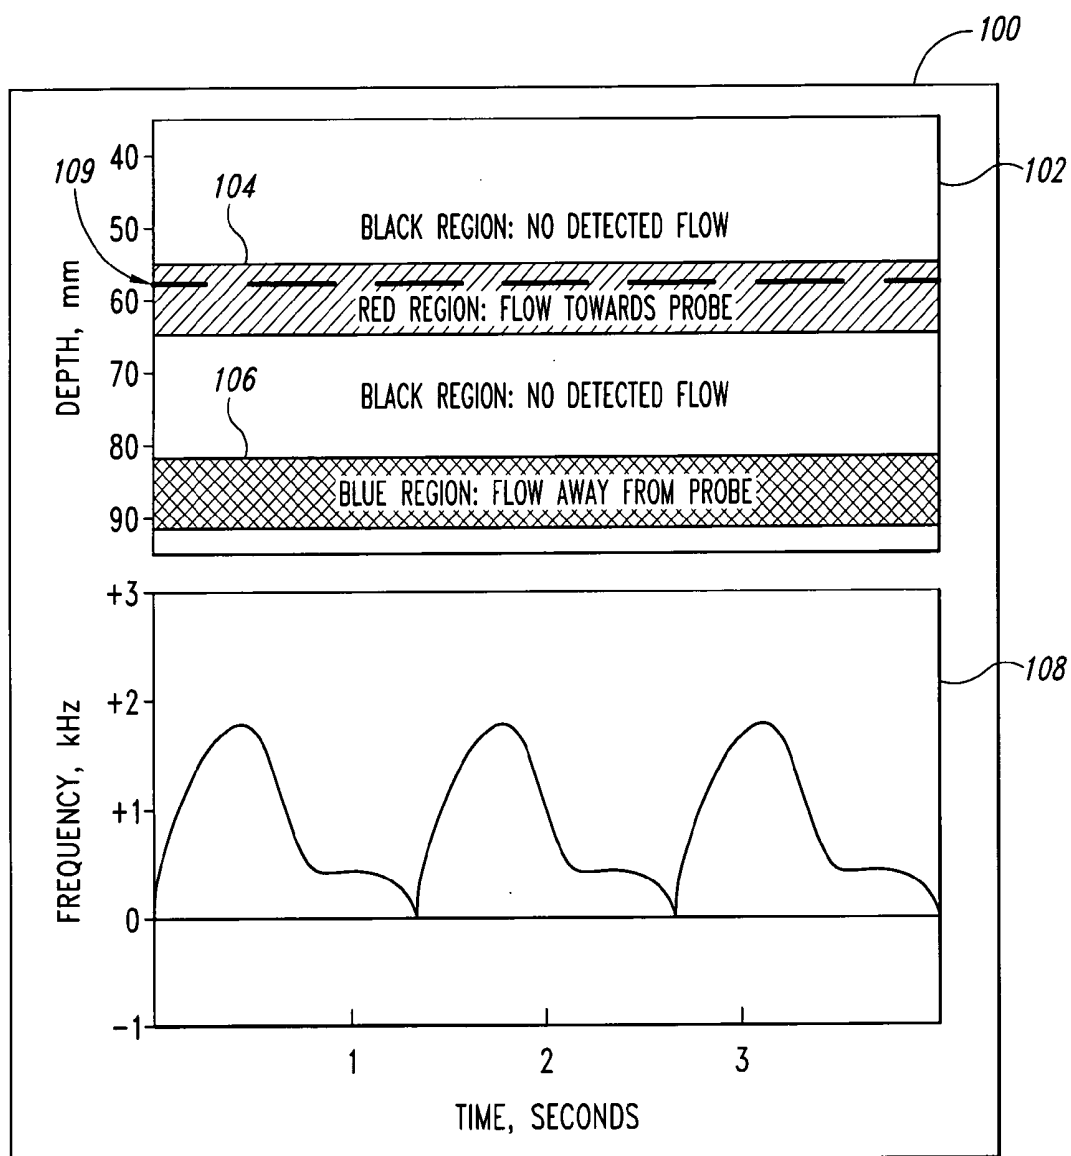


Fig. 1

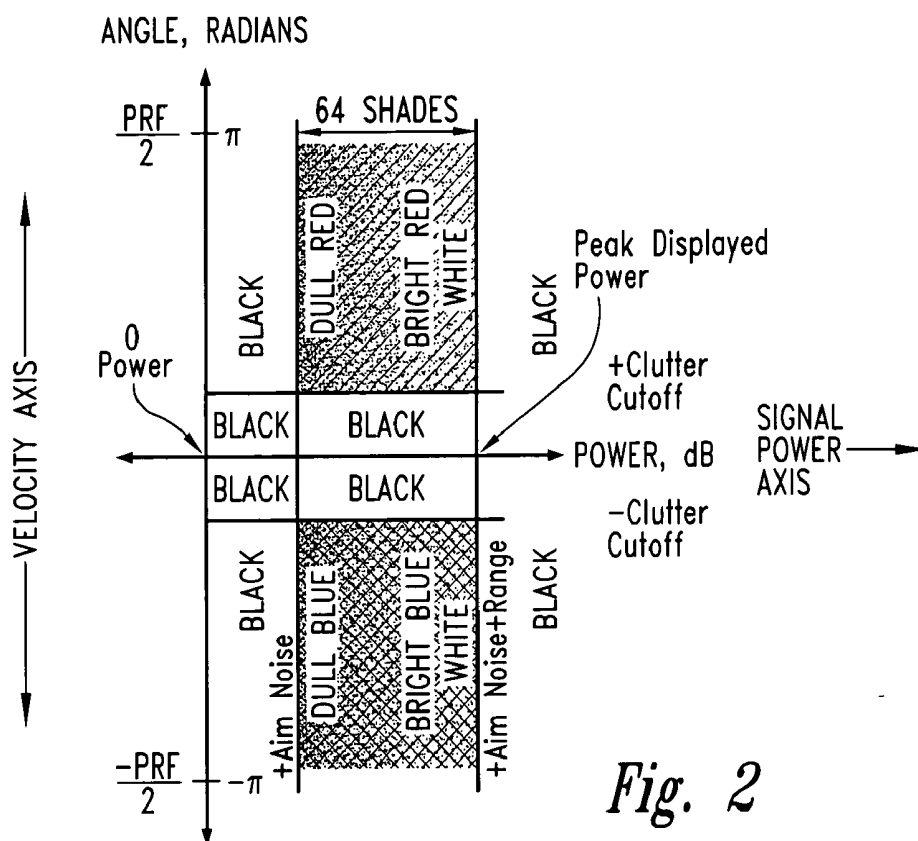


Fig. 2

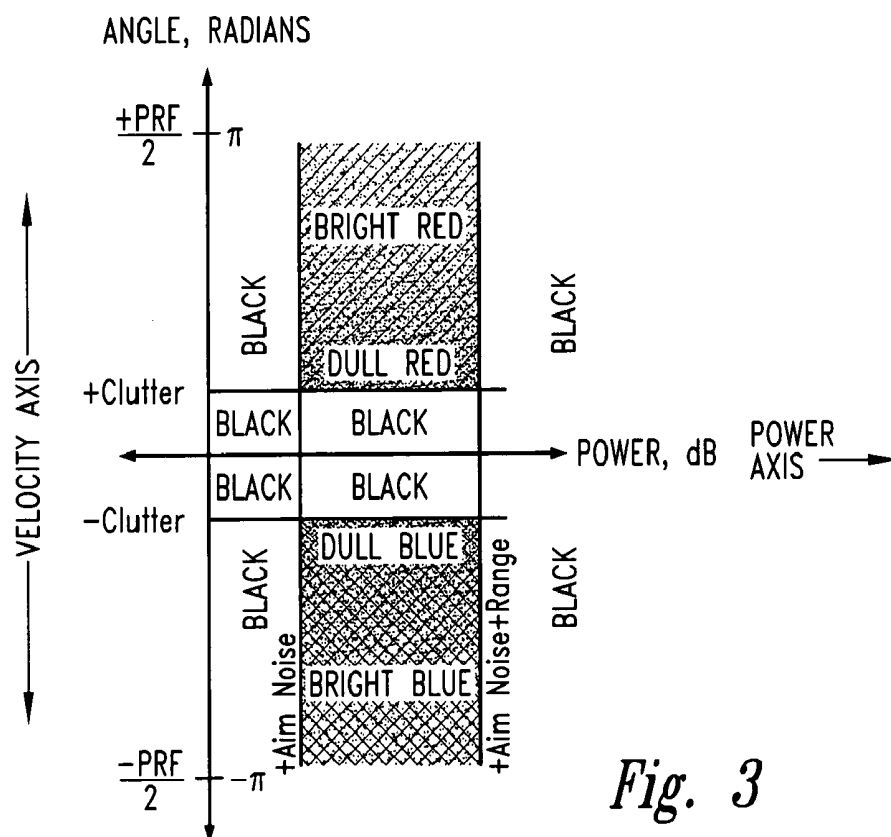


Fig. 3

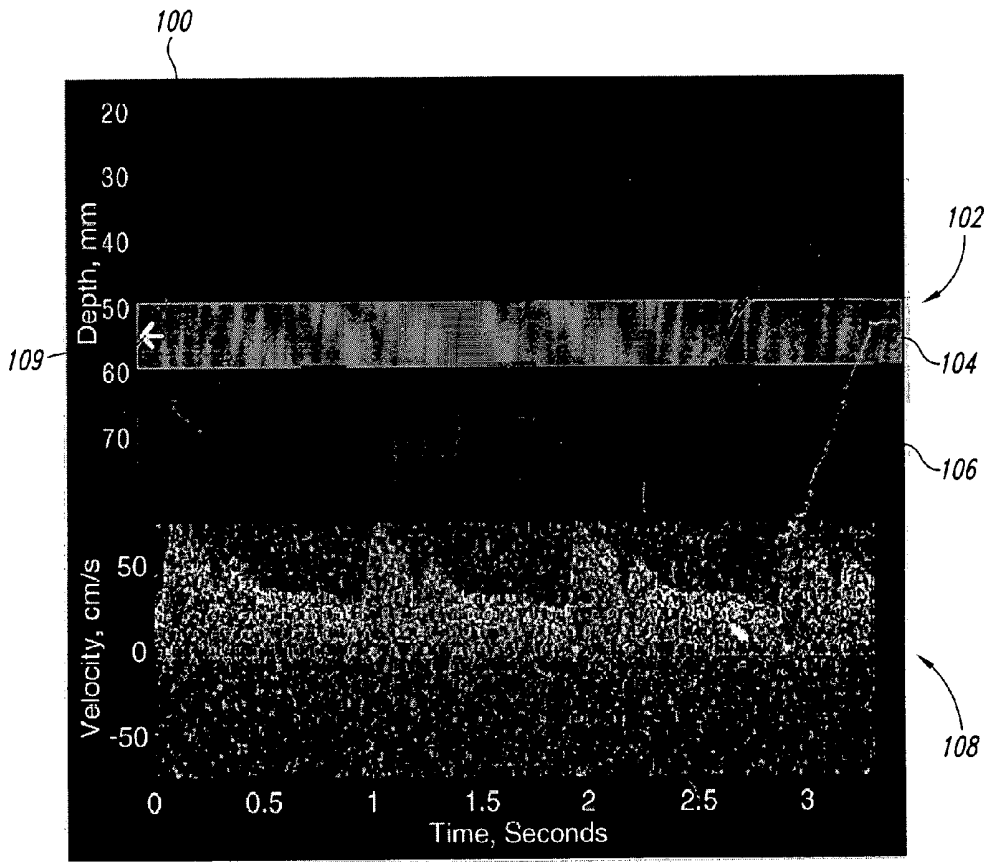


Fig. 4

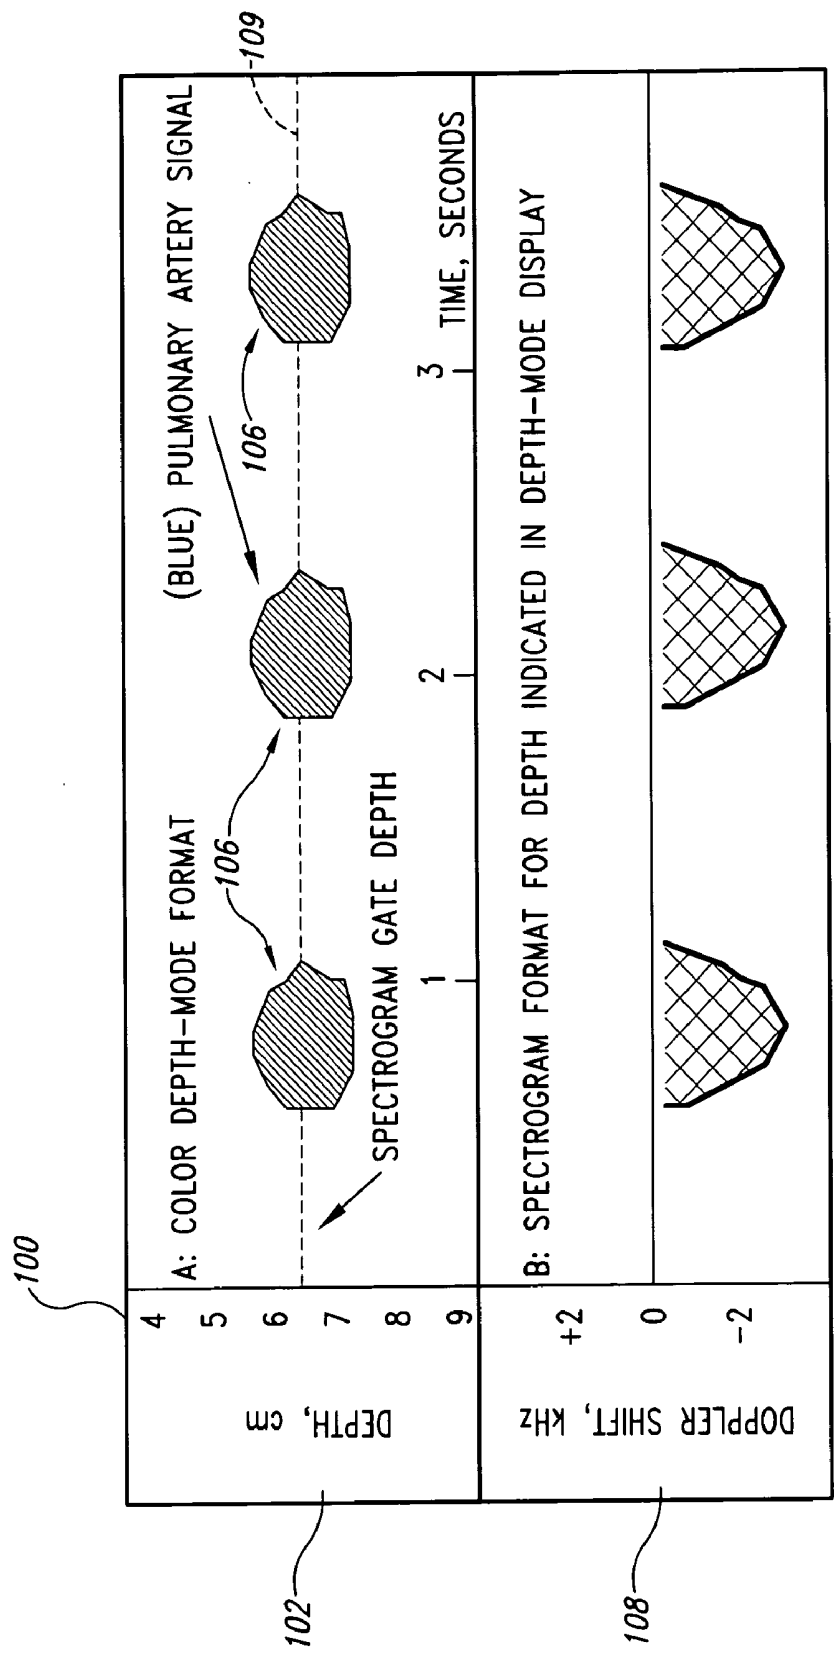


Fig. 5

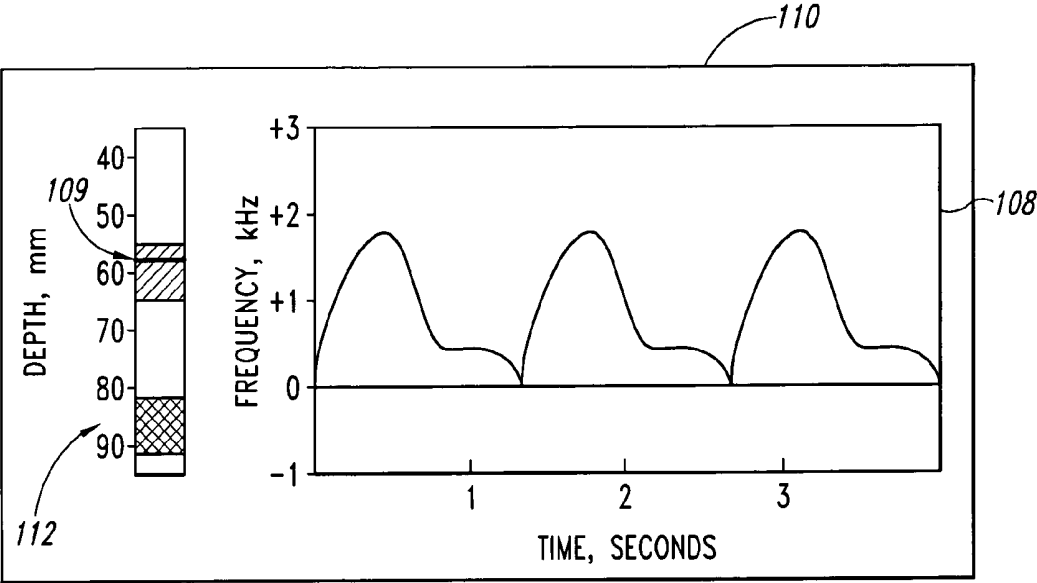


Fig. 6

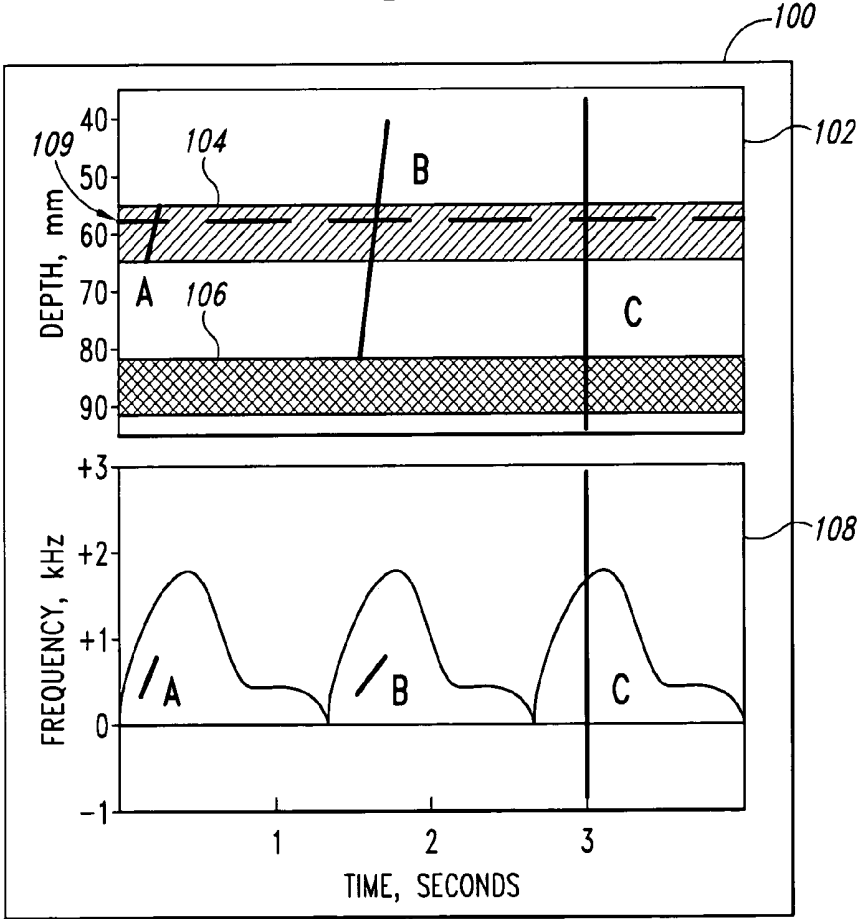


Fig. 8

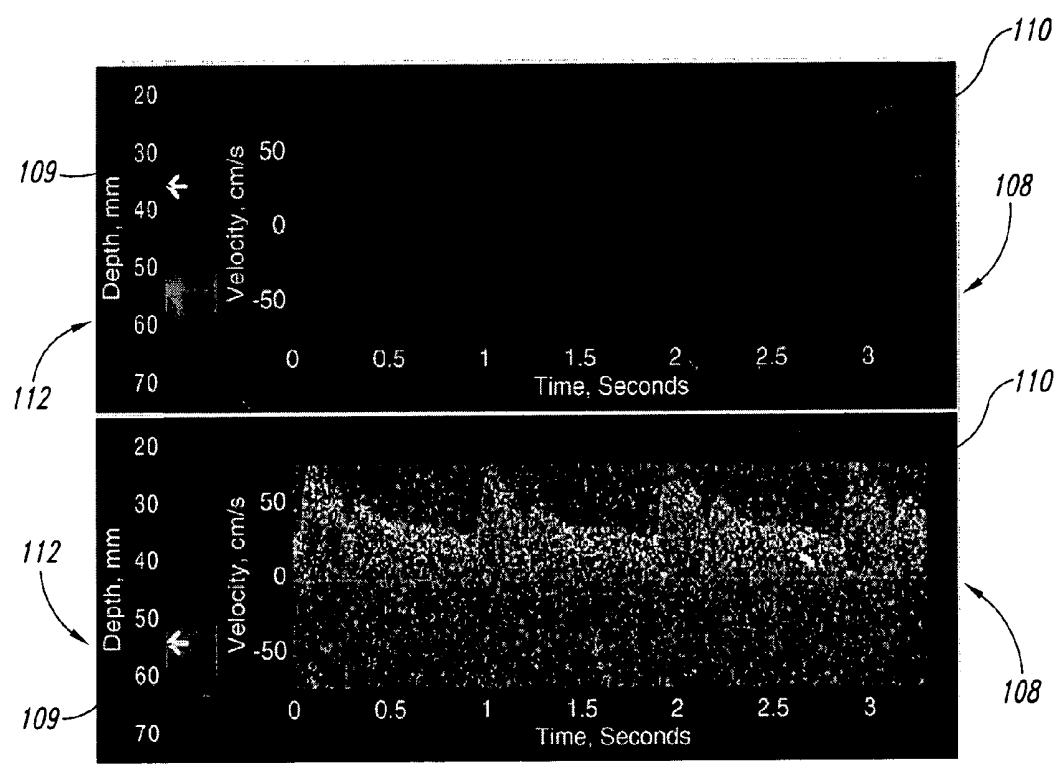


Fig. 7

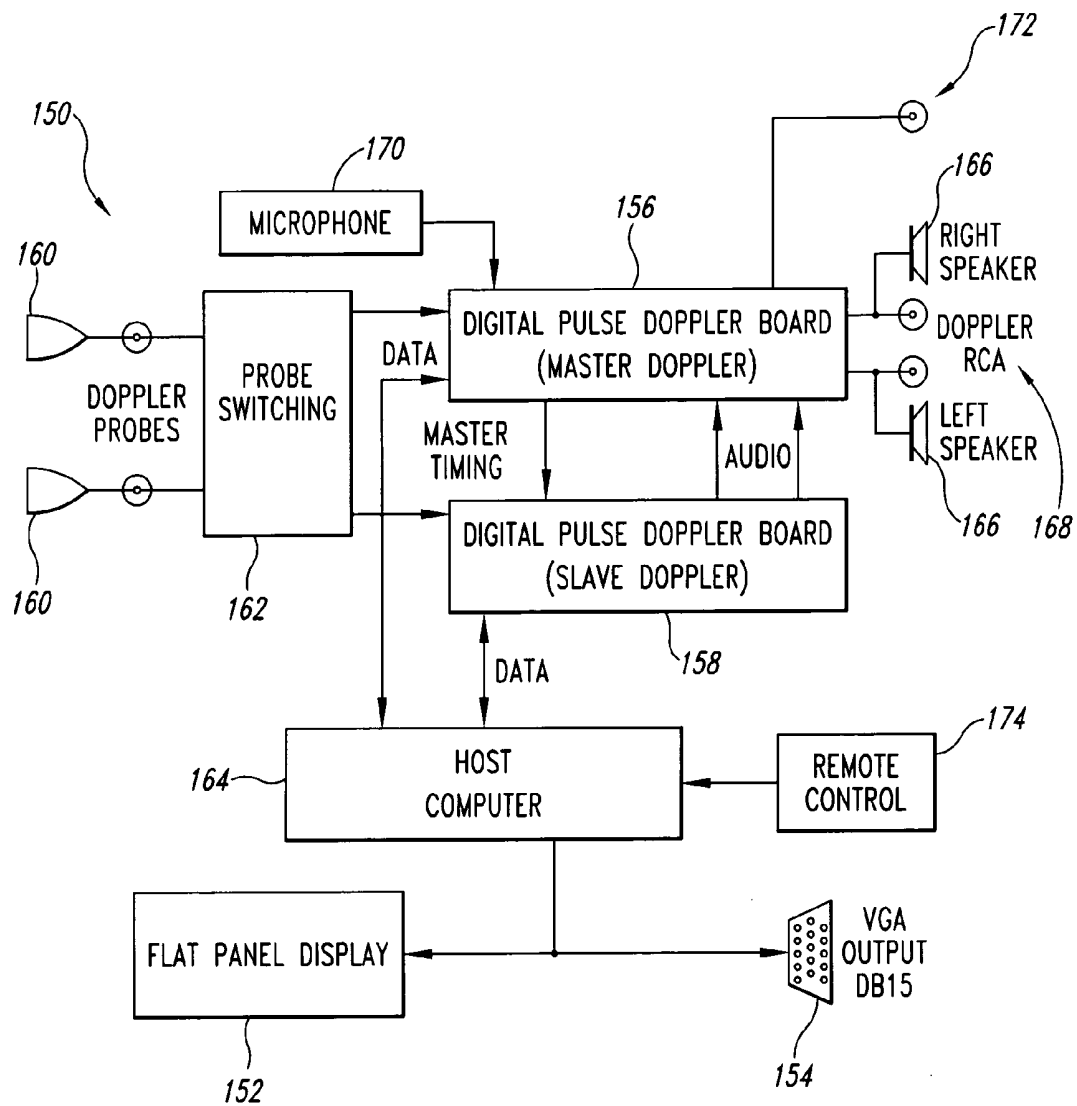


Fig. 9



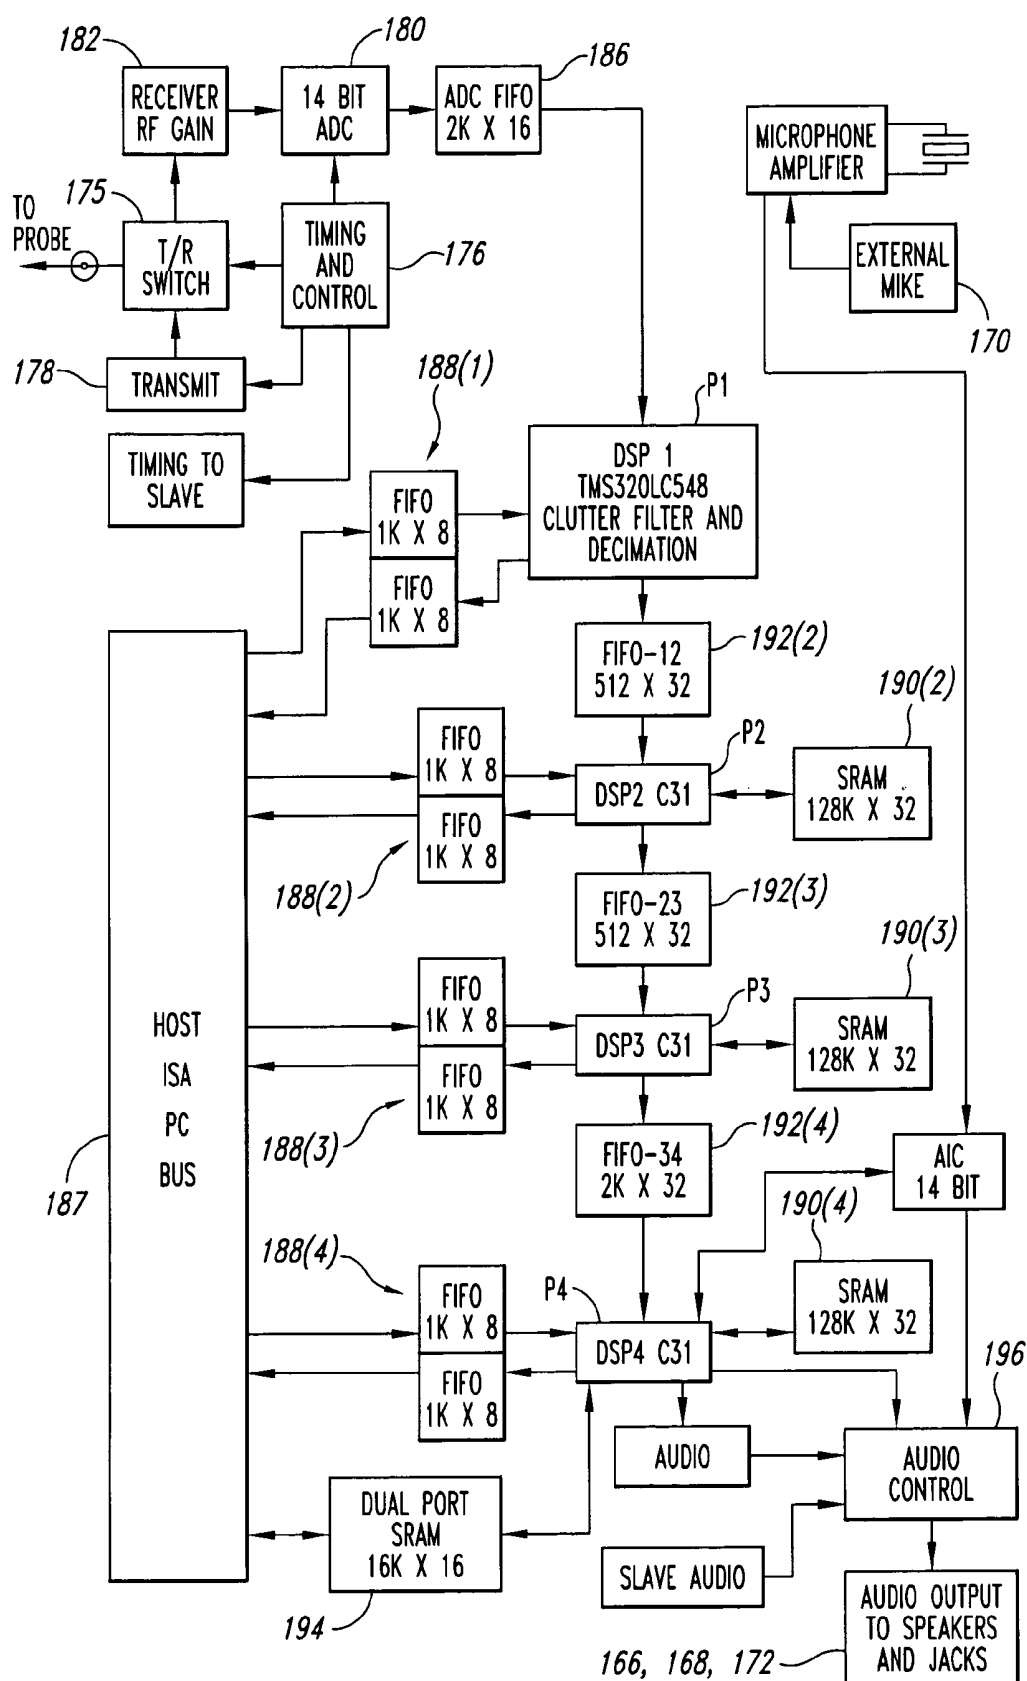



Fig. 10

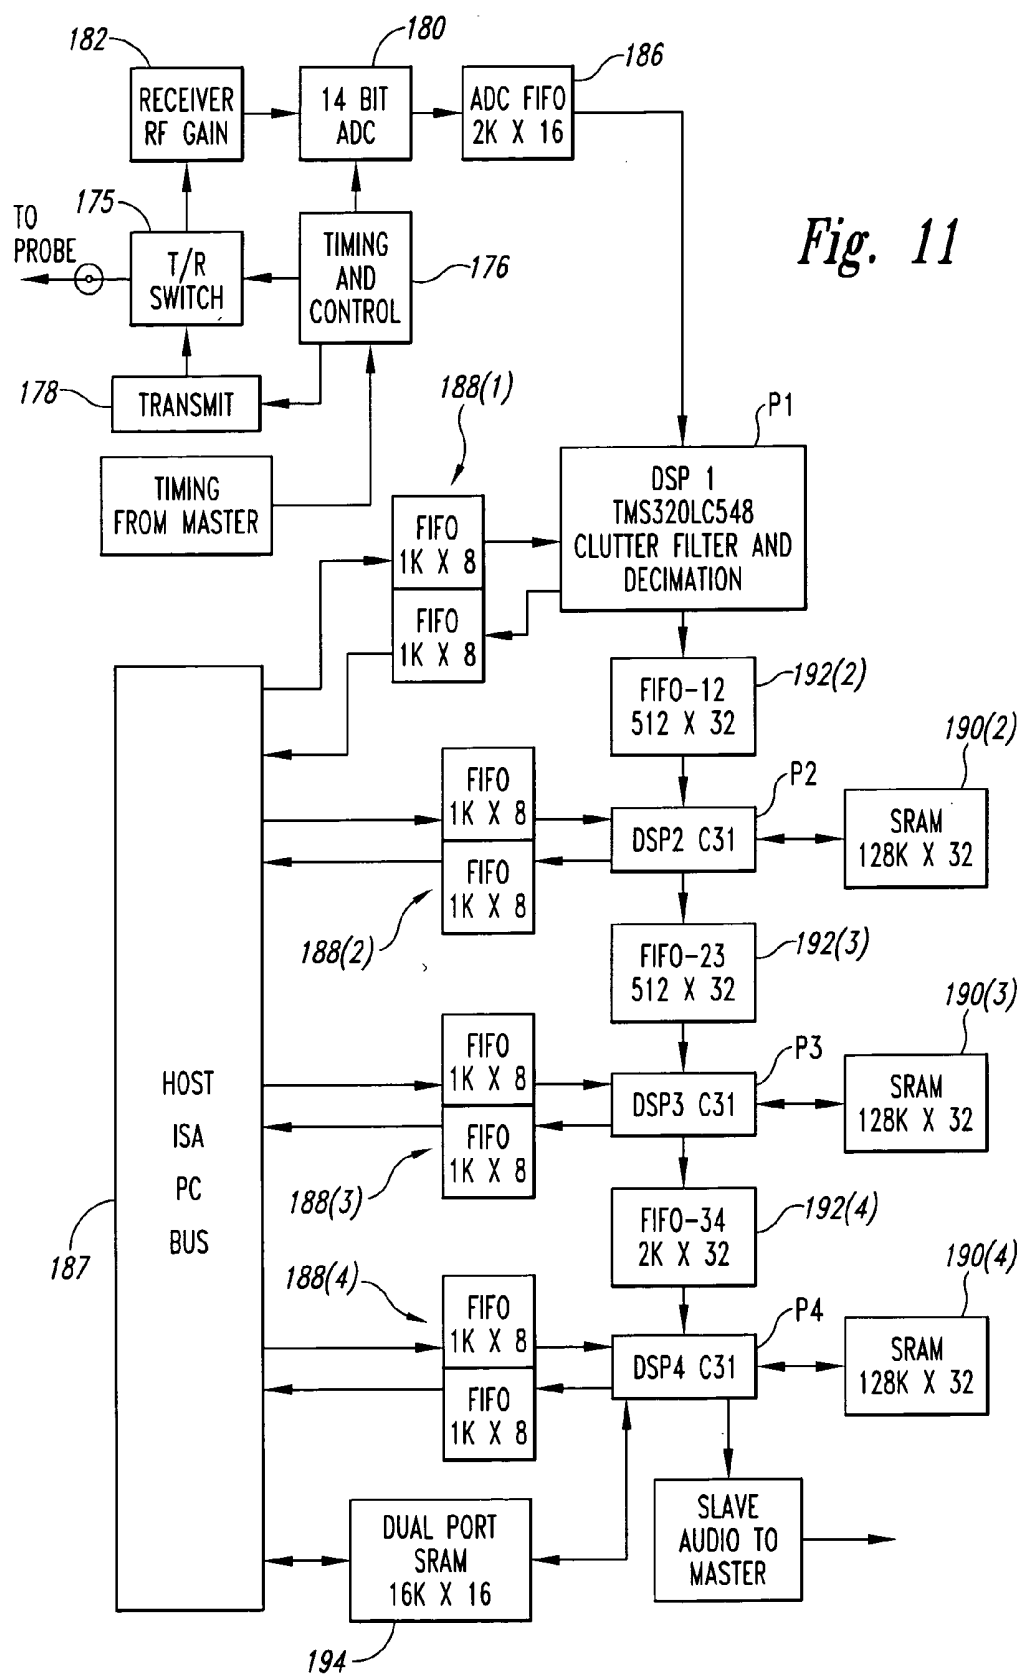

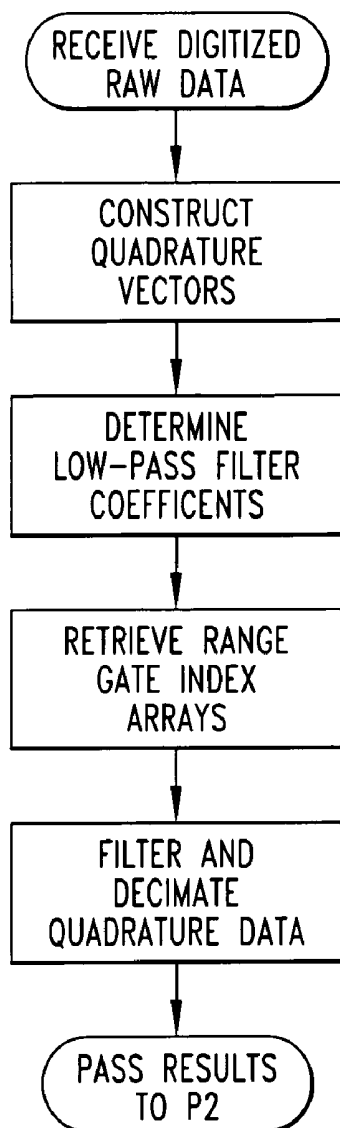

P1 OPERATIONS

Fig. 12

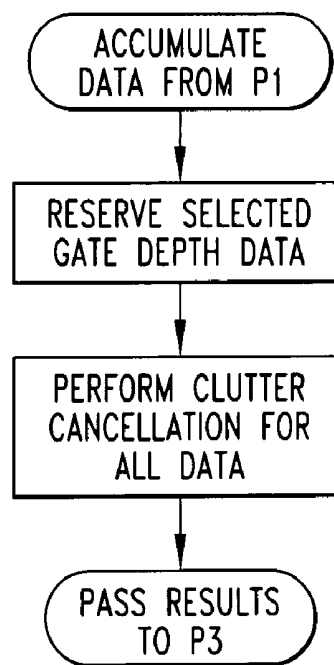

P2 OPERATIONS

Fig. 13



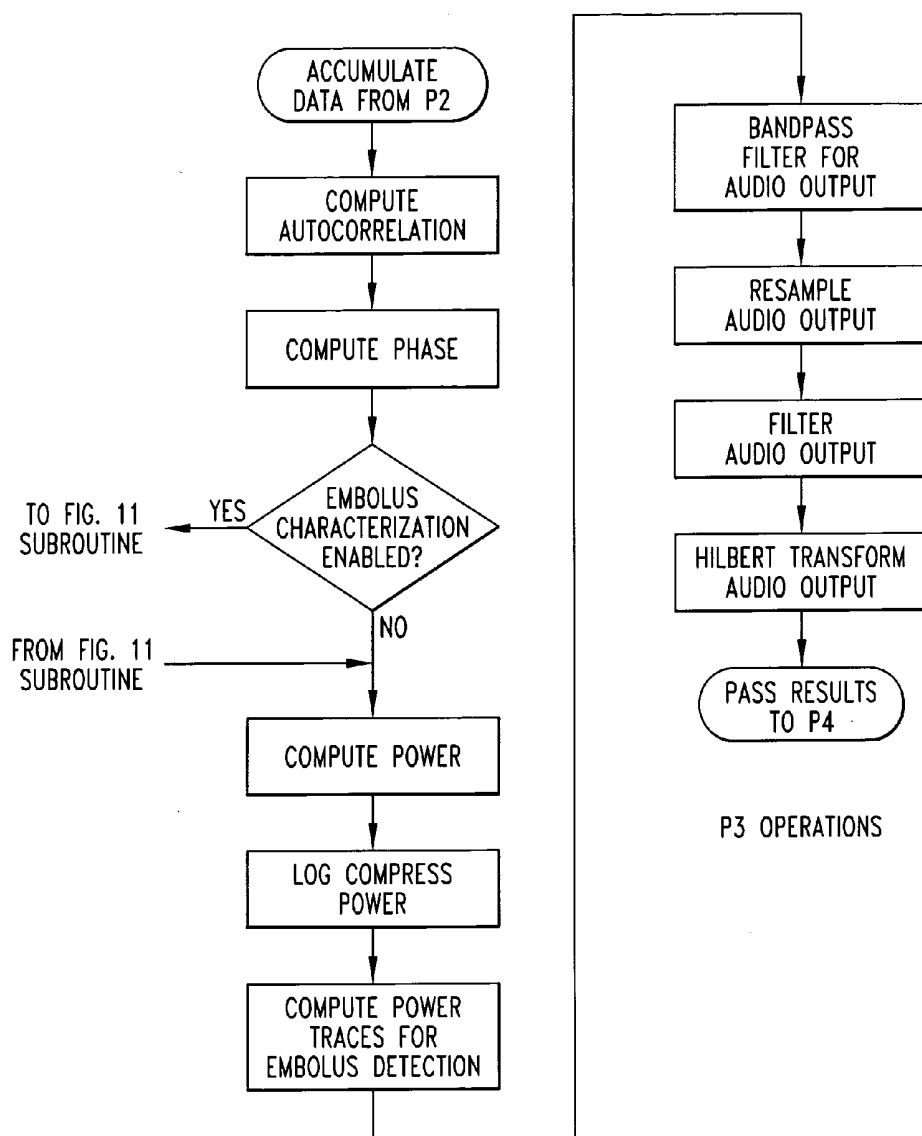


Fig. 14

*Fig. 15*

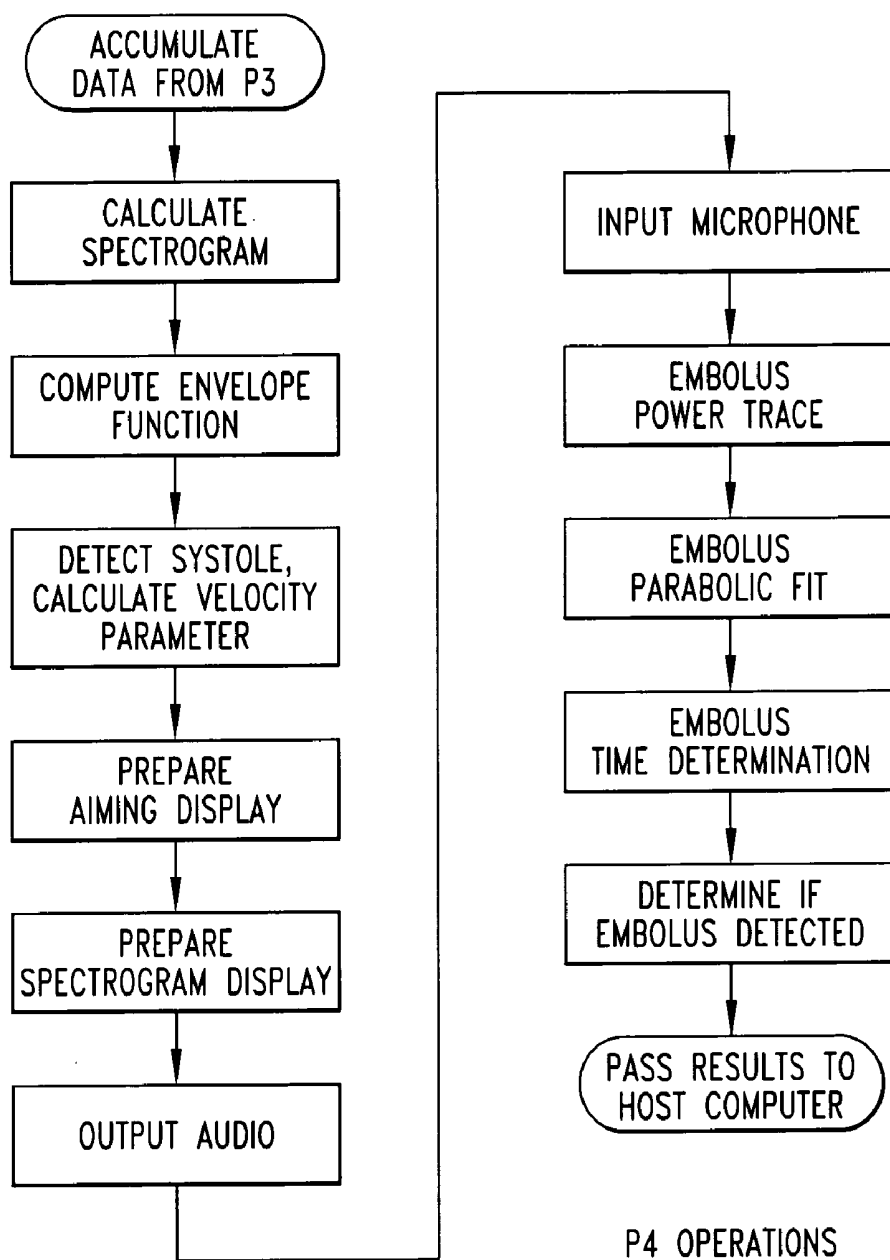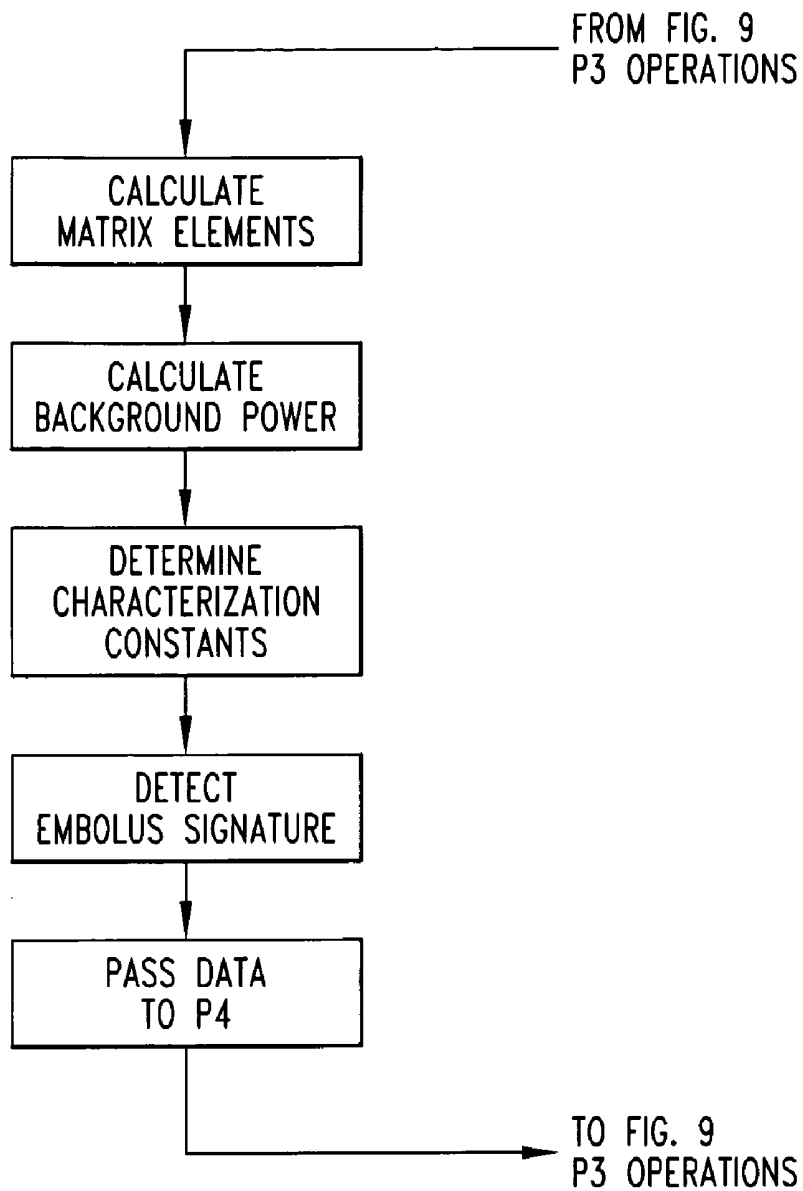

EMBOLUS CHARACTERIZATION SUBROUTINE

Fig. 16

DOPPLER ULTRASOUND METHOD AND APPARATUS FOR MONITORING BLOOD FLOW

TECHNICAL FIELD

[0001] The invention relates generally to medical monitoring and diagnostic procedures and devices, and more particularly to a Doppler ultrasound method and apparatus for monitoring blood flow.

BACKGROUND OF THE INVENTION

[0002] Doppler ultrasound has been used to measure blood flow velocity for many years. The well-known Doppler shift phenomenon provides that ultrasonic signals reflected from moving targets will have a shift in frequency directly proportional to the target velocity component parallel to the direction of the ultrasound beam. The frequency shift is the same for any object moving at a given velocity, whereas the amplitude of the detected signal is a function of the acoustic reflectivity of the moving object reflecting the ultrasound. Pulse Doppler ultrasound systems commonly produce a spectrogram of the detected return signal frequency (i.e., velocity) as a function of time in a particular sample volume, with the spectrogram being used by a physician to determine blood flow characteristics of a patient.

[0003] Some Doppler ultrasound systems also have the capability to detect and characterize emboli flowing in the bloodstream. An example Doppler ultrasound system with embolus detection capability is described in U.S. Pat. No. 5,348,015, entitled "Method And Apparatus For Ultrasonically Detecting, Counting, and/or Characterizing Emboli," issued Sep. 20, 1994, to Moehring et al., the disclosure of which is incorporated herein by reference. Such ultrasound systems are advantageously used both for diagnostic exams (to determine the presence and significance of vascular disease or dysfunction) and during surgical interventions (to indicate surgical manipulations that produce emboli or alter/interrupt blood flow).

[0004] Typically, a user of ultrasound equipment finds it rather difficult to properly orient and position an ultrasound transducer or probe on the patient, as well as to select a depth along the ultrasound beam corresponding to the desired location where blood flow is to be monitored. This is particularly true in ultrasound applications such as transcranial Doppler imaging (TCD). The blood vessels most commonly observed with TCD are the middle, anterior, and posterior cerebral arteries, and the vertebral and basilar arteries. The Doppler transducer must be positioned so the ultrasound beam passes through the skull via the temporal windows for the cerebral arteries, and via the foramen magnum for the vertebral and basilar arteries. The user of the ultrasound equipment may find it difficult to locate these particular windows or to properly orient the ultrasound probe once the particular window is found.

[0005] A complicating factor in locating the ultrasound window is determination of the proper depth at which the desired blood flow is located. Commonly, the user does not know if he is looking in the correct direction at the wrong depth, the wrong direction at the right depth, or whether the ultrasound window is too poor for appreciating blood flow at all. Proper location and orientation of the Doppler ultrasound probe, and the proper setting of depth parameters, is typically by trial and error. Not only does this make the use

of Doppler ultrasound equipment quite inconvenient and difficult, it also creates a risk that the desired sample volume may not be properly located, with the corresponding diagnosis then being untenable or potentially improper.

SUMMARY OF THE INVENTION

[0006] In accordance with the invention, an information display is provided in connection with Doppler ultrasound monitoring of blood flow. The information display includes two simultaneously displayed graphical displays. One graphical display is a blood locator display that indicates locations along the axis of the ultrasound beam at which blood flow is detected. The blood locator display includes a location indicator, such as a pointer directed to a selected one of the locations. The other graphical display is a spectrogram indicating velocities of monitored blood flow at the selected location. The blood locator display may include a color region corresponding with the locations at which blood flow is detected. The intensity of the color may vary as a function of detected ultrasound signal amplitude or as a function of detected blood flow velocities.

[0007] The blood locator display allows a user to quickly locate blood flow along the ultrasound beam axis. Using the blood locator display, the location of blood flow of particular interest can be further refined by the user adjusting the aim of the ultrasound probe to produce a greater displayed intensity or spatial extent at the particular location of interest. The user may then select the position of the pointer to view the corresponding spectrogram. The user may also use the two simultaneously displayed graphical displays to locate a particular blood vessel by detecting temporal or other variations in the displays that are consistent with the blood vessel.

[0008] A method of detecting and characterizing an embolus is also provided. Locations in which blood does and does not flow are determined, as well as the direction of blood flow. A first ultrasound signal that may be an embolus is evaluated to determine if it corresponds with the locations where blood does and does not flow, as well as determining if it corresponds with the direction and rate of blood flow. If the first ultrasound signal does not correspond with blood flow direction or rate, then it is identified as non-embolic. If the first ultrasound signal does correspond with blood flow direction, and if it corresponds solely with locations where blood flows, then the first ultrasound signal is identified as an embolic signal of a first type. If the first ultrasound signal does correspond with blood flow direction, and if it corresponds both with locations where blood does and does not flow, then the first ultrasound signal is identified as an embolic signal of a second type.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a graphical diagram depicting a first Doppler ultrasound system display mode in accordance with an embodiment of the invention.

[0010] FIG. 2 is a graphical diagram depicting velocity and signal power parameters used in preparation of the display mode of FIG. 1.

[0011] FIG. 3 is a graphical diagram depicting velocity and signal power parameters used in preparation of an alternative embodiment of the display mode of FIG. 1.

[0012] FIG. 4 shows the alternative embodiment of the display mode of FIG. 1 in color.

[0013] FIG. 5 is a graphical diagram depicting the display mode of FIG. 4 and its use to identify the pulmonary artery.

[0014] FIG. 6 is a graphical diagram depicting a second Doppler ultrasound system display mode in accordance with an embodiment of the invention.

[0015] FIG. 7 shows two views of the display mode of FIG. 6 in color.

[0016] FIG. 8 is the graphical diagram of the display mode shown in FIG. 1, further depicting and distinguishing embolic signals from artifact signals.

[0017] FIG. 9 is a functional block diagram depicting a Doppler ultrasound system in accordance with an embodiment of the invention.

[0018] FIGS. 10 and 11 are functional block diagrams depicting particular details of pulse Doppler signal processing circuitry included in the Doppler ultrasound system of FIG. 9.

[0019] FIGS. 12-16 are process flow charts depicting particular operations performed by the pulse Doppler signal processing circuitry of FIGS. 10 and 11.

DETAILED DESCRIPTION OF THE INVENTION

[0020] The following describes a novel method and apparatus for providing Doppler ultrasound information to a user, such as in connection with measuring blood velocities to detect hemodynamically significant deviations from normal values, and to assess blood flow for the occurrence of microembolic signals. Certain details are set forth to provide a sufficient understanding of the invention. However, it will be clear to one skilled in the art that the invention may be practiced without these particular details. In other instances, well-known circuits, control signals, timing protocols, and software operations have not been shown in detail in order to avoid unnecessarily obscuring the invention.

[0021] FIG. 1 is a graphical diagram depicting a first display mode of Doppler ultrasound information in accordance with an embodiment of the invention. In this first display mode, referred to as an Aiming mode 100, two distinct ultrasound displays are provided to the user. A depth-mode display 102 depicts, with color, blood flow away from and towards the ultrasound probe at various depths along the ultrasound beam axis (vertical axis) as a function of time (horizontal axis).

[0022] The depth-mode display 102 includes colored regions 104 and 106. Region 104 is generally colored red and depicts blood flow having a velocity component directed towards the probe and in a specific depth range. Region 106 is generally colored blue and depicts blood flow having a velocity component away from the probe and in a specific depth range. The red and blue regions are not of uniform color, with the intensity of red varying as a function of the detected intensity of the return Doppler ultrasound signal. Those skilled in the art will understand that such a display is similar to the conventional color M-mode display, in which variation in red and blue coloration is associated with variation in detected blood flow velocities. However, such

M-mode displays have not been used concurrently with a spectrogram and with the specific application of locating blood flow as an input to the spectrogram, from which diagnostic decisions are made.

[0023] The Aiming mode 100 also includes a displayed spectrogram 108, with FIG. 1 depicting a velocity envelope showing the characteristic systolic-diastolic pattern. Like the depth-mode display 102, the spectrogram 108 includes data points (not shown) within the velocity envelope that are colored in varying intensity as a function of the detected intensity of the return ultrasound signal. The particular sample volume for which the spectrogram 108 applies is at a depth indicated in the depth-mode display 102 by a depth indicator or pointer 109. In this way, a user of the ultrasound system can conveniently see and select particular depths at which to measure the spectrogram 108. The depth-mode display 102 readily and conveniently provides the information concerning the range of appropriate depths at which a meaningful spectrogram may be obtained.

[0024] As described above, the color intensity of regions 104 and 106 preferably vary as a function of the detected intensity of the return ultrasound signal. Referring to FIG. 2, a graphical diagram depicts how such color intensity is determined. In order to avoid display of spurious information, signals that may be intense but low velocity (such as due to tissue motion) are ignored and not displayed in the depth-mode display 102 of FIG. 1. This is referred to as clutter filtering and is depicted in FIG. 2 as the threshold magnitude clutter cutoff limits for positive and negative velocities. Similarly, low power signals associated with noise are also ignored and not displayed in the depth-mode display 102 of FIG. 1. The user can determine the upper power limit for the color intensity mapping by selecting a power range value. Signals above a maximum power are then ignored-another clutter filtering which is especially helpful when monitoring blood flow in the cardiac environment. Those skilled in the art will appreciate that other filtering techniques may be employed to improve the depth-mode display image, including delta modulator or other suitably adapted filtering techniques.

[0025] While the currently preferred embodiment of the depth-mode display 102 employs color intensity mapping as a function of signal intensity, and further colored red or blue according to flow directions towards or away from the probe, those skilled in the art will appreciate that color intensity as a function of detected velocity may be employed instead. In such case, and as shown in FIG. 3, color intensity varies from the clutter cutoff magnitude to a maximum velocity magnitude, corresponding with one-half the pulse repetition frequency (PRF). Detected signals having a power below the noise threshold or above the selected upper power limit are ignored. FIG. 4 is a color figure that shows the Aiming mode display 100 in which the color intensity of the regions 104 and 106 vary as a function of detected velocity. Both the depth-mode display 102 and the spectrogram 108 are displayed relative to the same time axis, and the depth-mode display shows variation both in spatial extent and in color intensity with the same periodicity as the heart beat. Those skilled in the art will also appreciate that instead of varying color intensity solely as a function of signal amplitude or solely as a function of velocity, one could advantageously vary color intensity as a function of both signal amplitude and velocity.

[0026] The particularly depicted depth-mode display **102** shown in **FIG. 1** shows a simplified display of a single, well-defined red region **104** and a single, well-defined blue region **106**. Those skilled in the art will appreciate that the number and characteristics of colored regions will vary depending on ultrasound probe placement and orientation. Indeed, a catalogue of characteristic depth-mode displays can be provided to assist the user in determining whether a particularly desired blood vessel has, in fact, been located. Once the user finds the characteristic depth-mode display for the desired blood vessel, the user can then conveniently determine the depth at which to measure the spectrogram **108**.

[0027] The Aiming mode **100** enables the user to quickly position the ultrasound probe, such as adjacent to an ultrasound window through the skull so that intracranial blood flow can be detected. Use of colorized representation of signal amplitude is particularly advantageous for this purpose, since a strong signal is indicative of good probe location and orientation. The use of colorized representation of flow velocity may not be as advantageous, except where blood flow velocities vary significantly over blood vessel cross-section. However, when attempting to monitor blood flow near appreciably moving tissue (e.g., cardiac motion above clutter cutoff velocity), colorized representation of flow velocities may be preferred.

[0028] Referring to **FIG. 5**, use of the Aiming mode **100** is shown in connection with identifying a particular blood vessel, such as the pulmonary artery or femoral vein. In this case, a colorized representation of flow velocity is advantageously used in the depth-mode display **102**, because of the high variation in blood flow velocities in these particular blood vessels. By observing the temporal variation in the depth-mode display **102**, and the corresponding spectrogram **108**, a user can identify optimal location of the pulmonary artery as follows: (1) the depth-mode display of the pulmonary artery will be blue with the same periodicity as the heart beat; (2) the blue region will typically reside between 4 and 9 cm depth; (3) along the time axis, the blue signal will be relatively intense in the middle of systole, corresponding to peak velocity; and (4) the signal will have the largest vertical extent in the depth-mode display, indicating that the user has positioned the probe such that the longest section of the pulmonary artery is aligned coincident with the ultrasound beam during systole. The user can then adjust other parameters, such as gate depth for the displayed spectrogram **108** and clutter filter parameters.

[0029] The Aiming mode **100** also indicates to the user where to set the depth of the pulse Doppler sample gate so that the spectrogram **108** will process Doppler shifts from desired blood flow signals. It is the spectrogram **108** that is of primary clinical interest, allowing the user to observe and measure parameters associated with a particular blood flow and providing information that might suggest hemodynamically significant deviations in that blood flow. Along with the depth-mode display **102** and the correspondingly selected spectrogram **108**, the information displayed to a user also typically includes well-known numerical parameters associated with the spectrogram, such as mean peak systolic velocity, mean end diastolic velocity, pulsatility index, and the relative change in mean peak systolic velocity over time. Those skilled in the art will appreciate that other parameters

and displays may also be provided, including data provided by other monitoring devices, such as EKG- or EEG-related information.

[0030] The Aiming mode display **100** of **FIG. 1** is particularly useful in positioning and orienting the Doppler ultrasound probe, and in first selecting a depth at which to measure the spectrogram **108**. Following probe location and orientation and range gate selection, the user will typically prefer to have an information display emphasizing the clinically valuable spectrogram **108**. Referring to **FIG. 6**, a second display mode is shown that is referred to as a Spectral mode **110**. In this mode, the spectrogram **108** occupies a larger display area. Instead of the full depth-mode display **102**, a compressed depth-mode display **112** is provided. This compressed depth-mode display **112**, on a shortened time scale, provides information concerning the depth of the sample volume at which the spectrogram **108** is taken, and the status of the blood flow in that sample volume, towards or away from the probe. Thus, the user is continually informed concerning the desired sample volume depth and associated blood flow. This allows for quick understanding and compensation for any changes in the location of the desired sample volume relative to the blood flow, such as due to probe motion. This also allows a user of the ultrasound system to fine tune the sample volume depth even while focusing primary attention on the clinically important spectrogram **108**.

[0031] **FIG. 7** shows two different views of the Spectral mode **110** in color. In one view, the selected depth indicated by the pointer **109** in the compressed depth-mode display **112** is not a location at which blood flows, and consequently there are no blood flow signals in the displayed spectrogram **108**. In the other view, the selected depth indicated by the pointer **109** does coincide with blood flow, and a corresponding spectrogram **108** is displayed. In the particular embodiment shown in **FIG. 7**, the color intensity of the region **104** varies as a function of detected velocity, and shows a characteristic color variation that may be associated with variation in blood velocity across blood vessel cross-section, a variation with depth in the alignment of the detected blood flow relative to the ultrasound beam axis, or both.

[0032] Those skilled in the art will appreciate the important advantages provided by the diagnostic information displays shown in **FIGS. 1, 4, 6, and 7**. While the displayed spectrogram **108** is not itself new, today's pulse Doppler ultrasound systems that do not have B-mode capability lack a means for successfully and reliably locating and orienting an ultrasound probe and determining an appropriate sample volume depth at which to detect the blood flow of interest. Also, while colorized representation of blood flow directions and speeds or signal amplitude is well known in the art, such as in color M-mode displays, such displays have not been used for the purpose of aiming ultrasound probes or in selecting particular sample volume depths for concurrent spectrogram analysis.

[0033] Referring to **FIG. 8**, the simultaneous presentation of the depth-mode display **102** and spectrogram **108** can also provide important information for detecting embolic signals and differentiating such signals from non-embolic artifacts. **FIG. 8** depicts three events: A, B, and C. In event A, the depth-mode display **102** shows a particularly high intensity

signal having a non-vertical slope—i.e., a high-intensity signal that occurs at different depths at different times. In event A, the signal exists only within the boundary of one of the colored blood flow regions **104** and **106**. In the spectrogram **108**, a particularly high intensity signal is seen to have different velocities, bounded by the maximum flow velocity, within a short temporal region within the heartbeat cycle. Event A is strong evidence of an embolus passing through a blood flow region near the selected sample volume.

[0034] Event B is another likely candidate for an embolus. In this case, the high-intensity signal seen in the depth-mode display **102** is non-vertical, but does not appear exclusively within a range of depths where blood is flowing. While this signal is strong enough and/or has a long enough back scatter to appear outside the blood flow margin in the depth-mode display **102**, the spectrogram display **108** still shows the characteristic high intensity transient signal associated with an embolus. Event B is also evidence of an embolus, but likely an embolus different in nature from that associated with event A. Although the particular signal characteristics of various emboli have not yet been fully explored in the depth-mode display, the distinction between events A and B is likely that of different embolus types. For example, event A may be associated with a particulate embolus, whereas event B may be associated with a gaseous embolus, with the different acoustic properties of a gas bubble causing the particularly long back scatter signal and the appearance of occurrence outside the demonstrated blood flow margins.

[0035] Event C is an artifact, whether associated with probe motion or some other non-embolic event. Event C appears as a vertical line in the depth-mode display **102**, meaning that a high-intensity signal was detected at all depth locations at precisely the same time—a characteristic associated with probe motion or other artifact. Similarly, the high-intensity signal displayed in the spectrogram display **108** is a vertical line indicating a high-intensity signal detected for a wide range of velocities (including both positive and negative velocities and velocities in excess of the maximum blood flow velocities) at precisely the same time. Event C then is readily characterized as an artifact signal, and not embolic in nature.

[0036] Those skilled in the art will appreciate that the simultaneous display of the depth-mode display **102** and the spectrogram **108** provides not only convenient means for locating the desired sample volume, but also provides a particularly useful technique for distinguishing embolic signals from artifact signals, and perhaps even for characterizing different embolic signals. Such embolic detection and characterization is easily observed by the operator, but can also be automatically performed and recorded by the ultrasound apparatus.

[0037] Automatic embolus detection is provided by observing activity in two or more sample gates within the blood flow at the same time. The system discriminates between two different detection hypotheses:

[0038] (1) If the signal is embolic, then it will present itself in multiple sample gates over a succession of different times.

[0039] (2) If the signal is a probe motion artifact, then it will present itself in multiple sample gates simultaneously.

[0040] These two hypotheses are mutually exclusive, and events that are declared embolic are done so after passing the “Basic Identification Criteria of Doppler Microembolic Signals” (see, for example, *Stroke*, vol. 26, p. 1123, 1995) and verifying that successive detection (by time-series analysis or other suitable technique) of the embolic signal in different sample gates is done at different points in time, and that the time delay is consistent with the direction of blood flow. The differentiation of embolic from artifact signals can be further confirmed by also observing activity at one or more sample gates outside the blood flow.

[0041] FIG. 9 is a functional block diagram that depicts an ultrasound system **150** in accordance with an embodiment of the invention. The ultrasound system **150** produces the various display modes described above in connection with FIGS. 1-8 on an integrated flat panel display **152** or other desired display format via a display interface connector **154**. The signal processing core of the Doppler ultrasound system **150** is a master pulse Doppler circuit **156** and a slave pulse Doppler circuit **158**. The Doppler probes **160** are coupled with other system components by a probe switching circuit **162**. The probe switching circuit **162** provides both presence-detect functionality and the ability to distinguish between various probes, such as by detecting encoding resistors used in probe cables or by other conventional probe-type detection. By providing both the master and slave pulse Doppler circuits **156** and **158**, two separate ultrasound probes **160** may be employed, thereby providing unilateral or bilateral ultrasound sensing capability (such as bilateral transcranial measurement of blood velocity in the basal arteries of the brain). The master and slave pulse Doppler circuits **156** and **158** receive the ultrasound signals detected by the respective probes **160** and perform signal and data processing operations, as will be described in detail below. Data is then transmitted to a general purpose host computer **164** that provides data storage and display. A suitable host computer **164** is a 200 MHz Pentium processor-based system having display, keyboard, internal hard disk, and external storage controllers, although any of a variety of suitably adapted computer systems may be employed.

[0042] The ultrasound system **150** also provides Doppler audio output signals via audio speakers **166**, as well as via audio lines **168** for storage or for output via an alternative medium. The ultrasound system **150** also includes a microphone **170** for receipt of audible information input by the user. This information can then be output for external storage or playback via a voice line **172**. The user interfaces with the ultrasound system **150** primarily via a keyboard or other remote input control unit **174** coupled with the host computer **164**.

[0043] FIGS. 10 and 11 depict particular details of the master and slave pulse Doppler circuits **156** and **158**. To the extent FIGS. 10 and 11 depict similar circuit structures and interconnections, these will be described once with identical reference numbers used in both Figures. FIG. 10 also depicts details concerning the input and output of audio information to and from the ultrasound system **150** via the microphone **170**, the speakers **166**, and the audio output lines **168** & **172**, the operations of which are controlled by the master pulse Doppler circuit **156**.

[0044] At the transducer input/output stage, each of the pulse Doppler circuits **156** and **158** includes a transmit/

receive switch circuit 175 operating under control of a timing and control circuit 176 (with the particular timing of operations being controlled by the timing and control circuit 176 of the master pulse Doppler circuit 156). The timing and control circuit 176 also controls operation of a transmit circuit 178 that provides the output drive signal causing the Doppler probes 160 (see FIG. 9) to emit ultrasound. The timing and control circuit 176 also controls an analog-to-digital converter circuit 180 coupled to the transmit/receive switch 175 by a receiver circuit 182. The function and operation of circuits 175-182 are well known to those skilled in the art and need not be described further.

[0045] The primary signal processing functions of the pulse Doppler circuits 156 and 158 are performed by four digital signal processors P1-P4. P1 is at the front end and receives digitized transducer data from the receiver 182 via the analog-to-digital converter circuit 180 and a data buffer circuit or FIFO 186. P4 is at the back end and performs higher level tasks such as final display preparation. A suitable digital signal processor for P1 is a Texas Instruments TMS320LC549 integer processor, and suitable digital signal processors for P2-P4 are Texas Instruments TMS320C31 floating point processors, although other digital signal processing circuits may be employed to perform substantially the same functions in accordance with the invention.

[0046] Received ultrasound signals are first processed by the digital signal processor P1 and then passed through the signal processing pipeline of the digital signal processors P2, P3, and P4. As described in detail below, the digital signal processor P1 constructs quadrature vectors from the received digital data, performs filtering operations, and outputs Doppler shift signals associated with 64 different range gate positions. The digital signal processor P2 performs clutter cancellation at all gate depths. The digital signal processor P3 performs a variety of calculations, including autocorrelation, phase, and power calculations. P3 also provides preparation of the quadrature data for stereo audio output. The digital signal processor P4 performs most of the calculations associated with the spectrogram display, including computation of the spectrogram envelope, systole detection, and also prepares final calculations associated with preparation of the Aiming display.

[0047] Each of the digital signal processors P1-P4 is coupled with the host computer 164 (see FIG. 9) via a host bus 187 and control data buffer circuitry, such as corresponding FIFOs 188(1)-188(4). This buffer circuitry allows initialization and program loading of the digital signal processors P1-P4, as well as other operational communications between the digital signal processors P1-P4 and the host computer. Each of the digital signal processors P2-P4 is coupled with an associated high-speed memory or SRAM 190(2)-190(4), which function as program and data memories for the associated signal processors. In the particularly depicted signal processing chain of FIG. 10 or 11, the digital signal processor P1 has sufficient internal memory, and no external program and data memory need be provided. Transmission of data from one digital signal processor to the next is provided by intervening data buffer or FIFO circuitry 192(2)-192(4). The ultrasound data processed by the digital signal processor P4 is provided to the host computer 164 via data buffer circuitry such as a dual port SRAM 194.

[0048] Referring to FIG. 10, the digital signal processor P4 of the master pulse Doppler circuit 156 also processes audio input via the microphone 170, as well as controlling provision of the audio output signals to the speakers 166 and audio output lines 168, 172. P4 controls the audio output signals by controlling operations of an audio control circuit 196, which receives audio signals from both the master and the slave pulse Doppler circuits 156 and 158.

[0049] Referring to process flow charts shown in FIGS. 12-16, a detailed description will now be provided of the operations performed by each of the digital signal processors P1-P4 included in both the master and slave pulse Doppler circuits 156 and 158. Particular detailed calculations and numerical information are provided to disclose a current embodiment of the invention, but those skilled in the art will appreciate that these details are exemplary and need not be included in other embodiments of the invention.

[0050] Referring to FIG. 12, the operations of digital signal processor P1 are as follows:

[0051] 1. DIGITIZATION OF RAW DATA. Read $A(1:N)$, a series of N 14-bit values from the input A/D. The values are converted at $4\times$ the Doppler carrier frequency (8 MHz), and commence synchronously with the start of the transmit burst. $N=1000$ if the Doppler pulse repetition frequency (PRF) is 8 kHz, 1280 if the Doppler PRF is 6.25 kHz, and 1600 if the Doppler PRF is 5 kHz.

[0052] 2. QUADRATURE VECTOR CONSTRUCTION. Construct two vectors with $N/4$ points each according to the following rules: $Br(1:N/4)=A(1:4:N-3)-A(3:4:N-1)$, and $Bi(1:N/4)=A(2:4:N-2)-A(4:4:N)$. Br and Bi are the digitally demodulated quadrature Doppler values for a series of $N/4$ different gate depths. The subtractions here remove DC bias from the data.

[0053] 3. LOW-PASS FILTER COEFFICIENTS. Br and Bi contain frequencies up to carrier/4, and need to be further filtered to remove noise outside the bandwidth of the Doppler transmit burst. The coefficients for accomplishing this low-pass filtering are determined by a creating, with standard digital filter design software such as MATLAB, an order 21 low-pass FIR filter. The normalized cutoff of this filter is $2/(T*fs)$, where T is the time duration of the transmit burst, and fs is the sample rate of the data in Br and Bi (2 MHz). Call this filter $C(1:21)$. The coefficients of this filter will vary as the transmit burst length is changed by the user, and a bank of several different sets of filter coefficients is accordingly stored to memory.

[0054] 4. INDEX ARRAYS. Data from 64 range gate positions are to be processed and passed onto P2. For ease of graphical display, these range gate positions are selected to be 1 mm apart. However, the quadrature vectors Br and Bi do not contain elements that are spaced 1 mm apart—they are 0.385 mm apart. Therefore, indices into the Br and Bi arrays are used that correspond to values falling closest to multiples of 1 mm, as a means to decimating Br and Bi to 1 mm sampling increments. This is done by having a prestored array of indices, $D1(1:64)$, corresponding

to depths 29:92 nm for 8 kHz PRF, and indices D2(1:64) and D3(1:64) with corresponding or deeper depth ranges for 6.25 kHz and 5 kHz PRFs.

[0055] 5. LOW-PASS FILTER AND DECIMATION OF QUADRATURE DATA. The Br and Bi arrays are low-pass filtered and decimated to 64 gates by the following rules (note <a,b> is the 32 bit accumulated integer dot product of vectors a and b):

[0056] 8 kHz PRF:

$Er(j) = \langle C, Br(D1(j) + (-10:10)) \rangle$

$Ei(j) = \langle C, Bi(D(j) + (-10:10)) \rangle$, and $j = 1:64$.

[0057] 6.25 kHz PRF:

$Er(j) = \langle C, Br(D2(j) + (-10:10)) \rangle$

$Ei(j) = \langle C, Bi(D20(j) + (-10:10)) \rangle$, and $j = 1:64$.

[0058] 5 kHz PRF:

$Er(j) = \langle C, Br(D3(j) + (-10:10)) \rangle$

$Ei(j) = \langle C, Bi(D3(j) + (-10:10)) \rangle$, and $j = 1:64$.

[0059] 6. PASS RESULTS TO P2. Er and Ei, 128 values altogether, comprise the Doppler shift data for 1 pulse repetition period, over a set of 64 different sample gates spaced approximately 1 mm apart. These arrays are passed to P2 with each new transmit burst.

[0060] Referring to FIG. 13, the operations of digital signal processor P2 are as follows:

[0061] 1. ACCUMULATE INPUT DATA. Collect a buffer of M Er and Ei vectors from P1 over a period of 8 ms, into floating point matrices Fr and Fi. At the PRFs of [8,6.25,5]kHz, the matrices Fr and Fi will each contain respectively $M = [64, 50, 40]$ vectors. The jth Er and Ei vectors at their respective destinations are denoted by $Fr(1:64j)$ and $Fi(1:64j)$ (these are column vectors). The kth gate depth across the M collected vectors is indexed by $Fr(k, 1:M)$ and $Fi(k, 1:M)$ (these are row vectors).

[0062] 2. PRESERVATION OF RAW DATA AT "CHOSEN" GATE DEPTH. Reserve in separate buffer the raw data at the user-chosen gate depth, k, at which the Doppler spectrogram is processed. This row vector data, $Gr(1:M) = Fr(k, 1:M)$ and $Gi(1:M) = Fi(k, 1:M)$, is passed forward to P3 and eventually to the host for recording purposes.

[0063] 3. CLUTTER CANCELLATION. Apply a fourth order clutter cancellation filter to each row of Fr and Fi. $Hr(1:64, 1:M)$ and $Hi(1:64, 1:M)$ are the destination matrices of the filtered $Fr(1:64, 1:M)$ and $Fi(1:64, 1:M)$ data. Application of this filter with continuity requires maintaining state variables and some previous Fr and Fi values. The coefficients of the clutter filter will vary depending on the user choice of [Low Boost, 100 Hz, 200 Hz, 300 Hz, and High Boost]. These coefficients are available by table lookup in processor RAM, given the user choice from the above options.

[0064] 4. PASS RESULTS TO P3.

[0065] Gr, Gi, Hr and Hi are passed to P3 for further processing.

[0066] Referring to FIG. 14, the operations of digital signal processor P3 are as follows:

[0067] 1. ACCUMULATE INPUT DATA. Receive Gr, Gi, Hr and Hi from P2.

[0068] 2. COMPUTE AUTOCORRELATION. Compute the first lag of the autocorrelation of the data at each gate over time. Use all M values at each gate in this calculation. This will generate an array of 64 complex values, one for each gate. For the kth gate depth, let $P = Hr(k, 1:M) + jHi(k, 1:M)$. Then the first lag autocorrelation for this depth is $AC(k) = \langle P(1:M-1), P(2:M) \rangle$. (Note that in a dot product of complex values, the second vector is conjugated. Also note that this and all dot products in P2, P3, or P4 are floating point calculations.) In this manner, construct the complex vector $AC(1:64)$.

[0069] 3. COMPUTE PHASE FOR EACH AC VALUE. For each autocorrelation value, use a four quadrant arctangent lookup to determine the phase of the complex value. Specifically, $ANGLE(k) = \arctan(\text{imag}(AC(k)), \text{real}(AC(k)))$. The $ANGLE(k)$ value is proportional to the mean flow velocity at the gate depth k.

[0070] 4. If embolus characterization (e.g., distinguishing a particle from a bubble) capability is enabled, the method routes to a subroutine described below in connection with FIG. 16.

[0071] 5. COMPUTE POWERP Compute the signal power. Use all M values at each gate in this calculation. This will generate an array of 64 real values, one for each gate. For the kth gate depth, again let $P = Hr(k, 1:M) + jHi(k, 1:M)$. Then the power for this depth is $POWER(k) = \langle P(1:M), P(1:M) \rangle$ (note that in a dot product of complex values, the second vector is conjugated). In this manner, construct the real vector $POWER(1:64)$.

[0072] 6. LOG COMPRESS POWER. Convert POWER to Decibels: $POWERd(1:64) = 10 * \log_{10}(POWER(1:64))$.

[0073] 7. COMPUTE POWER TRACES FOR EMBOLUS DETECTION. For each of four preset gate depths (one being the user selected depth and the other three being correspondingly calculated), compute power from a 60 point moving window at M different positions of the window. Note that some history of the data at the specific gate depths will be required to maintain this calculation without interruption from new data spilling in every 8 ms. Specifically, for gate n, $POWER_TRACE(n) = \langle Hr(n, i-59:i) + jHi(n, i-59:i), Hr(n, i-59:i) + jHi(n, i-59:i) \rangle$. Note 3 power traces are taken from the region including the sample volume placed inside blood flow, while the fourth power trace is taken from a sample volume well outside the blood flow.

[0074] 8. COMPLEX BANDPASS FILTER FOR USE IN AUDIO OUTPUT

[0075] PREPARATION. The min and max frequencies resulting from user specified spectral unwrapping of the spectrogram are used to determine a complex bandpass filter for making the audio output sound congruent with what is

shown on the spectrogram display. For example, if the unwrapping occurs at $[-1,7]$ kHz, then the audio complex bandpass filter has edges at -1 kHz and $+7$ kHz. A bank of several sets of complex bandpass filter coefficients, corresponding to different unwrap ranges, is generated offline and placed in memory. Each coefficient set corresponds to one of the unwrapping selections the user can make. Let the operative set of filter coefficients be called $UWa(1:O)$ and $UWb(1:O)$, where O is the filter order plus one.

[0076] 9. AUDIO OUTPUT PREPARATION: RESAMPLE. At the gate depth selected by the user, k , the Doppler shift signals are to be played out the audio speakers. Before doing so, some prepping of the audio signals is important to match the user-selected spectral unwrapping. Resample the audio signal $Hr(k,1:M)$ and $Hi(k,1:M)$ to twice the PRF by multiplexing the respective arrays with zeros: $Qr(k, 1:2M) = \{Hr(k,1), 0, Hr(k,2), 0, Hr(k,3), 0, \dots, Hr(k,M), 0\}$ and $Qi(k, 1:2M) = \{Hi(k,1), 0, Hi(k,2), 0, Hi(k,3), 0, \dots, Hi(k,M), 0\}$.

[0077] 10. AUDIO OUTPUT PREPARATION: COMPLEX BANDPASS. Apply a complex bandpass filter to $Qr+jQi$ in order to remove the extra images introduced by multiplexing the data with zeros:

$$R(n) = UWb(1)*Q(n) + UWb(2)*Q(n-1) + UWb(O)*Q(n-O+1) - Uwa(2)*R(n-1) - Uwa(3)*R(n-2) - \dots - Uwa(O)*R(n-O+1)$$

[0078] where $Q(k) = Qr(k) + jQi(k)$.

[0079] 11. AUDIO OUTPUT PREPARATION: HILBERT TRANSFORM. The audio data in the sequence $R(n)$ is in quadrature format and needs to be converted into stereo left and right for playing to the operator. This is done with a Hilbert transform, and a 95 point transform, $H(1:95)$, is used in this work—the coefficients can be obtained with formulas in the literature or standard signal processing software such as MATLAB. The application of the Hilbert transform to a data sequence is done as an FIR filter. Construction of stereo separated signals RL and RR from $R(n)$ is done according to $[RL = \text{Hilbert}(Rr) + \text{Delay}(Ri), RR = \text{Hilbert}(Rr) - \text{Delay}(Ri)]$ where Delay is a $(Nh+1)/2$ step delay of the imaginary component of R , and Nh is the size of the Hilbert filter (95).

[0080] 12. Pass Gr , Gi , $ANGLE$, $POWERd$, $POWER_TRACE1$, $POWER_TRACE2$, $POWER_TRACE3$, $POWER_TRACE4$, Rr , Ri RL and RR to $P4$ for further processing.

[0081] Referring to FIG. 15, the operations of digital signal processor $P4$ are as follows:

[0082] 1. ACCUMULATE INPUT DATA. Receive Gr , Gi , $ANGLE$, $POWERd$, $POWER_TRACE1$, $POWER_TRACE2$, $POWER_TRACE3$, $POWER_TRACE4$, Rr , Ri , RL and RR from $P3$.

[0083] 2. CALCULATE SPECTROGRAM. Compute power spectrum via the following steps: a) Concatenate new points in the $Rr+jRi$ sequence with old points such that there are 128 points altogether, b) Multiply the 128 point sequence against a 128 point Hanning window, c) Calculate P , the FFT of the

128 point sequence, d) Calculate $Pd = 10 * \log_{10}(P)$, and e) FFTSHIFT the Pd sequence such that DC is at its center.

[0084] 3. ENVELOPE. Compute the maximum frequency follower or “envelope” function, $E(j)$, which indicates the upper edge of the flow signals in the spectrogram. This is an integer between 0 and 63, and is indexed by FFT calculation—i.e., for every spectral line calculation there is one value of E . Those skilled in the art will know of a variety of algorithms for making this calculation.

[0085] 4. SYSTOLE DETECTION. Based on the maximum frequency follower, detect the start of systole. When the systolic start has been determined, set $SYSTOLE_FLAG = \text{TRUE}$. Also calculate the end diastolic velocity value, $VEND$, the peak systolic velocity value, $VPEAK$, and the mean velocity, $VMEAN$.

[0086] 5. AIMING DISPLAY PREPARATION. Prepare the Aiming display via the following steps: a) Subtract the value of the “aim noise” parameter set by the user from the $POWERd$ array: $POWERd2 = POWERd - \text{aim_noise}$, b) multiply $POWERd2$ by a factor which is 64 (the number of color shades) divided by the value of the “aim range” parameter set by the user— $POWERd3 = POWERd2 * 64 / \text{aim_range}$, c) clip the resulting power data at 0 on the low end and 63 on the high end—the values now correspond to entries in a 64-value red or blue color table, and place results in array $POWERd4$, and d) multiply each of the power values by 1, 0 or -1 , depending respectively on whether the associated $ANGLE$ value is greater than the “filter cutoff parameter”, less in absolute value than the filter cutoff parameter, or less than the negative of the filter cutoff parameter. This results in 64 values (one per gate depth) in the range of $[-64, +63]$. This modified aiming array, $POWERd5$, is ready to display after sending to the host computer.

[0087] 6. SPECTROGRAM DISPLAY PREPARATION. Prepare the spectrogram display via the following steps: a) Subtract the user-selected noise floor parameter from the array Pd — $Pd2 = Pd - \text{spectral_noise}$, b) Rescale the spectral data to contain 256 colors across the user-specified dynamic range— $Pd3 = Pd2 * 256 / \text{spectral_range}$, c) truncate/clip the data to be integer valued from 0 to 255— $Pd4 = \min(255, \text{floor}(Pd3))$, d) truncate the data to 8 bits— $Pd5 = 8 \text{ bit truncate}(Pd4)$.

[0088] 7. AUDIO OUTPUT. Send the arrays RR and RL , the right and left speaker audio outputs, to the speakers via port writes.

[0089] 8. INPUT MICROPHONE. Sample M values into vector MIC from the input microphone port (M is # of transmit pulse repetitions within an 8ms period).

[0090] 9. EMBOLUS DETECTION: BACKGROUND POWER IN POWER

[0091] TRACES. For each of the four power traces, $POWER_TRACE1 \dots POWER_TRACE4$, corresponding to the

four preset gate depths, compute a background power level. Recall that POWER_TRACE_n contains M values, where M is # of transmit pulse repetitions within an 8 ms period). The background power value is obtained by a delta-follower for each trace, and is denoted by $\delta 1$, $\delta 2$, $\delta 3$, and $\delta 4$.

$\delta 1_{\text{new}} = \delta 1_{\text{old}} + \Delta$, where $\Delta = \text{sign}(\delta 1_{\text{old}} - \text{mean}(\text{POWER_TRACE1})) * 0.1 \text{ dB}$.

$\delta 2_{\text{new}} = \delta 2_{\text{old}} + \Delta$, where $\Delta = \text{sign}(\delta 2_{\text{old}} - \text{mean}(\text{POWER_TRACE2})) * 0.1 \text{ dB}$.

$\delta 3_{\text{new}} = \delta 3_{\text{old}} + \Delta$, where $\Delta = \text{sign}(\delta 3_{\text{old}} - \text{mean}(\text{POWER_TRACE3})) * 0.1 \text{ dB}$.

$\delta 4_{\text{new}} = \delta 4_{\text{old}} + \Delta$, where $\Delta = \text{sign}(\delta 4_{\text{old}} - \text{mean}(\text{POWER_TRACE4})) * 0.1 \text{ dB}$.

[0092] This update in the background values is done once every M power values, or every 8 ms.

[0093] 10. EMBOLUS DETECTION: PARABOLIC FIT. Apply a parabolic fit algorithm to the power trace each gate and determine if an event is occurring during the 8 ms period. This fit must be applied to successive data windows spaced apart by at most 1 ms. If the parabolic fit is concave down, and has a peak that exceeds the background power for the gate depth by 6 dB (an arbitrary threshold), then an event is detected.

[0094] 11. EMBOLUS DETECTION: TIME DETERMINATION. For any single-gate events, compute the exact time of the event by analyzing the power trace between the -6 dB points on either side of the peak power of the event. Record event results and times so that current events may be compared to past ones.

[0095] 12. EMBOLUS DETECTION: HIGH LEVEL CALCULATION. If the following conditions are true, then set DETECTION=TRUE: a) at least two adjacent of three gates in vicinity of blood flow show events within a 40 ms time window, b) the gate outside the blood flow shows no detection, and c) the timing of events shows progression in the direction of blood flow (i.e., the embolus is not swimming upstream).

[0096] 13. Pass Gr, Gi, POWER_{d5}, Pd5, SYSTOLE-FLAG, VEND, VMEAN, VPEAK, MIC and DETECTION to host for further processing.

[0097] Referring to FIG. 16, the embolus characterization subroutine operations of digital signal processor P3 are as follows:

[0098] 4A. CALCULATE MATRIX ELEMENT MAGNITUDES of Hr+jHi: $H_{\text{mag}}(1:64,1:M) = 10 * \log 10(H_r^2 + H_i^2)$.

[0099] 4B. CALCULATE REFERENCE BACKGROUND POWER LEVEL Pb. $H_{\text{mean}} = \text{sum}(\text{sum}(H_{\text{mag}}(1:64,1:M))) / (64 * M)$. IF PbOLD > Hmean THEN Pb = PbOLD - 0.1 dB, ELSE Pb = PbOLD + 0.1 dB. (This is a delta follower of the background power level).

[0100] 4C. DETERMINATION OF R1 and R2, constants to be used in characterization. T1=transmit burst length in microseconds. T2=pulse repetition period, in microseconds. We know a priori that elements of Hk(1:64) are attached to 1 mm incre-

ments in depth. Then $R1 = \text{axial resolution in mm} = c * T1 / 2$, where $c = 1.54 \text{ mm/microsecond}$, and $R2 = 2 * R1$. For example, a 20 cycle transmit burst at 2 MHz carrier frequency has $R1 = 7.2 \text{ mm}$, where $R2 = 14.4 \text{ mm}$.

[0101] 4D. DETECT EMBOLUS SIGNATURE by examining each column of $H_{\text{mag}}(1:64,1:M)$ and determining longest contiguous segment of data such that each element in the contiguous segment is greater than $Pb + X_{\text{dB}}$ ($X = 3$, e.g.). More specifically, let $H_k(1:64) = H_{\text{mag}}(1:64,k)$. Locate longest sequence within H_k , demarcated by starting and ending indices $H_k(i1:i2)$, such that $H_k(i) > Pb + X$ if $i1 \leq i \leq i2$. The length of this sequence is then determined by fitting the first three points of $H_k(i1:i2)$ with a parabola, and finding the left most point on the abscissa, $z1$, where the parabola crosses the ordinate of Pb. If the parabola does not intersect the line $y = Pb$, then $z1 = i1$. Similarly, the last three points of $H_k(i1:i2)$ are fitted with a parabola and $z2$ is located. If the parabola does not intersect the line $y = Pb$, then $z2 = i2$. The length of $H_k(i1:i2)$ is $z2 - z1$. IF $z2 - z1 < R1$, then no embolus is present. If $R1 < z2 - z1 < R2$, then a particulate is present. If $z2 - z1 > R2$, then a bubble is present.

[0102] 4E. Pass this information along to P4. If P4 agrees that an embolus is being detected, then attach the characterization information.

[0103] Those skilled in the art will appreciate that the invention may be accomplished with circuits other than those particularly depicted and described in connection with FIGS. 9-11. These figures represent just one of many possible implementations of a Doppler ultrasound system in accordance with the invention. Likewise, the invention may be accomplished using process steps other than those particularly depicted and described in connection with FIG. 12-16.

[0104] Those skilled in the art will also understand that each of the circuits whose functions and interconnections are described in connection with FIGS. 9-11 is of a type known in the art. Therefore, one skilled in the art will be readily able to adapt such-circuits in the described combination to practice the invention. Particular details of these circuits are not critical to the invention, and a detailed description of the internal circuit operation need not be provided. Similarly, each one of the process steps described in connection with FIGS. 12-16 will be understood by those skilled in the art, and may itself be a sequence of operations that need not be described in detail in order for one skilled in the art to practice the invention.

[0105] It will be appreciated that, although specific embodiments of the invention have been described for purposes of illustration, various modifications may be made without deviating from the spirit and scope of the invention. For example, a user interface in accordance with the present invention may be provided by means other than a video display, such as a printer or other visual display device. Those skilled in the art will also appreciate that many of the advantages associated with these circuits and processes described above may be provided by other circuit configurations and processes. Accordingly, the invention is not

limited by the particular disclosure above, but instead the scope of the invention is determined by the following claims.

1-56. (canceled)

57. A Doppler ultrasound system, comprising:

an ultrasound transducer from which ultrasound signals are emitted into the subject along an ultrasound beam axis;

an ultrasound receiver detecting echo signals resulting from the ultrasound signals emitted into the subject;

an analog-to-digital converter (ADC) circuit coupled to the ultrasound receiver to quantize the echo signals received by the ultrasound receiver into digital sample values; and

a processor coupled to the ADC circuit for processing the digital sample values to calculate blood flow data as a function of time for a plurality of locations along the ultrasound beam axis and having a component associated with blood flow at each of the locations along the ultrasound beam axis for which blood flow data is calculated, the blood flow data representative of blood flow detected along the ultrasound beam axis as a function of time.

58. The system of claim 57 wherein the processor comprises a processor calculating detected Doppler signal power data as a function of time for a plurality of locations along the ultrasound beam axis and the processor is further operable to generate data that varies the blood flow velocity component based on the detected Doppler signal power data.

59. The system of claim 57 wherein the processor comprises:

first processing circuitry for processing the digital sample values to calculate data representative of quadrature vectors, each quadrature vector having a first vector component and a second vector component;

digital filter circuitry coupled to the first processing circuitry for processing the data representative of the quadrature vectors to provide filtered quadrature vector data, the filtered quadrature vector data representative of the quadrature vectors having noise from outside a bandwidth of interest removed;

clutter removal circuitry coupled to the digital filter circuitry for processing the filtered quadrature vector data to provide clutter cancelled vector data, the clutter cancelled vector data representative of the filtered quadrature vector data having contribution from stationary reflectors removed; and

second processing circuitry coupled to the clutter removal circuitry for processing the clutter cancelled vector data to provide the blood flow velocity data as a function of time for the plurality of locations along the ultrasound beam axis.

60. The system of claim 59 wherein the second processing circuitry coupled to the clutter removal circuitry further processes the clutter cancelled vector data to provide detected Doppler signal power data as a function of time for the plurality of locations along the ultrasound beam axis.

61. The system of claim 59 wherein the first and second vector components comprises a real vector component and an imaginary vector component, respectively.

62. The system of claim 57 wherein the blood flow data representative of blood flow detected along the ultrasound beam axis comprises first blood flow velocity data representative of blood flow in a first direction, and second blood flow velocity data representative of blood flow in a second direction.

63. The system of claim 57 wherein the processor coupled to the ADC is further operable to generate data indicating blood flow velocities as a function of time for a selected location along the ultrasound beam axis.

64. A data processing engine for a Doppler ultrasound system having an ultrasound transducer from which ultrasound signals are emitted into the subject along an ultrasound beam axis and an ultrasound receiver detecting echo signals resulting from the ultrasound signals emitted into the subject, the data processing engine comprising:

an analog-to-digital converter (ADC) circuit coupled to the ultrasound receiver to quantize the echo signals received by the ultrasound receiver into digital sample values, the digital sample values stored as sample vectors; and

a processor coupled to the ADC circuit for processing the digital sample vectors to calculate blood flow data as a function of time for a plurality of locations along the ultrasound beam axis and having a component associated with blood flow at each of the locations for which data is calculated, the processor further operable to process the sample vectors to calculate detected Doppler signal power data as a function of time for a plurality of locations along the ultrasound beam axis and vary the component based on the detected Doppler signal power data.

65. The data processing engine of claim 64 wherein processing the digital sample vectors by the digital signal processor to calculate blood flow data comprises calculating a mean blood flow velocity for the plurality of locations along the ultrasound beam axis.

66. The data processing engine of claim 64 wherein processing the digital sample vectors by the digital signal processor to calculate blood flow data comprises calculating a median blood flow velocity for the plurality of locations along the ultrasound beam axis.

67. The data processing engine of claim 64 wherein processing the digital sample vectors by the digital signal processor to calculate blood flow data comprises calculating a peak blood flow velocity for the plurality of locations along the ultrasound beam axis.

68. The data processing engine of claim 64 wherein the digital signal processor comprises:

first processing circuitry for processing the sample vectors to calculate data representative of quadrature vectors;

digital filter circuitry coupled to the first processing circuitry for processing the data representative of the quadrature vectors to provide filtered quadrature vector data, the filtered quadrature vector data representative of the quadrature vectors having noise from outside a bandwidth of interest removed;

clutter removal circuitry coupled to the digital filter circuitry for processing the filtered quadrature vector data to provide clutter cancelled vector data, the clutter cancelled vector data representative of the filtered

quadrature vector data having contribution from stationary reflectors removed; and

second processing circuitry coupled to the clutter removal circuitry for processing the clutter cancelled vector data to provide the blood flow velocity data.

69. The system of claim 68 wherein the second processing circuitry coupled to the clutter removal circuitry further processes the clutter cancelled vector data to provide detected Doppler signal power data as a function of time for the plurality of locations along the ultrasound beam axis.

70. The data processing engine of claim 67 wherein the first processing circuitry comprises processing circuitry for calculating data representative of quadrature vectors, each quadrature vector having a first vector component and a second vector component.

71. The data processing engine of claim 70 wherein the first and second vector components comprises a real vector component and an imaginary vector component.

72. The data processing engine of claim 64 wherein the processor further generates spectrogram data indicating blood flow velocities as a function of time for a selected location along the ultrasound beam axis.

73. In a Doppler ultrasound system emitting pulsed ultrasound signals along an ultrasound beam axis and detecting echo signals resulting therefrom, a method for generating blood flow information of a subject to which the Doppler ultrasound system is applied, the method comprising:

for each pulse of ultrasound, quantizing the detected echo signals to generate a plurality of digital sample values representative of the echo signals; and

processing digital sample values of the detected echo signals to calculate data representative of blood flow velocity detected along the ultrasound beam axis as a function of time and having a component associated with blood flow velocity at each of the plurality of locations along the ultrasound beam axis.

74. The method of claim 73, further comprising generating detected Doppler signal power data for a plurality of locations along the ultrasound beam axis and generating data that is representative of varying the component associated with blood flow velocity at each of the plurality of locations along the ultrasound beam axis based on the detected Doppler signal power data.

75. The method of claim 73, further comprising calculating filter coefficients based on the rate at which the detected echo signals are quantized and wherein processing the digital sample values comprises:

generating a quadrature vector from the plurality of digital sample values of each pulse of ultrasound;

processing each quadrature vector using the filter coefficients to calculate filtered quadrature vector data representative of the quadrature vector having noise from outside a bandwidth of interest removed; and

calculating from a plurality of quadrature vectors clutter cancelled vector data representative of the filtered quadrature vectors having contribution from stationary reflectors removed from the filtered quadrature vectors; and

processing the clutter cancelled vector data to provide the data representative of blood flow information.

76. The method of claim 75, further comprising calculating detected Doppler signal power for the plurality of locations along an ultrasound beam axis from the clutter cancelled vector data.

77. The method of claim 75 wherein quantizing comprises quantizing the detected echo signals at four times the frequency of the emitted ultrasound signals.

78. The method of claim 77 wherein generating quadrature vectors from the plurality of digital sample values of each pulse of ultrasound comprises:

dividing the sample values into sets of four values, each set having first, second, third and fourth values; and

for each set, subtracting the third from the first values to generate a real vector component of the quadrature vector and subtracting the fourth from the second values to generate an imaginary vector component of the quadrature vector.

79. The method of claim 73 wherein processing the digital sample values to calculate data representative of blood flow velocity further comprises calculating mean blood flow velocity data as a function of time for locations along the ultrasound beam axis.

80. The method of claim 73 wherein processing the digital sample values to calculate data representative of blood flow velocity comprises calculating median blood flow velocity data as a function of time for locations along the ultrasound beam axis.

81. The method of claim 73 wherein processing the digital sample values to calculate data representative of blood flow velocity comprises calculating peak blood flow velocity data as a function of time for locations along the ultrasound beam axis.

82. The method of claim 73, further comprising generating data to representing spectral information indicating blood flow velocities at the selected one of the displayed locations.

83. In a Doppler ultrasound system emitting ultrasound signals along an ultrasound beam axis and detecting echo signals resulting therefrom, a method for providing blood flow information of a subject to which the Doppler ultrasound system is applied, the method comprising:

quantizing the detected echo signals to generate a plurality of digital sample values representative of the echo signals;

generating quadrature vectors from the plurality of digital sample values;

processing the quadrature vectors to calculate blood flow data as a function of time for a plurality of locations along the ultrasound beam axis and to calculate detected Doppler signal power data as a function of time for the plurality of locations along the ultrasound beam axis; and

generating data from the blood flow data and the detected Doppler signal power data that is representative of blood flow detected along the ultrasound beam axis as a function of time, the data having a component associated with blood flow at each of the locations that varies based on the corresponding detected Doppler signal power data.

84. The method of claim 83, further comprising processing the quadrature vectors to calculate detected Doppler

signal power data as a function of time for the plurality of locations along the ultrasound beam axis, and generating data from the detected Doppler signal power data representative of varying the blood flow velocity component based on the detected Doppler signal power data.

85. The method of claim 83 wherein quantizing comprises quantizing the detected echo signals at four times the frequency of the emitted ultrasound signals.

86. The method of claim 85 wherein generating quadrature vectors from the plurality of digital sample values comprises:

dividing the sample values into sets of four values, each set having first, second, third and fourth values; and

for each set, subtracting the third from the first values to generate a real vector component of the quadrature vector and subtracting the fourth from the second values to generate an imaginary vector component of the quadrature vector.

87. The method of claim 83, further comprising calculating filter coefficients based on the rate at which the detected echo signals are quantized, and wherein processing the quadrature vectors to calculate blood flow data comprises:

processing each quadrature vector using the filter coefficients to calculate filtered quadrature vector data representative of the quadrature vector having noise from outside a bandwidth of interest removed;

calculating from the data for a plurality of quadrature vectors clutter cancelled vector data representative of the filtered quadrature vectors having contribution from stationary reflectors removed from the filtered quadrature vectors; and

processing the clutter cancelled vector data to provide blood flow velocity data as a function of time for the plurality of locations along the ultrasound beam axis.

88. The method of claim 87, further comprising calculating detected Doppler signal power for each of the first plurality of locations along an ultrasound beam axis from the clutter cancelled vector data.

89. The method of claim 83, further comprising processing the quadrature vectors to calculate a mean velocity for each of the plurality of locations along the ultrasound beam axis.

90. The method of claim 83, further comprising processing the quadrature vectors to calculate a median velocity for each of the plurality of locations along the ultrasound beam axis.

91. The method of claim 83, further comprising processing the quadrature vectors to calculate a peak velocity for each of the plurality of locations along the ultrasound beam axis.

92. The method of claim 83, further comprising generating data representing spectral information indicating blood flow velocities at the selected one of the displayed locations.

93. A computer-readable medium having computer executable instructions for controlling digital processing circuitry in a Doppler ultrasound system to process detected ultrasound echo signals and provide blood flow information, by:

controlling an analog-to-digital converter (ADC) circuit to quantize the detected ultrasound echo signals to

generate a plurality of digital sample values representative of the ultrasound echo signal;

generating quadrature vectors from the plurality of digital sample values;

processing the quadrature vectors to calculate blood flow data as a function of time for a plurality of locations along the ultrasound beam axis and to calculate detected Doppler signal power data as a function of time for the plurality of locations along the ultrasound beam axis; and

processing the blood flow data to generate data that is representative of blood flow as a function of time detected for the plurality of locations along the ultrasound beam axis, the blood flow data having a component at each of the plurality of locations that varies based on the corresponding detected Doppler signal power data.

94. The computer readable medium of claim 93 wherein the computer executable instructions for processing the blood flow data comprises processing the quadrature vectors to calculate detected Doppler signal power data for the plurality of locations along the ultrasound beam axis and processing the blood flow data to generate data representing varying the component based on the detected Doppler signal power data.

95. The computer readable medium of claim 93 wherein the computer executable instructions for controlling the ADC circuit comprises computer executable instructions for controlling the ADC circuit to quantize the detected echo signals at four times the frequency of the emitted ultrasound signals.

96. The computer readable medium of claim 95 wherein the computer executable instructions for generating quadrature vectors from the plurality of digital sample values comprises computer executable instructions for:

dividing the sample values into sets of four values, each set having first, second, third and fourth values; and

for each set, subtracting the third from the first values to generate a real vector component of the quadrature vector and subtracting the fourth from the second values to generate an imaginary vector component of the quadrature vector.

97. The computer readable medium of claim 93, further comprising computer executable instructions for calculating filter coefficients based on the rate at which the detected echo signals are quantized, and wherein the computer executable instructions for processing the quadrature vectors to calculate blood flow data comprises computer executable instructions for:

processing the quadrature vectors using the filter coefficients to calculate filtered quadrature vector data representative of the quadrature vectors having noise from outside a bandwidth of interest removed; and

calculating clutter cancelled vector data representative of the filtered quadrature vector data having contribution from stationary reflectors removed from the filtered quadrature vector data.

98. The computer readable medium of claim 97, further comprising computer executable instructions for calculating the detected Doppler signal power as a function of time for

the plurality of locations along an ultrasound beam axis from the clutter cancelled vector data.

99. The computer readable medium of claim 93, further comprising computer executable instructions for processing the quadrature vectors to calculate a mean velocity for the plurality of locations along the ultrasound beam axis.

100. The computer readable medium of claim 93, further comprising computer executable instructions for processing the quadrature vectors to calculate a median velocity for the plurality of locations along the ultrasound beam axis.

101. The computer readable medium of claim 93, further comprising computer executable instructions for processing the quadrature vectors to calculate a peak velocity for the plurality of locations along the ultrasound beam axis.

102. The computer readable medium of claim 93, further comprising computer executable instructions for processing

the blood flow data to display spectral information indicating blood flow velocities at the selected one of the locations along the ultrasound beam axis.

103. The computer readable medium of claim 93 wherein the computer executable instructions for processing the blood flow data to generate data that is representative of blood flow as a function of time detected for the plurality of locations along the ultrasound beam axis comprises computer executable instructions for processing the blood flow data to generate data representative of blood flow in a first direction and generate data representative of blood flow in a second direction.

* * * * *

专利名称(译)	用于监测血流的多普勒超声方法和装置		
公开(公告)号	US20050075568A1	公开(公告)日	2005-04-07
申请号	US10/612822	申请日	2003-07-01
[标]申请(专利权)人(译)	MOEHRING 马克		
申请(专利权)人(译)	MOEHRING MARK A.		
当前申请(专利权)人(译)	MOEHRING MARK A.		
[标]发明人	MOEHRING MARK A		
发明人	MOEHRING, MARK A.		
IPC分类号	A61B8/06 G01S7/52 G01S15/58 G01S15/89 A61B8/02		
CPC分类号	A61B8/06 A61B8/463 G01S7/52036 G01S7/52046 A61B8/0816 G01S7/52073 G01S15/8984 G01S15/8988 G01S7/52071 A61B8/488		
其他公开文献	US7537568		
外部链接	Espacenet USPTO		

摘要(译)

描述了用于监测血流的脉冲多普勒超声系统和相关方法。图形信息显示包括同时显示的深度模式和频谱图显示。深度模式显示指示沿着超声波束轴的各种位置，在该位置处检测到血流。这些位置表示为一个或多个着色区域，其颜色指示血流的方向，并且强度根据检测到的多普勒超声信号幅度或检测到的血流速度而变化。深度模式显示还包括指针，其位置可以由用户选择。显示的频谱图对应于指针识别的位置。还提供了栓子检测和表征。

