

(19)



(11)

**EP 1 502 252 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**02.10.2013 Bulletin 2013/40**

(51) Int Cl.:  
**H01L 51/52** <sup>(2006.01)</sup> **G09G 3/32** <sup>(2006.01)</sup>  
**G09G 3/20** <sup>(2006.01)</sup>

(21) Application number: **03727625.0**

(86) International application number:  
**PCT/GB2003/001784**

(22) Date of filing: **28.04.2003**

(87) International publication number:  
**WO 2003/094140 (13.11.2003 Gazette 2003/46)**

(54) **ELECTROLUMINESCENT DISPLAY AND DRIVER CIRCUIT TO REDUCE PHOTOLUMINESCENCE**

ELEKTROLUMINESZENZE ANZEIGE UND TREIBER-SCHALTUNG ZUR REDUKTION VON  
PHOTOLUMINESZENZ

DISPOSITIF D'AFFICHAGE ELECTROLUMINESCENT ET CIRCUIT DE COMMANDE  
PERMETTANT DE REDUIRE LA PHOTOLUMINESCENCE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **01.05.2002 GB 0210013**

(43) Date of publication of application:  
**02.02.2005 Bulletin 2005/05**

(73) Proprietor: **Cambridge Display Technology  
Limited  
Cambridgeshire, CB3 6DW (GB)**

(72) Inventors:  
• **SMITH, Euan C.,  
Cambridge Display Tech. Ltd  
Cambridge,  
Cambridgeshire CB3 OTX (GB)**

• **GUNNER, Alec G.,  
Cambridge Display Tech. Ltd  
Cambridge,  
Cambridgeshire CB3 0TX (GB)**  
• **HALLS, Jonathan J.M.,  
Cambridge Display Tech. Ltd  
Cambridge,  
Cambridgeshire CB3 0TX (GB)**

(74) Representative: **Martin, Philip John  
Marks & Clerk LLP  
62-68 Hills Road  
Cambridge  
CB2 1LA (GB)**

(56) References cited:  
**WO-A1-01/63586 DE-A- 10 042 974**  
**US-B1- 6 201 520 US-B1- 6 222 323**

**EP 1 502 252 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** This invention generally relates to display driver circuits for electro-optic displays, and more particularly relates to circuits and methods for reducing the re-emission of absorbed light, for example to increase the colour gamut of organic light emitting diode displays.

**[0002]** Organic light emitting diodes (OLEDs) comprise a particularly advantageous form of electro-optic display. They are bright, colourful, fast-switching, provide a wide viewing angle and are easy and cheap to fabricate on a variety of substrates. Organic LEDs may be fabricated using either polymers or small molecules in a range of colours (or in multi-coloured displays), depending upon the materials used. Examples of polymer-based organic LEDs are described in WO 90/13148, WO 95/06400 and WO 99/48160; examples of so called small molecule based devices are described in US 4,539,507.

**[0003]** A basic structure 100 of a typical organic LED is shown in Figure 1a. A glass or plastic substrate 102 supports a transparent anode layer 104 comprising, for example, indium tin oxide (ITO) on which is deposited a hole transport layer 106, an electroluminescent layer 108, and a cathode 110. The electroluminescent layer 108 may comprise, for example, a PPV (poly (p-phenylenevinylene)) and the hole transport layer 106, which helps match the hole energy levels of the anode layer 104 and electroluminescent layer 108, may comprise, for example, PEDOT: PSS (polystyrene-sulphonate-doped polyethylene-dioxythiophene). Cathode layer 110 typically comprises a low work function metal such as calcium and may include an additional layer immediately adjacent electroluminescent layer 108, such as a layer of aluminium, for improved electron energy level matching. Contact wires 114 and 116 and to the anode the cathode respectively provide a connection to a power source 118. The same basic structure may also be employed for small molecule devices.

**[0004]** Other examples of materials which may be employed for layer 108 include poly (2-methoxy-5-(2-ethyl) hexyloxyphenylene-vinylene) ("MEH-PPV"), a PPV derivative (e.g. a di-alkoxy or di-alkyl derivative), a polyfluorene and/or a co-polymer incorporating polyfluorene segments, PPVs and/or related co-polymers, poly (2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-secbutylphenyl) imino)-1,4-phenylene)) ("TFB"), ("PFB") poly (2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methylphenyl) imino)-1,4-phenylene-((4-methylphenyl) imino)-1,4-phenylene)) ("PFM"), poly (2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methoxyphenyl) imino)-1,4-phenylene-((4-methoxyphenyl) imino)-14-phenylene)) ("PFMO"), poly (2,7-(9,9-di-n-octylfluorene) ("F8") or poly (2,7-(9,9-di-n-octylfluorene)-3,6-Benzothiadiazole) ("F8BT"). Alternatively a so-called small molecule such as tris-(8-hydroxyquinolino aluminium) ("Alq3") as described in US 4,539,507, may be employed.

**[0005]** In the example shown in Figure 1a light 120 is

emitted through transparent anode 104 and substrate 102 and such devices are referred to as "bottom emitters". Devices which emit through the cathode may also be constructed, for example by keeping the thickness of cathode layer 110 less than around 50-100 nm so that the cathode is substantially transparent.

**[0006]** Organic LEDs may be deposited on a substrate in a matrix of pixels to form a single or multi-colour pixelated display. A multicoloured display may be constructed using groups of red, green, and blue emitting pixels. In such displays the individual elements are generally addressed by activating row (or column) lines to select the pixels, and rows (or columns) of pixels are written to, to create a display. So-called active matrix displays have a memory element, typically a storage capacitor and a transistor, associated with each pixel whilst passive matrix displays have no such memory element and instead are repetitively scanned, somewhat similarly to a TV picture, to give the impression of a steady image.

**[0007]** Figure 1b shows a cross section through a passive matrix OLED display 150 in which like elements to those of Figure 1a are indicated by like reference numerals. In the passive matrix display 150 the electroluminescent layer 108 comprises a plurality of pixels 152 and the cathode layer 110 comprises a plurality of mutually electrically insulated conductive lines 154, running into the page in Figure 1b, each with an associated contact 156. Likewise the ITO anode layer 104 also comprises a plurality of anode lines 158, of which only one is shown in Figure 1b, running at right angles to the cathode lines. Contacts (not shown in Figure 1b) are also provided for each anode line. An electroluminescent pixel 152 at the intersection of a cathode line and anode line may be addressed by applying a voltage between the relevant anode and cathode lines.

**[0008]** Referring now to Figure 2a, this shows, conceptually, a driving arrangement for a passive matrix OLED display 150 of the type shown in Figure 1b. A plurality of constant current generators 200 are provided, each connected to a supply line 202 and to one of a plurality of column lines 204, of which for clarity only one is shown. A plurality of row lines 206 (of which only one is shown) is also provided and each of these may be selectively connected to a ground line 208 by a switched connection 210. As shown, with a positive supply voltage on line 202, column lines 204 comprise anode connections 158 and row lines 206 comprise cathode connections 154, although the connections would be reversed if the power supply line 202 was negative and with respect to ground line 208.

**[0009]** As illustrated pixel 212 of the display has power applied to it and is therefore illuminated. To create an image connection 210 for a row is maintained as each of the column lines is activated in turn until the complete row has been addressed, and then the next row is selected and the process repeated. Alternatively a row may be selected and all the columns written in parallel, that is a row selected and a current driven onto each of the

column lines simultaneously, to simultaneously illuminate each pixel in a row at its desired brightness. Although this latter arrangement requires more column drive circuitry it is preferred because it allows a more rapid refresh of each pixel. In a further alternative arrangement each pixel in a column may be addressed in turn before the next column is addressed, although this is not preferred because of the effect, inter alia, of column capacitance as discussed below. It will be appreciated that in the arrangement of Figure 2a the functions of the column driver circuitry and row driver circuitry may be exchanged.

**[0010]** It is usual to provide a current-controlled rather than a voltage-controlled drive to an OLED because the brightness of an OLED is determined by the current flowing through it, this determining the number of photons it outputs. In a voltage-controlled configuration the brightness can vary across the area of a display and with time, temperature, and age, making it difficult to predict how bright a pixel will appear when driven by a given voltage. In a colour display the accuracy of colour representations may also be affected.

**[0011]** Figures 2b to 2d illustrate, respectively, the current drive 220 applied to a pixel, the voltage 222 across the pixel, and the light output 224 from the pixel over time 226 as the pixel is addressed. The row containing the pixel is addressed and at the time indicated by dashed line 228 the current is driven onto the column line for the pixel. The column line (and pixel) has an associated capacitance and thus the voltage gradually rises to a maximum 230. The pixel does not begin to emit light until a point 232 is reached where the voltage across the pixel is greater than the OLED diode voltage drop. Similarly when the drive current is turned off at time 234 the voltage and light output gradually decay as the column capacitance discharges. Where the pixels in a row are all written simultaneously, that is where the columns are driven in parallel, the time interval between times 228 and 234 corresponds to a line scan period.

**[0012]** It is desirable to be able to provide a greyscale-type display, that is one in which the apparent brightness of individual pixels may be varied rather than simply set either on or off. In the context of this invention "greyscale" refers to such a variable brightness display, whether a pixel is white or coloured.

**[0013]** The conventional method of varying pixel brightness is to vary pixel on-time using Pulse Width Modulation (PWM). In the context of Figure 2b above the apparent pixel brightness may be varied by varying the percentage of the interval between times 228 and 234 for which drive current is applied. In a PWM scheme a pixel is either full on or completely off but the apparent brightness of a pixel varies because of integration within the observer's eye.

**[0014]** Pulse Width Modulation schemes provide a good linear brightness response but to overcome effects related to the delayed pixel turn-on they generally employ a precharge current pulse (not shown in Figure 2b) on

the leading edge 236 of the driving current waveform, and sometimes a discharge pulse on the trailing edge 238 of the waveform. As a result, charging (and discharging) the column capacitance can account for half the total power consumption in displays incorporating this type of brightness control. Other significant factors which the applicant has identified as contributing to the power consumption of a display plus driver combination include dissipation within the OLED itself (a function of OLED efficiency), resistive losses in the row and column lines and, importantly in a practical circuit, the effects of a limited current driver compliance, as explained in more detail later.

**[0015]** Figure 3 shows a schematic diagram 300 of a generic driver circuit for a passive matrix OLED display. The OLED display is indicated by dashed line 302 and comprises a plurality  $n$  of row lines 304 each with a corresponding row electrode contact 306 and a plurality  $m$  of column lines 308 with a corresponding plurality of column electrode contacts 310. An OLED is connected between each pair of row and column lines with, in the illustrated arrangement, its anode connected to the column line. A y-driver 314 drives the column lines 308 with a constant current and an x-driver 316 drives the row lines 304, selectively connecting the row lines to ground. The y-driver 314 and x-driver 316 are typically both under the control of a processor 318. A power supply 320 provides power to the circuitry and, in particular, to y-driver 314.

**[0016]** Figure 4 shows a typical active matrix OLED driver circuit 400. A circuit 400 is provided for each pixel of the display and ground 402,  $V_{ss}$  404, row select 414 and column data 416 busbars are provided interconnecting the pixels. Thus each pixel has a power and ground connection and each row of pixels has a common row select line 414 and each column of pixels has a common data line 416.

**[0017]** Each pixel has an organic LED 406 connected in series with a driver transistor 408 between ground and power lines 402 and 404. A gate connection 409 of driver transistor 408 is coupled to a storage capacitor 410 and a control transistor 412 couples gate 409 to column data line 416 under control of row select line 414. Transistor 412 is a field effect transistor (FET) switch which connects column data line 416 to gate 409 and capacitor 410 when row select line 414 is activated. Thus when switch 412 is on a voltage on column data line 416 can be stored on a capacitor 410. This voltage is retained on the capacitor for at least the frame refresh period because of the relatively high impedances of the gate connection to driver transistor 408 and of switch transistor 412 in its "off" state.

**[0018]** Driver transistor 408 is typically an FET transistor and passes a (drain- source) current which is dependent upon the transistor's gate voltage less a threshold voltage. Thus the voltage at gate node 409 controls the current through OLED 406 and hence the brightness of the OLED.

**[0019]** A voltage-driven active matrix display is described in US 5,684,365 and a current-driven active matrix display is described in WO 99/65012. Other specific examples of OLED display drivers are described in US 6,014,119, US 6,201,520, US 6,332,661, EP 1,079,361A and EP 1,091,339A; OLED display driver integrated circuits are also sold by Clare Micronix of Clare, Inc., Beverly, MA, USA. The Clare Micronix drivers provide a current controlled drive and achieve greyscaling using a conventional PWM approach; US 6,014,119 describes a driver circuit in which pulse width modulation is used to control brightness; US 6,201,520 describes driver circuitry in which each column driver has a constant current generator to provide digital (on/off) pixel control; US 6,332, 661 describes pixel driver circuitry in which a reference current generator sets the current output of a constant current driver for a plurality of columns, but this arrangement is not suitable for variable brightness displays; and EP 1,079,361A and EP 1,091,339A both describe similar drivers for organic electroluminescent display elements in which a voltage drive rather than a current drive is employed.

**[0020]** Display technologies based upon inherently emissive devices, unlike, for example, LCDs, tend to have a bright and visually pleasing appearance. There is a continuing need to improve the visual contrast of emissive displays and OLED-based displays in particular, but it is not always clear what effects contribute to contrast reduction. The applicant has recognised that the electroluminescent materials normally used in both organic and inorganic light emitting diodes are generally also photoluminescent, and that this photoluminescence can contribute to contrast reduction.

**[0021]** Photoluminescence is a phenomenon in which, broadly speaking, a material absorbs light at one wavelength and re-emits light at a longer wavelength. This photoluminescence can be difficult to observe, even under laboratory conditions, but has the effect of giving a display a less lively appearance, particularly under bright ambient light conditions, and especially outdoors in sunlight. The applicant has found that such contrast-reducing photoluminescence can be stimulated either by absorbed ambient light or by self-absorption particularly, for example, in a display comprising a plurality of pixels, where light from one pixel can cause a neighbouring nominally off pixel to photoluminesce. In a colour display this effect can also cause a colour shift, as described further later.

**[0022]** In more detail, referring to Figures 1a and 1b, incident ambient light passes through the substrate 102, transparent anode 104, and hole transport layer 106 to the layer of electroluminescent material 108 where it is absorbed generating excitons, that is bound electron-hole pairs. Alternatively excitons may be generated by light from nearby illuminated pixels propagating through the electroluminescent layer 108, and/or transparent anode layer 104, and/or hole transport layer 106, and/or substrate 102.

**[0023]** With no applied field a significant fraction of these optically excited excitons rapidly radiatively decay emitting light substantially isotropically according to the photoluminescence spectra of the material or materials forming layer 108. The fraction of the excitons decaying radiatively depends upon the photoluminescence efficiency of the material and upon the applied field. When the diode formed by the device is in an off state - typically, but not necessarily, when the anode and the cathode are at the same electrical potential - layer 108 is in a quiescent photo-emitting state. Thus when the display is viewed an observer sees a combination of the emitted photoluminescence and reflected and/or scattered light from the display, both of which tend to reduce the display contrast.

**[0024]** Prior art contrast improving techniques have concentrated upon the use of anti-reflection devices, such as filters, the circular polariser described in US 6,211,613 (WO97/38452) assigned to the present applicant, and the black anti-reflection cathode described in US 5,049,780. However these techniques can be insufficient, for example reducing the desired light emission. Moreover these techniques are unable to reduce the level of self-stimulated photoluminescence.

**[0025]** Background prior art relating the improvement of colour purity in electroluminescent displays is described in EP 1 087 444, which relates to separate red, green and blue gamma correction, and in EP 1 093 322, which relates to OLED device instruction.

**[0026]** The applicant has recognised that contrast in a light emitting diode-based display, such as a passive or active matrix OLED-based display, may be increased by reducing the contrast-reducing photoluminescence. Where the display comprises light emitting diodes, especially organic LEDs, this photoluminescence may be reduced or quenched by reverse biasing selected ones of the light emitting diodes, that is those LEDs not emitting at any particular moment in time.

**[0027]** The possibility of improving OLED display contrast by reducing or quenching photoluminescence has never previously been recognised. Schemes for applying reverse bias to OLED displays are known in the prior art, but these are not intended or suitable for improving contrast by the reduction of photoluminescence. Consequently these prior art reverse biasing schemes exhibit some differences from those described below for contrast-improving photoluminescence reduction.

**[0028]** U. Lemmer et. al., Synthetic Metals, 67 (1994) 169-172 describes the experimental observation of the basic phenomenon of photoluminescence quenching in an ITO/PPV/A1 structure.

**[0029]** WO98/41065 discloses the application of either polarity of driving voltage to an electroluminescent polymer-based display to drive either red light emission from an interface of the polymer or green light emission from the bulk of the polymer.

**[0030]** However, in both cases, the light-emitting semiconductor is forward biased (the device effectively comprises two back- to- back diodes) .

**[0031]** US 6,201,520 describes the use of reverse biasing for non-selected pixels in a pixellated OLED display to prevent crosstalk which could otherwise be caused by the (electrically) semi-excited state of the non-selected pixels. However US'520 does not specify any particular value of reverse bias drive and does not provide any teaching on the application of a reverse bias drive sufficient to provide an improved contrast display by photoluminescence quenching. Furthermore the mechanism for applying a reverse bias in US'520 limits the reverse bias voltage to the forward bias voltage whereas, generally speaking, it is preferable to apply a larger reverse bias voltage than the forward voltage to achieve adequate photoluminescence reduction for improved contrast.

**[0032]** US 5,965,901, assigned to the present applicant, describes the use of a pulse driving scheme for an organic light-emitting polymer device to improve device lifetime in which positive pulses are separated by negative (reverse bias) pulses. However this document does not contemplate applying reverse bias to some pixels at the same time as applying forward bias to others and is thus unsuitable for reducing photoluminescence stimulated by emission from pixels within the display. Furthermore again the document does not provide any teaching on the application of a reverse bias drive sufficient to provide an improved contrast display by photoluminescence quenching.

**[0033]** EP 1094438A describes the periodic application (for example, every frame) of reverse bias to reduce leakage current due to through-film shorts.

**[0034]** DE 10042974 describes a method for electrically addressing fluorescent display element based on polymers and/or low molecular-weight organic materials by a fluorescent quenching effect due to an electric field. The method includes the steps of changing positive voltages applied to bright pixels to be inversely related to the intensity of ambient light and changing negative voltages applied to dark pixels to be related to the intensity of ambient light. The document describes Organic Light-Emitting Diode display (OLED) and Field Quenching Photoluminescence Emission Device (FQPED) modes but does not describe in detail apparatus for carrying out the methods, nor the phenomenon of photoluminescence due to self-absorption in a display comprising a plurality of pixels, where light from one pixel can cause a neighbouring nominally off pixel to photoluminesce, nor particular problems associated with photoluminescence in colour displays.

**[0035]** WO01/63586 describes an OLED drive circuit which addresses the problem of the capacitance of the drive leads and thus the relatively long settling time during a writing period. This problem is addressed by providing extra current via column electrode capacitances and a circuit which supplies a voltage jump in the forward direction of OLED conductance during a selection period.

**[0036]** The invention is set forth in the independent claims.

**[0037]** Reverse biasing some of the display elements while forward biasing others helps to improve contrast by reducing photoluminescence due to ambient light absorption and self-stimulation. Providing two drivers, one to provide a forward drive and the other for the reverse bias drive, simplifies the driving circuitry and facilitates reverse biasing some display elements whilst forward biasing others. For example providing two drivers for a passive matrix display allows even some pixels in a column selected for forward biasing to be reverse biased.

**[0038]** Preferably the first driver is a current driver such as a controllable or adjustable or modulatable substantially constant current driver, and the second driver is a voltage driver. A precision reverse bias voltage drive is not necessary, however, and thus the voltage driver need not be a constant voltage driver. Thus the first driver is preferably configured to provide a positive output with respect to a ground level, and the second driver to provide a negative output, positive in this context denoting a forward bias direction. Providing a forward current drive and a reverse voltage drive is appropriate to the functions of these two drives since a forward current drive assists in providing a consistent and/or controlled output whilst photoluminescence quenching, although needing a small, light-dependent current is, broadly speaking, a voltage driven effect. In order to be operable from a single-ended supply the driver preferably incorporates means, such as an inverter or charge pump, to generate a negative supply voltage for the second driver to provide the reverse bias drive.

**[0039]** The driver is configured to provide pulse width modulation control of the brightness of a display element, for example by modulating a substantially constant current drive. In such an arrangement some benefits of the invention may be obtained without reverse biasing some of the display elements at the same time as forward biasing others, since where the pixels are not all at their maximum brightness there will be periods when none of the pixels will be forward driven. A reverse bias may be applied during this period (or during these periods) to reduce the photoluminescence from ambient illumination rather than self-stimulation, to provide some improvement in contrast.

**[0040]** In one embodiment the driver is configured for driving a passive matrix display and has row and column drivers for addressing the pixels, either individually or a row (or column) at a time.

**[0041]** The visually observed degree of contrast improvement depends upon the brightness of the illumination, and also on its wavelength or spectral characteristics since photoluminescence occurs at a longer wavelength than the incident illumination. Preferably the reverse bias is sufficient for a visibly discernable improvement in display contrast under sunlight, which has a typical illuminance of 10,000 (or more) lux (for indirect sunlight) and 100,000 (or more) lux (for direct sunlight), and which has a spectrum approximating that of a black body at 5400K.

**[0042]** We will also describe a display driver for a colour display, the display comprising at least two types of electroluminescent pixels, a first type of pixel having an emission peaked at a first wavelength and a second type of pixel having an emission peaked at a second, longer wavelength, the display driver being configured to drive at least some of said first type of pixel on at a different time to pixels of said second type, and wherein the display driver is further configured to reverse bias at least some of said second type of pixel during the period when said at least some of said first type of pixel are driven on.

**[0043]** The pixels may be alternately or sequentially driven so that one set of pixels of a first colour is driven whilst a second set of pixels of a second colour, redder than the first, is reverse biased. The forward and reverse biasing may be performed, for example, under processor control, which can provide the advantage of being substantially transparent to a user of the display driver. Pulse width modulation brightness and/or colour control may also be incorporated. The reverse biasing may be accomplished sufficiently rapidly not to be noticed by a human observer of the display. The display may be of a passive matrix type or of an active matrix type or of some other type, for example a segmented display with a separate electrode for each display element or segment.

**[0044]** We will also describe display driver circuitry for providing an improved contrast electroluminescent display, the electroluminescent display comprising a plurality of electroluminescent (EL) display elements, the display driver circuitry comprising a driver to apply a first polarity drive to at least one first display element of said EL display elements to cause said at least one first display element to electroluminesce; and means to apply a second polarity drive to at least one second display element of the EL display elements to at least partially quench photoluminescence from said at least one second display element, said first and second display elements comprising different display elements, said first and second polarity drives comprising opposite polarity drives, and said first and second polarity drives at least partially overlapping in time.

**[0045]** Preferably the driver is an adjustable, controllable, or modulatable substantially constant current driver. The photoluminescence may be quenched by, for example, 5%, 10%, 20%, 50% or more, preferably to provide a visible improvement in contrast. The display driver circuitry may provide an improvement in contrast of, for example, more than 1%, more than 5%, more than 10% or more than 20%, when the contrast is measured in accordance with an integrating sphere method, an open box method, or a sampling sphere method as described, for example, in US National Institute of Standards and Technology document NISTIR 6738, "Proposed Diffuse Ambient Contrast Measurement Methods for Flat Panel Displays", Edward F Kelley, April 2001.

**[0046]** The means to apply the second polarity drive may comprise voltage drive means, for example to provide a voltage drive of at least 5 volts, preferably at least

10 volts, and more preferably at least 20 volts. Alternatively the means to apply the second polarity drive may comprise means to connect the first polarity drive back to front across a said display element.

**[0047]** The electroluminescent display may be a passive matrix display, the display driver circuitry then including row and column electrode driver circuitry. The driver circuitry may be configured to reverse bias pixels with a row or column electrode in common with a forward driven display element or pixel.

**[0048]** We also describe a method of using a display driver to improve contrast in a display comprising a plurality of light emitting diode display elements addressed by row-wise scanning, the method comprising operating the display driver to reverse-bias substantially all non-scanned non-emitting display elements to at least partially quench photoluminescence from said non-emitting display elements whereby said display contrast is enhanced; and wherein said reverse bias drive is sufficient to provide a reduction in photoluminescence, with all display elements off of at least 50% under an illuminance of at least 100,000 lux from a source approximating a black body at a temperature of 5400K.

**[0049]** This method provides similar advantages to the above-described display drivers and may be employed to improve contrast in a multicolour display and, in effect, to provide improved colour gamut. In the above method it will be understood that display elements which are at times non-emitting may nevertheless appear illuminated if at other times they are light-emitting, for example where display elements are rapidly driven on and off to give the appearance of being illuminated.

**[0050]** We will also describe a method for improving the contrast of a multicolour organic electroluminescent display device, the display device comprising a plurality of organic electroluminescent elements, and a driving device for selectively controlling the current through each element and the bias voltage across each element such that each organic electroluminescent element may be selectively forward biased to cause light emission from said element, unbiased or reverse biased, the method being characterised in that when a selection of said organic electroluminescent elements are forward biased a further selection of said organic electroluminescent elements are reverse biased at a voltage sufficient to quench the photoluminescent emission emitted from said further selection of electroluminescent elements.

**[0051]** We will also describe a method of increasing the colour gamut of an emissive colour display, the display comprising at least two types of electroluminescent pixels, a first type of pixel having an emission peaked at a first wavelength and a second type of pixel having an emission peaked at a second, longer wavelength, the method comprising reverse biasing at least some of said second type of pixel at least whilst some of said first type of pixel are illuminated.

**[0052]** In all the above drivers, driver circuits and methods the display preferably comprises organic light-emit-

ting diode display elements. These may be arranged as a matrix, in either a single colour to provide a monochrome display, or in a matrix comprising groups of pixels of different colours to provide a multicolour display. Alternatively the OLED display elements may comprise separately driveable segments of a display such as a seven-segment numerical display or a multi-segment display dedicated to a particular application

**[0053]** These and other aspects of the invention will now be further described, by way of example only with reference to the accompanying figures in which:

Figures 1a and 1b show cross sections through, respectively, an organic light emitting diode and a passive matrix OLED display;

Figures 2a to 2d show, respectively, a conceptual driver arrangement for a passive matrix OLED display, a graph of current drive against time for a display pixel, a graph of pixel voltage against time, and a graph of pixel light output against time;

Figure 3 shows a schematic diagram of a generic driver circuit for a passive matrix OLED display according to the prior art;

Figure 4 shows a typical active matrix voltage-controlled OLED driver circuit;

Figure 5 shows a pixellated colour OLED display and driver;

Figures 6a and 6b show spectra of electroluminescent materials illustrating photoluminescence quenching;

Figure 7 shows a pixel driving waveform for photoluminescence quenching for improved display contrast;

Figures 8a and 8b show first and second driver circuits for reverse biasing pixels of a passive matrix display;

Figures 9a to 9f show, respectively, a non-illuminated, non-reverse biased cross-section through the colour display of Figure 5; a blue-illuminated pixel with red and green photoluminescence; a blue illuminated pixel with red and green photoluminescence quenched by reverse biasing; a green illuminated pixel with red photoluminescence; a green illuminated pixel with red photoluminescence quenched by reverse biasing; and a red illuminated pixel;

Figure 10 shows a CIE colour space diagram illustrating contraction of the colour gamut of an OLED display due to photoluminescence;

Figure 11 shows colour pixel driving waveforms for photoluminescence quenching for improved colour gamut;

Figure 12 shows experimental apparatus for characterising photoluminescence quenching;

Figures 13a and 13b show photoluminescence quenching signals for two devices measured using the apparatus of Figure 12;

Figure 14 shows photoluminescent intensity as a function of illumination wavelength for the device of Figure 13a; and

Figure 15 shows a possible theoretical mechanism for photoluminescence quenching.

**[0054]** The applicant has recognised that contrast in a light emitting diode-based display, such as a passive or active matrix OLED-based display, may be increased by reducing the contrast-reducing photoluminescence. Where the display comprises light emitting diodes, especially organic LEDs, this photoluminescence may be reduced or quenched by reverse biasing selected ones of the light emitting diodes, that is those LEDs not emitting at any particular moment in time.

**[0055]** Consider, for example, a simple OLED display, such as that shown in Figure 1a or 1b, with no forward or reverse bias applied. The apparent colour of the (non-illuminated) display is a combination of the colour of the photoluminescence from electroluminescent layer 108 of the display and the intrinsic colour of layer 108 and other layers, in particular the cathode layer, of the device. Thus where, for example, layer 108 is intrinsically colourless and photoluminesces in blue, under white ambient light the display (or non-forward driven pixels) will appear bluish with no bias, tending to reduce display contrast. However with a reverse bias applied the display (or non-illuminated pixels) will appear colourless or will have the cathode colour, hence allowing an increased contrast between pixel on and off states. Preferably the cathode is absorbing or black. Where the cathode is partially transparent, so that when the display (or a pixel) is off (not electroluminescing) a viewer may see through the cathode to what is behind, an absorbent or optically black layer may be provided behind the cathode.

**[0056]** Referring now to Figure 5, this shows an example of a pixellated display and driver structure 500. This broadly corresponds to the above described display structures except that the photoluminescent layer 108 is pixellated, that is it is divided into a plurality of separate display elements 502. Likewise the cathode layer (or layers) is divided into a plurality of separate cathodes each with its own contact. The substrate 102, anode 104, and hole transport layer 106 are, however, common to all the pixels. Thus an individual pixel may be switched off by applying a reverse bias between the common anode 104

and the appropriate cathode connection 156. In other pixelated displays X-Y pixel addressing may be employed using row and column electrodes.

**[0057]** In the arrangement of Figure 5 the individual photoluminescent display elements have different colours to provide a colour display. For example blue pixels may be provided using blue photoluminescent material and red and green pixels may be provided by filtering white photoluminescent emission.

**[0058]** The display equipment includes display driver circuitry 504 and a power source illustratively shown by battery 506. The display 502 comprises a plurality of red 508, green 510, and blue 512 pixels arranged in a pattern which, from a distance, is capable of providing the appearance of a variable colour display. A variety of pixel patterns are possible in addition to the one shown to help reduce visual artefacts. For example a repeated pattern of four pixels, red, green, green and blue may be employed.

**[0059]** Display driver 504 receives a display signal input 514 and provides an output 516 to drive electrodes 156. As illustrated in Figure 5 the common anode connection 104 and the negative terminal of the power source, battery 506, are both connected to ground. The display driver applies a positive voltage from power source 506 to a selected cathode connection in accordance with the display signal input on line 514. The display signal may comprise a single pixel on/off signal or may comprise an analogue or digital pixel brightness signal indicating a desired level of pixel brightness between the on and off states. In a colour display such as is illustrated separate signals are preferably provided for each red, green and blue pixel, to give the appearance of variable colour pixels.

**[0060]** The display driver may also incorporate means to provide an adjustable duty cycle pulse-width modulated (PWM) drive signal to each pixel responsive to the display signal input on line 514. The pulse modulated driving signal may have a zero or forward bias first current or voltage drive level and a second reverse bias voltage (or current) drive level. To reduce display flicker preferably the PWM signal should have a frequency of greater than 50 Hz, more preferably greater than 60Hz, most preferably greater than 75Hz. By selecting, for example, one of a plurality of mark-space ratios provided by a pulse generator the colour and luminescence or brightness of a pixel may be controlled.

**[0061]** Referring now to Figure 6, this shows exemplary spectra of two different types of electroluminescent material in Figures 6a and 6b. In Figures 6a and 6b the y-axis represents the intensity of light emitted from a device such as those shown in Figures 1a and 1b.

**[0062]** The spectrum of Figure 6a is representative of materials which although having a relatively high photoluminescence efficiency also have a strong intrinsic colour. An example of such a material is the polymer blend F8BT-TFB, which has a photoluminescence efficiency of greater than 80%, photoluminescing yellow under white

light, but also having an intrinsic yellowish colour, so that the material looks yellow even when the photoluminescence is quenched. This residual or intrinsic colour arises because the material intrinsically absorbs a set of wavelengths which gives it a yellow appearance. This yellow colour is also apparent when the material is deposited as a thin film as the material's absorption is still a significant factor.

**[0063]** Figure 6a shows three spectra 600 (not to scale) illustrating the variation of light intensity with wavelength for a material such as F8BT-TFB with an intrinsic colour. Spectrum 604 represents a photo-emission spectrum of a material in a device such as that shown in Figure 1a or 1b with zero applied bias. With forward bias the spectrum shifts to spectrum 606, with an enhanced electroluminescent emission and a peak which is shifted towards longer (redder) wavelengths. When reverse bias is applied to a device containing a material the spectrum shifts to spectrum 602, showing that the photoluminescent light emission is reduced in intensity and that the peak wavelength is shifted towards the blue.

**[0064]** Figure 6b, by contrast, shows a set of spectra 610 (not to scale) for a device containing a material with no intrinsic colour. Spectrum 614 shows the device photoluminescing with no applied bias, spectrum 616 the spectrum with forward bias applied with emission enhanced by electroluminescence, and spectrum 612 the spectrum with reverse bias applied to substantially quench the photoluminescence. As can be seen from Figure 6b the positions of the peaks of spectra 612, 614 and 616 remain substantially constant as substantially the only contribution to the device's colour arises from the emitted photo/electroluminescence and not, as in Figure 6a, from any contribution from the material's intrinsic colour.

**[0065]** The light from the display will generally include two components. A first component comprises the electro or photoluminescent emission itself and a second component arises from reflection or scattering of the ambient illumination by the display. This second component may be reduced by, for example, using a transparent or black cathode as described in US 5,049,780 or by using a circular polarising filter as described in US6,211,613 (WO97/38452). In such devices relatively little light may be scattered from the photoluminescent layer itself, in which case the spectra of Figure 6a may approach those of Figure 6b.

**[0066]** Although these spectra, and a possible photoluminescence quenching mechanism described later, are discussed with reference to F8BT and TFB, these are merely given as examples to facilitate explanation. Applications of the invention are not limited to these materials, which may be employed with any electro/photoluminescent materials, including inorganic materials and, in particular, to any OLED-based devices.

**[0067]** Referring now to Figure 7, this shows (not to scale) an exemplary pulse-width modulated (PWM) waveform 700, as is known in the art for use in controlling

pixel brightness, but additionally incorporating a photoluminescence quenching phase. The waveform shows the voltage applied to a pixel against time, the voltage varying between a first forward bias level 702, in the illustrated example +10 volts, and a second reverse bias level 704, in the illustrated example - 20 volts. This reverse bias level may correspond to the reverse bias needed for substantially complete photoluminescence quenching under typical operating conditions. Alternatively partial photoluminescence quenching, such as 5%, 10%, 20%, 50% or greater quenching, may be deemed sufficient to provide useful contrast enhancement. The portion of the waveform at voltage level 702 is referred as the "mark" and the portion of the waveform at level 704 as the "space". The waveform of Figure 7 may be generated by the display driver circuitry 504 of Figure 5.

**[0068]** In Figure 7, for the purposes of simplifying the illustration the waveform is shown as alternating between forward and reverse voltage drive levels. However it will often be preferable to provide a substantially constant current forward drive arrangement, optionally adjustable or controllable, rather than a forward voltage drive. A reverse current drive may also be provided, although this is less preferable to a voltage drive as the pixel LEDs generally have a high impedance in the reverse direction. Unlike the forward drive, which should preferably be carefully controlled to provide uniform display brightness, the exact level of reverse drive is not critical and need not be closely regulated.

**[0069]** During the mark portion of the waveform, the pixel luminesces and during the space portion of the waveform, any photoluminescence due to illumination by ambient light or other pixels is substantially quenched, thus increasing the apparent contrast of the display. Pulse width modulation brightness control is particularly suited to passive matrix displays. In such a passive matrix display, whilst one pixel is selected and forward biased, as previously described with reference to Figures 2a, 3 and 5, other pixels in the display may be reverse biased. Depending upon the switching and driving arrangement employed the reverse biased pixels may comprise pixels in other rows and/or columns to the row and/or column of the selected pixel or pixels or additional pixels in the same row and/or column as a selected pixel may also be reverse biased.

**[0070]** The skilled person will further recognise that in a display driver with PWM-based brightness control it is straightforward to reverse bias all the pixels in the display during periods in the PWM waveform, such as period 704 in Figure 7, when the selected pixel is itself reverse biased. This can be done, for example, by selecting all the pixels during period 704 when the selected pixel is off (and reverse biased) and driving all these pixels from a common bias generator or a plurality of reverse bias generators or drivers.

**[0071]** The frequency of the PWM waveform is chosen so that rather than a pixel appearing to flash on and off, emission from the pixel appears substantially continu-

ous, but with a brightness proportional to the on or mark period of the waveform. To achieve this, a frequency of at least 25 Hz to 50 Hz is generally required. It can be seen from that when the mark-to-space transition 706 is as shown, the pixel appears at approximately 25% of its full brightness. Transition positions 708 and 710 correspond, respectively, to pixel brightnesses of 50% and 75%, and 100% brightness corresponds to a steady state +10 volts (in the example) with a 100% mark : space ratio duty cycle. Waveforms other than that shown in Figure 7 may also be used and, for example, the driving waveform need not have square edges.

**[0072]** As previously mentioned, using pulse width modulation has the advantage that there is a substantially linear relationship between the duty cycle and the apparent pixel brightness. Were the pixel brightness to be varied by varying the reverse bias voltage the characteristics of individual pixels would need to be relatively closely matched and some form of linearisation, such as a look-up table, might also be necessary. An additional or alternative form of brightness control comprises sub-dividing each pixel into n sub-pixels with area ratios in powers of 2 ( $2^0$ ,  $2^1$ ,  $2^2$  etc), thus providing  $2^n$  different brightness levels depending upon which sub-pixels are selected to be on.

**[0073]** In principle, every pixel in the display may have a different brightness to the other pixels and thus the display driver 504 of Figure 5 should be capable of driving each pixel with a pulse width modulated waveform appropriate for its selected brightness. One way of achieving this is to provide a separate, variable pulse-width pulse generator for each pixel or for each row or column of pixels in the display. Integrated circuits which can be used for this purpose are available from the Clare Micro-nix subsidiary of Clare, Inc, California, USA and include the MXED101 and MXED102. For example, the MXED102 is a 240 channel cascadable column driver providing 240 independently adjustable pulse width modulated outputs. Data sheets for these devices are available on the Clare Micronix website and are hereby incorporated by reference.

**[0074]** In operation it is believed that when the diode formed by the anode, cathode and electroluminescent layer is reverse biased, that is when the anode is held at a lower electrical potential than the cathode, a fraction of the excitons generated by incident ambient or other illumination are split into their constituent holes and electrons. These holes and electrons are then conducted out of the structure with the aid of the applied electric field. Thus this fraction of the excitons is prevented from radiatively decaying and hence emitting photoluminescence. The fraction of the excitons split apart in this way is determined by the reverse voltage applied to the device, and thus the level of photoluminescence can be controlled from a maximum value with no applied voltage to a reduced value depending upon the degree of reverse bias.

**[0075]** It will be appreciated that the additional power

consumption of such a reverse-biased device is very low because, essentially, the only power required is that to conduct away the holes and electrons of the split excitons. This will vary depending upon the degree of incident illumination and upon the photoluminescence efficiency. It will also be appreciated that since a larger reverse bias is needed for greater photoluminescence reduction, the power consumption is to some degree dependent upon the degree of contrast required and upon the level of incident illumination. For example the reverse-bias power consumption will be higher in high ambient light conditions such as bright sunlight. The contrast improvement will be most apparent in materials which have both a high electroluminescent efficiency and a high photoluminescent-quenching efficiency. One example of such a material is F8BT-TFB.

**[0076]** Referring now to Figure 8a, this shows a driver circuit 800, similar to that of Figure 3, but including means for reverse-biasing non-emitting pixels. The OLED display 302 corresponds to the OLED display of Figure 3, and like features are indicated by like reference numerals. In Figure 8a a battery 802 provides power to a switch mode power supply unit 804 to provide, efficiently, a regulated DC power output. A separate inverter 808 is used to generate a negative power supply voltage for reverse biasing. In a practical design inverter 808 may be combined with switch mode power supply 804, or inverter 808 may comprise a second switch mode power supply, or a charge pump, or any other conventional means of generating a negative power supply. Alternatively a power supply derived from battery 802 may be split to provide positive, negative and ground reference voltages, or where, for example, the display is mains or similarly powered a conventional dual rail power supply may be employed.

**[0077]** The positive supply from power supply 804 supplies a forward driver 806 comprising, for example, a constant current generator. The negative voltage from inverter 808 supplies a reverse bias driver 810 typically a voltage driver, that is, a regulated or unregulated voltage source as opposed, for example, to a constant current source. The drive outputs from forward driver 806 and reverse driver 810 are provided to a column driver 814 including a plurality of switches 814a, one for each column electrode. Each switch is configured to connect a column electrode either to forward driver 806 or to reverse driver 810. A processor 812 has a data/control input for providing data for display to the display driver and has a first output for controlling the column driver 814 and in particular switches 814a. A row driver 816 is also provided, including a plurality of switches 816a, each for selectively connecting a row electrode 306 of display 302 to ground. Switches 816a are likewise under control of processor 812.

**[0078]** In operation processor 812 controls row driver 816 to select a row of the passive matrix OLED display 302, that is to selectively connect a row to ground, and controls column driver 814 to selectively connect one or

more of the column electrodes to forward driver 806. The pixel or pixels connected between the forward-driven column or columns and the selected row are thus forward-biased and emit light. The "unselected" columns are connected to reverse driver 810 and the "unselected" rows are also connected to ground to reverse bias the "off" pixels. It will therefore be appreciated that in a simplified arrangement row driver 816 may be dispensed with. Processor 812 may incorporate hardware and/or software for pulse width modulation brightness control of "on" pixels.

**[0079]** Referring now to Figure 8b, this shows a conceptual schematic diagram of a variant 850 of the driver circuitry shown in Figure 8a. As with driver circuitry 800 of Figure 8a forward driver 806 and a reverse driver 810 are provided, the forward driver preferably comprising a substantially constant source, albeit preferably adjustable or controllable for brightness control. Column switches 852a, b are provided to connect a column electrode of display 302 either to forward driver 806 or to ground. Likewise row switches 854a, b are provided to selectively connect each row either to reverse driver 812 or to ground.

**[0080]** As illustrated in Figure 8b, switches 852a and 854a are connected to forward bias OLED pixel 312a into light emission. Likewise switch 852b also couples OLED pixel 312b to forward driver 806 which, being in the same row as pixel 312a, is also forward driven into light emission. Switch 854 (and the switches of other non-selected rows not shown in Figure 8b) is, however, configured to connect the non-selected row (or rows) 1473117-1-bulk\_import to reverse driver 810. Reverse driver 810 is configured to provide sufficient reverse bias drive that OLED pixels 312c and 312d are reverse biased even though their anodes are connected to forward driver 806. The output of reverse driver 810 may therefore be greater than the desired reverse bias by an amount approximately equal to the expected forward bias from forward bias 806. Where forward driver 806 is a current driver, the forward drive voltage will depend, among other things, on the OLED characteristics but, generally speaking, it is possible to estimate an approximate forward drive voltage output or range of outputs and then to provide a reverse bias voltage with an adequate margin.

**[0081]** The arrangement of Figure 8b is useful in that it is normal to select a row and then drive many or all of the column electrodes simultaneously, to provide efficient refreshing of the display. It is therefore desirable to be able to apply reverse bias to non-selected pixels in such a situation.

**[0082]** It will be appreciated that in a segmented display or a combination display in which at least some of the display elements have separate drive electrodes, reverse biasing of unselected or non-emitting display elements is simply a matter of selecting either a forward or a reverse bias drive for application to respective electrodes of emitting and non-emitting display elements or segments.

**[0083]** A particular problem with the re-emission of absorbed light arises in the context of colour electroluminescent displays, as illustrated in Figure 9. Ambient light and light of a shorter wavelength than a particular pixel colour can cause photoluminescence from a pixel. Thus, for example, when blue pixels are illuminated nearby red and green pixels photoluminesce and when green pixels are illuminated nearby red pixels photoluminesce.

**[0084]** Figure 9a shows, schematically, red 902, 908, green 904, 910 and blue 906 pixels under ambient light 912. The ambient light 912 causes a low level of photoluminescence 914 from all the pixels.

**[0085]** In Figure 9b blue pixel 906 is forward driven to electroluminesce 916 and the red pixel 908 on one side of blue pixel 906 and the green pixels 904, 910 on another side of blue pixel 906 both photoluminesce 918. Similarly the slightly more distant red and green pixels 902, 910 also photoluminesce 920, albeit with a reduced intensity. In Figure 9d green pixels 904 electroluminesce 922 causing adjacent red pixels 902, 908 to photoluminesce 924, although blue pixel 906 being of a shorter wavelength, is not stimulated to photoluminesce. In Figure 9f red pixel 902, 908 are forward driven to electroluminesce 926 but the green and blue pixels 904, 906, 910 do not photoluminesce because they electro/photoluminesce at shorter wavelengths than the emission 926 of the red pixels 902, 908.

**[0086]** Figure 10 shows a CIE chromaticity diagram with ideal red, green and blue pixels colours marked at positions 1002, 1004 and 1006 respectively. The effect of the self-stimulated photoluminescence described above with reference to Figure 9 is to move the blue colour pixel position 1006 towards the green and red (see Figure 9b) to position 1006a. Likewise the green colour pixel position 1004 is moved towards the red (Figure 9d) to position 1004a. However the red colour pixel position 1002 is substantially unchanged (Figure 9f). Therefore, as can be immediately seen from Figure 10, the colour gamut of the display, that is the range of colours the display can produce, is reduced. It can further be appreciated that the effect of ambient illumination is broadly speaking, to shrink the colour gamut by moving each of pixel colour positions 1002, 1004 and 1006 inwardly towards white.

**[0087]** It will be appreciated from Figure 10, that correspondingly, the colour gamut of a display incorporating photoluminescent display elements may be improved by at least partially quenching the photoluminescence, in particular self-stimulated photoluminescence. Figure 9c shows the effect of photoluminescence quenching applied to Figure 9b, pixels 902, 904, 908, 910 having been reverse biased. Likewise Figure 9e shows the effect of photoluminescence quenching applied to Figure 9d, pixels 902 and 908 having been reverse biased. It can be seen that only selected pixels need to be reverse biased, in particular those pixels emitting at a longer wavelength than those currently driven. Thus when blue pixels are electroluminescing red and green pixels should be re-

verse biased and when green pixels are electroluminescing red pixels should be reverse biased, no reverse biasing being necessary when red pixels are electroluminescing. It will be appreciated that for improvement of the colour gamut of a display the photoluminescence need not be entirely quenched since partial quenching will result in at least some improvement in the colour gamut.

**[0088]** To allow a colour display to be provided in which, say, blue pixels are illuminated whilst red and green are quenched three sets of staggered waveforms 800 may be employed to ensure that only one colour of pixel is forward driven at any one time. This can be done by extending the cycle shown of Figure 7, for example as shown in Figure 11 to increase the reverse bias or "space" period 704.

**[0089]** In Figure 11 like reference numerals to those of Figure 7 are used to denote like features, with the addition of a, b or c to denote drive waveforms for red, green and blue pixels respectively. As Figure 11 shows, in effect with three colours the cycle is extended by a factor of three so that, say, red pixels can be reverse biased whilst green and whilst blue pixels are forward driven. This has the effect of reducing the maximum brightness of a PWM pixel by 1/3, at least for red pixels. It will be recognised that green pixels do not need to be reversed when red pixels are on and that blue pixels do not need to be reversed when red and/or green pixels are on.

**[0090]** The waveform of Figure 11 may be generated by the display driver circuitry 504 of Figure 5, for example operating along the lines described above with reference to driver circuits of Figures 8a and/or 8b. Alternatively an active matrix display may be employed, for example with two pixel driver circuits of the type shown in Figure 4 for each (colour) pixel, one as shown in Figure 4 to provide forward bias and a second similar (but inverted) circuit to provide reverse bias. Data may then be written to the pixel driver circuits, for example, under processor control, to bias the pixel in either a forward or reverse direction.

**[0091]** Referring now to Figure 12, this shows experimental apparatus 1200 for measuring the intensity of photoluminescence emitted by a OLED display device as reverse bias is applied.

**[0092]** A xenon lamp 1202 is coupled by a lens 1204 to a monochromator 1206, to allow the selection of a narrow range of illuminating wavelengths. The output from monochromator 1206 is then focussed via a pair of lenses 1208, 1210 onto the display device-under-test 1214. The lenses 1208, 1210 allow the monochromator output to be modulated by a mechanical chopper wheel 1212 driven a lock-in amplifier 1224. Photoluminescence from device-under-test 1214 excited by the illumination from monochromator 1206 is collected by lens 1216 and directed onto a photodiode 1220 also coupled to lock-in amplifier 1224. The collected light is filtered by a low-pass filter 1218 which rejects scattered light from monochromator 1206 whilst allowing the photoluminescence to pass. A voltage source 1222 is used to provide a var-

iable reverse bias voltage to device under test 1214. The lock-in amplifier 1224 provides an output indicating the level of photoluminescence from device 1214.

### Examples

**[0093]** The results from two exemplary devices will be presented. The first comprised an 80: 20 polymer blend of F8BT: TFB with a two layer calcium/ aluminium cathode. The second comprised a 79: 20: 1 polymer blend of F8BT: TFB: poly (2, 7- (9, 9- di- n- octylfluorene)- co- (2, 5- thienylene- 3, 6- benzothiadiazole- 2, 5- thienylene) with a three layer cathode of lithium fluoride/ calcium/ aluminium. Both devices photoluminesced in the yellow and had an intrinsic yellow colouration.

**[0094]** Figures 13a and 13b show the variation of photoluminescent emission with reverse bias for the first and second devices respectively. In each case the devices were excited using light having a wavelength of 466 nm, from monochromator 1206, and filter 1218 and photodiode 1220 were arranged to collect light of a wavelength longer than 570 nm. The two graphs have been normalised to a maximum 100% photoluminescence level at zero applied bias.

**[0095]** The two graphs show that with a reverse bias voltage of around 20 volts the photoluminescence is reduced to approximately half its initial value. The photoluminescence was observed to return to its original intensity once the reverse bias voltage was removed.

**[0096]** It will be appreciated that the reverse bias required for photoluminescence quenching depends on both the material or materials used in construction of the relevant OLED device and also upon the ambient lighting conditions. Thus in some situations, for example with polymer LED-based displays, relatively low reverse bias voltages, such as -5 volts, -10 volts, 15 volts or -20 volts may be all that is required to either quench the photoluminescence or to produce a visible improvement in display contrast. Small molecule based OLED devices may require larger voltages, such as -20 volts, -30 volts, -40 volts or -50 volts. The optimum value of reverse bias for any particular display may be determined by routine experimentation, wither along the lines mentioned above or, at its simplest, merely turning up the reverse bias from a low or zero level and observing the display contrast visually.

**[0097]** Figure 14 shows the variation of photoluminescence intensity as a function of illuminating wavelength from monochromator 1206 for the first device. The photoluminescence is cut off when the excitation wavelength is longer than around 570 nm; the residual tail on the graph of Figure 14 results from scattered light from the excitation source. It can be seen that the maximum photoluminescence is observed when the excitation source has a wavelength of between 400 nm and 500 nm. This characterisation assists in selecting an appropriate illumination source. The threshold for photoluminescence in the device of Figure 14, 570 nm, corresponds to the

minimum photon energy which can still generate an exciton in the photoluminescent material. Thus in devices where it is desirable to prevent photoluminescence stimulated by ambient or background light a filter cutting off at wavelengths above 570 nm placed in front of the device will reduce ambient light-stimulated photoluminescence whilst still permitting photoluminescent emission at wavelengths longer than 570 nm to pass.

**[0098]** Figure 15 illustrates a theoretical mechanism which is believed to be responsible for the photoluminescence quenching. Incident illumination causes a  $\pi$ - $\pi^*$  transition in one of the polymers, of the photoluminescent polymer blend, F8BT, generating an exciton, that is a bound hole-electron pair. This exciton may be dissociated by thermal energy greater than the exciton binding energy  $E_b$ . In an electric field the energy required to dissociate an exciton is reduced to approximately  $E_b - Xed$  where X is the electric field, e the charge on an electron and d the distance by which the hole and electron must be separated in order for the dissociation to be complete.

**[0099]** Referring again to Figure 15, this shows the vacuum energy level 1500 and the lowest unoccupied molecular orbital (LUMO) energy levels 1502 and 1504 for TFB and F8BT respectively. Figure 15 also shows the highest occupied molecular orbital (HOMO) energy levels 1506 and 1508 for TFB and F8BT respectively. In a simple picture, an exciton on F8BT will dissociate if the energy gained by a hole transferred to the HOMO of the TFB polymer (0.56eV) exceeds the binding energy of the exciton on the F8BT polymer. Similarly an exciton formed on the TFB polymer will dissociate if the energy gained by transferring an electron to the LUMO of the F8BT polymer exceeds the binding energy of the exciton on the TFB polymer. It is believed that by applying a reverse bias electric field the energy needed to dissociate an exciton on the F8BT and on the TFB polymer is reduced and thus this hole/electron transfer process is activated—that is less energy is required for this transfer process and thus, at a given temperature, the process is more likely to occur. Dissociation must take place faster than radiative recombination. Measurements have determined that the estimated reduction in binding energy is consistent with the energy required to separate a hole-electron pair by a distance roughly equal to the separation between TFB and F8BT polymer chains.

**[0100]** The described embodiments has mainly related to applications of the invention to passive matrix displays but the skilled person will appreciate that the invention is not limited to such displays. For example contrast or colour gamut may be improved in segmented displays in which each segment has a separate drive line, or in active matrix displays in which one or more transistors associated with each pixel maintain a pixel drive level after data has been written to the pixel to set the drive level. Likewise applications of the invention are not limited to organic light emitting diode-biased displays but include other types of emissive display, such as inorganic LED-based displays.

**[0101]** No doubt many effective alternatives will occur to the skilled person, and it should be understood that the invention is not limited to the described embodiments but encompasses modifications apparent to those skilled in the art lying within the scope of the claims appended hereto.

## Claims

1. A display (302) comprising a plurality of light emitting diode display elements (312), a plurality of row electrodes (304) and a plurality of column electrodes (308), each light emitting diode display element (312) being connected between a pair of row and column electrodes and a driver (800) for driving the display with a pulse width modulated (PWM) waveform incorporating a photoluminescence quenching phase, the driver comprising:

addressing circuitry (814, 816) to address said display elements, the addressing circuitry comprising row switches (816) to selectively connect each row to ground;;

a forward driver (806) to cooperate with said address circuitry to provide a forward drive to at least one of said display elements to illuminate the display element;

wherein the driver is configured to address said display by row-wise scanning;

and **characterised by**:

a reverse driver (810) to provide a reverse bias drive to others of said display elements at the same time as said at least one display element is illuminated to reduce a level of photoluminescence from said others of said display elements;

column switches (814) to connect a column electrode of the display (302) to either said forward driver (806) or said reverse driver (810) such that the pulse width modulated waveform is generated;

and

a processor (812) having an input for providing data for display to the display driver, the processor (812) being arranged for controlling said column switches and said row switches for driving pixels of the display with said pulse width modulated (PWM) waveform in accordance with a pixel brightness defined by said PWM waveform;

wherein said pulse width modulated (PWM) waveform comprises a first, forward drive portion and a second, reverse drive portion to quench photoluminescence.

2. A display and driver as claimed in claim 1 wherein

said forward driver comprises a current driver and said reverse driver comprises a voltage driver.

3. A display and driver as claimed in any one of claims 1 and 2 wherein said reverse bias drive comprises a reverse bias voltage drive of at least 20V.
4. A display and driver as claimed in any one of claims 1 to 3 wherein said forward drive comprises a substantially constant current drive.
5. A display and driver as claimed in any one of claims 1 to 4 wherein said display elements comprise display elements of more than one colour.
6. A display and driver as claimed in any one of claims 1 to 5 wherein said display elements comprise organic light emitting diodes.
7. A display and driver as claimed in any preceding claim wherein display elements in a non-scanned row of said display are connected to ground at the same time as said at least one display element is illuminated.
8. A method of using a display driver (800) to improve contrast in a passive matrix display (302) by driving the display with a pulse width modulated (PWM) waveform incorporating a photoluminescence quenching phase, the display comprising a plurality of light emitting diode display elements (312), a plurality of row electrodes (304) and a plurality of column electrodes (308), each light emitting diode display element (312) being connected between a pair of row and column electrodes, a forward driver (806) to provide a forward drive to at least one of said display elements to illuminate the display element; a reverse driver (810) to provide a reverse bias drive to others of said display elements at the same time as said at least one display element is illuminated to reduce a level of photoluminescence from said others of said display elements; the method comprising operating the display driver to address the light emitting diode display elements (312) by row-wise scanning by controlling row switches (816) of the display to selectively connect each row to ground; to reverse-bias non-emitting display elements to at least partially quench photoluminescence from said non-emitting display elements whereby said display contrast is enhanced; and wherein the method further comprises: inputting data for display to a processor (812); controlling column switches (814) of the display to connect a column electrode of the display (302) either to the forward driver (806) or to the reverse driver (810) such that the pulse width modulated waveform is generated;

controlling said column switches and said row switches for driving pixels of the display with said pulse width modulated (PWM) waveform in accordance with a pixel brightness defined by said PWM waveform;  
 wherein said pulse width modulated (PWM) waveform comprises a first, forward drive portion and a second, reverse drive portion to quench photoluminescence.

## Patentansprüche

1. Anzeige (302), umfassend eine Vielzahl von Leuchtdioden- Anzeigeelementen (312), eine Vielzahl von Zeilenelektroden (304) und eine Vielzahl von Spaltenelektroden (308), wobei jedes Leuchtdioden- Anzeigeelement (312) zwischen ein Paar von Zeilen- und Spaltenelektroden geschaltet ist; und Treiber (800) zum Ansteuern der Anzeige mit einer impulsbreitenmodulierten (PWM- ) Wellenform, die eine Fotolumineszenz- Lösphase einschließt, wobei der Treiber umfasst:

Adressierungsschaltungen (814, 816), um die Anzeigeelemente zu adressieren, wobei die Adressierungsschaltungen Zeilenschalter (816) umfassen, um jede Zeile selektiv mit Masse zu verbinden;

einen Durchlasstreiber (806), um mit den Adressierungsschaltungen zusammenzuwirken, um eine Durchlassansteuerung für mindestens eines der Anzeigeelemente bereitzustellen, um das Anzeigeelement zu erleuchten;

worin der Treiber dafür konfiguriert ist, die Anzeige durch zeilenweises Abtasten zu adressieren;

und **gekennzeichnet durch:**

einen Sperrtreiber (810), um zur gleichen Zeit, wenn das mindestens eine Anzeigeelement erleuchtet wird, eine Sperrrichtungsansteuerung für andere der Anzeigeelemente bereitzustellen, um einen Pegel der Fotolumineszenz von den anderen der Anzeigeelemente zu verringern;

Spaltenschalter (814), um eine Spaltenelektrode der Anzeige (302) entweder mit dem Durchlasstreiber (806) oder dem Sperrtreiber (810) zu verbinden, so dass die impulsbreitenmodulierte Wellenform erzeugt wird; und

einen Prozessor (812) mit einem Eingang zum Bereitstellen von Daten zur Anzeige für den Anzeigetreiber, wobei der Prozessor (812) dafür eingerichtet ist, die Spaltenschalter und die Zeilenschalter zu steuern, um Bildpunkte der Anzeige mit der impuls-

breitenmodulierten (PWM- ) Wellenform gemäß einer **durch** die PWM- Wellenform definierten Bildpunkthelligkeit anzusteuern; worin die impulsbreitenmodulierte (PWM- ) Wellenform einen ersten Durchlassansteuerungsabschnitt und einen zweiten Sperransteuerungsabschnitt zum Löschen der Fotolumineszenz umfasst.

2. Anzeige und Treiber nach Anspruch 1, worin der Durchlasstreiber einen Stromtreiber umfasst und der Sperrtreiber einen Spannungstreiber umfasst.
3. Anzeige und Treiber nach einem der Ansprüche 1 und 2, worin die Sperrrichtungsansteuerung eine Sperrrichtungsspannungsansteuerung von mindestens 20 V umfasst.
4. Anzeige und Treiber nach einem der Ansprüche 1 bis 3, worin die Durchlassansteuerung eine im wesentlichen konstante Stromansteuerung umfasst.
5. Anzeige und Treiber nach einem der Ansprüche 1 bis 4, worin die Anzeigeelemente Anzeigeelemente mit mehr als einer Farbe umfassen.
6. Anzeige und Treiber nach einem der Ansprüche 1 bis 5, worin die Anzeigeelemente organische Leuchtdioden umfassen.
7. Anzeige und Treiber nach einem der vorhergehenden Ansprüche, worin zur gleichen Zeit, wenn das mindestens eine Anzeigeelement erleuchtet wird, Anzeigeelemente in einer nicht abgetasteten Zeile der Anzeige mit Masse verbunden werden.
8. Verfahren zum Verwenden eines Anzeigetreibers (800), um den Kontrast in einer Passivmatrixanzeige (302) zu verbessern, indem die Anzeige mit einer impulsbreitenmodulierten (PWM- ) Wellenform, die eine Fotolumineszenz- Lösphase einschließt, angesteuert wird, wobei die Anzeige umfasst: eine Vielzahl von Leuchtdioden- Anzeigeelementen (312), eine Vielzahl von Zeilenelektroden (304) und eine Vielzahl von Spaltenelektroden (308), wobei jedes Leuchtdioden- Anzeigeelement (312) zwischen ein Paar von Zeilen- und Spaltenelektroden geschaltet ist, einen Durchlasstreiber (806), um eine Durchlassansteuerung für mindestens eines der Anzeigeelemente bereitzustellen, um das Anzeigeelement zu erleuchten, einen Sperrtreiber (810), um zur gleichen Zeit, wenn das mindestens eine Anzeigeelement erleuchtet wird, eine Sperrrichtungsansteuerung für andere der Anzeigeelemente bereitzustellen, um einen Pegel der Fotolumineszenz von den anderen der Anzeigeelemente zu verringern; wobei das Verfahren umfasst:

Betreiben des Anzeigetreibers, um die Leuchtdioden- Anzeigeelemente (312) durch zeilenweises Abtasten zu adressieren, indem Zeilenschalter (816) der Anzeige gesteuert werden, um jede Zeile selektiv mit Masse zu verbinden; Vorspannen von nichtleuchtenden Anzeigeelementen in Sperrrichtung, um die Fotolumineszenz von den nichtleuchtenden Anzeigeelementen zumindest teilweise zu löschen, wodurch der Anzeigekontrast verbessert wird; und

worin das Verfahren ferner umfasst:

Eingeben von Daten zur Anzeige in einen Prozessor (812);  
 Steuern von Spaltenschaltern (814) der Anzeige, um eine Spaltenelektrode der Anzeige (302) entweder mit dem Durchlasstreiber (806) oder mit dem Sperrtreiber (810) zu verbinden, so dass die impulsbreitenmodulierte Wellenform erzeugt wird;  
 Steuern der Spaltenschalter und der Zeilenschalter, um Bildpunkte der Anzeige mit der impulsbreitenmodulierten (PWM-) Wellenform gemäß einer durch die PWM- Wellenform definierten Bildpunkthelligkeit anzusteuern;  
 worin die impulsbreitenmodulierte (PWM-) Wellenform einen ersten Durchlassansteuerungsabschnitt und einen zweiten Sperransteuerungsabschnitt zum Löschen der Fotolumineszenz umfasst.

## Revendications

1. Dispositif d'affichage (302) comprenant une pluralité d'éléments d'affichage à diodes électroluminescentes (312), une pluralité d'électrodes de lignes (304) et une pluralité d'électrodes de colonnes (308), chaque élément d'affichage à diodes électroluminescentes (312) étant connecté entre une paire d'électrodes de colonnes et de lignes et un circuit de commande (800) destiné à commander le dispositif d'affichage avec une forme d'onde modulée en largeur d'impulsion (PWM) intégrant une phase de suppression de photoluminescence, le circuit de commande comprenant :

un montage de circuits d'adressage (814, 816) destiné à adresser lesdits éléments d'affichage, le montage de circuits d'adressage comprenant des commutateurs de lignes (816) pour connecter sélectivement chaque ligne à la masse ;  
 un circuit de commande vers l'avant (806) destiné à coopérer avec ledit montage de circuits d'adressage en vue de fournir une commande vers l'avant à au moins l'un desdits éléments d'affichage, afin d'éclairer l'élément

d'affichage ;  
 dans lequel le circuit de commande est configuré de manière à adresser ledit dispositif d'affichage par un balayage ligne par ligne ; et **caractérisé par** :

un circuit de commande inverse (810) destiné à fournir une commande de polarisation inverse à d'autres éléments parmi lesdits éléments d'affichage à l'instant même où ledit au moins un élément d'affichage est éclairé, en vue de réduire un niveau de photoluminescence provenant desdits autres éléments desdits éléments d'affichage ;  
 des commutateurs de colonnes (814) destinés à connecter une électrode de colonnes du dispositif d'affichage (302) audit circuit de commande vers l'avant (806) ou audit circuit de commande inverse (810), de sorte que la forme d'onde modulée en largeur d'impulsion est générée ; et  
 un processeur (812) présentant une entrée pour fournir des données à afficher au circuit de commande d'affichage, le processeur (812) étant agencé de manière à commander lesdits commutateurs de colonnes et lesdits commutateurs de lignes en vue de commander les pixels du dispositif d'affichage avec ladite forme d'onde modulée en largeur d'impulsion (PWM) selon une luminosité des pixels définie par ladite forme d'onde PWM ;  
 dans lequel ladite forme d'onde modulée en largeur d'impulsion (PWM) comprend une première partie de commande vers l'avant et une seconde partie de commande inverse destinée à supprimer la photoluminescence.

2. Dispositif d'affichage et circuit de commande selon la revendication 1, dans lesquels ledit circuit de commande vers l'avant comprend un circuit de commande de courant et ledit circuit de commande inverse comprend un circuit de commande de tension.
3. Dispositif d'affichage et circuit de commande selon l'une quelconque des revendications 1 et 2, dans lesquels ladite commande de polarisation inverse comprend une commande de tension de polarisation inverse d'au moins 20 V.
4. Dispositif d'affichage et circuit de commande selon l'une quelconque des revendications 1 à 3, dans lesquels ladite commande vers l'avant comprend une commande de courant sensiblement constante.
5. Dispositif d'affichage et circuit de commande selon l'une quelconque des revendications 1 à 4, dans les-

quels lesdits éléments d'affichage comprennent des éléments d'affichage de plus d'une couleur.

6. Dispositif d'affichage et circuit de commande selon l'une quelconque des revendications 1 à 5, dans lesquels lesdits éléments d'affichage comprennent des diodes électroluminescentes organiques. 5
7. Dispositif d'affichage et circuit de commande selon l'une quelconque des revendications précédentes, dans lesquels les éléments d'affichage dans une ligne non balayée dudit dispositif d'affichage sont connectés à la masse à l'instant même où ledit au moins un élément d'affichage est éclairé. 10
8. Procédé d'utilisation d'un circuit de commande d'affichage (800) en vue d'améliorer le contraste dans un dispositif d'affichage à matrice passive (302) en commandant le dispositif d'affichage avec une forme d'onde modulée en largeur d'impulsion (PWM) intégrant une phase de suppression de photoluminescence, le dispositif d'affichage comprenant une pluralité d'éléments d'affichage à diodes électroluminescentes (312), une pluralité d'électrodes de lignes (304) et une pluralité d'électrodes de colonnes (308), chaque élément d'affichage à diodes électroluminescentes (312) étant connecté entre une paire d'électrodes de colonnes et de lignes ; 15 20 25
  - un circuit de commande vers l'avant (806) pour fournir une commande vers l'avant à au moins l'un desdits éléments d'affichage en vue d'éclairer l'élément d'affichage ; 30
  - un circuit de commande inverse (810) destiné à fournir une commande de polarisation inverse à d'autres éléments parmi lesdits éléments d'affichage à l'instant même où ledit au moins un élément d'affichage est éclairé, en vue de réduire un niveau de photoluminescence provenant desdits autres éléments desdits éléments d'affichage ; 35
  - le procédé consistant à exploiter le circuit de commande d'affichage en vue d'adresser les éléments d'affichage à diodes électroluminescentes (312) par un balayage ligne par ligne en commandant les commutateurs de lignes (816) du dispositif d'affichage de manière à connecter sélectivement chaque ligne à la masse ; 40 45
  - de renverser la polarisation d'éléments d'affichage non luminescents en vue de supprimer au moins partiellement la photoluminescence desdits éléments d'affichage non luminescents, moyennant quoi ledit contraste d'affichage est amélioré ; et 50
  - dans lequel le procédé consiste en outre à : entrer des données à afficher dans un processeur (812) ; commander des commutateurs de colonnes (814) du dispositif d'affichage en vue de connecter une électrode de colonnes du dispositif d'affichage (302) au circuit de commande vers l'avant (806) ou au circuit de commande inverse (810), de sorte que la 55

forme d'onde modulée en largeur d'impulsion est générée ;

commander lesdits commutateurs de colonnes et lesdits commutateurs de lignes en vue de commander les pixels du dispositif d'affichage avec ladite forme d'onde modulée en largeur d'impulsion (PWM) selon une luminosité des pixels définie par ladite forme d'onde PWM ;

dans lequel ladite forme d'onde modulée en largeur d'impulsion (PWM) comprend une première partie de commande vers l'avant et une seconde partie de commande inverse en vue de supprimer la photoluminescence.

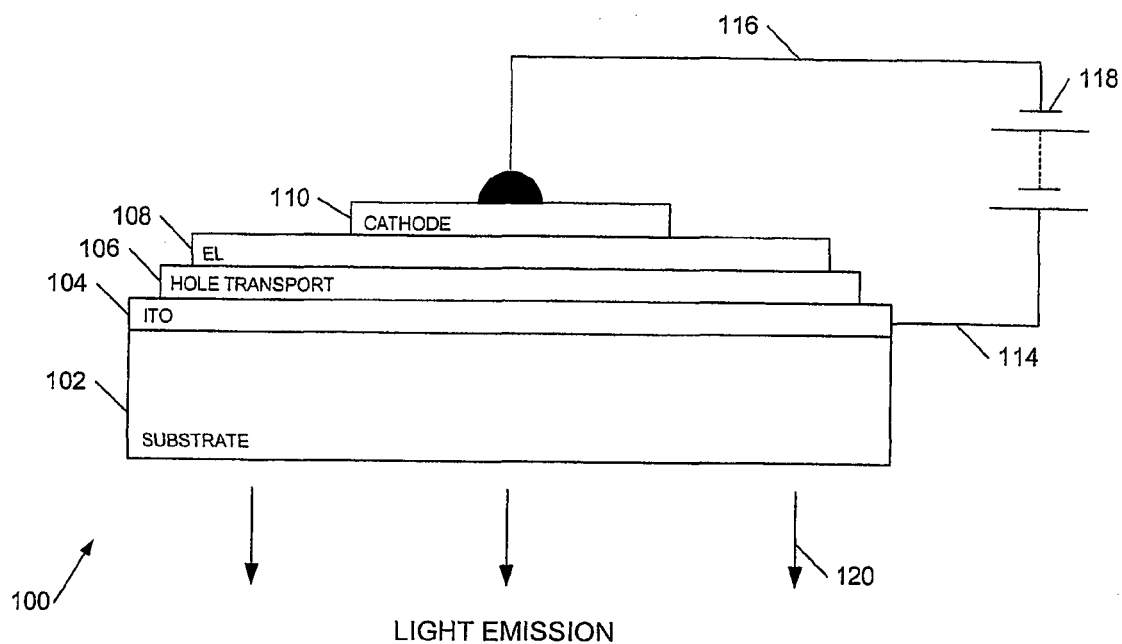


Figure 1a  
(PRIOR ART)

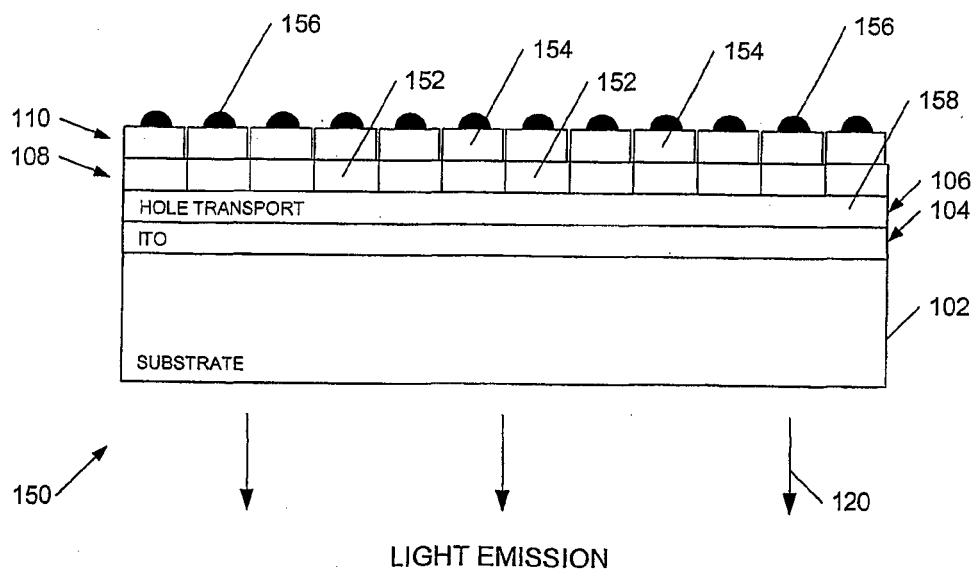


Figure 1b  
(PRIOR ART)

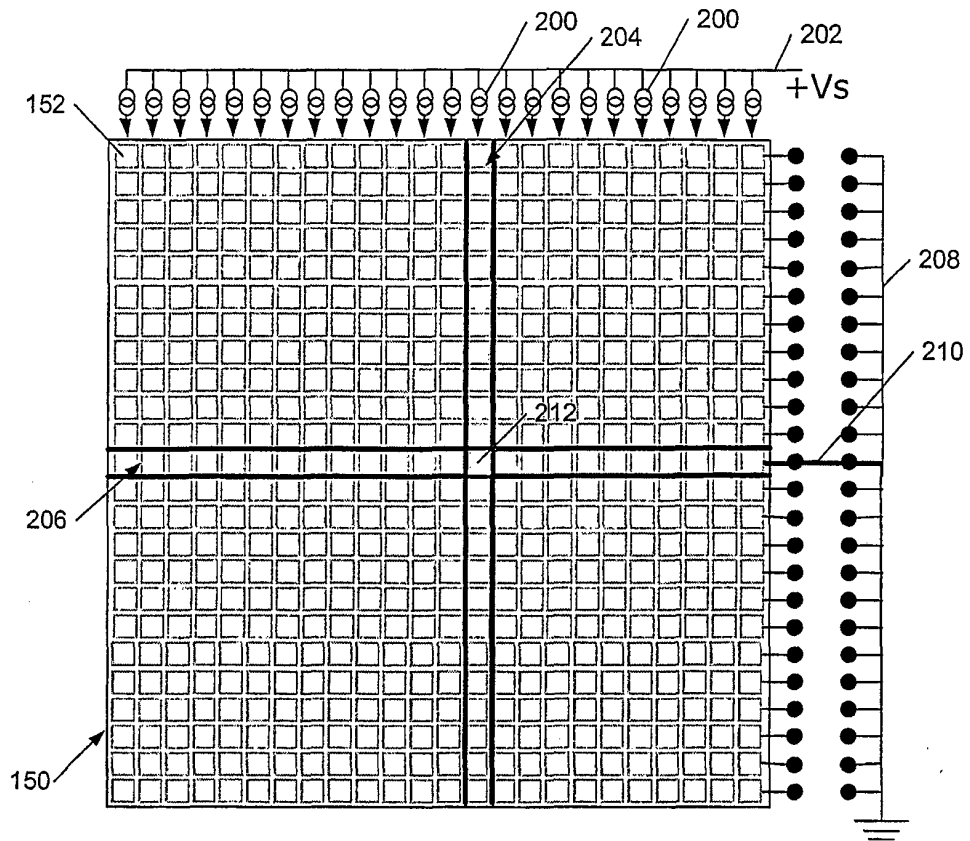


Figure 2a

Figure 2b

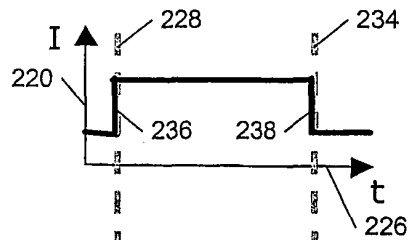


Figure 2c

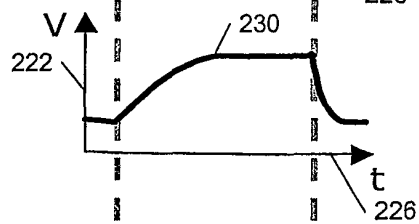
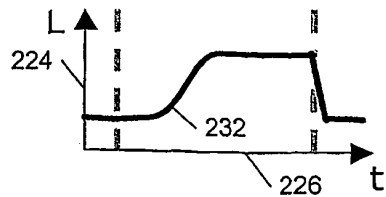


Figure 2d



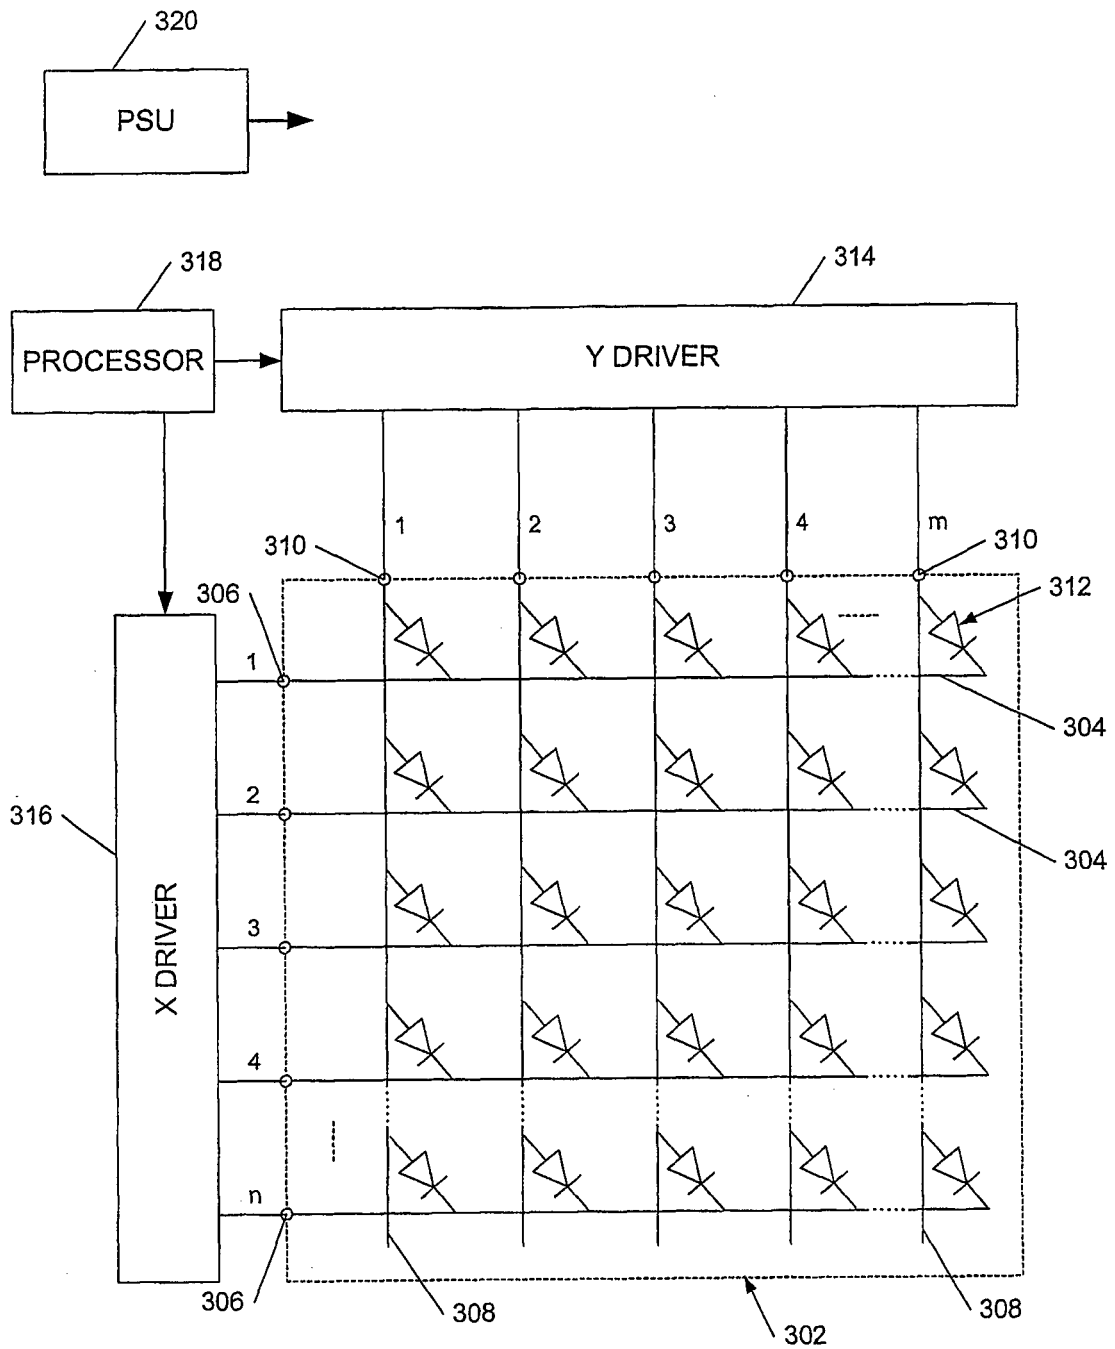


Figure 3  
(PRIOR ART)

300 ↗

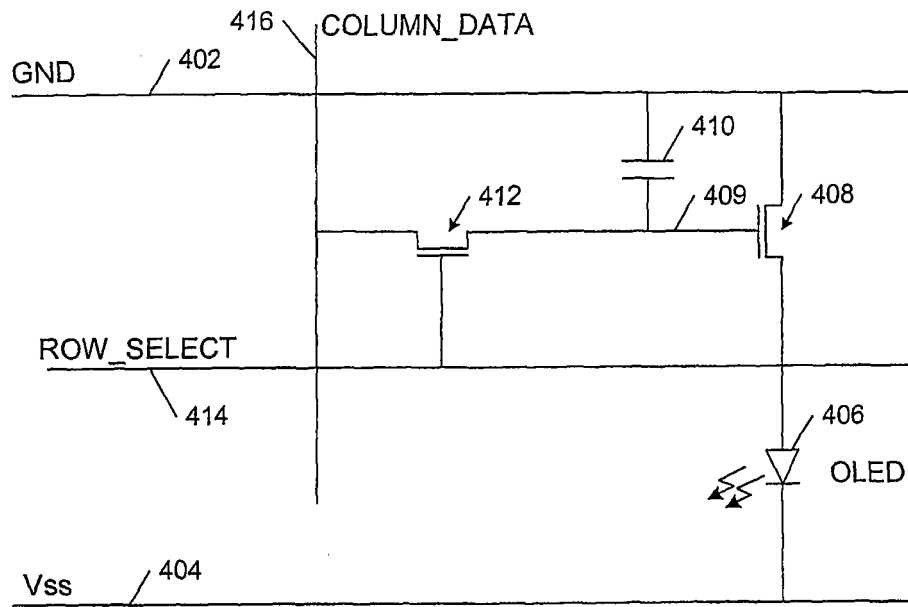


Figure 4  
(PRIOR ART)

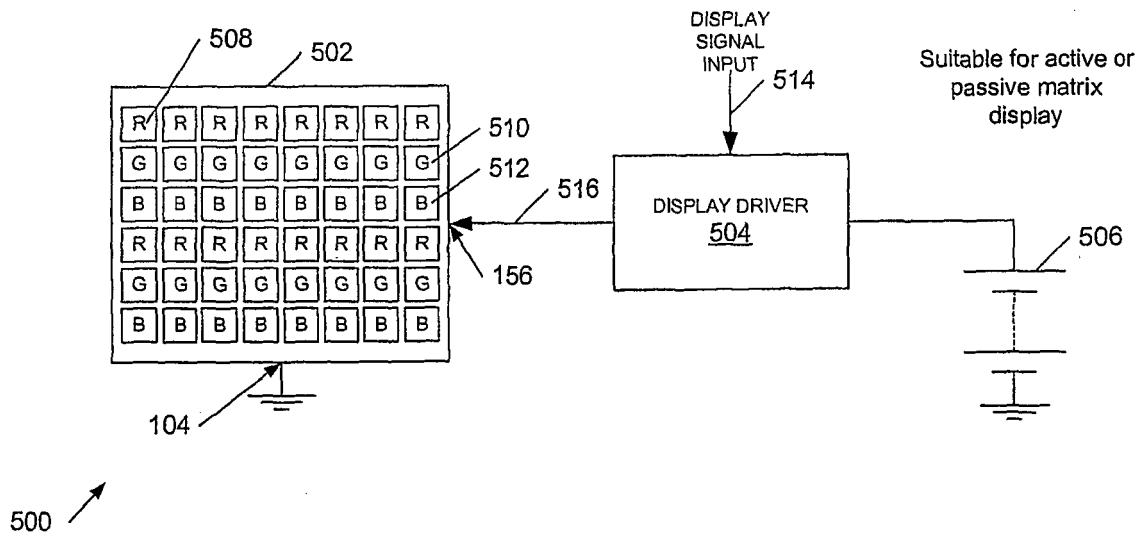
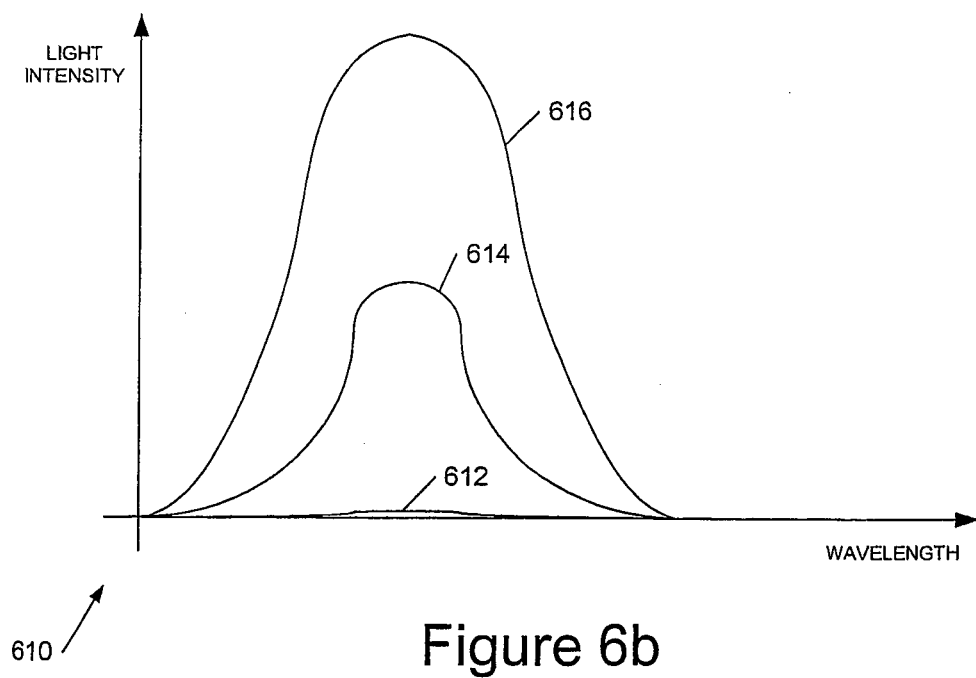
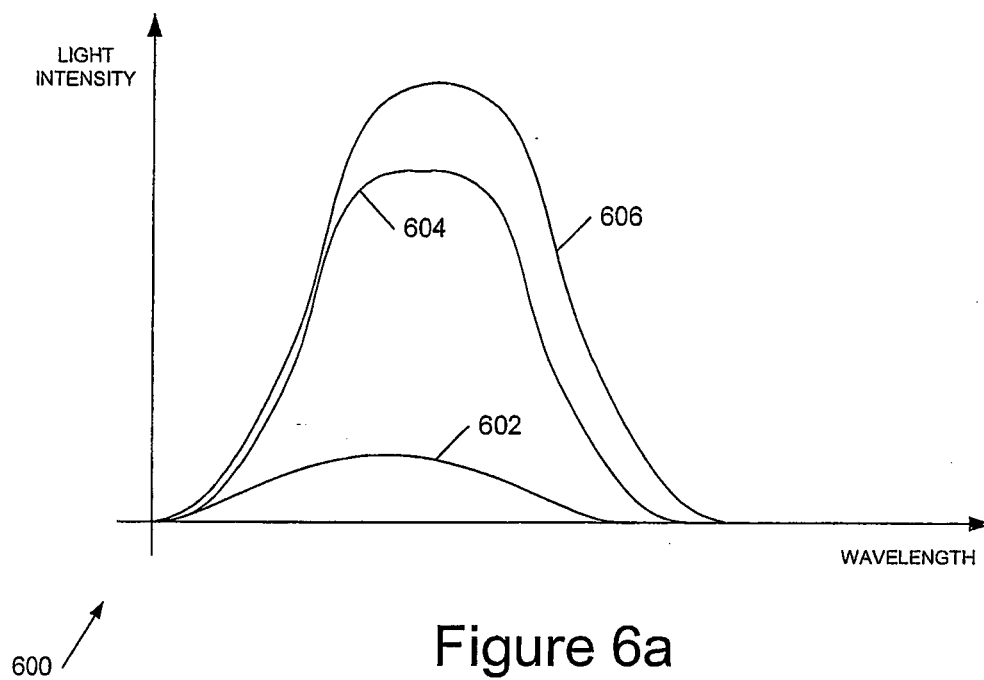


Figure 5



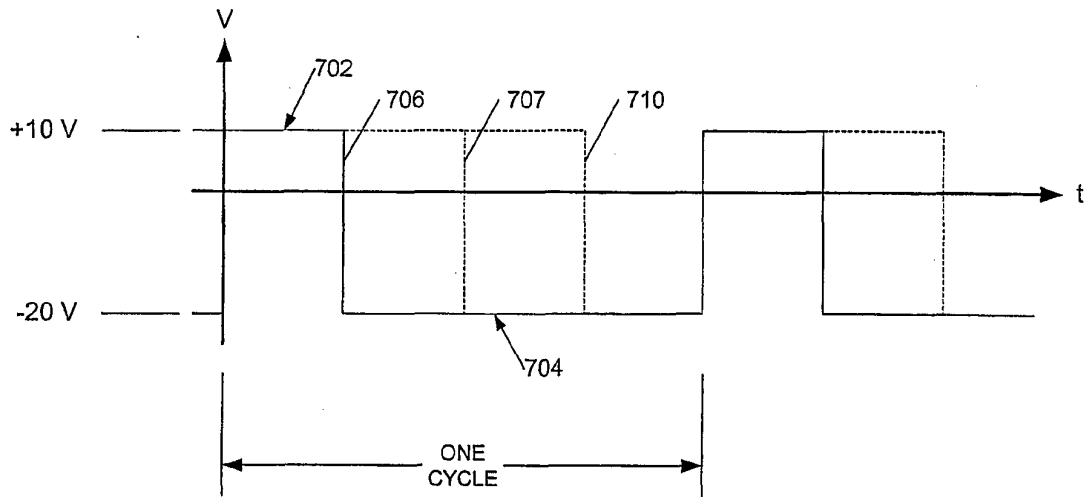


Figure 7

Refer back to  
Figure 5 for basic  
driver

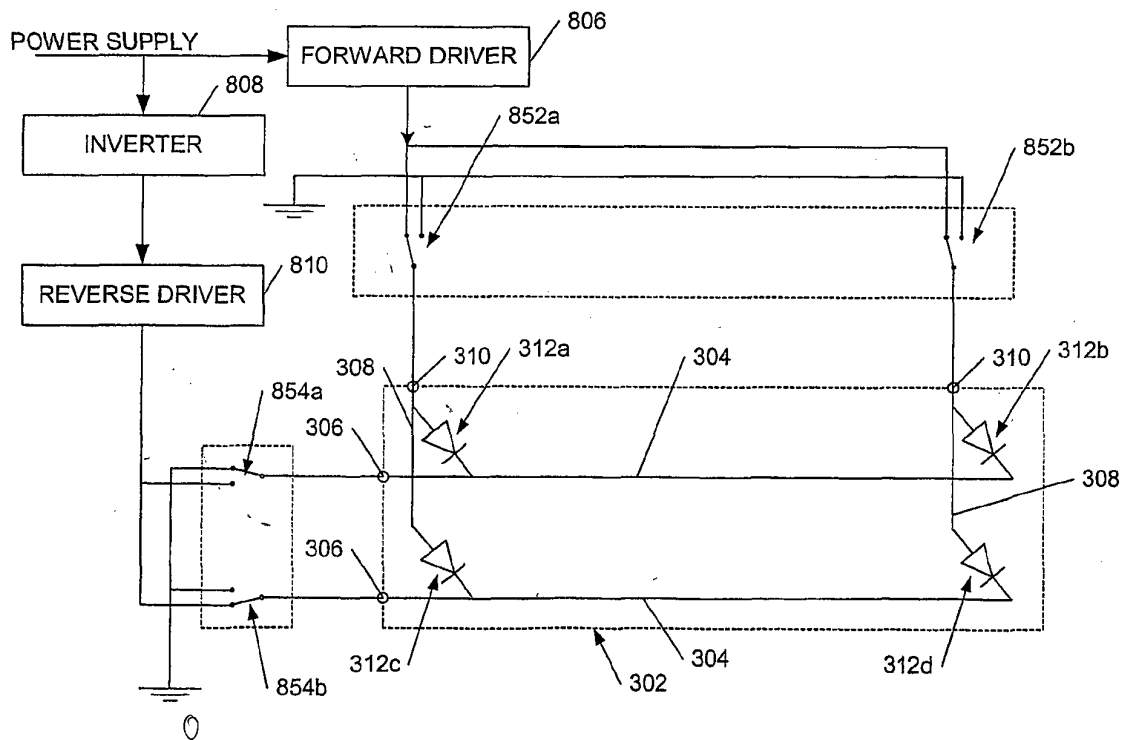


Figure 8b

850

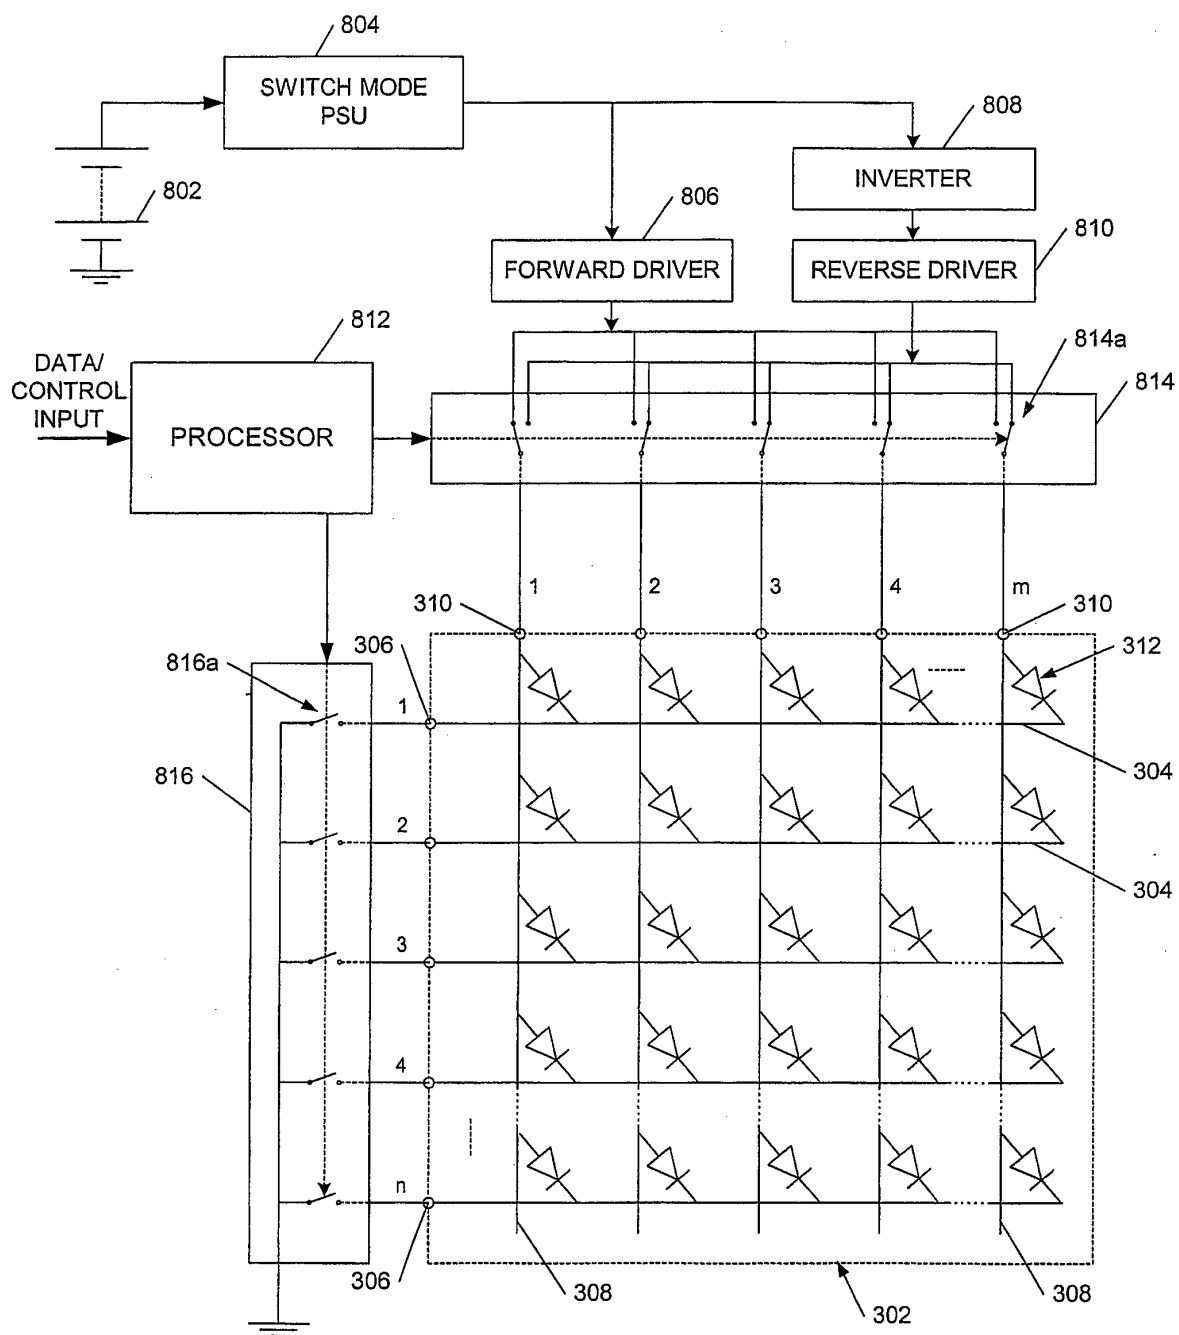


Figure 8a

800

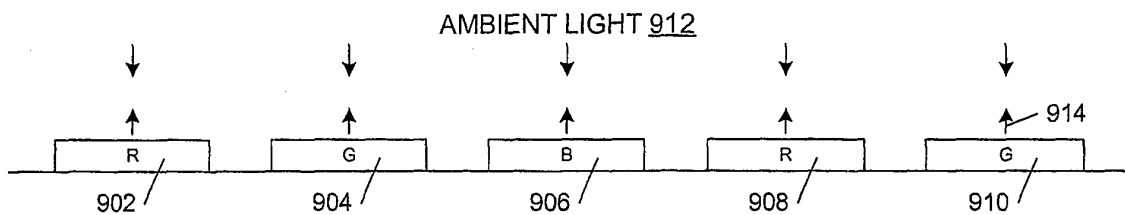


Figure 9a

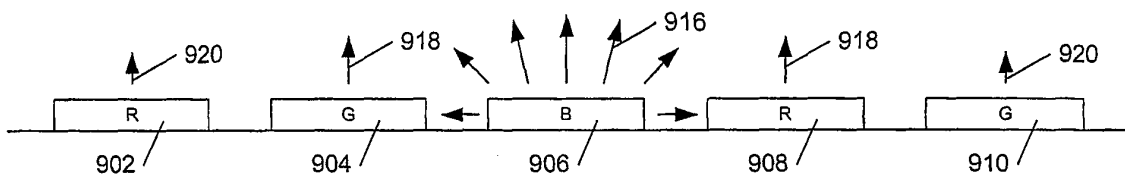


Figure 9b

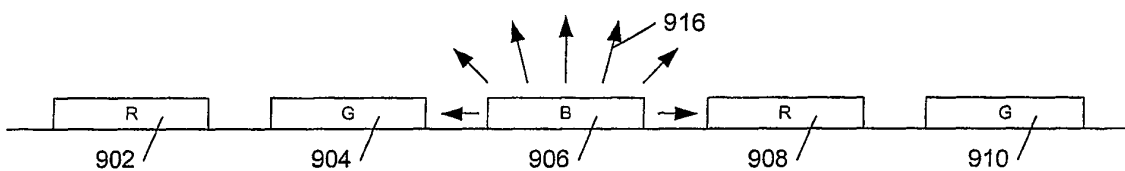


Figure 9c

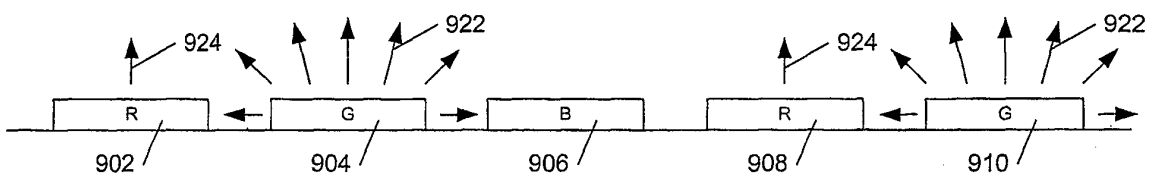


Figure 9d

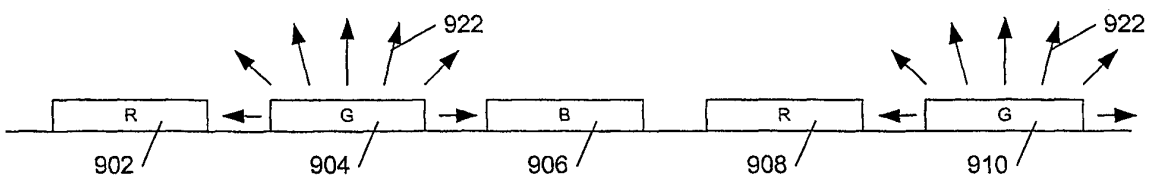


Figure 9e

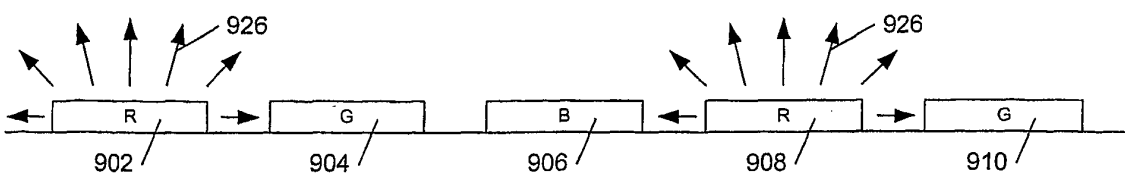


Figure 9f

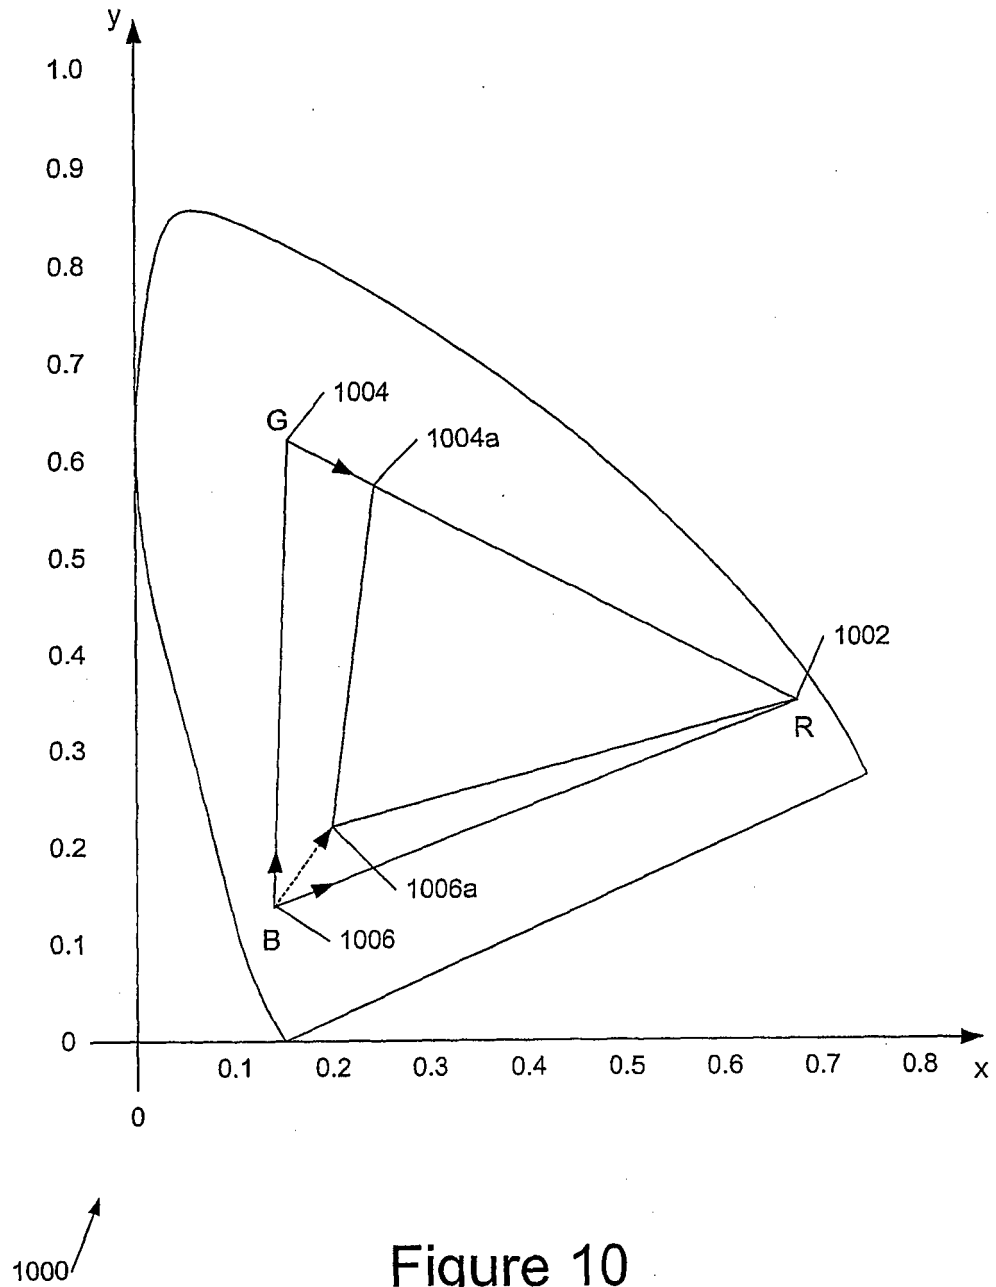


Figure 10

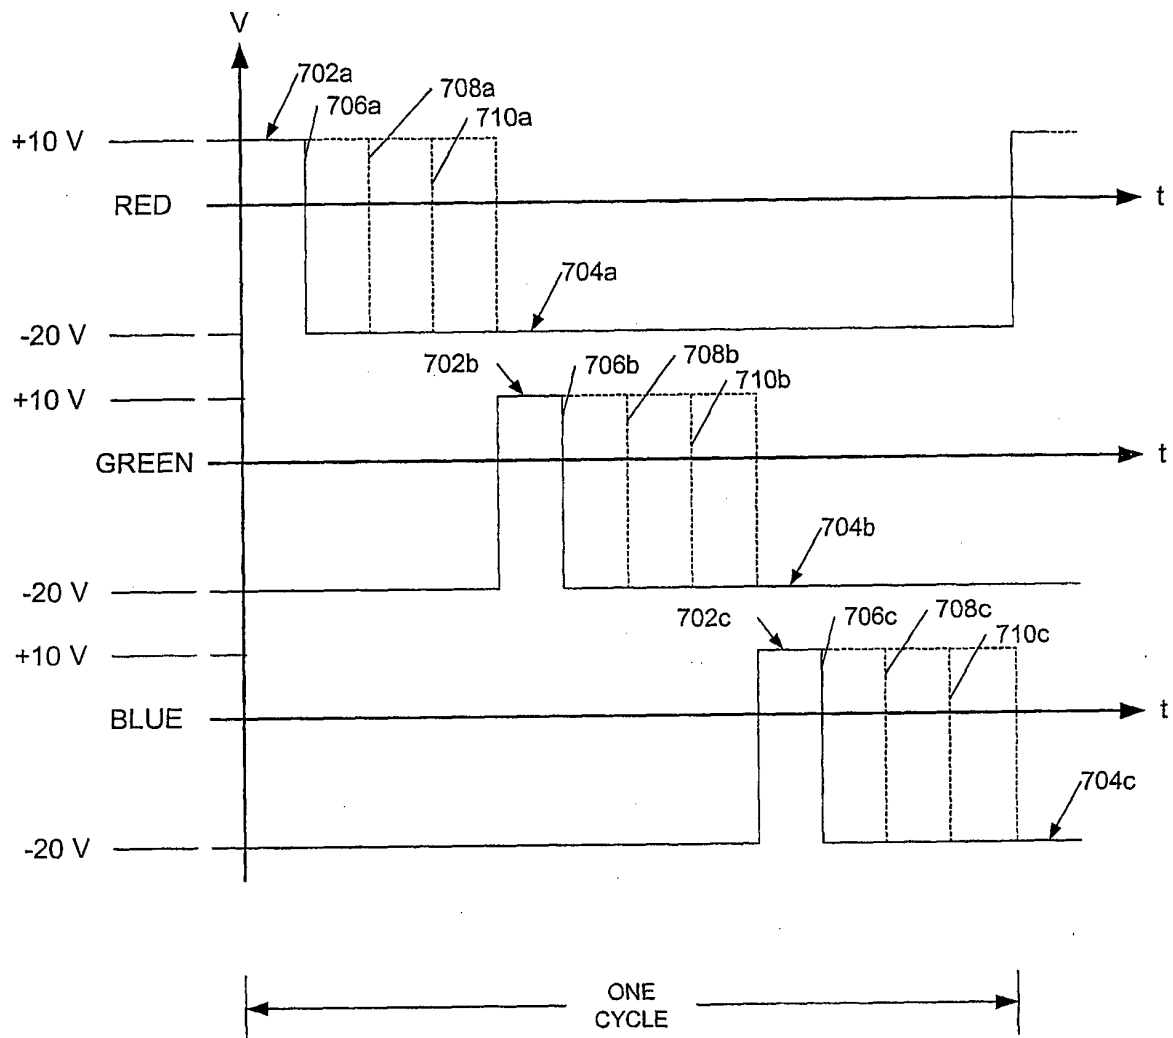


Figure 11

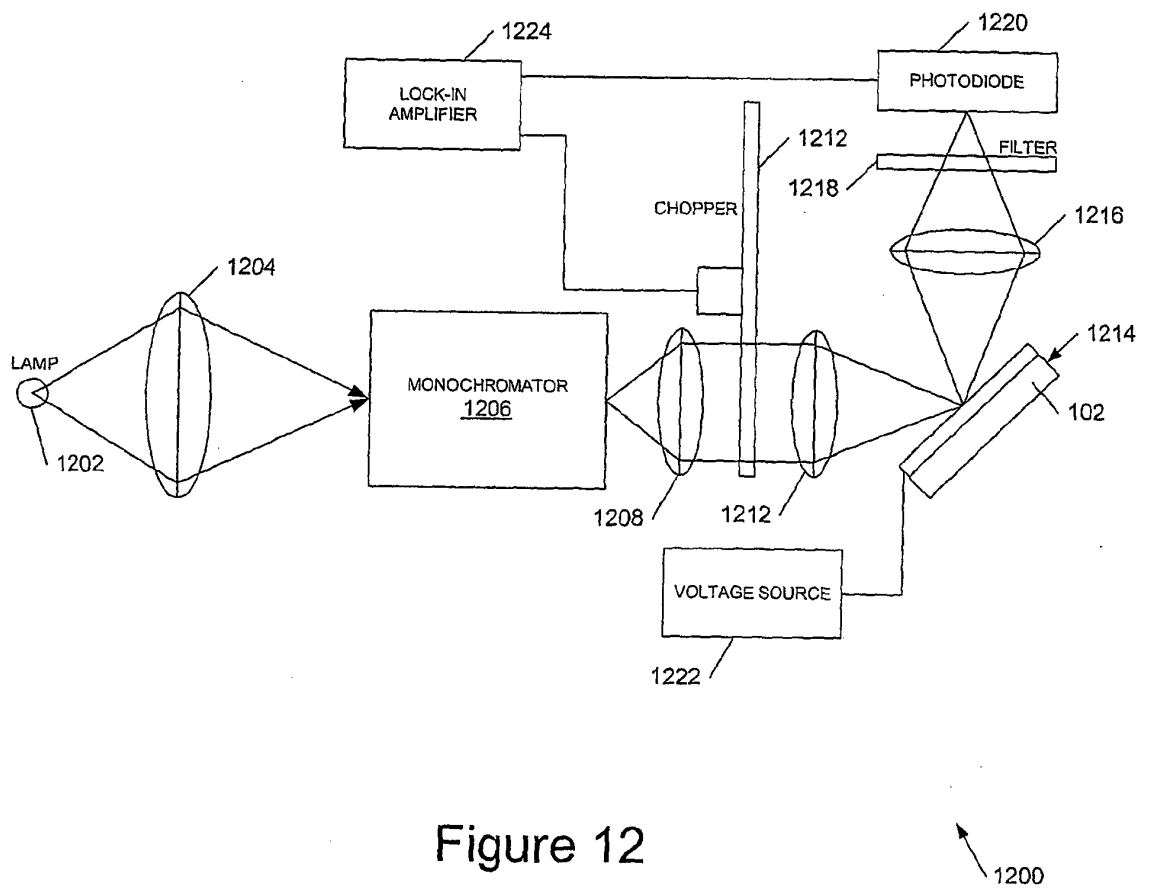


Figure 12

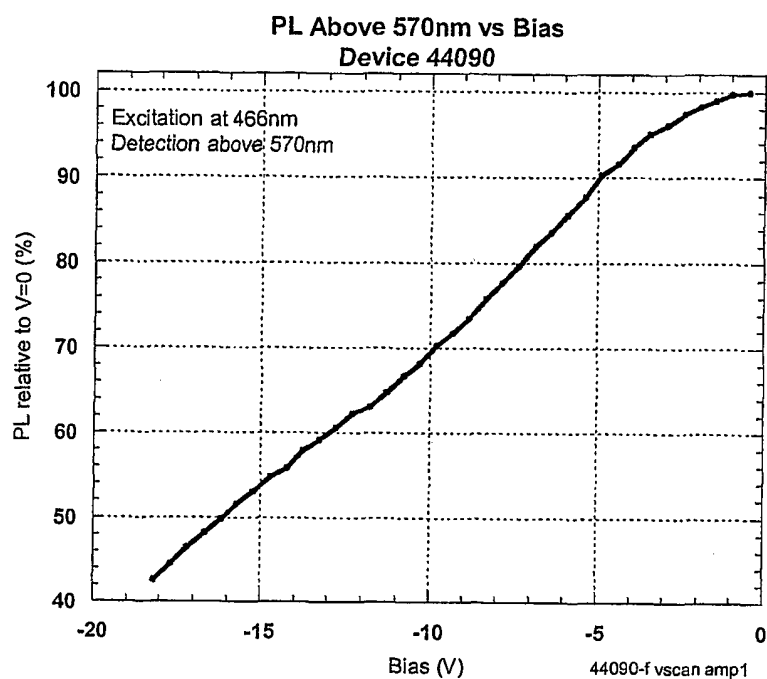


Figure 13a

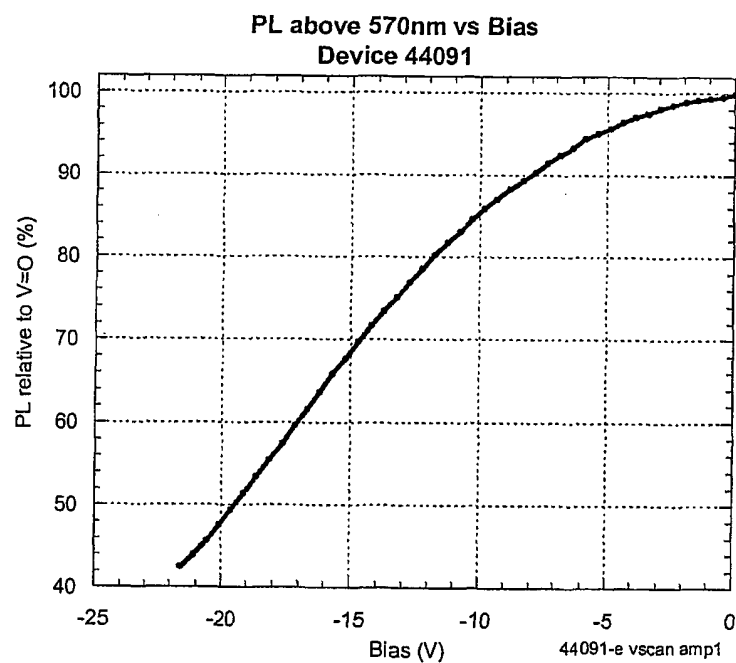


Figure 13b

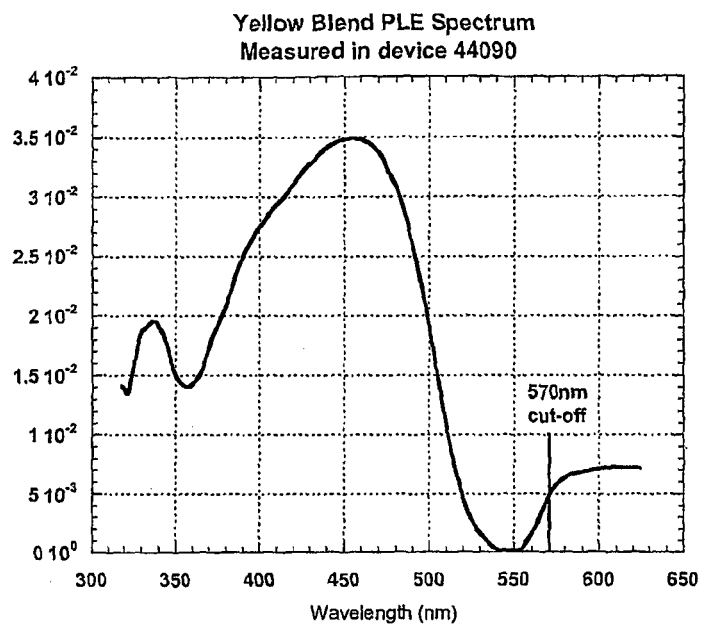


Figure 14

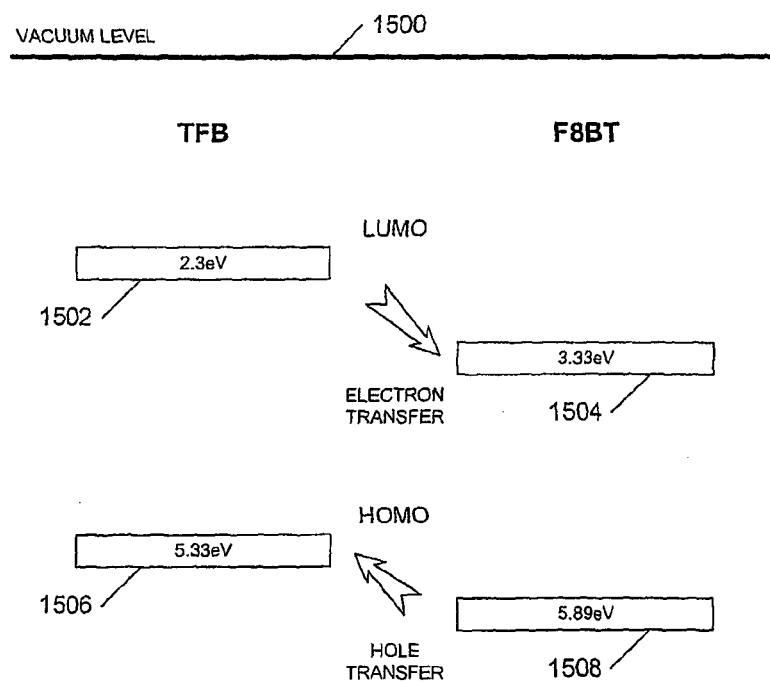


Figure 15

## REFERENCES CITED IN THE DESCRIPTION

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

### Patent documents cited in the description

- WO 9013148 A [0002]
- WO 9506400 A [0002]
- WO 9948160 A [0002]
- US 4539507 A [0002] [0004]
- US 5684365 A [0019]
- WO 9965012 A [0019]
- US 6014119 A [0019]
- US 6201520 B [0019] [0031]
- US 6332661 B [0019]
- EP 1079361 A [0019]
- EP 1091339 A [0019]
- US 6332661 A [0019]
- US 6211613 B [0024] [0065]
- WO 9738452 A [0024] [0065]
- US 5049780 A [0024] [0065]
- EP 1087444 A [0025]
- EP 1093322 A [0025]
- WO 9841065 A [0029]
- US 5965901 A [0032]
- EP 1094438 A [0033]
- DE 10042974 [0034]
- WO 0163586 A [0035]

### Non-patent literature cited in the description

- **U. LEMMER.** *Synthetic Metals*, 1994, vol. 67, 169-172 [0028]
- **EDWARD F KELLEY.** *Proposed Diffuse Ambient Contrast Measurement Methods for Flat Panel Displays*, April 2001 [0045]

专利名称(译)	电致发光显示器和驱动电路，以减少光致发光		
公开(公告)号	<a href="#">EP1502252B1</a>	公开(公告)日	2013-10-02
申请号	EP2003727625	申请日	2003-04-28
[标]申请(专利权)人(译)	剑桥显示技术有限公司		
申请(专利权)人(译)	剑桥显示科技有限公司		
当前申请(专利权)人(译)	剑桥显示科技有限公司		
发明人	SMITH, EUAN C., CAMBRIDGE DISPLAY TECH. LTD GUNNER, ALEC G., CAMBRIDGE DISPLAY TECH. LTD HALLS, JONATHAN J.M., CAMBRIDGE DISPLAY TECH. LTD		
IPC分类号	H01L51/52 G09G3/32 G09G3/20 H01L51/50 G09G3/30 G09G5/02		
CPC分类号	G09G3/2077 G09G3/2014 G09G3/2074 G09G3/3216 G09G5/02 G09G2310/0256 G09G2320/0238 G09G2320/0242 G09G2320/0247 G09G2320/043 G09G2330/021 H01L51/5281		
代理机构(译)	MARTIN , PHILIP JOHN		
优先权	2002010013 2002-05-01 GB		
其他公开文献	EP1502252A1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

本发明一般涉及用于电光显示器的显示驱动器电路，更具体地说，涉及用于减少吸收光的再发射的电路和方法，例如用于增加有机发光二极管显示器的色域。一种用于显示器的驱动器，包括多个发光二极管显示元件，该驱动器包括寻址所述显示元件的寻址电路，第一驱动器与所述地址电路配合以向至少一个所述显示元件提供前向驱动以照亮显示元件和第二驱动器在所述至少一个显示元件被照射的同时向所述显示元件中的其他显示元件提供反向偏置驱动，以降低来自所述其他所述显示元件的光致发光水平。

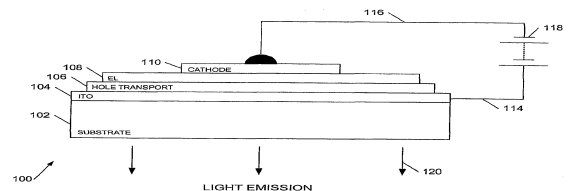


Figure 1a  
(PRIOR ART)

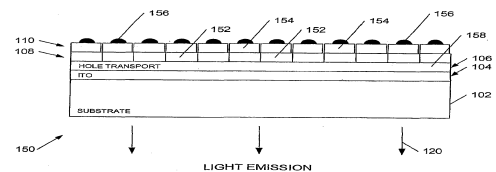


Figure 1b  
(PRIOR ART)