



(19) **United States**

(12) **Patent Application Publication**

**Bao et al.**

(10) **Pub. No.: US 2017/0281138 A1**

(43) **Pub. Date: Oct. 5, 2017**

(54) **TRANSMIT GENERATOR FOR CONTROLLING A MULTILEVEL PULSER OF AN ULTRASOUND DEVICE, AND RELATED METHODS AND APPARATUS**

**Publication Classification**

(51) **Int. Cl.**  
*A61B 8/00* (2006.01)  
(52) **U.S. Cl.**  
CPC ..... *A61B 8/54* (2013.01); *A61B 8/42* (2013.01); *A61B 8/4427* (2013.01)

(71) Applicant: **Butterfly Network, Inc.**, Guilford, CT (US)

(72) Inventors: **Liewei Bao**, Westford, MA (US);  
**Kailliang Chen**, Guilford, CT (US);  
**Tyler S. Ralston**, Clinton, CT (US);  
**Nevada J. Sanchez**, Guilford, CT (US)


(57) **ABSTRACT**

Circuitry for ultrasound devices is described. A multi-level pulser is described, which can support time-domain and spatial apodization. The multi-level pulser may be controlled through a software-defined waveform generator. In response to the execution of a computer code, the waveform generator may access master segments from a memory, and generate a stream of packets directed to pulsing circuits. The stream of packets may be serialized. A plurality of decoding circuits may modulate the streams of packets to obtain spatial apodization.

(73) Assignee: **Butterfly Network, Inc.**, Guilford, CT (US)

(21) Appl. No.: **15/087,962**

(22) Filed: **Mar. 31, 2016**

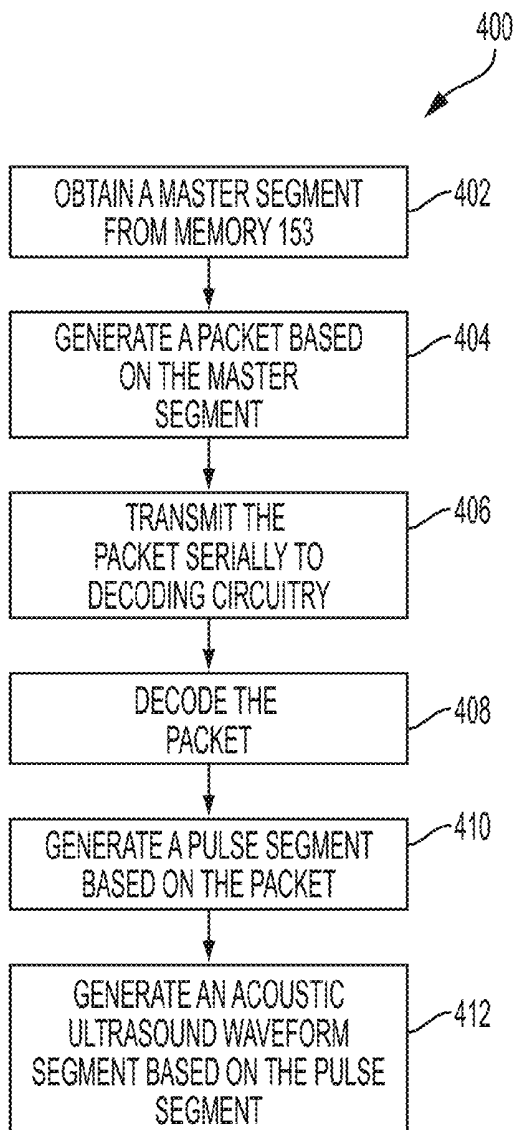

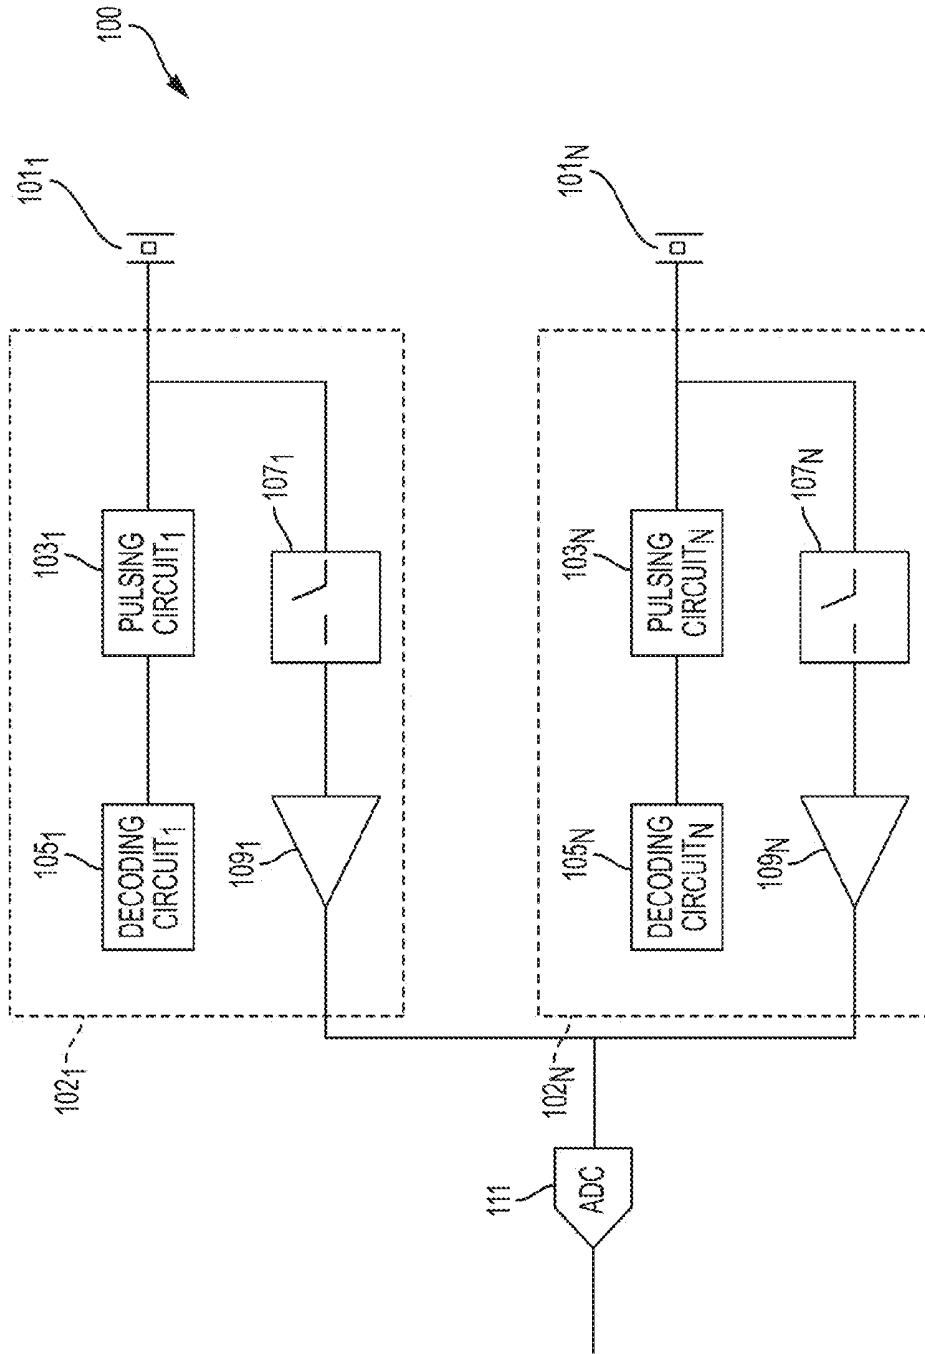


FIG. 1A



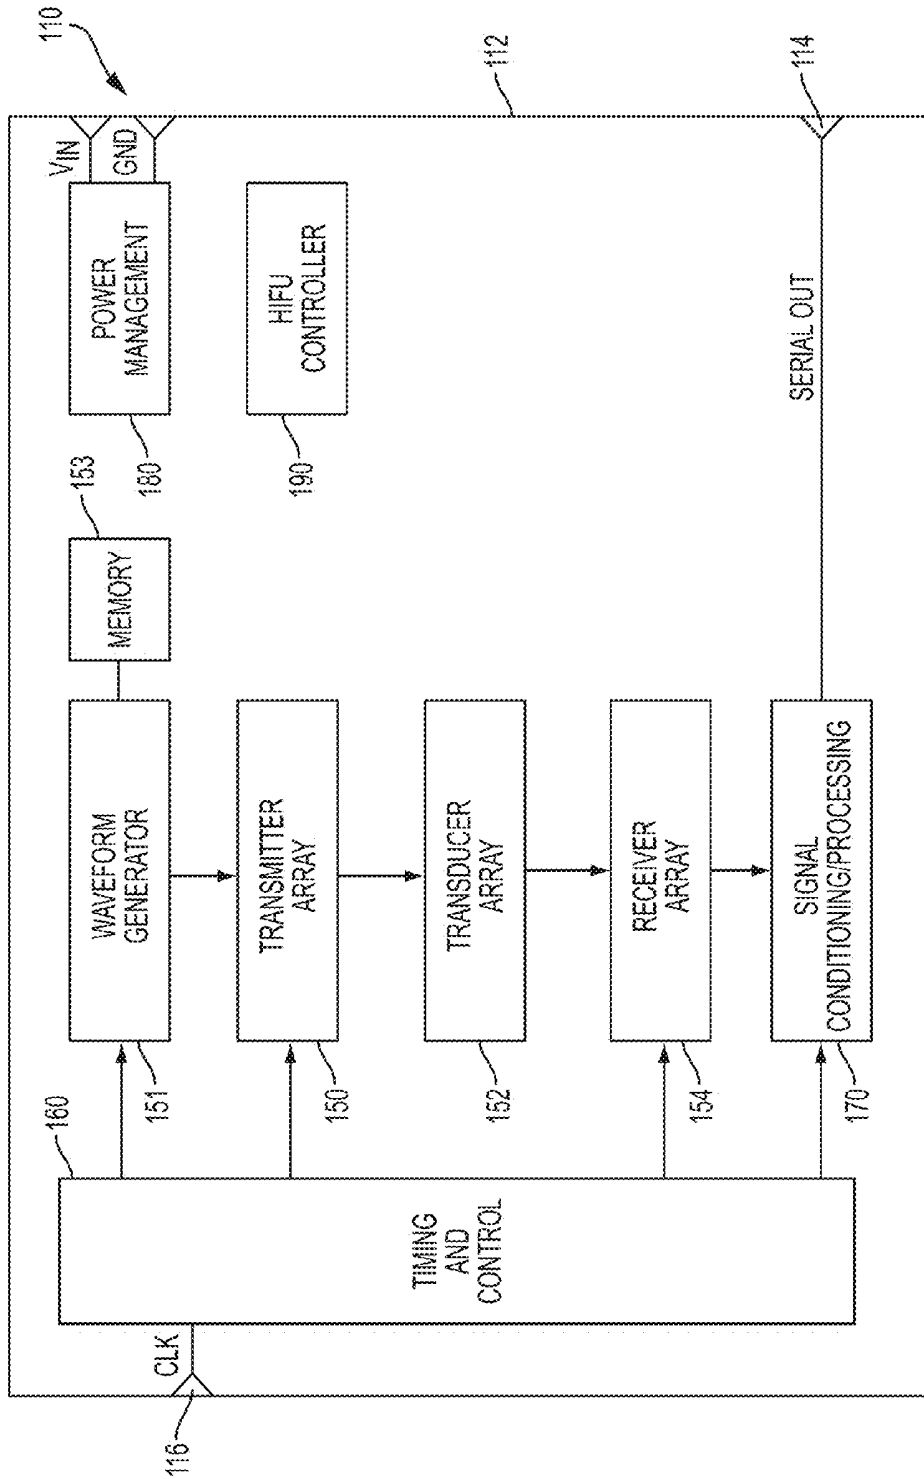


FIG. 1C

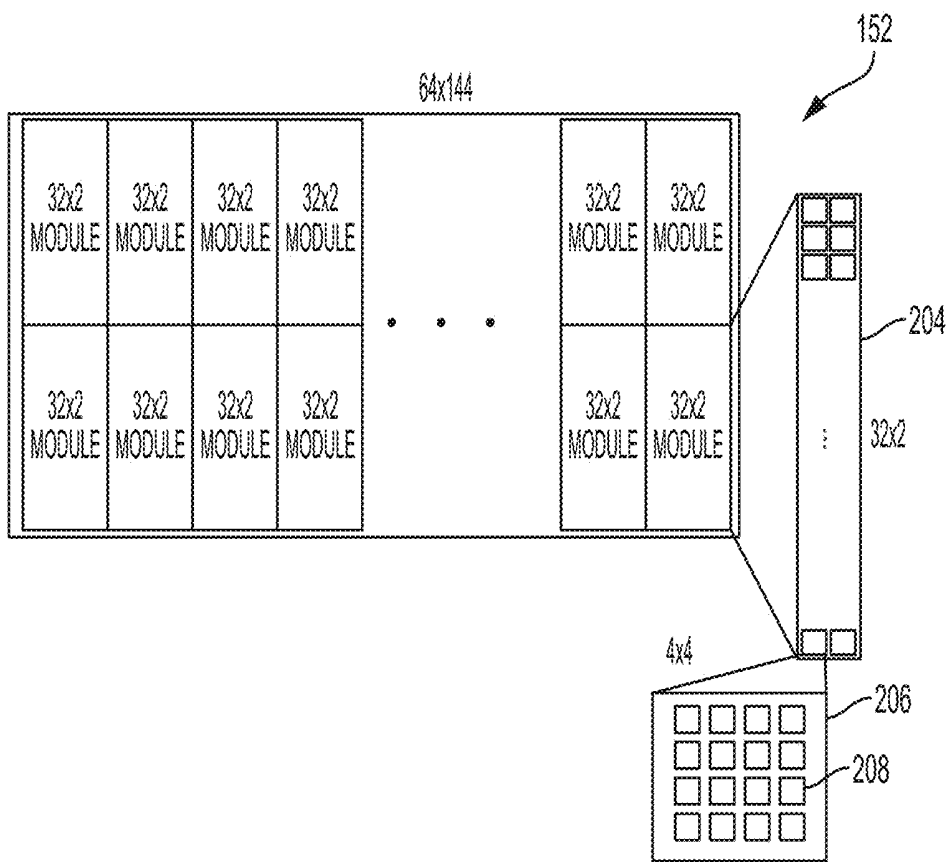


FIG. 2A

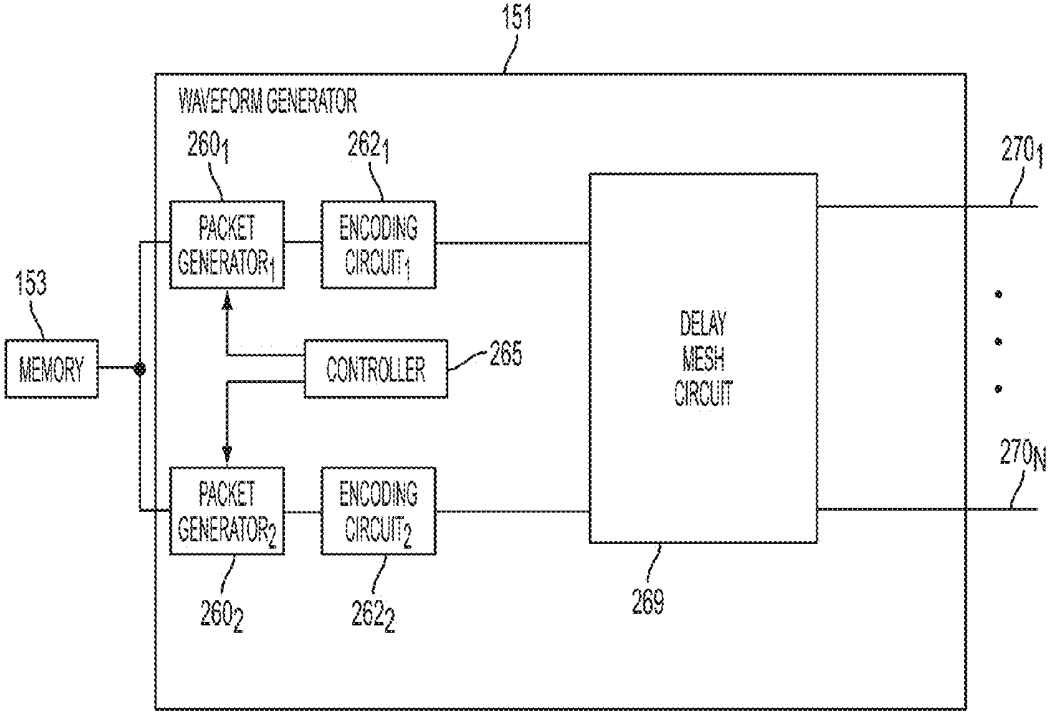


FIG. 2B

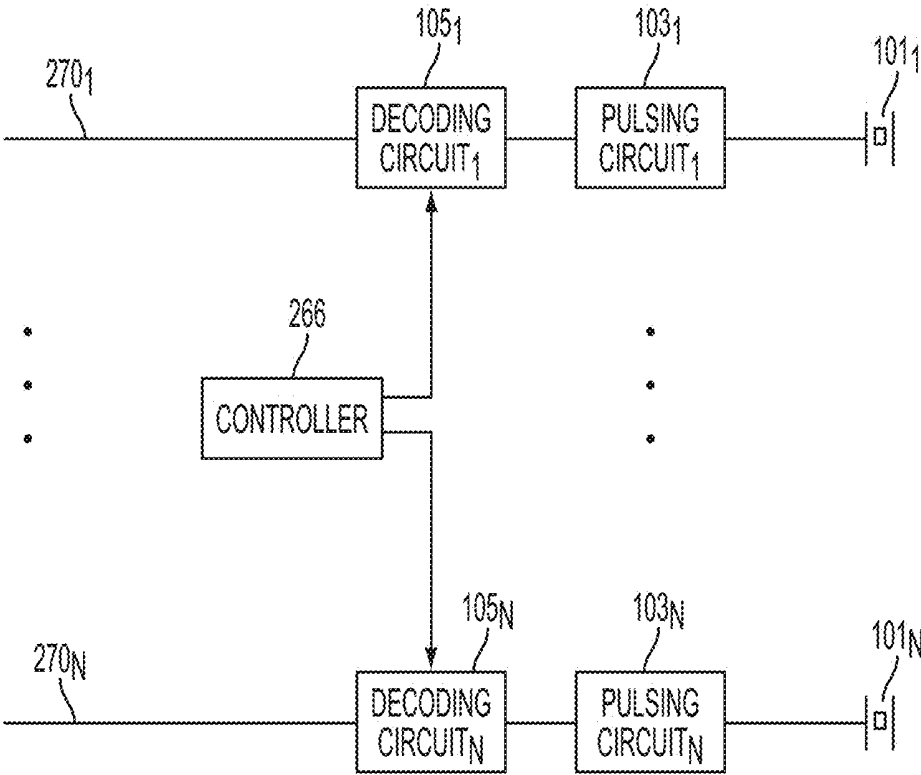


FIG. 2C

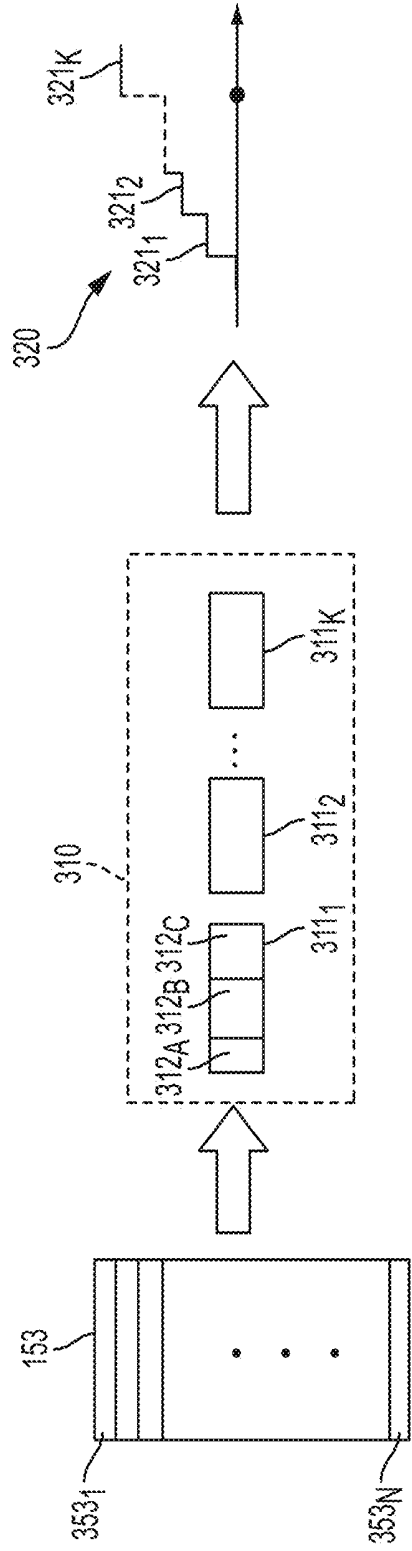


FIG. 3A

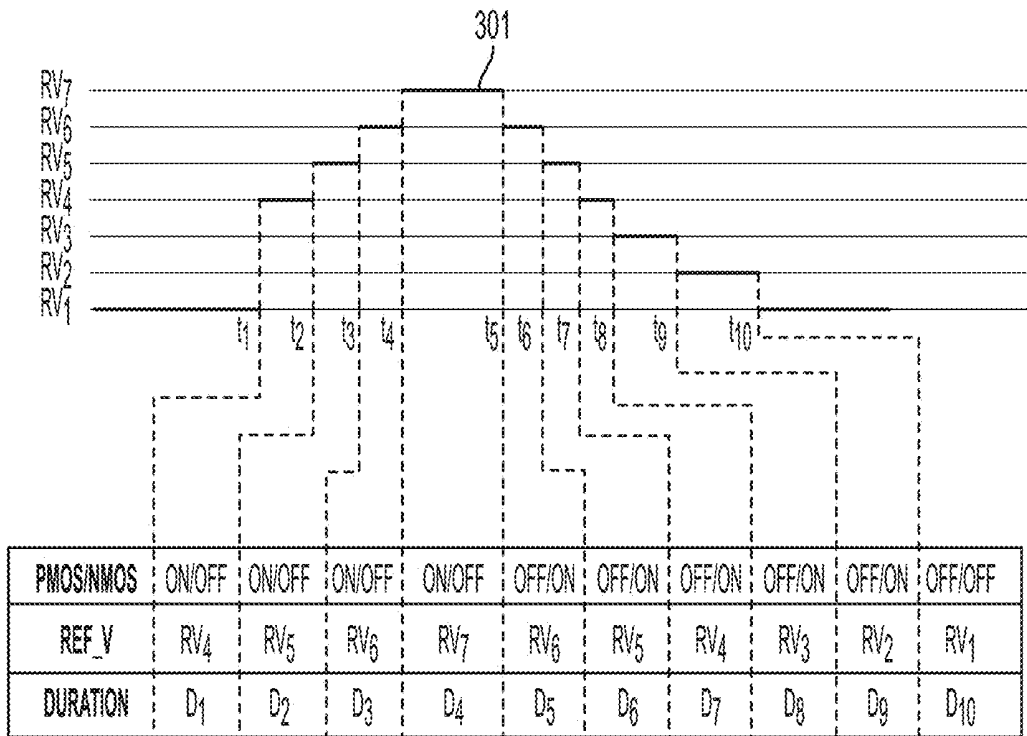


FIG. 3B

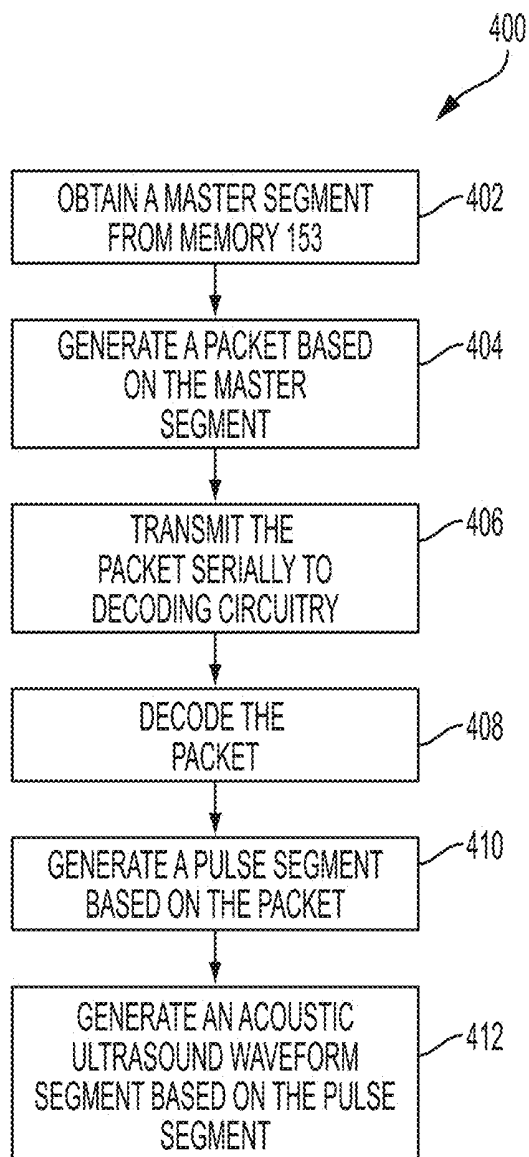


FIG. 4

**TRANSMIT GENERATOR FOR  
CONTROLLING A MULTILEVEL PULSER  
OF AN ULTRASOUND DEVICE, AND  
RELATED METHODS AND APPARATUS**

BACKGROUND

[0001] Field

[0002] The present application relates to transmit generators in ultrasound devices, and related methods and apparatus.

[0003] Related Art

[0004] Some ultrasound devices include a waveform generator which provides electric waveforms to a pulser. In response, the pulser controls an ultrasonic transducer to emit ultrasound acoustic waves.

BRIEF SUMMARY

[0005] According to an aspect of the present application, a method of operating an ultrasound device is provided, comprising generating a multi-level acoustic waveform with an ultrasound device by providing a series of data packets sequentially to a pulsing circuit coupled to an ultrasonic transducer of the ultrasound device.

[0006] According to an aspect of the present application, a method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers is provided, comprising: transmitting a first packet to at least one pulser of the plurality of pulsers, the first packet comprising a first value representing a first reference voltage selected from a plurality of selectable reference voltages; providing a first control signal to represent a first duration of a first pulse segment; in response to transmitting the first packet to the at least one pulser of the plurality of pulsers, setting the at least one pulser of the plurality of pulsers to a first state corresponding to the first reference voltage throughout the first duration of the first pulse segment; transmitting a second packet to the at least one pulser of the plurality of pulsers, the second packet comprising a second value representing a second reference voltage selected from the plurality of selectable reference voltages; providing a second control signal to represent a second duration of a second pulse segment; and in response to transmitting the second packet to the at least one pulser of the plurality of pulsers, setting the pulser of the plurality of pulsers to a second state corresponding to the second reference voltage throughout the second duration of the second pulse segment, wherein the plurality of selectable reference voltages comprises at least three reference voltages.

[0007] According to an aspect of the present application, a method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers is provided, the method comprising: selecting two or more waveform segments from among a plurality of waveform segments; concatenating the selected two or more waveform segments to form an input waveform; and providing the input waveform to a pulser of the plurality of pulsers coupled to the plurality of ultrasonic transducers.

BRIEF DESCRIPTION OF DRAWINGS

[0008] Various aspects and embodiments of the application will be described with reference to the following figures. It should be appreciated that the figures are not

necessarily drawn to scale. Items appearing in multiple figures are indicated by the same reference number in all the figures in which they appear.

[0009] FIG. 1A illustrates schematically a block diagram of an ultrasound device comprising a plurality of pulsing circuits and a plurality of decoding circuits, according to a non-limiting embodiment of the present application.

[0010] FIG. 1B illustrates a circuit diagram of a pulsing circuit comprising two transistors, according to one aspect of the present application.

[0011] FIG. 1C illustrates schematically a block diagram of an ultrasound device comprising a waveform generator, according to some non-limiting embodiments.

[0012] FIG. 2A shows an illustrative arrangement of a transducer array, according to a non-limiting embodiment of the present application.

[0013] FIG. 2B illustrates schematically a block diagram of a waveform generator comprising a plurality of packet generators, according to a non-limiting embodiment of the present application.

[0014] FIG. 2C illustrates schematically a block diagram of an ultrasound device comprising a plurality of decoding circuits, according to a non-limiting embodiment of the present application.

[0015] FIG. 3A illustrates a data path diagram showing a succession of packets, according to a non-limiting embodiment of the present application.

[0016] FIG. 3B illustrates a time diagram showing an exemplary multi-level pulse formed through a succession of packets, according to a non-limiting embodiment of the present application.

[0017] FIG. 4 illustrates a method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers, according to a non-limiting embodiment of the present application.

DETAILED DESCRIPTION

[0018] An ultrasound probe may include integrated circuitry for generating waveforms emitted by the probe. The integrated circuitry may be fabricated on a complementary metal oxide semiconductor (CMOS) die, also referred to herein as a "chip." In some embodiments, ultrasonic transducers may be integrated with the CMOS chip, thus forming an ultrasound-on-a-chip device. For example, the ultrasonic transducers may be capacitive micromachined ultrasonic transducers (CMUTs), which may be integrated with the integrated circuitry on the CMOS die. The integrated circuitry may include waveform generation circuitry configured to produce the electric waveforms which drive the ultrasonic transducers.

[0019] Aspects of the present application provide programmable waveform generators for controlling pulsers of an ultrasound device to create multi-level pulses. Applicant has appreciated that ultrasound devices configured to generate multi-level pulses may significantly enhance the contrast of the ultrasound images produced. According to one aspect of the present application, pulsing circuits designed to provide multi-level pulses are used to facilitate the formation of temporal and spatial apodization. Apodization may reduce the extent of the side-lobes associated with transmitted pulses, thus increasing the resolution of the image produced. Multi-level pulses of the type described herein can assume any value selected from among a set of selectable values, where the set may comprise at least three values.

**[0020]** The generation of such multi-level pulses may require complicated driving circuitry to control the state of the pulsing circuits. The complexity of the driving circuitry may be further exacerbated when the generation of the multi-level pulses occurs asynchronously. The complexity of the driving circuitry translates into sizable power and space requirements. This may be impractical when the ultrasound device is to be disposed in a handheld ultrasound probe, stethoscope, or other compact form, in which the available power may be limited (e.g., to the power that can be supplied by batteries) or the power consumption kept below some threshold to prevent overheating or unsafe operation, and the real estate may be limited to a few cubic centimeters.

**[0021]** Applicant has appreciated that multi-level pulses may be generated using software-defined waveform generators. Software-defined waveform generators of the type described herein may significantly reduce the power and space requirements of the waveform generator(s) by limiting the amount of hardware used to perform pulse generation. The waveform generator may have access to a memory storing templates, such that each template represents a specific state for the pulsing circuits. For example, the templates may contain a set of selectable referenced voltages that a pulsing circuit can lock to. The templates may also be referred to herein as “master segments,” “waveform segments,” or by other similar terminology. The waveform generator may comprise a controller configured to access the templates stored in the memory, and packetize templates such that each packet may control one or more pulsing circuits to generate a pulse segments. “Pulse segments” will be referred to herein as pulse portions, such that the voltage of the pulse is constant throughout the duration of the pulse segment, and is locked to the selected reference voltage. As will be described further below, master segments and packets are defined in the digital domain while pulse segments are defined in the analog domain.

**[0022]** According to another aspect of the present application, spatial apodization of ultrasound signals is achieved using circuitry which operates on a serial data stream input provided by a waveform generator, rather than parallel input data streams. In some embodiments, decoding circuitry disposed along the packet data path between the waveform generator and the pulsing circuits of an ultrasound device may be configured to provide spatial apodization by receiving and spatially modulating the packets generated by the waveform generator based on a desired spatial profile. Accordingly, each ultrasonic transducer of the array may be provided with an input control value that depends on the location of the transducer. The use of decoding circuitry of the type described herein significantly simplifies the design of the waveform generator, which can be configured to generate serialized streams of packets.

**[0023]** These features may facilitate formation of a power and space-efficient circuit for generating waveforms to control ultrasonic transducers, and thus may facilitate formation of an ultrasound-on-a-chip device including a CMOS substrate with integrated circuitry and ultrasonic transducers.

**[0024]** The aspects and embodiments described above, as well as additional aspects and embodiments, are described further below. These aspects and/or embodiments may be used individually, all together, or in any combination of two or more, as the application is not limited in this respect.

**[0025]** According to one aspect of the present application, pulsing circuits configured to provide multi-level pulses are provided. The pulsing circuits may be configured to provide one or more pulses to a respective ultrasonic transducer of an ultrasound device. The pulse(s) may be formed by a succession of pulse segments. Each pulse segment of the pulse may assume one among a set of selectable reference voltages, between an initial time  $t_i$  and a final  $t_f$ . The pulses may be asynchronous in some embodiments, such that the duration  $t_f - t_i$ , of each pulse segment may be variable.

**[0026]** FIG. 1A illustrates schematically a block diagram of an ultrasound device comprising a plurality of pulsing circuits and a plurality of decoding circuits, according to a non-limiting embodiment of the present application. Ultrasound device **100** may comprise a plurality of circuitry channels  $102_1 \dots 102_N$ , where  $N$  is an integer. Circuitry channels  $102_1 \dots 102_N$  may be electrically connected to respective ultrasonic transducers  $101_1 \dots 101_N$ . Ultrasound device **100** may further comprise analog-to-digital converter (ADC) **111**.

**[0027]** The circuitry channels  $102_1 \dots 102_N$  may comprise circuitry for the transmission and/or reception of ultrasound acoustic waves. On the transmitter side, circuitry channels  $102_1 \dots 102_N$  may comprise decoding circuits  $105_1 \dots 105_N$  coupled to respective pulsing circuits  $103_1 \dots 103_N$ . The pulsing circuits  $103_1 \dots 103_N$  may control respective ultrasonic transducers  $101_1 \dots 101_N$  to emit acoustic waveforms.

**[0028]** Pulsing circuits  $103_1 \dots 103_N$  are circuits, in some embodiments, configured to provide pulses to respective ultrasonic transducers  $101_1 \dots 101_N$ . In some embodiments, pulsing circuits  $103_1 \dots 103_N$  may provide multi-level pulses exhibiting three or more levels selected from a set of selectable levels. The selectable levels may be reference voltages in some embodiments. The pulsing circuits may be configured to receive one reference voltage at a time and to form pulses that lock to the received reference voltage. In some embodiments, the pulsers may provide bipolar pulses capable of exhibiting positive and/or negative voltages.

**[0029]** In some embodiments, pulsing circuits  $103_1 \dots 103_N$  may comprise two transistors. FIG. 1B illustrates a circuit diagram of a pulsing circuit **103** which may serve as any of the pulsing circuits  $103_1 \dots 103_N$  of FIG. 1A. The pulsing circuit **103** of FIG. 1B comprising a first transistor **127** and a second transistor **129**. In some embodiments, transistor **127** is a positive metal-oxide-semiconductor (pMOS) transistor and transistor **129** is a negative metal-oxide-semiconductor (nMOS) transistor. However, any other suitable number and/or type of transistor may be used.

**[0030]** Transistor **127** may be set to a conductive state through control signal  $V_{c1}$  when a new reference voltage, greater than the previously selected reference voltage, is selected. In this case, transistor **127** may drive an electric current between supply voltage  $V_H$  and ultrasonic transducer **101** and the voltage across the terminals of the ultrasonic transducer may be increased until the currently selected reference voltage is reached. A feedback circuit **125** may compare the voltage across the terminals of the ultrasonic transducer and compare it to the currently selected reference voltage. When the voltage across the terminals of the transducer is equal to the reference voltage, or alternatively, is equal to a voltage proportional to the reference voltage by a constant and predefined factor, feedback circuit **125** may turn off transistor **127** through control signal  $V_{c1}$ . Owing to

the fact that ultrasonic transducer **101** is capacitive, the ultrasonic transducer may hold a voltage across its terminals that is equal or proportional to the reference voltage.

[0031] Similarly, transistor **129** may be set to a conductive state through control signal  $V_{c2}$  when a new reference voltage, less than the previously selected reference voltage, is selected. In this case, transistor **129** may drive an electric current between supply voltage  $V_L$  and ultrasonic transducer **101**, and the voltage across the terminals of the ultrasonic transducer may be decreased until the currently selected reference voltage is reached. In some embodiments,  $V_L$  is less than  $V_H$ .  $V_L$  may be a positive voltage, a negative voltage, or zero. Feedback circuit **125** may compare the voltage across the terminals of the ultrasonic transducer to the currently selected reference voltage. When the voltage across the terminals of the transducer is equal to the reference voltage, or alternatively, is equal to a voltage proportional to the reference voltage by a constant and predefined factor, feedback circuit **125** may turn off transistor **129** through control signal  $V_{c2}$ . Owing to the fact that ultrasonic transducer **101** is capacitive, the transducer may hold a voltage across its terminals that is equal or proportional to the reference voltage.

[0032] Aspects of the present application provide decoding circuits suitable for use in an ultrasound device having a plurality of multi-level pulsers. An example relates to decoding circuits  $105_1 \dots 105_N$  of FIG. 1A. In some embodiments, decoding circuits  $105_1 \dots 105_N$  may be part of a single circuitry element, while in other embodiments, they may comprise separate circuits. In some embodiments, each decoding circuit may correspond to a respective ultrasonic transducer. However, in other embodiments, more than one ultrasonic transducer may share one decoding circuit. In some embodiments, decoding circuits  $105_1 \dots 105_N$  may be configured to modulate the packets, as described further below, generated by a waveform generator and to provide the modulated packets to respective pulsing circuits  $103_1 \dots 103_N$ . In some embodiments, decoding circuits  $105_1 \dots 105_N$  may provide pulses to respective pulsing circuits  $103_1 \dots 103_N$  such that spatial apodization is obtained.

[0033] As will be described further below, ultrasound device **100** may further comprise one or more waveform generators (not shown in FIG. 1A) configured to provide serialized packets to decoding circuits  $105_1 \dots 105_N$ . In some embodiments, the waveform generator(s) may be configured to form packets by aggregating master segments selectable from a library of selectable master segments.

[0034] Referring back to FIG. 1A, the receive circuitry of the circuitry channels  $102_1 \dots 102_N$  may receive the electrical signals from respective ultrasonic transducers  $101_1 \dots 101_N$  in response to receiving an ultrasound acoustic wave. In the illustrated example, each circuitry channel  $102_1 \dots 102_N$  comprises a respective receive switch  $107_1 \dots 107_N$  and a receiving circuit  $109_1 \dots 109_N$ . The receive switches  $107_1 \dots 107_N$  may be controlled to activate/deactivate readout of an electrical signal from a given ultrasonic transducer  $101_1 \dots 101_N$ . In some embodiments, the receiving circuits  $109_1 \dots 109_N$  may comprise transimpedance amplifiers (TIAs).

[0035] Ultrasound device **100** may further comprise ADC **111**. ADC **111** may be configured to digitize the signals received by ultrasonic transducers  $101_1 \dots 101_N$ . The digitization of the various received signals may be performed in series or in parallel.

[0036] While FIG. 1A illustrates a number of components as part of a circuit of an ultrasound device, it should be appreciated that the various aspects described herein are not limited to the exact components or configuration of components illustrated.

[0037] The ultrasonic transducers  $101_1 \dots 101_N$  are sensors, in some embodiments, producing electrical signals representing received ultrasound acoustic waves. The ultrasonic transducers may also transmit ultrasound acoustic waves in some embodiments. The ultrasonic transducers may be capacitive micromachined ultrasonic transducers (CMUTs) in some embodiments. However, other types of capacitive ultrasonic transducers may be used in other embodiments.

[0038] The components of FIG. 1A may be located on a single substrate or on different substrates. For example, the ultrasonic transducers  $101_1 \dots 101_N$  may be on a first substrate and the remaining illustrated components may be on a second substrate. The first and/or second substrates may be semiconductor substrates, such as silicon substrates. In an alternative embodiment, the components of FIG. 1A may be on a single substrate. For example, the ultrasonic transducers  $101_1 \dots 101_N$  and the illustrated circuitry may be monolithically integrated on the same semiconductor die.

[0039] According to an embodiment, the components of FIG. 1A form part of an ultrasound probe. The ultrasound probe may be handheld. In some embodiments, the components of FIG. 1A form part of an ultrasound patch configured to be worn by a patient.

[0040] As discussed above, the ultrasound device may comprise one or more waveform generators configured to generate a plurality of packets based on a set of selectable templates. The packets may be decoded by decoding circuits  $105_1 \dots 105_N$  and may be used to form multi-level pulses through pulsing circuits  $103_1 \dots 103_N$ . FIG. 1C illustrates schematically a block diagram of an ultrasound device **110** comprising a waveform generator **151**, according to some non-limiting embodiments. Ultrasound device **100** may further comprise memory **153**, transmitter array **150**, transducer array **152**, receiver array **154**, signal conditioning/processing circuit **170**, timing and control circuit **160**, power management circuit **180**, or any suitable combination thereof.

[0041] In some embodiments, ultrasound device **110** may comprise some or all of the components of ultrasound device **100**. Transmitter array **150** of ultrasound device **110** may comprise pulsing circuits  $103_1 \dots 103_N$  and decoding circuits  $105_1 \dots 105_N$  of ultrasound device **100** in some embodiments. Transducer array **152** may comprise ultrasonic transducers  $101_1 \dots 101_N$  in some embodiments. The ultrasonic transducers may be organized in one-dimensional or two-dimensional arrays. Receiver array **154** may comprise receive switches  $107_1 \dots 107_N$  and a receiving circuits  $109_1 \dots 109_N$  in some embodiments. Signal conditioning/processing unit **170** may comprise ADC **111**. In some embodiments, signal conditioning/processing unit **170** may further comprise digital circuitry configured to form images based on the ultrasound acoustic waves received by transducer array **152**.

[0042] According to aspects of the present application, waveform generator **151** may be configured to generate control signals to drive pulsing circuits  $103_1 \dots 103_N$  of transmitter array **150**. The control signals may be organized in packets, such that each packet may comprise information

corresponding to a selected reference voltage. In some embodiments, the packets may be directed to respective feedback circuits **125** of pulsing circuits **103**<sub>1</sub> . . . **103**<sub>N</sub>. The content of the packets will be described in connection with FIG. 3A.

**[0043]** In some embodiments, waveform generator **151** may be connected to memory **153**. As will be described further below, memory **153** may store a plurality of master segments. Waveform generator **151** may access memory **153** to obtain one or more master segments. Waveform generator **151** may combine various master segments to form a desired succession of packets.

**[0044]** In some embodiments, memory **153** may comprise random access memory (RAM) units, read-only memory (ROM) units, flash memory units, or any suitable type of memory that can store waveform segments. In some embodiments, waveform generator **151** may comprise one or more logic circuits. The logic circuit(s) may comprise processors, field-programmable gate arrays (FPGAs), application-specific integrated circuits (ASICs), microcontrollers, or any suitable combination thereof. Waveform generator **151** may be configured to access data stored in memory **153** and to execute computer instruction(s) to process the data obtained from the memory.

**[0045]** The ultrasound device **100** may further comprise an output port **114** which may be a physical interface between ultrasound device **100** and an external device. For example, output port **114** may connect to external devices capable of receiving and processing large amounts of ultrasound data, such as a specialized FPGA, a GPU, or other suitable device. While only a single output port **114** is illustrated, it should be appreciated that multiple output ports may be provided. Ultrasound device **100** may also include a clock input port **116** to receive and provide a clock signal CLK to the timing and control circuit **160**.

**[0046]** Power management circuit **180** may receive ground (GND) and voltage reference ( $V_{IN}$ ) signals. Optionally, a high-intensity focused ultrasound (HIFU) controller **190** may be included if ultrasound device **100** is to be used to provide HIFU. In the embodiment shown, all of the illustrated elements may be formed on a single semiconductor die (or substrate or chip) **112**, though not all embodiments are limited in this respect.

**[0047]** Transducer array **152** may be arranged in rows and columns in some embodiments. FIG. 2A shows an illustrative arrangement of a transducer array, according to a non-limiting embodiment of the present application. As illustrated, transducer array **152** of an ultrasound device **100** may have multiple modules **204**. As shown, a module **204** may comprise multiple elements **206**. An element **206** may comprise multiple cells **208**. A cell **208** may comprise an ultrasonic transducer of the type described in connection with FIG. 1A.

**[0048]** In the illustrated embodiment, transducer array **152** comprises 144 modules arranged as an array having 72 rows and 2 columns. However, it should be appreciated that a transducer array may comprise any suitable number of modules (e.g., at least one module, at least two modules, at least ten modules, at least 100 modules, at least 1000 modules, at least 5000 modules, at least 10,000 modules, at least 25,000 modules, at least 50,000 modules, at least 100,000 modules, at least 250,000 modules, at least 500,000 modules, between two and a million modules, or any number of range of numbers within such ranges) that may be

arranged as a one-dimensional or two-dimensional array of modules having any suitable number of rows and columns or in any other suitable way.

**[0049]** In the illustrated embodiment, each module comprises 64 ultrasound elements arranged as an array having two rows and 32 columns. However, it should be appreciated that a module may comprise any suitable number of ultrasound elements (e.g., one element, at least two ultrasound elements, at least four ultrasound elements, at least eight ultrasound elements, at least 16 ultrasound elements, at least 32 ultrasound elements, at least 64 ultrasound elements, at least 128 ultrasound elements, at least 256 ultrasound elements, at least 512 ultrasound elements, between two and 1024 ultrasound elements, at least 2500 ultrasound elements, at least 5,000 ultrasound elements, at least 10,000 ultrasound elements, at least 20,000 ultrasound elements, between 1000 and 20,000 ultrasound elements, or any number of range of numbers within such ranges) that may be arranged as a one-dimensional or two-dimensional array of ultrasound elements having any suitable number of rows and columns or in any other suitable way.

**[0050]** In the illustrated embodiment, each ultrasound element comprises 16 cells **208** arranged as a two-dimensional array having four rows and four columns, a cell representing an ultrasonic transducer and those two terms being used synonymously herein. However, it should be appreciated that an element may comprise any suitable number of cells (e.g., one, at least two, at least four, at least 16, at least 25, at least 36, at least 49, at least 64, at least 81, at least 100, between one and 200, or any number or range of numbers within such ranges) that may be arranged as a one-dimensional or two dimensional array having any suitable number of rows and columns (square or rectangular) or in any other suitable way. In some embodiments, each cell **208** may comprise an ultrasonic transducer of the type described in connection with FIG. 1A.

**[0051]** In some embodiments, transmitter array **150** may be arranged in a configuration that matches the modules, ultrasound elements and cells illustrated in FIG. 2A, such that to each ultrasonic transducer correspond one pulsing circuit. However, other configurations are also possible. For example, a single pulsing circuit may be configured to drive a plurality of ultrasonic transducers, such as all the ultrasonic transducers of a cell **208**.

**[0052]** According to one aspect of the present application, the circuitry used to generate multi-level pulses may be reduced, in some instances significantly, by performing the generation of the pulses via software. For example, a computer code may be programmed by a user to provide a desired pulse profile. The profile of the pulse may be engineered based on the nature of the target being probed and/or the environment in which the probing takes place. The computer code may comprise a set of instructions configured to interact with waveform generator **151**. In response to the execution of the instructions, waveform generator **151** may generate a plurality of packets of the type described above.

**[0053]** In some embodiments, waveform generator **151** may be configured to generate packets in a serialized fashion. Accordingly, each packet may be transmitted following the transmission of a preceding packet. However the application is not limited in this respect and packets may be transmitted using any suitable degree of parallelization. FIG. 2B illustrates schematically a block diagram of a waveform

generator, according to a non-limiting embodiments of the present application. Waveform generator **151** may comprise one or more packet generators (e.g., packet generators **260<sub>1</sub>** and **260<sub>2</sub>**), one or more encoding circuits (e.g., encoding circuits **262<sub>1</sub>** and **262<sub>2</sub>**), controller **265** and delay mesh circuit **269**.

**[0054]** Memory **153** may comprise a plurality of records, such that a record, and in some embodiments each record, contains one master segment. In some embodiments, the master segments collectively represent all the possible states that the pulsing circuits can assume. For example, the master segments may comprise a field for the selectable reference voltages. In some embodiments, the master segments may comprise a field for control signals  $V_{c1}$  and  $V_{c2}$  for respective feedback circuits **125** of pulsing circuits **103<sub>1</sub>** . . . **103<sub>N</sub>**. In some embodiments, memory **153** may be partitioned, and may comprise at least one section for each packet generator. In such embodiments, packet generator **260<sub>1</sub>** may use data stored in a section of memory **153** and packet generator **260<sub>2</sub>** may use data stored in another section of memory **153**. In some embodiments, such portions may overlap. In other embodiments, such portions may comprise the same portion.

**[0055]** In response to the execution of a set of computer instructions, controller **265** may control a packet generator to access memory **153** and to select a number of master segments, as requested by the user. The packet generator may form a succession of packets based on the selected master segment. Each packet may correspond to a selected master segment. In some embodiments, specific packets that do not have any corresponding master segment may be included in the packet stream by the packet generators. For example, the first packet of a succession of packets, or start\_packet, may be generated by the packet generator before any other packet corresponding to a master segment. Additionally, or alternatively, the last packet of a succession of packets, or end\_packet, may be generated by the packet generator after all other packets.

**[0056]** As illustrated in FIG. 2B, waveform generator **151** may comprise two packet generators, such that each packet generator provides packets to a column comprising a plurality of ultrasound elements (such as ultrasound element **206**). However the application is not limited in this respect and any other suitable number of packet generators may be used such that each packet generator may provide packets to any suitable number of elements.

**[0057]** The packets generated by packet generators **260<sub>1</sub>** and **260<sub>2</sub>** may be provided to respective encoding circuits **262<sub>1</sub>** and **262<sub>2</sub>**. In response, the encoding circuit may encode the packets provided. In some embodiments, encoding circuit may be configured to perform serialization of the packets. The encoding circuit may reduce the amount of data used to provide packets generated by the packet generator to the pulsing circuits, and thus may provide a valuable reduction in the amount of memory used to store and communicate the desired packets.

**[0058]** In some embodiments, the encoding circuit may be configured to implement an N-to-M bit encoder (where each of N and M is a positive integer and where N is greater than M) so that when the encoding circuit encodes an input signal consisting of B bits the resultant encoded signal includes approximately  $B \cdot M/N$  bits (where B is a positive integer). As a specific non-limiting example, the encoding circuit may be configured to implement a 2-to-1 bit encoder so that when the encoding circuit encodes an input signal of B

bits, the resultant encoded signal has approximately B/2 bits. As another specific non-limiting example, the encoding circuitry may be configured to implement a 3-to-2 bit encoder so that when the encoding circuitry encodes an input signal of B bits, the resultant encoded signal has approximately  $2B/3$  bits. As yet another specific non-limiting example, the encoding circuitry may be configured to implement a 3-to-1 bit encoder so that when the encoding circuitry encodes an input signal of B bits, the resultant signal has approximately B/3 bits. More details of a non-limiting suitable encoding circuit may be found in U.S. Pat. No. 9,229,097, which is incorporated herein by reference in its entirety.

**[0059]** The encoded packets generated by encoding circuits **262<sub>1</sub>** and **262<sub>2</sub>** may be provided to delay mesh circuit **269** in some embodiments. Delay mesh circuit **269** may include a delay mesh for producing multiple versions of the packets, the delay mesh having an input configured to receive the packets generated by the waveform generator and a plurality of (parallel) outputs configured to provide the multiple versions of the packets to the plurality of pulsing circuits. The delay mesh may be controlled to produce different versions of the packets generated by the waveform generator in response to different controls applied to the delay mesh. In this way, the ultrasound device can be controlled to generate different types of ultrasound waveforms.

**[0060]** In some embodiments, delay mesh circuit **269** may comprise a plurality of delay mesh units each of which may delay packets to obtain one or more time-delayed versions of the packets and provide them as output signals to one or more pulsing circuits. Output signals provided to one or more other delay mesh units may be further time-delayed by those delay mesh units and be transmitted and/or further processed by still other delay mesh units. In this way, a packet input to the delay mesh circuit may propagate through a plurality of delay mesh units, with one or more of the delay mesh units time-delaying the packet providing the resulting time-delayed version(s) to one or more ultrasound elements for transmission. As such, delay mesh circuitry may generate multiple time-delayed versions of the packet and provide these versions the pulsing circuits. A delay mesh unit may comprise a buffer for storing and/or performing operations on a packet. In some embodiments, delay mesh circuit **269** may comprise many delay mesh units and, as such, reducing the size of the buffer of each delay mesh unit may reduce both space and power requirements of implementing delay mesh circuitry on a single substrate ultrasound device. More details of a non-limiting suitable delay mesh circuit may be found in U.S. Pat. No. 9,229,097, which is incorporated herein by reference in its entirety.

**[0061]** In some embodiments, delay mesh circuit **269** may have a plurality of outputs **270<sub>1</sub>** . . . **270<sub>N</sub>**. In some embodiments, the number of output is equal to the number of pulsing circuits of transmitter array **150**. The various outputs **270<sub>1</sub>** . . . **270<sub>N</sub>** may be different time-delayed versions of the packets provided by the encoding circuits in some embodiments. In other embodiments, the various outputs **270<sub>1</sub>** . . . **270<sub>N</sub>** may all have equal delays. In some embodiments, delay mesh circuit **269** may be configured to provide temporal apodization.

**[0062]** According to aspects of the present application, transmitter array **150** may comprise a plurality of decoding circuits. In some embodiments, the encoding circuits may

decode the packets obtained through outputs  $270_1 \dots 270_N$ . FIG. 2C illustrates schematically a block diagram of an ultrasound device comprising a plurality of decoding circuits, according to a non-limiting embodiment of the present application. Each decoding circuit  $105_1 \dots 105_N$  may receive one or more packets from respective outputs  $270_1 \dots 270_N$ . Controller 266 may be configured to control the decoding circuits  $105_1 \dots 105_N$ . While the decoding circuits are shown as separate elements, they may be part of a single decoder circuit block in some embodiments. Each decoding circuit may be connected to a respective pulsing circuit  $103_1 \dots 103_N$ . Each pulsing circuit may be connected to a ultrasonic transducer  $101_1 \dots 101_N$ .

[0063] In some embodiments, controller 266 may operate in response to the execution of a set of computer instructions. In some embodiments, decoding the serialized packet may comprise performing a serial-to-parallel conversion. Accordingly, the decoding circuits may receive the packet one bit at a time, and may form one or more words of bits. For example, one word may comprise the bits used to define a reference voltage. In some embodiments, the word corresponding to the reference voltage may be transmitted in parallel by the encoding circuits to respective pulsing circuits. “Parallel transmission” will be referred to herein such that each bit forming a word is transmitted on a respective conductive wire.

[0064] In some embodiments, controller 266 may be configured to modulate the packets received. “Modulation” of a packet as used herein refers to the multiplication, or division, of the value of the packet corresponding to the selected reference voltage by a desired factor. The effect of modulating a packet is the generation of a scaled version of the reference voltage transmitted within the packet. In some embodiments, the various packets received by the decoding circuits may be modulated with different factors. For example, the packets may be modulated according to a desired modulation profile, such that each decoding circuit may provide a desired factor.

[0065] Packets may be modulated to provide spatial apodization across the array of ultrasonic transducers. In some embodiments, the reference voltage contained in a packet may be modulated by dividing, or multiplying it by a factor that is between 0.001 and 1 in some embodiments, between 0.001 and 0.999 in some embodiments, between 0.01 and 0.99 in some embodiments, between 0.1 and 0.9 in some embodiments, between 0.25 and 0.75 in some embodiments, between 0.4 and 0.7 in some embodiments, or between any other suitable values or range of values. Other values are also possible. In some embodiments the modulation may be performed in the digital domain. In some embodiments, the modulation factors may be represented by two bits, thus providing four combinations. By way of example and not limitation, the modulation factors may be equal to 0, 0.4, 0.7 and 1. Other values are also possible. As the decoding circuits receive packets, the corresponding reference voltages may be multiplied by one of the four modulation factors described herein. By way of example and not limitation, the decoding circuits may be configured to perform spatial apodization, such that the emitted ultrasound acoustic wave has a main lobe in the middle of the array and the intensity decays toward the edges of the array.

[0066] In some embodiments, the decoding circuits may be configured to implement an M-to-N bit decoder (where each of N and M is a positive integer and where N is greater

than M) so that when the decoding circuits decode an input signal of B bits the resultant decoded signal has approximately  $B*N/M$  bits (where B is a positive integer). As a specific non-limiting example, a decoding circuit may be configured to implement a 1-to-2 bit decoder so that when the decoding circuitry decodes an input signal of B bits, the resultant decoded signal has approximately 2B bits. The decoding function may be the inverse of the encoding function provided by encoding circuits 262<sub>1</sub> and 262<sub>2</sub>.

[0067] FIG. 3A illustrates a data path diagram showing a succession of packets, according to a non-limiting embodiment of the present application. FIG. 3A illustrates memory 153 comprising a plurality of records, such that each record contains a master segment  $353_1 \dots 353_N$ . As described above, master segments  $353_1 \dots 353_N$  collectively represent a base for the generation of desired pulse profiles. Stage 310 of the data path represents the generation of a non-limiting exemplary succession of packets  $311_1, 311_2 \dots 311_k$  where k may assume any integer value greater than two. Each packet may correspond to one of the master segments. The succession of packets may begin with a start\_packet and/or may end with an end\_packet.

[0068] Packet  $311_1$  is shown in additional detail. In some embodiments, packet  $311_1$  may comprise a field  $312_A$  containing one or more bits to determine the conductive state of transistors 127 and 129. Field  $312_A$  may be directed to a feedback circuit 125 of a respective pulsing circuit. Based on field  $312_A$ , the feedback circuit may control signals  $V_{c1}$  and  $V_{c2}$ .

[0069] In some embodiments, packet  $311_1$  may comprise a field  $312_B$  containing one or more bits representing a reference voltage. The number of bits needed to represent the reference voltage may depend on the number of selectable reference voltages. As an example, if n is the number of selectable voltages, field  $312_E$  may contain a number of bits that is greater than, less than, or equal to  $\log_2 n$ . In some embodiments, the number of bits used to represent field  $312_E$  may be reconfigured during run-time. For example, the multi-level pulser may be reconfigured, during run-time, to operate as a 2-level pulser. In such circumstance, the number of bits representing the reference voltage may be reduced. Field  $312_E$  may be directed to a feedback circuit 125 of a respective pulsing circuit. In some embodiments, packet  $311_1$  may comprise a field  $312_C$  containing one or more control bits. The control bits may be directed to delay mesh circuit 269 to determine the delays across output  $270_1 \dots 270_N$  and/or to controller 266 to control the spatial apodization profile.

[0070] The succession of packets may be used by a pulsing circuit to generate a pulse 320, as illustrated in FIG. 3A. Pulse 320 may comprise pulse segments  $321_1, 321_2 \dots 321_k$ , such that each pulse segment is generated in response to a respective packet  $311_1, 311_2 \dots 311_k$ . The duration of each pulse segment may be controlled by a counter configured to count clock cycles until a predetermined segment duration is reached. The pulse may be asynchronous in some embodiments, such that pulse segments may have different durations. As illustrated, the master segments and the packets may be defined in the digital domain while the pulse segments may be defined in the analog domain.

[0071] FIG. 3B illustrates a time diagram showing an exemplary multi-level pulse 301 formed through a succession of packets, according to a non-limiting embodiment of the present application. In the example shown, a reference

voltage may be selected from among seven selectable reference voltages  $RV_1 \dots RV_7$ . At times  $t_1, t_2, t_3, t_4, t_5, t_6, t_7, t_8, t_9$  and  $t_{10}$  a new reference voltage is selected. For example,  $RV_4$  is selected at  $t_1$ ,  $RV_5$  is selected at  $t_2$ ,  $RV_6$  is selected at  $t_3$ , etc. An “event” is defined herein as the time at which a new reference voltage is selected, such as time  $t_1, t_2, t_3$ , etc. While in the non-limiting example of FIG. 3B a set of seven selectable reference voltages are provided, any suitable number of reference voltages may be employed. In some embodiments, the pulse may be bipolar and each selectable reference voltage can be positive and/or negative.

[0072] In some embodiments, the packet may comprise field PMOS/NMOS, serving as field 312A. The pMOS transistor may be activated (ON state) to increase the voltage in response to the selection of a reference voltage that is greater than the reference voltage previously selected. The nMOS transistor may be activated (ON state) to decrease the voltage in response to the selection of a reference voltage that is less than the reference voltage previously selected. During a segment, and in some embodiments during each segment, at least one transistor is deactivated (OFF state). In some embodiments, the packet may comprise field REF\_V, serving as field 312B, to select a reference voltage, from the set of selectable reference voltage. In the non-limiting example of FIG. 3B, which exhibits a set of seven selectable reference voltages, REF\_V may comprise three or more bits to produce eight or more combinations. In some embodiments, a clock counter may count clock cycles until a duration associated with a packet is reached. In the embodiment shown in FIG. 3B, the packets exhibit respective durations  $D_1, D_2, D_3, D_4, D_5, D_6, D_7, D_8, D_9$  and  $D_{10}$  defined by the field duration.

[0073] FIG. 4 illustrates the steps of a method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers, according to a non-limiting embodiment of the present application. Method 400 may begin at act 402, in which waveform generator 151 may access memory 153, and may obtain a master segment. This operation may be triggered by the execution of a computer code in some embodiments. The master segment may comprise values intended to define the characteristics of a corresponding pulse segment. For example, the master segment may comprise a value representing a reference voltage of a plurality of selectable reference voltages. In response, the corresponding pulse segment may have a voltage locked to the reference voltage. In some embodiments, the master segment may comprise a value representing the conductive state of a first transistor, such as transistor 127 and/or the conductive state of a second transistor, such as transistor 129. Based on such value, transistors 127 and 129 may be set to a conductive or a non-conductive state throughout the duration of the pulse segment corresponding to the master segment.

[0074] At act 404, waveform generator 151 may form a packet based on the master segment obtained from memory 153 at act 402. In some embodiments, the packet formed may comprise the one or more values defined in the master segment. In some embodiments, the packet may comprise values that may be used to control the data path of the packet. In some embodiments, the packet may comprise a value representing the duration of the pulse segment corresponding to the packet. In other embodiments, the duration

of a pulse segment may be defined through a counter configured to count clock cycles until the desired number of clock cycles is reached.

[0075] At act 406, the packet may be transmitted to decoding circuitry. The decoding circuitry may comprise decoding circuits  $105_1 \dots 105_N$  in some embodiments. The packet may be transmitted serially. For example, the packet may be transmitted one bit at a time. In some embodiments, waveform generator 151 may comprise one or more packet generators, such as packet generators 260<sub>1</sub> and 260<sub>2</sub>, each of which may transmit a packet serially.

[0076] In some embodiments, waveform generator 151 may obtain a plurality of master segments from memory 153, and may form a plurality of packets. In some embodiments, for each master segment obtained one packet is formed. In some embodiments, each packet may be used to define a pulse segment. Pulse segments may be concatenated to form a desired waveform. Each pulse segment of the waveform may be locked to a voltage defined by the reference voltage contained in the respective packet.

[0077] In some embodiments, the packet may be transmitted through delay mesh circuit 269. In some embodiments, delay mesh circuit 269 may receive one or more packets from the packet generators, and may generate a plurality of copies of the packets. For example, delay mesh circuit 269 may generate, for each pulser, one copy of the packet. In some embodiments, delay mesh circuit 269 may transmit the copies with one or more time delays. For example, the copies may be time delayed based on a desired distribution.

[0078] At act 408, the decoding circuitry, comprising decoding circuits  $105_1 \dots 105_N$  may receive the serialized packets and decode them. Decoding the serialized packet may comprise performing a serial-to-parallel conversion in some embodiments. Accordingly, the decoding circuits may receive the packet one bit at a time, and may form one or more words of bits. For example, one word may comprise a field, such as field 312B, containing bits defining a reference voltage. In some embodiments, the word corresponding to the reference voltage may be transmitted in parallel by the encoding circuits to respective pulsing circuits.

[0079] In some embodiments, decoding the serialized packet may comprise modulating the packet. The packet may be modulated by multiplying, or dividing, the value of the packet corresponding to the reference voltage by a desired factor. In some embodiments, the various packets received by the decoding circuits may be modulated with different factors. For example, the packets may be modulated according to a desired modulation profile, such that each decoding circuit may provide a desired factor. In some embodiments, modulation of the packets may be performed to obtain a spatially apodized pulse across the array of ultrasonic transducers.

[0080] At act 410, pulsing circuits  $103_1 \dots 103_N$  may be controlled by respective decoding circuits  $105_1 \dots 105_N$ . As described above, control of the pulsing circuits may be obtained by providing fields 312A, 312B, and 312C to the pulsing circuits. In response to obtaining the fields, the pulsing circuits may generate a pulse segment. The fields may be received through words transmitted in parallel in some embodiments. In some embodiments, the pulse segment may have a voltage that is locked to the reference voltage received. The reference voltage may, or may not, be scaled by a modulation factor.

**[0081]** At act 412, the pulse segment may be transmitted to an ultrasonic transducer. In response, the ultrasonic transducer may generate an acoustic ultrasound waveform segment. In some embodiments, the acoustic ultrasound waveform segment may have an intensity that is proportional to the locked voltage. In some embodiments, packets may be concatenated to form a waveform having a plurality of pulse segment. Correspondingly, an acoustic ultrasound waveform having a plurality of acoustic ultrasound waveform segments may be formed.

**[0082]** The aspects of the present application may provide one or more benefits, some of which have been previously described. Now described are some non-limiting examples of such benefits. It should be appreciated that not all aspects and embodiments necessarily provide all of the benefits now described. Further, it should be appreciated that aspects of the present application may provide additional benefits to those now described.

**[0083]** Aspects of the present application provide pulsing circuits configured to generate multi-level pulses that may that may improve the quality of ultrasound images by providing spatial and/or temporal apodization. Apodization may reduce the extent of the side-lobes associated with transmitted pulses, thus increasing the resolution of the image produced.

**[0084]** Aspects of the present application provide software-defined waveform generators. Waveform generators of the type described herein may be configured to control the pulsing circuits in response to the execution of a computer code. The use of waveform generators of the type described herein may significantly lessen the hardware required to generate ultrasound pulses, and thus may decrease the power consumption and/or the real estate required.

**[0085]** Having thus described several aspects and embodiments of the technology of this application, it is to be appreciated that various alterations, modifications, and improvements will readily occur to those of ordinary skill in the art. Such alterations, modifications, and improvements are intended to be within the spirit and scope of the technology described in the application. It is, therefore, to be understood that the foregoing embodiments are presented by way of example only and that, within the scope of the appended claims and equivalents thereto, inventive embodiments may be practiced otherwise than as specifically described. In addition, any combination of two or more features, systems, articles, materials, and/or methods described herein, if such features, systems, articles, materials, and/or methods are not mutually inconsistent, is included within the scope of the present disclosure.

**[0086]** Also, as described, some aspects may be embodied as one or more methods. The acts performed as part of the method may be ordered in any suitable way. Accordingly, embodiments may be constructed in which acts are performed in an order different than illustrated, which may include performing some acts simultaneously, even though shown as sequential acts in illustrative embodiments.

**[0087]** All definitions, as defined and used herein, should be understood to control over dictionary definitions, definitions in documents incorporated by reference, and/or ordinary meanings of the defined terms.

**[0088]** The indefinite articles “a” and “an,” as used herein in the specification and in the claims, unless clearly indicated to the contrary, should be understood to mean “at least one.”

**[0089]** The phrase “and/or,” as used herein in the specification and in the claims, should be understood to mean “either or both” of the elements so conjoined, i.e., elements that are conjunctively present in some cases and disjunctively present in other cases.

**[0090]** As used herein in the specification and in the claims, the phrase “at least one,” in reference to a list of one or more elements, should be understood to mean at least one element selected from any one or more of the elements in the list of elements, but not necessarily including at least one of each and every element specifically listed within the list of elements and not excluding any combinations of elements in the list of elements. This definition also allows that elements may optionally be present other than the elements specifically identified within the list of elements to which the phrase “at least one” refers, whether related or unrelated to those elements specifically identified.

**[0091]** The terms “approximately” and “about” may be used to mean within  $\pm 20\%$  of a target value in some embodiments, within  $\pm 10\%$  of a target value in some embodiments, within  $\pm 5\%$  of a target value in some embodiments, and yet within  $\pm 2\%$  of a target value in some embodiments. The terms “approximately” and “about” may include the target value.

**[0092]** In the claims, as well as in the specification above, all transitional phrases such as “comprising,” “including,” “carrying,” “having,” “containing,” “involving,” “holding,” “composed of,” and the like are to be understood to be open-ended, i.e., to mean including but not limited to. The transitional phrases “consisting of” and “consisting essentially of” shall be closed or semi-closed transitional phrases, respectively.

1. A method, comprising:

generating a multi-level acoustic waveform with an ultrasound device by providing a series of data packets sequentially to a pulsing circuit coupled to an ultrasonic transducer of the ultrasound device.

2. The method of claim 1, wherein a first data packet of the series of data packets includes data identifying a duration and a reference voltage.

3. The method of claim 1, further comprising generating the series of data packets, encoding the series of data packets, and decoding the series of data packets prior to providing the series of data packets sequentially to the pulsing circuit.

4. The method of claim 1, wherein the pulsing circuit includes a pull-up transistor and a pull-down transistor, and wherein a first data packet of the series of data packets includes data identifying conductive states of the pull-up transistor and the pull-down transistor.

5. A method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers, the method comprising:

transmitting a first packet to at least one pulser of the plurality of pulsers, the first packet comprising a first value representing a first reference voltage selected from a plurality of selectable reference voltages;

providing a first control signal to represent a first duration of a first pulse segment;

in response to transmitting the first packet to the at least one pulser of the plurality of pulsers, setting the at least one pulser of the plurality of pulsers to a first state corresponding to the first reference voltage throughout the first duration of the first pulse segment;

transmitting a second packet to the at least one pulser of the plurality of pulsers, the second packet comprising a second value representing a second reference voltage selected from the plurality of selectable reference voltages;

providing a second control signal to represent a second duration of a second pulse segment;

in response to transmitting the second packet to the at least one pulser of the plurality of pulsers, setting the pulser of the plurality of pulsers to a second state corresponding to the second reference voltage throughout the second duration of the second pulse segment; wherein the plurality of selectable reference voltages comprises at least three reference voltages.

6. The method of claim 5, further comprising generating an acoustic ultrasound waveform segment using at least one ultrasonic transducer of the plurality of ultrasonic transducers, in response to setting the at least one pulser of the plurality of pulsers to the first state, wherein the acoustic ultrasound waveform segment has a magnitude that is determined by the first reference voltage.

7. The method of claim 5, wherein the at least one pulser of the plurality of pulsers comprises a first transistor and a second transistor, and wherein the first packet comprises a value representing a first conductive state associated with the first transistor and a second conductive state associated with the second transistor; and

causing the first transistor to assume the first conductive state and the second transistor to assume the second conductive state based on the value.

8. The method of claim 5, further comprising modulating the first packet across the plurality of pulsers to obtain spatial apodization.

9. The method of claim 5, wherein the first packet and the second packet are transmitted serially.

10. The method of claim 5, wherein the at least one pulser of the plurality of pulsers is configured to provide a bipolar waveform to at least one ultrasonic transducer of the plurality of ultrasonic transducers.

11. The method of claim 5, further comprising generating a plurality of time-delayed versions of the first packet; and providing the plurality of time-delayed versions of the first packet to the plurality of pulsers.

12. A method of controlling a plurality of pulsers coupled to a plurality of ultrasonic transducers, the method comprising:

selecting two or more waveform segments from among a plurality of waveform segments;

concatenating the selected two or more waveform segments to form an input waveform;

providing the input waveform to a pulser of the plurality of pulsers coupled to the plurality of ultrasonic transducers.

13. The method of claim 12, further comprising generating a pulse with the pulser from the input waveform;

providing the pulse to an ultrasonic transducer of the plurality of ultrasonic transducers; and

generating an acoustic ultrasonic waveform with the ultrasonic transducer of the plurality of ultrasonic transducers based on the pulse.

14. The method of claim 12, wherein the pulser of the plurality of pulsers is configured to provide a multi-level pulse to at least one ultrasonic transducer of the plurality of ultrasonic transducers.

15. The method of claim 12, wherein the pulser of the plurality of pulsers is configured to provide a bipolar pulse to at least one ultrasonic transducer of the plurality of ultrasonic transducers.

16. The method of claim 12, further comprising selecting a voltage reference from among a plurality of voltage references; and

selecting the two or more waveform segments from among the plurality of waveform segments based on the selected voltage reference.

17. The method of claim 12, wherein the plurality of ultrasonic transducers comprise at least one capacitive ultrasonic transducer.

18. The method of claim 12, wherein the input waveform is a first input waveform of the plurality of input waveforms and the pulser is a first pulser of the plurality of pulsers, and further comprising providing a second input waveform to a second pulser of the plurality of pulsers, wherein the first input waveform and the second input waveforms have different amplitudes.

19. The method of claim 12, further comprising: generating a plurality of time-delayed versions of the input waveform;

providing the plurality of time-delayed versions of the input waveform to the plurality of pulsers.

20. The method of claim 12, wherein providing the input waveform to the pulser of the plurality of pulsers coupled to the plurality of ultrasonic transducers comprises transmitting the input waveform at least in part serially.

\* \* \* \* \*

专利名称(译)	用于控制超声波装置的多级脉冲发生器的发送器，以及相关的方法和装置		
公开(公告)号	<a href="#">US20170281138A1</a>	公开(公告)日	2017-10-05
申请号	US15/087962	申请日	2016-03-31
[标]申请(专利权)人(译)	蝴蝶网络有限公司		
申请(专利权)人(译)	蝶形网络，INC.		
当前申请(专利权)人(译)	蝶形网络，INC.		
[标]发明人	BAO LIEWEI CHEN KAILIANG RALSTON TYLER S SANCHEZ NEVADA J		
发明人	BAO, LIEWEI CHEN, KAILIANG RALSTON, TYLER S. SANCHEZ, NEVADA J.		
IPC分类号	A61B8/00		
CPC分类号	A61B8/54 A61B8/4427 A61B8/42 A61B8/56 B06B1/0215 B06B2201/51 G01S7/5202 G01S15/8915 G10K11/341 A61B8/4227		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

描述了用于超声设备的电路。描述了一种多级脉冲发生器，其可以支持时域和空间切趾。可以通过软件定义的波形发生器来控制多级脉冲发生器。响应于计算机代码的执行，波形发生器可以从存储器访问主段，并产生指向脉冲电路的分组流。可以序列化分组流。多个解码电路可以调制分组流以获得空间切趾。

