




US 20180116632A1

(19) **United States**(12) **Patent Application Publication**
YOO et al.(10) **Pub. No.: US 2018/0116632 A1**(43) **Pub. Date: May 3, 2018**(54) **SYSTEMS AND METHOD FOR ACOUSTIC
POWER SCALABLE
CHARGE-REDISTRIBUTION ULTRASONIC
SYSTEM WITH ON-CHIP ABERRATION
COMPENSATION FOR PORTABLE
ULTRASONIC APPLICATIONS***A61B 8/00* (2006.01)*G01N 29/24* (2006.01)*G01N 29/44* (2006.01)(52) **U.S. Cl.**CPC *A61B 8/145* (2013.01); *B06B 1/0215*(2013.01); *A61B 8/4427* (2013.01); *A61B 8/56*(2013.01); *B06B 1/0607* (2013.01); *G01N**29/2406* (2013.01); *G01N 29/4463* (2013.01);*G01N 29/2437* (2013.01); *B06B 1/0292*(2013.01); *A61B 8/4494* (2013.01)(71) Applicant: **Khalifa University of Science and
Technology, Abu Dhabi (AE)**(72) Inventors: **Jerald YOO, Abu Dhabi (AE); Judyta
B. TILLAK, Abu Dhabi (AE)**(21) Appl. No.: **15/802,772**

(57)

ABSTRACT(22) Filed: **Nov. 3, 2017****Related U.S. Application Data**(60) Provisional application No. 62/416,967, filed on Nov.
3, 2016.**Publication Classification**(51) **Int. Cl.***A61B 8/14* (2006.01)*B06B 1/02* (2006.01)

The present disclosure is generally directed to an ultrasonic transducer interface system for use within portable 2-D ultrasonic imagers and includes an on-chip adaptive beam-former and Charge-Redistribution TX (CR-TX) to provide a drive strength of up to 500 pF/channel at 5 MHz (or 10 nF at 250 kHz) while reducing the TX drive power by at least 30% compared to other ultrasonic transducer TX drivers. The ultrasonic transducer interface system can be implemented in a single chip via, for example, a complementary metal oxide semiconductor (CMOS) process.

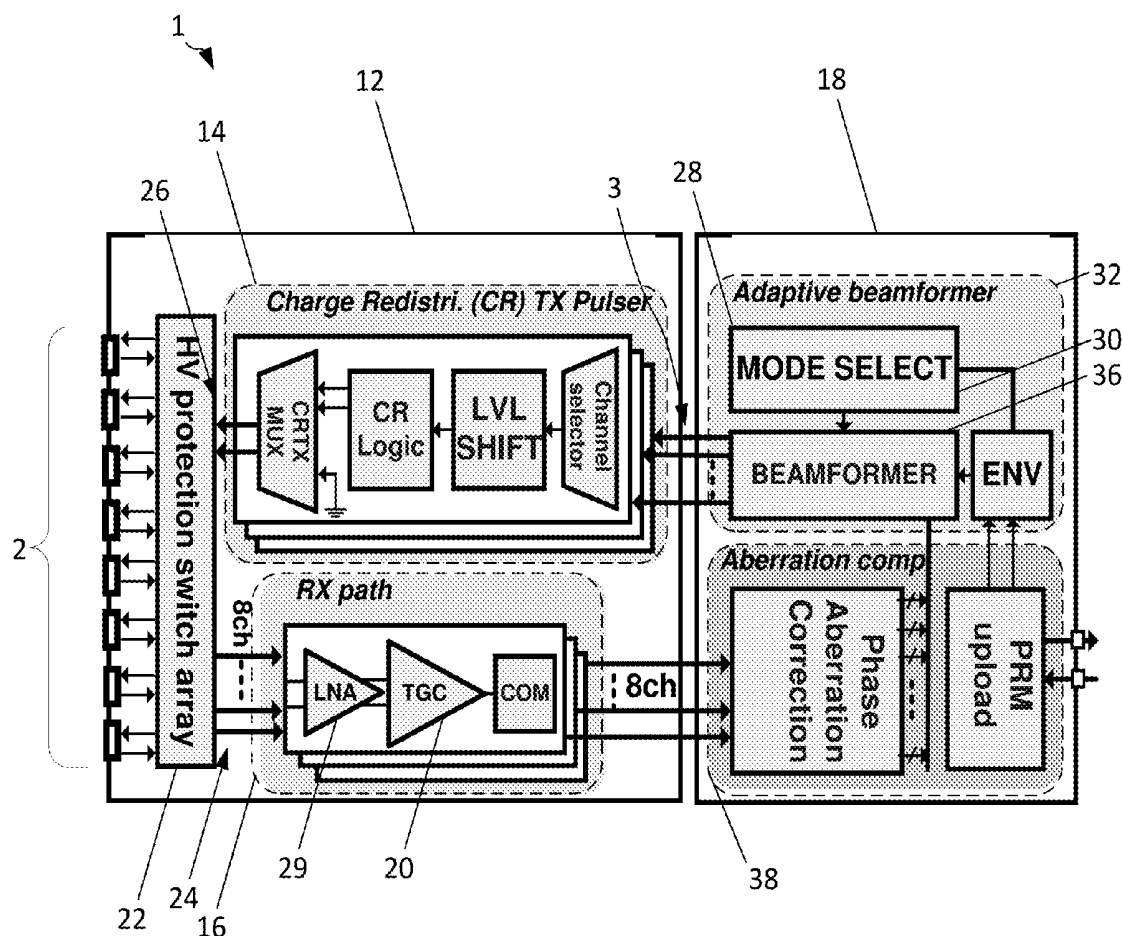

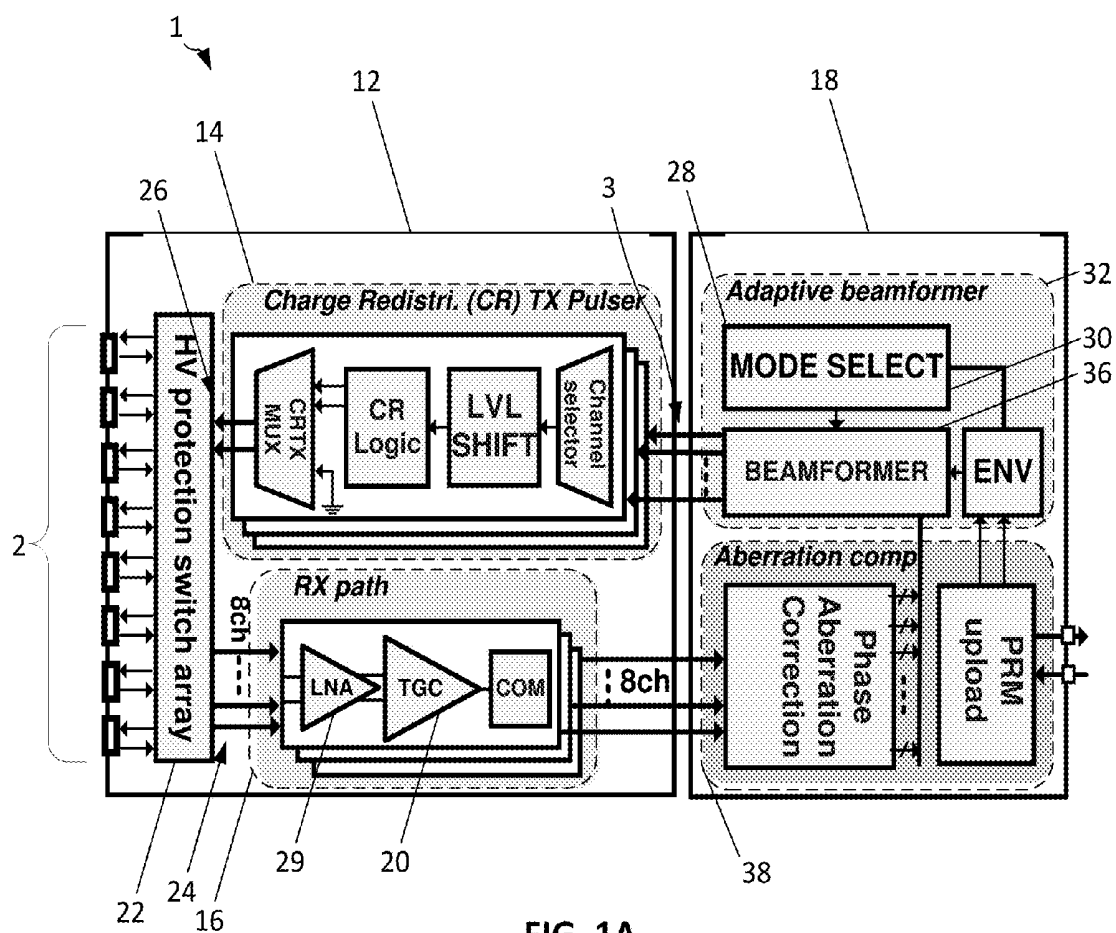


FIG. 1A

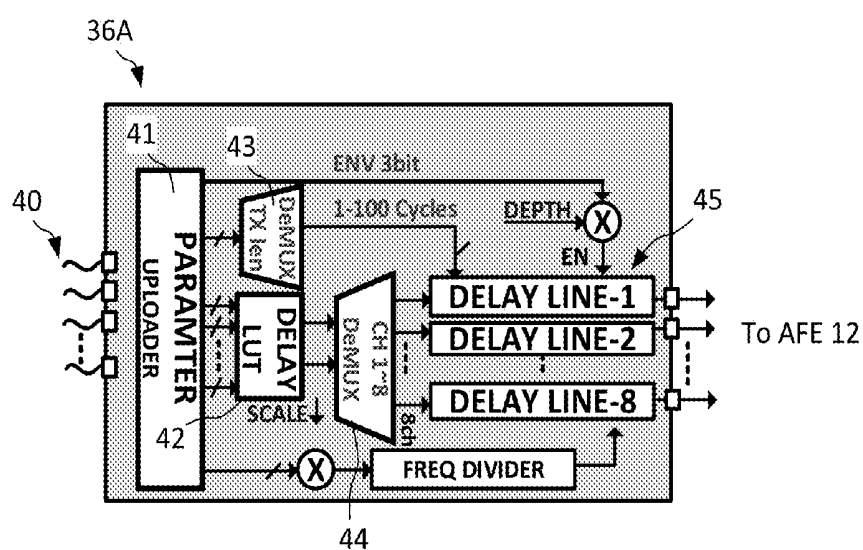


FIG. 1B

200

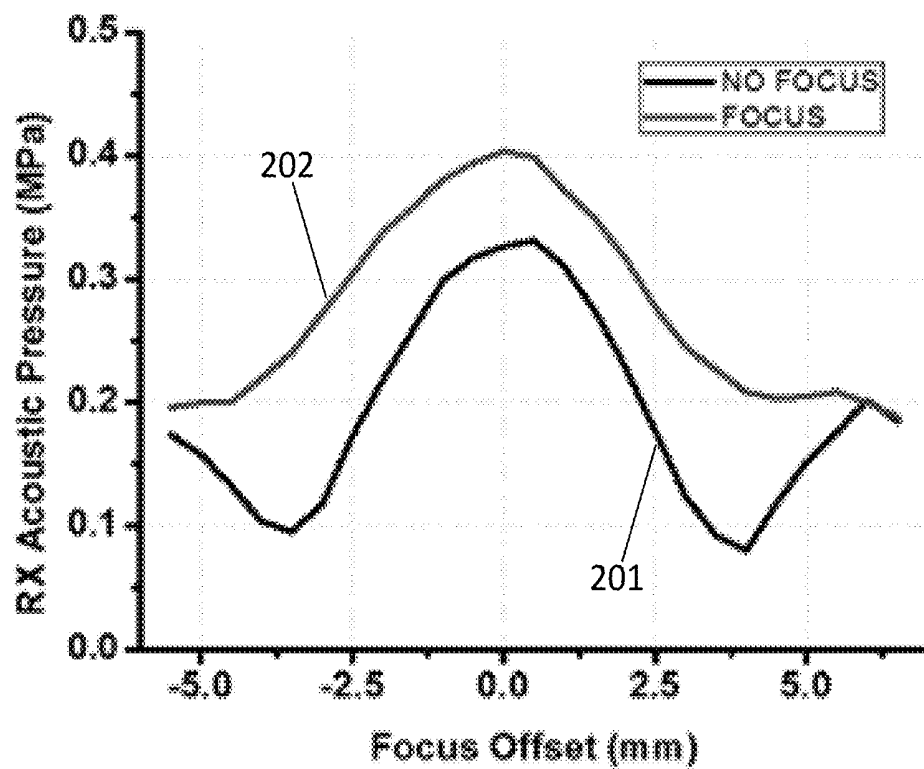


FIG. 2

	1	2	3	4	10
Transducer	CMUT	PMUT	PMUT	CMUT	PMUT
Application	Imaging	Rangefinder	Medical diagnosis	Imaging	diagnosis
Medium	biomed	air	biomed	biomed	adaptive (5 media)
Max. TX Frequency	10MHz	250MHz	40MHz	5.2MHz	100kHz-5MHz
Scan Depth	100mm	1m	100mm	x	100mm
TX Voltage	60V	32V	32V	30V	6V
Medium Adaptive	x	x	x	x	o
Scalability	o	x	x	x	o
Technology	1.5 μ m	0.18 μ m	0.13 μ m	0.18 μ m	65nm
# of Channels	32 x 32	10	7	4	8-scalable
Operation Freq.*	5MHz	220kHz	8MHz	3.3MHz	250kHz
LOAD/ch	2.5pF	10pF	17pF	40pF	500pF
Energy/Scan	72 μ J**	13 μ J	2.6 μ J	8.58 μ J**	2.34 μ J
* The frequency used to report the Energy/Scan					
** Estimated based on max. frame rate					

FIG. 3


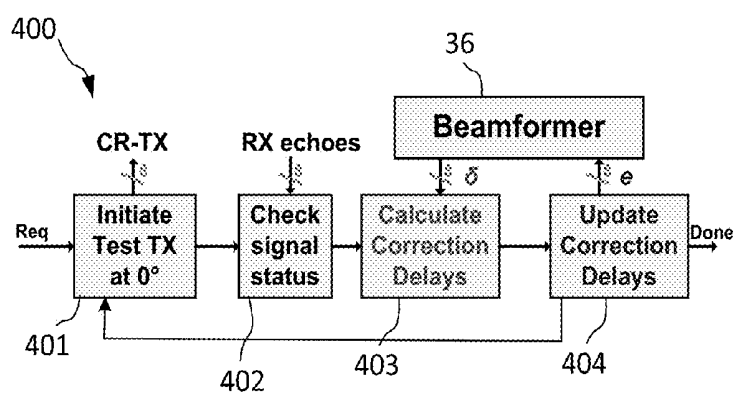


FIG. 4A

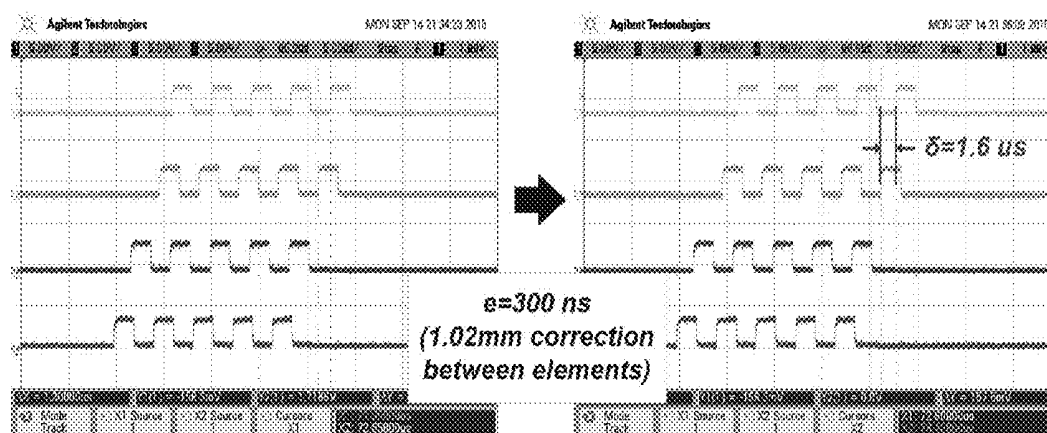

δ	Before	After	Error e [$\delta_{\text{After}} - \delta_{\text{Before}}$]	Compensated Distance
CH1/CH2	$1.3 \mu s$ ₄₁₀	$1.6 \mu s$ ₄₁₁	300 ns ₄₁₂	1.02 mm ₄₁₃
CH3/CH4	$1.7 \mu s$	$1.7 \mu s$	0	0 (No need for compen.)

FIG. 4B




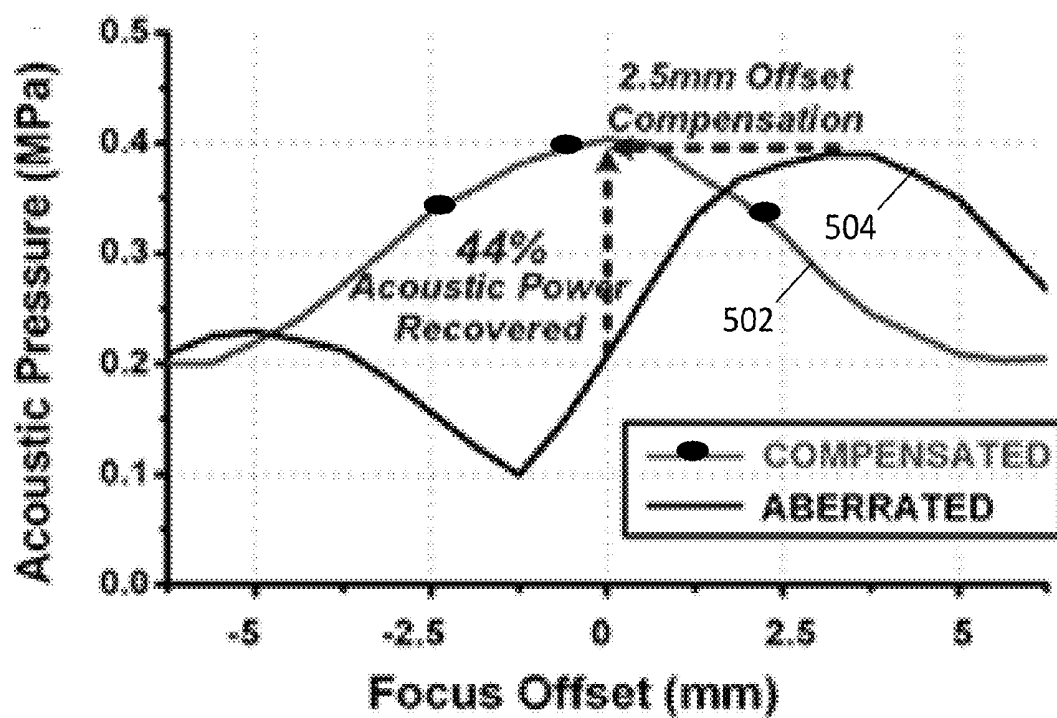



FIG. 5

(FIG. 6a) NO Voltage (FIG. 6c)

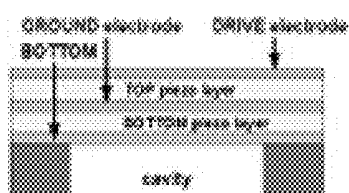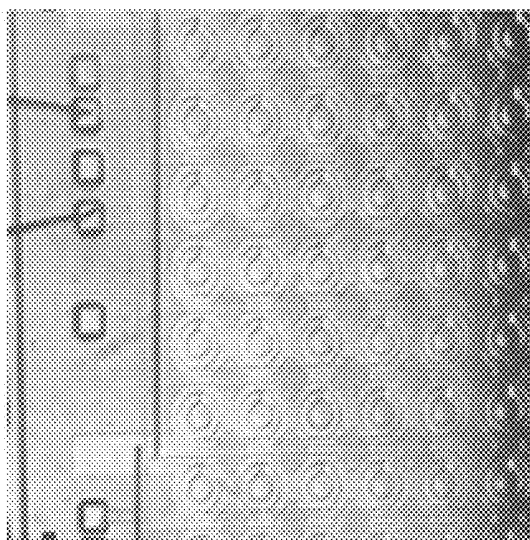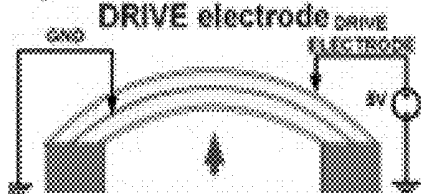

(FIG. 6b) 5V Applied to the DRIVE electrode



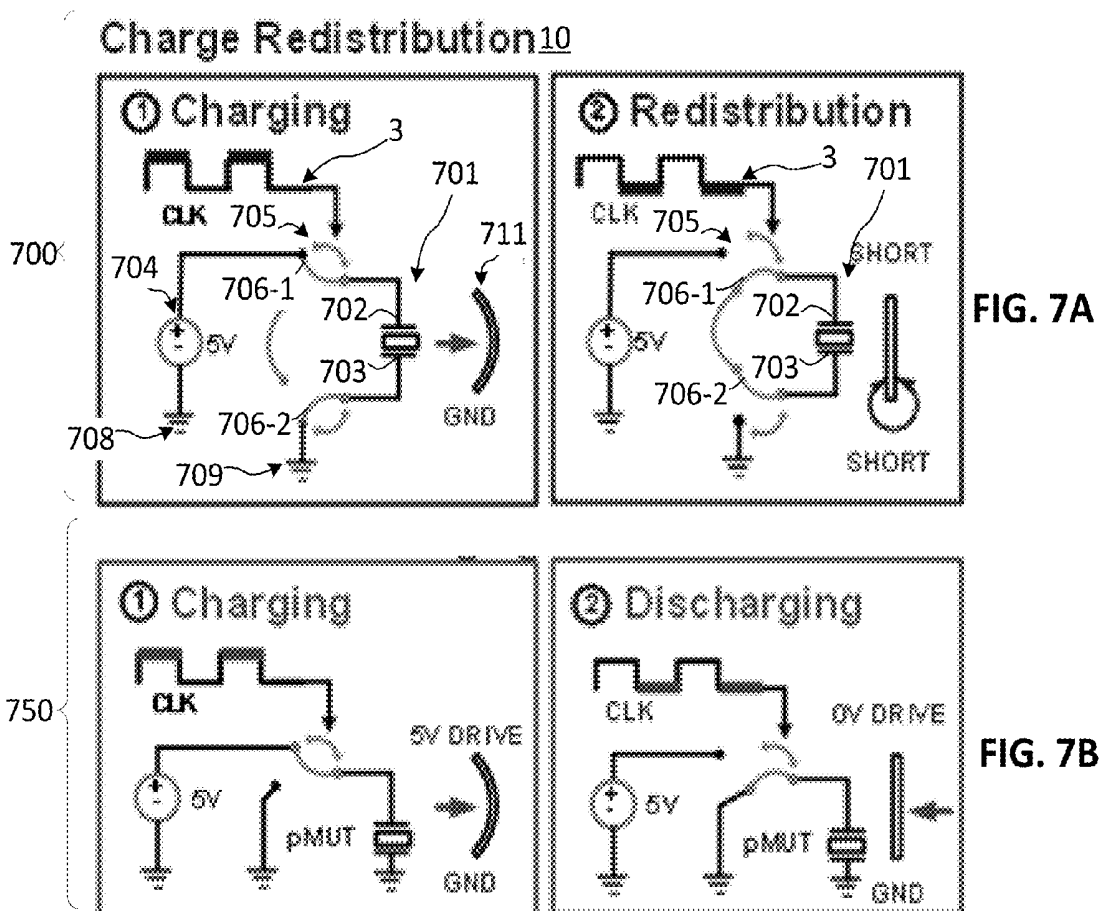

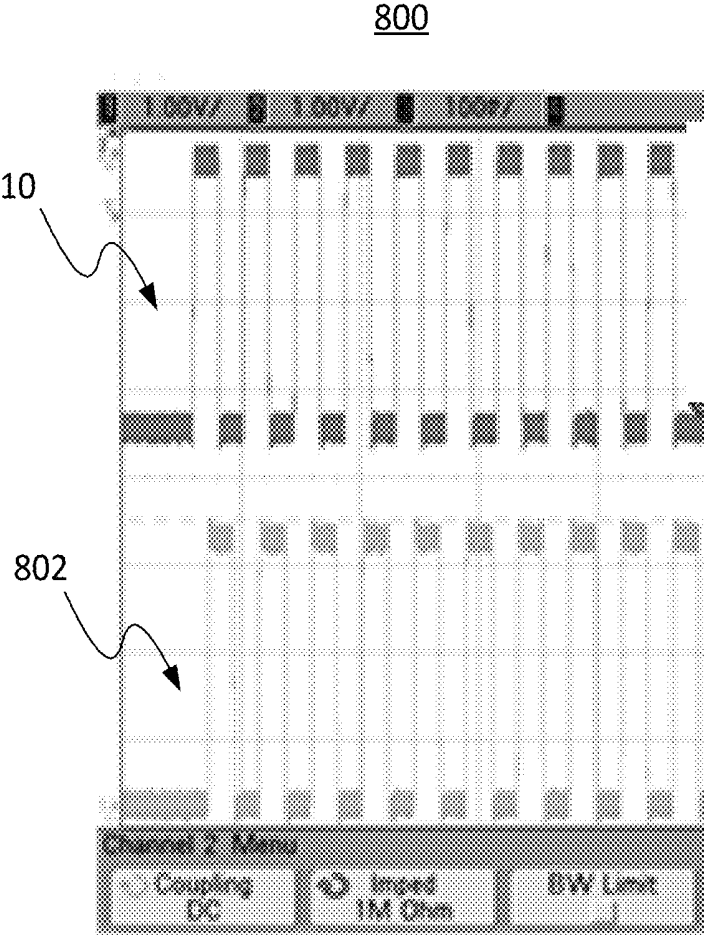


FIG. 8

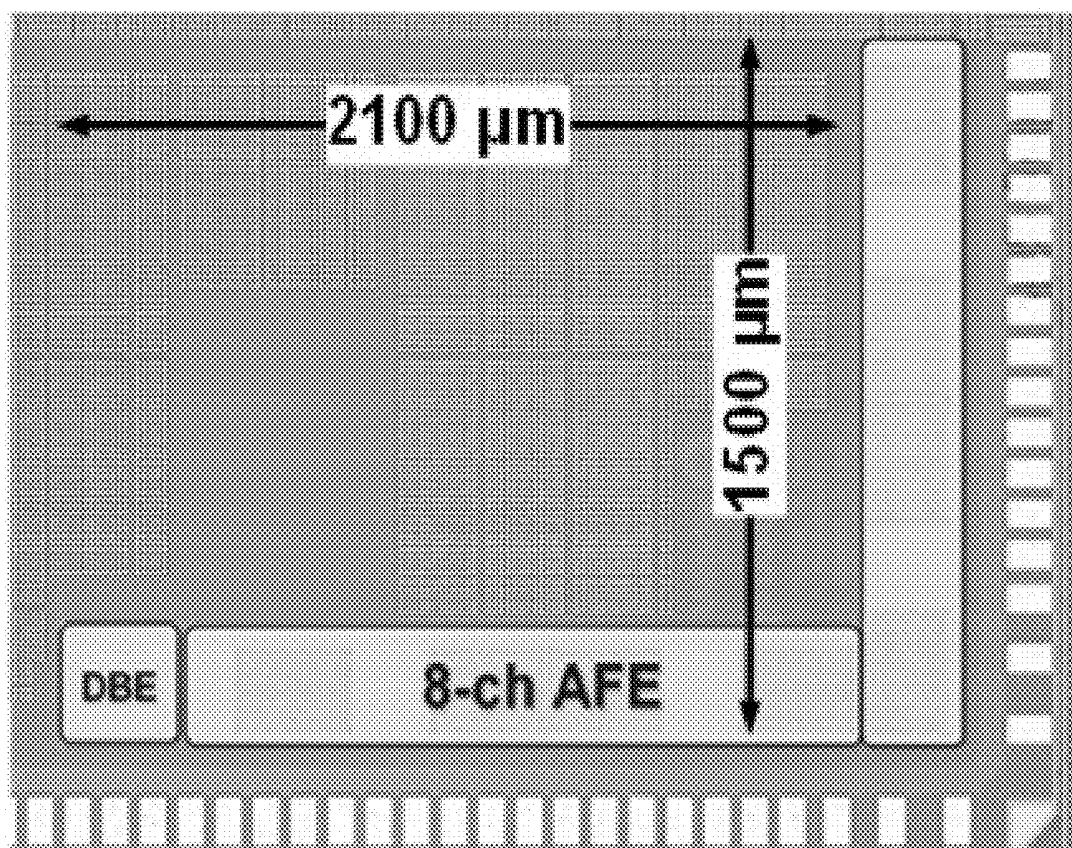


FIG. 9

**SYSTEMS AND METHOD FOR ACOUSTIC
POWER SCALABLE
CHARGE-REDISTRIBUTION ULTRASONIC
SYSTEM WITH ON-CHIP ABERRATION
COMPENSATION FOR PORTABLE
ULTRASONIC APPLICATIONS**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

[0001] The present non-provisional application claims the benefit of U.S. Provisional Patent Application Ser. No. 62/416,967 filed on Nov. 3, 2016, the entire content of which is hereby incorporated by reference.

TECHNICAL FIELD

[0002] The present disclosure generally relates to portable ultrasonic imaging devices, and more particularly, to acoustic power scalable charge-redistribution ultrasonic transducer interfaces with on-chip aberration compensation.

BACKGROUND INFORMATION

[0003] In portable Ultrasonic Imaging Systems (UIS), chip area reduction remains an important goal as transducer arrays can contain up to thousands of elements which each require a separate frontend. Long distance scans and high frequency (e.g., >5 MHz) imaging require high acoustic power by using large capacitance acoustic piezoelectric Micromachined Ultrasonic Transducers (pMUTs), using multi-element transmission channels, or applying High Voltage (HV) driving to the transducers. For biomedical imagers, the transmitter pulsar (TX) drivers may consume as much as 90% of total system power. As a result, reducing the TX power without a significant loss of acoustic pressure raises numerous non-trivial challenges.

[0004] UIS devices also require fast and effective beamformer capable of driving ultrasonic transducers in different media. For example, pMUT micromachining allows fabrication of μ -scale acoustic membranes where the physical matching of the channels plays a significant role. Mismatch in signal power, element spacing, and non-homogenous media can result in aberration and may deteriorate the image quality.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] These and other features and advantages will be better understood by reading the following detailed description, taken together with the drawings wherein:

[0006] FIG. 1A is a block diagram showing the architecture of one embodiment of a system consistent with the present disclosure.

[0007] FIG. 1B is a block diagram showing the architecture of a beamformer sequencer in accordance with an embodiment of the present disclosure.

[0008] FIG. 2 is a graph generally illustrating performance of a beamformer sequencer with adaptive focusing enabled in accordance with an embodiment of the present disclosure.

[0009] FIG. 3 is a table comparing characteristics of one embodiment of a system consistent with the present disclosure with four other systems/methods.

[0010] FIG. 4A shows an example process flow for an aberration compensation routine in accordance with an embodiment of the present disclosure.

[0011] FIG. 4B shows a timing diagram receive (RX) echo pulses for a transmit sequence after performing the aberration compensation routine of FIG. 4A using an aberration compensation circuit consistent with the present disclosure.

[0012] FIG. 5 generally illustrates acoustic wave distribution for an aberrated signal relative to a signal after compensating for aberrations by adjusting one or more pulse delays, in accordance with an embodiment of the present disclosure.

[0013] FIGS. 6A-6B generally illustrate a ultrasonic transducer structure and modes of operation.

[0014] FIG. 6C generally illustrates one embodiment of a micrograph of pMUT bimorph array suitable for use in the system of FIG. 1.

[0015] FIGS. 7A-7B generally illustrates one embodiment of a charging redistribution scheme consistent with the present disclosure versus a known charging scheme.

[0016] FIG. 8 generally illustrates one embodiment of the charge redistribution performance of the present disclosure compared with a known charging scheme while driving a 100 pF pMUT load.

[0017] FIG. 9 generally illustrates one embodiment of chip micrograph including a system consistent with the present disclosure.

DETAILED DESCRIPTION

[0018] The present disclosure is generally directed to an ultrasonic transducer interface system for use within 2-D ultrasonic imagers and includes an on-chip adaptive beamformer and Charge-Redistribution TX (CR-TX) circuits to provide a drive strength of up to 500 pF per channel at 5 MHz, or 10 nF at 250 kHz when driving a given channel with 4 CR-TX circuits, while reducing the TX drive power by at least 30% compared to other ultrasonic transducer TX drivers. The ultrasonic transducer interface system can be implemented in an application-specific integrated circuit (ASIC) using, for example, a complementary metal oxide semiconductor (CMOS) process.

[0019] Turning to the figures, FIG. 1A shows a block diagram generally illustrating one embodiment of an ultrasonic transducer interface system 1. The system 1 may be implemented as a single chip. For instance, the system 1 may be implemented as a complementary metal oxide semiconductor (CMOS) ASIC chip using known photolithography techniques. However, this disclosure is not necessarily limited in this regard and the system 1 may be implemented via multiple chips.

[0020] In an embodiment, the system 1 comprises a multi-channel analog front end (AFE) 12 and a digital back-end (DBE) 18. The AFE 12 includes a transmit (TX) path in the form of one or more charge redistribution transmit pulser (CR-TX) circuits, which will be discussed in greater detail below. The AFE 12 includes a receive (RX) path 16, with receive path 16 having a plurality of RX channel circuits. Each of the RX channel circuits include a low noise amplifier (LNA) 29, and a digitally controlled Time-Gain Compensation (TGC) amplifier 22. However, the components of the receive path 16 are application specific and are not intended to be limited to the embodiment shown in FIG. 1A.

[0021] As further shown, the AFE 12 further includes a plurality of ultrasonic transducer channels 2. As shown, the ultrasonic transducer channels may be implemented as a phased-array having from one to eight (1 to 8)-channels, with element separation of 250 μ m-5 mm (for 8-ch mode),

or 1.5 cm (for 4- or 2-ch mode). In other embodiments, the phased-array may have more than 8 channels, depending on a desired application. The phased-array may be formed as an M×N array of ultrasonic transducer elements (see FIG. 6C). Therefore, each of the ultrasonic transducer channels may comprise N number of elements in the phased-array. In this example, each row of the M×N array may form a single, independently-drivable ultrasonic transducer channel.

[0022] In any event, and in accordance with an embodiment, each of the ultrasonic transducer elements forming the phased-array may comprise, for example, Piezoelectric Micromachined Ultrasonic Transducers (pMUTs), Capacitive Micromachined Ultrasonic Transducers (cMUTs), bulk piezoelectric transducers, or any other ultrasonic transducer device capable of receiving an electrical signal and converting them same into mechanical energy, i.e., sound. However, it should be noted that embodiments herein may be equally applicable to other known ultrasonic transducer types, and this disclosure should not be construed as limited in this regard.

[0023] The AFE 12 may further include digitally controlled High Voltage (HV) switch array 22. The HV switch array 22 may be used to shield the Low Voltage (LV) RX path/bus 24 from HV TX path/bus 26. As discussed below, the HV switch array 22 may include a switching arrangement per TX pulser that reduce power consumption during TX sequences (see FIG. 7A).

[0024] Continuing on, the DBE 18 includes an adaptive beamformer 32 and an aberration compensation circuit 38. Note, while the DBE 18 and the beamformer 32 are shown as separate elements, this disclosure is not necessarily limited in this regard. For instance, the DBE 18 and the beamformer 32 may be formed as a single chip. The DBE 18 may also be referred to as a beamformer controller 18.

[0025] As discussed further below with reference to FIG. 1B, the adaptive beamformer 32 may be configured to dynamically focus and/or adjust beam direction during operation to accommodate varying types of mediums. In an embodiment, the DBE 18 supports a plurality of different medium types. For example, the DBE 18 may support five (5) different medium types such as air (343 m/s), rubber (926 m/s), alcohol (1143 m/s), water (1493 m/s) and bio-material (1533 m/s). The difference in acoustic speed in various media requires using different corresponding parameters and unit delays. The DBE 18 may therefore store parameters and unit delays associated with each supported medium type in a high-speed memory, e.g., lookup table (LUT) 42 of FIG. 1B. Therefore, the DBE 18 may adjust resolution relative to a selected medium in a dynamic, real-time manner, e.g., within 1-100 clock cycles.

[0026] The DBE 18 includes pulse-to-echo sequencer (P2E) 28 to transition between transmitting pulses and receiving corresponding echoes. The DBE 18 further includes Beam-Steering (BS) logic 34, which may be utilized for keeping the RX path 16 closed/disabled during, for instance, use in therapeutic applications whereby only the TX path 14 is utilized.

[0027] In an embodiment, the P2E sequencer 28 of the adaptive beamformer 32 is designed to scan the environment in front of the array of channels 2 with +30°/-30° field and depth from -2.5 to 10 cm using 1 TX driver per channel. The same medium can also be scanned with 2 or 4, or N number of TX drivers per channel if more acoustic power is needed, or the load is significantly large. By adjusting the number of

TX drivers (e.g., CR-TX pulser circuits 14) per channel (that operate simultaneously), the system 1 can drive a 100× larger load (500 pF) per channel than other known systems at the desired frequency with a full swing of output TX voltage.

[0028] During operation, the adaptive beamformer 32, and more specifically beamformer sequencer 36, may output one or more driving signals 3 based on a selected medium type. The one or more driving signals 3 may comprise pulse-width modulated (PWM) signals. Each of the CR-TX pulser circuits 14 may receive the driving signals 3 to cause one or more of the ultrasonic channels 2 to output ultrasonic sound energy.

[0029] In an embodiment, the AFE 12 may have an operational bandwidth from 100 kHz to 5 MHz, and a maximum gain of 60 dB to enable deep tissue scans (~100 mm) in high attenuation media, e.g., intracranial imaging. Note, the low cut off frequency of 100 kHz may be selected to target imaging application and corresponds to $\lambda/2=1.7$ mm in air.

[0030] FIG. 1B shows an example architecture of a beamformer sequencer 36A consistent with an embodiment of the present disclosure. The beamformer sequencer 36A may be suitable for use as the beamformer sequencer 36 of FIG. 1A.

[0031] As shown, the beamformer sequencer 36A includes a parameter uploader 41 includes input lines/terminals 40 to, for example, receive input signals (e.g., digital logic via a bus) for reprogramming purposes, e.g., to adjust/add medium parameters. The parameter uploader 41 may access a delay lookup table (LUT) 43, to retrieve parameters associated with a selected medium, e.g., the medium to be imaged such as bio-material. The LUT 43 may include a plurality of predefined pulse patterns, with each predefined pulse pattern being associated with a predefined medium type. Each predefined pulse pattern may include the number of pulses to emit during each transmit cycle, duration of each pulses, the number of channels to utilize, and channel delays for each channel.

[0032] Thus, the LUT 42 may be accessed and a lookup may be performed based on a selected media type. Once located, parameters including a predetermined pulse output pattern and TX delay length for each channel may be retrieved. The TX delay length 43 may then be used in combination with the predetermined pulse pattern to output digital driving signals, e.g., PWM signals, via delay lines 45.

[0033] FIG. 2 is a graph illustrating performance of an ultrasonic imaging system configured in accordance with aspects of the present disclosure. In particular, the graph includes a focus value offset value (in millimeters) relative to a focus of the phased-array, e.g., of ultrasonic transducer channels 2 along an X axis and a RX acoustic pressure (MPa) value along the Y axis. As shown, the plot 201 shows performance of the system 1 in an unfocused mode when imaging a tank consisting of mineral oil. Notably, mineral oil has similar acoustic properties to that of biomaterial. In the unfocused mode, the beamformer sequencer 36 does not introduce delays of the pulses passed to the AFE 12 by way of delay lines 45. Other approaches to ultrasonic imaging operate exclusively in an unfocused mode, with the beam-focusing and beam-steering being performed off-chip, i.e., within software.

[0034] In contrast, the present disclosure may feature beam focusing/forming performed on-chip, for all the array sizes and environment. The beamformer sequencer 36/36A

may utilize the aforementioned operational parameters associated with a selected medium to calculate a fractional delay for each ultrasonic transducer channel. In some cases, the beamformer sequencer **36/36A** has a time resolution of ~20 ns (which is equal to about 60 microns within water). Plot **202** illustrates performance when the fractional delays are introduced by the beamformer sequencer **36/36A** after the parameter uploader utilizes the delay LUT to lookup delay values associated with the target medium. As shown, plot **202** includes a peak RX acoustic pressure value at the center of the focus, i.e., focus offset 0.0, after introduction of such delays. The peak power of plot **202** is significantly larger (e.g., about 25%) than that of the corresponding peak RX acoustic value without introduction of delays.

[0035] For portable ultrasound imaging applications in various mediums, the reduction of the power together with a small area is of crucial. In accordance with an embodiment, the proposed TX path **14** only occupies 300×200 μm per channel, which leaves room for vertical integration of IC and ultrasonic transducer elements, where each IC channel corresponds to each ultrasonic transducer channel. For higher frequency scans, the resolution is typically higher, but at the cost of weaker acoustic power. To adapt to these various cases, the system **1** according to one embodiment of the present disclosure may adapt the number of TX drivers per load, depending on both medium attenuation and distance of scan. For example, the system **1** may achieve a drive strength of up to 500 pF per channel at 5 MHz when using a 1:1 relationship between TX driver and transducer channel, or 10 nF at 250 kHz when driving a given channel with TX drivers (e.g., in a 4:1 relationship). Note, in such cases a symmetrical drive signal may be supplied to N number of TX drivers to cause the same to simultaneously drive a given channel.

[0036] In an embodiment, the aberration compensation circuit **38** of the DBE **18** may correct phase inequalities related to the unsymmetrical array geometry of the ultrasonic transducer channels **2** and/or lack of uniformity in velocity distribution in a test volume.

[0037] An aberration compensation routine of the aberration compensation circuit **38** may be based on, at least in part, the scatter-independent nature of aberration, which means all aberration source can be approximated into the layer close to the surface of the ultrasonic transducer array **2**. Aberration compensation circuit **38** may track amplitude maximum of the incoming data and shift TX beamformer delay values accordingly. On the other hand, non-scattering aberration is frequency independent, which simplifies the algorithm, since it does not require spectral filtering. The RX signal on each element can be described as:

$$RX(\alpha, \omega) = s(\alpha; \omega) * f(\alpha; \omega) \quad \text{Equation (1)}$$

Where α is the array element (with the respect to the central point), ω is the phase of the phase of the signal. The f is the integral of the scatters, which can be derived from transmitted signal and transfer function of the media. The aberration correction unit has a transfer function can be represented as:

$$\text{cor}(\alpha, \omega) = A(\alpha) e^{i\omega T(\alpha)} \quad \text{Equation (2)}$$

[0038] Where $A(\alpha)$ is amplitude correction of each element, and τ is the fractional delay of each element and reflects the phase of transmitted signal.

[0039] FIG. **4A** shows one example process flow **400** for aberration compensation consistent with an embodiment of

the present disclosure. In operation **401**, a plurality of test TX signals are sent simultaneously at first instance in time ($T=0$) to each of the CR-TX pulser circuits to cause a plurality of ultrasonic TX signals to emit (e.g., without introducing delays, thus resulting in a 0 degree directionality for the emitted beam). Note, each of the plurality of ultrasonic TX signals may include N number of pulses.

[0040] In operation **402**, a plurality of RX echoes are received via the RX path **16**, for example. The RX signal for each ultrasonic transducer element can be described using Equation (1) discussed above. In theory, perfectly symmetrical array geometry (e.g., with uniform elements, and element spacing) and a uniform medium (e.g., having uniform velocity of sound throughout) would result in each of the plurality of RX echoes being received at the exact same instance of time, i.e., $T+1$. However, in reality there may always been some amount of expected variation between arrival times for each of the RX echoes. Differences exceeding a predefined threshold may be indicative of unsymmetrical ultrasonic channel configurations resulting from, for example, defects in manufacturing, component age, contaminates penetrating a device implementing the system **1** (e.g., dust and debris) and so on. Thus, the system **1** may select one or more ultrasonic transducer channels as a reference (CH_{ref}) and store an arrival time for a corresponding RX echo signal in a memory for reference and comparison (See FIG. **4B**). Likewise, arrival times of RX echo signals associated with other ultrasonic transducer channels may also be stored in the memory for reference purposes.

[0041] As shown in FIG. **4B**, the arrival time **410** of CH1 relative to $T=0$ is 1.3 microseconds. On the other hand, the arrival time **411** of CH2 was 1.6 microseconds relative to $T=0$. The delta between the arrival time **410** of CH1 and arrival time **411** of CH2 may then be stored in the memory as an error value (e) **412**. The error value **412** may then be used to determine a compensated distance **413**, with the compensated distance being based on the error value **412** and the speed of sound for the selected medium.

[0042] Returning to FIG. **4A**, and in operation **403**, one or more correction delays may be calculated based on the compensation distance calculated in operation **402**. For example, in the previous example of FIG. **4B**, CH2 a compensation distance of 1.02 mm was calculated. On the other hand, no compensation was required for CH4 as the arrival time of an associated RX echo signal relative to the arrival time of the RX echo signal was equal, and thus, resulting in an error value of 0.

[0043] In operation **404**, the beamformer sequencer **36** may then adjust/store a correction delay value for each channel with an associated RX echo signal arrival time that exceeds the predefined threshold. The beamformer sequencer **36** may then utilize the correction delay value associated with a given channel to minimize or otherwise reduce aberration resulting from a mismatch in a ultrasonic transducer channel and/or non-uniformity in a target medium. Operation **404** may include continuing to perform operations **401** to **404** until each ultrasonic transducer channels each have an associated RX echo signal arrival time within the predefined threshold value.

[0044] FIG. **5** generally illustrates measured spatial distribution of acoustic pressure in Y-plane generated by 4-ch bimorph pMUT array, and acquired by an ultrasonic transducer consistent with the present disclosure. During normal operation, the peak power should be measured at the focus

offset of 0.0 mm relative to the center of the focus of the ultrasonic transducer channels **2**. In the event of aberration, the peak power maybe be offset relative to the focus, e.g., as generally illustrated by plot **504**. The system **1**, and more specifically, the beamformer controller **18** or other suitable controller, may utilize this measured offset to initiate/trigger calibration in accordance with process flow **400** discussed above.

[0045] In a simulated error state, e.g., as represented by plot **504** in FIG. **5**, a pressure map was acquired at $z=15$ mm from the surface of a 4-ch pMUT array (see, e.g., FIG. **6C**). In this example simulation, channel pitch was 2.3 mm, and each pMUT channel included 180 membranes and a total capacitance of 1.5 nF. The aberrated plot **504** generally represents the measured acoustic pressure distribution at the RX shifted with respect to the intended center of the ultrasonic transducer array due to an incorrect delay introduced to one of the channels (error $e=+1$ μ s for CH1). In an uncompensated state as shown by plot **504**, 44% of acoustic power was lost in the test volume and a 2.5 mm offset occurs in the target focal point. This relates to significant loss of the power in the focusing point. After the compensation as generally depicted by plot **502**, it can be observed that the acoustic pressure is successfully recovered, and the resulting focused beam at the center of the array (offset=0 mm). As observed, compensation implemented by the aberration circuit **38** recovered 44% of power that would have otherwise been lost.

[0046] In high frame rate medical imagers, transmission sequences occur roughly 5 \times more frequently than in-air rangefinders due to different acoustic speed. Therefore, the total power required to support sufficient acoustic pressure may exceed more than 90% of total system power. The amount of power consumed during imaging is often impacted by the size of the ultrasonic array.

[0047] In accordance with an embodiment, a charge redistribution transmit (CR-TX) circuit is disclosed that includes a switching arrangement with a charging mode for driving an ultrasound transducer element with V_{TX} during a charging phase (or driving phase), e.g., based on a pulse-width modulated (PWM) signal, and a redistribution cycle whereby a portion of the charge used to drive the ultrasound transducer element during the driving phase is stored. Advantageously, the stored charge may then be used in combination with V_{TX} during subsequent charging phases, thus significantly reducing the amount of power drawn from the power supply. In some example cases, the amount of charge stored may equal up to 50% of V_{TX} , or greater. The resulting overall reduction in power consumption during TX sequences may be 30%, or more, relative to pulser circuits without the CR-TX approach disclosed herein.

[0048] By way of contrast, consider one known approach to a TX driving scheme **750** shown in FIG. **7B**. As shown, the ground/bottom electrode of the ultrasonic transducer is electrically coupled to ground, while the driving/top electrode oscillates between ground and driving voltage (or HV shaped pulse). During the charging phase, the ultrasonic transducer device is coupled directly to the power source resulting ΔV over the electrodes equal to V_{TX} . During the discharging phase, the driving electrode is electrically coupled to the system ground resulting in $\Delta V=0$. The potential over both electrodes of the ultrasonic transducer is thus equal to the system ground. As a result, each charge

gathered on the electrodes is discharged to ground. This results in a total power consumption equal to:

$$P_{TOTAL}=CV^2f \quad \text{Equation (3)}$$

[0049] The present disclosure has identified that the total power consumption for a TX circuit may be significantly reduced by utilizing a CR-TX circuit with a switching arrangement to store a portion of the charge gathered on the electrodes that would otherwise be dissipated/wasted. One such example of a CR-TX circuit **700** is shown in FIG. **7A**. In an embodiment, a CR-TX circuit consistent with embodiments disclosed herein reduces total power consumption by integrating an on-chip driver with power saving features as variously disclosed herein. In a general sense, a CR-TX circuit aims to re-use at least half of the charge at each driving cycle/phase by electrically decoupling the system ground from the array ground. For the simplicity, the following examples include a bimorph pMUT device represented as a capacitive load with large feedthrough resistance (above 500 k Ω). However, other ultrasonic transducer devices are within the scope of this disclosure.

[0050] In an embodiment, the CR-TX circuit **700** may be implemented in each of the CR-TX circuits **14** of FIG. **1**. As shown, The CR-TX circuit **700** includes a power supply **704**, a switching arrangement **705**, a ultrasonic transducer **701**, and an array ground **709**.

[0051] The power supply **704** may output a DC voltage, e.g., 5V, although other output voltages are within the scope of this disclosure. The power supply **704** may comprise one or more batteries, photovoltaic cells, or any combination thereof. The power supply **704** includes a first terminal coupled to system ground **708** and a second terminal coupled to a switching arrangement **705**.

[0052] The switching arrangement **705** may comprise a first switch **706-1** and a second switch **706-2**. The switching arrangement **705** may include circuitry (not shown for simplicity) for receiving the driving signal **3** from the DBE **18**. The signal **3** may comprise a pulse-width modulated (PWM) signal. The switching arrangement **705** may then actuate the first and second switches **706-1** and **706-2** to transition between a charging phase (or driving phase) and a redistribution phase based on the driving signal **3**. For example, rising edges of each pulse in the driving signal **3** may transition the switching arrangement **705** to a charging phase/mode for a period of time proportional to the width of the pulse. Likewise, the falling edges of each pulse in the signal **3** may then cause the switching arrangement **705** to transition/toggle into a redistribution phase/mode for a period of time proportional to the width of the pulse. The provided example was provided merely for illustration and not intended to be limiting.

[0053] As shown in FIG. **7A**, the first switch **706-1** of the switching arrangement **705** includes a first end electrically coupled to a driving/top electrode **702** of the ultrasonic transducer **701** and a second end switchably coupled to the power supply **704**. The switching arrangement **705** may further a second switch **706-2** with a first end electrically coupled to a ground/bottom electrode **703** of the ultrasonic transducer **701** and a second end switchably coupled to an array ground **709**.

[0054] In operation, the PWM driving signal **3** is received by the switching arrangement **705**. In response to the PWM signal **3** being high (e.g., ON at 5 v or other suitable voltage), the switching arrangement **705** transitions to the charging

phase/cycle by electrically coupling the ultrasonic transducer **701** to the power supply **704** and the array ground **709** to generate mechanical energy, e.g., sound **710**. During the driving phase, the driving electrode **702** may be charged to V_{TX} while the ground electrode **703** is electrically coupled to the array ground **709**, as generally shown in FIG. 7A.

[0055] On the other hand, in response to the PWM signal being low (e.g., OFF at 0V or other suitable voltage), switching arrangement **705** transitions to the redistribution phase/cycle by decoupling the driving electrode **702** and ground electrode **703** from the power supply **704** and array ground **709**, respectively. As a result, the driving electrode **702** and the ground electrode **703** may be floated momentarily and then electrically coupled with each other to electrically short the driving and ground electrodes **702**, **703** together. With an equal electrode size and negligible leakage, the charge redistributes quickly to result in the both electrodes close to but less than V_{TX} . For example, the charge may redistribute at $V_{TX}/2$ relative to the system ground **708**, although other charge levels may be achieved.

[0056] However, since the electrodes of the ultrasonic transducer **701** are shorted with each other, the voltage difference ΔV between the driving and ground electrodes **702**, **703** is equal to zero. No voltage over the piezoelectric layer results relaxation of the material and the membrane by itself return to its initial position due to structural resilience (e.g., as generally illustrated in FIG. 6A).

[0057] By way of analogy, a pressed spring will return to its original length when applied force is removed. The same holds true after the voltage difference ΔV of the driving and ground electrodes **702**, **703** drops to zero. The CR-TX circuit **700** of the present disclosure exploits this phenomenon. During the next charging cycle, each electrode charges in part based on the stored charge instead of charging up from ground to V_{TX} , e.g., via a full V_{TX} swing. In instances where the V_{TX} charge is $V_{TX}/2$, then half of the initial charge from the load capacitance is recycled/reused in the next charging cycle, and half the time is needed to charge a given transducer.

[0058] Note, the voltage difference ΔV between the driving and ground electrodes **702**, **703** is equal to V_{TX} . Thus, the total charge required to actuate the membrane in both of the driving scheme of FIGS. 7A and 7B is equal. However, the CR-TX **700** of the present disclosure reuses charges from a previous cycle while maintaining an acoustic performance similar to approaches without a charge reuse scheme. Note that the larger the load, the more power TX circuits will consume. In an embodiment, the total power dissipated for the CR-TX circuit **700** is given by:

$$P_{TOTAL} = \frac{1}{2} CV^2 f \quad \text{Equation (4)}$$

[0059] The measurement of one embodiment of a CR-TX **14** driving a 500 pF pMUT in 1 MHz frequency is presented in the FIG. 8. The graph **800** presents the voltage on both driving and ground electrodes and the relative voltage on a pMUT plates. In this example, the CR-TX **700** is capable of driving very large capacitors (500 pF at 5 MHz or 25 nF at 100 kHz). Reducing the total swing on each driving electrode from V_{TX} to approximately $V_{TX}/2$ (or less) which additionally results in faster charging.

[0060] In some embodiments, it may be advantageous for CR-TX **70** to electrically separate system ground **708** with the array ground **709**. For example, in the case of multi-channel operation, each element may have two separate

electrodes to provide sufficient phase delays. Standard silicon pMUT fabrication process, for example, utilize a bottom electrode as a common ground node and requires only a single driving electrode drive for each element. Bimorph pMUT electrodes, in contrast, include a ground electrode connected together and additional two driving electrodes that allow differential drive of the transducer. Aspects and embodiments disclosed herein are applicable to a wide range of ultrasonic transducers and the examples provided above are not intended to be limiting.

[0061] According to one embodiment, the TX path circuitry **14** (see FIG. 1) occupies 300×200 μm per channel and consumes only 1% of total charging power of 500 pF pMUT at 5 MHz. This power is dissipated in an electrode control logic comprising HV switches (e.g., as generally illustrated in FIG. 7 as switches **706-1** and **706-2**). The TX path circuitry **14** configured with a CR-TX scheme as variously disclosed herein produces a similar acoustic performance to that of other known driving schemes (e.g., scheme **750** of FIG. 7B), while total measured power reduction of 32.8% or greater is achieved.

[0062] FIG. 3 shows a table that generally compares the performance of the system **1** consistent with the present disclosure with four other systems (e.g., systems **1-4**) including ultrasonic transducers. At least one embodiment of a system **1** consistent with the present disclosure consumes 20% lower overall power (both TX and RX combined) than system **2**. The TX path circuitry **14** operates in 5× higher acoustic velocities as compared to system **2**, since the power performance was measured in mineral oil, not in air. Higher acoustic velocity translates to 10× more frequent TX pulses due to shorter time-of-flight (ToF), which additionally increases the dissipated power.

[0063] In an embodiment, an overall area for the system **1** having 8 channels may equal about 700×1490 μm including the power saving CR-TX circuits **14**, adaptive digital beamformer **32** with on chip aberration compensation **38**, and pulse to echo sequencer **28** with scalable channel numbers.

[0064] The system **1** may operate in wide, e.g., 100 kHz-5 MHz bandwidth, and may be capable of driving the phased array of load capacitances up to 500 pF/channel at 5 MHz, and 25 nF/channel at 100 kHz.

[0065] The CR-TX circuits **14** reduce the TX power by 30% when compared with 2-voltage system/method **3**, while showing the same acoustic performance on 4-ch bimorph pMUT transducer with 180 membranes/channel driven with unipolar 5V. The system **1** may have an overall power in pulse-to-echo mode at 250 kHz and 33% duty cycle driving a 8×500 pF pMUT array at 18.06 mW, where 3.66 mW is consumed by the chip and remaining 80% is delivered to the pMUT array in a power saving CR-TX mode. This translates to the system **1** having an overall energy efficiency of 2.34 $\mu\text{J}/\text{scan}$ for all eight (8) channels including the pMUT array, which is 10% more efficient than system/method **3**, while driving 33× larger load, with the same scan depth of 100 mm.

[0066] Turning now to FIG. 9, one embodiment of a chip consistent with the system **1** of the present disclosure fabricated in 65 nm 1P7M CMOS occupies an active area of 700×1490 μm .

[0067] Consistent with an aspect of the present disclosure a portable ultrasound system is disclosed. The portable ultrasound system comprising a power supply to output a driving voltage V_{TX} , at least one ultrasonic transducer, each

of the at least one ultrasonic transducers having a driving electrode and a ground electrode, and at least one charge redistribution transmit (CR-TX) circuit to receive a driving signal, the at least one transmit circuit comprising a switching arrangement including at least a first switch to transition between a driving phase and a redistribution phase based on the received driving signal and wherein the redistribution phase includes electrically decoupling the at least one ultrasonic transducer from the power supply via the first switch to float the driving electrode and ground electrode of the at least one ultrasonic transducer to cause the at least one ultrasonic transducer to retain a charge based on the first voltage V_{TX} .

[0068] In accordance with another aspect, a method for driving an ultrasonic transducer is disclosed. The method comprising coupling a driving electrode and a ground electrode of the ultrasonic transducer to a power supply and a ground, respectively, during a first period of time based on a received drive signal, and decoupling the driving electrode and the ground electrode of the ultrasonic transducer from the power supply and the ground, respectively, to float the driving electrode and the ground electrode of the ultrasonic transducer during a second period of time based on the received drive signal to store a charge between the driving electrode to the ground electrode.

[0069] In accordance with another aspect, an ultrasound imaging (UIS) system is disclosed. The UIS comprising at least a first and second ultrasound transducer channel, each of the first and second ultrasound transducer channels comprising an array of ultrasound transducers, at least a first and a second transmit (TX) driving circuit, a beamformer controller coupled to the plurality of transmit driving circuits, the beamformer controller to provide a first signal to cause each of the first and second TX driving circuits to electrically couple to the first ultrasound transducer channel and provide a symmetrical driving signal to the first ultrasound transducer channel.

[0070] While the principles of the invention have been described herein, it is to be understood by those skilled in the art that this description is made only by way of example and not as a limitation as to the scope of the invention. Other embodiments are contemplated within the scope of the present invention in addition to the exemplary embodiments shown and described herein. Modifications and substitutions by one of ordinary skill in the art are considered to be within the scope of the present invention, which is not to be limited except by the following claims.

What is claimed is:

1. A portable ultrasound system comprising:

a power supply to output a driving voltage V_{TX} ;

at least one ultrasonic transducer, each of the at least one ultrasonic transducers having a driving electrode and a ground electrode; and

at least one charge redistribution transmit (CR-TX) circuit to receive a driving signal, the at least one transmit circuit comprising:

a switching arrangement including at least a first switch to transition between a driving phase and a redistribution phase based on the received driving signal; and

wherein the redistribution phase includes electrically decoupling the at least one ultrasonic transducer from the power supply via the first switch to float the driving electrode and ground electrode of the at least

one ultrasonic transducer to cause the at least one ultrasonic transducer to retain a charge based on the driving voltage V_{TX} .

2. The portable ultrasound system of claim 1, wherein the driving phase includes using the retained charge of the at least one CR-TX circuit during a subsequent driving phase to reduce power consumed from the power supply.

3. The portable ultrasound system of claim 1, wherein the retained charge is equal to about $V_{TX}/2$.

4. The portable ultrasound system of claim 1, wherein the redistribution phase further includes electrically shorting the driving electrode and ground electrode of the at least one ultrasonic transducer together, and wherein the driving phase includes electrically coupling the at least one ultrasonic transducer to the power supply via the first switch to cause the at least one ultrasonic transducer to emit ultrasonic energy.

5. The portable ultrasound system of claim 1, wherein the switching arrangement of each of the at least one CR-TX circuits include a second switch, the second switch to switchably couple the ground electrode of the at least one ultrasonic transducer to an array ground during the driving phase, and to switchably couple the ground electrode to the driving electrode via the first switch during the redistribution phase.

6. The portable ultrasound system of claim 1, further comprising a system ground associated with each of the at least one CR-TX circuits and an array ground associated with the at least one ultrasonic transducer.

7. The portable ultrasound system of claim 1, wherein the at least one ultrasonic transducer comprises one of a Piezoelectric Micromachined Ultrasonic Transducer (PMUT), a Capacitive Micromachined ultrasonic transducer (CMUT), or a bulk piezoelectric transducer.

8. The portable ultrasound system of claim 1, wherein the driving signal comprises a pulse-width modulated (PWM) signal.

9. The portable ultrasound system of claim 1, wherein each of the at least one CR-TX circuits is configured to operate at 100 kHz to 5 MHz based on the received driving signal.

10. The portable ultrasound system of claim 1, wherein each of the at least one CR-TX circuits is configured generate a drive strength of 500 pF at a rate of 5 MHz based on the received driving signal.

11. The portable ultrasound system of claim 1, wherein each of the at least one CR-TX circuits is implemented on a same complementary metal oxide semiconductor (CMOS) chip.

12. The portable ultrasound system of claim 1, wherein the power supply comprises at least one of a battery and/or photovoltaic cells.

13. A method for driving an ultrasonic transducer comprising:

coupling a driving electrode and a ground electrode of the ultrasonic transducer to a power supply and a ground, respectively, during a first period of time based on a received drive signal; and

decoupling the driving electrode and the ground electrode of the ultrasonic transducer from the power supply and the ground, respectively, to float the driving electrode and the ground electrode of the ultrasonic transducer during a second period of time based on the received

drive signal to store a charge between the driving electrode to the ground electrode.

14. The method of claim **13**, further comprising shorting the driving electrode and the ground electrode of the ultrasonic transducer subsequent to floating the driving and ground electrode.

15. The method of claim **13**, wherein the power supply outputs a first voltage V_{TX} , and wherein the stored charge is equal to or greater than $V_{TX}/4$.

16. An ultrasound imaging system (UIS) comprising:
a memory having a plurality of predefined pulse patterns for driving ultrasound transducers, each of the predefined pulse patterns being associated with a target medium;

a beamformer controller for providing at least one signal to drive a multi-channel transmit (TX) pulser, the beamformer controller configured to:

select a predefined pulse pattern from the plurality of pulse patterns stored in the memory; and

output the selected predefined pulse pattern via a plurality of output delay lines.

17. The UIS of claim **16**, wherein the memory is implemented as a lookup table (LUT).

18. The UIS of claim **16**, the target medium comprising at least one of air, rubber, alcohol, water, and/or bio-material.

19. The UIS of claim **16**, wherein the beamformer controller is further configured to:

output a first and second test signal via first and second delay lines of the plurality of output delay lines, respectively, at a first instance in time (T_0);

receive a first test signal echo corresponding with the first test signal after a first period of time relative to T_0 ;

receive a second test signal echo corresponding with the second test signal after a second period of time relative to T_0 ; and

in response to a difference between the first period of time and the second period of time exceeding a predefined threshold, adjusting a correction delay parameter associated with the first delay line in the memory.

20. An ultrasound imaging (UIS) system, the ultrasound imaging system comprising:

at least a first and second ultrasound transducer channel, each of the first and second ultrasound transducer channels comprising an array of ultrasound transducers;

at least a first and a second transmit (TX) driving circuit; and

a beamformer controller coupled to the plurality of transmit driving circuits, the beamformer controller to provide a first signal to cause each of the first and second TX driving circuits to electrically couple to the first ultrasound transducer channel and provide a symmetrical driving signal to the first ultrasound transducer channel.

21. A complementary metal-oxide semiconductor (CMOS) application-specific integrated circuit (ASIC) implementing the UIS system of claim **20**.

* * * * *

专利名称(译)	用于便携式超声波应用的具有片上像差补偿的声功率可扩展电荷再分配超声系统的系统和方法		
公开(公告)号	US20180116632A1	公开(公告)日	2018-05-03
申请号	US15/802772	申请日	2017-11-03
[标]申请(专利权)人(译)	哈利法科学技术研究大学		
[标]发明人	YOO JERALD TILLAK JUDYTA B		
发明人	YOO, JERALD TILLAK, JUDYTA B.		
IPC分类号	A61B8/14 B06B1/02 A61B8/00 G01N29/24 G01N29/44		
CPC分类号	A61B8/145 B06B1/0215 A61B8/4427 A61B8/56 A61B8/4494 G01N29/2406 G01N29/4463 G01N29/2437 B06B1/0292 B06B1/0607 A61B8/4488 A61B8/58 G01N29/0654 G01N29/34 G01S7/52047 G01S7/52049 G01S7/5208 G01S15/8915		
优先权	62/416967 2016-11-03 US		
外部链接	Espacenet USPTO		

摘要(译)

本公开一般涉及用于便携式2-D超声成像器的超声换能器接口系统，并且包括片上自适应波束形成器和电荷再分配TX (CR-TX) 以提供高达500pF / 的驱动强度。通道频率为5 MHz (或10 nF，250 kHz)，与其他超声波换能器TX驱动器相比，TX驱动功率降低至少30%。超声换能器接口系统可以通过例如互补金属氧化物半导体 (CMOS) 工艺在单个芯片中实现。

