



US009081084B2

(12) **United States Patent**
Kim

(10) **Patent No.:** **US 9,081,084 B2**
(45) **Date of Patent:** **Jul. 14, 2015**

(54) **ULTRASOUND SYSTEM AND METHOD FOR
PROCESSING BEAM-FORMING BASED ON
SAMPLING DATA**

(75) Inventor: **Min Woo Kim**, Seoul (KR)

(73) Assignee: **SAMSUNG MEDISON CO., LTD.**,
Kangwon-do (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 193 days.

(21) Appl. No.: **13/327,243**

(22) Filed: **Dec. 15, 2011**

(65) **Prior Publication Data**

US 2012/0157847 A1 Jun. 21, 2012

(30) **Foreign Application Priority Data**

Dec. 17, 2010 (KR) 10-2010-0129665

(51) **Int. Cl.**
A61B 8/00 (2006.01)
G01S 7/52 (2006.01)
G10K 11/34 (2006.01)
G01S 15/89 (2006.01)

(52) **U.S. Cl.**
CPC **G01S 7/52046** (2013.01); **G01S 7/52034**
(2013.01); **G01S 15/8915** (2013.01); **G10K**
11/341 (2013.01)

(58) **Field of Classification Search**
CPC G06T 2207/30004; G06T 2207/10132;
G10K 11/346; G10K 11/341; G01S 7/52095;
G01S 7/52046; G01S 7/52034; G01S 15/8915
USPC 600/437-463
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,088,295 A * 7/2000 Altes 367/103
6,592,523 B2 * 7/2003 Avinash et al. 600/443
2007/0038106 A1 2/2007 Kim et al.

FOREIGN PATENT DOCUMENTS

EP 2 101 191 A2 9/2009
JP 2003-061956 A 3/2003
JP 2009-000361 A 1/2009
KR 10-2007-0014099 A 1/2007
KR 10-2008-0015082 A 2/2008
WO WO 2006/113445 A1 10/2006
WO 2009/026534 A1 2/2009

OTHER PUBLICATIONS

Korean Office Action issued in Korean Application No. 10-2010-0129665 issued on Jun. 19, 2012.

Korean Office Action issued in Korean Patent Application No. KR 10-2010-0129665 dated Jan. 23, 2013.

(Continued)

Primary Examiner — Elmer Chao

(74) Attorney, Agent, or Firm — McDermott Will & Emery LLP

(57) **ABSTRACT**

Embodiments of performing beam forming processing based on sampling data in an ultrasound system are disclosed. The ultrasound system includes an ultrasound data acquisition unit configured to form a receive signal based on an ultrasound signal reflected from a target object, perform an analog-to-digital conversion on the receive signal to form sampling data, select pixels, which the respective sampling data are used as pixel values thereof among the plurality of pixels, cumulatively assign the corresponding sampling data to the selected pixels and perform beam forming upon the cumulatively assigned sampling data for the respective pixels to form receive-focused data.

8 Claims, 8 Drawing Sheets

S _{1,1}	S _{2,1}	S _{3,1}	S _{4,1}	S _{5,1}	S _{6,1}	S _{7,1}	S _{8,1}	S _{9,1}	S _{10,1}	S _{11,1}	...	S _{p,1}
1	1	1	1	1	1	1	1	1	1	1	...	1
S _{1,8}	S _{2,8}	S _{3,8}	S _{4,8}	S _{5,8}	S _{6,8}	S _{7,8}	S _{8,8}	S _{9,8}	S _{10,8}	S _{11,8}	...	S _{p,8}
S _{1,5}	S _{2,5}	S _{3,5}	S _{4,5}	S _{5,5}	S _{6,5}	S _{7,5}	S _{8,5}	S _{9,5}	S _{10,5}	S _{11,5}	...	S _{p,5}
S _{1,4}	S _{2,4}	S _{3,4}	S _{4,4}	S _{5,4}	S _{6,4}	S _{7,4}	S _{8,4}	S _{9,4}	S _{10,4}	S _{11,4}	...	S _{p,4}
S _{1,3}	S _{2,3}	S _{3,3}	S _{4,3}	S _{5,3}	S _{6,3}	S _{7,3}	S _{8,3}	S _{9,3}	S _{10,3}	S _{11,3}	...	S _{p,3}
S _{1,2}	S _{2,2}	S _{3,2}	S _{4,2}	S _{5,2}	S _{6,2}	S _{7,2}	S _{8,2}	S _{9,2}	S _{10,2}	S _{11,2}	...	S _{p,2}
S _{1,1}	S _{2,1}	S _{3,1}	S _{4,1}	S _{5,1}	S _{6,1}	S _{7,1}	S _{8,1}	S _{9,1}	S _{10,1}	S _{11,1}	...	S _{p,1}
CH ₁	CH ₂	CH ₃	CH ₄	CH ₅	CH ₆	CH ₇	CH ₈	CH ₉	CH ₁₀	CH ₁₁	...	CH ₂

P _{1,1}	P _{1,2}	P _{1,3}	P _{1,4}	P _{1,5}	P _{1,6}	P _{1,7}	P _{1,8}	P _{1,9}	...	P _{1,N}
P _{2,1}	P _{2,2}	P _{2,3}	P _{2,4}	P _{2,5}	P _{2,6}	P _{2,7}	P _{2,8}	P _{2,9}	...	P _{2,N}
P _{3,1}	P _{3,2}	P _{3,3}	P _{3,4}	P _{3,5}	P _{3,6}	P _{3,7}	P _{3,8}	P _{3,9}	...	P _{3,N}
P _{4,1}	P _{4,2}	P _{4,3}	P _{4,4}	P _{4,5}	P _{4,6}	P _{4,7}	P _{4,8}	P _{4,9}	...	P _{4,N}
P _{5,1}	P _{5,2}	P _{5,3}	P _{5,4}	P _{5,5}	P _{5,6}	P _{5,7}	P _{5,8}	P _{5,9}	...	P _{5,N}
P _{6,1}	P _{6,2}	P _{6,3}	P _{6,4}	P _{6,5}	P _{6,6}	P _{6,7}	P _{6,8}	P _{6,9}	...	P _{6,N}
P _{7,1}	P _{7,2}	P _{7,3}	P _{7,4}	P _{7,5}	P _{7,6}	P _{7,7}	P _{7,8}	P _{7,9}	...	P _{7,N}
...	...	...	...	...	...	...	...	...	...	...
P _{M,1}	P _{M,2}	P _{M,3}	P _{M,4}	P _{M,5}	P _{M,6}	P _{M,7}	P _{M,8}	P _{M,9}	...	P _{M,N}

(56)

References Cited

Fritsch et al., "Beamforming with a reduced sampling rate", Ultrasonics, vol. 40, (2002), pp. 599-604.

OTHER PUBLICATIONS

Extended European Search Report issued in European Application No. 11193761.1 dated Oct. 14, 2013.

* cited by examiner

FIG. 1

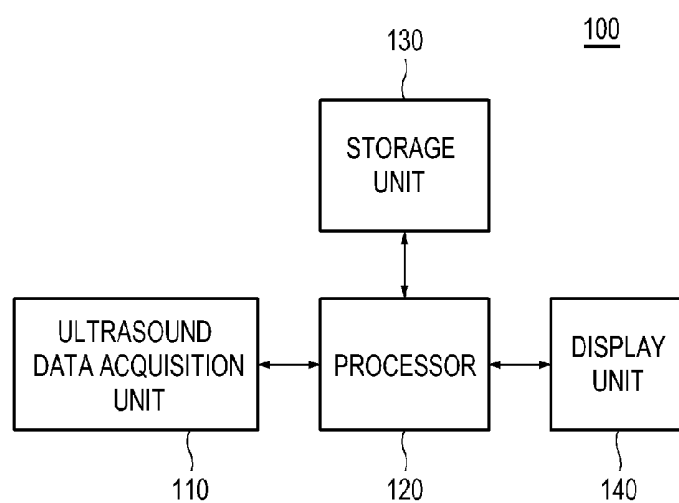


FIG. 2

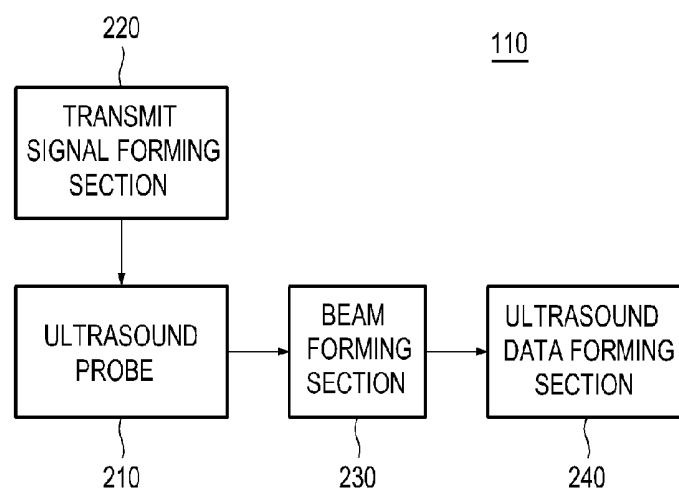


FIG. 3

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
:	:	:	:	:	:	:	:	:	:	:	:	:
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
:	:	:	:	:	:	:	:	:	:	:
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

UI

FIG. 4

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

CV_{6,3}

UI

FIG. 5

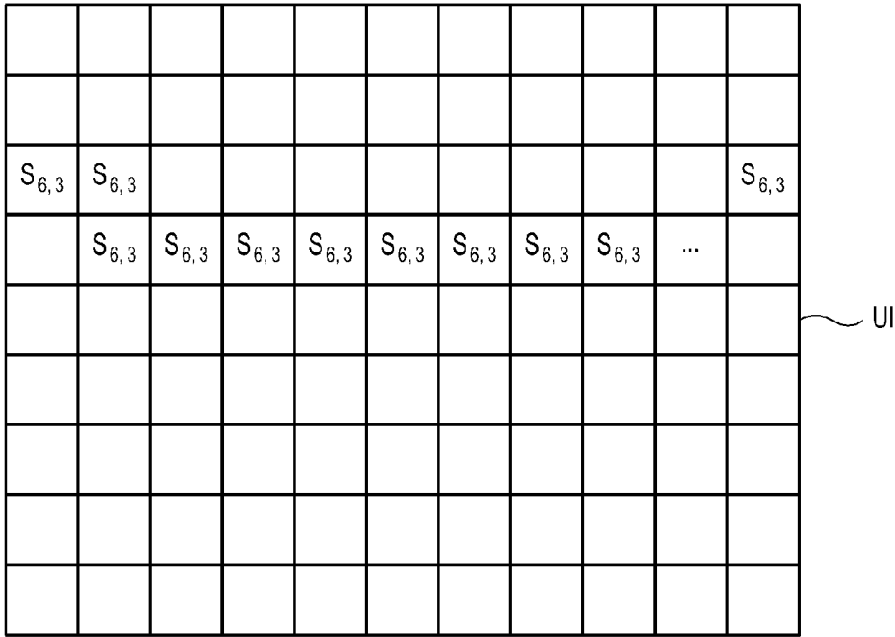


FIG. 6

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

CV_{6,4}

UI

FIG. 7

$S_{6,4}$										
$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$									$S_{6,3}$ $S_{6,4}$
	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$ $S_{6,4}$	...	
			$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$		

UI

FIG. 8

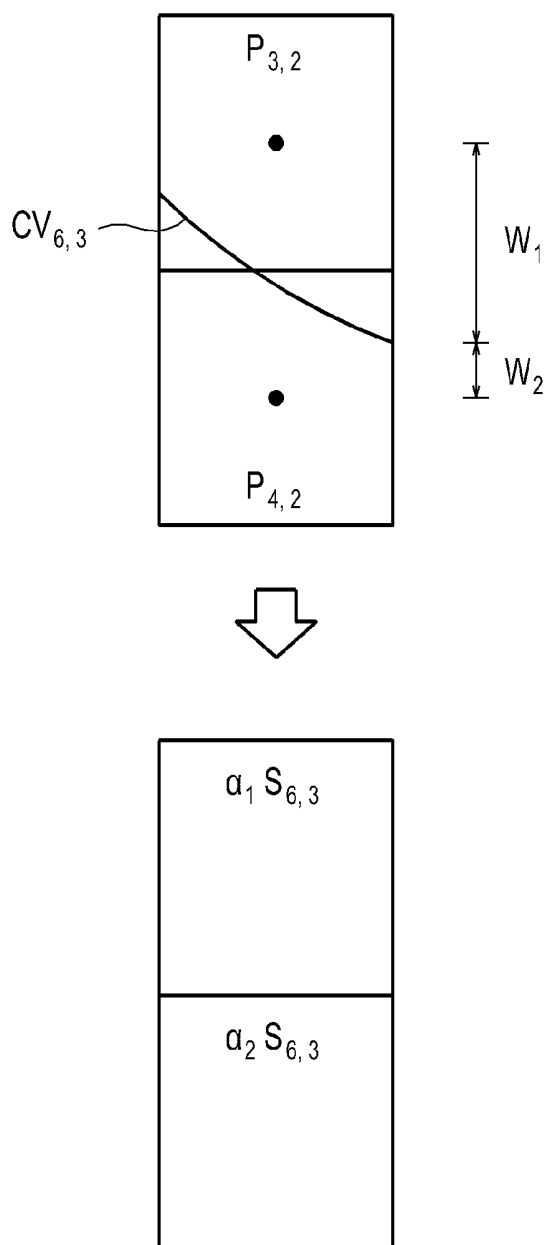


FIG. 9

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
:	:	:	:	:	:	:	:	:	:	:	:	:
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
:	:	:	:	:	:	:	:	:	:	:
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

UI

1

ULTRASOUND SYSTEM AND METHOD FOR PROCESSING BEAM-FORMING BASED ON SAMPLING DATA

CROSS-REFERENCE TO RELATED APPLICATION

The present application claims priority from Korean Patent Application No. 10-2010-0129665 filed on Dec. 17, 2010, the entire subject matter of which is incorporated herein by reference.

TECHNICAL FIELD

The present invention generally relates to ultrasound systems, and more particularly to a beam forming processing based on sampling data in an ultrasound system.

BACKGROUND

An ultrasound system has become an important and popular diagnostic tool since it has a wide range of applications. Specifically, due to its non-invasive and non-destructive nature, the ultrasound system has been extensively used in the medical profession. Modern high-performance ultrasound systems and techniques are commonly used to produce two or three-dimensional images of internal features of an object (e.g., human organs).

The ultrasound system is configured to transmit an ultrasound signal to a target object and receive an ultrasound signal reflected from the target object (i.e., ultrasound echo signal) to thereby form a receive signal. The ultrasound system is further configured to perform an analog-to-digital conversion upon the receive signal to form sampling data and perform beam forming processing upon the sampling data to thereby form receive-focused data. The ultrasound system is further configured to form an ultrasound image by using the receive-focused data.

As the processing speed of a central processing unit (CPU) becomes faster, the software beam forming processing, which is performed in CPU, has been adopted. Currently, a pixel-oriented beam forming technique, which is a popular technique among the software beam forming techniques, is implemented by extracting sampling data corresponding to a path length for the respective transducers for pixels of an ultrasound image to be formed and performing beam forming processing (i.e., summing) upon the extracted sampling data. This pixel-oriented beam forming technique is characterized by a low amount of computation and easy implementation. However, in such a technique, there is a problem since a noise pattern caused by the pixel-oriented beam forming technique may affect the resolution of an ultrasound image.

SUMMARY

Embodiments of performing a beam forming processing based on sampling data in an ultrasound system are disclosed. The ultrasound system includes an ultrasound data acquisition unit configured to form a receive signal based on an ultrasound signal reflected from a target object, perform an analog-to-digital conversion on the receive signal to form sampling data, select pixels, which the respective sampling data are used as pixel values thereof among the plurality of pixels, cumulatively assign the corresponding sampling data to the selected pixels and perform beam forming upon the cumulatively assigned sampling data for the respective pixels to form receive-focused data.

2

In another embodiment, a method of forming an ultrasound image having a plurality of pixels, comprises: a) transmitting an ultrasound signal to a target object and receiving an ultrasound echo signal reflected from the target object to form a receive signal by using an ultrasound probe having a plurality of transducer elements; b) performing an analog-to-digital conversion on the receive signal to form sampling data; c) selecting pixels, which the respective sampling data are used as pixel values thereof among the plurality of pixels, and cumulatively assigning the corresponding sampling data to the selected pixels; and d) performing beam forming upon the cumulatively assigned sampling data for the respective pixels to form receive-focused data.

The Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing an illustrative embodiment of an ultrasound system.

FIG. 2 is a block diagram showing an illustrative embodiment of an ultrasound data acquisition unit.

FIG. 3 is an exemplary diagram showing sampling data and pixels of an ultrasound image.

FIGS. 4 to 7 are diagrams showing an example of performing sampling data-oriented beam forming processing in accordance with a first embodiment of the present invention.

FIG. 8 is an exemplary diagram showing an example of setting weights in accordance with a second embodiment of the present invention.

FIG. 9 is an exemplary diagram showing an example of setting a sampling data set in accordance with a third embodiment of the present invention.

DETAILED DESCRIPTION

Hereinafter, embodiments of the present invention will be described by referring to the accompanying drawings.

FIG. 1 is a block diagram showing an illustrative embodiment of an ultrasound system. Referring to FIG. 1, the ultrasound system 100 includes an ultrasound data acquisition unit 110, a processor 120, a storage unit 130 and a display unit 140.

The ultrasound data acquisition unit 110 is configured to transmit an ultrasound signal to a target object and receive an ultrasound signal reflected from the target object (i.e., ultrasound echo signal) to thereby acquire ultrasound data.

FIG. 2 is a block diagram showing an illustrative embodiment of the ultrasound data acquisition unit 110. Referring to FIG. 2, the ultrasound data acquisition unit 100 may include an ultrasound probe 210, a transmit signal forming section 220, a beam forming section 230 and an ultrasound data forming section 240.

The ultrasound probe 210 includes a plurality of transducer elements, which are configured to perform reciprocal conversion between an electrical signal and an ultrasound signal. The ultrasound probe 210 is configured to transmit an ultrasound beam along each of multiple scan lines and receive an ultrasound echo signal from the target object to thereby form a receive signal. In one embodiment, the receive signal may be an analog signal. The ultrasound probe 210 includes at least one of a convex probe, a linear probe and the like.

The transmit signal forming section **220** is configured to control transmission of the ultrasound signal. Also, the transmit signal forming section **220** is configured to generate transmit signals to obtain an ultrasound image by considering the transducers and focal points. If the transmit signals are provided from the transmit signal forming section **220**, then the ultrasound probe **210** may be operable to convert the transmit signal into an ultrasound signal, which is propagated into the target object, and receive an ultrasound echo signal to thereby form a receive signal.

The beam forming section **230** is configured to perform analog-to-digital conversion upon the receive signal, which is provided from the ultrasound probe **210**, to form sampling data. Also, the beam forming section **230** is further configured to perform software beam forming upon the sampling data in consideration of the transducer elements and focal points to form receive-focusing data according to one embodiment of the present invention.

According to a first embodiment of the present invention, the beam forming section **230** is configured to perform analog-to-digital conversion upon the receive signals, which are provided through a plurality of channels CH_k , wherein $1 \leq k \leq N$, from the ultrasound probe **210** to form sampling data $S_{i,j}$, wherein i and j are a positive integer. The sampling data $S_{i,j}$ may be stored in the storage unit **130**. The beam forming section **230** may determine positions of a plurality of pixels of an ultrasound image to be formed. The beam forming section **230** is configured to select pixels, which the respective sampling data are used as pixel data thereof, based on locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements. That is, the beam forming section **230** is configured to select the pixels, which the respective sampling data are used as pixel data thereof, during the beam forming processing, based on the locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements. The beam forming section **230** may be configured to assign sampling data corresponding to the selected pixels as pixel data in a cumulative manner.

In one embodiment, the beam forming section **230** is configured to set a curve $CV_{6,3}$ to select pixels, which the sample data $S_{6,3}$ are used as pixel data thereof, during the beam forming processing (hereinafter, referred to as "beam forming curve") based on the locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements, as shown in FIG. 4. The beam forming section **230** is configured to select pixels $P_{3,1}, P_{3,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ on which the beam forming curve $CV_{6,3}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI, wherein $1 \leq a \leq M, 1 \leq b \leq N$. The beam forming section **230** is configured to assign the sampling data $S_{6,3}$ to the selected pixels $P_{3,1}, P_{3,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$, as shown in FIG. 5. Thereafter, the beam forming section **230** is configured to set a beam forming curve $CV_{6,4}$ to select pixels, which the sample data $S_{6,4}$ are used as pixel data thereof during the beam forming processing, based on the locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements, as shown in FIG. 6. The beam forming section **230** is configured to select pixels $P_{2,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{5,4}, P_{5,5}, P_{5,6}, P_{5,7}, P_{5,8}, P_{4,9}, P_{5,9}, \dots, P_{3,N}$ on which the beam forming curve $CV_{6,4}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI. As shown in FIG. 7, the sampling data $S_{6,4}$ are assigned to the pixels $P_{2,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{5,4}, P_{5,5}, P_{5,6}, P_{5,7}, P_{5,8}, P_{4,9}, P_{5,9}, \dots, P_{3,N}$. In this way, the respective sampling data, which are used as the pixel data, are cumulatively assigned to the pixels as pixel data.

The beam forming section **230** is configured to perform beam forming processing (i.e., summing) upon the cumulatively assigned sampling data to the respective pixels $P_{a,b}$ of the ultrasound image UI to thereby form receive-focused data.

In a second embodiment of the present invention, the beam forming section **230** is configured to perform analog-to-digital conversion upon the receive signals, which are provided through a plurality of channels CH_k , wherein $1 \leq k \leq N$, from the ultrasound probe **210** to form sampling data $S_{i,j}$, wherein i and j are positive integer. The sampling data $S_{i,j}$ may be stored in the storage unit **130**. The beam forming section **230** may determine locations of a plurality of pixels of an ultrasound image to be formed. The beam forming section **230** is configured to select pixels, which the respective sampling data are used as pixel data thereof, based on locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements. That is, the beam forming section **230** is configured to detect the pixels, which the respective sampling data are used as pixel data thereof, during the beam forming process, based on the locations of the transducer elements and orientations of the respective pixels with respect to the transducer elements. The beam forming section **230** may assign sampling data corresponding to the detected pixels as pixel data in a cumulative manner. The beam forming section is further configured to determine pixels existing in the same column among the selected pixels and set weights corresponding to the respective determined pixels. The beam forming section is further configured to apply the weights to the respective pixels.

In one embodiment, the beam forming section **230** is configured to set a curve $CV_{6,3}$ to select pixels, which the sample data $S_{6,3}$ are used as pixel data thereof during the beam forming processing (hereinafter, referred to as "beam forming curve"), based on the locations of the transducer elements and orientations of the respective pixels of the ultrasound image with respect to the transducer elements, as shown in FIG. 4. The beam forming section **230** is configured to select pixels $P_{3,1}, P_{3,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ on which the beam forming curve $CV_{6,3}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI, wherein $1 \leq a \leq M, 1 \leq b \leq N$. The beam forming section **230** is configured to assign the sampling data $S_{6,3}$ to the selected pixels $P_{3,1}, P_{3,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$, as shown in FIG. 5. The beam forming section **230** is configured to determine pixels $P_{3,2}$ and $P_{4,2}$, which exist in the same column among the selected pixels $P_{3,1}, P_{3,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$. As illustrated in FIG. 8, the beam forming section **230** is configured to compute distances W_1 and W_2 from a center of each of the pixels $P_{3,2}$ and $P_{4,2}$, which exist in the same column, to the beam forming curve $CV_{6,3}$ and set a first weight α_1 corresponding to the pixel $P_{3,2}$ based on the distance W_1 and a second weight α_2 corresponding to the pixel $P_{4,2}$ based on the distance W_2 . The first and second weights α_1 and α_2 may be set to be in proportion to or in inverse proportion to the computed distances. The beam forming section **230** is configured to apply the first weight α_1 to the sampling data $S_{6,3}$ assigned to the pixel $P_{3,2}$ and to apply the second weight α_2 to the sampling data $S_{6,3}$ assigned to the pixel $P_{4,2}$. The beam forming section **230** is configured to perform the above process upon the remaining sampling data.

The beam forming section **230** is configured to perform beam forming processing (i.e., summing) upon the cumulatively assigned sampling data to the respective pixels $P_{a,b}$ of the ultrasound image UI to thereby form receive-focused data.

5

According to a third embodiment of the present invention, the beam forming section **230** is configured to perform analog-to-digital conversion upon the receive signals, which are provided through a plurality of channels CH_k , wherein $1 \leq k \leq N$, from the ultrasound probe **210** to form sampling data $S_{i,j}$, wherein i and j are positive integer. The sampling data $S_{i,j}$ may be stored in the storage unit **130**. The beam forming section **230** is configured to set a sampling data set to select pixels using sampling data $S_{i,j}$ during a beam forming process.

In one embodiment, the beam forming section **230** is configured to set a sampling data set of $S_{1,1}, S_{1,4}, \dots, S_{1,n}, S_{2,1}, S_{2,4}, \dots, S_{2,n}, \dots, S_{p,1}, \dots, S_{p,n}$ (denoted by a box) to select pixels, which the sampling data $S_{i,j}$ are used as pixel data thereof during the beam forming process, as shown in FIG. 9.

The beam forming section **230** is configured to select pixels, which the respective sample data of the sampling data set are used as pixel data thereof during the beam forming processing, based on the locations of the transducer elements and orientations of the respective pixels of the ultrasound image with respect to the transducer elements. The beam forming section **230** is further configured to cumulatively assign the sampling data to the selected pixels in the same manner with the first embodiment or the second embodiment. The beam forming section **230** is further configured to perform beam forming processing upon the sampling data, which are cumulatively assigned to each of the pixels of the ultrasound image, to thereby form receive-focused data.

According to a fourth embodiment, the beam forming section **230** is configured to perform down sampling upon the receive signal, which is provided through a plurality of channels from the probe **210**, to form down-sampled sampling data. As described above, the beam forming section **230** is configured to select the pixels corresponding to the respective sampling data. That is, the beam forming section **230** is configured to select the pixels, which the respective sampling data are used as the pixel values thereof during the beam forming processing, based on the locations of the transducers and the orientations of the pixels of the ultrasound image with respect to the ultrasound probe. The beam forming section **230** is further configured to cumulatively assign the respective sampling data to the selected pixels in the same manner of the first embodiment or the second embodiment. The beam forming section **230** is further configured to perform beam forming processing upon the sampling data, which are cumulatively assigned to the respective pixels, to form receive-focused data.

The ultrasound data forming section **240** is configured to form ultrasound data corresponding to the ultrasound image by using the receive-focused data, which are provided from the beam forming section **230**. The ultrasound data may be radio frequency data, however, it may be not limited thereto. Also, the ultrasound data forming section **240** is further configured to perform a variety of data processing (e.g., gain adjustment, etc.), which is necessary for forming the ultrasound data, upon the receive-focused data.

Referring back to FIG. 1, the processor **120** is coupled to the ultrasound data acquisition unit **110**. The processor **120** may include a central processing unit, a microprocessor, a graphic processing unit and the like.

The storage unit **130** is configured to store the sampling data formed in the ultrasound data acquisition unit **110**. Also, the storage unit **130** is further configured to store the ultrasound data acquired in the ultrasound data acquisition unit **110**.

6

The display unit **140** is configured to display the ultrasound image formed in the processor **120**. The display unit **140** may include a liquid crystal display, an organic light emitting diodes and the like.

Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, numerous variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. An ultrasound system for forming an ultrasound image, comprising:

an ultrasound data acquisition unit including a plurality of transducer elements and configured to:

form a receive signal based on an ultrasound signal reflected from a target object,

perform analog-to-digital conversion on the receive signal to form sampling data,

set a beam forming curve to select pixels, among a plurality of pixels, that correspond to a portion of the sampling data, based on locations of respective ones of the transducer elements and orientations of respective ones of regions of the target object, corresponding to pixels with respect to the transducer elements during beam forming, select pixels on which the beam forming curve passes, assign the corresponding portion of the sampling data to the selected pixels,

apply weights to the assigned sampling data, and perform the beam forming upon the assigned sampling data for respective ones of the plurality of pixels to form receive-focused data.

2. The ultrasound system of claim 1, wherein the ultrasound data acquisition unit includes:

a transmit signal forming section configured to form transmit signals to acquire the ultrasound image; and

an ultrasound probe including the plurality of transducer elements and operable to transmit an ultrasound signal to the target object in response to the transmit signals and output the receive signal in response to an ultrasound echo signal reflected from the target object.

3. The ultrasound system of claim 2, wherein the ultrasound data acquisition unit is further configured to set a sampling data set to select the pixels such that the corresponding portion of the sampling data are used as the pixel values of the selected pixels, among the sampling data during the beam forming.

4. The ultrasound system of claim 2, wherein the ultrasound data acquisition unit is further configured to perform down sampling upon the receive signal to form down-sampled sampling data.

5. The ultrasound system of claim 2, wherein the ultrasound data acquisition unit is further configured to:

determine pixels existing in a same column among the selected pixels,

set weights corresponding to the respective determined pixels, and

apply the weights to the sampling data assigned to the corresponding pixels.

6. The ultrasound system of claim 5, wherein the ultrasound data acquisition unit is further configured to compute

7

distances between centers of the determined pixels and the beam forming curve, and apply the weights based on the computed distances.

7. The ultrasound system of claim 6, wherein the weights are set in proportion to or in inverse proportion to the computed distances. 5

8. An ultrasound system for forming an ultrasound image, comprising:

an ultrasound data acquisition unit including a plurality of transducer elements and configured to:

form a first receive signal based on an ultrasound signal reflected from a first set of regions, among a plurality of regions of a target object, 10

perform analog-to-digital conversion on the first receive signal to form first sampling data corresponding to a particular one of the plurality of transducer elements, 15

form a second receive signal based on an ultrasound signal reflected from a second set of regions, among the plurality of regions of the target object,

perform analog-to-digital conversion on the second receive signal to form second sampling data corresponding to the particular transducer element, 20

set a first beam forming curve on a plurality of pixels that correspond to the plurality of regions, such that the first

8

beam forming curve passes on pixels, among the plurality of pixels, that correspond to the first set of regions, select a first set of pixels on which the first beam forming curve passes,

assign the first sampling data to the first set of pixels as pixel values of the first set of pixels,

set a second beam forming curve on the plurality of pixels that correspond to the plurality of regions, such that the second beam forming curve passes on pixels, among the plurality of pixels, that correspond to the second set of regions,

select a second set of pixels on which the second beam forming curve passes,

assign the second sampling data to the second set of pixels as pixel values of the first set of pixels,

apply weights to the first sampling data and the second sampling data, and

perform beam forming upon the assigned first sampling data and the assigned second sampling data for the first set of pixels and the second set of pixels, respectively, to form receive-focused data.

* * * * *

专利名称(译)	超声系统和基于采样数据处理波束形成的方法		
公开(公告)号	US9081084	公开(公告)日	2015-07-14
申请号	US13/327243	申请日	2011-12-15
[标]申请(专利权)人(译)	三星麦迪森株式会社		
申请(专利权)人(译)	三星MEDISON CO. , LTD.		
当前申请(专利权)人(译)	三星MEDISON CO. , LTD.		
[标]发明人	KIM MIN WOO		
发明人	KIM, MIN WOO		
IPC分类号	A61B8/00 G10K11/34 G01S7/52 G01S15/89		
CPC分类号	G01S7/52046 G01S7/52034 G01S15/8915 G10K11/341		
代理机构(译)	MCDERMOTT WILL & EMERY LLP		
优先权	1020100129665 2010-12-17 KR		
其他公开文献	US20120157847A1		
外部链接	Espacenet USPTO		

摘要(译)

公开了基于超声系统中的采样数据执行波束形成处理的实施例。超声系统包括：超声数据获取单元，被配置为基于从目标对象反射的超声信号形成接收信号，对接收信号执行模数转换以形成采样数据，选择像素，相应的采样在多个像素中，将数据用作其像素值，将相应的采样数据累积地分配给所选择的像素，并对各个像素的累积分配的采样数据执行波束形成，以形成接收聚焦数据。

