

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number
WO 02/061880 A2

- (51) International Patent Classification⁷: **H01Q 9/30**, A61N 5/04
- (21) International Application Number: PCT/IB02/00299
- (22) International Filing Date: 31 January 2002 (31.01.2002)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
PI2001A000006 31 January 2001 (31.01.2001) IT
- (71) Applicant (for all designated States except US): **CNR CONSIGLIO NAZIONALE DELLE RICERCHE** [IT/IT]; Piazzale Aldo Moro, 7, I-00185 Roma (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LONGO, Iginio** [IT/IT]; Largo Duca D'Aosta, 11, I-56123 Pisa (IT).
- (74) Agent: **CELESTINO, Marco**; Viale Giovanni Pisano, 31, I-56123 Pisa (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 02/061880 A2

(54) Title: INTERSTITIAL MICROWAVE ANTENNA WITH MINIATURIZED CHOKE FOR HYPERTHERMIA IN MEDICINE AND SURGERY

(57) **Abstract:** The present invention relates to minimally invasive surgery techniques. It provides a method for manufacturing an antenna for percutaneous acute hyperthermia microwave applications of the monopole or dipole co-axial type provided with trap, commonly called choke, for blocking the propagation of the backwards reflecting wave towards the generator. The miniaturisation of the device allows a use minimally invasive for interstitial hyperthermia in medicine and surgery, in particular for oncology. The method of manufacturing the antenna provides a metal needle (1) for the introduction of the antenna (2, 3, 4) in the target tissue. On the external conductor (4) of the antenna (2) a metal collar (6) is connected in a predetermined position; a plastics sheath (5) is applied in order to cover the external conductor (2) in the portion between the feed (7) and the collar (6); the inner wall of the metal needle (1) wherein the antenna is inserted is then used for containing and guiding the collar (6) and the sheath (5); in particular, the collar (6) being in electrical contact with the inner wall of the metal needle (1). An antenna is thus obtained with choke of variable length and with miniaturized diameter. A thermocouple can be introduced through the choke that protrudes the directly in the "feed" zone. (Figure 3)

- 1 -

TITLE

INTERSTITIAL MICROWAVE ANTENNA WITH MINIATURIZED CHOKES FOR
HYPERTERMIA IN MEDICINE AND SURGERY

DESCRIPTION

5 Field of the invention

The present invention relates to minimally invasive surgery techniques, for interstitial, percutaneous, laparoscopic, endoscopic and intrasurgery applications in medicine and surgery, especially in oncology.

10 More precisely, it relates to a microwave antenna, for hyperthermia, operating from 37C up to over 100C, of the monopole or dipole co-axial type equipped with "trap", commonly called choke, for blocking the propagation of the reflecting wave that turns back towards the generator.

15 Furthermore the invention relates to a method of construction of such an antenna.

Description of the prior art

Hyperthermia in oncology is method used for over 30 years for treatment of cancer (Hahn GM, Hyperthermia and 20 Cancer, Plenum Press, in the York, 1982). It consists in heating the cancer cells to obtain their necrosis directly or with additional use of other methods such as radiotherapy, chemotherapy or other surgery techniques.

For heating tissues, in particular for treatment of 25 surface lesions, firstly electromagnetic waves have been used produced by a source located out of the human body.

More recently thin appliances have been used among which microwave antennas, operating between some hundreds of MHz and some thousands of MHz, typically at 2450 MHz, 30 executed in co-axial tube, for interstitial, percutaneous, laparoscopic, endoscopic and intrasurgery applications, suitable to the local treatment of deep lesions (Iskander MF & Tumeh AM, Design Optimization of Interstitial Antennas, IEEE Transactions on Biomedical Engineering, 35 1989, 238-246).

- 2 -

Such antennas are usually inserted in the lesion to treat using catheters or metal needles, under echographic guide, TAC, NMR or other computerised imaging techniques. They are suitable to be used in association with drugs,
5 ionizing waves and/or with surgery ablation.

These microwave antennas, normally, are manufactured using a flexible or semi-rigid co-axial tube, suitably modified at one end, for conveying microwave power into the tissues to cause hyperthermia.

10 In Figure 1 an axial cross section is shown of an antenna inserted in a biopsy needle 1. The antenna, in its active portion at the right of the drawing, is suitably configured as radiating dipole or monopole. More precisely, 2 is the external conductor of the co-axial tube, 3 is the dielectric layer that insulates the external conductor from the central conductor 4. The point indicated with 7 is the feeding point, i.e. the active portion of the antenna, commonly called "feed", where the emitted power, normally, is maximum.

20 The isothermal surfaces that can be obtained by heating a biological tissue (not crossed by large blood vessels) with a normal antenna, that for example is made by cutting at an end a portion of the external conductor 2 of the co-axial tube and leaving dielectric layer 3 uncovered, as described in Figure 1, have a rotationally symmetric configuration. Their projection on the plane of the figure is elliptical, with a central maximum of transmission, as above said, near feeding point 7 of the antenna, where the distal portion of the external
25 conductor 2 of the co-axial tube is cut. The surface of dotted projection 8 indicates an isothermal surface of the tissue that is being radiated by this type of antenna in a purely theoretical case.

Actually, the impedance of the antenna is never
35 perfectly adapted with that of the medium in which it

- 3 -

operates, owing to the variation of the dielectric characteristics of the medium same when heating, and for other reasons connected with the guided propagation of an electromagnetic wave. During the delivery of microwave power there is always an backward wave that returns along the external conductor of the antenna, from the active end towards the generator, causing an backward elongation of the heating figure. The dashed curve 9 indicates the projection of an backwardly elongated isothermal surface corresponding to this effect. This drawback prevents from suitably concentrating the heat production near the active portion of the antenna and is a big limit to the use of this technique.

Per overcome this drawback normally the antenna is equipped with a device, called choke, or trap, often used in radio-broadcasting antennas (see for example Reintjes JF & Coate GT, Principles of Radar, McGraw-Hill Book Company, in the York 1952, p 851) that blocks the backwards propagation of the reflected power.

This device, indicated with 11 in figure 2, consists in a co-axial guiding portion, $\lambda/4$ long, being λ the wavelength of the emitted waves, obtained by arranging at an end the external conductor of the co-axial tube of the antenna, near the feed 7, a short circuit metal tube 12. In Figure 2, 1 is the needle guide of the antenna, 2 is the external conductor of the antenna, 3 is the insulating material and 4 is the central conductor.

In this case the backwards reflecting wave, indicated with 13, runs the external surface of the antenna, enters choke 11, reflects itself at its end in a short circuit and, after a total path of $\lambda/2$ is again at the entrance of the choke but in phase opposition with respect to that at inlet, with a result of a null intensity. The isothermal surface that is obtained when

- 4 -

the antenna is equipped with choke 11 is indicated by the continuous curve 10 of Figure 2.

Actually, as it can be seen, the introduction of the choke 11 causes a substantial increase of the diameter of 5 the antenna, and then of needle 1, thus limiting its applications when a minimum invasive operation is required, such as for example in out-patient's departments, in the repeated treatments, etc..

For manufacturing reasons, and because of the 10 resistance limits of the material, the radial dimension of the choke cannot be reduced under certain limits.

Furthermore, in case of change of the dielectric characteristics of the medium caused by the variation of the temperature during the treatment, or in case of 15 variation of the frequency of the antenna, as when a microwave generator with adjustable frequency, the choke cannot be lengthened or shortened, in order to be always about a fourth of the wavelength long. The impedance of the existing chokes is therefore fixed, whereby the 20 elimination of the returning wave can not be totally effective when the operating temperature is changed.

An application of hyperthermia is, furthermore normally associated to a measure of the local temperature. In fact, it is necessary for measure the heating 25 temperature of the cancer lesions, or other lesions to treat, to preserve the adjacent healthy tissues and for controlling the actual heating power of the antenna.

Usually, in the operation region a sensor of temperature is inserted (indicated with 20 in figure 2) 30 For example, metal thermocouples are used. However, they cannot be introduced during the delivery of energy by the antenna, owing to eddy currents in the metal of thermocouple, that overheats thus affecting the measure. Furthermore the presence of a thermocouple changes the 35 distribution of the microwave field, changing the heating

- 5 -

cannot be introduced during the delivery of energy by the antenna, owing to eddy currents in the metal of thermocouple, that overheats thus affecting the measure. Furthermore the presence of a thermocouple changes the distribution of the microwave field, changing the heating pattern. Therefore, the temperature measure with a metal thermocouple must be done with the drawback of stopping often the delivery of energy. Alternatively, optical-fibre sensors are known to have no metal and are not affected by the field or do not perturbate it, but have the drawback of being expensive and fragile. In both cases of metal thermocouples or optical-fibre sensors, there is the further drawback of introducing a further catheter for guiding the sensor into the operation region.

15 Summary of the invention

It is object of the present invention to provide an co-axial microwave antenna for applications in medicine and surgery that is provided with trap, or choke, for blocking the backwards propagation of the reflecting wave towards the generator, wherein a miniaturisation of this trap with respect to the prior art is possible, in order to allow the use for minimally invasive applications.

It is another object of the present invention to provide an antenna that, in case of variation of the medium wavelength, allows the choke to be lengthened or shortened for a more correct operation.

It is a further object of the present invention to provide an antenna that allows a measure of temperature operation region.

30 It is a further object of the present invention to provide a method for the production of a such an antenna that allows this miniaturisation with simple construction.

These and other objects are achieved by the antenna according to the present invention, that can be inserted

- 6 -

in a metal needle necessary for the introduction of the antenna in the target tissue, the antenna having:

- an inner conductor,
- a dielectric layer that coats the inner conductor for 5 all its length,
- an external conductor that covers coaxially the dielectric layer except from an end portion,
- a choke mounted outside the external conductor near the end portion, the choke comprising a co-axial conducting 10 portion of diameter higher than the external conductor,
- a conducting collar for connecting the co-axial conductor to the external conductor, the conducting collar being arranged along the co-axial conducting portion opposite to the end portion,
- 15 - the characteristic of the antenna being that the co-axial conducting portion of the choke consists in the metal needle same.

Advantageously, the collar is in sliding contact with the needle, whereby the length of the choke can be 20 changed.

Preferably, next to the collar and adjacent to the end portion, the antenna has a plastics sheath that is a dielectric layer in the choke.

The sheath can be of antiadhesive material and of 25 length that protrudes from the needle, preventing the outer portion to adhere to tissues during the high temperature heating treatment.

Advantageously, a thermocouple is provided put through the choke and the sheath, said thermocouple being 30 in contact with the external conductor of said co-axial tube and having the sensitive end that comes out from said sheath protruding into the zone of feed of the antenna.

According to another aspect of the invention, a method of construction of a choke with variable length on

- 7 -

a co-axial antenna, the antenna being inserted in a metal needle necessary for the introduction of the antenna in the target tissue, the antenna having:

- an inner conductor,
- 5 - a dielectric layer that coats the inner conductor for all its length,
- an external conductor that covers coaxially the dielectric layer except from an end portion,
the characteristic being that of providing on the
- 10 antenna a conducting collar near the end portion, whereby the conducting collar slides in the metal needle.

Preferably, next to the collar adjacent to the end portion a plastics sheath is arranged on the antenna that is a dielectric layer in the choke.

- 15 The sheath and the dielectric layer of the antenna are advantageously of PTFE.

The collar can be made of metal welded to the external conductor of the antenna.

- According to a further aspect of the invention an
20 antenna for hyperthermia, that can be inserted in a metal needle necessary for the introduction of the antenna in the target tissue, comprises:

- an inner conductor,
- a dielectric layer that coats the inner conductor for
25 all its length,
- an external conductor that covers coaxially the dielectric layer except from an end portion,
- a choke mounted outside the external conductor near the end portion, the choke comprising a co-axial conducting
30 portion of diameter higher than the external conductor,
- the characteristic being of providing a thermocouple put through the choke, said thermocouple being in contact with said external conductor and having the sensitive end that comes out from said choke and protrudes into the zone

- 8 -

of feed of the antenna.

Brief description of the drawings

Further characteristics and advantages of the interstitial microwave antenna and of the method for its
5 production, according to the present invention, will be made clearer with the following description of an embodiment thereof, exemplifying but not limitative, with reference to the further attached drawings wherein:

- figure 3 shows a sectional axial view of an antenna
10 second invention;
- figure 4 shows an exploded view of the antenna of figure 3;
- figure 5 shows the antenna of figure 3 to which a thermocouple is added that crosses the choke and protrudes
15 into the zone of feed.

Description of a preferred embodiment

In Figure 3 an axial cross section is shown of an antenna according to the invention inserted in a metal tube that consists in an biopsy needle 1, for example a 14
20 Gauge, outer diameter = mm 2.1 needle.

The antenna, in its active portion at the right of the figure, is a radiating dipole or monopole. More precisely, the antenna is formed by a co-axial tube having an external conductor 2, by a dielectric layer 3 and by a
25 centersl conductor 4 immersed in the dielectric layer 3 that the insulates from the external conductor 2. The external conductor 2, as well known, end point indicated with 7, which is the feeding point the active portion of the antenna, said feed in gergo tecnico, where the emitted
30 power, normally, is maximum.

According to the invention, is provided a plastics sheath insulating 5 and a collar metal 6. More precisely, this result can be obtained:

- saldando on the external conductor of the antenna 2 the

- 9 -

- metal collar 6 in a predetermined position,
- by arranging the sheath 5 of plastics that coats the external conductor 2 in the portion that goes from feed 7 up to collar 6,
 - 5 - using the wall inner of the same metal needle 1 wherein the antenna is inserted for containing and guiding the collar 6 and the sheath 5, in particular, the collar 6 being in electrical contact with the wall inner of the metal needle 1.

10 The invention allows to make in a easy and not expensive way a miniaturized microwave antenna equipped with choke, suitable for local treatment of deep lesions in medicine and surgery. In fact, in combination with the metal needle 1, the collar 6 and the sheath 5 allow to 15 obtain a choke of variable length and made reducing to the minimum the increase of the outer diameter of the antenna.

Like the choke of figure 2, in fact, in figure 3 the wave 13 is reflected back starting from the feed 7 and runs the external surface of the antenna, enters the choke 20 formed between the needle 1 and the external conductor 4, reflects itself on the collar 6 in short circuit and, after a total $\lambda/2$ path is again at the inlet of the choke in phase opposition with respect to the wave at the inlet, obtaining a null intensity. The variation of wavelength in 25 case of temperature rise, or other cause, can be corrected by varying the position of the collar 6 with respect to needle 1, so that the choke is always $\lambda/4$ long. Within a certain range the variation of impedance of the antenna during the operation can be compensated in the same way 30 changing the length of the choke and then of the portion between the choke and the feed.

The isothermal surface that is obtained when the antenna is equipped with the choke according to the invention is shown also in this case by the dashed curve

- 10 -

axial tube of the antenna, and the inner wall 1 of the needle guide through which the antenna is inserted.

More precisely, the metal collar 6 keeps the electrical contact with the inner wall of the needle guide 5 1 and is thus a mobile by-pass.

Sheath 5 has, then, the following functions:

- is a co-axial wave guide $\lambda/4$ long supplying an effective choke for the antenna,
- it is a centering element for the sliding in the 10 antenna needle,
- in the portion outer to the choke the adhesion of tissues is avoided during the high temperature heating treatment, and it does not allow their contact with metal surfaces different from the needle guide within which the 15 antenna slides.

With reference to figure 5, according to a different embodiment of the invention, a thermocouple is provided 21 put through the collar 6 and the sheath 5 that forms the choke. Thermocouple 21 is in contact with the external 20 conductor 2 of the co-axial tube that forms the antenna, and has its sensitive end 22 that comes out from the sheath 5 protruding into the zone 10 of feed of the antenna. The other end of thermocouple is connected to the a temperature measuring instrument not shown by means of a 25 plug 23.

According to the invention thermocouple 21 does not affects the operation of the antenna. In fact, the thermocouple is integral to the metal of the outer co-axial conductor 2. Therefore, thermocouple 22 is 30 practically shielded.

Thermocouple 21 can be a common metal thermocouple, formed by a metal sheath in which are metal different conductors are joined at the sensitive end 22. Such a metal thermocouple not much expensive, much less than in

- 11 -

optical fibre sensors (for example fluoride-optical sensors).

A further advantage of thermocouple 21 is that of an external thermocouple has not to be inserted through an
5 additional catheter to part and, especially, the measure can be made directly in the operation region during the feeding delivery that produces the hyperthermia.

Thermocouple 21 can be put also in hyperthermia antennas different from that shown in figures from 3 to 5.

10 The foregoing description of a specific embodiment will so fully reveal the invention according to the conceptual point of view, so that others, by applying current knowledge, will be able to modify and/or adapt for various applications such an embodiment without further
15 research and without parting from the invention, and it is therefore to be understood that such adaptations and modifications will have to be considered as equivalent to the specific embodiment. The means and the materials to realise the different functions described herein could
20 have a different nature without, for this reason, departing from the field of the invention. It is to be understood that the phraseology or terminology employed herein is for the purpose of description and not of limitation.

- 12 -

CLAIMS

1. Co-axial microwave antenna for applications interstitial, percutaneous, laparoscopic, endoscopic and intrasurgery in medicine and surgery, in species for acute 5 hyperthermia in oncology, that can be inserted into a metal needle for introduction into a target tissue, said antenna having:
- an inner conductor,
 - a dielectric layer that coats the inner conductor for 10 all its length,
 - an external conductor that covers coaxially the dielectric layer except from an end portion,
 - a choke mounted outside the external conductor near 15 said end portion, said choke comprising a co-axial conducting portion of diameter higher than the external conductor,
 - a conducting collar for connecting said axial conductor to the external conductor, said conducting collar being arranged along said co-axial conducting portion opposite 20 to said end portion,

characterised in that

the co-axial conducting portion of the choke consists in said metal needle.

2. Antenna second claim 1, wherein said collar is in 25 sliding contact with said needle, whereby the length of the choke can be changed.
3. Antenna second claim 1, wherein next to said collar adjacent to said end portion a plastics sheath is provided that is a dielectric layer in the choke.
- 30 4. Antenna second claim 1, wherein said sheath is of antiadhesive material and has a length that protrudes from the needle, preventing the outer portion to adhere to tissues during the high temperature heating treatment.

- 13 -

5. Antenna second claim 1, wherein a thermocouple is provided put through the collar and the sheath that forms the choke, said thermocouple being in contact with the external conductor of said co-axial tube and having the
5 sensitive end that comes out from said sheath protruding into the zone of feed of the antenna.

6. A method of construction of a choke with variable length on a co-axial microwave antenna for interstitial, percutaneous, laparoscopic, endoscopic and intrasurgery
10 applications in medicine and surgery, in species for acute hyperthermia in oncology, said antenna being inserted into a metal needle necessary for introduction into a target tissue, said antenna having:

- an inner conductor,
- 15 - a dielectric layer that coats the inner conductor for all its length,
- an external conductor that covers coaxially the dielectric layer except from an end portion,

characterised in that of providing on said antenna a
20 conducting collar near said end portion, whereby said conducting collar slides in said metal needle.

7. Method according to claim 6, wherein next to said collar adjacent to said end portion a plastics sheath is provided on the antenna that is a dielectric layer inner
25 to said choke.

8. Method according to claim 6, wherein said sheath and the dielectric layer of the antenna are of PTFE.

9. Method according to claim 6, wherein said collar is made of metal welded to the external conductor of the
30 antenna.

10. A antenna for hyperthermia, that can be inserted in a metal needle necessary for the introduction of the antenna in the target tissue, comprising:

- an inner conductor,

- 14 -

- a dielectric layer that coats the inner conductor for all its length,
 - an external conductor that covers coaxially the dielectric layer except from an end portion,
- 5 - a choke mounted outside the external conductor near the end portion, the choke comprising a co-axial conducting portion of diameter higher than the external conductor,
- characterised in that** a thermocouple is provided put 10 through the choke, said thermocouple being in contact with said external conductor and having the sensitive end that comes out from said choke and protrudes into the zone of feed of the antenna.

- 1/3 -

Fig. 1
(prior art)


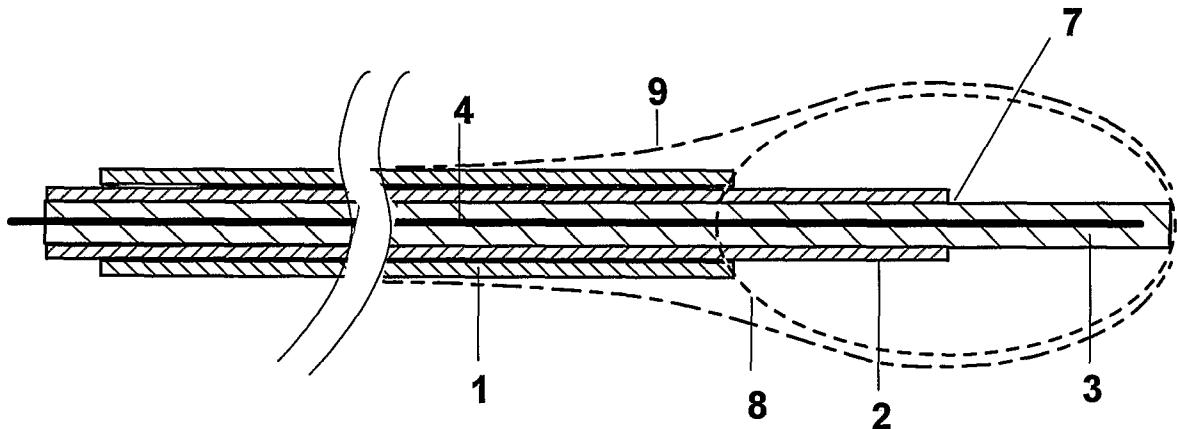


Fig. 2
(prior art)

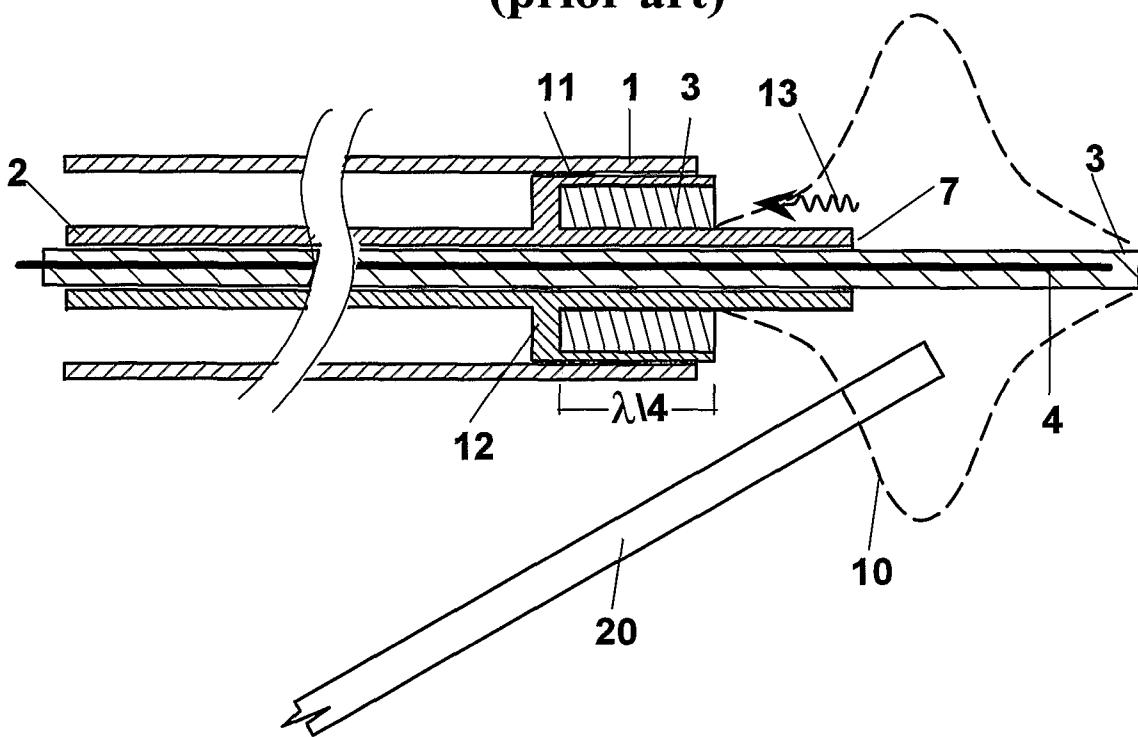

- 2/3 -

Fig. 3



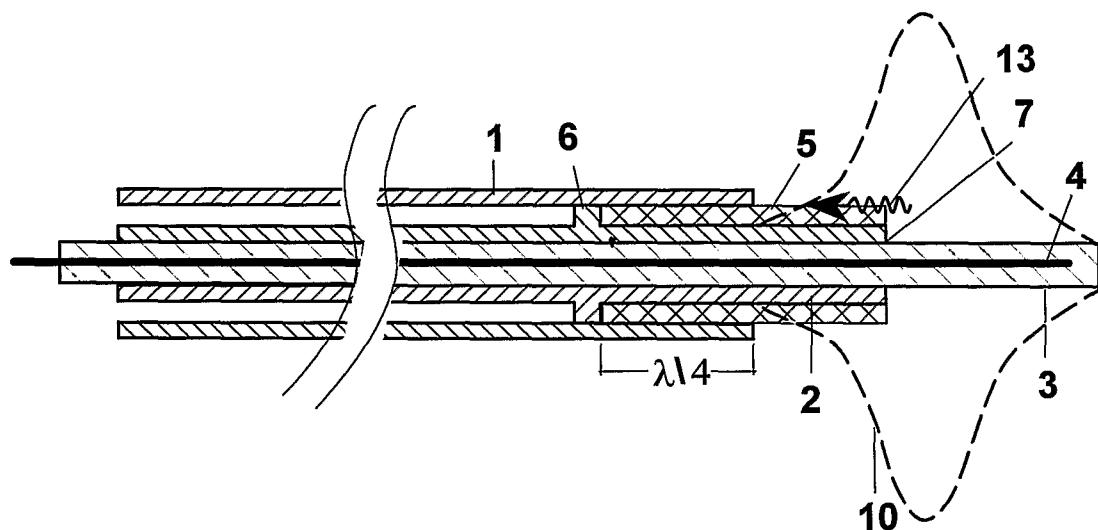


Fig. 4

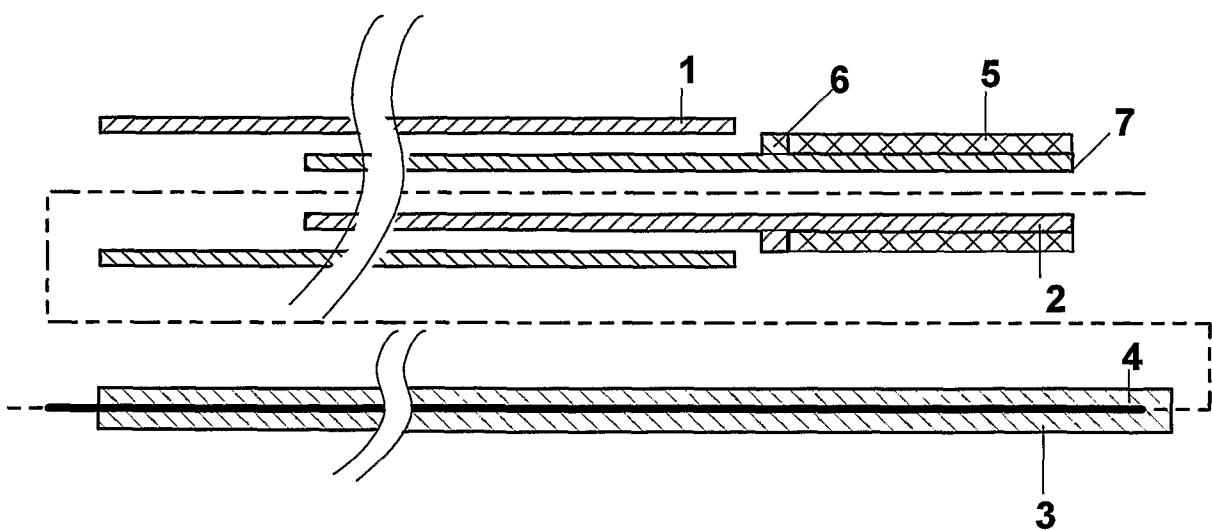

- 3/3 -

Fig. 5

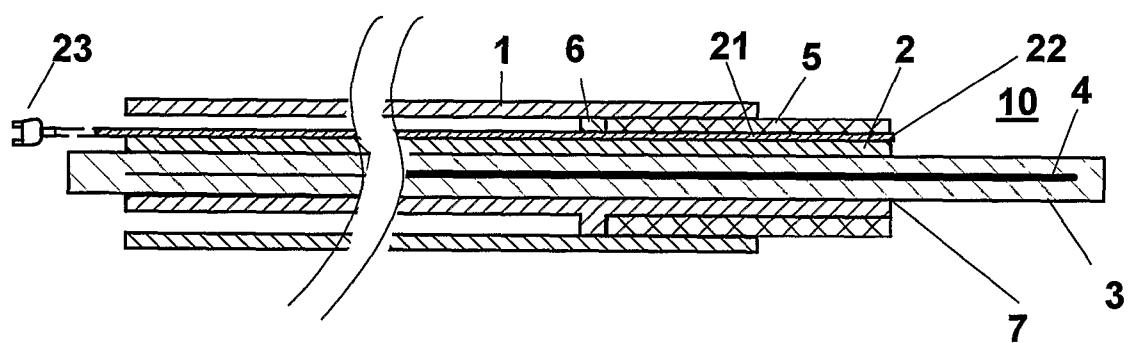

专利名称(译)	具有微型扼流圈的间质微波天线，用于医学和外科手术中的热疗		
公开(公告)号	EP1356545A2	公开(公告)日	2003-10-29
申请号	EP2002701471	申请日	2002-01-31
[标]申请(专利权)人(译)	国家研究委员会		
申请(专利权)人(译)	CNR CONSIGLIO NAZIONALE DELLE RICERCHE		
当前申请(专利权)人(译)	CNR CONSIGLIO NAZIONALE DELLE RICERCHE		
[标]发明人	LONGO IGINIO		
发明人	LONGO, IGINIO		
IPC分类号	A61B18/18 A61N5/04 H01Q1/44 H01Q9/26 H01Q9/30		
CPC分类号	H01Q9/30 A61B18/18 A61B18/1815		
优先权	102001900905416 2001-01-31 IT		
其他公开文献	EP1356545B1		
外部链接	Espacenet		

摘要(译)

本发明涉及微创手术技术。它提供了一种制造用于经皮急性热疗微波应用的天线的方法，该微波应用是单极或偶极同轴型，具有陷阱，通常称为扼流圈，用于阻止向后反射波向发生器的传播。该装置的小型化允许在医学和外科手术中，特别是对于肿瘤学中使用微创的间质热疗。制造天线的方法提供了金属针(1)，用于在目标组织中引入天线(2,3,4)。在天线(2)的外导体(4)上，金属套环(6)连接在预定位置;施加塑料护套(5)以便在进料(7)和轴环(6)之间的部分中覆盖外部导体(2);然后，用于插入天线的金属针(1)的内壁用于容纳和引导轴环(6)和护套(5);特别地，套环(6)与金属针(1)的内壁电接触。因此获得具有可变长度和小直径的扼流圈的天线。热电偶可以通过扼流圈引入，该扼流圈直接伸入“进料”区域。(图3)