



US 20060103800A1

(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2006/0103800 A1**

Li et al.

(43) **Pub. Date:**

May 18, 2006

(54) **MULTI-DOMAIN VERTICALLY ALIGNED LIQUID CRYSTAL DISPLAY**

(30) **Foreign Application Priority Data**

Oct. 29, 2004 (TW)..... 93132909

Oct. 14, 2005 (TW)..... 94135843

(76) Inventors: **Wang-Yang Li**, Tainan (TW);
Che-Ming Hsu, Tainan (TW);
Ying-Hao Hsu, Tainan (TW);
Ming-Feng Hsieh, Tainan (TW);
Chih-Yung Hsieh, Tainan (TW); **I-Lin Ho**, Tainan (TW)

Publication Classification

(51) **Int. Cl.**
G02F 1/1337 (2006.01)

(52) **U.S. Cl.** **349/129; 349/130**


Correspondence Address:
TROP PRUNER & HU, PC
8554 KATY FREEWAY
SUITE 100
HOUSTON, TX 77024 (US)

(57) **ABSTRACT**

A multi-domain vertically aligned liquid crystal display (MVA LCD) includes an active component array substrate, an opposite substrate, and a liquid crystal layer. The active component array substrate has a plurality of pixel units, and the liquid crystal layer is disposed between the active component array substrate and the opposite substrate. The liquid crystal layer proximal each pixel unit is divided into plural domain sets. Each domain set has plural domains.

(21) Appl. No.: **11/261,944**

(22) Filed: **Oct. 28, 2005**

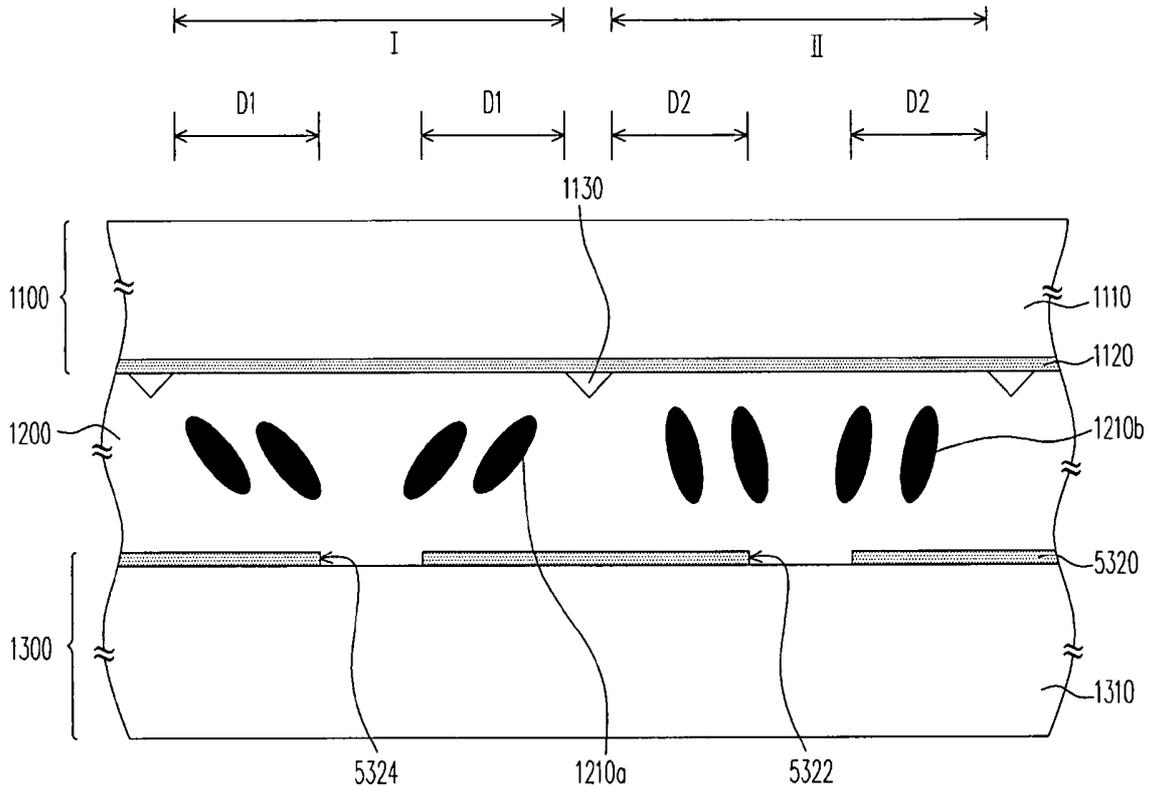

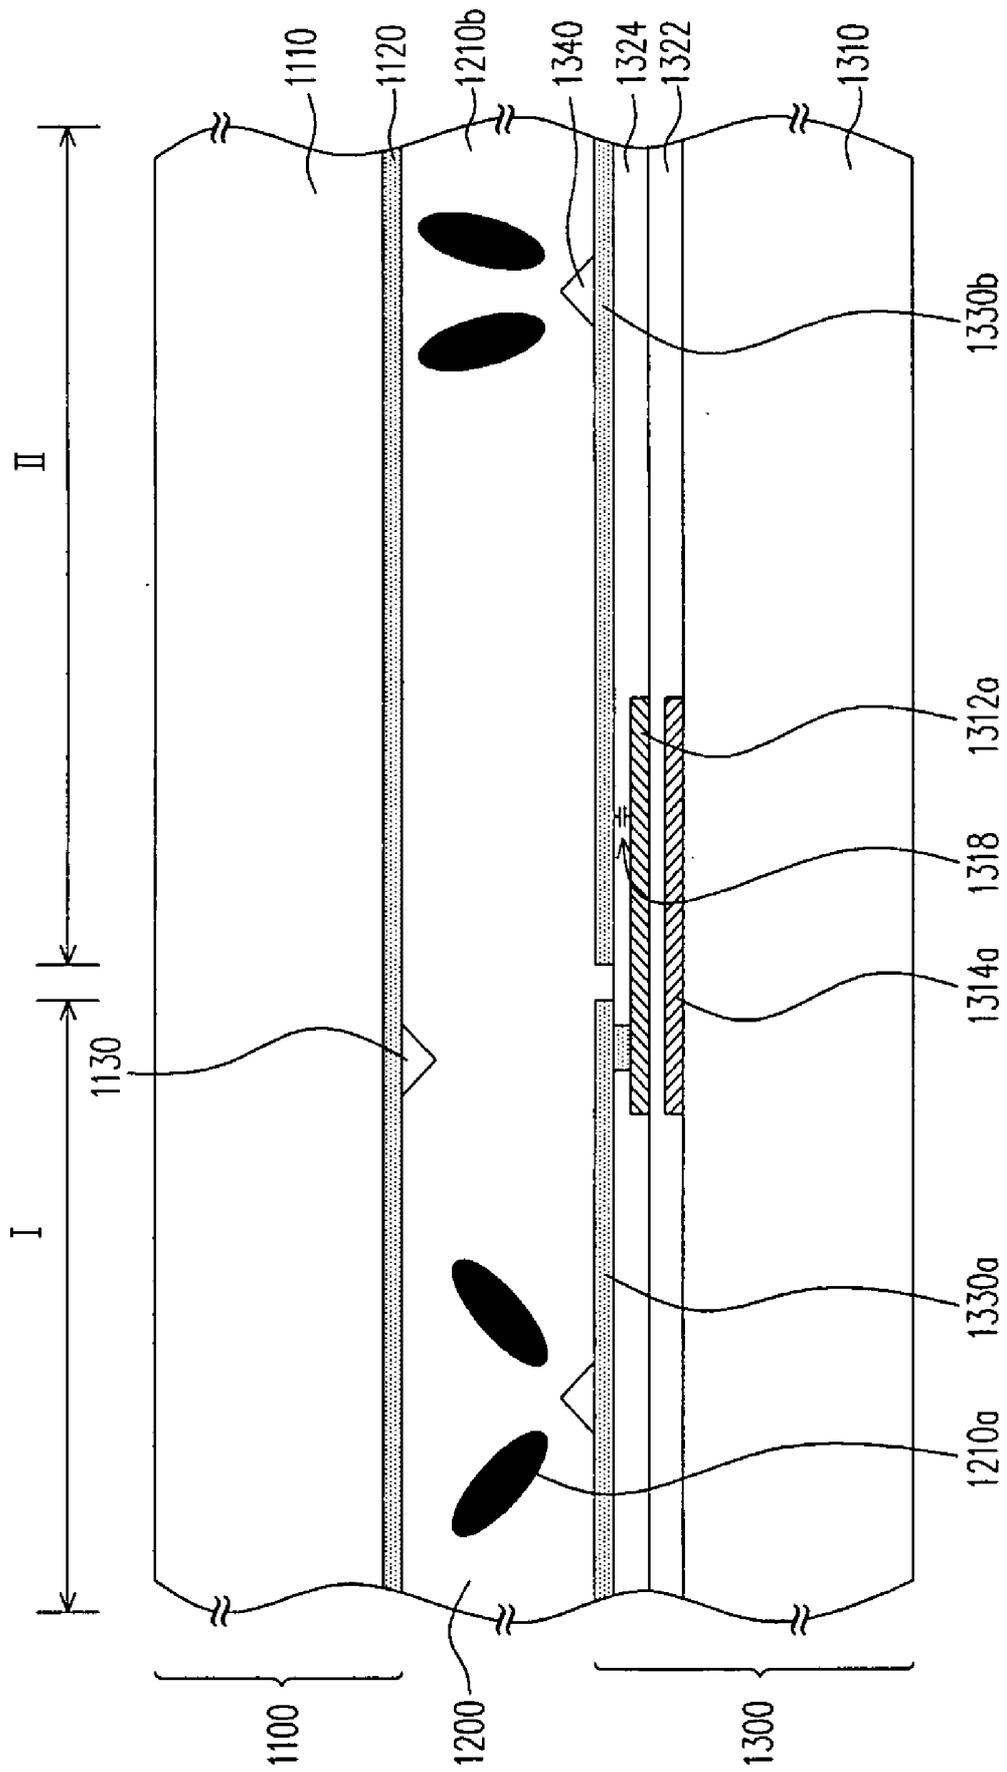


FIG. 1A

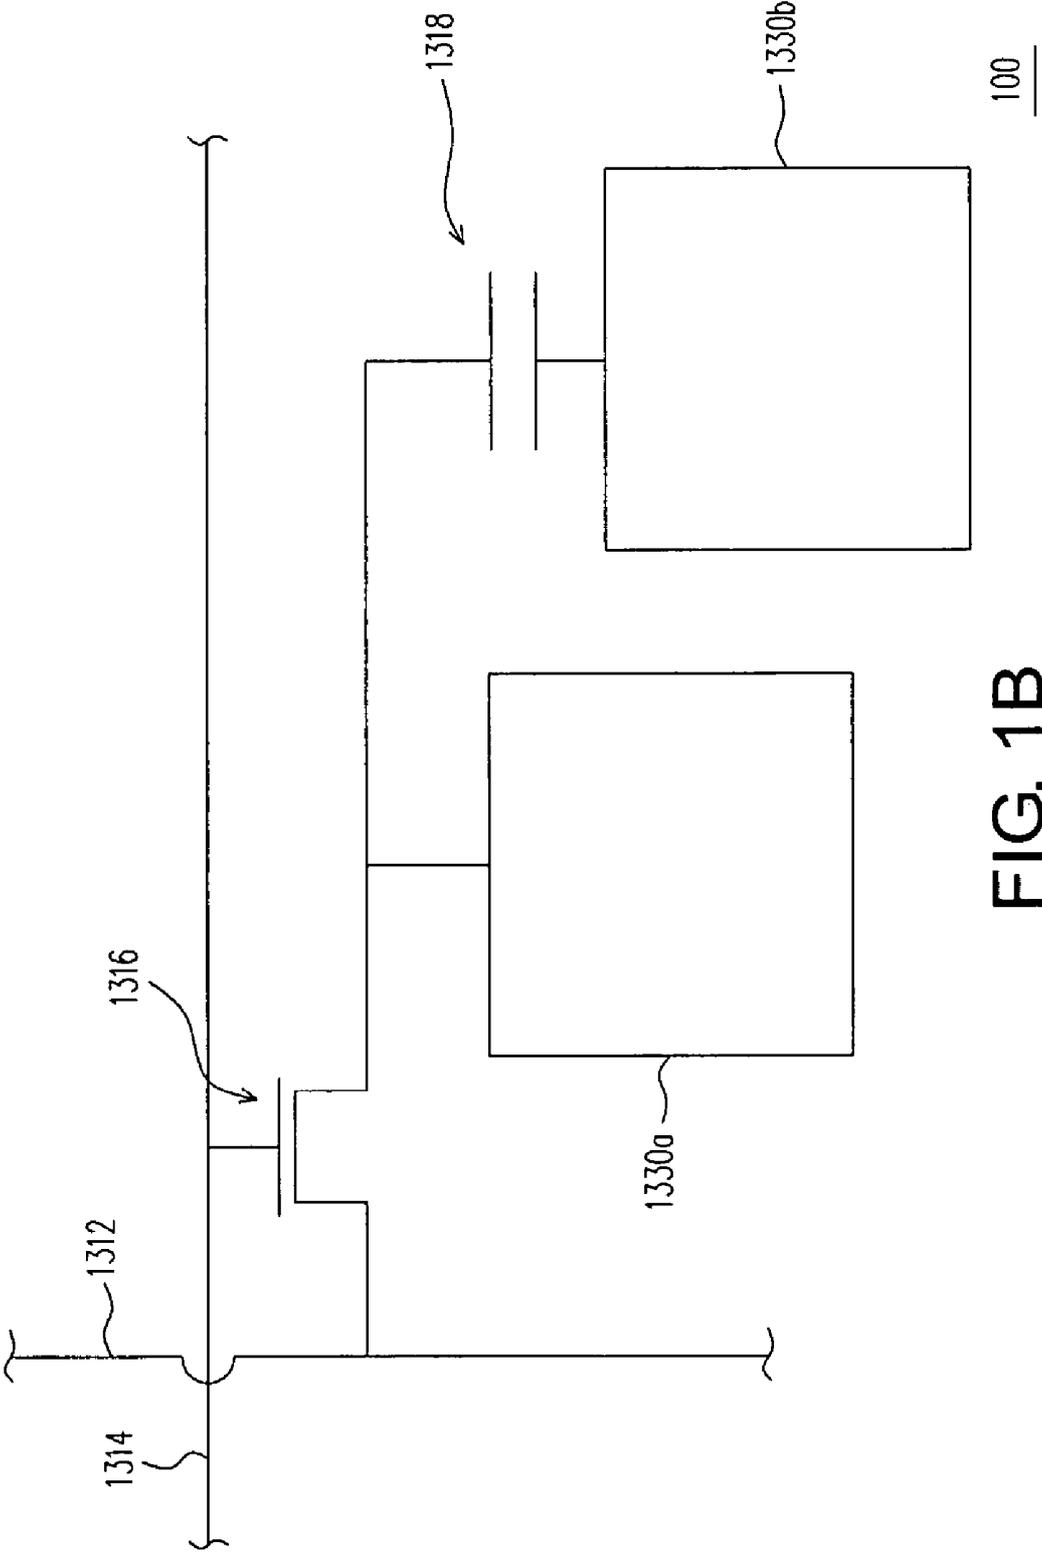


FIG. 1B

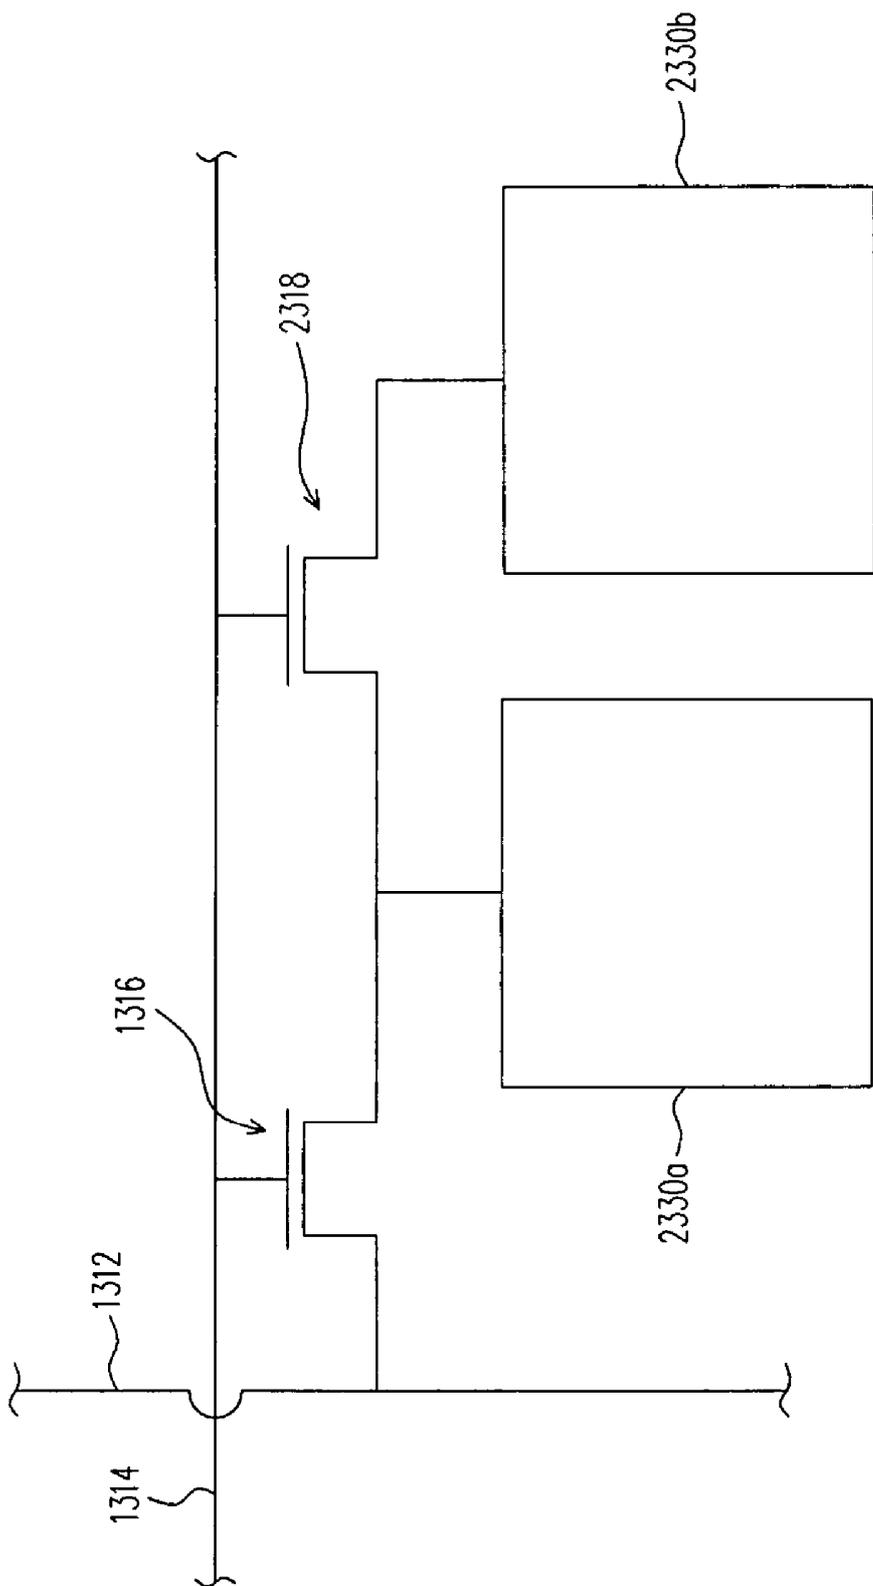


FIG. 2

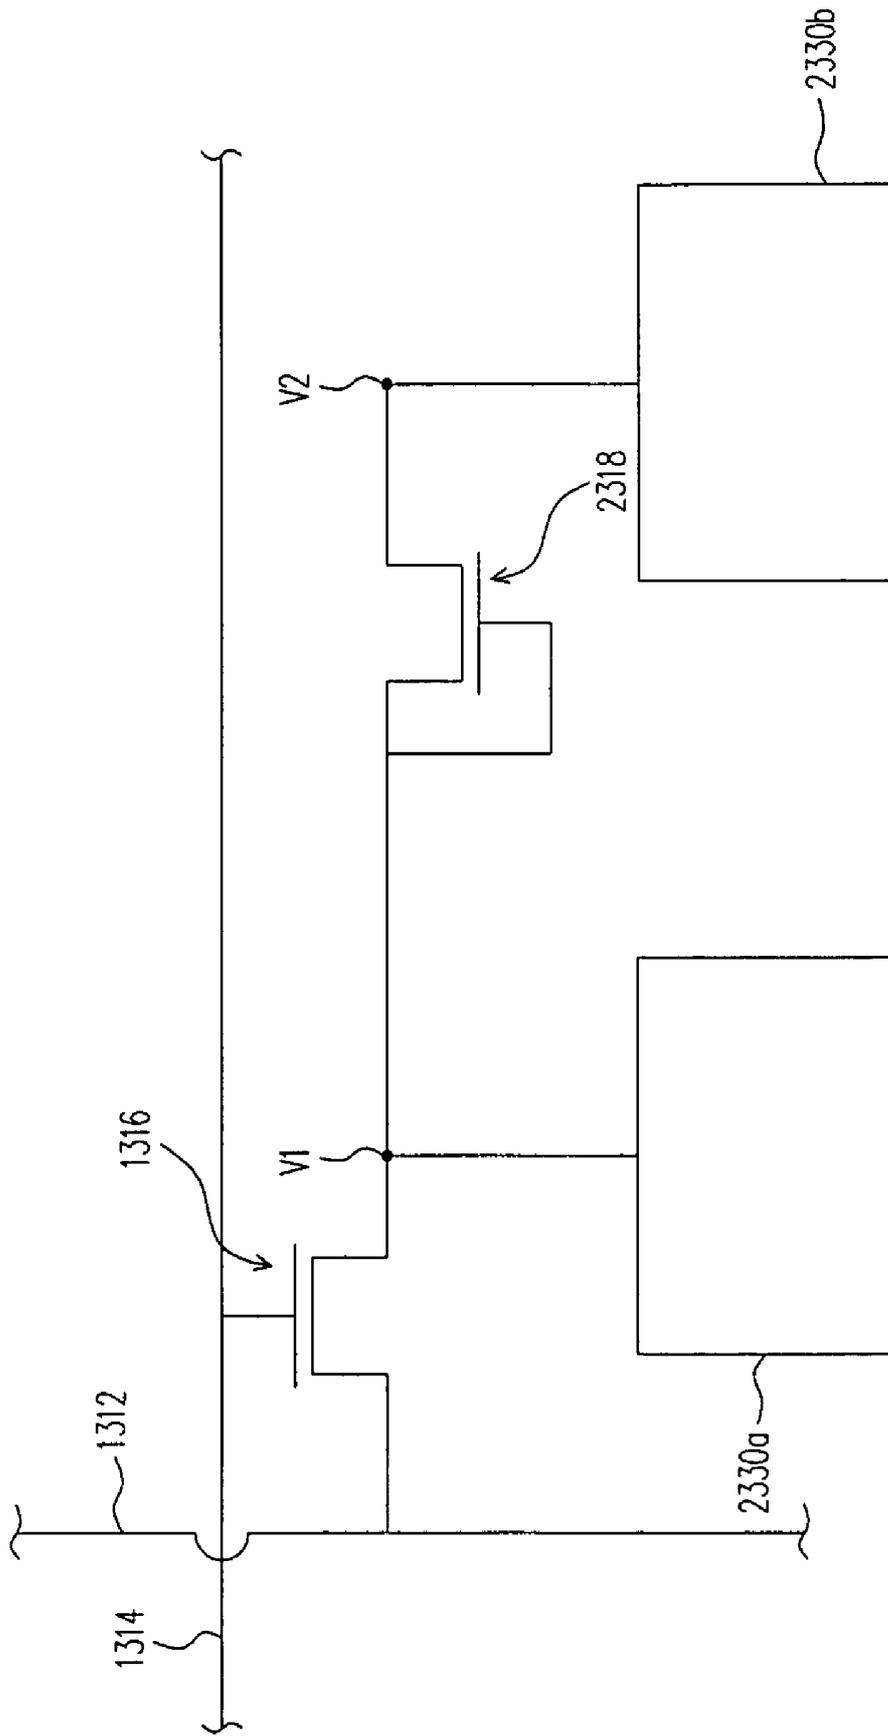


FIG. 2A

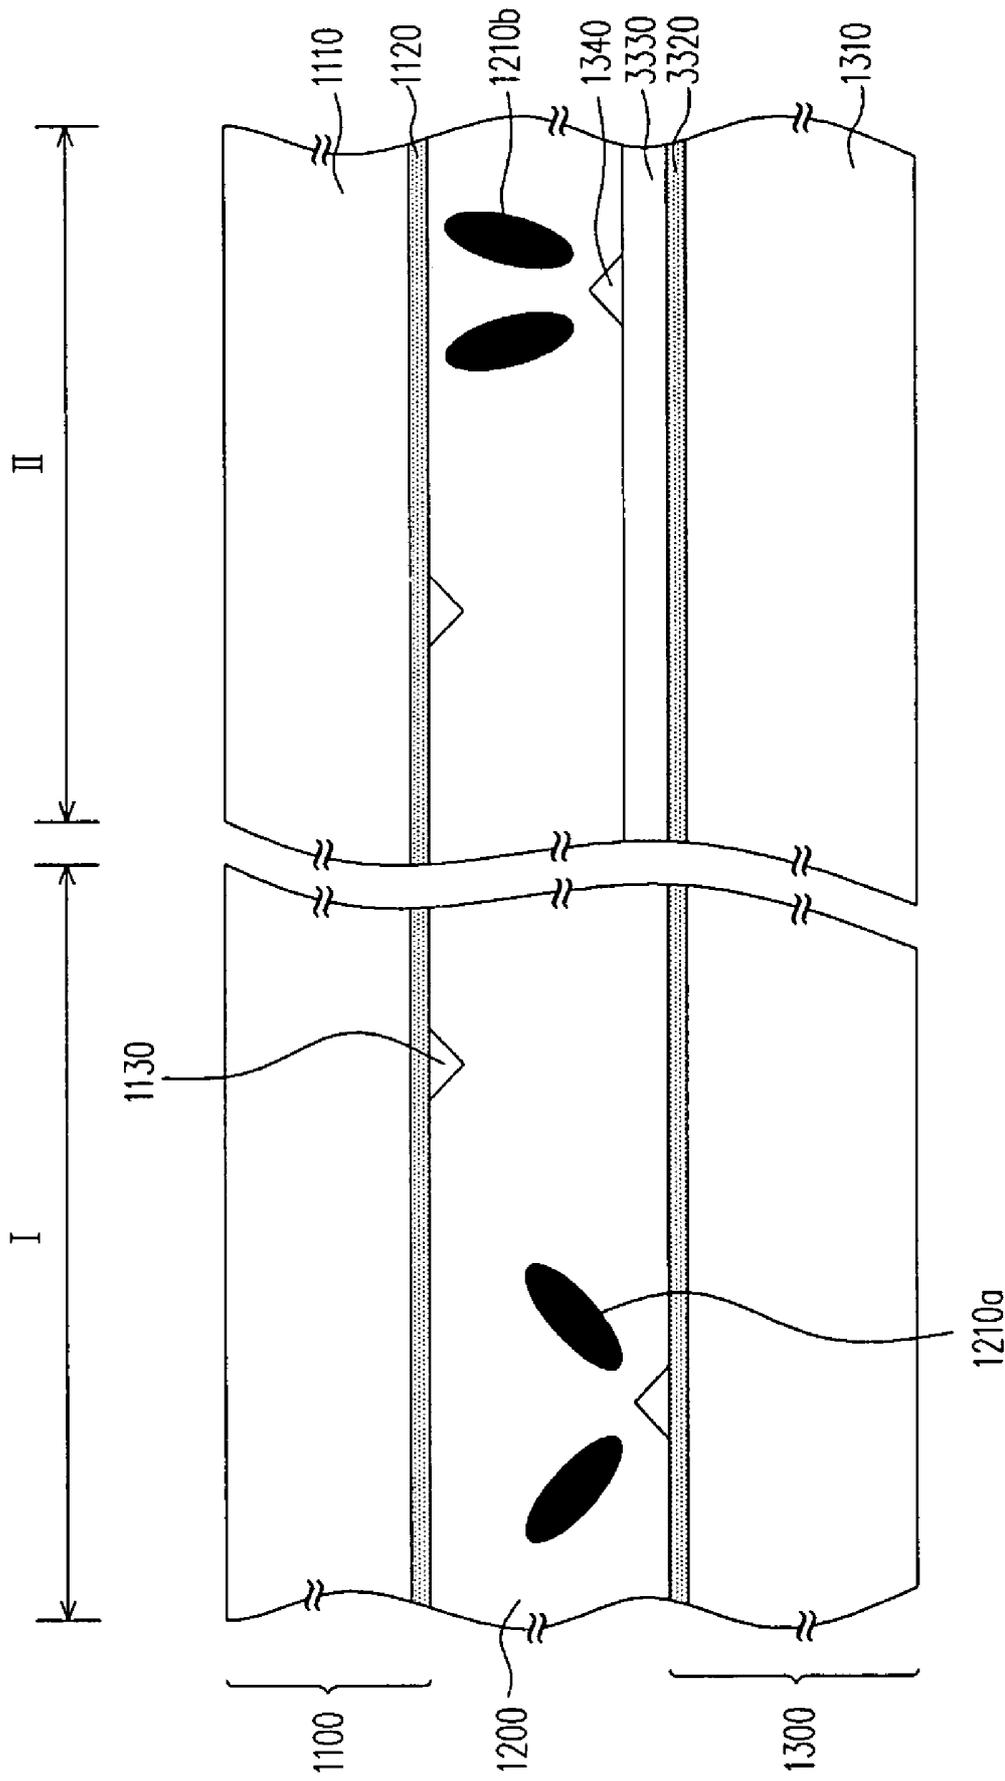


FIG. 3

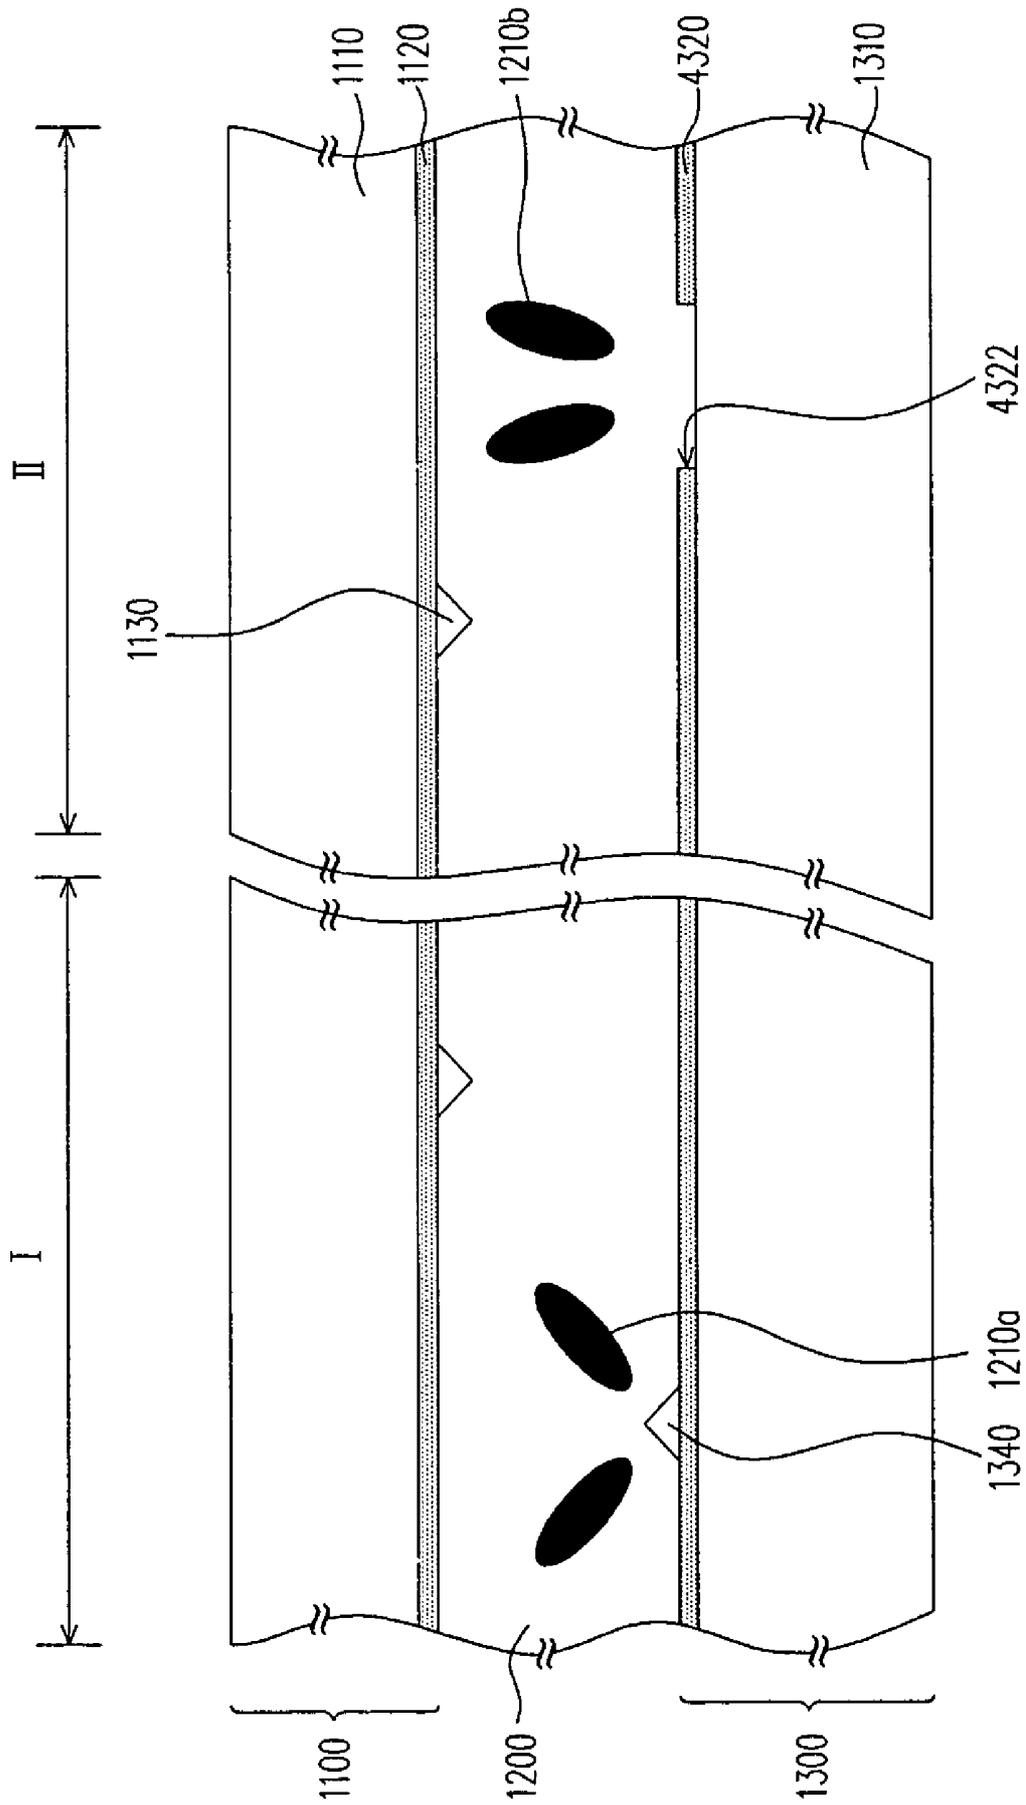


FIG. 4

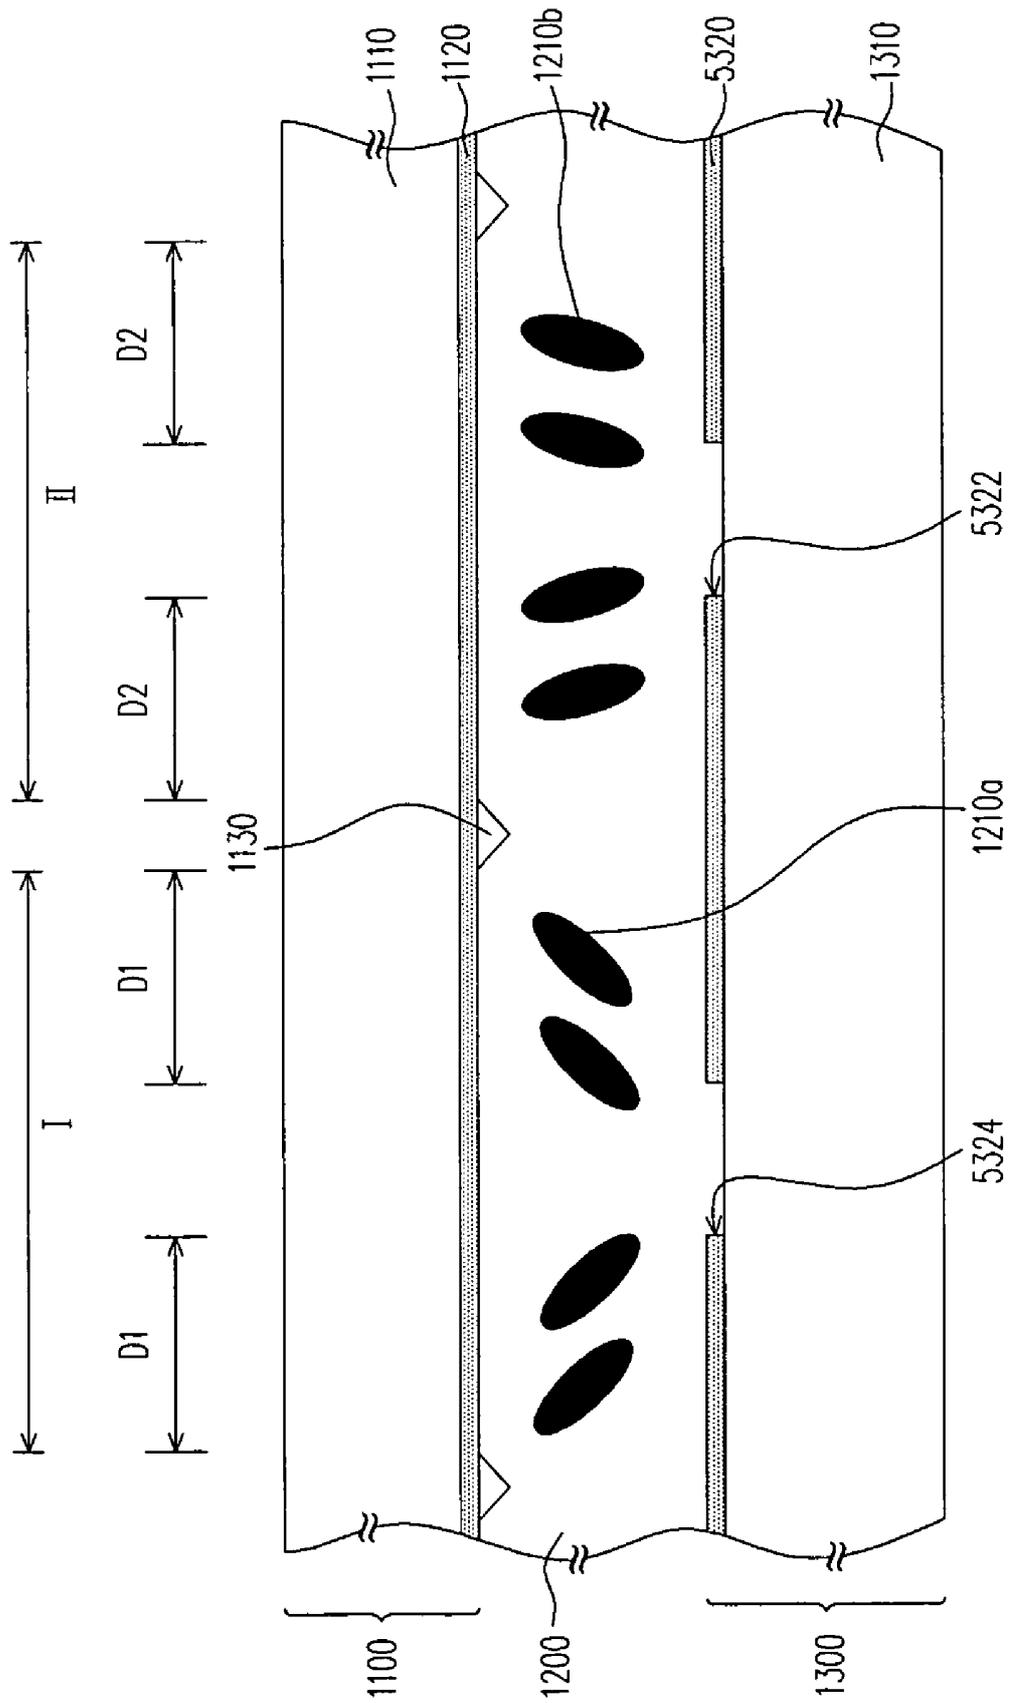


FIG. 5A

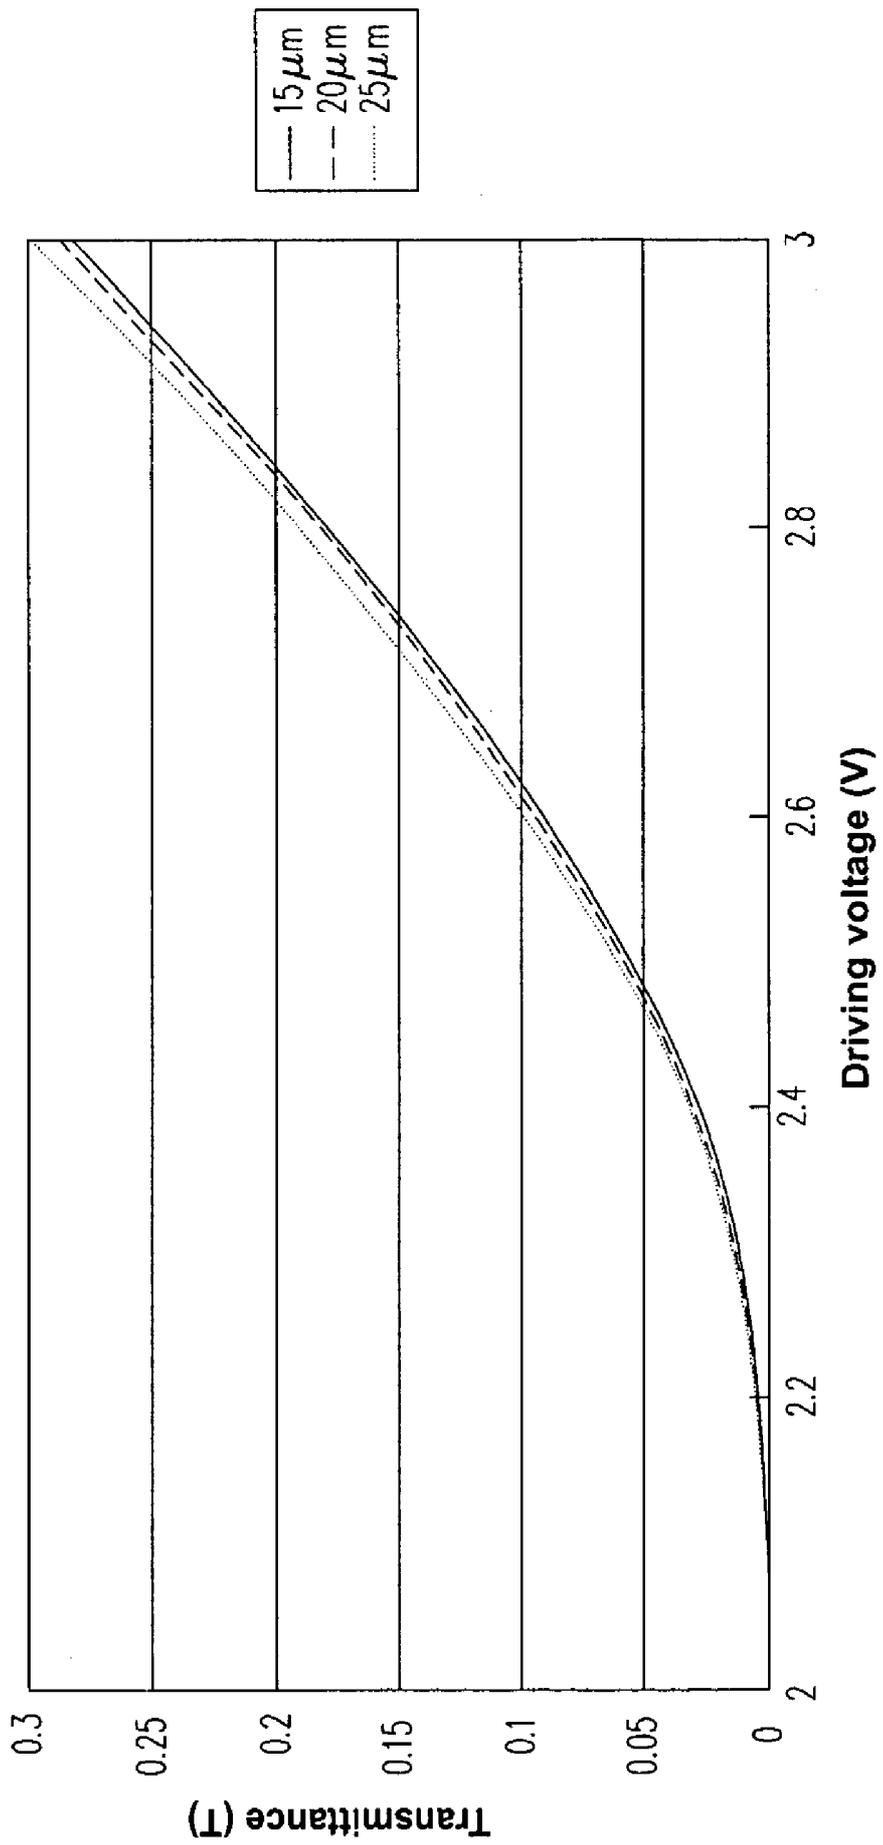


FIG. 5B

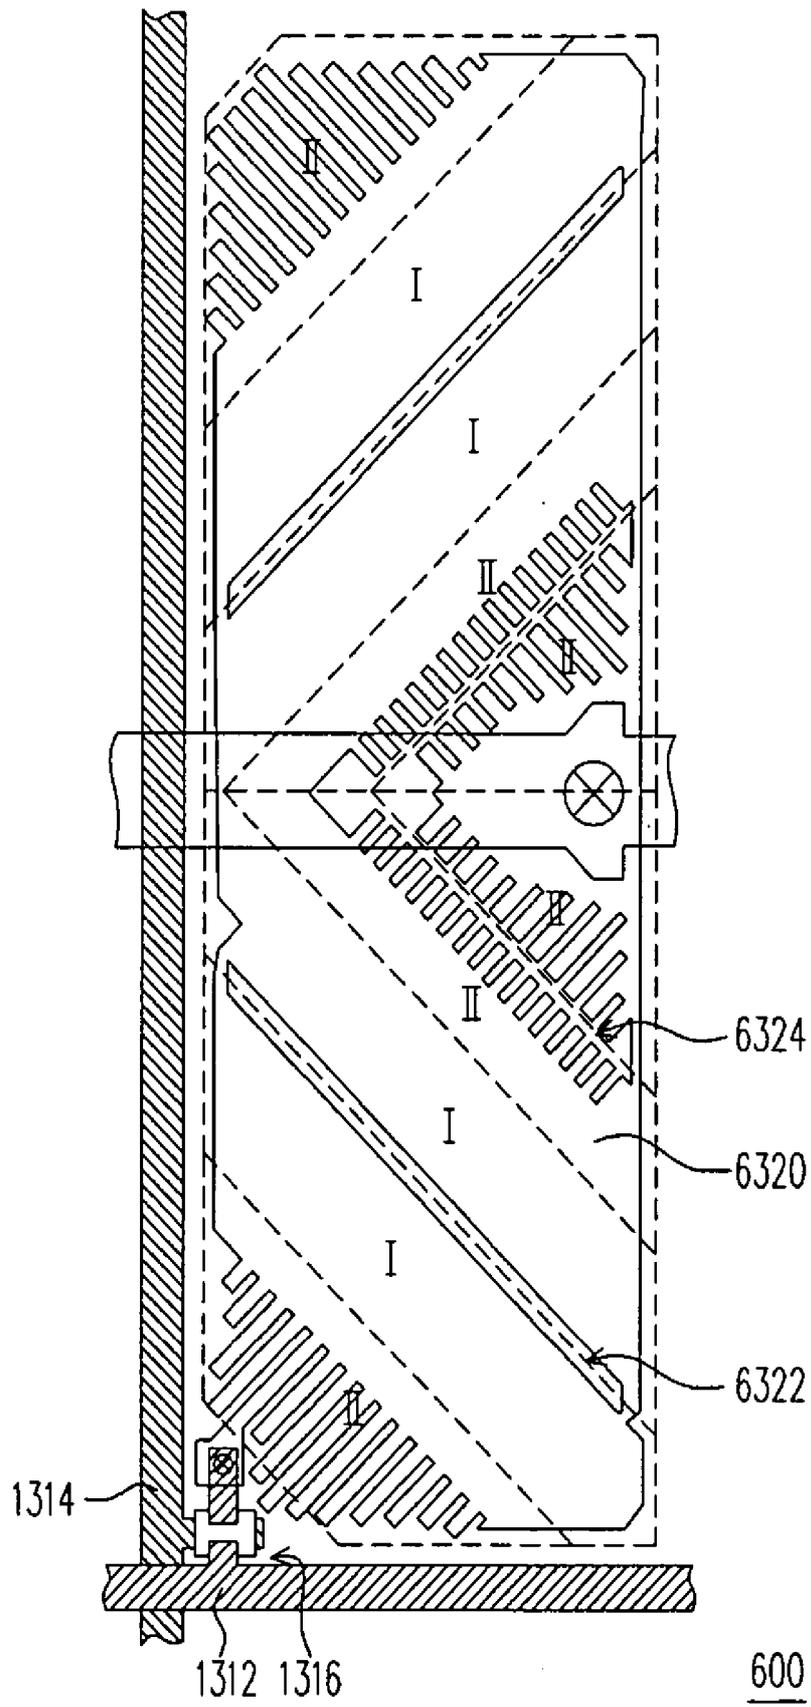


FIG. 6A

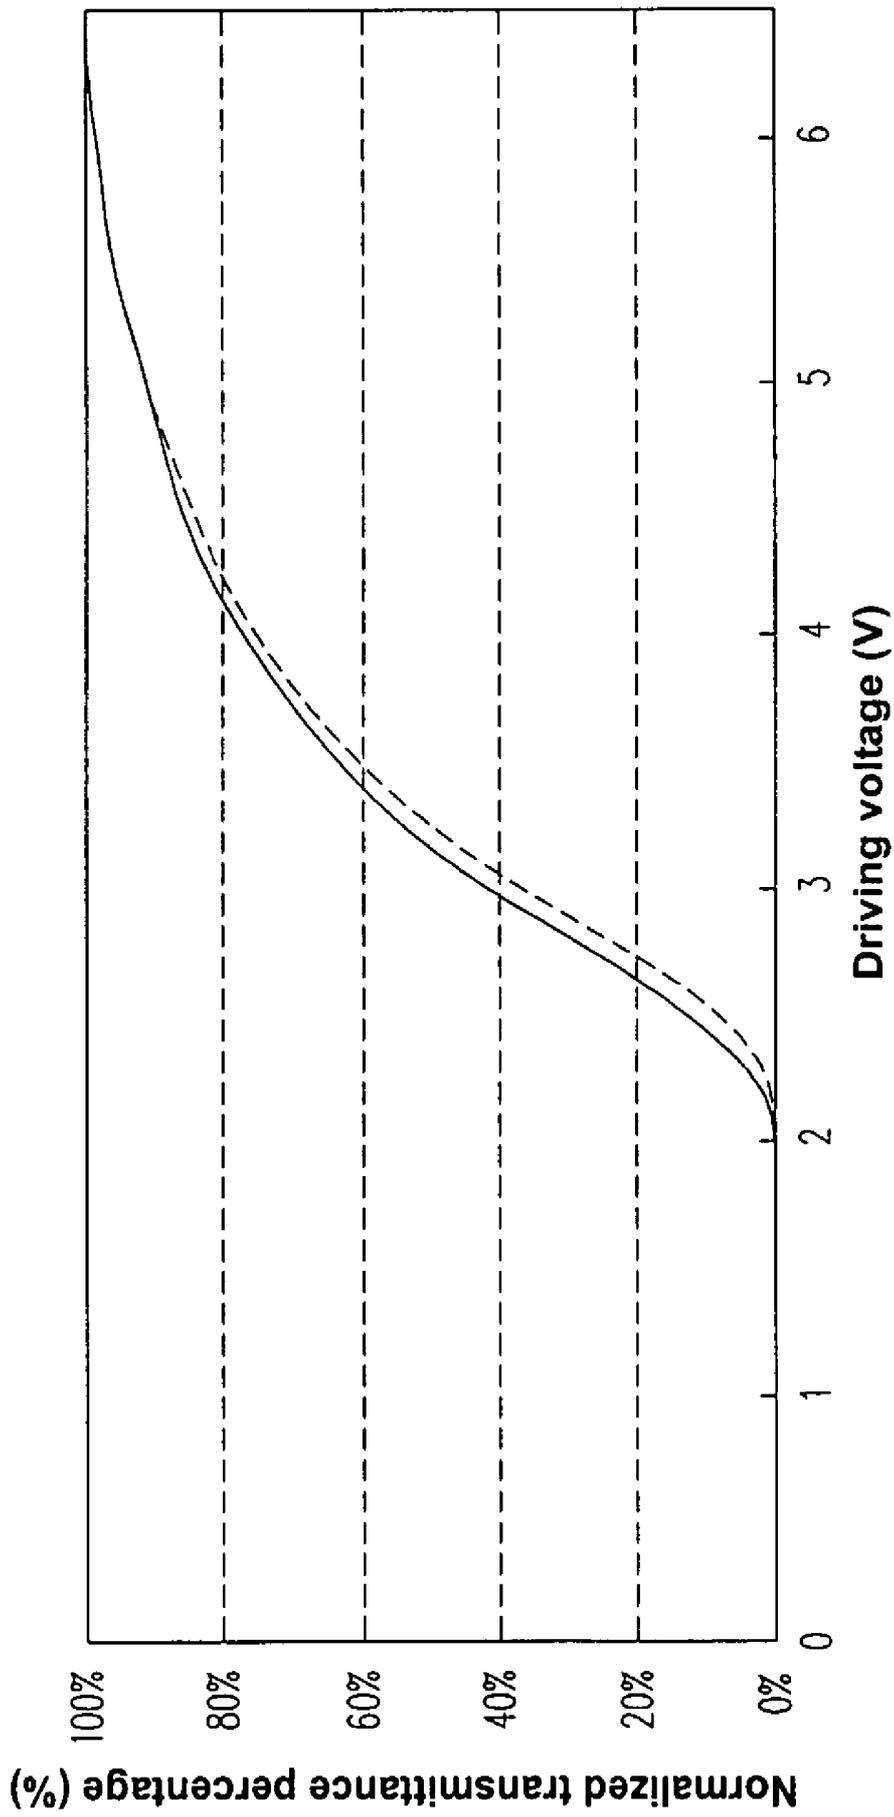


FIG. 6B

MULTI-DOMAIN VERTICALLY ALIGNED LIQUID CRYSTAL DISPLAY

TECHNICAL FIELD

[0001] This invention relates to a display, more particularly to a multi-domain vertically aligned liquid crystal display.

BACKGROUND

[0002] The ever-increasing demand for displays has motivated display manufacturers to develop various types of displays. The cathode ray tube (CRT) display, in particular, has long dominated the display market. However, because of high power consumption and high radiation emission of CRT displays, other types of displays, such as the transistor liquid crystal display (TFT-LCD), have become more popular. TFT-LCDs have the advantages of providing high display quality, space efficiency, low power consumption, and no radiation emission.

[0003] Generally, LCDs exhibit high contrast ratio, no gray scale inversion, small color shift, high luminance, excellent color richness, high color saturation, quick response, and wide viewing angle. Example types of LCDs that are able to provide wide viewing angles include the following: twisted nematic LCDs with wide viewing film, in-plane switching (IPS) LCDs, fringe field switching LCDs, and multi-domain vertically aligned (MVA) LCDs.

[0004] MVA LCDs are able to have wide viewing angles due to provision of alignment protrusions and/or slits disposed on a color filter substrate or thin film transistor array substrate. The alignment protrusions and/or slits enable liquid crystal molecules of the LCD to align in various directions so that multiple alignment domains are achieved. However, with conventional MVA LCDs, when viewing angle changes, the brightness of the MVA LCD may change as well, leading to color shift and insufficient color saturation.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] **FIG. 1A** is a sectional view of a pixel unit of a multi-domain vertically aligned (MVA) liquid crystal display (LCD) according to a first embodiment.

[0006] **FIG. 1B** is a schematic circuit diagram of the pixel unit of the first embodiment.

[0007] **FIG. 2** is a schematic circuit diagram of a pixel unit of an MVA LCD according to a second embodiment.

[0008] **FIG. 2A** is a schematic circuit diagram of a pixel unit according to another embodiment.

[0009] **FIG. 2B** is a schematic circuit diagram of a pixel unit according to yet another embodiment.

[0010] **FIG. 3** is a sectional view of a pixel unit of an MVA LCD according to a third embodiment.

[0011] **FIG. 4** is a sectional view of a pixel unit of an MVA LCD according to a fourth embodiment.

[0012] **FIG. 5A** is a sectional view of a pixel unit of an MVA LCD according to a fifth embodiment.

[0013] **FIG. 5B** is a chart of curves representing relationships of voltage to transmittance.

[0014] **FIG. 6A** is a schematic top view of a pixel unit of an MVA LCD according to a sixth embodiment.

[0015] **FIG. 6B** is a chart of curves representing relationships of voltage to normalized transmittance percentage.

[0016] **FIG. 7A** is a sectional view of a pixel unit of an MVA LCD according to a seventh embodiment.

[0017] **FIG. 7B** is a schematic circuit diagram of the pixel unit of the MVA LCD according to the seventh embodiment.

[0018] **FIG. 8** is a schematic circuit diagram of a pixel unit of an MVA LCD according to an eighth embodiment.

DETAILED DESCRIPTION

[0019] In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments are possible.

[0020] In accordance with some embodiments, a multi-domain vertically aligned (MVA) LCD panel is provided that is able to reduce changes in brightness when the viewing angle changes. An MVA LCD panel can include an active component array substrate, an opposite substrate, and a liquid crystal layer, where the active component array substrate has a plurality of pixel units (arranged in an array of pixel units) and the liquid crystal layer is disposed between the active component array substrate and the opposite substrate. The liquid crystal layer proximal each pixel unit is divided into a plurality of domain sets, wherein each domain set has various domains and the effective voltage applied on the liquid crystal layer proximal each domain set is different.

[0021] To reduce changes in brightness of an MVA LCD when the viewing angle changes according to some embodiments, each of the pixel units of the active component array substrate is divided into multiple domain sets to achieve the objective of reducing brightness changes. For example, each pixel unit is divided into a first domain set and a second domain set, where both the first domain set and the second domain set include several domains (e.g., four domains, A, B, C, and D).

[0022] Conventionally, to drive an LCD panel, a driving voltage is input into the pixel electrode of each individual pixel unit via a data line so that the effective voltage supplied to the liquid crystal layer proximal the individual pixel unit is the same. Note, however, that according to some embodiments, in response to the same driving voltage input, the effective voltages supplied to portions of the liquid crystal layer proximal the domain sets are different. As the effective voltage supplied to the liquid crystal layer in each domain set is different, the transmittance of the liquid crystal layer in different domain sets is different so that the problem of steep change in brightness when the viewing angle changes is alleviated. The following describes embodiments that include mechanisms to cause the effective voltages supplied to portions of the liquid crystal layer in the plural domain sets to differ from each other.

First Embodiment

[0023] **FIG. 1A** is a sectional view of a pixel unit 100 of an MVA LCD according to a first embodiment, and **FIG. 1B**

is a schematic circuit diagram of the pixel unit. The pixel unit depicted is repeated to provide an array of pixel units in the MVA LCD. The MVA LCD comprises an active component array substrate **1300**, an opposite substrate **1100**, and a liquid crystal layer **1200** portion disposed between the active component array substrate **1300** and the opposite substrate **1100**. Additionally, the opposite substrate **1100** comprises a first substrate **1110** and a common electrode layer **1120** which is disposed on the surface of the first substrate **1110**, where the common electrode layer **1120** faces the active component array substrate **1300**.

[0024] The active component array substrate **1300** has a plurality of scan lines **1314**, a plurality of data lines **1312**, and a plurality of pixel units **100**, where the pixel units **100** are controlled by the corresponding scan lines **1314** and data lines **1312** (as shown in FIG. 1B). Additionally, the pixel units **100** are disposed above a second substrate **1310** and comprise an active component **1316** (as shown in FIG. 1B), a first pixel electrode **1330a**, a second pixel electrode **1330b**, and a metal layer **1312a**. The first and second pixel electrodes **1330a**, **1330b** are considered to be divided pixel electrodes provided to apply different voltages on portions of the liquid crystal layer **1200** in different first and second domain sets I and II. Furthermore, the active component **1316** is, for example, a thin film transistor (TFT) or otherwise a three-end active component. The metal layer **1312a** and the data line **1312** are, for example, formed at the same time. The metal layer **1312a** is electrically connected to the drain of the TFT **1316**, and the data line **1312** is connected to the source of the TFT **1316**. Note that the terms "source" and "drain" can be used interchangeably. The gate of the TFT **1316** is connected to a scan line **1314**.

[0025] The active component **1316** is disposed on the second substrate **1310**, and an insulation layer **1322** extends from the active component and covers the second substrate **1310**, wherein the insulation layer is, for example, a gate insulation layer. Additionally, the metal layer **1312a** is disposed above the insulation layer **1322**, and the insulation layer **1324** covers the metal layer **1312a** and insulation **1322**, wherein the insulation layer **1324** is, for example, a protection layer. In one embodiment, the metal layer **1312a** is in a location which, for example, overlaps that of a shared line **1314a**. In other words, the metal layer **1312a** is above the shared line **1314a**.

[0026] Note that the first pixel electrode **1330a** and the second pixel electrode **1330b** are separately disposed (and spaced apart from each other horizontally) above the insulation layer **1324**, wherein the first pixel electrode **1330a** electrically connects to the active component **1316** and is in a location that corresponds to that of a first domain set I. Additionally, the second pixel electrode **1330b** is coupled to the metal layer **1312a** to form a capacitance **1318**, and is in a location that corresponds to that of a second domain set II. Both the first domain set I and the second domain set II include multiple domains, such as four domains with different liquid crystal alignment. The overlapping area of the second pixel electrode **1330b** and the metal layer **1312a** defines the capacitor **1318** and will determine the effective voltage applied on the portion of the liquid crystal layer **1200** proximal the second pixel electrode **1330b**. A liquid crystal layer portion "proximal" a pixel electrode means that the liquid crystal layer is in the vicinity of the pixel electrode

such that the liquid crystal layer portion will be electrically affected by the pixel electrode.

[0027] In each pixel unit **100**, the first pixel electrode has a direct electrical connection with the active component **1316**, while the second pixel electrode **1330b** electrically couples to the active component **1316** via the capacitance **1318**. Such an arrangement results in the voltage applied on the second pixel electrode **1330b** being different from that applied on the first pixel electrode, so that the effective voltage applied on the liquid crystal layer **1200** portion in the first domain set I is different from that applied on the liquid crystal layer **1200** portion in the second domain set II. When a particular driving voltage is input into the pixel unit via the data line **1312**, the first pixel electrode **1330a** will receive a higher voltage than the second pixel electrode **1330b** so that the effective voltage applied on the liquid crystal molecules **1210a** in the first domain set I is greater than that applied on the liquid crystal molecules **1210b** in the second domain set II, resulting in an obliquity of the liquid crystal molecules of the first domain set I different from that of the liquid crystal molecules of the second domain set II, so that when the viewing angle changes, changes in brightness will be reduced because the first domain set I and the second domain set II will compensate each other in brightness.

[0028] Note that in this embodiment, a plurality of alignment protrusions **1130** are disposed on the common electrode layer **1120** of the opposite substrate **1100**, and a plurality of alignment protrusions **1340** are disposed on the second pixel electrode **1330b** and the first pixel electrode **1330a** of the active component arrays substrate **1300** so that the liquid crystal molecules within the liquid crystal layer **1200** portion will be arranged in multi-domain pattern.

[0029] However, in another embodiment, the method by which the liquid crystal molecules within the liquid crystal layer **1200** portion are caused to be arranged in multi-domain pattern is, for example, to form slits on the common electrode layer **1120**, the first pixel electrode **1330a** and the second pixel electrode **1330b**. In another embodiment, the method by which the liquid crystal molecules within the liquid crystal layer **1200** portion are caused to be arranged in multi-domain pattern is, for example, to form either one of alignment protrusions and slits on the common electrode layer **1120a** and form the other one of alignment protrusions and slits on the first pixel electrode **1330a** and the second pixel electrode **1330b**.

Second Embodiment

[0030] FIG. 2 is a schematic circuit diagram of a pixel unit **200** in an MVA LCD according to a second embodiment. The arrangement FIG. 2 is similar to that of FIG. 1B with the difference being that in the pixel unit **200** of the second embodiment, the second pixel electrode **2330b** electrically connects to the active component **1316** through a resistance component **2318**. Note that the resistance component **2318** is a transistor but it can also be a resistor or any other device capable of generating a voltage drop. Additionally, the first pixel electrode **2330a** electrically connects to the active component **1316** directly. The gate of the component **2318** (if implemented as a transistor) is connected to the same scan line **1314** as the gate of the active component **1316**.

[0031] The first pixel electrode **2330a** corresponds to the location of the first domain set I and the second pixel

electrode **2330b** corresponds to the location of the second domain set II, so that the effective voltages applied on the liquid crystal layer **1200** portion in the first domain set I and that applied on the liquid crystal layer **1200** portion in the second domain set II are different (similar to what is illustrated in **FIG. 1A**). The voltage drop generated by resistance component **2318** will determine the effective voltage applied to the liquid crystal layer **1200** portion in the second domain set II (similar to what is illustrated in **FIG. 1A**).

[0032] In summary, it can be seen from the first and the second embodiments that the first pixel electrode corresponds to the location of the first domain set and the second pixel electrode corresponds to the location of the second domain set. Additionally, the first pixel electrode electrically connects to the active component directly while the second pixel electrode connects to the active component via a capacitance or a resistance component so that the effective voltage applied to the liquid crystal layer in the first domain set and that applied to the liquid crystal layer in the second domain set are different. In other implementations, instead of defining just two domain sets, additional domain sets can also be defined.

A First Variant of the Second Embodiment

[0033] **FIG. 2A** is a schematic circuit diagram of a pixel unit in an MVA LCD according to a variation of the second embodiment. This pixel unit is similar to the second embodiment with the main difference being the way in which the gate of transistor **2318** is connected. In **FIG. 2A**, the gate of transistor **2318** electrically connects to the source of the active component **1316** (rather than to scan line **1314** as in **FIG. 2**). This will cause a voltage on the data line **1312** to turn on the transistor **2318** so that an input voltage signal can be provided to the pixel electrode **2330b** once the scan line **1314** turns on the active component **1316**.

[0034] Note that the voltage signal output from data line **1312** may vary from one time frame to another time frame, which causes the channel size of the transistor **2318** to change with the varying voltage signal. Therefore, the transistor **2318** provides a variable resistance. This variable resistance will generate a voltage drop that can cause the voltage received by the first pixel electrode **2330a** (located in the first domain set I) to be different from that received by the second pixel electrode **2330b** (located in the second domain set II). In other words, the effective voltage applied on the liquid crystal layer in the first domain set I is different from that applied on the liquid crystal layer in the second domain set II.

A Second Variant of the Second Embodiment

[0035] **FIG. 2B** is a schematic circuit diagram of a pixel unit in an MVA LCD according to a second variant of the second embodiment. This pixel unit is similar to the second embodiment with the main difference being that in this second variant, the pixel unit further includes a shared line **2314a** which electrically connects to the gate of the transistor **2318**. Generally, the shared line **2314a** may electrically connect to a reference voltage source so that the transistor **2318** will stay in the on state. The transistor **2318** provides a resistance and it is this resistance that enables this second variant to generate a voltage drop so that the voltage

received by the first pixel electrode **2330a** (located in the first domain set) is different from that received by the second pixel electrode **2330b** (located in the second domain set II).

[0036] Additionally, the pixel unit of this second variant may further include a storage capacitor, C_s , which electrically connects the shared line **2314a** and the first active component **1316**. This storage capacitor C_s can be located inside the first domain set I or the second domain set II, or alternatively, be located inside both the first domain set I and the second domain set II.

Third Embodiment

[0037] **FIG. 3** is a sectional view of a pixel unit of a third embodiment. The third embodiment is similar to the first embodiment with the difference being that the pixel electrode **3320** of the third embodiment is not divided and a dielectric layer **3330** is disposed above the pixel electrode **3320** that corresponds to the location of the second domain set II. Such a dielectric layer is not provided in the first domain set I. The dielectric layer **3330** provides a dielectric constant between the pixel electrode **3320** and the liquid crystal layer **1200** portion in the second domain set II that is higher than the dielectric constant between the pixel electrode **3320** and the liquid crystal layer **1200** portion in the first domain set I, so that the effective voltage applied to the liquid crystal layer **1200** portion in the second domain set II is different from that applied on the liquid crystal layer **1200** portion in the first domain set I.

[0038] The dielectric layer **3330** can be made of, for example, resin or another dielectric material and it is also electrically connected to the active component. The dielectric constant and thickness of the dielectric layer **3330** will determine the effective voltage applied to the liquid crystal layer **1200** portion in the second domain set II.

[0039] Note that this embodiment is not limited to use of the alignment protrusions **1130** and **1340** in order to cause the liquid crystal molecules within the liquid crystal layer **1200** portion to be arranged in a multi-domain pattern. Another method by which the liquid crystal molecules within the liquid crystal layer **1200** portion are caused to arrange in multi-domain pattern is, for example, to form slits on both the active component array substrate **1300** and the opposite substrate **1100** at the same time. In another embodiment, alignment protrusions and slits are formed on the active component array substrate **1300** and the opposite substrate **110**.

Fourth Embodiment

[0040] **FIG. 4** is a sectional view of a pixel unit in an MVA LCD according to a fourth embodiment. The fourth embodiment is similar to the third embodiment with the difference being that the pixel electrode **4320** has a plurality of slits **4322** and these slits **4322** are at a location that corresponds to that of the second domain set II. Additionally, the pixel electrode **4320** is also provided with alignment protrusions **1340** and the alignment protrusions **1340** are at a location that corresponds to that of the first domain set I. In other words, in this embodiment, the protrusions **1340** and slits **4322** are both formed on the active component array substrate **1300** so that the driving voltage applied to the liquid crystal layer **1200** portion in the first domain set I has a different characteristic as compared to the driving voltage

applied on the liquid crystal layer **1200** portion in the second domain set II, such that the first domain set I and the second domain set II will have different obliquities of liquid crystal molecules even with the same voltage input. This enables the two domain sets to compensate for the difference in brightness caused by changes in the viewing angle so that the problem of color drift is alleviated.

[0041] Note that in this embodiment, slits and alignment protrusions **1130** may also be formed on the opposite substrate **1100** while the alignment protrusions **1340** are formed on the active component array substrate **1300** so that the driving voltage applied to the liquid crystal layer **1200** portion in the first domain set I has a different characteristic as compared to the driving voltage applied on the liquid crystal layer **1200** portion in the second domain set II. Furthermore, in this embodiment, the alignment protrusions **1340**, **1130**, and slits **4322** combined will cause the liquid crystal molecules within the liquid crystal layer **1200** portion to be arranged in a multi-domain pattern. However, the method by which the liquid crystal molecules are caused to be arranged in multi-domain pattern is not limited to this kind of combination. For example, the alignment protrusions **1130** may be substituted by slits formed on the common electrode layer **1120** of the opposite substrate.

Fifth Embodiment

[0042] **FIG. 5A** is a sectional view of a pixel unit in an MVA LCD according to a fifth embodiment, and **FIG. 5B** is a chart of curves (for different distances) showing the relationship of driving voltage versus transmittance. The pixel electrode **5320** has a plurality of slits **5322** and **5324** and electrically connects to the active component. Additionally, the opposite substrate **1100** is provided with a plurality of alignment protrusions **1130** and the combination of the alignment protrusions **1130**, slits **5322** and **5324** will cause the liquid crystal molecules within the liquid crystal layer **1200** portion to arrange in a multi-domain pattern.

[0043] Each alignment protrusion **1130** is separated by a minimum first distance **D1** and a minimum second distance **D2** from slit **5324** and slit **5322**, respectively, on the two sides, respectively, of the protrusion **1130**. The first distance **D1** is different from (e.g., greater than) the second distance **D2**. Additionally, the space between each alignment protrusion **1130** and the slit **5324** is in the first domain set I, and the space between the alignment protrusion **1130** and the slit **5322** is in the second domain set II.

[0044] As the alignment protrusion **1130** has different minimum distances from slits **5324** and **5322**, the liquid crystal molecules **1210a** and **1210b** in the first and second domain sets, respectively, will have different rotation angles when subjected to the action of an electrical field so that different transmittances are generated even with the same voltage input.

[0045] In **FIG. 5B**, the horizontal axis represents the driving voltage, and the vertical axis represents the transmittance. Example distances for **D1**, **D2** represented in **FIG. 5B** are 15 μm (micron) (solid line), 20 μm (dashed line), and 25 μm (dotted line). Note that by $X \mu\text{m}$ it is meant that both the first distance **D1** and the second distance **D2** are $X \mu\text{m}$.

[0046] It can be seen from **FIG. 5B** that the wider the distance the higher the transmittance if the driving voltage is

kept unchanged. In other words, when the first distance **D1** is provided with the second distance **D2** as a pair (such as in the arrangement of **FIG. 5A**), the liquid crystal molecules at the location of the first domain set I and that at the location of the second domain set II will have different rotation angles when both are subjected to the action of the same electrical field. In other words, the driving voltage applied to the liquid crystal layer **1200** portion in the first domain set I and that applied on the liquid crystal layer **1200** portion in the second domain set II will have different characteristics. The higher the difference between the first distance **D1** and the second distance **D2**, the greater the difference between their driving voltage—transmittance curves. In some examples, the distance difference is greater than or equal to one μm . In other examples, the distance difference is greater than or equal to 10 μm .

[0047] In the embodiment of **FIG. 5A**, the opposite substrate **1100** is provided with first alignment structures (alignment protrusions **1130**) and the active component array substrate **1300** is provided with the second alignment structures (slits **5324** and **5322**) so that the liquid crystal molecules within the liquid crystal layer **1200** portion are arranged in a multi-domain pattern.

[0048] Alternatively, a different arrangement of the **FIG. 5A** embodiment can be used. For example, the first alignment structures can include slits and the second alignment structures can include slits **5324** and **5322**. Alternatively, the first alignment structures can include alignment protrusions **1130**, and the second alignment structures can include alignment protrusions. In yet another arrangement, the first alignment structures can include slits and the second alignment structures can include alignment protrusions.

Sixth Embodiment

[0049] **FIG. 6A** is a top view of the pixel unit of a sixth embodiment, and **FIG. 6B** is a graph of curves (for different form factors of slits) representing relationships of driving voltage versus normalized transmittance percentage. The pixel unit **600** includes an active component **1316** and a pixel electrode **6320**, wherein the pixel electrode **6320** electrically connects to the active component **1316**. Furthermore, the pixel electrode **6320** has a plurality of non-jagged slits **6322** and a plurality of jagged slits **6324**, wherein said non-jagged slits **6322** are in a location that corresponds to that of the first domain set I and said jagged slits **6324** are in a location that corresponds to that of the second domain set II.

[0050] In **FIG. 6B**, the horizontal coordinate represents the driving voltage, and the vertical coordinate represents the normalized transmittance percentage. Additionally, the solid line curve represents non-jagged slits and the dashed line curve represents jagged slits. It can be seen from **FIG. 6** that with the same driving voltage, an MVA LCD that uses non-jagged slits will have a higher transmittance. In other words, the driving voltage supplied to the liquid crystal layer **1200** portion in the first domain set I and that supplied to the liquid crystal layer **1200** portion in the second domain set II will have different voltage-transmittance characteristics.

Seventh Embodiment

[0051] **FIG. 7A** is a sectional view of a pixel unit **700** of an MVA LCD according to a seventh embodiment, and **FIG.**

7B is a schematic circuit diagram of the pixel unit **700**. The MVA LCD includes an opposite substrate **1100**, a liquid crystal layer **1200** portion, and an active component array substrate **1300**, wherein the liquid crystal layer **1200** portion is disposed between the active component array substrate **1300** and the opposite substrate **1100**. Additionally, the opposite substrate **1100** comprises a first substrate **1110** and a common electrode layer **1120** which is disposed on the surface of the first substrate **1110**, wherein the common electrode layer **1120** faces the active component array substrate **1300**.

[0052] The active component array substrate **1300** has a plurality of data lines **1312**, a plurality of scan lines **1314**, and a plurality of pixel units **700**, wherein the pixel units **700** are controlled by the corresponding data lines **1312** and scan lines **1314** (as shown in **FIG. 7B**). Additionally, the pixel unit **700** is disposed above a second substrate **1310** and includes a first active component **1316a**, a second active component **1316b**, a third active component **1316c**, a first pixel electrode **1331a**, a second pixel electrode **1331b**, and a capacitor **1319** (as shown in **FIG. 7B**). The first active component **1316a**, second active component **1316b**, and third active component **1316c** are each, for example, a thin film transistor or otherwise a three-end active component.

[0053] The first active component **1316a** electrically connects to the first pixel electrode **1331a** and the first pixel electrode **1331a** is in a location that corresponds to that of the first domain set I (as shown in **FIG. 7A**), wherein the first active component **1316a** electrically connects to the first pixel electrode **1331a** via, for example, its drain **1312a**. Additionally, the second active component **1316b** electrically connects to the second pixel electrode **1331b** and the second pixel electrode **1331b** is in a location that corresponds to that of the second domain set II (as shown in **FIG. 7A**), wherein the second active component **1316b** electrically connects to the first pixel electrode **1331a** via, for example, its drain **1312b**. Note that the drains **1312a** (of TFT **1316a**) and **1312b** (of TFT **1316b**) are, for example, formed at the same time with the data line **1312**, and gate **1314a** of the first active component **1316a** and gate **1314b** of the second active component **1316a** electrically connect to the scan line **1314**, separately. The sources of the active components **1316a**, **1316b** are connected to the data line **1312**.

[0054] In **FIG. 7B**, both the first active component **1316a** and the second active component **1316b** electrically connect to the data line **1312** and scan line **1314** corresponding to the pixel unit **700**, while the gate of the third active component **1316c** electrically connects to the next scan line **1315**, and the capacitor **1319** electrically connects to the second pixel electrode **1331b** through the third active component **1316c**. The gate of the third active component **1316c** electrically connects to the next scan line **1315** so that the scan line **1315** can turn on/off the third active component **1316c**. Additionally, the source of the third active component **1316c** electrically connects to the second pixel electrode **1331b** while the drain of the third active component **1316c** electrically connects to an electrode of the capacitor **1319**.

[0055] In this arrangement, voltage **V1** (at pixel electrode **1331a**) is the same as voltage **V2** (at pixel electrode **1331b**) when the first active component **1316a** and the second active component **1316b** are driven at the same time by the data line **1312** and scan line **1314**. However, when the next scan

line **1315** is activated to turn on the third active component **1316c**, the capacitor **1319** will cause the voltage **V2** to drop. At this time, both the first active component **1316a** and the second active component **1316b** are in the off state. This causes the driving voltage applied on the liquid crystal layer **1200** portion in the first domain set I and that applied on the liquid crystal layer **1200** portion in the second domain set II to have different voltage-transmittance characteristics.

[0056] The capacitor **1319** includes a first electrode **1319a** and a second electrode **1319b** (**FIG. 7A**), wherein the second electrode **1319b** is disposed below the first electrode **1319a**, and the first electrode **1319a**, the first pixel electrode **1331a** and the second pixel electrode **1331b** are of the same material, while the second electrode **1319b** and the data line **1312** are of the same material.

Eighth Embodiment

[0057] **FIG. 8** is a schematic circuit diagram of the pixel unit in an MVA LCD according to an eighth embodiment. In this embodiment, the pixel unit **800** includes a first active component **1316a**, a first pixel electrode **1331a**, a second active component **1316b**, and a second pixel electrode **1331b**. The gate of the first active component **1316a** electrically connects to the scan line **1314** (the n th line in **FIG. 8**) corresponding to the pixel unit **800**, and the first pixel electrode **1331a** electrically connects to the drain of the first active component **1316a**. The source of the first active component **1316a** is connected to the drain of the second active component **1316b**.

[0058] Additionally, the first pixel electrode **1331a** is in a location that corresponds to that of the first domain set I. The source of the second active component **1316b** electrically connects to the data line **1312** corresponding to the pixel unit **800**, and the gate of the second active component **1316b** electrically connects to the next scan line **1314** (the $n+1$ th line as shown in **FIG. 8**). The second active component **1316b** is turned on or off by the next scan line **1314** (the $n+1$ th line as shown in **FIG. 8**). Furthermore, the second pixel electrode **1331b** is electrically connected to both the second active component **1316b** and the first active component **1316a** and is in a location that corresponds to that of the second domain set II.

[0059] Specifically, when the n th scan line **1314** is activated to turn on the first active component **1316a**, the signal voltage of the $(k-1)$ th time frame (previous time frame) retained at the second pixel electrode **1331b** will be written to the first pixel electrode **1331a** (located in the first domain set I) as voltage **V1**. Next, when the $(n+1)$ th scan line **1314** activates to turn on the second active component **1316b**, the data line **1312** will write the signal voltage of the k th time frame to the second pixel electrode **1331b** (located in the second domain set II) as voltage **V2**. Note that at this time the first active component **1316a** is off.

[0060] This will cause the liquid crystal molecules disposed in the first domain set I and the second domain set II to receive different effective voltages. In other words, the obliquity of the liquid crystal molecules in these two domain sets (first domain set I and second domain set II) will be different so that the transmittance will differ as well. This enables the two domain sets (I and II) to compensate each other to provide viewers a wider angle of view.

[0061] Note that the display quality of an MVA LCD panel according to some embodiments of the invention will be improved by changing the surface area ratio of the first domain set I to the second domain set II in the above embodiments.

[0062] In summary, an MVA LCD according to some embodiments may have at least the following features:

[0063] I. The MVA LCD has multiple domains, in which the liquid crystal molecules have the same alignment but different obliquity so that changes in brightness due to viewing angle changes will be reduced to improve the display quality.

[0064] II. The MVA LCD does not need an additional light shield and is compatible with existing manufacturing facilities.

[0065] While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

1. A multi-domain vertically aligned liquid crystal display, comprising:

an active component array substrate which has a plurality of pixel units;

an opposite substrate; and

a liquid crystal layer, which is disposed between said active component array substrate and said opposite substrate, wherein said liquid crystal layer proximal each pixel unit is divided into a plurality of domain sets, each of which has plural domains, and the effective voltage supplied to said liquid crystal layer in each domain set is different.

2. The display of claim 1, wherein said opposite substrate has a common electrode layer which faces said active component array substrate, the display further comprising a plurality of scan lines and a plurality of data lines, and each of said pixel unit is controlled by one of said scan lines and one of said data line.

3. The display of claim 2, wherein said domain sets includes a first domain set and a second domain set.

4. The display of claim 3, wherein each pixel unit includes:

a thin film transistor;

a first pixel electrode electrically connected to the active component and being in a location that corresponds to the first domain set;

a metal layer electrically connected to said first pixel electrode; and

a second pixel electrode coupled to said metal layer to form a capacitance and being in a location that corresponds to the second domain set.

5. The display of claim 4, wherein each pixel unit further includes a shared line and said metal layer is located above said shared line.

6. The display of claim 3, wherein each pixel unit includes:

a thin film transistor;

a first pixel electrode electrically connected to said thin film transistor and is in a location that corresponds to said first domain set;

a resistance component electrically connected to said thin film transistor; and

a second pixel electrode electrically connected to said resistance component and is in a location that corresponds to said second domain set.

7. The display of claim 6, wherein said resistance component includes a transistor driven simultaneously with said thin film transistor.

8. The display of claim 6, wherein said resistance component includes a transistor and each pixel unit further includes:

a shared line electrically connected to said transistor of the resistance component for turning on said transistor; and

a storage capacitor electrically connected to said shared line and said thin film transistor.

9. The display of claim 3, wherein each pixel unit includes:

a thin film transistor;

a pixel electrode electrically connected to said thin film transistor; and

a dielectric layer disposed above said pixel electrode and is in a location that corresponds to the second domain set, the dielectric layer not in a location that corresponds to the first domain set.

10. The display of claim 3, wherein each pixel unit includes:

a first thin film transistor;

a second thin film transistor;

a first pixel electrode electrically connected to said first thin film transistor and being in a location that corresponds to said first domain set;

a second pixel electrode electrically connected to said second thin film transistor and being in a location that corresponds to said second domain set;

a third thin film transistor, wherein said first thin film transistor and said second thin film transistor are electrically connected to said scan line and said data line corresponding to said pixel unit, and said third thin film transistor is turned on or off by a next scan line; and

a capacitor electrically connected to said second pixel electrode through said third thin film transistor.

11. The display of claim 10, wherein said capacitor includes:

a first electrode; and

a second electrode disposed below said first electrode, wherein said first electrode, said first pixel electrode, and said second pixel electrode are of the same material, and said second electrode is of the same material as said data line

12. The display of claim 3, wherein each pixel unit includes:

- a first thin film transistor electrically connected to said scan line corresponding to said pixel unit;
- a first pixel electrode electrically connected to said first thin film transistor and being in a location that corresponds to said first domain set;
- a second thin film transistor electrically connected to said data line corresponding to the pixel unit and a next scan line, the second thin film transistor being controlled by a next scan line; and

a second pixel electrode electrically connected to said first thin film transistor and said second thin film transistor and being in a location that corresponds to said second domain set.

13. A multi-domain vertically aligned liquid crystal display, comprising:

- an active component array substrate having a plurality of pixel units;
- an opposite substrate having a common electrode layer; and
- a liquid crystal layer disposed between said active component array substrate and said opposite substrate,

wherein said liquid crystal layer proximal each pixel unit is divided into at least a first domain set and a second domain set, and each of said first domain set and said second domain set includes plural domains, and each pixel unit includes:

- a thin film transistor;
- a pixel electrode electrically connected to said thin film transistor and having at least one slit, the location of the at least one slit corresponding to said second domain set; and
- at least one alignment protrusion disposed on said pixel electrode and being at a location that corresponds to said first domain set.

14. A multi-domain vertically aligned liquid crystal display, comprising:

- an active component array substrate having a plurality of pixel units;
- an opposite substrate having a common electrode layer and first alignment structures disposed on said common electrode layer; and
- a liquid crystal layer disposed between said active component array substrate and said opposite substrate,

wherein said liquid crystal layer proximal each said pixel unit is divided into a first domain set and a second

domain set, and each of said first domain set and said second domain set includes plural domains, and each pixel unit includes:

- a thin film transistor;
- a pixel electrode electrically connected to said thin film transistor; and

second alignment structures disposed on said pixel electrode, wherein each first alignment structure has a minimum first distance and a minimum second distance from said closest second alignment structures on either side of the first alignment structure, said first distance and said second distance being different.

15. The display of claim 14, wherein a space between each said first alignment structure and a first of the second alignment structures is in a location that corresponds to the first domain set, and a space between said first alignment structure and a second of the second alignment structures is in a location that corresponds to the second domain set.

16. The display of claim 14, wherein said first alignment structures are alignment protrusions.

17. The display of claim 14, wherein said second alignment structures are slits.

18. The display of claim 14, wherein said first distance differs from said second distance by 1 μm or more.

19. The display of claim 14, wherein said first distance differs from said second distance by 10 μm or more.

20. A multi-domain vertically aligned liquid crystal display, comprising:

- an active component array substrate having a plurality of pixel units;
- an opposite substrate having a common electrode layer; and
- a liquid crystal layer disposed between said active component array substrate and said opposite substrate,

wherein said liquid crystal layer proximal each pixel unit is divided into a first domain set and a second domain set, and each of said first domain set and said second domain set includes plural domains, and each pixel unit includes:

- a pixel electrode electrically connected to said thin film transistor and having a plurality of non-jagged slits and a plurality of jagged slits, wherein said non-jagged slits are in a location that corresponds to said first domain set and said jagged slits are in a location that corresponds to said second domain set.

* * * * *

专利名称(译)	多域垂直排列的液晶显示器		
公开(公告)号	US20060103800A1	公开(公告)日	2006-05-18
申请号	US11/261944	申请日	2005-10-28
[标]申请(专利权)人(译)	李汪洋 HSU CHE MING HSU英豪 HSIEH明峰 HSIEH CHIH YUNG 何林我		
申请(专利权)人(译)	李玉扬 HSU CHE-MING 许皓鹰 HSIEH明峰 HSIEH CHIH-YUNG 我HO-LIN		
当前申请(专利权)人(译)	群创光电		
[标]发明人	LI WANG YANG HSU CHE MING HSU YING HAO HSIEH MING FENG HSIEH CHIH YUNG HO I LIN		
发明人	LI, WANG-YANG HSU, CHE-MING HSU, YING-HAO HSIEH, MING-FENG HSIEH, CHIH-YUNG HO, I-LIN		
IPC分类号	G02F1/1337		
CPC分类号	G02F1/133707 G02F2203/20 G02F2001/134345 G02F1/1393		
优先权	093132909 2004-10-29 TW 094135843 2005-10-14 TW		
外部链接	Espacenet USPTO		

摘要(译)

多域垂直配向液晶显示器 (MVA LCD) 包括有源元件阵列基板，相对基板和液晶层。有源元件阵列基板具有多个像素单元，液晶层设置在有源元件阵列基板和对向基板之间。靠近每个像素单元的液晶层被分成多个域组。每个域集都有多个域。

