



(11) **EP 1 091 340 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
19.03.2008 Bulletin 2008/12

(51) Int Cl.:
G09G 3/32^(2006.01)

(21) Application number: **00121697.7**

(22) Date of filing: **04.10.2000**

(54) **Driving device and driving method of organic thin film EL display**

Verfahren und Einrichtung zur Steuerung eines organischen Dünnschicht-
Elektrolumineszenzanzeigerät

Méthode et dispositif de commande d'un dispositif d'affichage à couche mince électroluminescente
organique

(84) Designated Contracting States:
DE GB

(30) Priority: **05.10.1999 JP 28416799**

(43) Date of publication of application:
11.04.2001 Bulletin 2001/15

(73) Proprietor: **NEC CORPORATION**
Tokyo (JP)

(72) Inventors:
• **Iketsu, Yuichi**
Tokyo (JP)

• **Sakaguchi, Yoshikazu**
Tokyo (JP)

(74) Representative: **Glawe, Delfs, Moll**
Patentanwälte
Postfach 26 01 62
80058 München (DE)

(56) References cited:
US-A- 5 552 677 **US-A- 5 844 368**
US-A- 5 923 308

• **PATENT ABSTRACTS OF JAPAN** vol. 014, no. 317
(P-1073), 9 July 1990 (1990-07-09) -& JP 02 103590
A (NEC KANSAI LTD), 16 April 1990 (1990-04-16)

EP 1 091 340 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a driving device and a driving method of an organic thin film electroluminescent (EL) display. In particular, the present invention relates to a driving device and a driving method of an organic thin film EL display with reduced power consumption.

DESCRIPTION OF THE RELATED ART

[0002] An example of conventional methods for driving an organic thin film EL display is described in US-A-5 844 368 (Japanese Patent Laid-Open Publication No. Hei 9-232074). Fig. 1 is a circuit diagram of the prior art showing an example of a conventional configuration where data electrodes X_i and scanning electrodes Y_j arrayed in a matrix are passively driven. A blanking period is provided between display periods. All the switching circuits 9_i , 7_j are switched to the ground side in response to a blanking pulse transmitted during this period. As a result, residual electric charges accumulated in all the data lines are discharged. In Fig. 1, reference numeral 2 is an image memory, reference numeral 8 is a driving circuit, reference numeral 4 is an organic thin film EL display, reference numeral 5 is a scanning circuit, reference numeral 51 is a sift register, and reference numeral 6_j is an OR circuit.

[0003] A pixel $P(i, j)$ is taken for example here. If a scanning electrode Y_j to which this pixel $P(i, j)$ belongs is selected, that is, the pixel $P(i, j)$ is in a turned-off state during a display period T_j , a reverse bias is applied to the parallel capacitors of all the pixels $P(i, 1)$ to $P(i, j-1)$ and $P(i, j+1)$ to $P(i, n)$ belonging to a data electrode X_i except for the pixel $P(i, j)$. If a shift is made to the next display period $T(j+1)$ in this state and a pixel $P(i, j+1)$ is turned on, current from a current source circuit 8_i connected to the data electrode X_i is first used to cancel charge of the aforementioned reverse-biased parallel capacitors. Consequently, a long delay develops before the pixel $P(i, j+1)$ actually starts emitting light, and thereby a large-capacitance display is not enabled. Thus, a certain effect can be made by providing a blanking period t_j between the display period T_j and the display period $T(j+1)$ and applying the data electrode X_i to the ground potential during this blanking period to cancel the charge of the reverse-biased parallel capacitor of the pixel $P(i, 1)$ to $P(i, j-1)$ and $P(i, j+1)$ to $P(i, n)$.

[0004] However, if the pixel $P(i, j)$ is in a turned-on state during the display period T_j , all the pixels $P(i, 1)$ to $P(i, j-1)$ and $P(i, j+1)$ to $P(i, n)$ belonging to the data electrode X_i except for the pixel $P(i, j)$ are almost zero-biased. Since the parallel capacitor of the pixel $P(i, j)$ is forward-biased, applying the data electrode X_i to the ground potential during the blanking period t_j is not only almost useless, but also electric charges in the forward-biased parallel

capacitor of the pixel $P(i, j)$ are wasted.

[0005] An object of the present invention is to provide a driving device and a driving method of an organic thin film EL display with power consumption reduced by a configuration where electric charges accumulated in a display element are used to assist a display element to emit light during the next display period. <Patent Abstracts of Japan, Vol. 014, No. 317 (P-1073) & JP 02 103590 A discloses a driving method for a matrix type display. To decrease the number of charging and discharging times of an EL cell and to reduce electric power consumption a data comparator circuit is added to the data driver circuit which compares the data at the time of present scanning and the data at the time of next scanning to determine whether the charge of the EL cell is discharged or held.> <<This object is achieved by a driving device according to claim 1 and by a method for driving a display according to claim 5; the dependent claims are related to further developments of the invention.>>

[0006] If an image signal voltage $S(i, j)$ for the current display period is larger than an image signal voltage $S(i, j+1)$ for the next display period, the controller controls the data electrode on the currently displaying scanning electrode so that residual electric charges are discharged during the blanking period immediately before the next display period. If an image signal voltage $S(i, j)$ for the current display period is equal to or less than an image signal voltage $S(i, j+1)$ for the next display period, the controller controls the data electrode so that the residual electric charges are not discharged.

[0007] Further, the controller also controls a discharge circuit which holds the data electrode at the ground level, for example.

[0008] Also provided is an image memory having a memory capacity at least enough for $2 \times m$ (m : the number of data electrodes). The signal voltage applied to each data electrode on the currently displaying scanning electrode for a display period and the signal voltage applied to the data electrode on the scanning electrode for the next display period are stored in this image memory so that the comparator can compare the data in the image memory.

[0009] The driving device of an organic film EL display also has the same number of discharge circuits as, for example, the number of data electrodes (m).

[0010] According to the driving device and the driving method of an organic thin film EL display of the present invention, residual electric charges which are conventionally discharged uniformly from all the data electrodes during the blanking period are discharged individually from each data electrode. That is, since residual electric charges do not need to be discharged from a data electrode during the blanking period if the signal voltage for the current display period is not larger than the signal voltage for the next display period, a wasted outflow of electric charges can be prevented by detecting such an electrode. Thus, the first effect of the present invention is electric power saving. It is particularly effective to a

display pattern such that all of display elements (pixels) are turned on or the like, where signal voltage applied to each data electrode does not decrease.

[0011] According to the present invention, the second effect of the present invention is the improvement of responsiveness when a pixel emits light and the improvement of brightness since residual electric charges which are not discharged during the blanking period are contributed to the charge of the parallel capacitor of a pixel which should emit light during the next display period.

[0012] The nature, principle, and utility of the invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings in which like parts are designated by like reference numerals or characters.

In the accompanying drawings:

Fig. 1 is a circuit diagram of the prior art;

Fig. 2 is a circuit diagram showing a driving device of an organic thin film EL display according to an example which is not part of the present invention;

Fig. 3 is a timing chart illustrating a specific operation of the example which is not part of the present invention;

Fig. 4 is a circuit diagram illustrating a current flow and a state that electric charges are accumulated during a display period T_j in the example which is not part of the present invention;

Fig. 5 is a circuit diagram illustrating a state that electric charges are discharged during a blanking period t_j when $S(i, j) > S(i, j+1)$;

Fig. 6 is a circuit diagram illustrating a current flow and a state that electric charges are transferred during a display period $T(j+1)$ when $S(i, j) \leq S(i, j+1)$;

Fig. 7 is a circuit diagram showing a driving device of an organic thin film EL display according to an embodiment of the present invention; and

Fig. 8 is a perspective view showing a structure of an organic thin film EL display.

[0013] Embodiments of the driving device and driving method of an organic thin film EL display according to the present invention will be described in detail below with reference to accompanying drawings.

[0014] The driving device of an organic thin film EL display according to the present invention is characterized in that, when data electrodes and scanning electrodes arrayed in a matrix are passively driven, residual electric charges which are uniformly discharged from all the data electrodes in a conventional manner during a blanking period are discharged individually from each data electrode.

[0015] As shown in Fig. 2, a compare circuit 1i provided for a data electrode X_i ($i = 1$ to m : m is the number of data electrodes) reads the image signal voltage $S(i, j)$ ($j = 1$ to n : n is the number of the scanning electrodes) for the current display period and the image signal voltage $S(i, j+1)$ for the next display period from an image memory

2 to compare them. During a blanking period immediately before the next display period, the discharge circuit 3i controls the quantity of residual electric charges discharged from the data electrode X_i depending on this comparison result. That is, the data electrode X_i is controlled depending on the comparison result so that residual electric charges are discharged or not.

[0016] Figs. 2 to 6 show the driving device of organic thin film EL display according to the example which is not part of the present invention. Fig. 3 is a timing chart of the example which is not part illustrating an operation of the example which is not part of the present invention. Fig. 4 is a circuit diagram illustrating a current flow and a state that electric charges are accumulated during a display period T_j in the example which is not part of the present invention. Fig. 5 is a circuit diagram illustrating a state that electric charges are discharged during a blanking period t_j when $S(i, j) > S(i, j+1)$. Fig. 6 is a circuit diagram illustrating a current flow and a state that electric charges are transferred during a display period $T(j+1)$ when $S(i, j) \leq S(i, j+1)$.

[0017] These figures show a driving device of an organic thin film EL display constituted such that display elements $P(i, j)$ composed of organic thin film EL light-emitting elements are connected to respective intersections of data electrodes X_i ($i = 1$ to m) and scanning electrodes Y_j ($j = 1$ to n) arrayed in a matrix. While a scanning electrode is scanned at predetermined periods, the display element emits light in response to a signal applied to the data electrode in synchronization with the scanning.

[0018] The driving device has comparator 1i for comparing the signal voltage $S(i, j)$ applied to a display element $P(i, j)$ on a predetermined data electrode X_i on a scanning electrode Y_j for the current display period and the signal voltage $S(i, j+1)$ applied to the display element $P(i, j+1)$ on this data electrode X_i and on the scanning electrode $Y(j+1)$ for the next display period.

[0019] The driving apparatus also has controller 3i for controlling a quantity of residual electric charges discharged from the data electrode on the currently displaying scanning electrode Y_j during a blanking period immediately before the next display period depending on the comparison result by the comparator.

[0020] In a first case ($S(i, j) > S(i, j+1)$), the controller 3i controls the data electrode X_i on the currently displaying scanning electrode Y_j so that residual electric charges are discharged during the blanking period immediately before the next display period. In a second case ($S(i, j) \leq S(i, j+1)$), the controller 3i controls the data electrode X_i so that the residual electric charges are not discharged.

[0021] The controller 3i controls a discharge circuit which holds the data electrode in the ground level.

[0022] An image memory 2 having a memory capacity at least enough for $2 \times m$ (m : the number of data electrodes) is also provided. The signal voltage $S(1, j)$ to $S(m, j)$ applied to each data electrode X_1 to X_m on scan-

ning electrode Y_j for the current display period and the signal voltage $S(1, j+1)$ to $S(m, j+1)$ applied to each data electrode X_1 to X_m on the scanning electrode $Y(j+1)$ for the next display period are stored in this image memory 2 so that the comparator 11 to 1m can compare the data in the image memory 2.

[0023] The driving apparatus for driving an organic thin film EL display is also characterized by having the same number of discharge circuits as the number of data electrodes (m).

[0024] The example which is not part of the present invention will be described in further detail below. Fig. 8 is a perspective view showing a structure of an organic thin film EL display.

[0025] Fig. 8 shows a common structure of an organic thin film EL display 4 driven by the present invention. In Fig. 8, an organic thin film EL display 4 is composed of a number (m) of data electrodes X_i ($i = 1 - m$) and a number (n) of scanning electrodes Y_j ($j = 1 - n$) formed orthogonally to each other on a substrate 41 and an organic thin film layer 42 interposed between these electrodes. As a substrate 41, light-transmittable glass, resin or the like is used. As a data electrode X_i , light-transmittable ITO, NESA film, metal thin film or the like is used. As a scanning electrode Y_j , Ag/Mg alloy, Al/Li alloy or the like is used. The organic thin film layer 42 is constituted by a plurality of organic laminated layer film composed of a hole implantation layer, hole transport layer, light-emitting layer, electron transport layer, electron implantation layer and so forth or a single layer film composed of only a light-emitting layer and is formed by a thin film forming technique such as a vacuum deposition method, spin-coating method, casting method or the like. In the above-described structure, when the data electrode X_i is charged as anode and the scanning electrode Y_j is charged as cathode, the organic light-emitting layer of the region interposed between the data electrode X_i and the scanning electrode Y_j emits light as a pixel $P(i, j)$. In Fig. 2, a pixel $P(i, j)$ is represented by a diode symbol and a capacitor connected in parallel with the diode. An image memory 2 is a memory circuit having a memory capacity at least enough for $2 \times m$ (m: the number of pixels) and can be achieved by a field memory, FIFO, DRAM, SRAM or the like. A scan circuit 5 is composed of a shift register 51, an OR circuit 6j and a switching circuit 7j. A driving circuit 8 is constituted by a current source circuit 8i for supplying current to the data electrode X_i depending on the image signal voltage $S(i, j)$ and a switching circuit 9i. A compare circuit 1i compares the image signal voltage $S(i, j)$ for the current display period and the image signal voltage $S(i, j+1)$ for the next display period read from the image memory 2 and controls the discharge circuit 3i during a blanking period. The simplest form of a discharge circuit 3i is a switching circuit.

[0026] The operation of the example which is not part of the invention will be described below.

[0027] Fig. 3 is a timing chart showing an operation of each part of Fig. 2.

[0028] When a start pulse is applied to a shift register 51, a shift is made in synchronization with a clock pulse. A switching circuit 7j is controlled by a shift pulse and a blanking pulse so that the scanning electrode Y_j is connected to the ground side when the control input is at a high level and connected to the power supply voltage VCC side when the control input is at a low level. On the other hand, the switching circuit 9i is controlled only by a blanking pulse so that the data electrode X_i is connected to the discharge circuit 3i when the control input is at a high level and connected to the current source circuit 8i when the control input is at a low level. Therefore, during a display period T_j , current is supplied from the current source circuit 8i to the data electrode X_i depending on the image signal voltage $S(i, j)$. As shown in Fig. 4, if $S(i, j) > 0$, the charge current flows in the order of the current source circuit 8i, the switching circuit 9i, the pixel $P(i, j)$, the switching circuit 7j and the ground (GND). Then, the pixel $P(i, j)$ emits light and electric charges are accumulated in the parallel capacitor. During this period, the image signal voltage $S(i, j)$ for the current display period and the image signal voltage $S(i, j+1)$ for the next display period are compared in the compare circuit 1i.

[0029] During a blanking period t_j , all the scanning electrodes Y_j have a ground potential by a blanking pulse applied to the OR circuit 6j. At this time, the data electrode X_i is connected to the discharge circuit 3i side, but the discharge circuit 3i is controlled by the compare circuit 1i as follows depending on the comparison result of the displayed image signal voltage $S(i, j)$ and the image signal voltage $S(i, j+1)$ for the next scanning period.

[0030] As shown in Fig. 5, if $S(i, j) > S(i, j+1)$, the discharge circuit 3i composed of switching circuits is turned on and electric charges accumulated in the pixel $P(i, j)$ are discharged. At this time, the discharge path is constituted in the order of the parallel capacitor of the pixel $P(i, j)$, the switching circuit 9i, the discharge circuit 3i, the ground, the switching circuit 7j and the parallel capacitor of the pixel $P(i, j)$.

[0031] On the contrary, as shown in Fig. 6, if $S(i, j) \leq S(i, j+1)$, the discharge circuit 3i is turned off, electric charges accumulated in the pixel $P(i, j)$ are not discharged and the parallel capacitor of the pixel $P(i, j+1)$ is charged during the next display period $T(j+1)$. At this time, the charge path is constituted in the order of the power supply (VCC), the switching circuit 7j, the parallel capacitor of the pixel $P(i, j)$, the parallel capacitor of the pixel $P(i, j+1)$, the switching circuit 7(j+1) and the ground.

[0032] Fig. 7 is a circuit diagram showing a driving device and a driving method of an organic thin film EL display according to an embodiment of the present invention.

[0033] Fig. 7 shows a driving device of an organic thin film EL display constituted such that display elements $P(i, j)$ composed of organic thin film EL light-emitting elements are connected to respective intersections of data electrodes X_i and scanning electrodes Y_j arrayed in a matrix. While a scanning electrode is scanned at prede-

terminated periods, the display element emits light in response to a signal applied to the data electrode in synchronization with the scanning.

[0034] The driving device has a comparator 1i (i = 1 to m) for comparing the signal voltage $S(i, j)$ applied to the display element P(i, j) on a predetermined data electrode on the scanning electrode Yj for the current display period and the signal voltage $S(i, j)$ applied to the display element on this data electrode and on the scanning electrode for the next display period.

[0035] The driving device also has a controller (discharge circuit 30i) for controlling a quantity of residual electric charges discharged from the data electrode on the currently displaying scanning electrode to a predetermined value during a blanking period immediately before the next display period depending on the comparison result by the comparator.

[0036] The embodiment will be described in further detail below. The discharge circuit 30i has a resistance and the comparator circuit 1i controls the resistance value of the discharge circuit 30i.

[0037] In reference to Fig. 7, the discharge circuit 30i is a current control circuit. Also, the compare circuit 1i is constituted by an arithmetic circuit to calculate $D(i, j) = S(i, j) - S(i, j+1)$ during the display period T_j . Then, if $D(i, j) \leq 0$, the current volume flow through the discharge circuit 30i during the blanking period t_j is restricted as maximum and residual electric charges are not discharged from the data electrode Xi. If $D(i, j) > 0$, the current volume flow through the discharge circuit 30i during the blanking period t_j is changed depending on the value of $D(i, j)$. That is, the smaller the $D(i, j)$ value is, the larger the current volume discharged through the discharge circuit 30i is restricted. By controlling as above, even if $S(i, j) > S(i, j+1)$, electric charges are not discharged wastefully from the data electrode during the blanking period. Thus, the electric power saving effect is further enhanced.

[0038] While there has been described what are at present considered to be preferred embodiments of the invention, it will be understood that various modifications may be made thereto, and so that all such modifications as fall within the scope of the invention as covered by the appended claims.

Claims

1. A driving device for an organic thin film EL display which comprises display elements composed of organic thin film EL light-emitting elements (P) connected to respective intersections of data electrodes (X) and scanning electrodes (Y) arrayed in a matrix; wherein while the scanning electrode (Y) is scanned at predetermined periods, the display element emits light in response to a signal applied to the data electrode (X) in synchronization with this scanning; said driving device comprising a comparator (1) adapted to compare a signal voltage

applied to the display element on a predetermined data electrode (X) and on the scanning electrode for the current display period and a signal voltage to be applied to the display element on this data electrode and on the scanning electrode for the next display period; and

a controller (30) adapted to control a quantity of residual electric charges discharged from the data electrode on the currently displaying scanning electrode during a blanking period immediately before the next display period depending on the comparison result by the comparator (1),

characterized in that

when the comparator (1) detects that the signal voltage for the current display period is smaller than or equal to the signal voltage for the next display period, the controller (30) performs control so as not to discharge the residual electric charges, and when the comparator (1) detects that the signal voltage for the current display period is larger than the signal voltage for the next display period, the controller (30) controls a quantity of discharge of the residual electric charges according to a difference between the signal voltage for the current display period and signal voltage for the next display period.

2. The driving device of an organic thin film EL display according to claim 1,

characterized in that

said controller (3, 30) controls a discharge circuit which holds said data electrode to the ground level.

3. The driving device of an organic thin film EL display according to claims 1 or 2,

characterized by further comprising

an image memory (2) having a memory capacity of at least enough for $2 \times m$ is provided, wherein m is the number of data electrodes;

wherein the signal voltage applied to each of the data electrodes (X) on the currently displaying scanning electrode for a display period is stored in said image memory (2);

the signal voltage applied to each of the data electrodes on the scanning electrode for the next display period is stored; and

the comparator (1) compares the data in the image memory.

4. The driving device of an organic thin film EL display according to claim 3,

characterized in that

the number of said discharge circuits is same as the number of the data electrodes (m).

5. A method of driving an organic thin film EL display comprising display elements composed of organic thin film EL light-emitting elements connected to respective intersections of data electrodes (X) and

scanning electrodes (Y) arrayed in a matrix; wherein a scanning electrode is scanned at predetermined periods, while a said display element emits light in response to a signal applied to the data electrode in synchronization with this scanning; said method comprising the steps of:

comparing a signal voltage applied to the display element on a predetermined data electrode and on the scanning electrode for the current display period and a signal voltage to be applied to the display element on the data electrode and on the scanning electrode for the next display period; and
controlling a quantity of residual electric charges discharged from the data electrode on the currently displaying scanning electrode during a blanking period immediately before the next display period depending on the comparison result by the comparing step,

characterized in that

when the comparing step indicates that the signal voltage for the current display period is smaller than or equal to the signal voltage for the next display period, the controlling is performed so as not to discharge the residual electric charges, and when the comparing step indicates that the signal voltage for the current display period is larger than the signal voltage for the next display period, the controlling step controls a quantity of discharge of the residual electric charges according to a difference between the signal voltage for the current display period and signal voltage for the next display period

Patentansprüche

1. Ansteuervorrichtung für ein organisches Dünnschicht-Elektrolumineszenz (EL)-Anzeigegerät mit Anzeigeelementen, die aus organischen, Licht emittierenden Dünnschicht-EL-Elementen (P) zusammengesetzt sind, die mit den jeweiligen Schnittpunkten von Datenelektroden (X) und Abtastelektroden (Y) verbunden sind, welche in einer Matrix angeordnet sind; wobei während des Abtastens der Abtastelektrode in vorbestimmten Perioden die Anzeigeelemente Licht in Antwort auf ein Signal emittieren, das an die Datenelektrode (X) synchron mit diesem Abtasten angelegt wird; wobei die Ansteuervorrichtung aufweist einen Komparator (1), der so ausgebildet ist, dass er eine an das Anzeigeelement an eine vorbestimmte Datenelektrode (X) und an die Abtastelektrode für die laufende Anzeigeperiode angelegte Signalspannung und eine Signalspannung, die an das Anzeigeelement an dieser Datenelektrode und an die Abtastelektrode für die nächste Anzeigeelektrode an-

gelegt wird, vergleicht; und

eine Steuerung (30), die so ausgebildet ist, dass sie die Menge der elektrischen Restladungen, die von der Datenelektrode an der derzeitigen Anzeigeelektrode während einer Dunkelsteuerungsperiode unmittelbar vor der nächsten Anzeigeperiode ausgegeben wird, in Abhängigkeit von dem Vergleichsergebnis durch den Komparator (1) steuert, **dadurch gekennzeichnet, dass**, wenn der Komparator (1) detektiert, dass die Signalspannung für die derzeitige Anzeigeperiode kleiner als oder gleich der Signalspannung für die nächste Anzeigeperiode ist, die Steuerung (30) eine Steuerung so durchführt, dass keine elektrischen Restladungen ausgegeben werden, und wenn der Komparator (1) detektiert, dass die Signalspannung für die derzeitige Anzeigeperiode größer als die Signalspannung für die nächste Anzeigeperiode ist, die Steuerung (30) die Menge der Entladung der elektrischen Restladungen in Übereinstimmung mit der Differenz zwischen der Signalspannung für die derzeitige Anzeigeperiode und der Signalspannung für die nächste Anzeigeperiode steuert.

2. Ansteuervorrichtung eines organischen Dünnschicht-EL-Anzeigegerätes nach Anspruch 1, **dadurch gekennzeichnet, dass** die Steuerung (3, 30) eine Entladeschaltung steuert, die die Datenelektrode auf dem Massepegel hält.
3. Ansteuervorrichtung eines organischen Dünnschicht-EL-Anzeigegerätes nach Anspruch 1 oder 2, weiterhin **gekennzeichnet durch** einen Bildspeicher (2) mit einer Speicherkapazität, die wenigstens ausreichend für $2 \times m$ ist, wobei m die Zahl der Datenelektroden ist; wobei die Signalspannung, welche an jede der Datenelektroden (X) an der derzeitigen Anzeigeelektrode für eine Anzeigeperiode angelegt wird, in dem Bildspeicher (2) gespeichert wird; die Signalspannung, welche an jede der Datenelektroden an der Abtastelektrode für die nächste Anzeigeperiode angelegt wird, gespeichert wird, und der Komparator (1) die Daten in dem Bildspeicher vergleicht.
4. Ansteuervorrichtung für ein organisches Dünnschicht-EL-Anzeigegerät nach Anspruch 3, **dadurch gekennzeichnet, dass** die Anzahl dieser Entladeschaltungen die gleiche wie die Anzahl der Datenelektroden (m) ist.
5. Verfahren zum Ansteuern eines organischen Dünnschicht-EL-Anzeigegerätes, das Anzeigeelemente aufweist, die aus organischen, Licht emittierenden Dünnschicht-EL-Elementen bestehen, die mit den jeweiligen Schnittpunkten der Datenelektroden (X) und der Abtastelektroden (Y) verbunden sind, wel-

che in einer Matrix angeordnet sind;
wobei eine Abtastelektrode in vorbestimmten Perioden abgetastet wird, während ein Anzeigeelement Licht in Antwort auf ein Signal emittiert, das an die Datenelektrode synchron mit diesem Abtasten angelegt wird; wobei das Verfahren die Schritte aufweist:

Vergleichen einer Signalspannung, die an das Anzeigeelement an einer vorbestimmten Datenelektrode und an der Abtastelektrode für die derzeitige Anzeigeperiode angelegt ist, und einer Signalspannung, die an das Anzeigeelement an der Datenelektrode und an der Abtastelektrode für die nächste Anzeigeperiode angelegt wird; und

Steuern der Menge der elektrischen Restladungen, die von der Datenelektrode an der derzeitigen Anzeigeabtastelektrode während einer Dunkelsteuerungsperiode unmittelbar vor der nächsten Anzeigeperiode ausgegeben werden, in Abhängigkeit von dem Vergleichsergebnis durch den Vergleichsschritt,

dadurch gekennzeichnet, dass,

wenn der Vergleichsschritt anzeigt, dass die Signalspannung für die derzeitige Anzeigeperiode kleiner als oder gleich der Signalspannung für die nächste Anzeigeperiode ist, die Steuerung so durchgeführt wird, dass keine elektrischen Restladungen ausgegeben werden, und wenn der Vergleichsschritt anzeigt, dass die Signalspannung für die derzeitige Anzeigeperiode größer als die Signalspannung für die nächste Anzeigeperiode ist, der Steuerungsschritt die Menge der ausgegebenen elektrischen Restladungen in Übereinstimmung mit der Differenz zwischen der Signalspannung für die derzeitige Anzeigeperiode und der Signalspannung für die nächste Anzeigeperiode steuert.

Revendications

1. Dispositif de commande d'un dispositif d'affichage à couche mince électroluminescente organique qui comprend des éléments d'affichage composés d'éléments émetteurs de lumière à couche mince électroluminescente organique (P) connectés à des intersections respectives d'électrodes de données (X) et d'électrodes de balayage (Y) assemblées dans une matrice ; dans lequel pendant que l'électrode de balayage (Y) est balayée à des périodes prédéterminées, l'élément d'affichage émet une lumière en réponse à un signal appliqué à l'électrode de données (X) en synchronisation avec ce balayage ; ledit dispositif de commande comprenant un comparateur (1) adapté pour comparer une tension de signal appliquée à l'élément d'affichage sur

une électrode de données prédéterminée (X) et sur l'électrode de balayage pour la période d'affichage actuelle avec une tension de signal à appliquer à l'élément d'affichage sur cette électrode de données et sur l'électrode de balayage pendant la période d'affichage suivante ; et

un contrôleur (30) adapté pour contrôler une quantité de charges électriques résiduelles déchargées de l'électrode de données sur l'électrode de balayage actuellement affichée pendant une période vierge immédiatement avant la période d'affichage suivante en fonction du résultat de la comparaison par le comparateur (1),

caractérisé en ce que

lorsque le comparateur (1) détecte que la tension de signal de la période d'affichage actuelle est inférieure ou égale à la tension de signal de la période d'affichage suivante, le contrôleur (30) procède à un contrôle afin de ne pas décharger les charges électriques résiduelles, et lorsque le comparateur (1) détecte que la tension de signal de la période d'affichage actuelle est supérieure à la tension de signal de la période d'affichage suivante, le contrôleur (30) contrôle une quantité de décharge des charges électriques résiduelles selon une différence entre la tension de signal de la période d'affichage actuelle et la tension de signal de la période d'affichage suivante.

2. Dispositif de commande d'un dispositif d'affichage à couche mince électroluminescente organique selon la revendication 1,

caractérisé en ce que

ledit contrôleur (3, 30) contrôle un circuit de décharge qui maintient ladite électrode de données au niveau de la mise à la terre.

3. Dispositif de commande d'un dispositif d'affichage à couche mince électroluminescente organique selon la revendication 1 ou 2,

caractérisé en ce qu'il comprend en outre

une mémoire d'image (2) comprenant une capacité de mémoire au moins suffisante pour $2 \times m$ prévus, dans lequel m représente le nombre d'électrodes de données,

dans lequel la tension de signal appliquée à chacun des électrodes de données (X) sur l'électrode de balayage actuellement affichée pour une période d'affichage est stockée dans ladite mémoire d'image (2) ;

la tension de signal appliquée à chacune des électrodes de données sur l'électrode de balayage pour la période d'affichage suivante est stockée ; et le comparateur (1) compare les données dans la mémoire d'image.

4. Dispositif de commande d'un dispositif d'affichage à couche mince électroluminescente organique selon

la revendication 3,

caractérisé en ce que

le nombre desdits circuits de décharge est identique au nombre d'électrodes de données (m).

5

5. Procédé de commande d'un dispositif d'affichage à couche mince électroluminescente organique comprenant des éléments d'affichage composés d'éléments émetteurs de lumière à couche mince électroluminescente organique connectés à des intersections respectives d'électrodes de données (X) et d'électrodes de balayage (Y) assemblées dans une matrice ; dans lequel une électrode de balayage est balayée à des périodes prédéterminées, alors qu'un dit élément d'affichage émet une lumière en réponse à un signal appliqué à l'électrode de données en synchronisation avec ce balayage ; ledit procédé comprenant les étapes consistant à :

10

15

comparer une tension de signal appliquée à l'élément d'affichage sur une électrode de données prédéterminée et à l'électrode de balayage pour la période d'affichage actuelle avec une tension de signal à appliquer à l'élément d'affichage sur l'électrode de données et sur l'électrode de balayage pendant la période d'affichage suivante ; et

20

25

contrôler une quantité de charges électriques résiduelles déchargées de l'électrode de données sur l'électrode de balayage actuellement affichée pendant une période vierge immédiatement avant la période d'affichage suivante en fonction du résultat de la comparaison de l'étape de comparaison,

30

35

caractérisé en ce que

lorsque l'étape de comparaison indique que la tension de signal de la période d'affichage actuelle est inférieure ou égale à la tension de signal de la période d'affichage suivante, l'étape de contrôle est exécutée afin de ne pas décharger les charges électriques résiduelles, et lorsque l'étape de comparaison indique que la tension de signal de la période d'affichage actuelle est supérieure à la tension de signal de la période d'affichage suivante, l'étape de contrôle commande une quantité de décharge des charges électriques résiduelles selon une différence entre la tension de signal de la période d'affichage actuelle et la tension de signal de la période d'affichage suivante.

40

45

50

55

FIG. 1

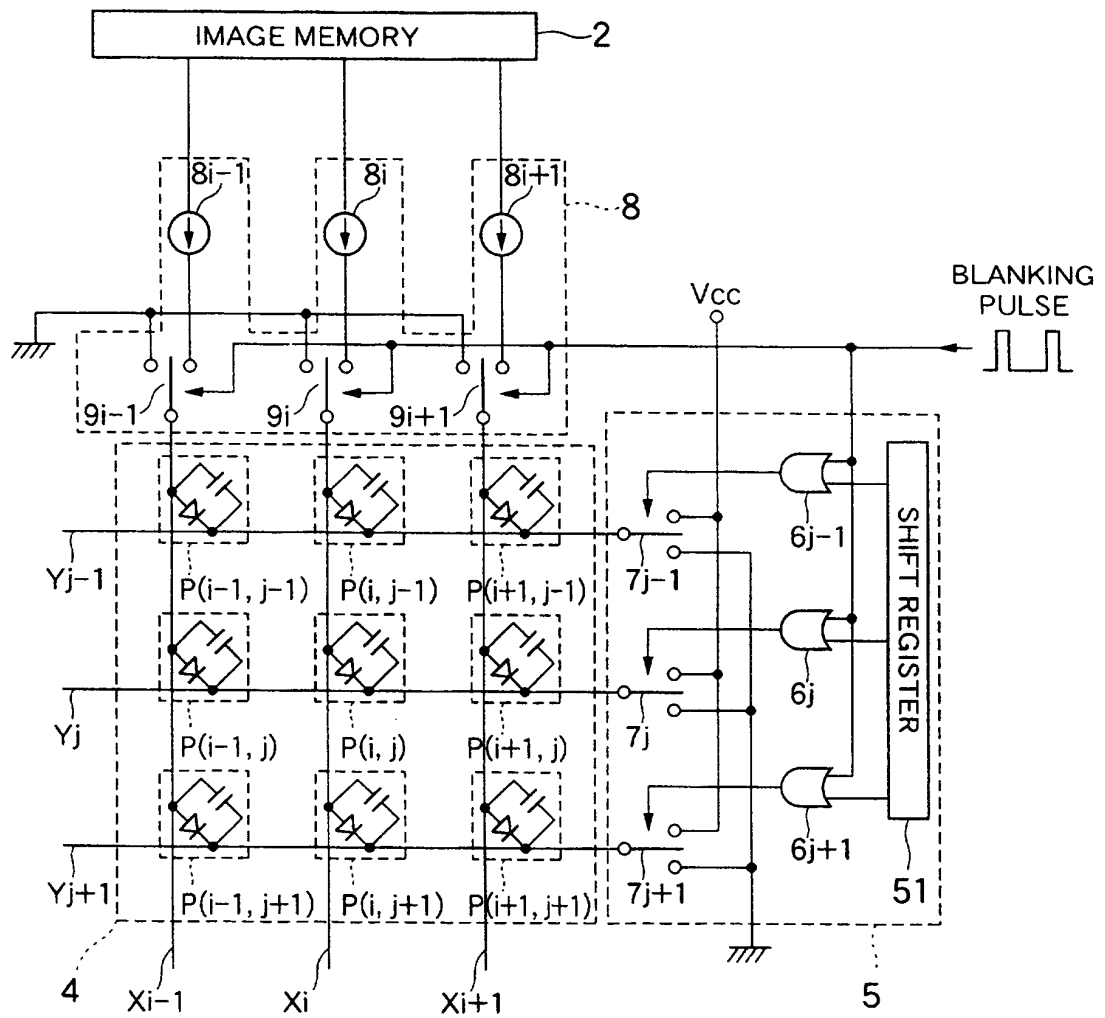


FIG. 2

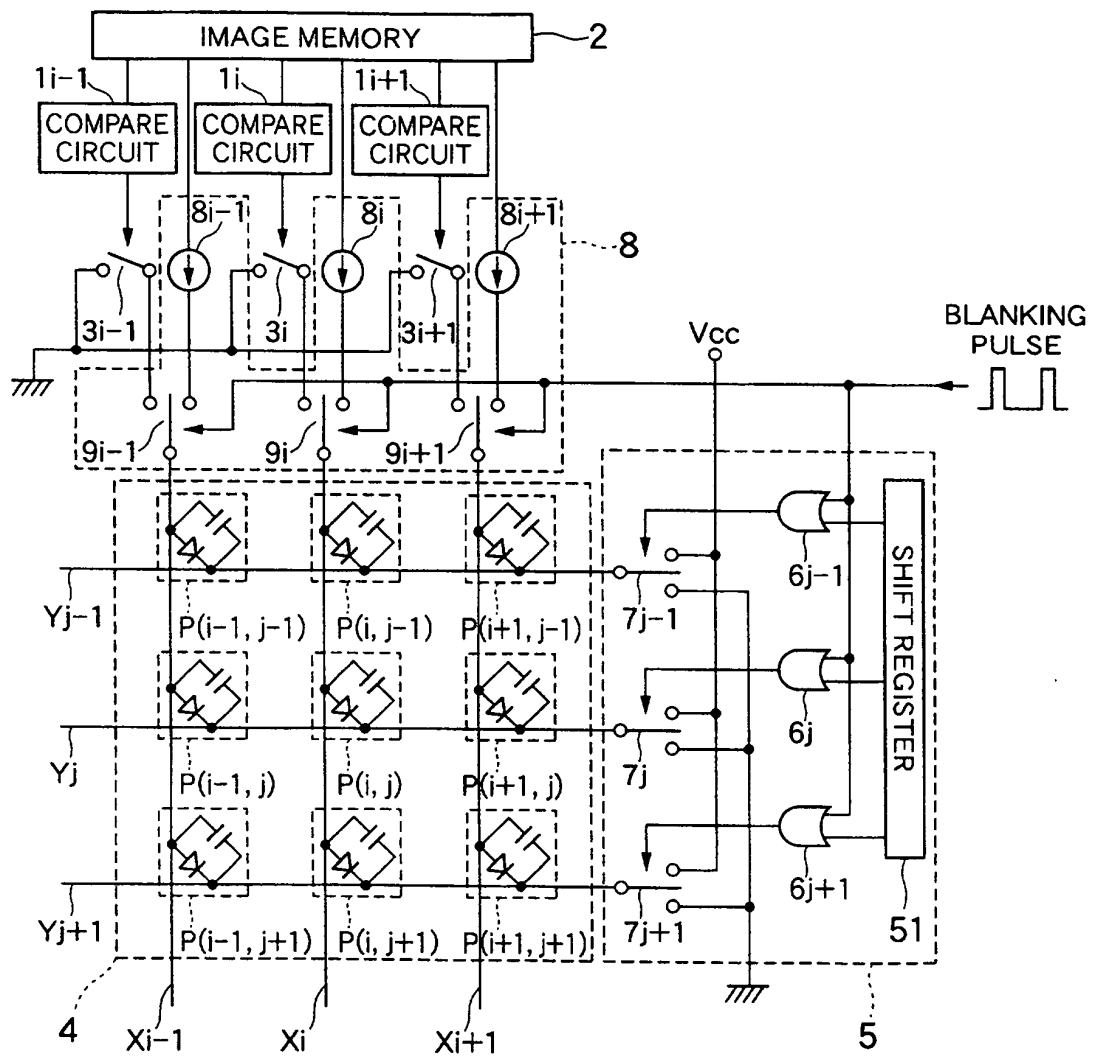


FIG. 3

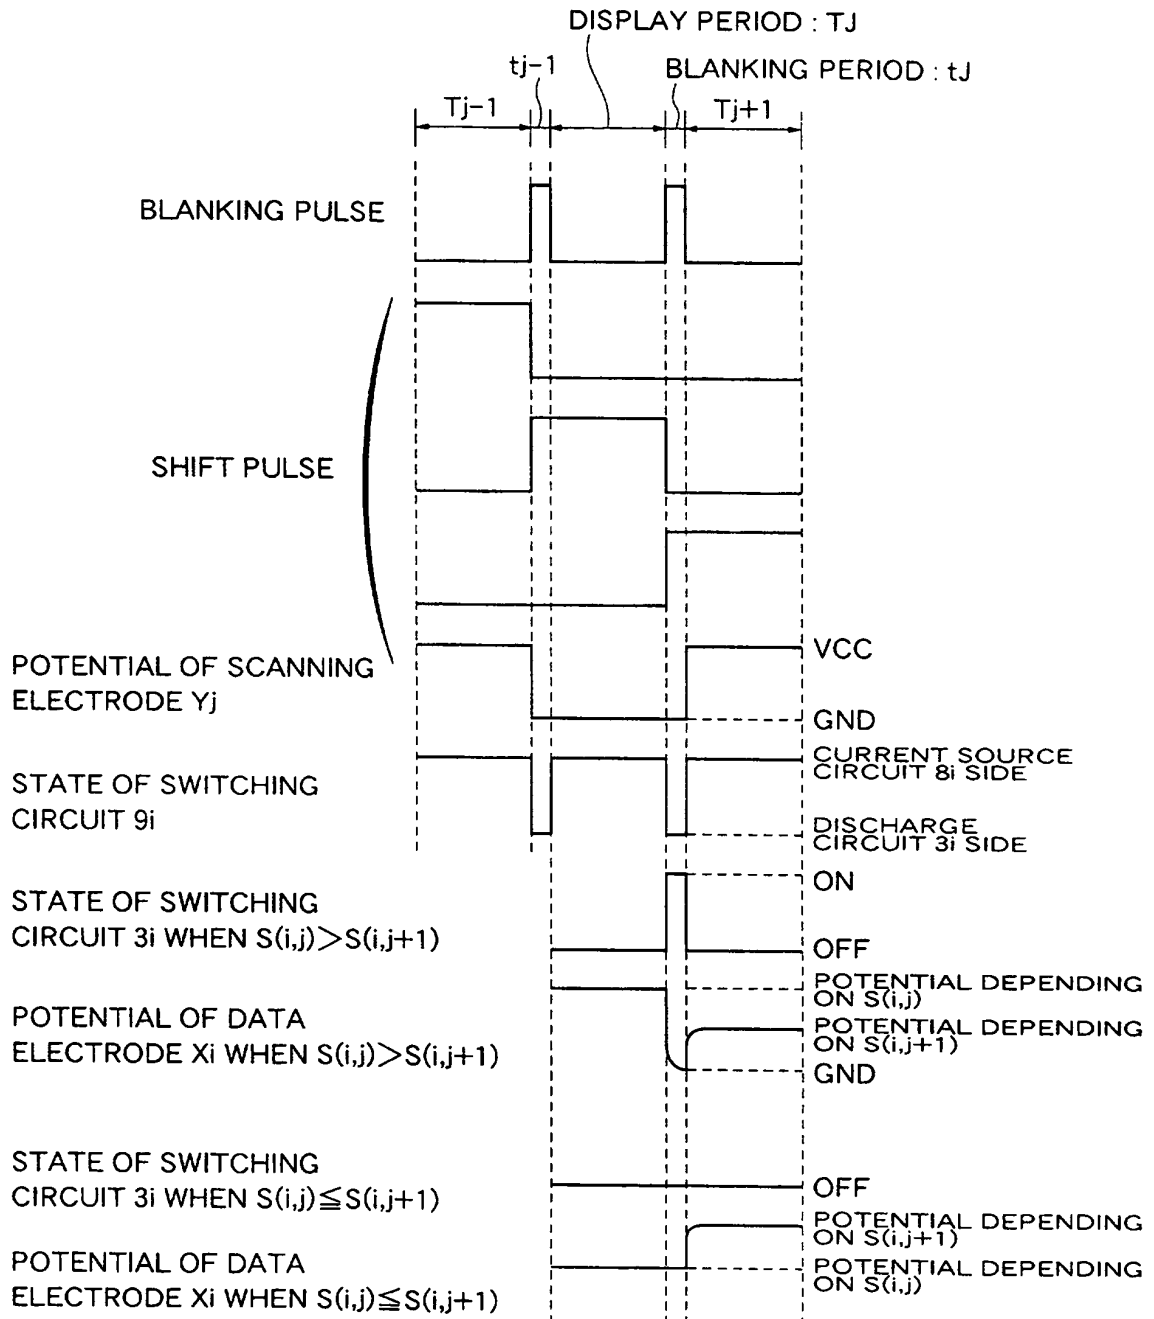


FIG. 4

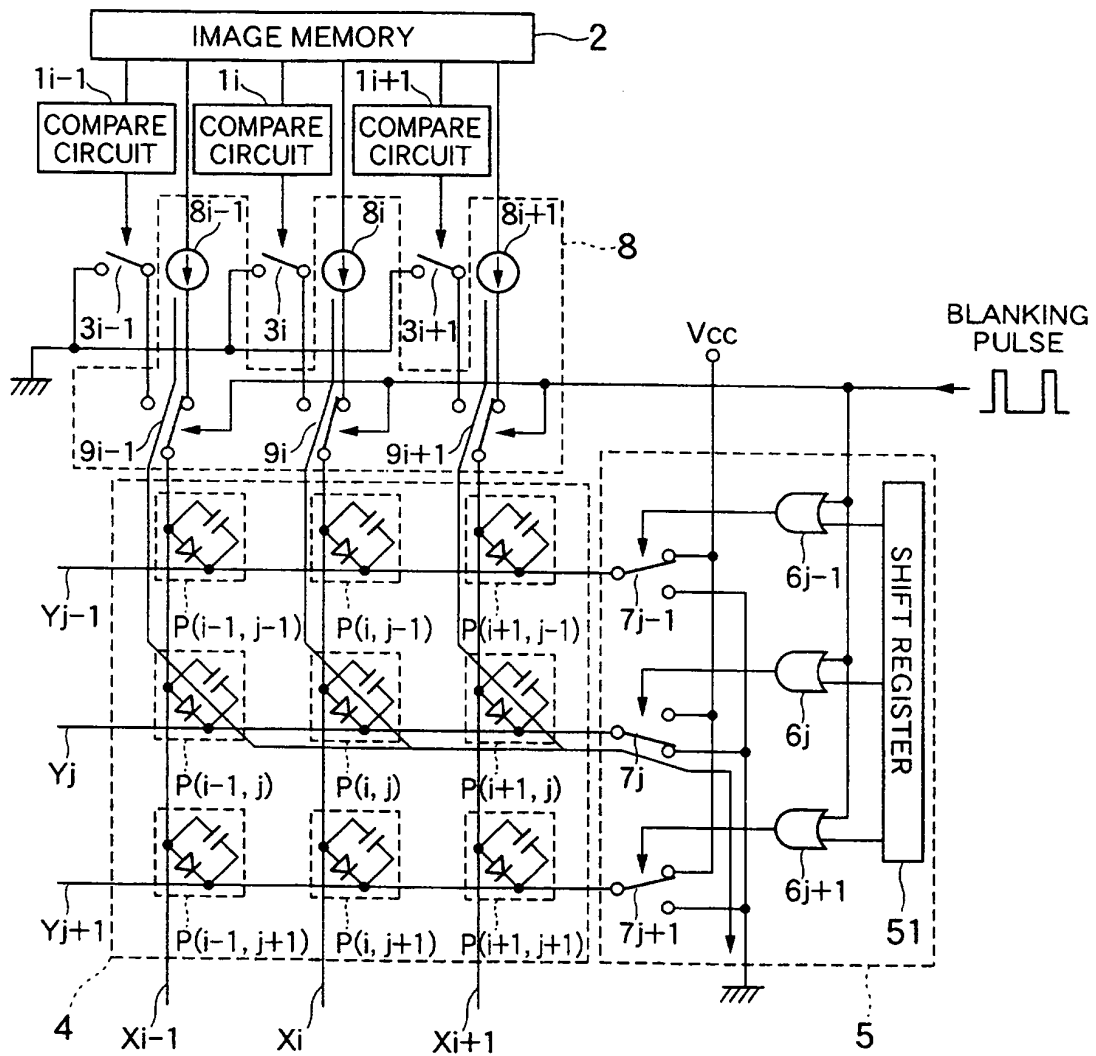


FIG. 5

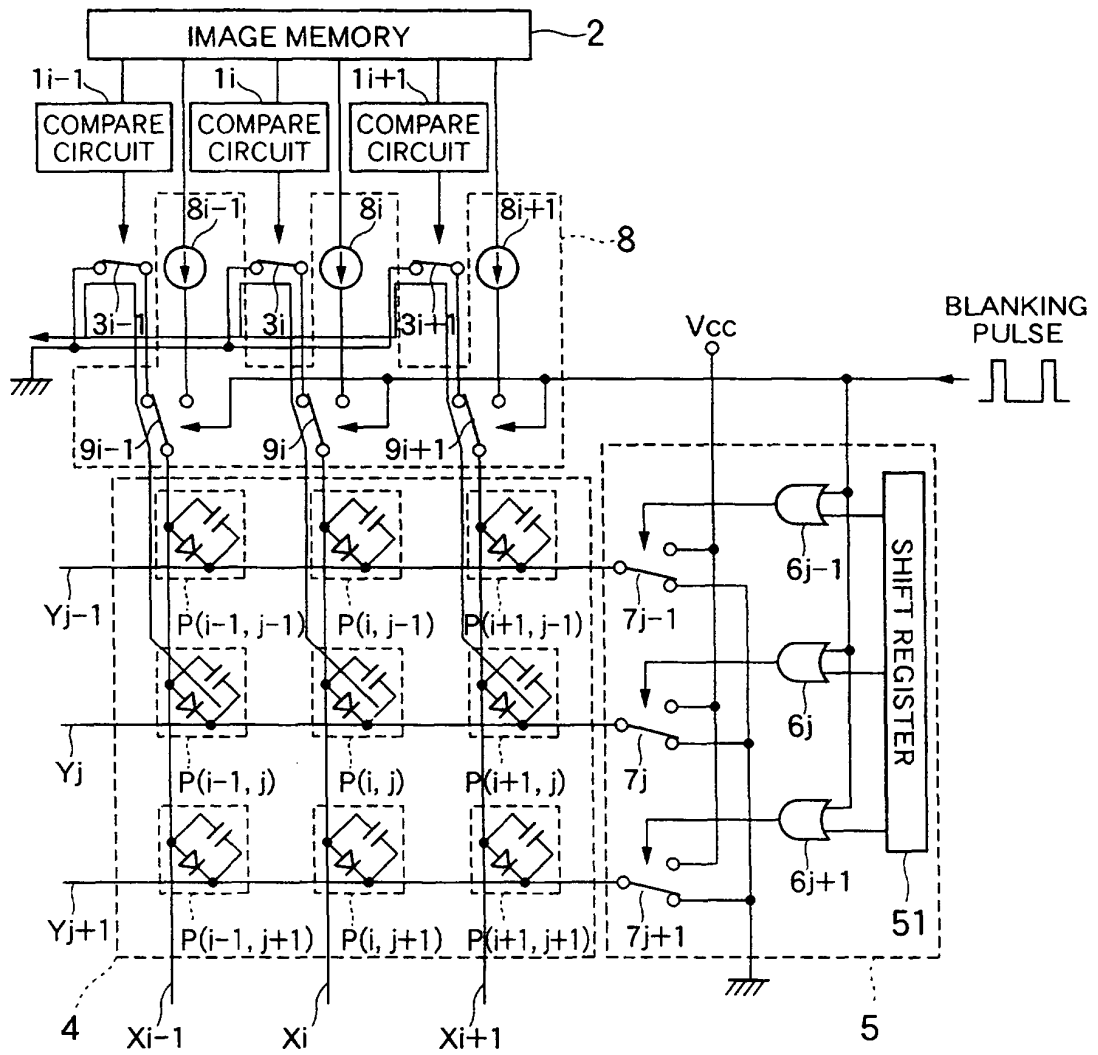


FIG. 6

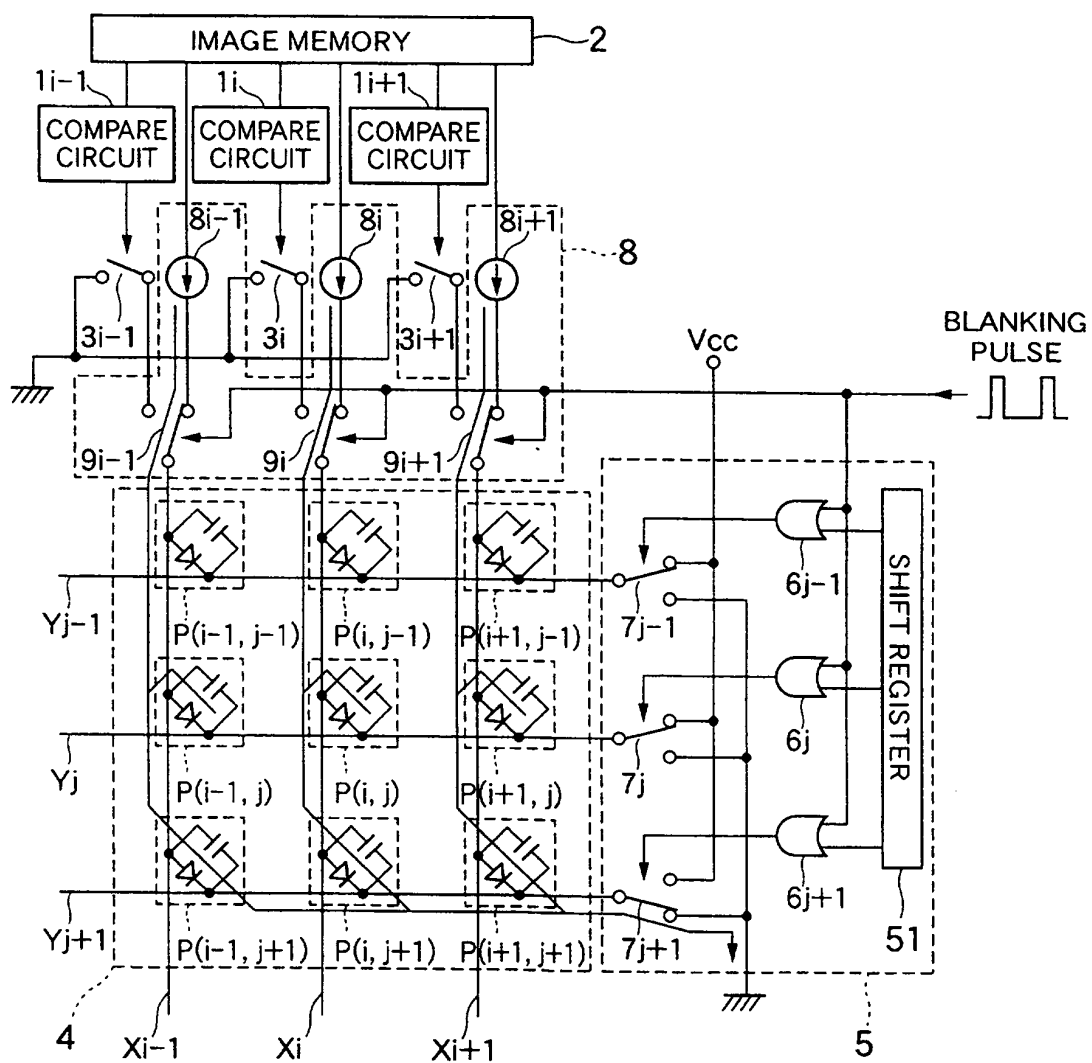


FIG. 7


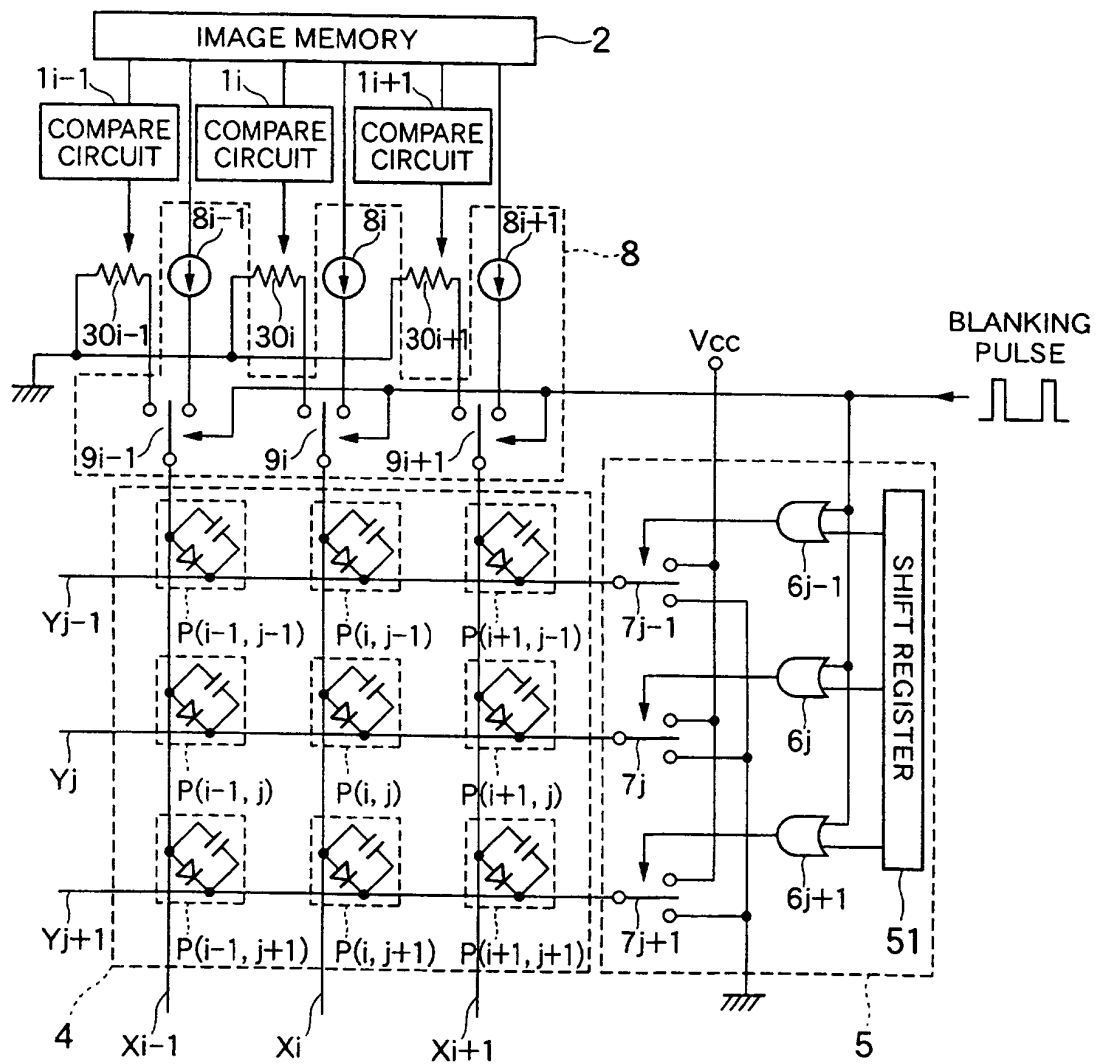


FIG. 8

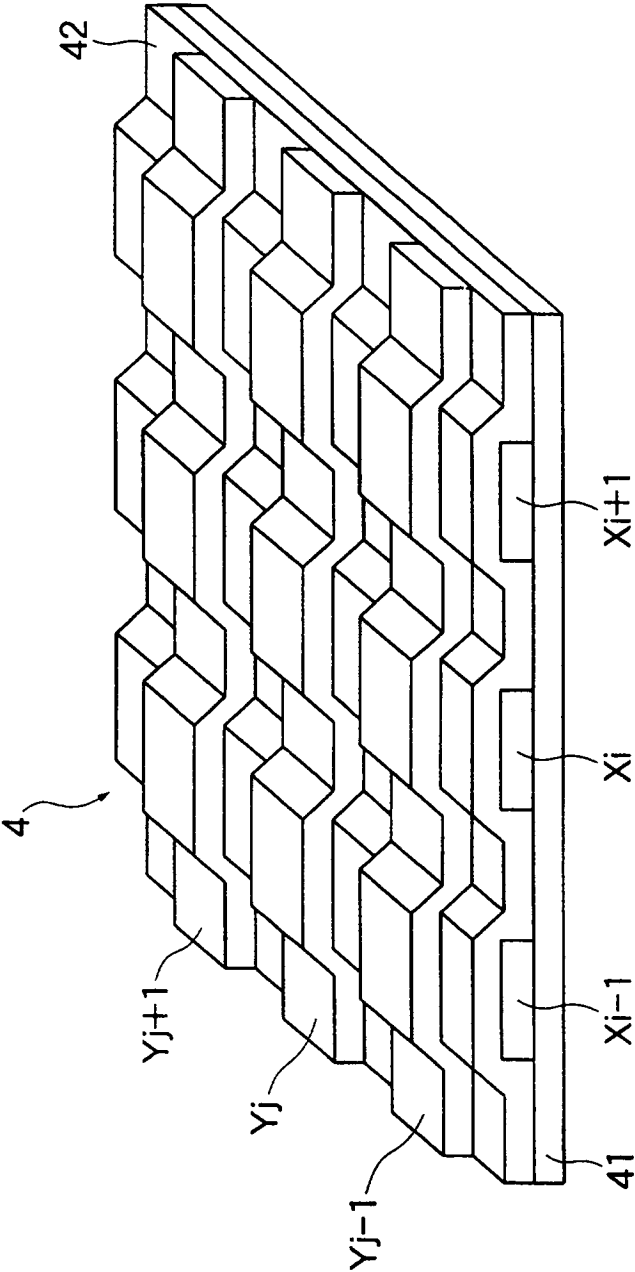

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5844368 A [0002]
- JP 9232074 A [0002]
- JP 2103590 A [0005]

Non-patent literature cited in the description

- PATENT ABSTRACTS OF JAPAN, vol. 014, 317
[0005]

专利名称(译)	有机薄膜EL显示器的驱动装置和驱动方法		
公开(公告)号	EP1091340B1	公开(公告)日	2008-03-19
申请号	EP2000121697	申请日	2000-10-04
申请(专利权)人(译)	NEC公司		
当前申请(专利权)人(译)	NEC公司		
[标]发明人	IKETSU YUICHI SAKAGUCHI YOSHIKAZU		
发明人	IKETSU, YUICHI SAKAGUCHI, YOSHIKAZU		
IPC分类号	G09G3/32 G09G3/30 G09G3/20 H01L51/50 H05B33/08 H05B33/12 H05B33/14		
CPC分类号	G09G3/3216 G09G2310/0251 G09G2330/023 G09G2340/16		
优先权	1999284167 1999-10-05 JP		
其他公开文献	EP1091340A2 EP1091340A3		
外部链接	Espacenet		

摘要(译)

比较器 (比较在当前显示周期的扫描电极 (Y_j) 上的预定数据电极 (X_i) 上施加到显示元件 $P(i, j)$ 的信号电压 $S(i, j)$) 的扫描电极 $Y(j+1)$ 上的数据电极 (X_i) 上的显示元件 $P(i, j+1)$ 上施加的电压根据比较器的比较结果, 在紧接在下一个显示周期之前的消隐周期期间从数据电极 (X_i) 排出的电荷或一定量的残余电荷。

FIG. 1

