

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date  
1 April 2010 (01.04.2010)

(10) International Publication Number  
**WO 2010/036765 A1**

(51) International Patent Classification:

**H01L 51/00** (2006.01)

Marshall Court, Plainsboro, NJ 08536 (US). **LIN, Chun** [CN/US]; 222 Chris Drive, Irwin, PA 15642 (US).

(21) International Application Number:

PCT/US2009/058162

(74) Agents: **WANG, Weining** et al.; Kenyon & Kenyon LLP, One Broadway, New York, NY 10004 (US).

(22) International Filing Date:

24 September 2009 (24.09.2009)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/100,229 25 September 2008 (25.09.2008) US


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

(75) Inventors; and

(75) Inventors/Applicants (for US only): **XIA, Chuanjun** [CN/US]; 16 Cliveden Court, Lawrenceville, NJ 08648 (US). **KWONG, Raymond** [US/US]; 22 Spyglass Court, Westhampton, NJ 08060 (US). **MA, Bin** [US/US]; 10

*[Continued on next page]*

(54) Title: ORGANOSELENIUM MATERIALS AND THEIR USES IN ORGANIC LIGHT EMITTING DEVICES

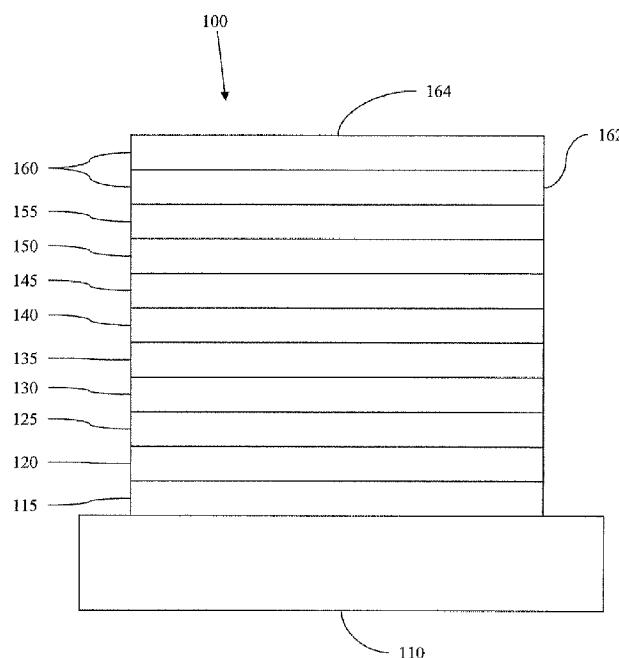

(57) Abstract: The present invention provides organoseelenium compounds comprising dibenzoselenophene, benzo[b]selenophene or benzo[c]selenophene and their uses in organic light emitting devices.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, —

*before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

**Published:**

— *with international search report (Art. 21(3))*

ORGANOSELENIUM MATERIALS AND THEIR USES IN ORGANIC LIGHT  
EMITTING DEVICES

RELATED APPLICATION

5 [0001] This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application No. 61/100,229, filed September 25, 2008; which is incorporated herein by reference in its entirety..

10 [0002] The claimed invention was made by, on behalf of, and/or in connection with one or more of the following parties to a joint university corporation research agreement: Regents of the University of Michigan, Princeton University, The University of Southern California, and the Universal Display Corporation. The agreement was in effect on and before the date the claimed invention was made, and the claimed invention was made as a result of activities undertaken within the scope of the agreement.

15 FIELD OF THE INVENTION

[0003] The present invention relates to organoselenium materials comprising dibenzoselenophene, benzo[*b*]selenophene or benzo[*c*]selenophene and their uses in organic light emitting devices.

BACKGROUND


20 [0004] Opto-electronic devices that make use of organic materials are becoming increasingly desirable for a number of reasons. Many of the materials used to make such devices are relatively inexpensive, so organic opto-electronic devices have the potential for cost advantages over inorganic devices. In addition, the inherent properties of organic materials, such as their flexibility, may make them well suited for particular applications such as fabrication on a flexible substrate. Examples of organic opto-electronic devices include organic light emitting devices (OLEDs), organic phototransistors, organic photovoltaic cells, and organic photodetectors. For OLEDs, the organic materials may have performance advantages over conventional materials. For example, the wavelength at which an organic emissive layer emits light may generally be readily tuned with appropriate dopants.

25 [0005] OLEDs make use of thin organic films that emit light when voltage is applied across the device. OLEDs are becoming an increasingly interesting technology for use in applications such as flat panel displays, illumination, and backlighting. Several OLED

materials and configurations are described in U.S. Pat. Nos. 5,844,363, 6,303,238, and 5,707,745, which are incorporated herein by reference in their entirety.

[0006] One application for phosphorescent emissive molecules is a full color display. Industry standards for such a display call for pixels adapted to emit particular colors, referred 5 to as "saturated" colors. In particular, these standards call for saturated red, green, and blue pixels. Color may be measured using CIE coordinates, which are well known to the art.

[0007] One example of a green emissive molecule is tris(2-phenylpyridine) iridium, denoted Ir(ppy)<sub>3</sub>, which has the structure of Formula I:



10 [0008] In this, and later figures herein, we depict the dative bond from nitrogen to metal (here, Ir) as a straight line.

[0009] As used herein, the term "organic" includes polymeric materials as well as small molecule organic materials that may be used to fabricate organic opto-electronic devices. "Small molecule" refers to any organic material that is not a polymer, and "small molecules" 15 may actually be quite large. Small molecules may include repeat units in some circumstances. For example, using a long chain alkyl group as a substituent does not remove a molecule from the "small molecule" class. Small molecules may also be incorporated into polymers, for example as a pendent group on a polymer backbone or as a part of the backbone. Small molecules may also serve as the core moiety of a dendrimer, which consists of a series of 20 chemical shells built on the core moiety. The core moiety of a dendrimer may be a fluorescent or phosphorescent small molecule emitter. A dendrimer may be a "small molecule," and it is believed that all dendrimers currently used in the field of OLEDs are small molecules.

[0010] As used herein, "top" means furthest away from the substrate, while "bottom" 25 means closest to the substrate. Where a first layer is described as "disposed over" a second layer, the first layer is disposed further away from substrate. There may be other layers between the first and second layer, unless it is specified that the first layer is "in contact with" the second layer. For example, a cathode may be described as "disposed over" an anode, even though there are various organic layers in between.

[0011] As used herein, "solution processible" means capable of being dissolved, dispersed, or transported in and/or deposited from a liquid medium, either in solution or suspension form.

[0012] A ligand may be referred to as "photoactive" when it is believed that the ligand 5 directly contributes to the photoactive properties of an emissive material. A ligand may be referred to as "ancillary" when it is believed that the ligand does not contribute to the photoactive properties of an emissive material, although an ancillary ligand may alter the properties of a photoactive ligand.

[0013] As used herein, and as would be generally understood by one skilled in the art, a 10 first "Highest Occupied Molecular Orbital" (HOMO) or "Lowest Unoccupied Molecular Orbital" (LUMO) energy level is "greater than" or "higher than" a second HOMO or LUMO energy level if the first energy level is closer to the vacuum energy level. Since ionization potentials (IP) are measured as a negative energy relative to a vacuum level, a higher HOMO energy level corresponds to an IP having a smaller absolute value (an IP that is less negative). 15 Similarly, a higher LUMO energy level corresponds to an electron affinity (EA) having a smaller absolute value (an EA that is less negative). On a conventional energy level diagram, with the vacuum level at the top, the LUMO energy level of a material is higher than the HOMO energy level of the same material. A "higher" HOMO or LUMO energy level appears closer to the top of such a diagram than a "lower" HOMO or LUMO energy level.

[0014] As used herein, and as would be generally understood by one skilled in the art, a 20 first work function is "greater than" or "higher than" a second work function if the first work function has a higher absolute value. Because work functions are generally measured as negative numbers relative to vacuum level, this means that a "higher" work function is more negative. On a conventional energy level diagram, with the vacuum level at the top, a 25 "higher" work function is illustrated as further away from the vacuum level in the downward direction. Thus, the definitions of HOMO and LUMO energy levels follow a different convention than work functions.

[0015] More details on OLEDs, and the definitions described above, can be found in US Pat. No. 7,279,704, which is incorporated herein by reference in its entirety.

[0016] The present invention provides an organic light emitting device, comprising an organic layer positioned between an anode layer and a cathode layer. The organic layer comprises an organoselenium material selected from the group consisting of a compound comprising a dibenzoselenophene, a compound comprising a benzo[*b*]selenophene, and a compound comprising benzo[*c*]selenophene. Organoselenium compounds that can be used in the organic light emitting device of the invention are disclosed herein below. The invention also provides such organoselenium compounds.

5 In one embodiment, the organoselenium material is a host material, and the organic layer further comprises a dopant material. The dopant material can be a phosphorescent or 10 fluorescent dopant material. In a preferred embodiment, the dopant material is a phosphorescent dopant material, such as any of the phosphorescent dopant material disclosed 15 in Table 1 below.

In one embodiment, the organic light emitting device of the invention further comprises one or more organic layers selected from the group consisting of a hole injecting 15 layer, an electron injecting layer, a hole transporting layer, an electron transporting layer, a hole blocking layer, an exciton blocking layer, and an electron blocking layer.

In one embodiment, the hole transporting layer or the electron transporting layer comprises an organoselenium material.

20

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 shows an organic light emitting device.

[0018] FIG. 2 shows an inverted organic light emitting device that does not have a separate electron transport layer.

#### DETAILED DESCRIPTION

25 [0019] Generally, an OLED comprises at least one organic layer disposed between and electrically connected to an anode and a cathode. When a current is applied, the anode injects holes and the cathode injects electrons into the organic layer(s). The injected holes and electrons each migrate toward the oppositely charged electrode. When an electron and hole 30 localize on the same molecule, an "exciton," which is a localized electron-hole pair having an excited energy state, is formed. Light is emitted when the exciton relaxes via a photoemissive

mechanism. In some cases, the exciton may be localized on an excimer or an exciplex. Non-radiative mechanisms, such as thermal relaxation, may also occur, but are generally considered undesirable.

[0020] The initial OLEDs used emissive molecules that emitted light from their singlet states ("fluorescence") as disclosed, for example, in U.S. Pat. No. 4,769,292, which is incorporated by reference in its entirety. Fluorescent emission generally occurs in a time frame of less than 10 nanoseconds.

[0021] More recently, OLEDs having emissive materials that emit light from triplet states ("phosphorescence") have been demonstrated. Baldo et al., "Highly Efficient Phosphorescent Emission from Organic Electroluminescent Devices," *Nature*, vol. 395, 151-154, 1998; ("Baldo-I") and Baldo et al., "Very high-efficiency green organic light-emitting devices based on electrophosphorescence," *Appl. Phys. Lett.*, vol. 75, No. 3, 4-6 (1999) ("Baldo-II"), which are incorporated by reference in their entireties. Phosphorescence is described in more detail in US Pat. No. 7,279,704 at cols. 5-6, which are incorporated by reference.

[0022] FIG. 1 shows an organic light emitting device 100. The figures are not necessarily drawn to scale. Device 100 may include a substrate 110, an anode 115, a hole injection layer 120, a hole transport layer 125, an electron blocking layer 130, an emissive layer 135, a hole blocking layer 140, an electron transport layer 145, an electron injection layer 150, a protective layer 155, and a cathode 160. Cathode 160 is a compound cathode having a first conductive layer 162 and a second conductive layer 164. Device 100 may be fabricated by depositing the layers described, in order. The properties and functions of these various layers, as well as example materials, are described in more detail in US 7,279,704 at cols. 6-10, which are incorporated by reference.

[0023] More examples for each of these layers are available. For example, a flexible and transparent substrate-anode combination is disclosed in U.S. Pat. No. 5,844,363, which is incorporated by reference in its entirety. An example of a p-doped hole transport layer is m-MTDATA doped with F<sub>sub</sub>4-TCNQ at a molar ratio of 50:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in its entirety. Examples of emissive and host materials are disclosed in U.S. Pat. No. 6,303,238 to Thompson et al., which is incorporated by reference in its entirety. An example of an n-doped electron transport layer is BPhen doped with Li at a molar ratio of 1:1, as disclosed in U.S. Patent Application Publication No. 2003/0230980, which is incorporated by reference in

its entirety. U.S. Pat. Nos. 5,703,436 and 5,707,745, which are incorporated by reference in their entireties, disclose examples of cathodes including compound cathodes having a thin layer of metal such as Mg:Ag with an overlying transparent, electrically-conductive, sputter-deposited ITO layer. The theory and use of blocking layers is described in more detail in 5 U.S. Pat. No. 6,097,147 and U.S. Patent Application Publication No. 2003/0230980, which are incorporated by reference in their entireties. Examples of injection layers are provided in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety. A description of protective layers may be found in U.S. Patent Application Publication No. 2004/0174116, which is incorporated by reference in its entirety.

10 [0024] FIG. 2 shows an inverted OLED 200. The device includes a substrate 210, a cathode 215, an emissive layer 220, a hole transport layer 225, and an anode 230. Device 200 may be fabricated by depositing the layers described, in order. Because the most common OLED configuration has a cathode disposed over the anode, and device 200 has cathode 215 disposed under anode 230, device 200 may be referred to as an "inverted" OLED. Materials 15 similar to those described with respect to device 100 may be used in the corresponding layers of device 200. FIG. 2 provides one example of how some layers may be omitted from the structure of device 100.

20 [0025] The simple layered structure illustrated in FIGS. 1 and 2 is provided by way of non-limiting example, and it is understood that embodiments of the invention may be used in connection with a wide variety of other structures. The specific materials and structures described are exemplary in nature, and other materials and structures may be used. Functional 25 OLEDs may be achieved by combining the various layers described in different ways, or layers may be omitted entirely, based on design, performance, and cost factors. Other layers not specifically described may also be included. Materials other than those specifically described may be used. Although many of the examples provided herein describe various layers as comprising a single material, it is understood that combinations of materials, such as a mixture of host and dopant, or more generally a mixture, may be used. Also, the layers may have various sublayers. The names given to the various layers herein are not intended to be strictly limiting. For example, in device 200, hole transport layer 225 transports holes and 30 injects holes into emissive layer 220, and may be described as a hole transport layer or a hole injection layer. In one embodiment, an OLED may be described as having an "organic layer" disposed between a cathode and an anode. This organic layer may comprise a single layer, or

may further comprise multiple layers of different organic materials as described, for example, with respect to FIGS. 1 and 2.

[0026] Structures and materials not specifically described may also be used, such as OLEDs comprised of polymeric materials (PLEDs) such as disclosed in U.S. Pat. No. 5,247,190 to Friend et al., which is incorporated by reference in its entirety. By way of further example, OLEDs having a single organic layer may be used. OLEDs may be stacked, for example as described in U.S. Pat. No. 5,707,745 to Forrest et al, which is incorporated by reference in its entirety. The OLED structure may deviate from the simple layered structure illustrated in FIGS. 1 and 2. For example, the substrate may include an angled reflective surface to improve out-coupling, such as a mesa structure as described in U.S. Pat. No. 6,091,195 to Forrest et al., and/or a pit structure as described in U.S. Pat. No. 5,834,893 to Bulovic et al., which are incorporated by reference in their entireties.

[0027] Unless otherwise specified, any of the layers of the various embodiments may be deposited by any suitable method. For the organic layers, preferred methods include thermal evaporation, ink-jet, such as described in U.S. Pat. Nos. 6,013,982 and 6,087,196, which are incorporated by reference in their entireties, organic vapor phase deposition (OVPD), such as described in U.S. Pat. No. 6,337,102 to Forrest et al., which is incorporated by reference in its entirety, and deposition by organic vapor jet printing (OVJP), such as described in U.S. patent application Ser. No. 10/233,470, which is incorporated by reference in its entirety.

20 Other suitable deposition methods include spin coating and other solution based processes. Solution based processes are preferably carried out in nitrogen or an inert atmosphere. For the other layers, preferred methods include thermal evaporation. Preferred patterning methods include deposition through a mask, cold welding such as described in U.S. Pat. Nos. 6,294,398 and 6,468,819, which are incorporated by reference in their entireties, and

25 patterning associated with some of the deposition methods such as ink-jet and OVJD. Other methods may also be used. The materials to be deposited may be modified to make them compatible with a particular deposition method. For example, substituents such as alkyl and aryl groups, branched or unbranched, and preferably containing at least 3 carbons, may be used in small molecules to enhance their ability to undergo solution processing. Substituents

30 having 20 carbons or more may be used, and 3-20 carbons is a preferred range. Materials with asymmetric structures may have better solution processability than those having symmetric structures, because asymmetric materials may have a lower tendency to

recrystallize. Dendrimer substituents may be used to enhance the ability of small molecules to undergo solution processing.

[0028] Devices fabricated in accordance with embodiments of the invention may be incorporated into a wide variety of consumer products, including flat panel displays, 5 computer monitors, televisions, billboards, lights for interior or exterior illumination and/or signaling, heads up displays, fully transparent displays, flexible displays, laser printers, telephones, cell phones, personal digital assistants (PDAs), laptop computers, digital cameras, camcorders, viewfinders, micro-displays, vehicles, a large area wall, theater or stadium screen, or a sign. Various control mechanisms may be used to control devices fabricated in 10 accordance with the present invention, including passive matrix and active matrix. Many of the devices are intended for use in a temperature range comfortable to humans, such as 18 degrees C. to 30 degrees C., and more preferably at room temperature (20-25 degrees C.).


[0029] The materials and structures described herein may have applications in devices other than OLEDs. For example, other optoelectronic devices such as organic solar cells and 15 organic photodetectors may employ the materials and structures. More generally, organic devices, such as organic transistors, may employ the materials and structures.


[0030] The terms halo, halogen, alkyl, cycloalkyl, alkenyl, alkynyl, arylalkyl, heterocyclic group, aryl, aromatic group, and heteroaryl are known to the art, and are defined in US 7,279,704 at cols. 31-32, which are incorporated herein by reference.


20 The present invention provides an organoselenium compound comprising dibenzoselenophene, benzo[*b*]selenophene and/or benzo[*c*]selenophene. The present invention also provides OLED devices in which such material is used, e.g., as a host material.


25 The organoselenium compound of the invention can comprise one, two, three, four or more dibenzoselenophene moieties, benzo[*b*]selenophene moieties, benzo[*c*]selenophene moieties or a mixture thereof. The dibenzoselenophene moieties, benzo[*b*]selenophene moieties, benzo[*c*]selenophene moieties or a mixture thereof can be linked directly or through one or more other molecular moieties.




In one embodiment, the organoselenium compound is selected from the groups

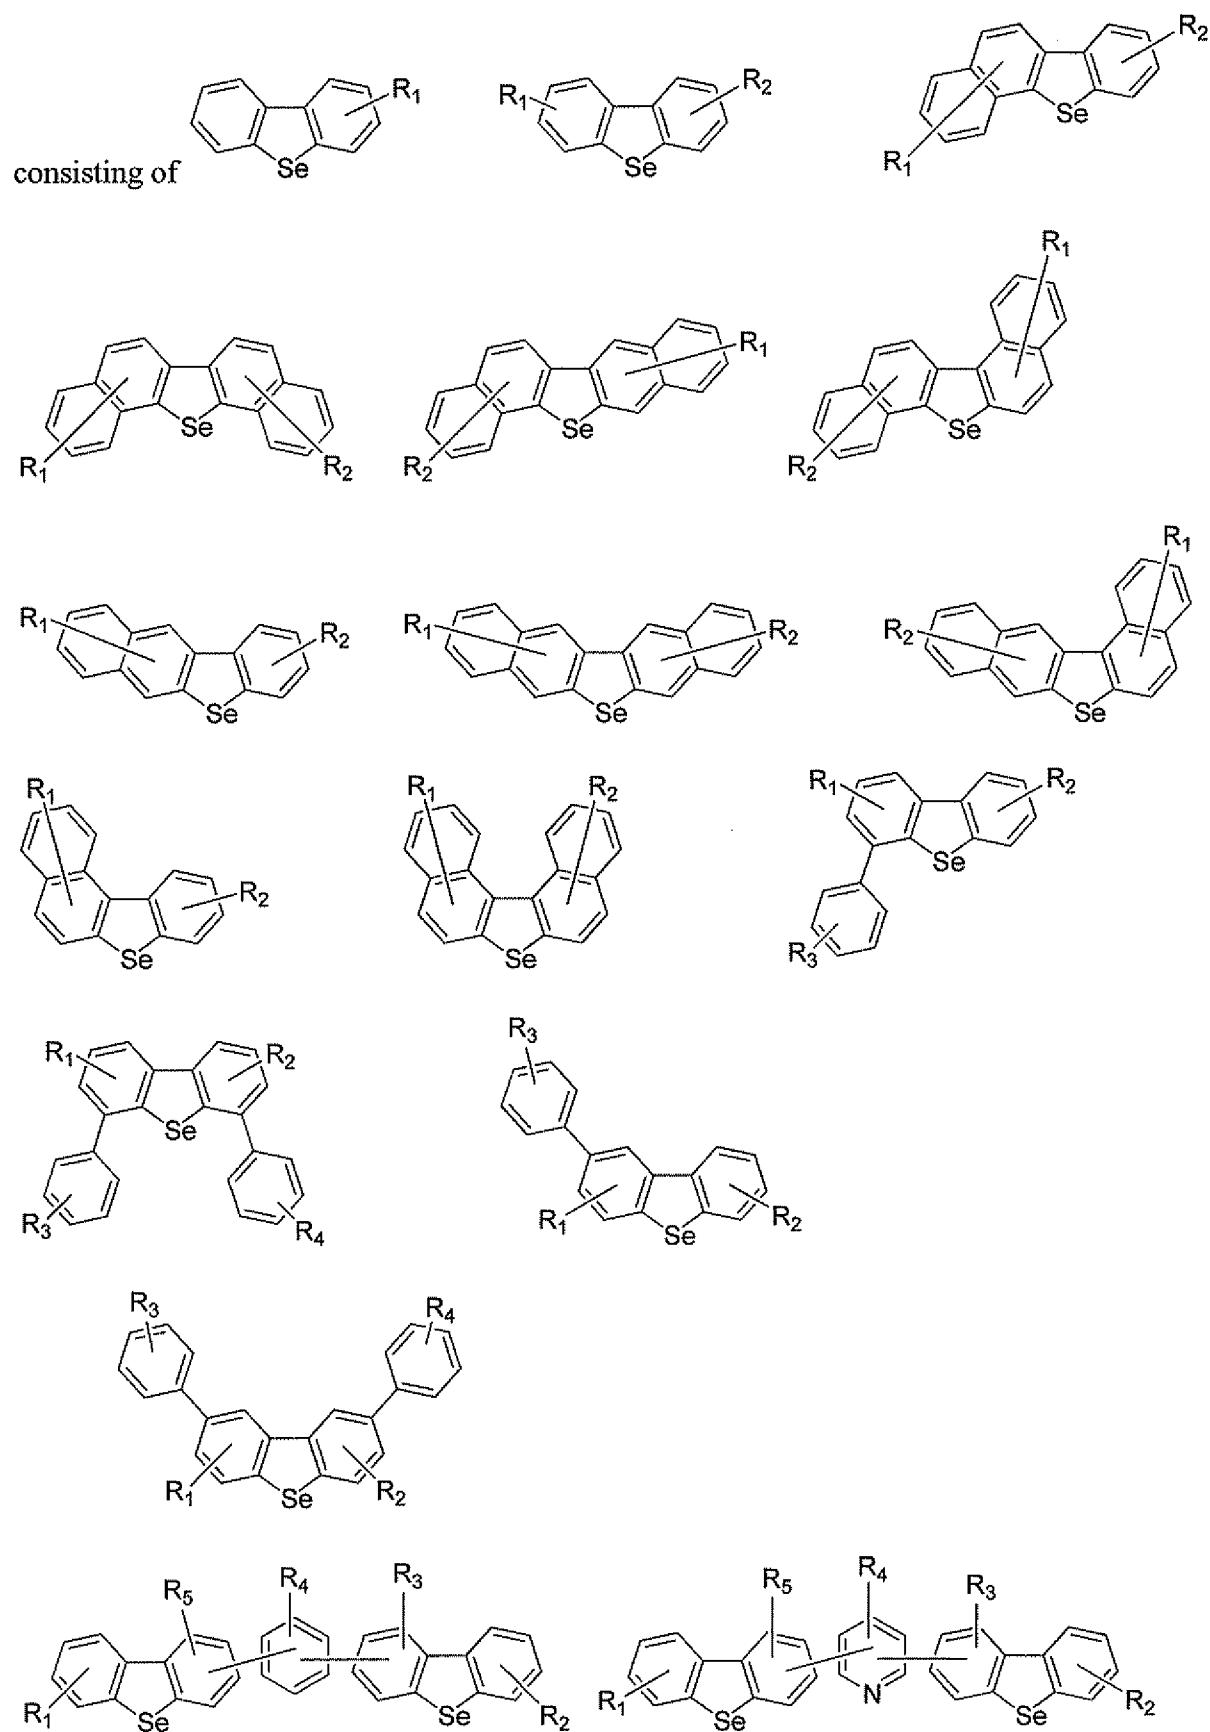

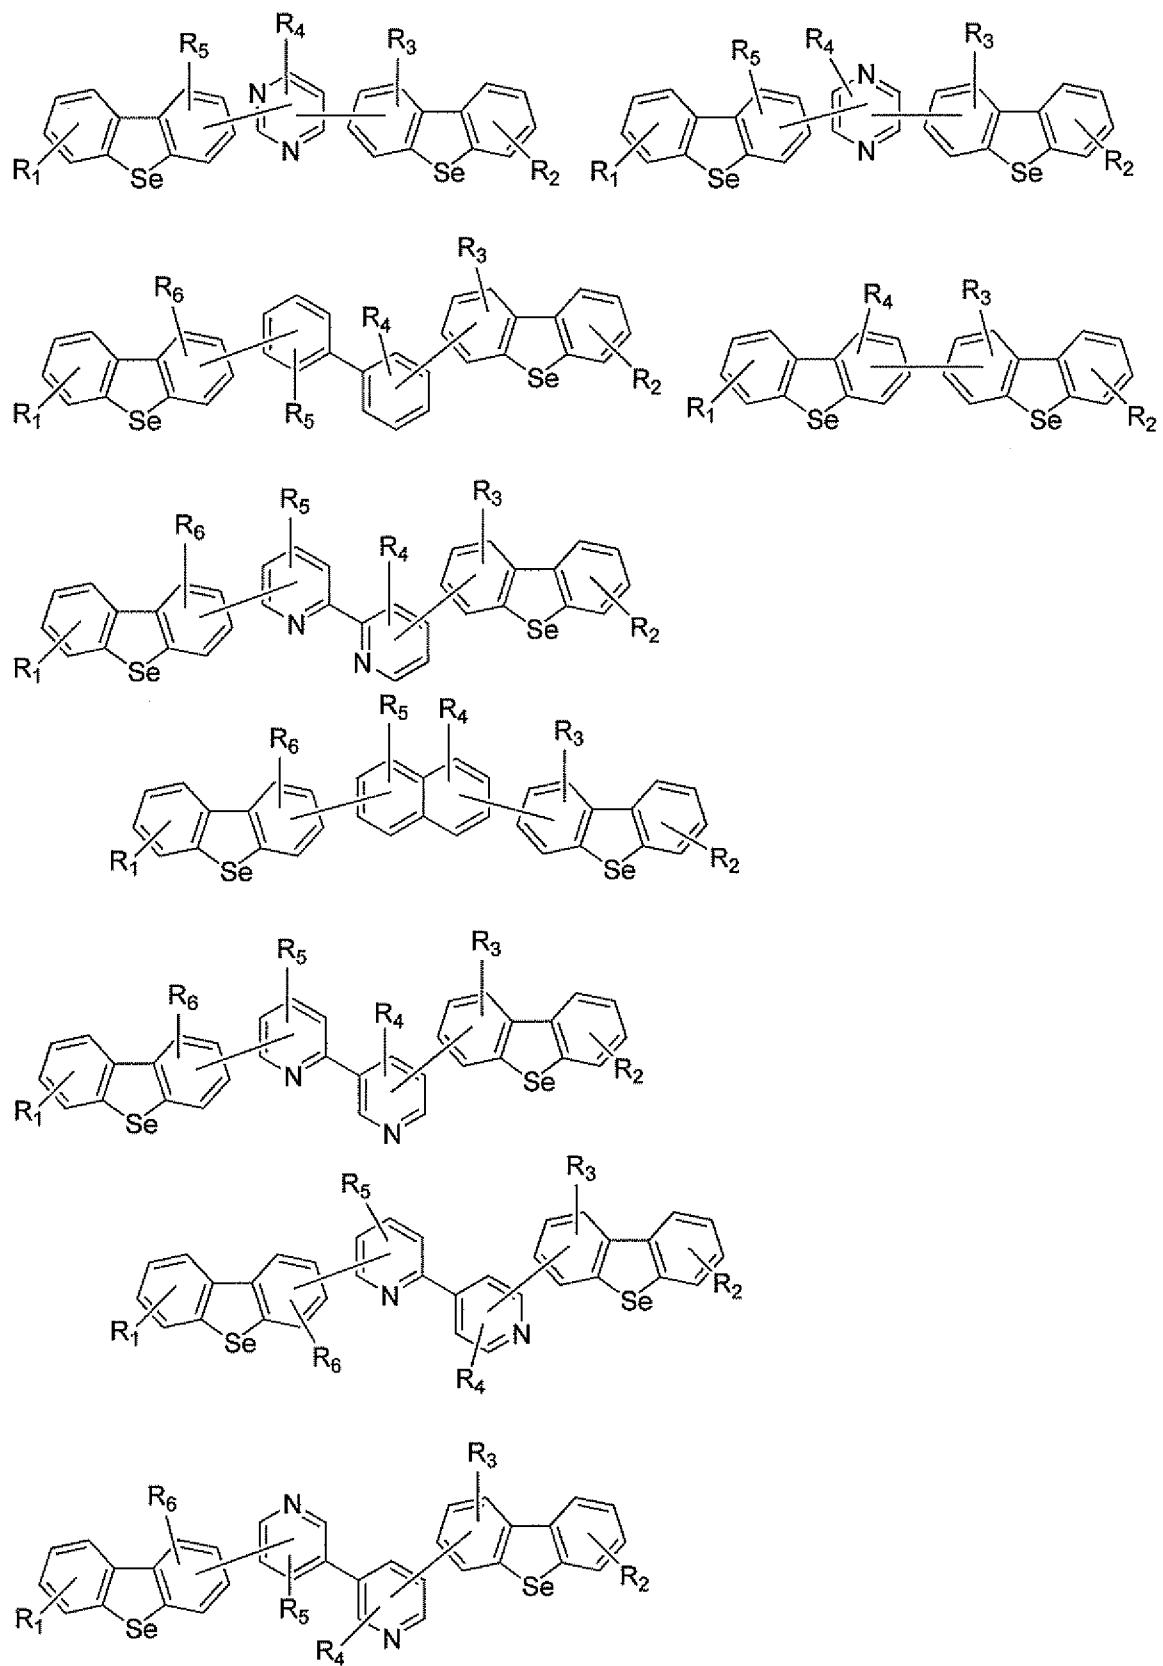


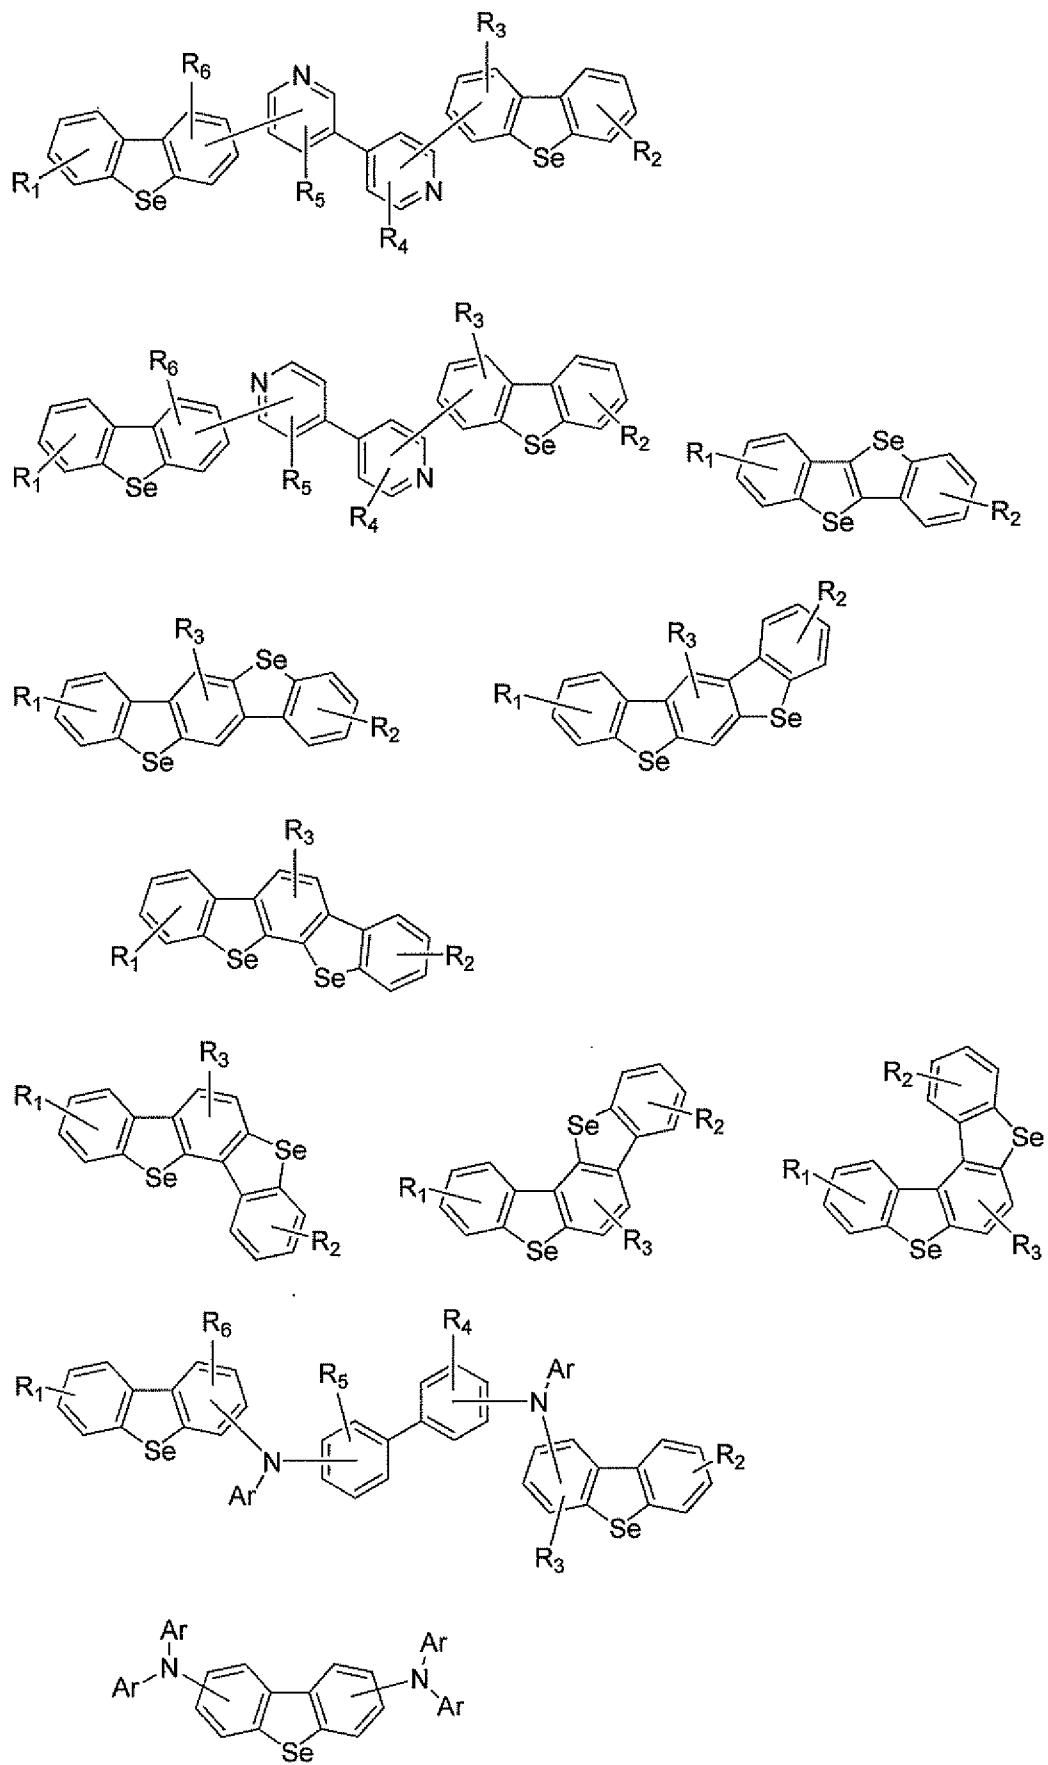

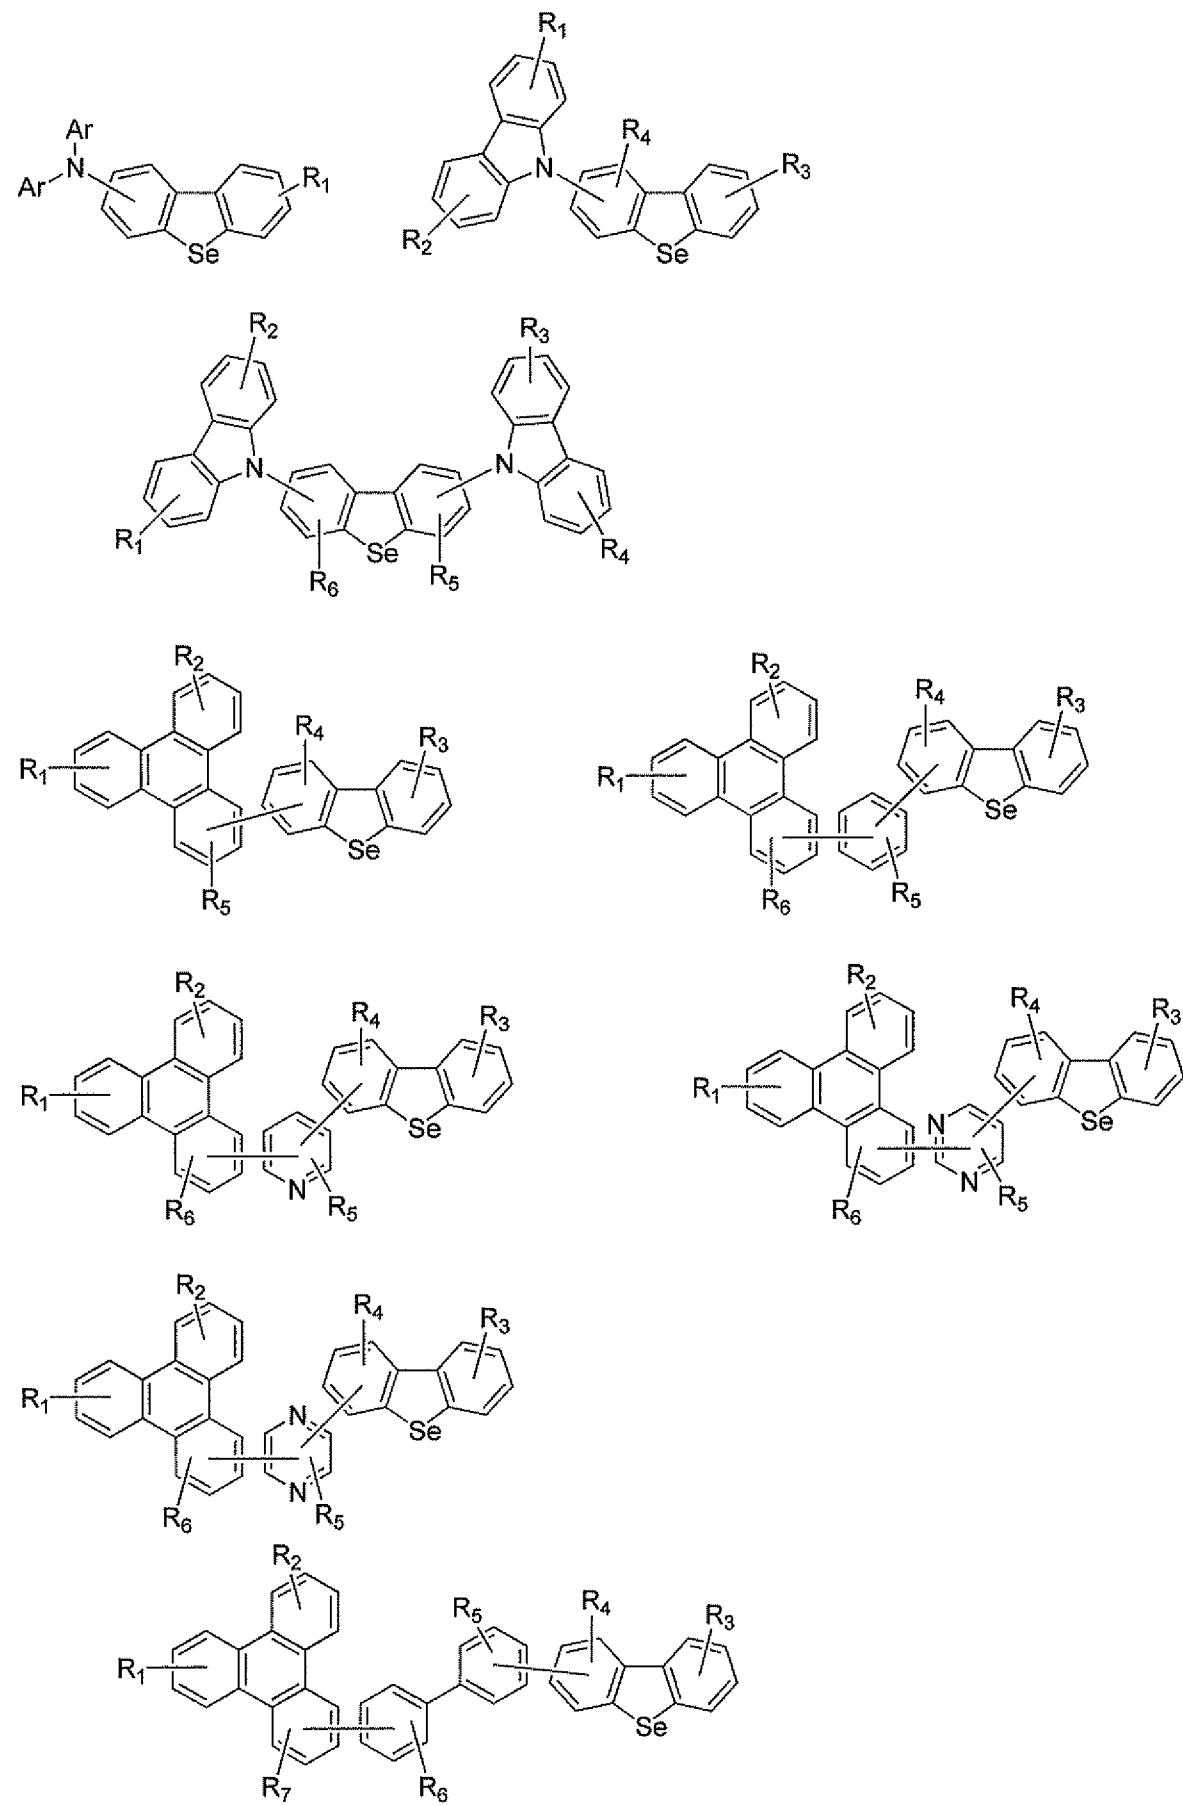

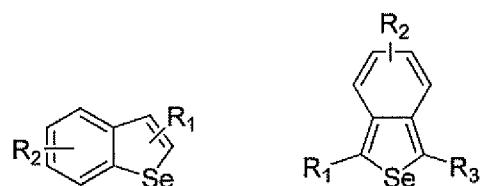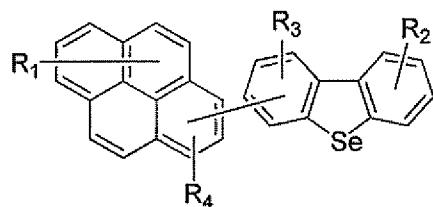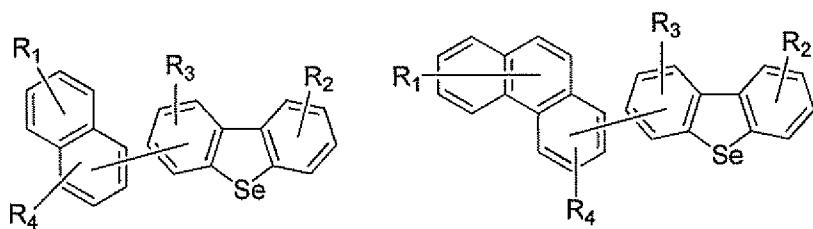

5

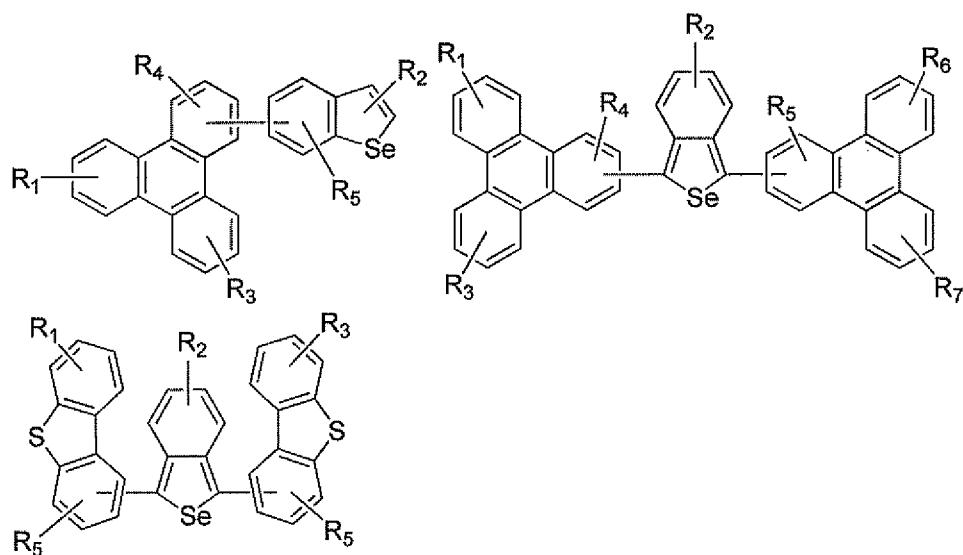


10 wherein each of R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub> and R<sub>7</sub> indicates an optional substituent to any possible position in the relevant moiety, Ar indicates an aromatic group, and each line linking two molecular moieties indicates attachment between the two moieties at any possible positions on the respective moieties. Each R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub> and R<sub>7</sub> may represent multiple substitutions











Suitable substituents include but are not limited to halo, alkyl, heteroalkyl, cycloalkyl, alkenyl, alkynyl, arylkyl, heterocyclic group, aryl, and heteroaryl. Preferably, the substituent is selected from the group consisting of heterocyclic group, aryl, aromatic group, and heteroaryl. In one embodiment, the substituent is an aromatic group, including but not limited to benzene and substituted benzene; polyaromatic group such as benzocyclopropene, benzocyclopropane, benzocyclobutadiene, and benzocyclobutene, naphthalene, anthracene, tetracene, pentacene, phenanthrene, triphenylene, helicenes, corannulene, azulene, acenaphthylene, fluorene, chrysene, fluoranthene, pyrene, benzopyrene, coronene, hexacene, picene, perylene; and heteroaromatic group such as furan, benzofuran, isobenzofuran, pyrrole, indole, isoindole, thiophene, benzothiophene, benzo[*c*]thiophene, imidazole, benzimidazole, purine, pyrazole, indazole, oxazole, benzoxazole, isoxazole, benzisoxazole, thiazole, benzothiazole, pyridine, quinoline, isoquinoline, pyrazine, quinoxaline, acridine, pyrimidine, quinazoline, pyridazine, cinnoline; and derivatives thereof.

The linkage between two molecular moieties as indicated by the line linking the two molecular moieties can be a single bond or multiple bonds. In one embodiment, the linkage is a single bond between two atoms in respective molecular moieties. In another embodiment, the linkage is via multiple bonds, e.g., via a fused ring.



In another embodiment, the invention provides an organoselenium compound selected from the group consisting of:


20

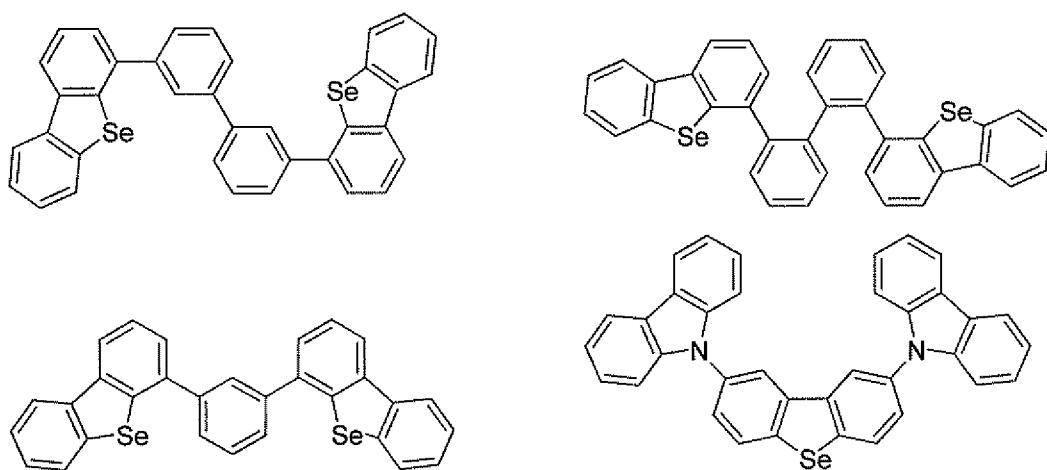


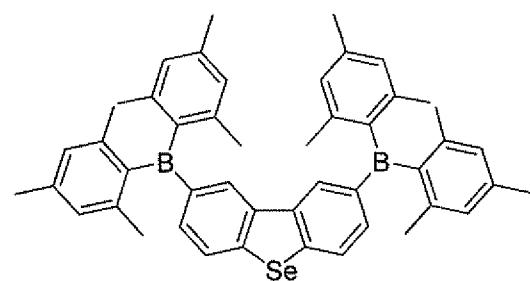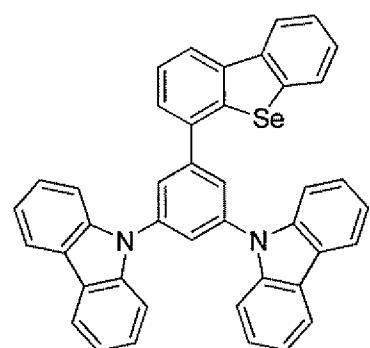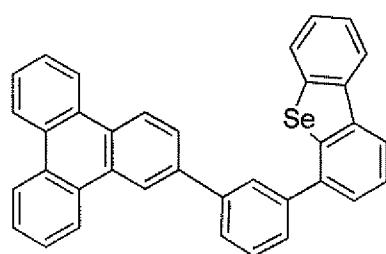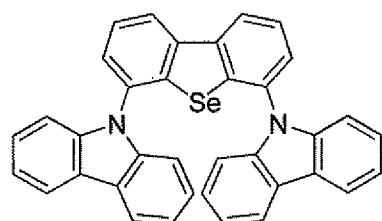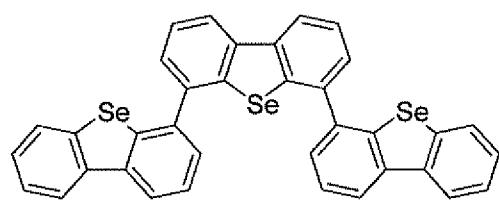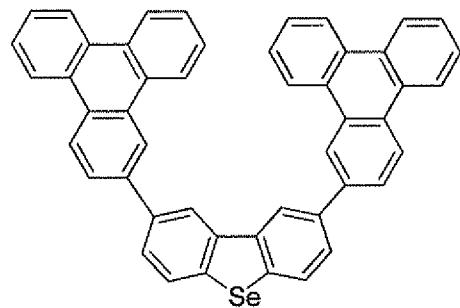



5

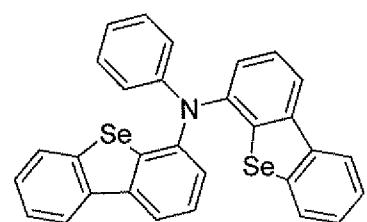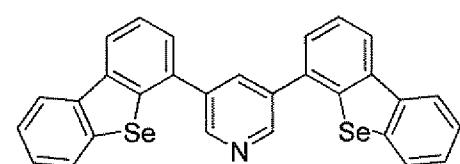


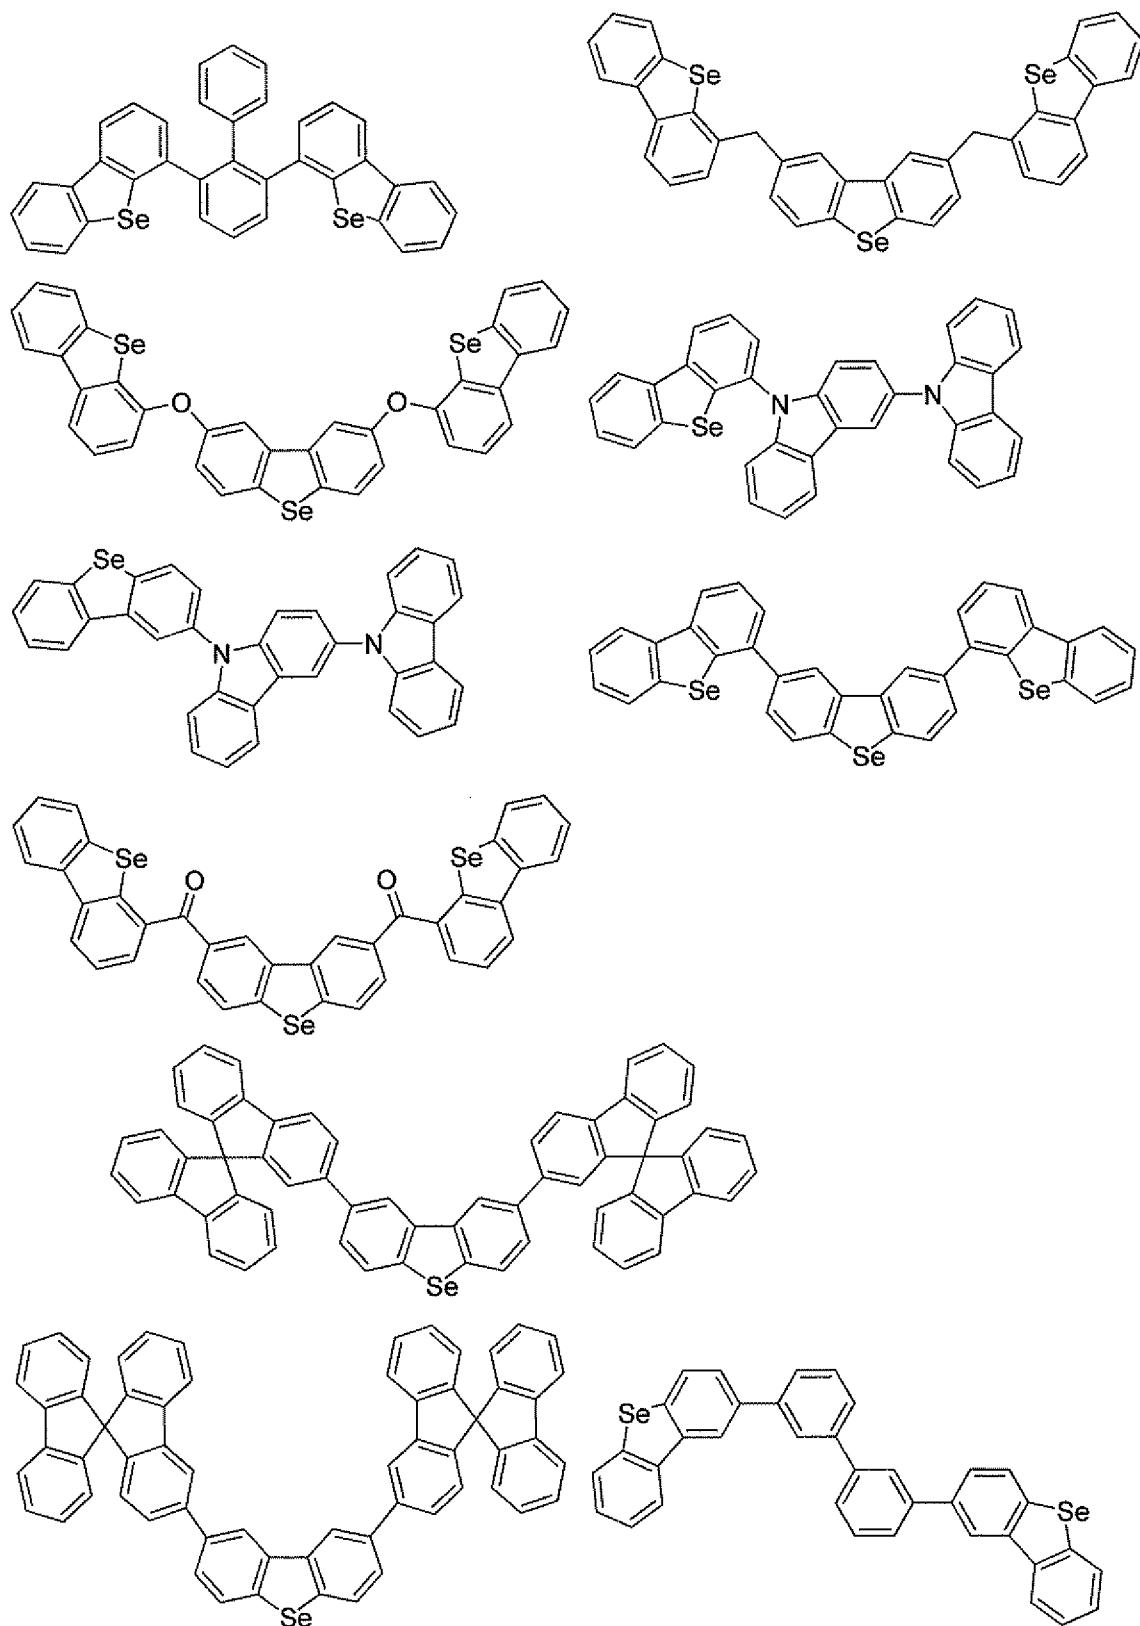


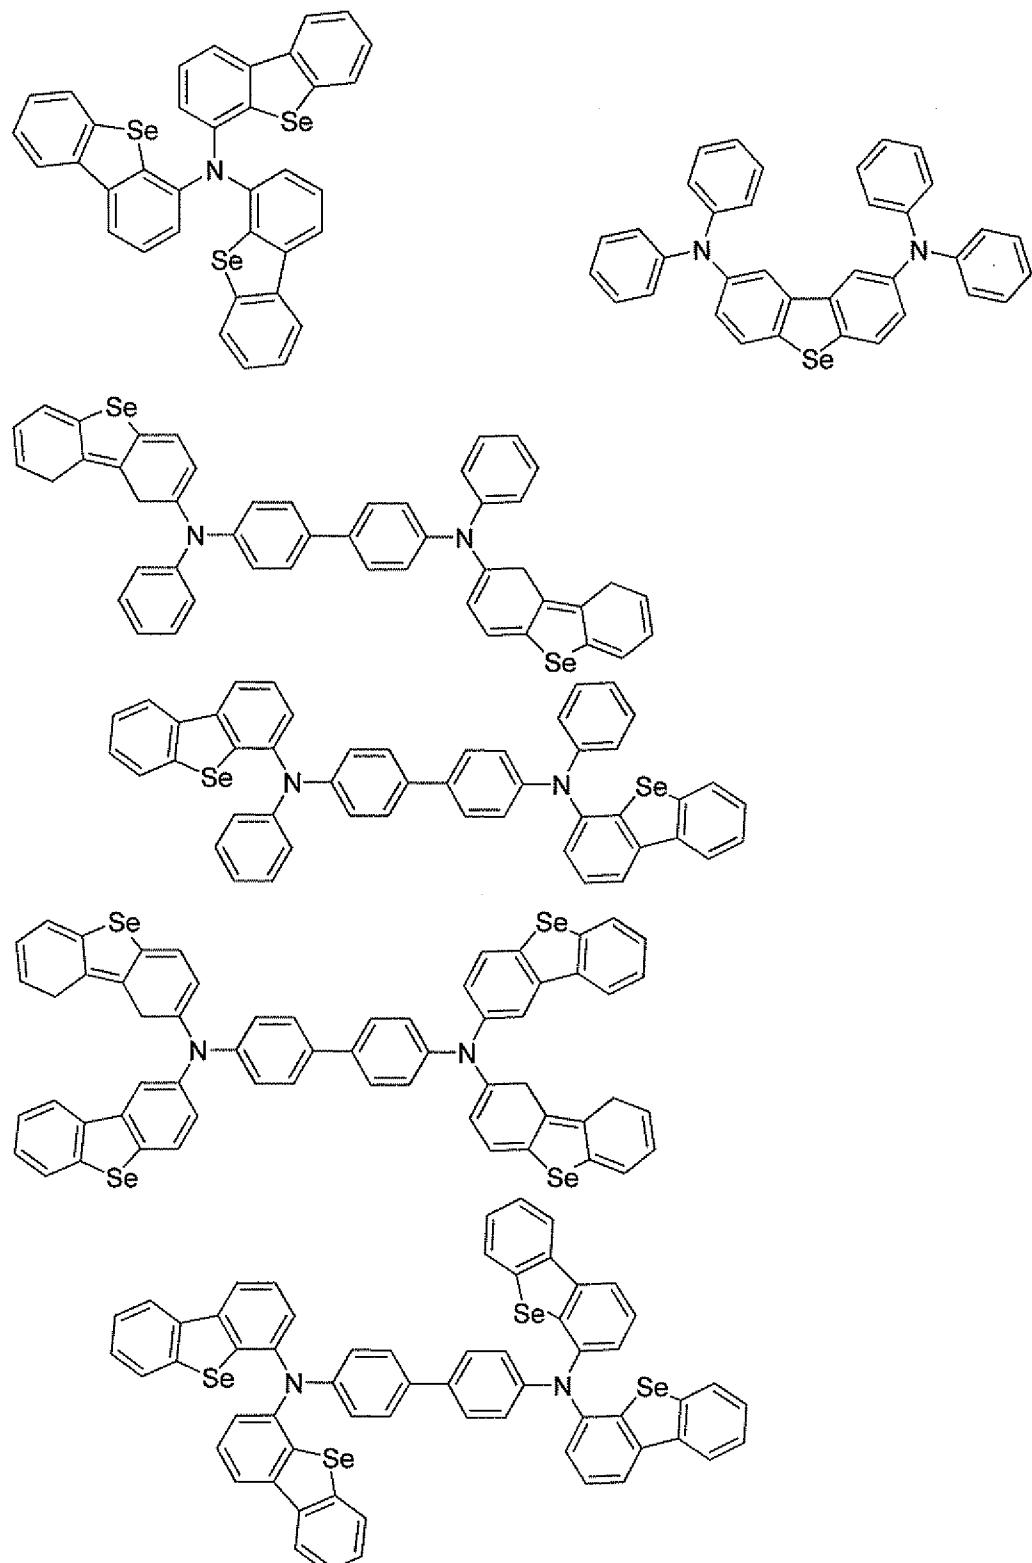


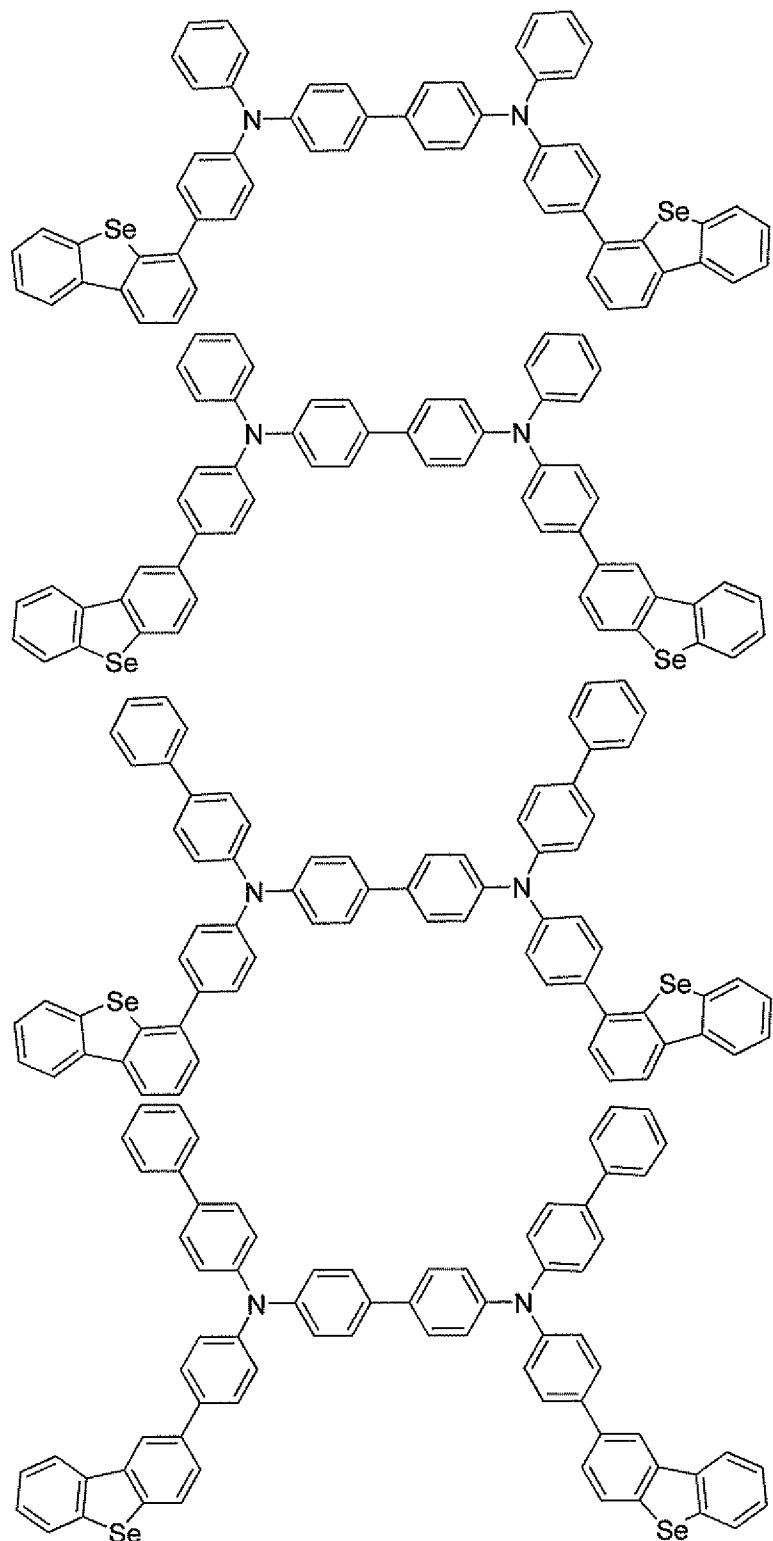


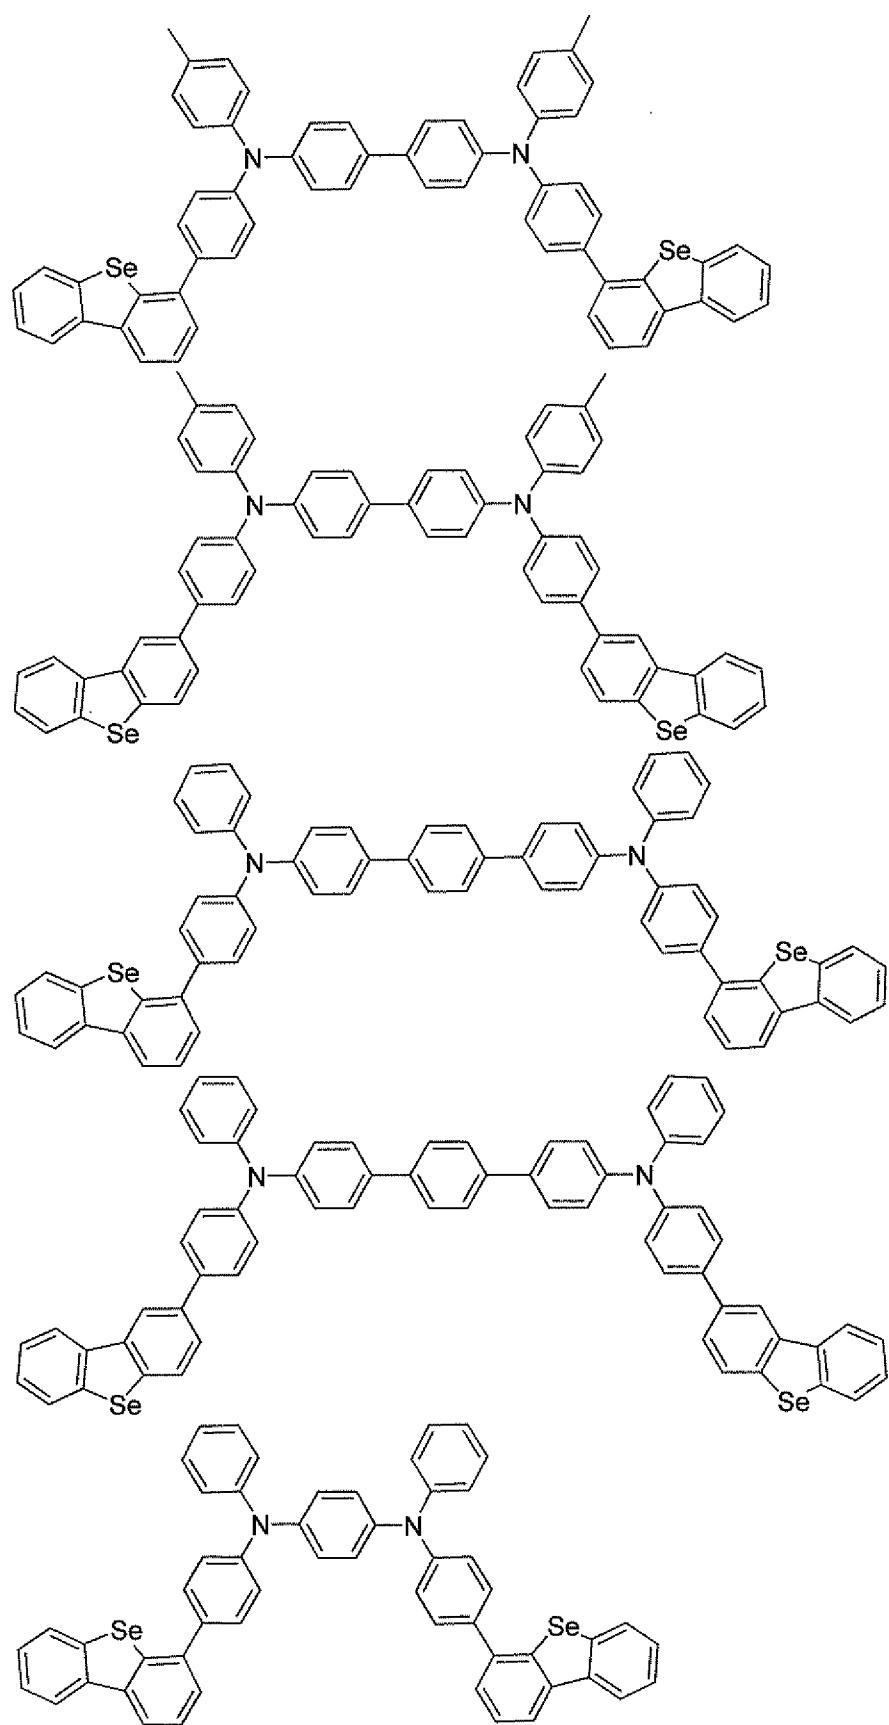


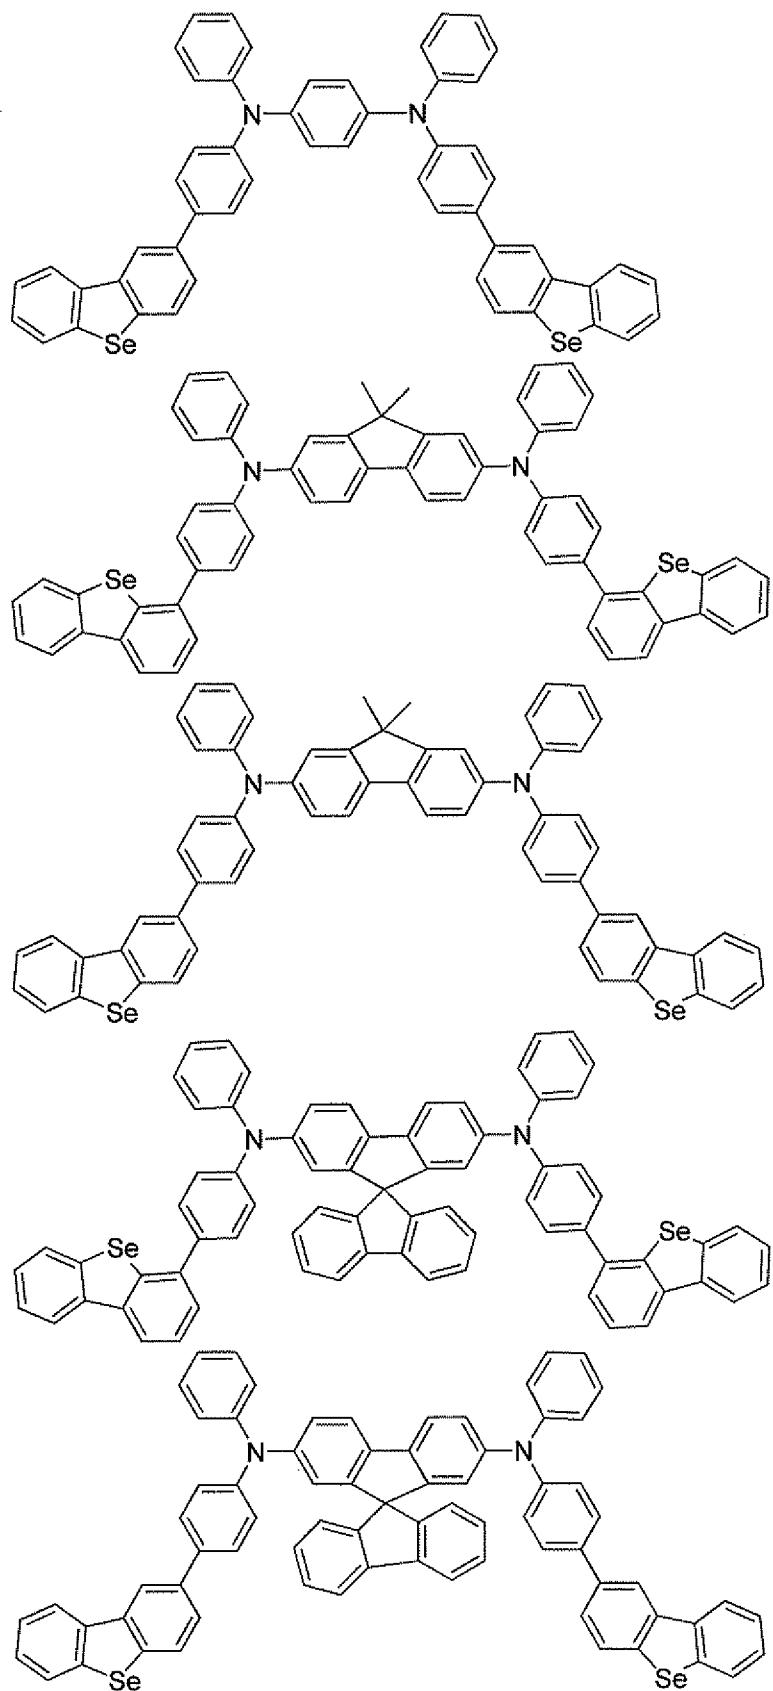


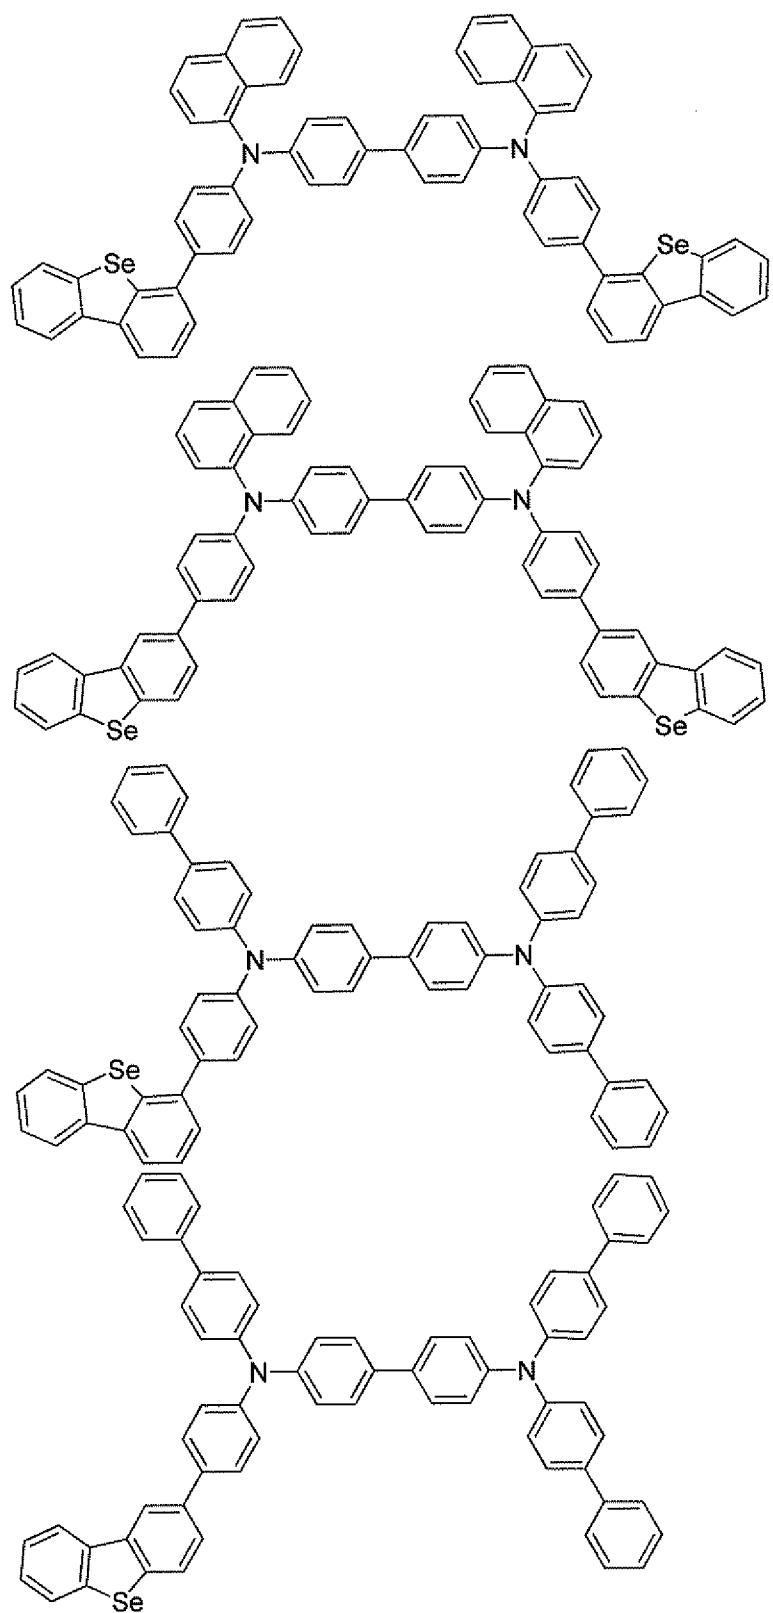


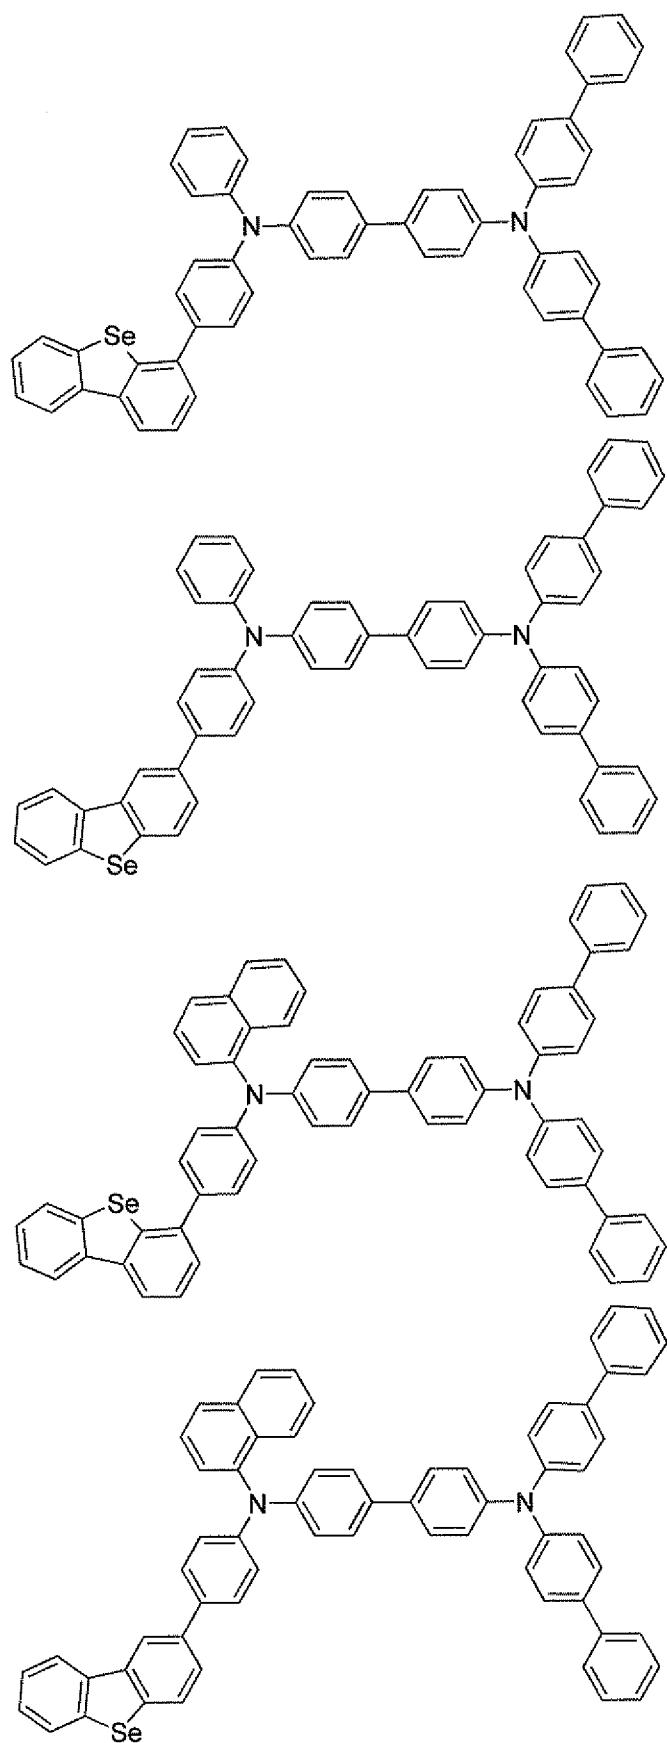


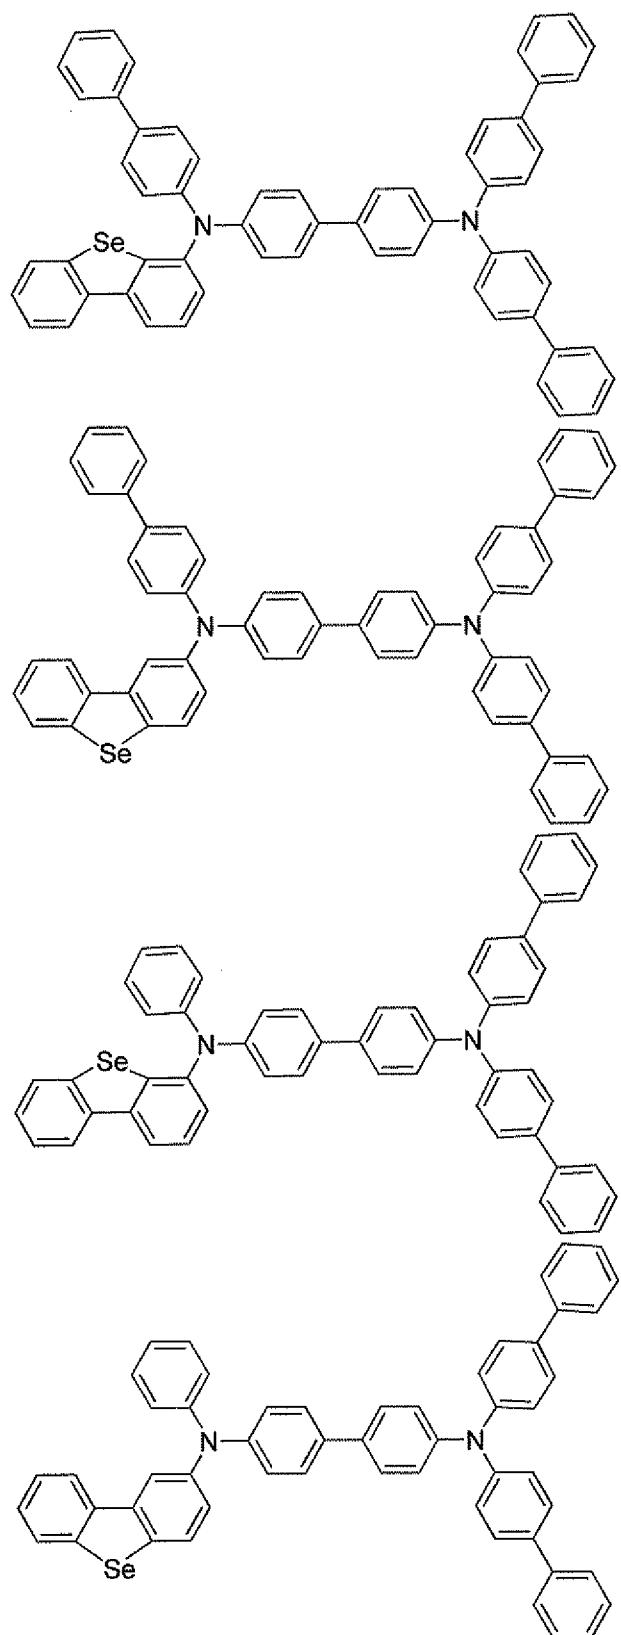


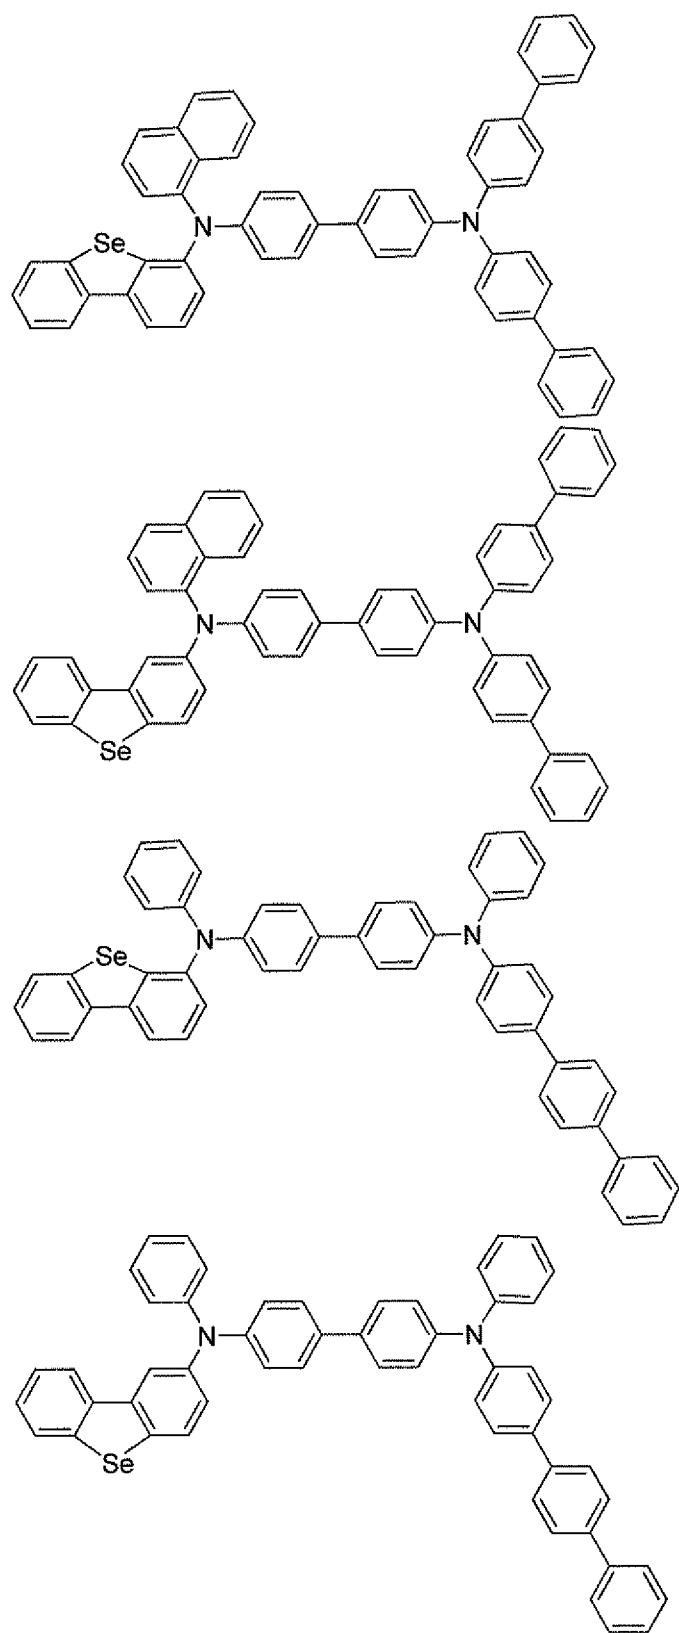

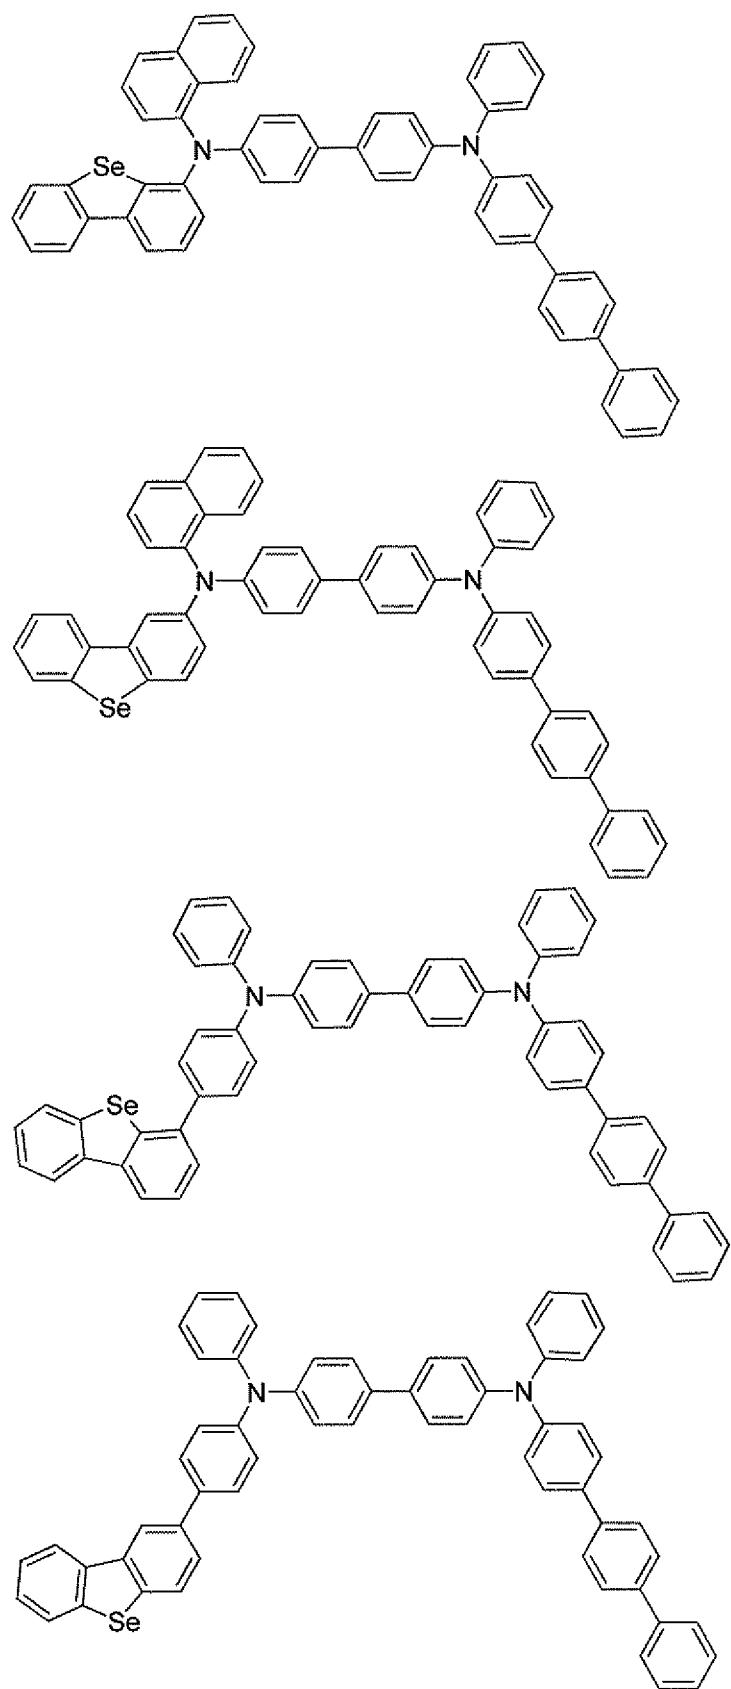

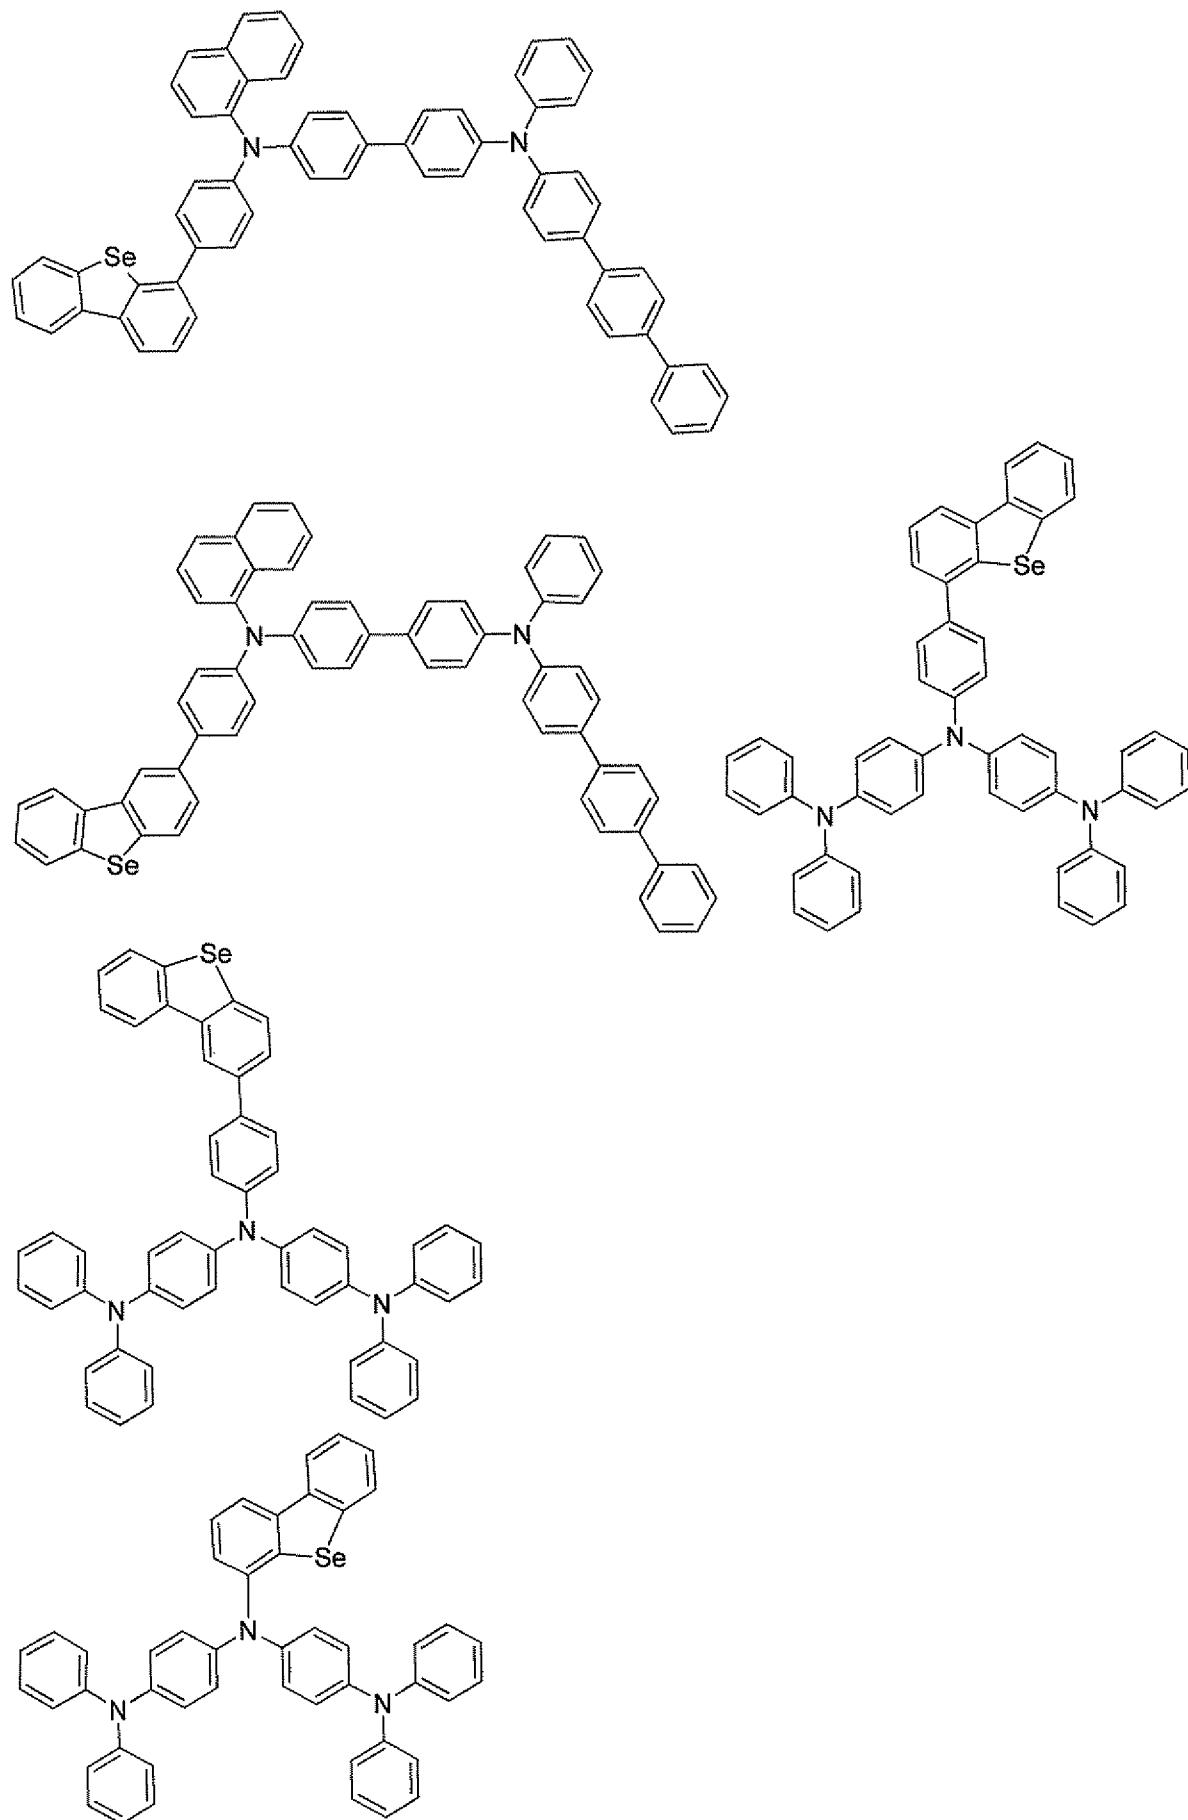


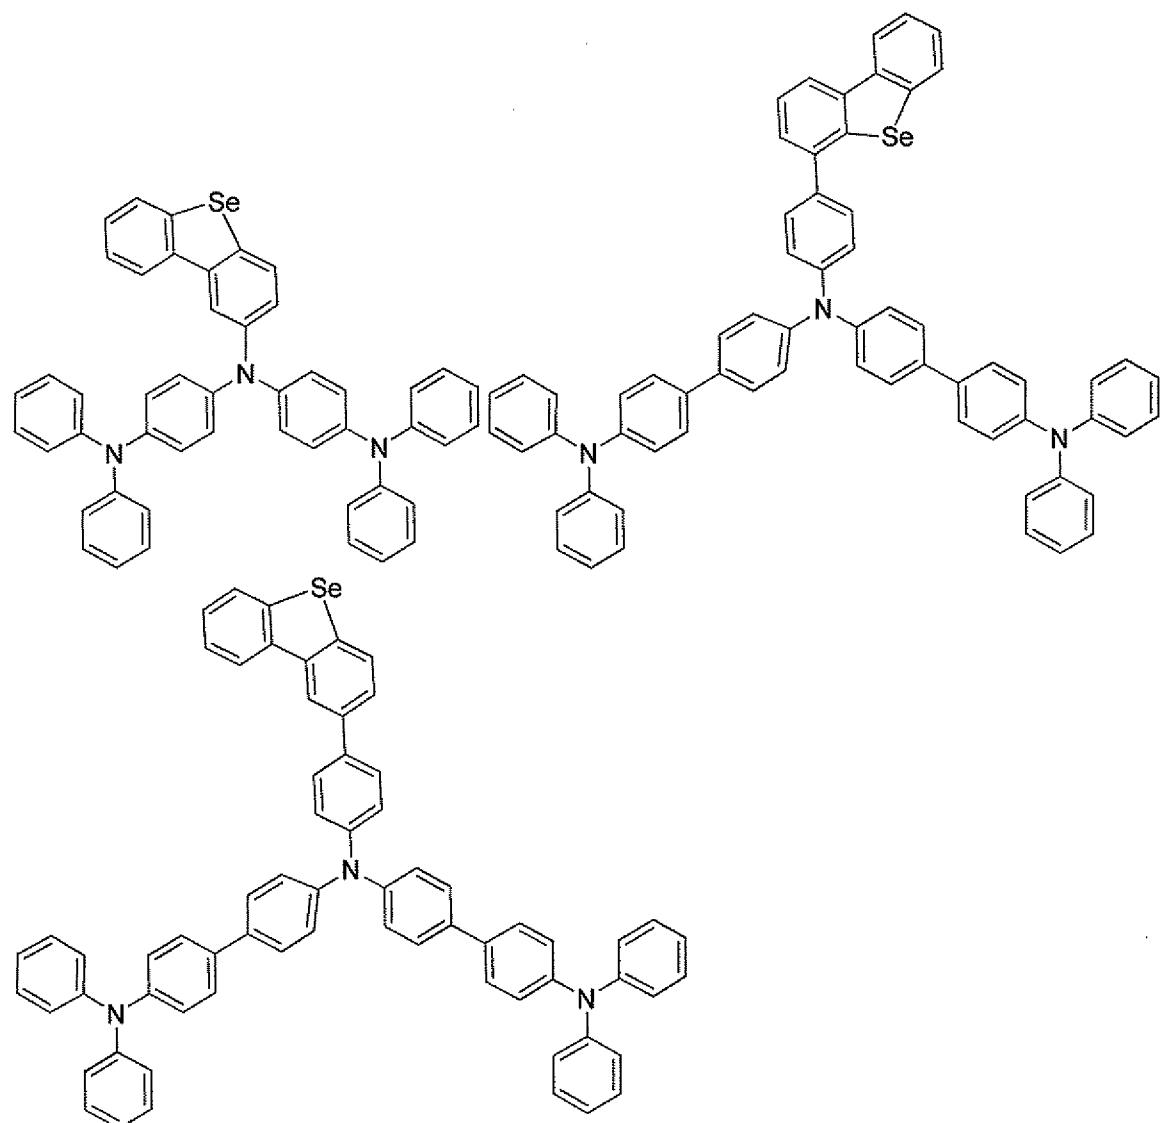

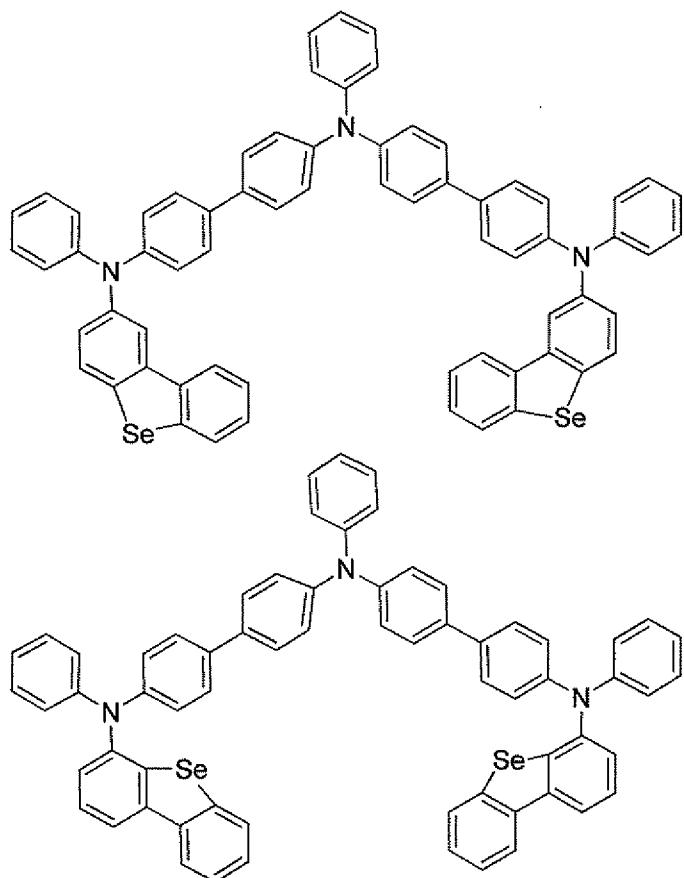


and derivatives thereof. Derivatives, such as compounds substituted by a substituent, 5 including but not limited to halo, alkyl, heteroalkyl, cycloalkyl, alkenyl, alkynyl, arylkyl, heterocyclic group, aryl, and heteroaryl, are contemplated.

In one embodiment, organoselenium compound is

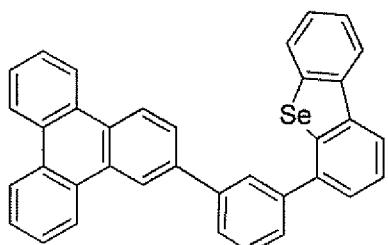

H-1



or

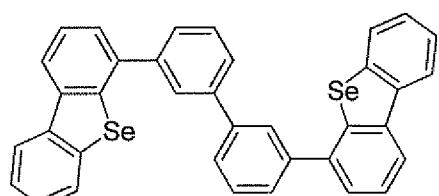



H-2

or a derivative thereof, such as such as the compound substituted by a substituent, including but not limited to halo, alkyl, heteroalkyl, cycloalkyl, alkenyl, alkynyl, arylkyl, heterocyclic group, aryl, and heteroaryl.


In still another embodiment, the organoselenium compound is selected from the  
5 group consisting of:

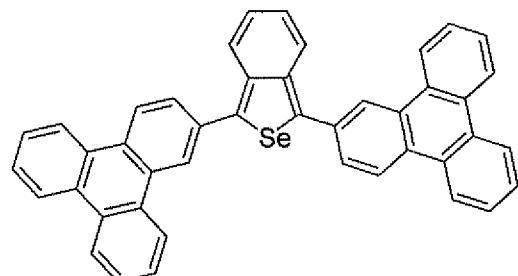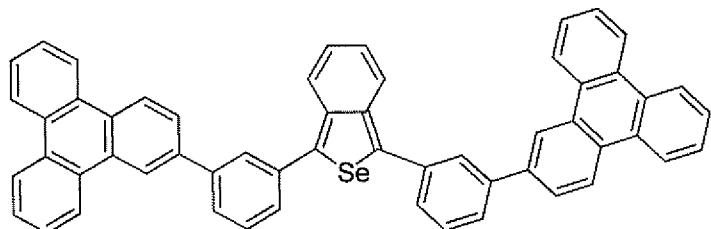

10

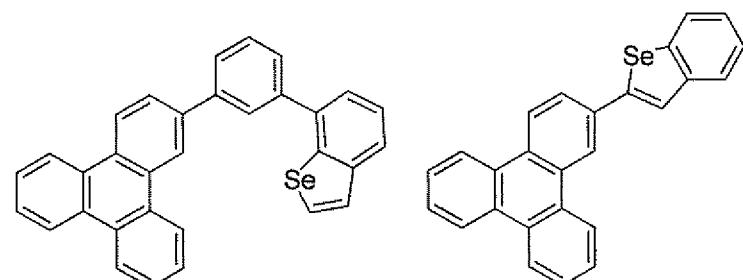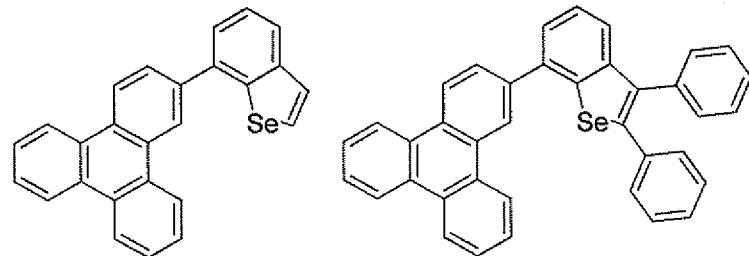

15

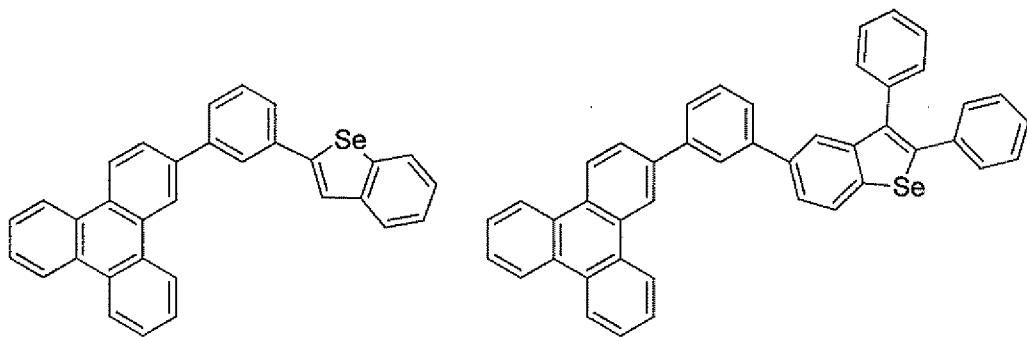

and derivatives thereof. Derivatives, such compounds substituted by a substituent, including but not limited to halo, alkyl, heteroalkyl, cycloalkyl, alkenyl, alkynyl, arylalkyl, heterocyclic group, aryl, and heteroaryl, are contemplated.

The organoselenium compounds of the present invention can be prepared by methods known in the art, including but not limited to method illustrated in the Examples below.

[0031] An organic light emitting device comprising the organoselenium compound of the invention is also provided. The device may include an anode, a cathode, and an organic emissive layer disposed between the anode and the cathode. The organic emissive layer may include a host and a phosphorescent dopant. In one embodiment, the device includes the organoselenium material of the invention as the host material in an emissive layer. Any of the dopants listed in Table 1 below may be used in the emissive layer in conjunction with an organoselenium material as the host material. In a preferred embodiment, the dopant is a red dopant selected from the list of red dopants in Table 1. In another preferred embodiment, the dopant is a green dopant selected from the list of green dopants in Table 1. In still another embodiment, the dopant is a blue dopant selected from the list of blue dopants in Table 1.

The concentration of the dopant in the emissive layer can be determined by a person skilled in the art based on the particular dopant used and the requirement of the device.

The organic light emitting device may comprise additionally a hole transporting layer (HTL) or an electron transporting layer (ETL). In preferred embodiments, the hole transporting layer or the electron transporting layer comprises an organoselenium material of the invention.

## COMBINATION WITH OTHER MATERIALS



[0032] The organoselenium materials described herein as useful for a particular layer in an organic light emitting device may be used in combination with a wide variety of other materials present in the device. For example, the organoselenium material of the invention can be used as a host of an emissive layer in conjunction with one or more emissive dopants 5 disclosed in Table 1.

The organoselenium material may also be used in conjunction with a wide variety of other host materials disclosed in Table 1 in transport layers, blocking layers, injection layers, electrodes and other layers that may be present in an OLED.







The materials described or referred to below are non-limiting examples of materials 10 that may be useful in combination with the compounds disclosed herein, and one of skill in the art can readily consult the literature to identify other materials that may be useful in combination.








[0033] In addition to and / or in combination with the materials disclosed herein, many hole 15 injection materials, hole transporting materials, host materials, dopant materials, exiton/hole blocking layer materials, electron transporting and electron injecting materials may be used in an OLED. Non-limiting examples of the materials that may be used in an OLED in combination with materials disclosed herein are listed in Table 1 below. Table 1 lists non-limiting classes of materials, non-limiting examples of compounds for each class, and references that disclose the materials.











20 TABLE 1










MATERIAL	EXAMPLES OF MATERIAL	PUBLICATIONS
<b>Hole injection materials</b>		
Phthalocyanine and porphyrin compounds		Appl. Phys. Lett. 69, 2160 (1996)
Starburst triarylamines		J. Lumin. 72-74, 985 (1997)

CF <sub>x</sub> Fluorohydrocarbon polymer		Appl. Phys. Lett. 78, 673 (2001)
Conducting polymers (e.g., PEDOT:PSS, polyaniline, polythiophene)		Synth. Met. 87, 171 (1997) WO2007002683
Phosphonic acid and silane SAMs		US20030162053
Triarylamine or polythiophene polymers with conductivity dopants		EA01725079A1
Arylamines complexed with metal oxides such as molybdenum and tungsten oxides		SID Symposium Digest, 37, 923 (2006) WO2009018009
p-type semiconducting organic complexes		US20020158242
Metal organometallic complexes		US20060240279

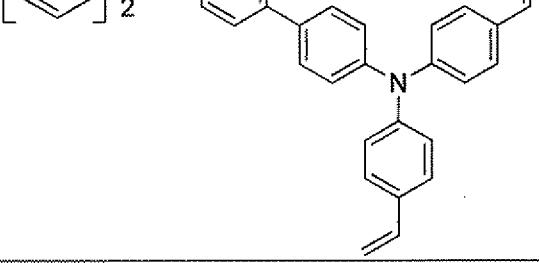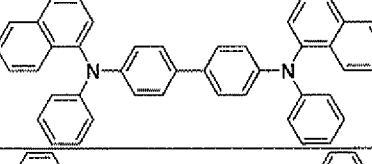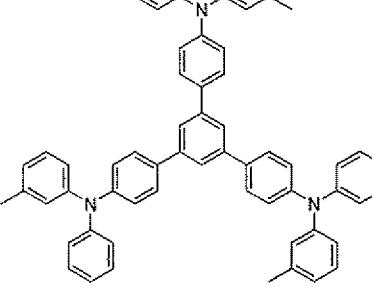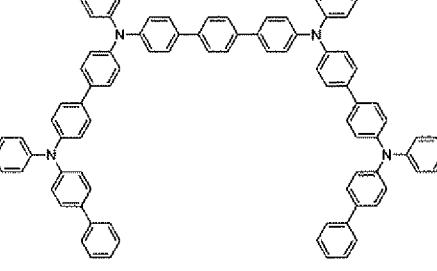Cross-linkable compounds		US20080220265
Hole transporting materials		
Triarylamines (e.g., TPD, $\alpha$ -NPD)		Appl. Phys. Lett. 51, 913 (1987)
		US5061569
		EP650955
		J. Mater. Chem. 3, 319 (1993)
		Appl. Phys. Lett. 90, 183503 (2007)


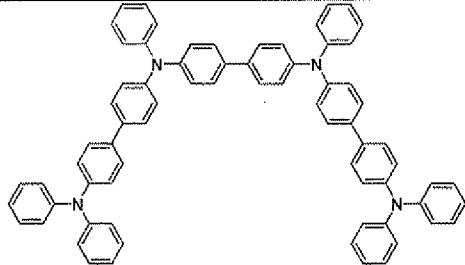


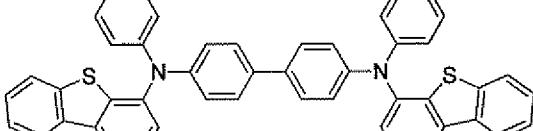



		Appl. Phys. Lett. 90, 183503 (2007)
Triarylamine on spirofluorene core		Synth. Met. 91, 209 (1997)
Arylamine carbazole compounds		Adv. Mater. 6, 677 (1994), US20080124572
Triarylamine with (di)benzothiophene/(di)benzofuran		US20070278938, US20080106190
Indolocarbazoles		Synth. Met. 111, 421 (2000)
Isoindole compounds		Chem. Mater. 15, 3148 (2003)
Metal carbene complexes		US20080018221
<b>Phosphorescent OLED host materials</b>		
<b>Red hosts</b>		



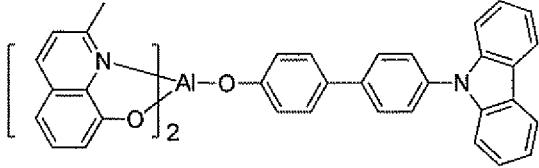


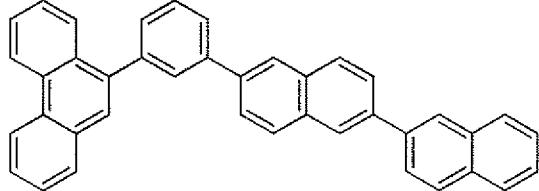


Arylcarbazoles		Appl. Phys. Lett. 78, 1622 (2001)
Metal 8-hydroxyquinolates (e.g., Alq <sub>3</sub> , BAlq)		Nature 395, 151 (1998)
		US20060202194
		WO2005014551
		WO2006072002
Metal phenoxybenzothiazole compounds		Appl. Phys. Lett. 90, 123509 (2007)
Conjugated oligomers and polymers (e.g., polyfluorene)		Org. Electron. 1, 15 (2000)
Aromatic fused rings		WO2009066779, WO2009066778, WO2009063833, US20090045731, US20090045730, WO2009008311, US20090008605, US20090009065
Zinc complexes		WO2009062578
Green hosts		
Arylcarbazoles		Appl. Phys. Lett. 78, 1622 (2001)




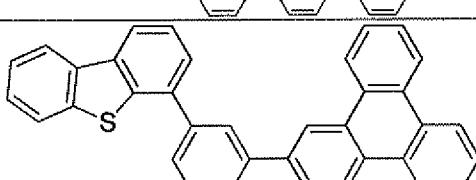
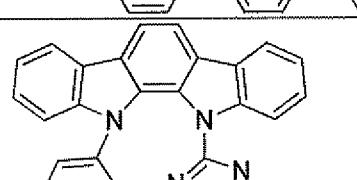
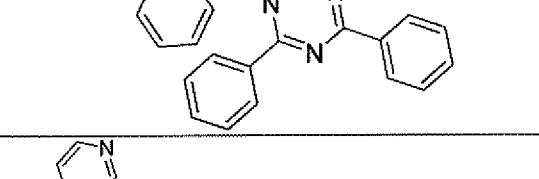

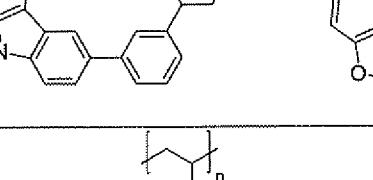
		US20030175553
		WO2001039234
Aryltriphenylene compounds		US20060280965
		US20060280965
		WO2009021126
Donor acceptor type molecules		WO2008056746
Aza-carbazole/DBT/DBF		JP2008074939
Polymers (e.g., PVK)		Appl. Phys. Lett. 77, 2280 (2000)
Spirofluorene compounds		WO2004093207










Metal phenoxybenzoxazole compounds		WO2005089025
		WO2006132173
		JP200511610
Spirofluorene-carbazole compounds		JP2007254297
		JP2007254297
Indolocarbazoles		WO2007063796
		WO2007063754
5-member ring electron deficient heterocycles (e.g., triazole, oxadiazole)		J. Appl. Phys. 90, 5048 (2001)
		WO2004107822









Tetraphenylene complexes		US20050112407
Metal phenoxypyridine compounds		WO2005030900
Metal coordination complexes (e.g., Zn, Al with N^N ligands)		US20040137268, US20040137267
<b>Blue hosts</b>		
Arylcarbazoles		Appl. Phys. Lett, 82, 2422 (2003)
		US20070190359
Dibenzothiophene/Dibenzofuran-carbazole compounds		WO2006114966, US20090167162
		US20090167162
		WO2009086028

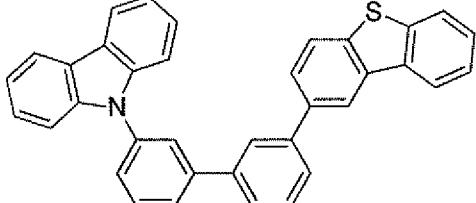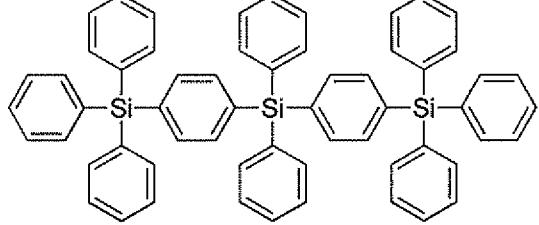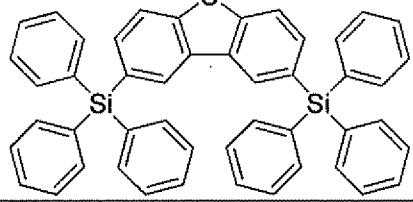
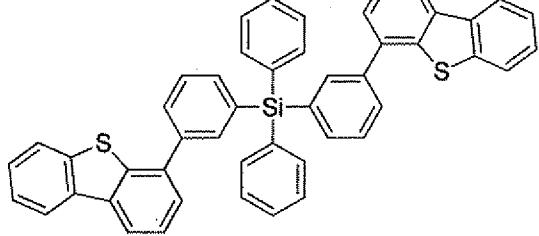
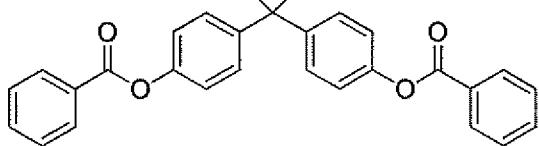



		US20090030202, US20090017330
Silicon aryl compounds		US20050238919
		WO2009003898
Silicon/Germanium aryl compounds		EP2034538A
Aryl benzoyl ester		WO2006100298
High triplet metal organometallic complex		US7154114
<b>Phosphorescent dopants</b>		
<b>Red dopants</b>		
Heavy metal porphyrins (e.g., PtOEP)		Nature 395, 151 (1998)
Iridium(III) organometallic complexes		Appl. Phys. Lett. 78, 1622 (2001)








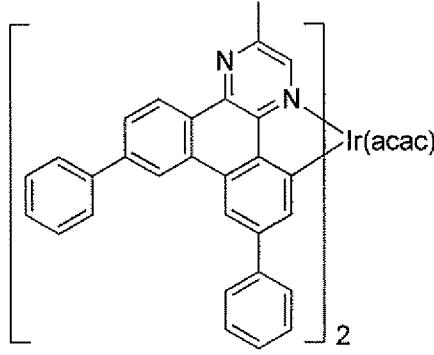
	US2006835469
	US2006835469
	US20060202194
	US20060202194
	US20070087321
	US20070087321
	Adv. Mater. 19, 739 (2007)
	WO2009100991

		WO2008101842
Platinum(II) organometallic complexes		WO2003040257
Osmium(III) complexes		Chem. Mater. 17, 3532 (2005)
Ruthenium(II) complexes		Adv. Mater. 17, 1059 (2005)
Rhenium (I), (II), and (III) complexes		US20050244673
Green dopants		Inorg. Chem. 40, 1704 (2001)
		US20020034656
		US7332232
		

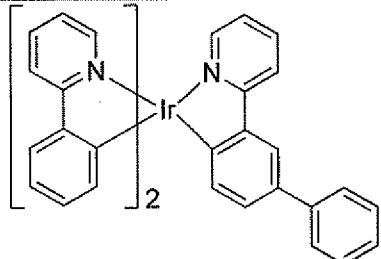







		US20090108737
		US20090039776
		US6921915
		US6687266
		Chem. Mater. 16, 2480 (2004)
		US20070190359
		US 20060008670 JP2007123392
		Adv. Mater. 16, 2003 (2004)
		Angew. Chem. Int. Ed. 2006, 45, 7800


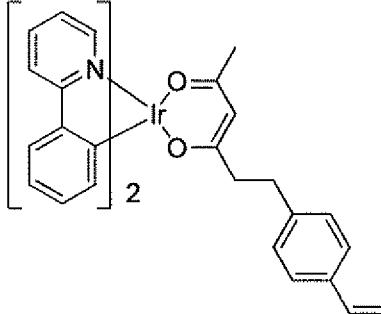




		WO2009050290
		US20090165846
		US20080015355
Monomer for polymeric metal organometallic compounds		US7250226, US7396598
Pt(II) organometallic complexes, including polydentated ligands		Appl. Phys. Lett. 86, 153505 (2005)
		Appl. Phys. Lett. 86, 153505 (2005)
		Chem. Lett. 34, 592 (2005)
		WO2002015645

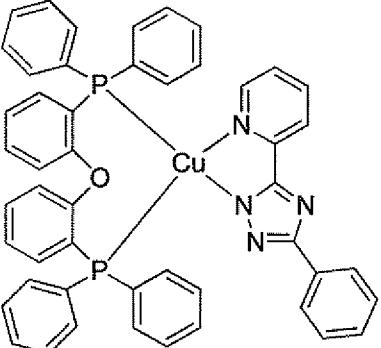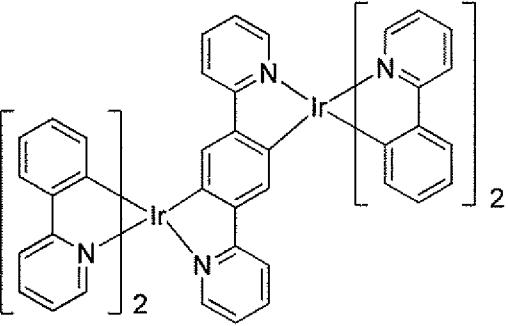		US20060263635
Cu complexes		WO2009000673
Gold complexes		Chem. Commun. 2906 (2005)
Rhenium(III) complexes		Inorg. Chem. 42, 1248 (2003)
Deuteriated organometallic complexes		US20030138657
Organometallic complexes with two or more metal centers		US20030152802

		US7090928
<b>Blue dopants</b>		
Iridium(III) organometallic complexes		WO2002002714
		WO2006009024
		US20060251923
		US7393599, WO2006056418, US20050260441, WO2005019373
		US7534505
		US7445855
		US20070190359, US20080297033

		US7338722
		US20020134984
		Angew. Chem. Int. Ed. 47, 1 (2008)
		Chem. Mater. 18, 5119 (2006)
		Inorg. Chem. 46, 4308 (2007)
		WO2005123873
		WO2005123873
		WO2007004380
		WO2006082742

Osmium(II) complexes		US7279704
		Organometallics 23, 3745 (2004)
Gold complexes		Appl. Phys. Lett. 74, 1361 (1999)
Platinum(II) complexes		WO2006098120, WO2006103874
<b>Exciton/hole blocking layer materials</b>		
Bathocuprine compounds (e.g., BCP, BPhen)		Appl. Phys. Lett. 75, 4 (1999)
		Appl. Phys. Lett. 79, 449 (2001)
Metal 8-hydroxyquinolates (e.g., BAlq)		Appl. Phys. Lett. 81, 162 (2002)
5-member ring electron deficient heterocycles such as triazole, oxadiazole, imidazole, benzimidazole		Appl. Phys. Lett. 81, 162 (2002)
Triphenylene compounds		US20050025993

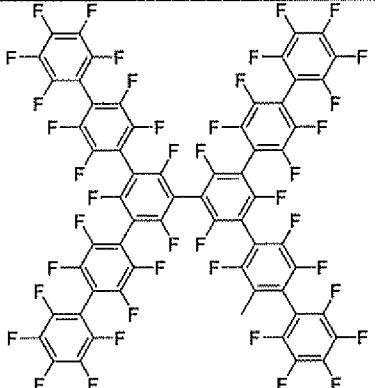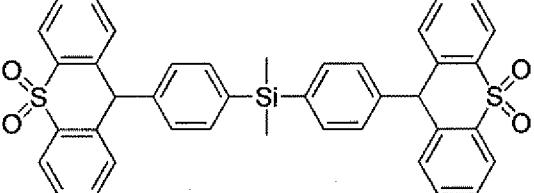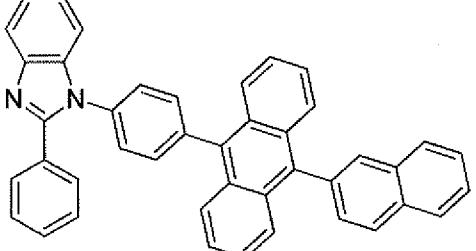Fluorinated aromatic compounds		Appl. Phys. Lett. 79, 156 (2001)
Phenothiazine-S-oxide		WO2008132085
Electron transporting materials		
Anthracene-benzoimidazole compounds		WO2003060956
		US20090179554
Aza triphenylene derivatives		US20090115316
Anthracene-benzothiazole compounds		Appl. Phys. Lett. 89, 063504 (2006)
Metal 8-hydroxyquinolates (e.g., Alq <sub>3</sub> , Zrq <sub>4</sub> )		Appl. Phys. Lett. 51, 913 (1987) US7230107

Metal hydroxybenoquinolates		Chem. Lett. 5, 905 (1993)
Bathocuprime compounds such as BCP, BPhen, etc		Appl. Phys. Lett. 91, 263503 (2007)
		Appl. Phys. Lett. 79, 449 (2001)
5-member ring electron deficient heterocycles (e.g.,triazole, oxadiazole, imidazole, benzoimidazole)		Appl. Phys. Lett. 74, 865 (1999)
		Appl. Phys. Lett. 55, 1489 (1989)
		Jpn. J. Apply. Phys. 32, L917 (1993)
Sirole compounds		Org. Electron. 4, 113 (2003)
Arylborane compounds		J. Am. Chem. Soc. 120, 9714 (1998)
Fluorinated aromatic compounds		J. Am. Chem. Soc. 122, 1832 (2000)
Fullerene (e.g., C60)		US20090101870


Triazine complexes		US20040036077
Zn (N^N) complexes		US6528187

## EXAMPLES

**Example 1: Compound H-1**

5

## 1. Synthesis of dibenzoselenophene

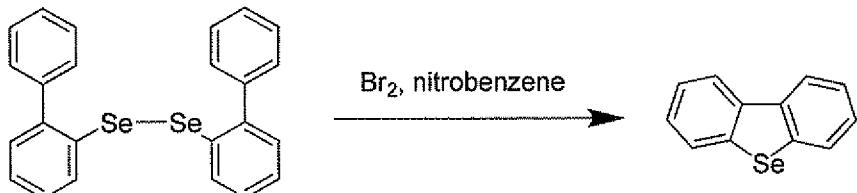


10

A mixture of 10 g (21.5 mmol) of 1,2-di(biphenyl-2-yl)diselane (synthesized according to J. Am. Chem. Soc. 1950, 72, 5753-5754), 3.45 g (21.5 mmol) of bromine and 30 mL of nitrobenzene was heated at 110 °C for 3.5 hours. Then the reaction mixture was cooled and nitrobenzene was removed by vacuum distillation. The residue was purified by silica gel column chromatography using 10% methylene chloride in hexane as the elutent. 9.8 g of white solids were obtained as the product which was confirmed by MS.

20

## 2. dibenzoselenophen-4-ylboronic acid

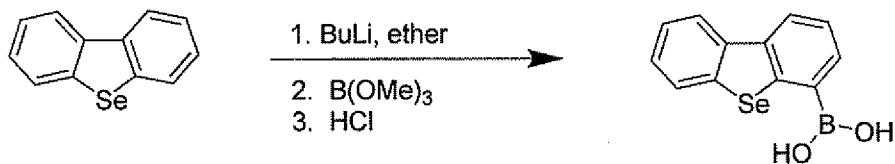


5        4.0 g (17.3 mmol) of dibenzoselenophene and 150 mL of dry ether were added in a 250 mL three necked flask under nitrogen. To the mixture, 11.5 mL of BuLi (1.6 M in hexane) was added slowly at room temperature. The reaction mixture was then heated to reflux for 5 hours. The reaction mixture was cooled to -78 °C and 5 mL of trimethyl borate was added. It was then left to stir at room temperature for overnight. About 50 mL of 1 M 10 HCl was added to the reaction mixture. The organic phase was extracted with ethyl acetate and dried with sodium sulfate. The combined organic phase was evaporated to dryness and 100 mL of 30% ethyl acetate in hexane was added to the solid with stirring at room temperature for 8 hours. The suspension was filtered, the solids were washed with hexane and dried, yielding 2 of white solids as the product which was confirmed by NMR

15

### 3.        Synthesis of Compound H-1

20

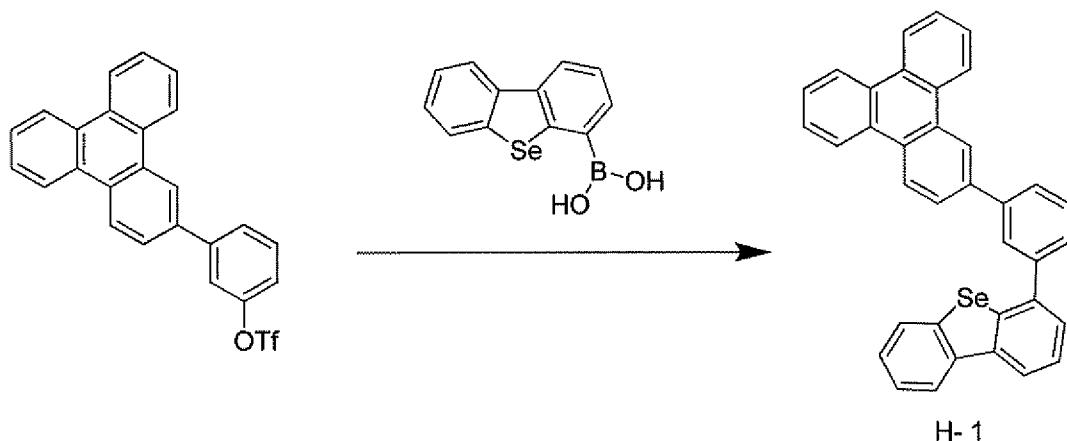



1.0 g (3.6 mmol) of dibenzoselenophen-4-ylboronic acid , 1.51 g (3.3 mmol) of 25 triphenylenephene phenyl triflate (synthesized according to the method disclosed in Example 3

below), 0.15 g (0.16 mmol) of  $\text{Pd}_2(\text{dba})_3$ , 0.27 g (0.66 mmol) of dicyclohexylphosphino-2',6'-dimethoxybiphenyl, 4.2 g of  $\text{K}_3\text{PO}_4$ , 90 mL of toluene and 10 mL of water were added in a 250 mL three necked flask. The reaction mixture was bubbled with nitrogen for 20 mins and heated to reflux for overnight under nitrogen. The reaction mixture was dried and purified by 5 silica gel column chromatography with 15% methylene chloride in hexane as elutent. ~ 1.35 g of white solids were obtained as the product which was confirmed by NMR.

10 **Example 2: Compound H-2**


15 **1. Synthesis of Compound H-2**

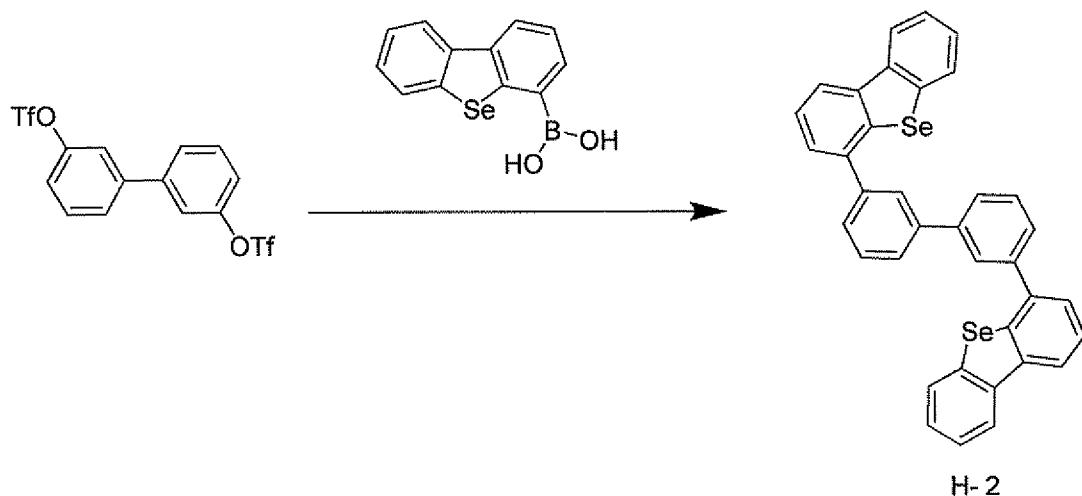

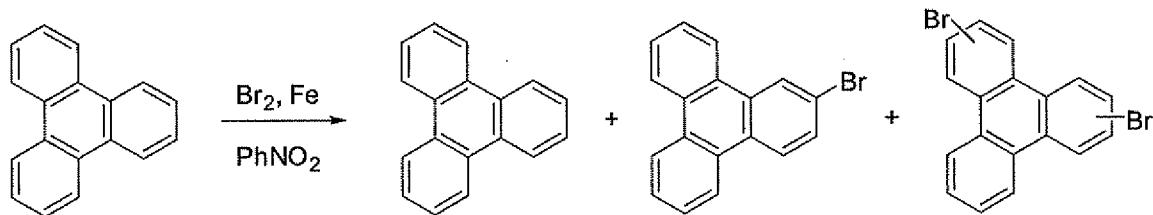


Triphenylene (19.0 g, 83 mmol) was added to 600 mL of nitrobenzene. After 5 all the triphenylene had dissolved, iron powder (0.07 g, 1.25 mmol) was added. The reaction flask was put in an ice bath. Bromine (20.0 g 125 mmol) in 50 mL of nitrobenzene was slowly added via addition funnel. After that, the reaction was stirred in an ice bath for 5 hours. HPLC was performed to monitor the reaction (TLC did not show separation of triphenylene and bromotriphenylenes). When the ratio of triphenylene:2-bromotriphenylene:10 dibromotriphenylenes reached approximately 2:7:1 (at 254 nm), the reaction was quenched by adding a Na<sub>2</sub>SO<sub>3</sub> solution. The mixture was then extracted with CH<sub>2</sub>Cl<sub>2</sub>. The combined organic extract was dried over MgSO<sub>4</sub> and the CH<sub>2</sub>Cl<sub>2</sub> was removed by rotovap. The remaining nitrobenzene was removed by vacuum distillation to yield the crude bromotriphenylene product which was used without further purification.

15

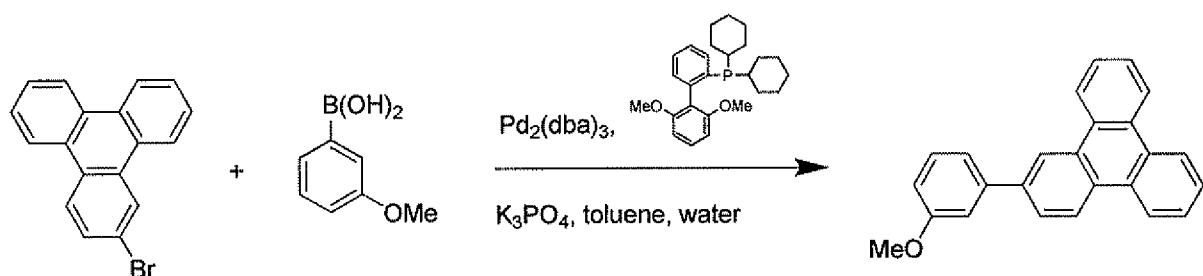

[0034] 12g (39 mmol) bromotriphenylene mixture containing a 2:7:1 mixture of unreacted triphenylene, monobromo and dibromo triphenylene, 13g (86mmol) 3-phenylboronic acid, 20 0.6g (1.56 mmol) 2-dicyclohexylphosphino-2',6'-dimethoxybiphenyl and 25g (117 mmol) potassium phosphate tribasic (K<sub>3</sub>PO<sub>4</sub>) are weighed in a round bottom flask. 150 mL toluene and 80 mL water were added to the flask as solvent. The solution was purged with nitrogen and 0.4g (0.39 mmol) of tris(dibenzylideneacetone)dipalladium (0) [Pd<sub>2</sub>(dba)<sub>3</sub>] was added. The solution was heated to reflux for twelve hours. Upon cooling, the organic layer was 25 separated, and dried with MgSO<sub>4</sub>. The product was readily separated by column chromatography from triphenylene and di-(3-methoxyphenyl) substituted triphenylene using

Hexane/dichloromethane as eluent (1/0 gradient to 3/2). The solvent was removed by rotary evaporation, and the product, 2-(3-methoxyphenyl)triphenylene, was dried overnight under vacuum.

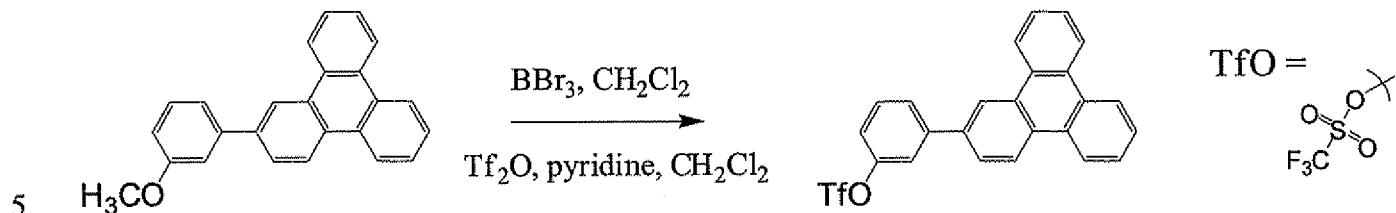

[0035] In a round bottom flask under nitrogen, 1.8g (5.4 mmol) 2-(3-methoxyphenyl)triphenylene was dissolved in 25 mL anhydrous dichloromethane. The solution was cooled to -78°C and 4g (1.5mL, 16 mmol) boron tribromide was added slowly via syringe. The solution was warmed to room temperature and stirred overnight. Ice was carefully added to quench unreacted  $\text{BBr}_3$ . The 3-(triphenylen-2-yl)phenol intermediate precipitated upon addition of ice, and dichloromethane was added to dissolve. The organic layer was separated and dried with  $\text{MgSO}_4$ , the dichloromethane was removed by rotary evaporation and the product was dried under vacuum.

10 [0036] 1.7g (5.3mmol) of 3-(triphenylen-2-yl)phenol was added to a flask under nitrogen with 0.84g (10.5 mmol) anhydrous pyridine and 100 mL anhydrous dichloromethane. The solution was cooled in an ice bath and 2.97g (10.5 mmol) trifluoromethanesulfonic anhydride ( $\text{Tf}_2\text{O}$ ) was added slowly via syringe. The solution was warmed to room temperature and stirred overnight. The solution was washed with water, dried with  $\text{MgSO}_4$  and the solvent 20 was removed by rotary evaporation. The product, 3-(triphenylen-2-yl)phenyl trifluoromethanesulfonate, was purified by column chromatography using hexane/dichloromethane as eluent (1/0 to 1/1 gradient).

Description of the method of synthesis can also be found in U.S. provisional application No: 60\963,944 , corresponding to International Application No: 25 PCT/US08/72452, filed 8/7/2008, which is incorporated herein by reference in its entirety.

#### Example 4: Device Examples


All example devices were fabricated by high vacuum ( $<10^{-7}$  Torr) thermal evaporation. The anode electrode is 1200 Å of indium tin oxide (ITO). The cathode

consisted of 10 Å of LiF followed by 1,000 Å of Al. All devices are encapsulated with a glass lid sealed with an epoxy resin in a nitrogen glove box (<1 ppm of H<sub>2</sub>O and O<sub>2</sub>) immediately after fabrication, and a moisture getter was incorporated inside the package.

The organic stack of the device examples consisted of sequentially, from the ITO surface, 100 Å of Compound A as the hole injection layer (HIL), 300 Å of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (α-NPD) as the hole transporting layer (HTL), 300 Å of the invention compound doped with 10 or 15 wt% of an Ir phosphorescent compound as the emissive layer (EML), 50 Å of HPT or 100 Å of the invention compound as the ETL2 and 450 or 400 Å of Alq<sub>3</sub> (tris-8-hydroxyquinoline aluminum) as the ETL1.

Comparative Examples 1 and 2 were fabricated similarly to the Device Examples except that the CBP is used as the host.

The device structures and data are summarized in Tables 2 and 3, where Table 2 shows device structure and Table 3 shows corresponding measured results for those devices. As used herein, Compounds A and B, and HPT, have the following structures:

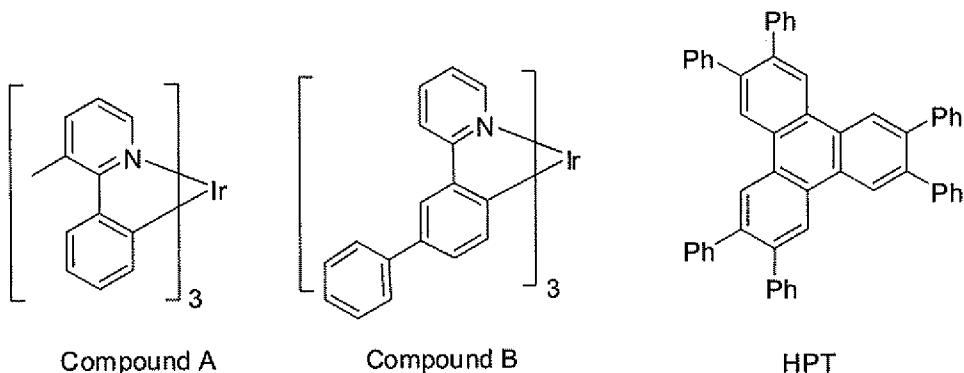

15

Table 2

Device Example	Host	Dopant %	ETL2 (Å)	ETL1 (Å)
Comparative 1	CBP	B 10%	HPT (50)	Alq <sub>3</sub> (450)
Comparative 2	CBP	A 10%	HPT (50)	Alq <sub>3</sub> (450)
1	H-1	A 10%	HPT (50)	Alq <sub>3</sub> (450)
2	H-1	A 10%	H-1 (100)	Alq <sub>3</sub> (400)
3	H-1	A 15%	HPT (50)	Alq <sub>3</sub> (450)
4	H-1	A 15%	H-1 (100)	Alq <sub>3</sub> (400)
5	H-2	A 10%	HPT (50)	Alq <sub>3</sub> (450)
6	H-2	A 10%	H-2 (100)	Alq <sub>3</sub> (400)

7	H-2	A 15%	HPT (50)	Alq <sub>3</sub> (450)
8	H-2	A 15%	H-2 (100)	Alq <sub>3</sub> (400)

Table 3

Device Example	CIE		At L=1000 cd/m <sup>2</sup>				At J=40 mA/cm <sup>2</sup>	
	X	Y	V (V)	LE (cd/A)	EQE (%)	PE (lm/W)	L <sub>0</sub> (cd/m <sup>2</sup> )	LT <sub>80%</sub> (hr)
Comparative 1	0.331	0.627	6.1	61.0	17	31.4	16,935	87
Comparative 2	0.346	0.613	6.2	57.0	16	28.9	13,304	105
1	0.357	0.605	6.1	62.6	17.3	32.2	15,561	140
2	0.358	0.605	6.7	56.9	15.7	26.7	15,421	150
3	0.362	0.604	5.8	63.3	17.4	34.3	17,977	130
4	0.363	0.603	6.3	55.8	15.4	27.8	16,436	175
5	0.352	0.611	6.2	61.1	16.8	30.9	16,102	126
6	0.351	0.610	7.3	45.6	12.6	19.6	14,384	148
7	0.354	0.610	6.3	59.2	16.3	29.5	16,255	73
8	0.354	0.610	7.5	36.5	10	15.3	11,882	185

5

From Device Examples 1-8, it can be seen that Compounds H-1 and H-2 as hosts in green phosphorescent OLEDs give high device efficiency (LE>40 cd/A at 1000 cd/m<sup>2</sup>), indicating the dienzoelenophene linked with aryl building blocks such as biphenyls or triphenylenes, have triplet energy high enough for efficient green electrophosphorescence.

10 The high stability of devices incorporating Compounds H-1 and H-2 as the host is notable. Device Example 1 and Comparative Example 2 are only different in the host. Device Example 1 uses Compound H-1 as the host whereas Comparative Example 2 uses the commonly used host CBP. The lifetime, T<sub>80%</sub> (defined as the time required for the initial luminance, L<sub>0</sub>, to decay to 80% of its value, at a constant current density of 40 mA/cm<sup>2</sup> at 15 room temperature) are 140 hours and 105 hours respectively, with Device Example 1 having a slightly higher L<sub>0</sub>. Similarly, Device Example 5 using Compound H-2 as the host, is more stable than Comparative Example 2. It is also notable that the compounds may function well as an enhancement layer material (ETL2). For example, Device Example 8 and Device Example 4 both have Compound H-1 and H-2 as the host and ETL2 layer, respectively. They 20 have T<sub>0.8</sub> of 185 and 175 hours respectively, indicating the good performance of Compounds H-1 and H-2 as the enhancement layer material.

The data suggest that hosts containing dibenzoselenophenes are excellent host and enhancement layer materials for phosphorescent OLEDs, providing as least the same efficiency and improvement in stability compared to the commonly used CBP as the host. More conjugated versions of triphenylene containing benzoselenophenes, for example 5 triphenylene and dibenzoselenophene units linked via *p*-phenylene (such as 4,4'-biphenyl) may be very suitable for lower energy (yellow to red) phosphorescent OLEDs. The triphenylene containing group may be attached to any position of benzoselenophenes.













[0037] It is understood that the various embodiments described herein are by way of example only, and are not intended to limit the scope of the invention. For example, many of 10 the materials and structures described herein may be substituted with other materials and structures without deviating from the spirit of the invention. The present invention as claimed may therefore includes variations from the particular examples and preferred embodiments described herein, as will be apparent to one of skill in the art. It is understood that various theories as to why the invention works are not intended to be limiting.








What is claimed is:

1. An organic light emitting device, comprising an organic layer positioned between an anode layer and a cathode layer, said organic layer comprising an organoselenium material selected from the group consisting of a compound comprising a dibenzoselenophene, a 5 compound comprising a benzo[*b*]selenophene, and a compound comprising a benzo[*c*]selenophene.





2. The organic light emitting device of claim 1, wherein said organoselenium material is selected from the group consisting of


10

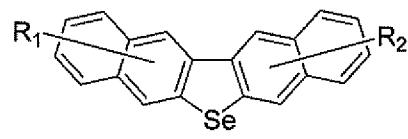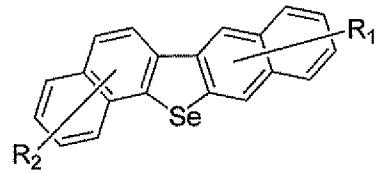


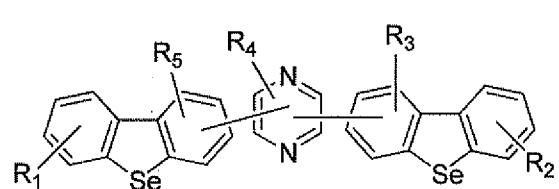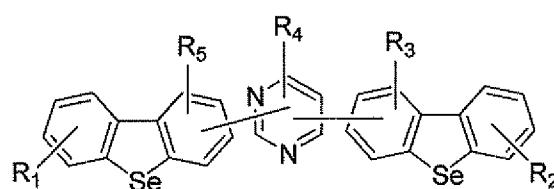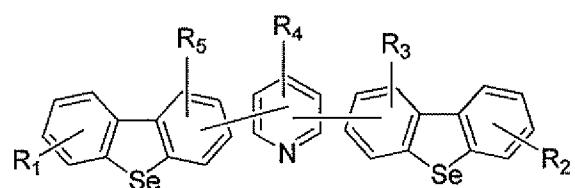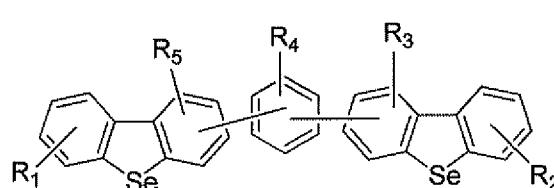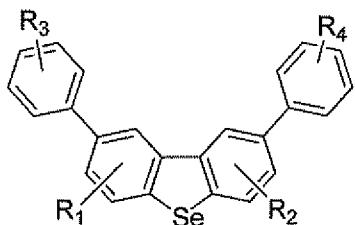



5

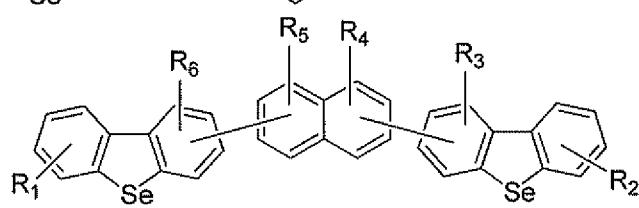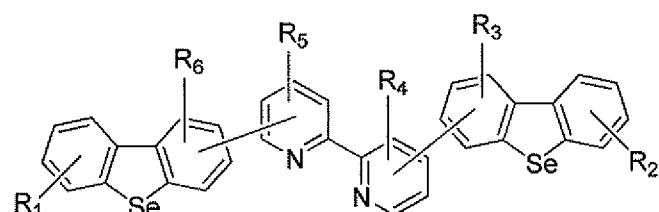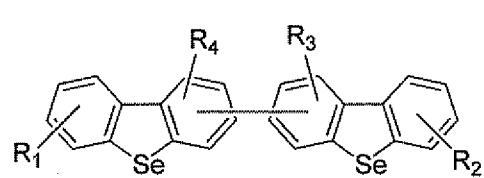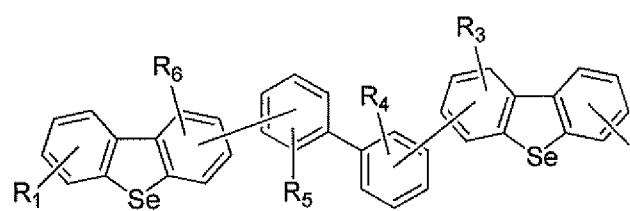

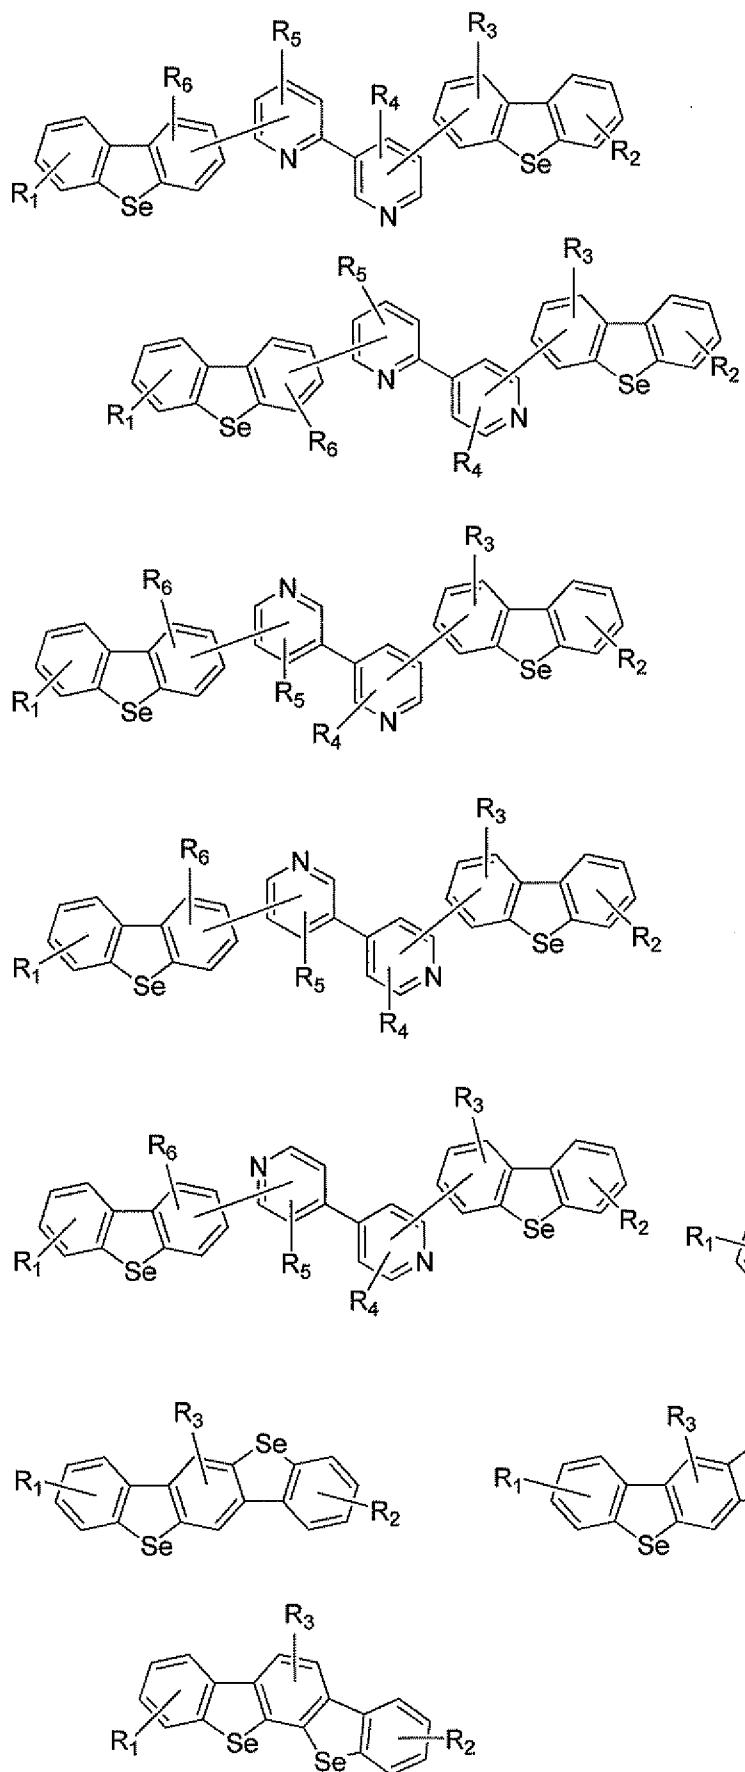

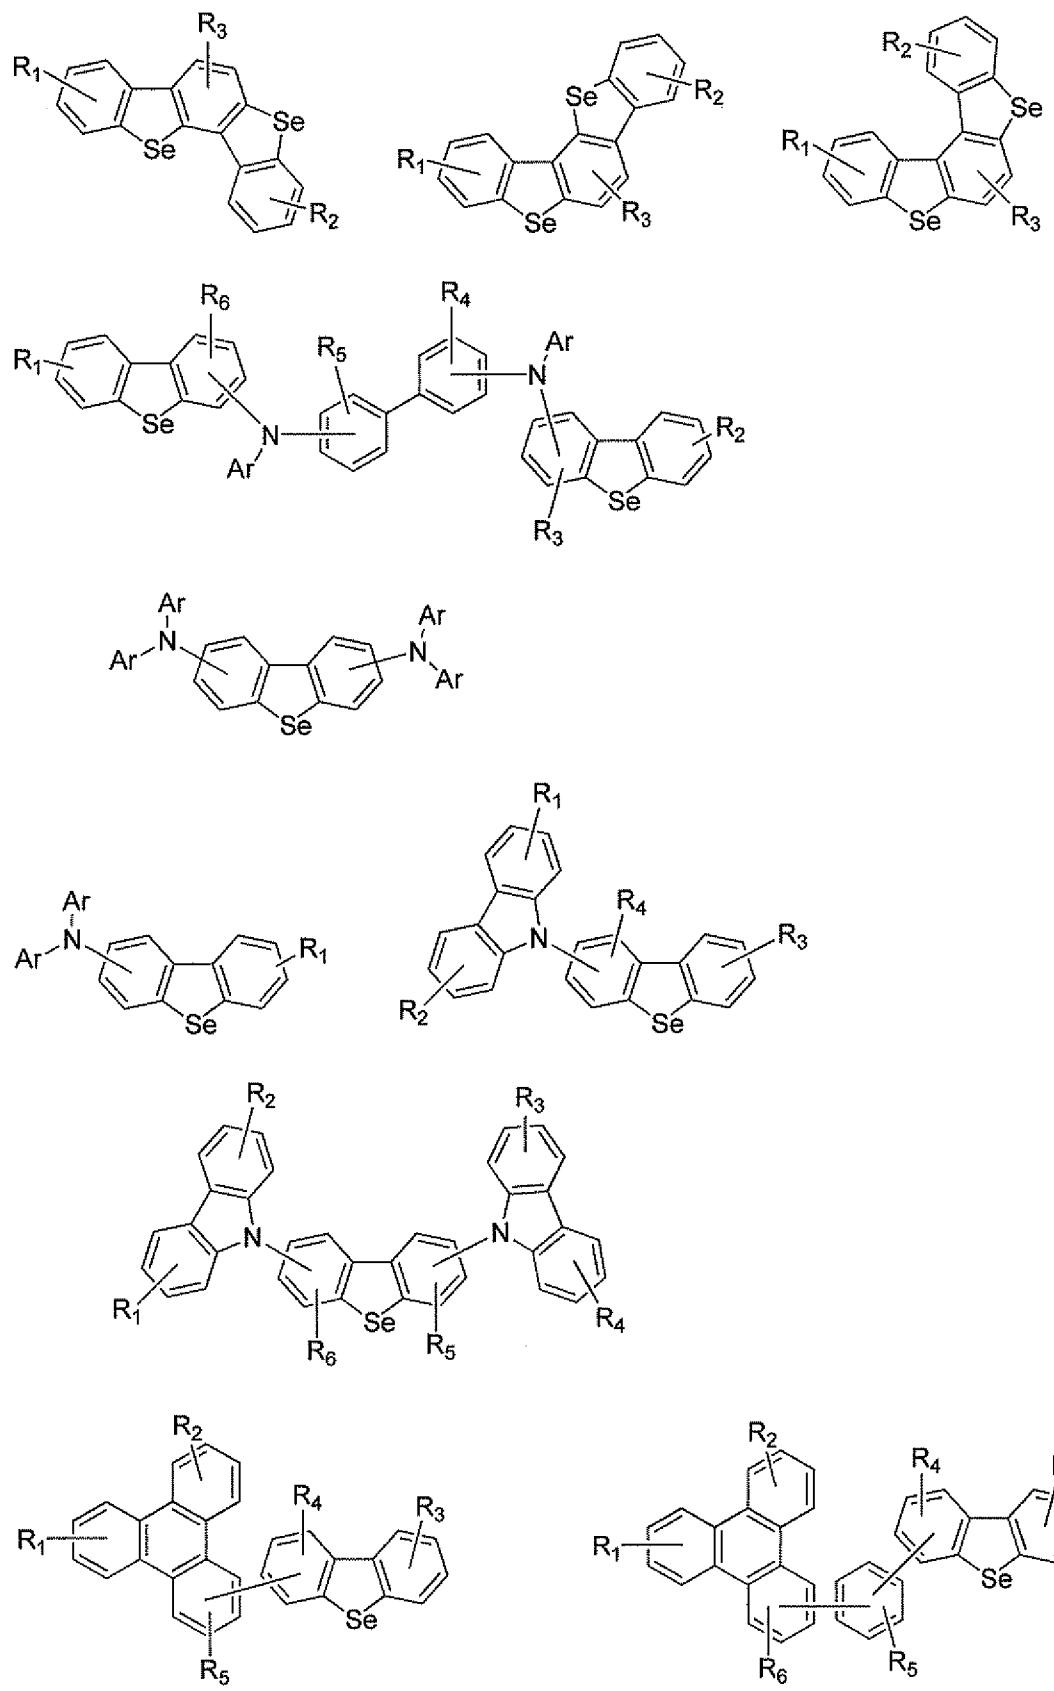











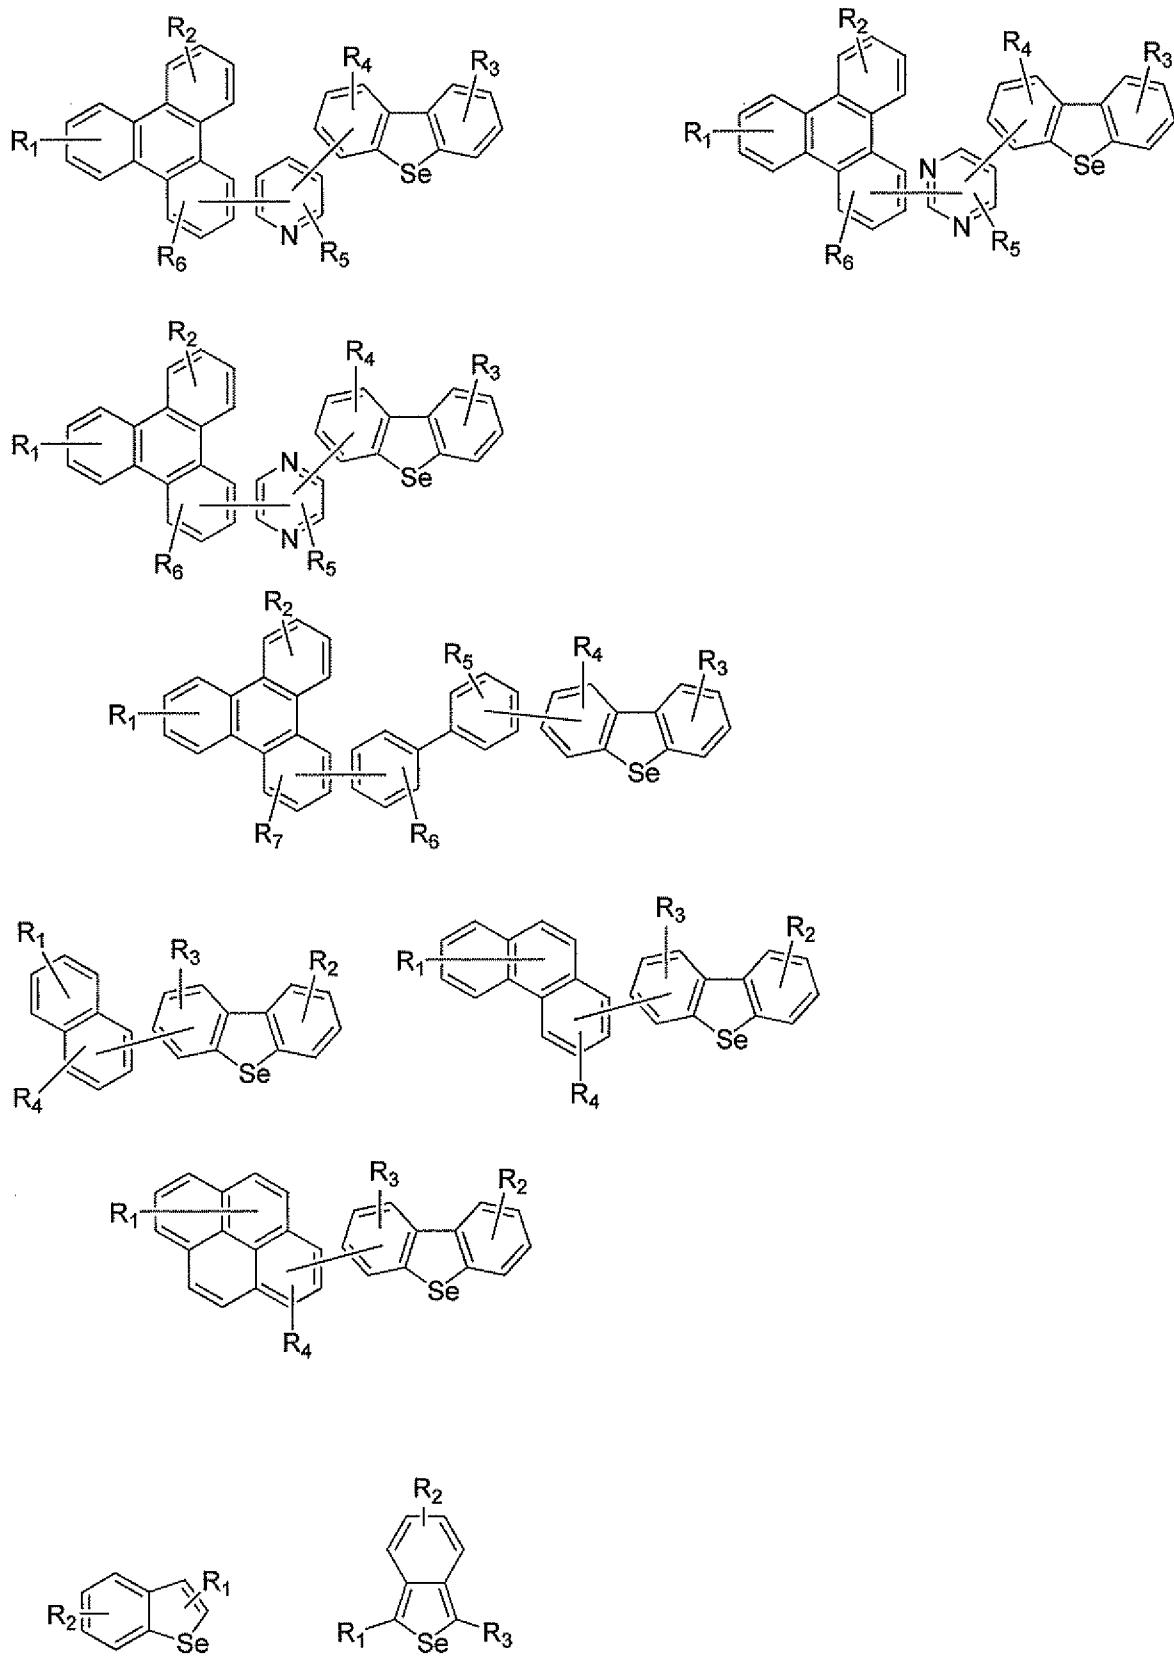


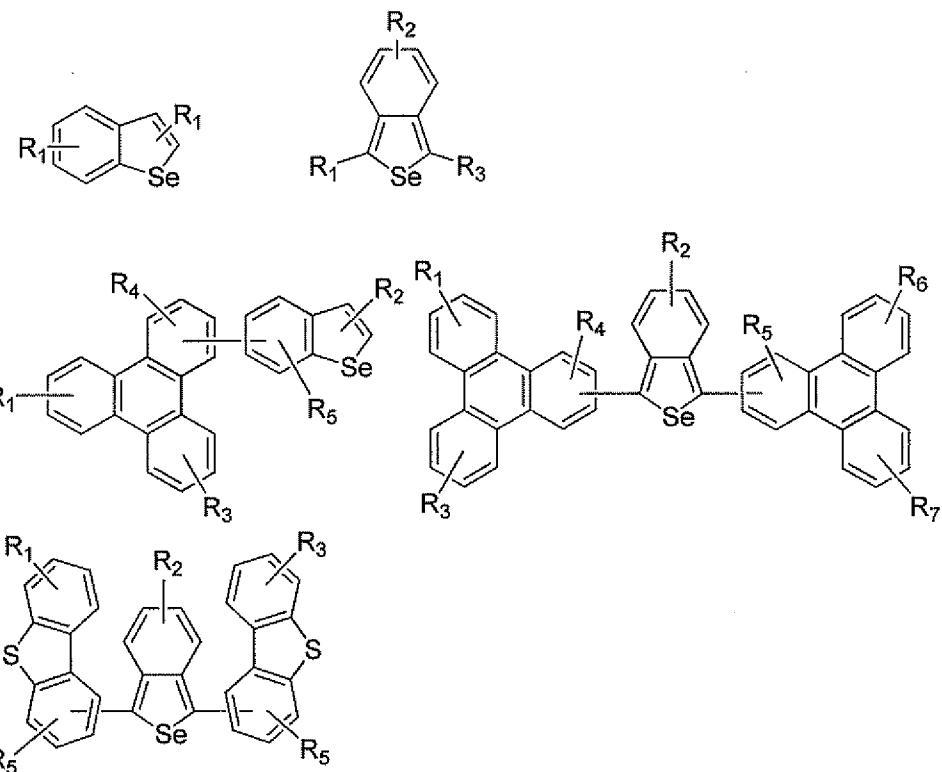



wherein each of R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub> and R<sub>7</sub> indicates an optional substituent to any possible position in the relevant moiety, Ar indicates an aromatic group, and each line linking two molecular moieties indicates attachment between the two moieties at any possible positions on the respective moieties.


3. The organic light emitting device of claim 2, wherein said organoselenium material is selected from the group consisting of

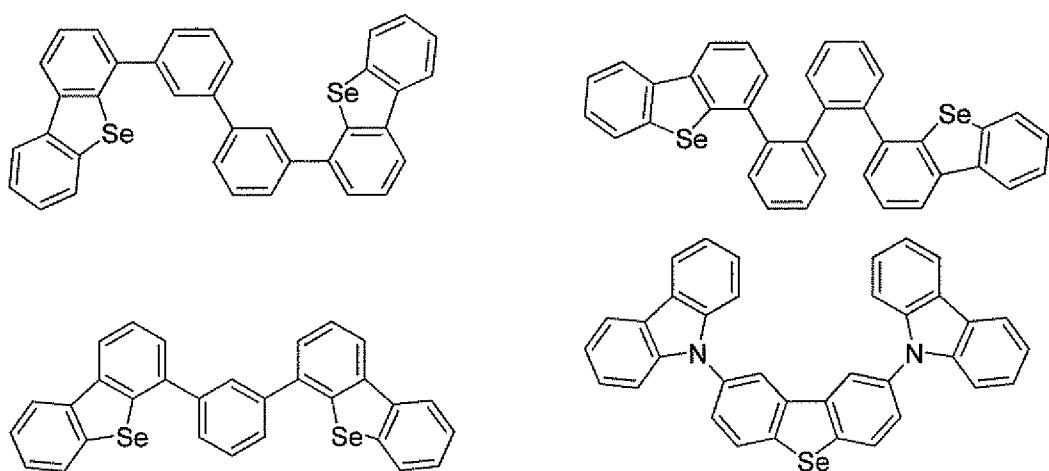


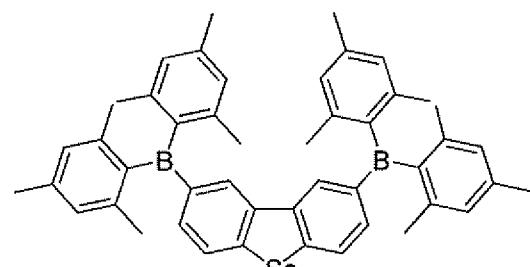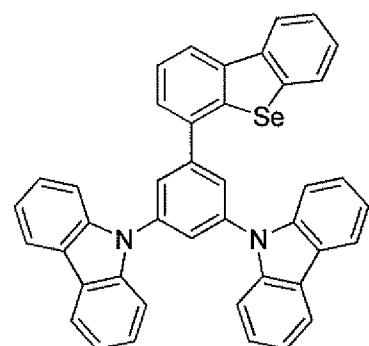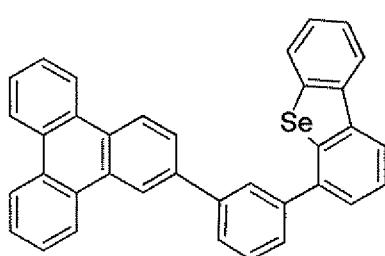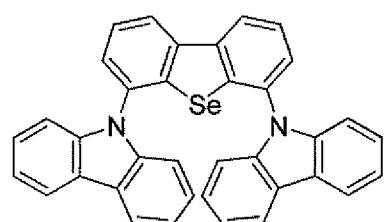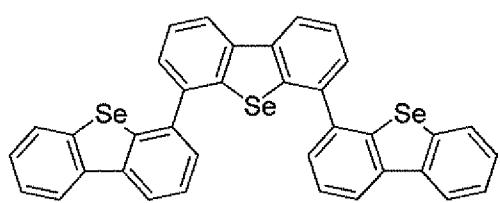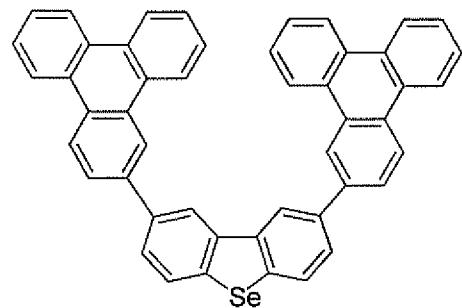



5

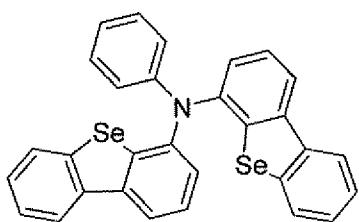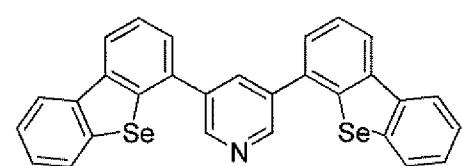


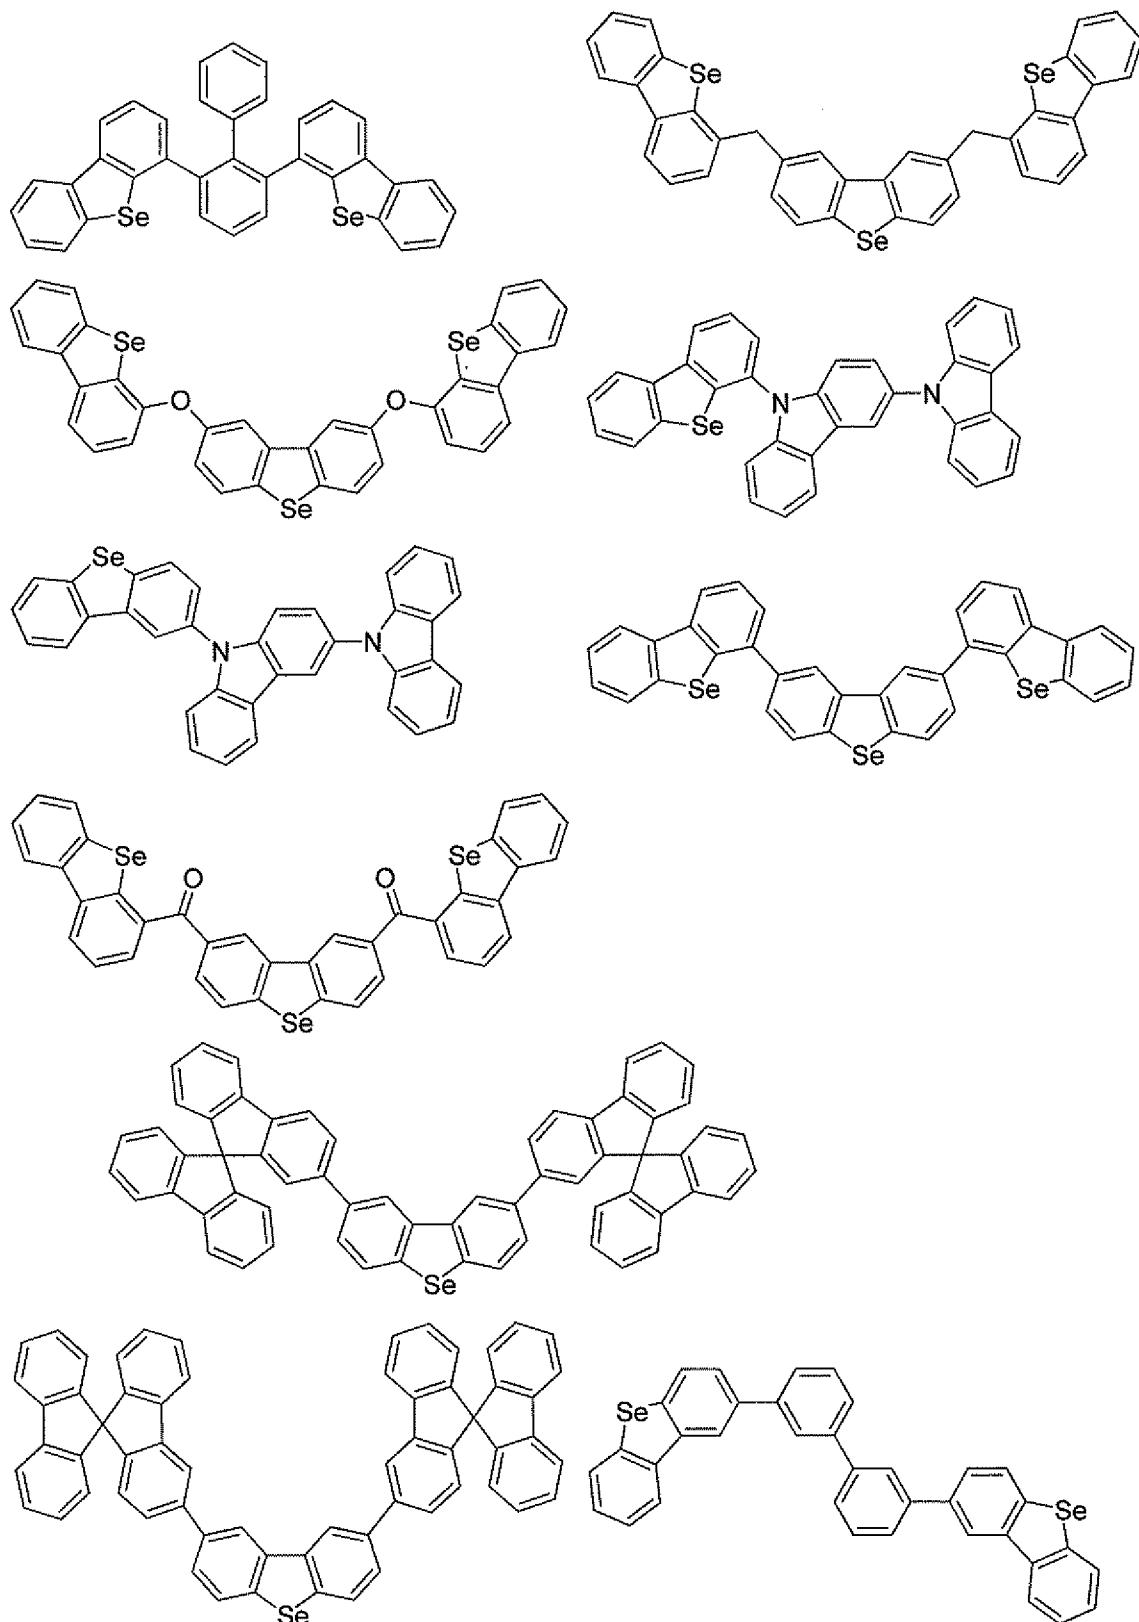


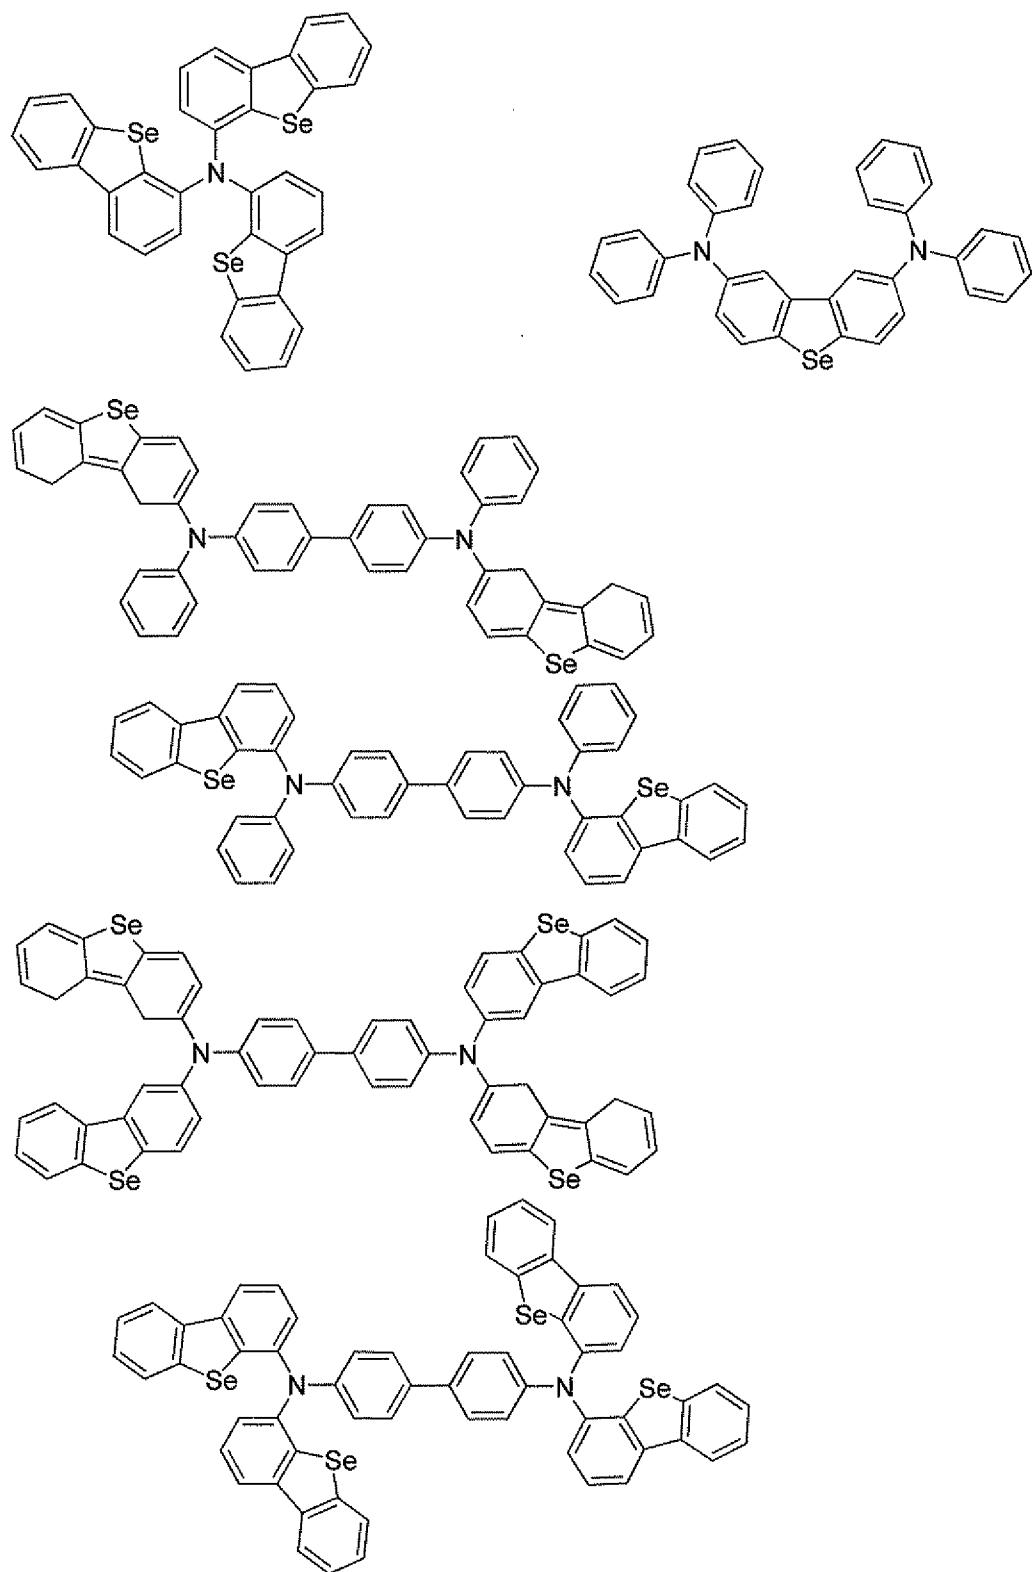


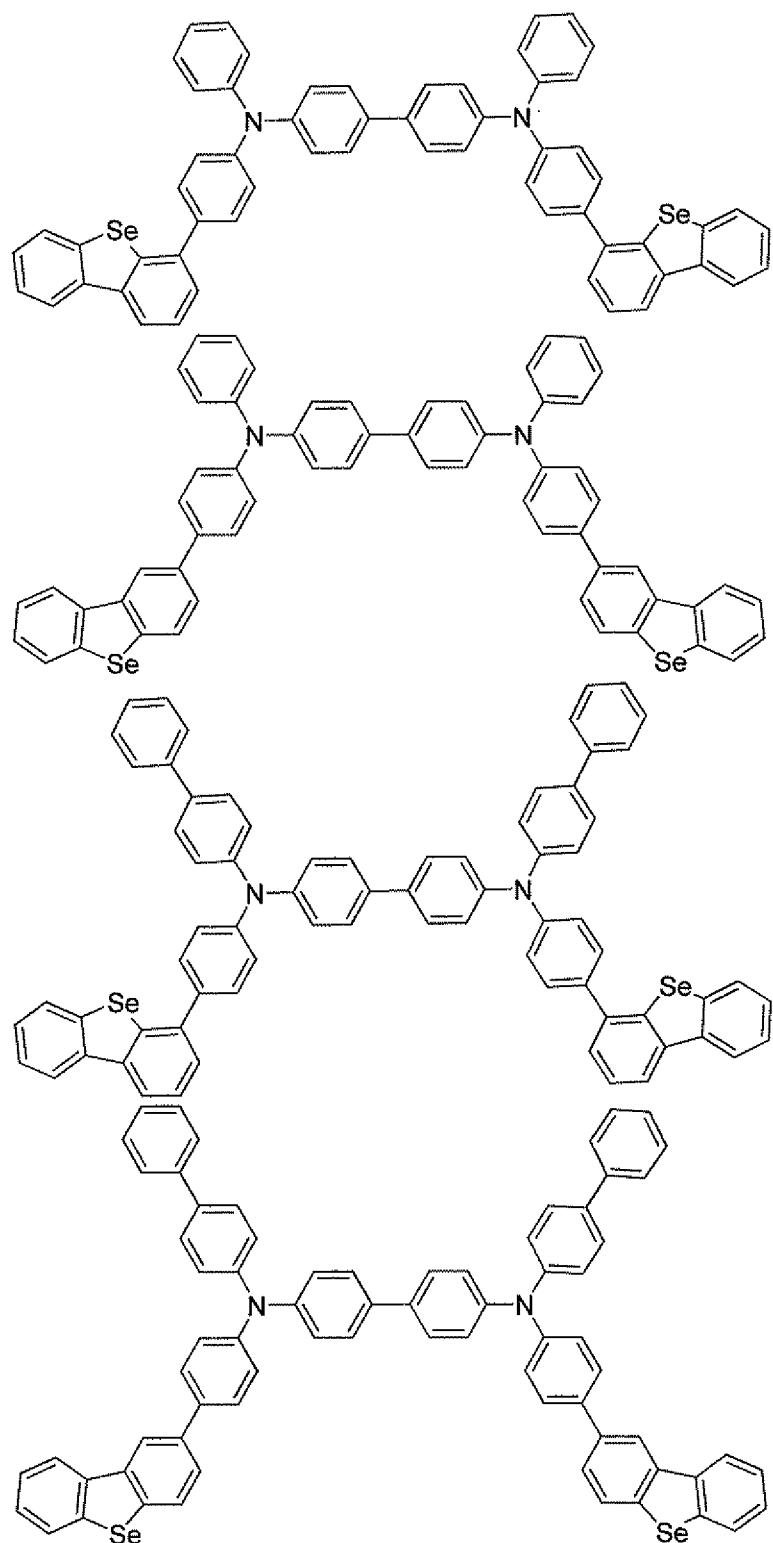


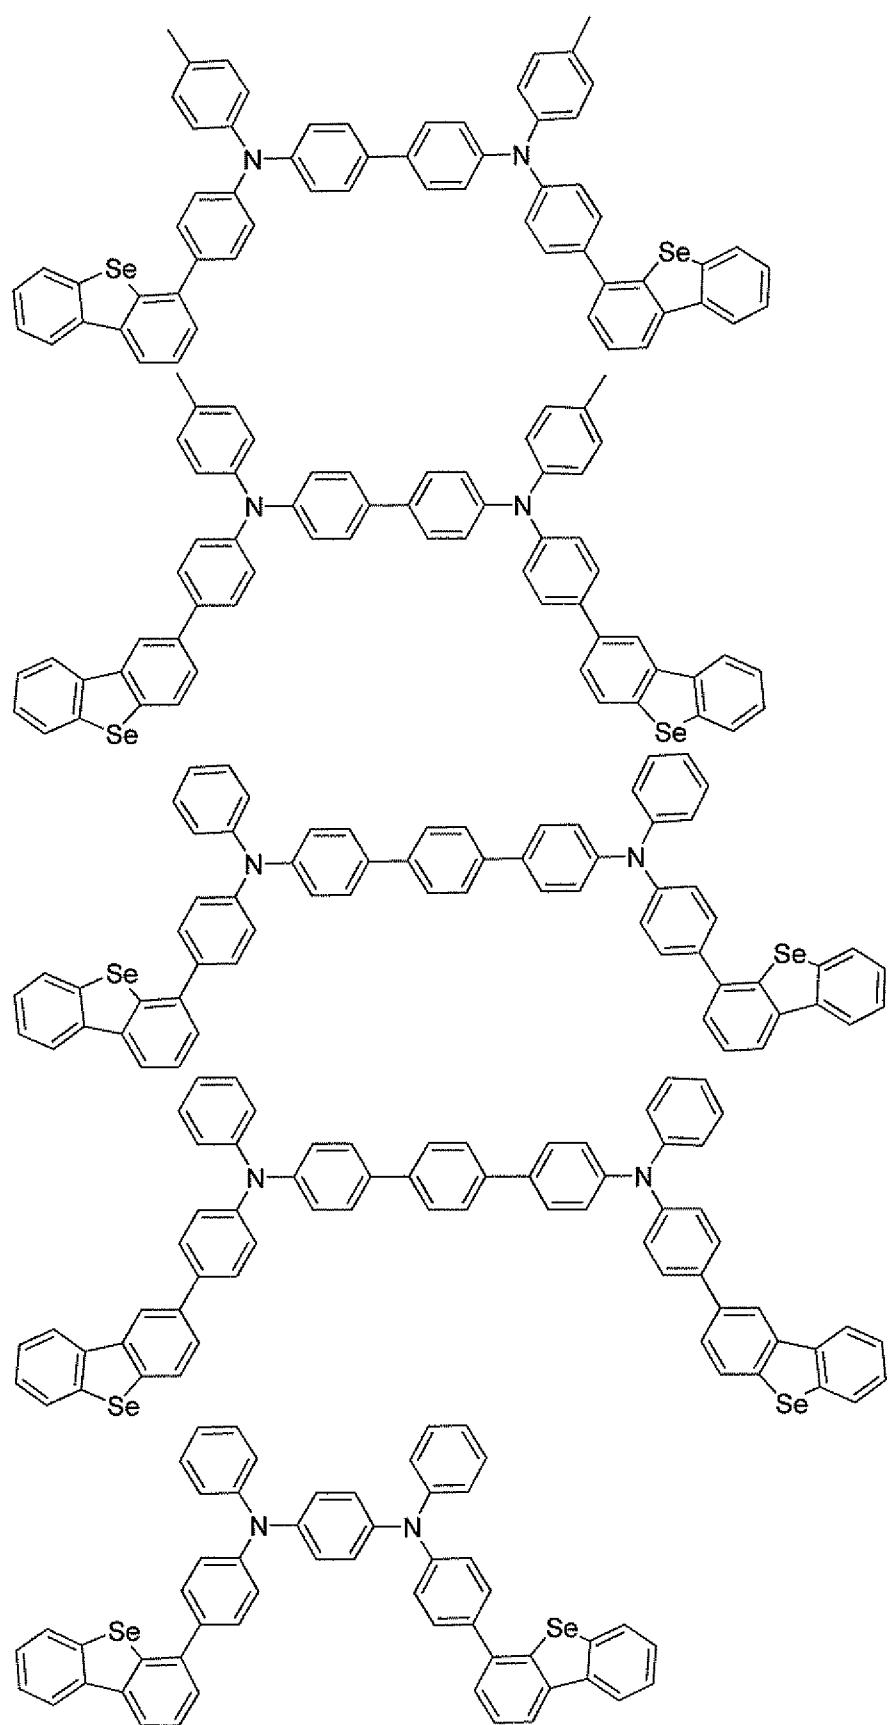


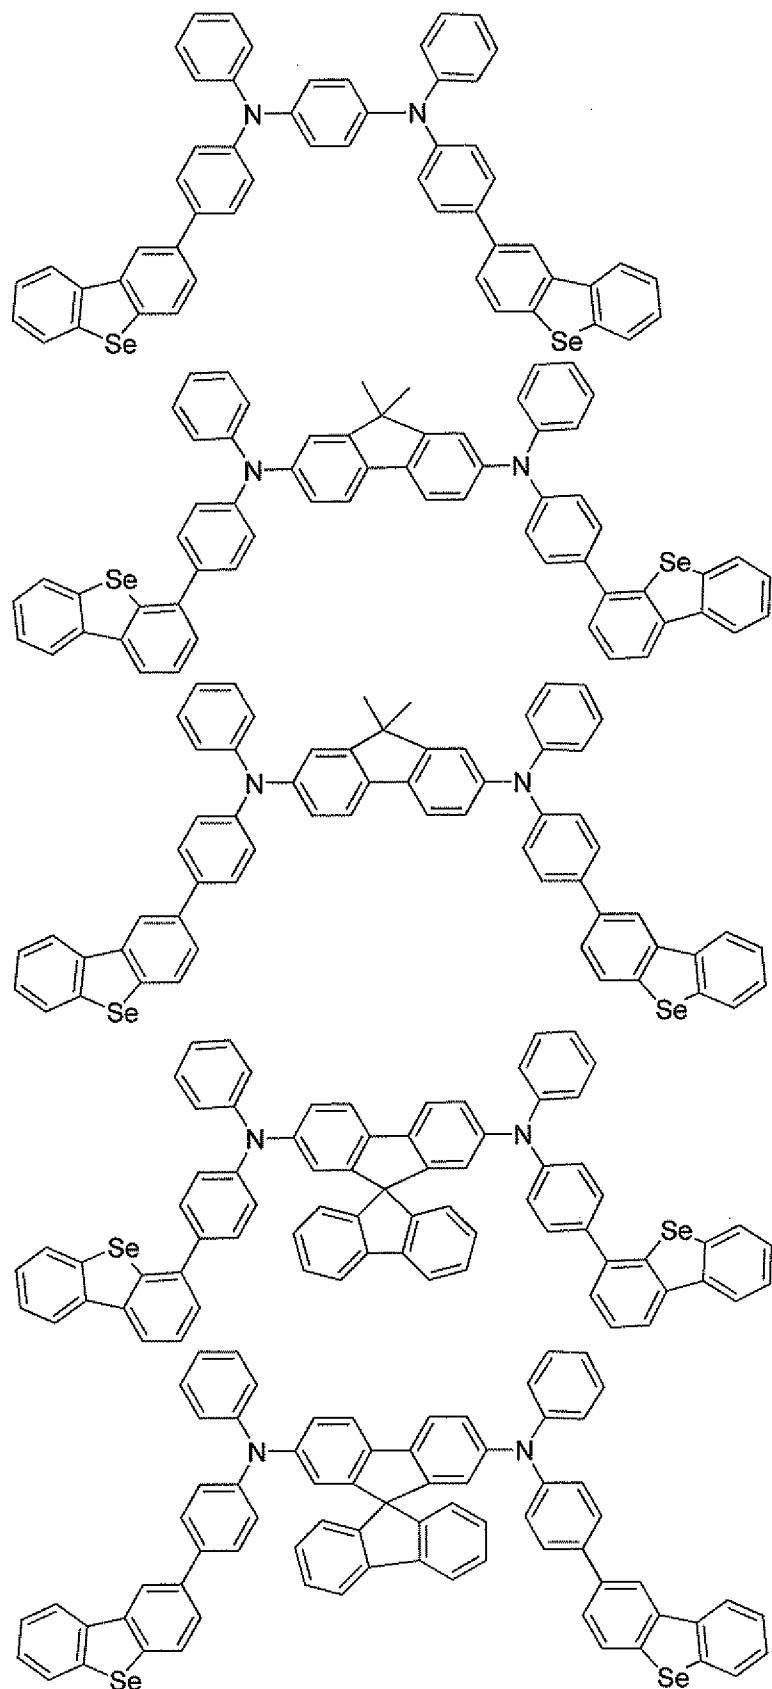


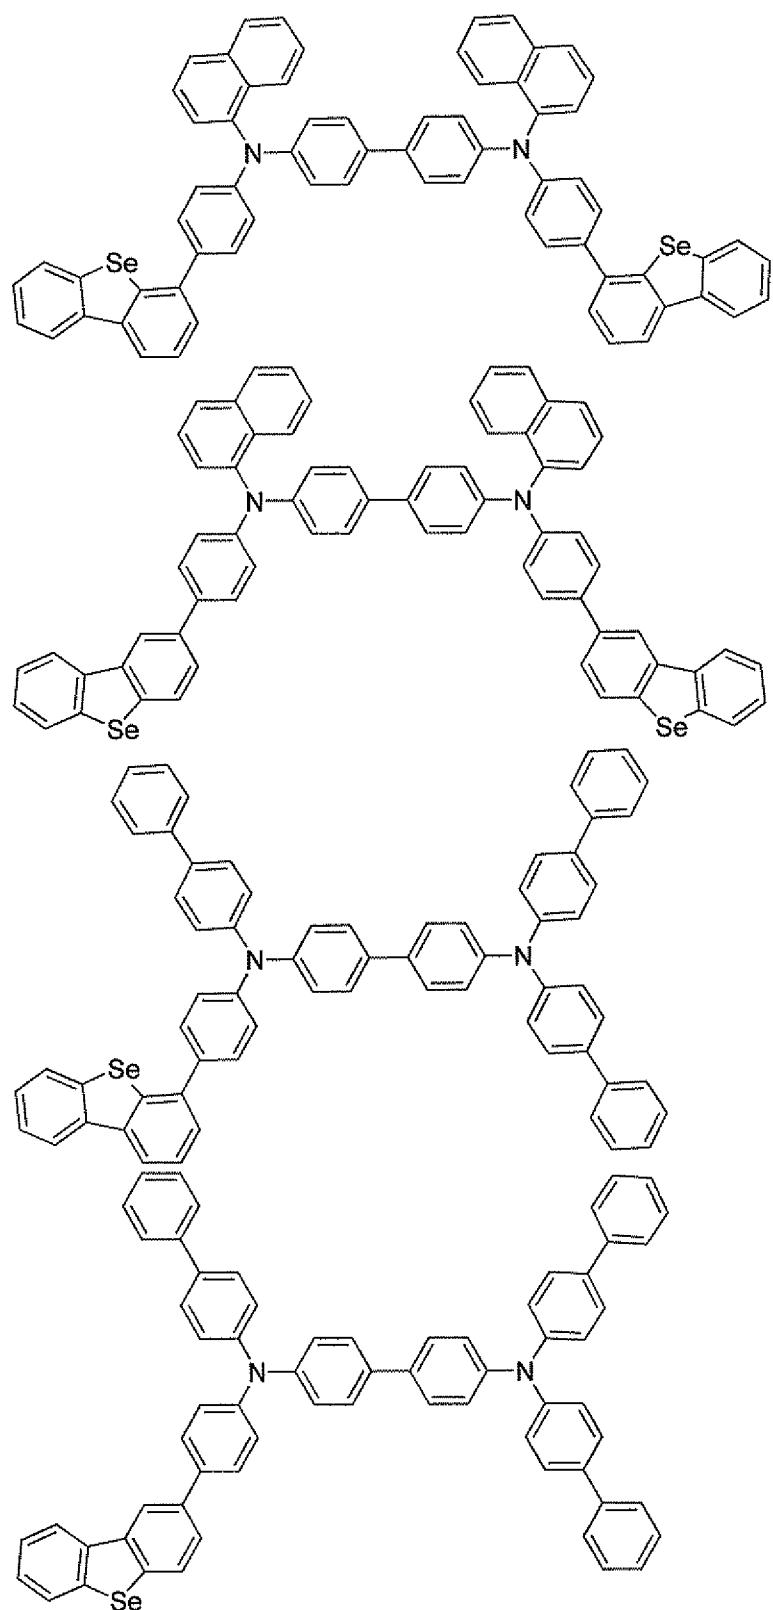


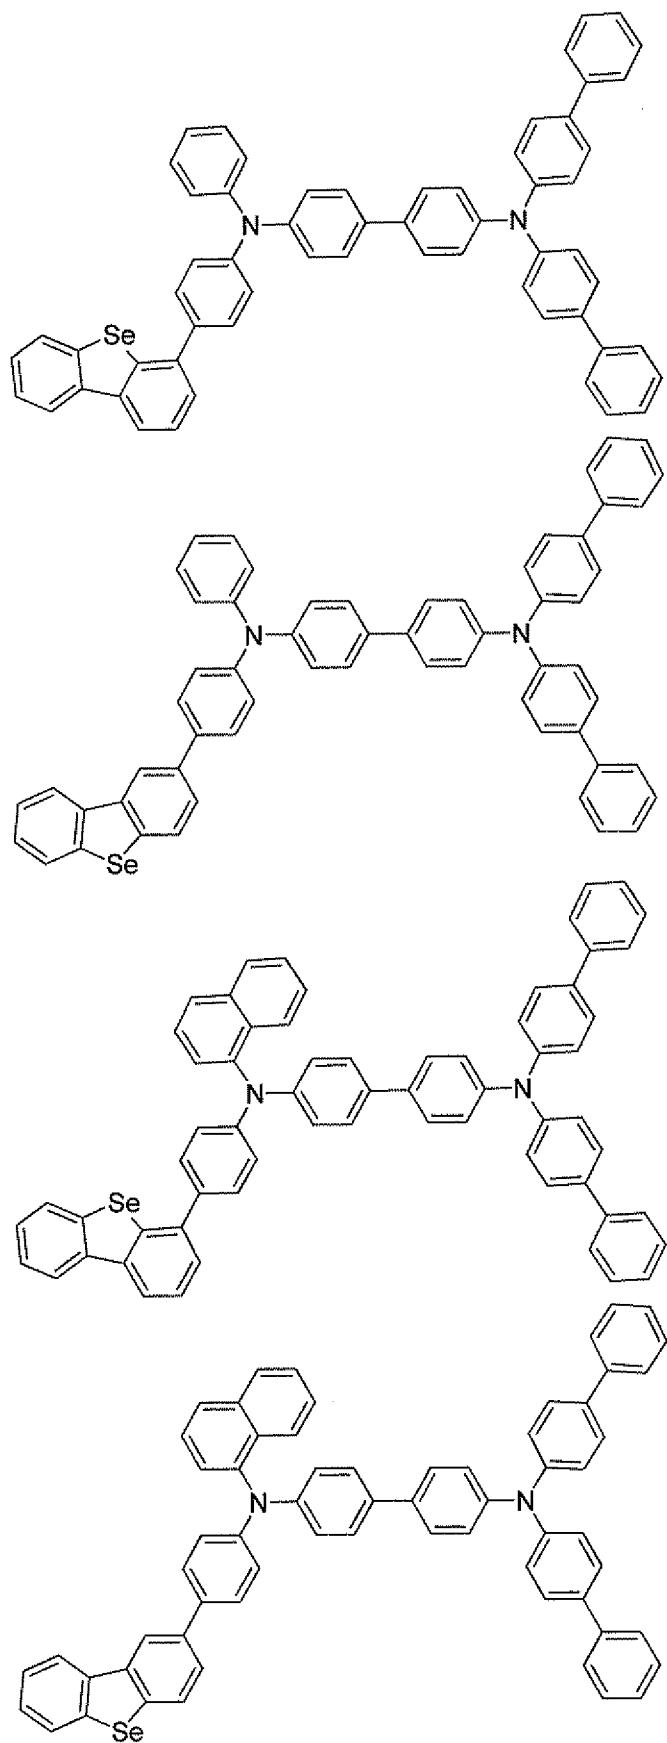


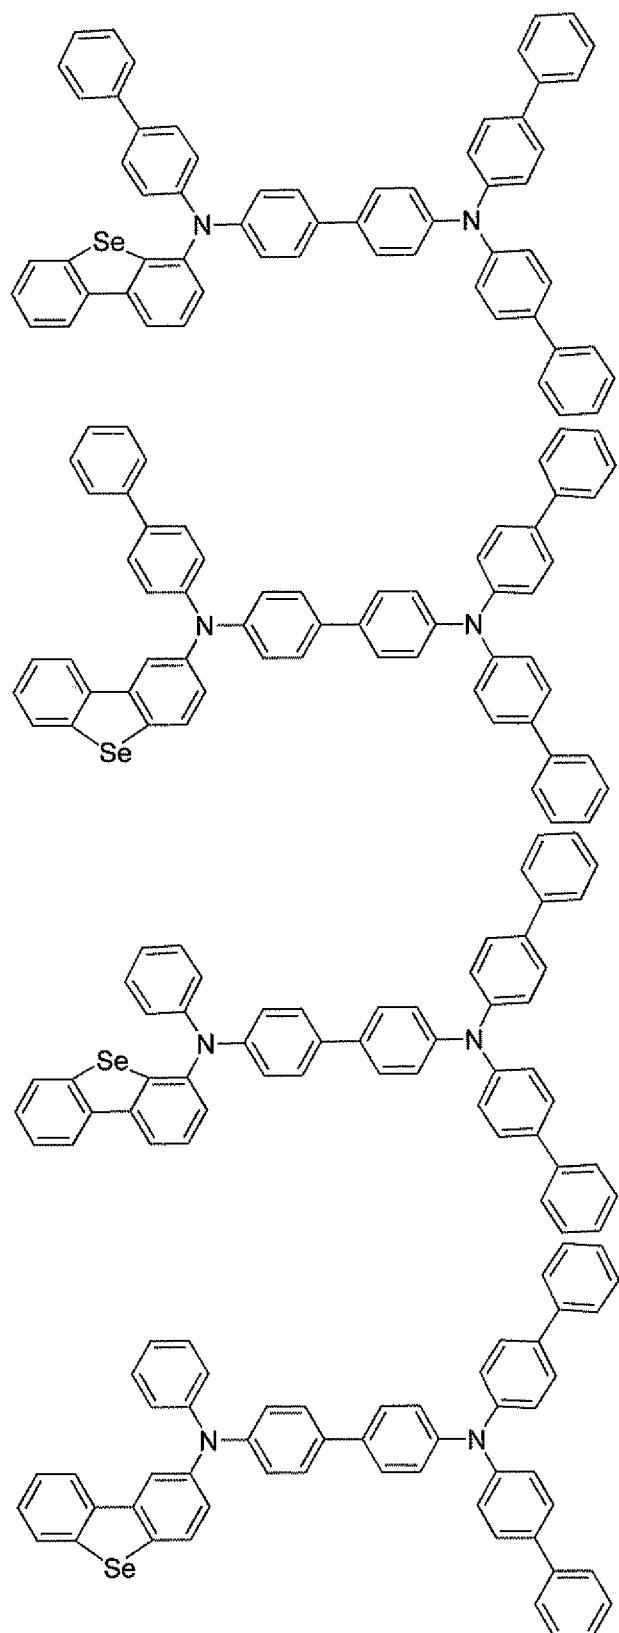


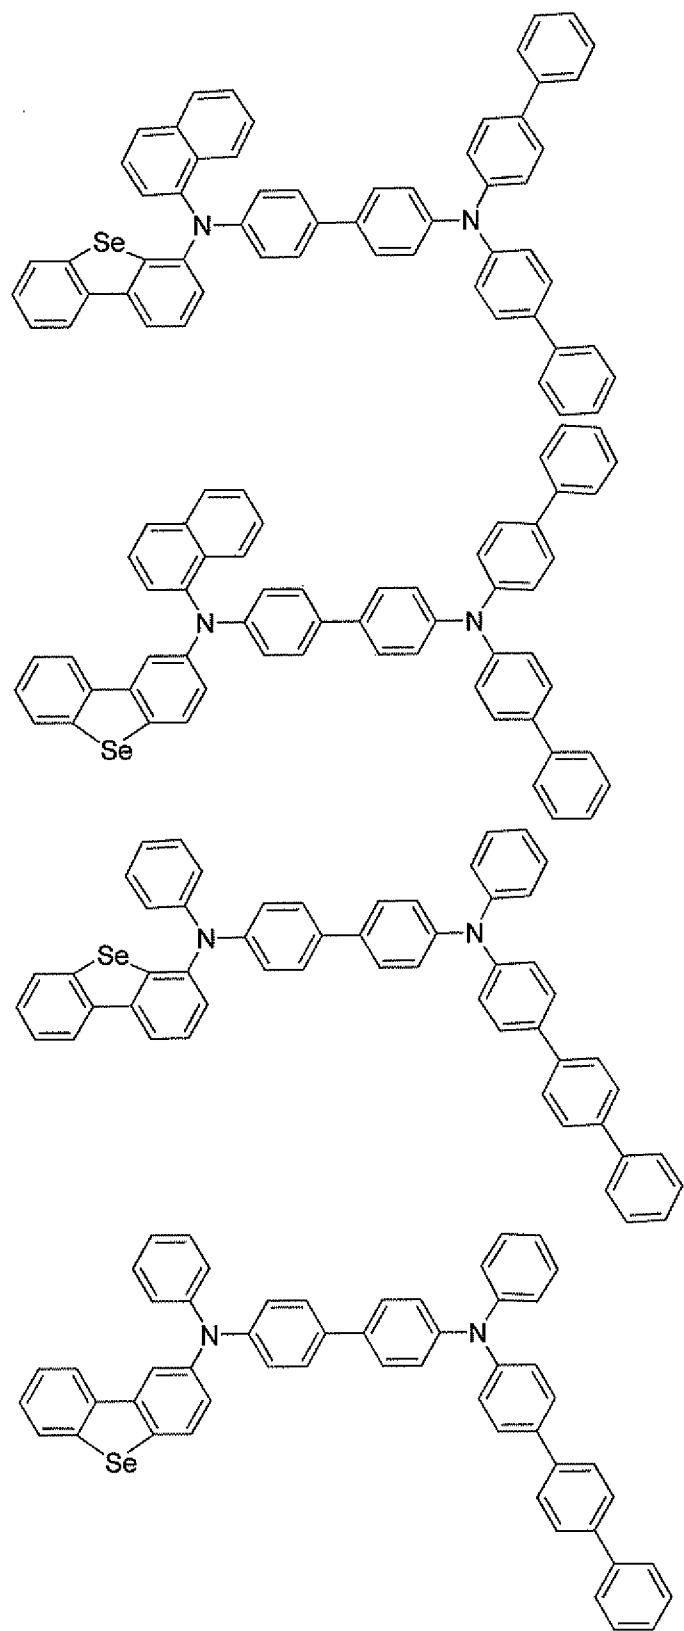

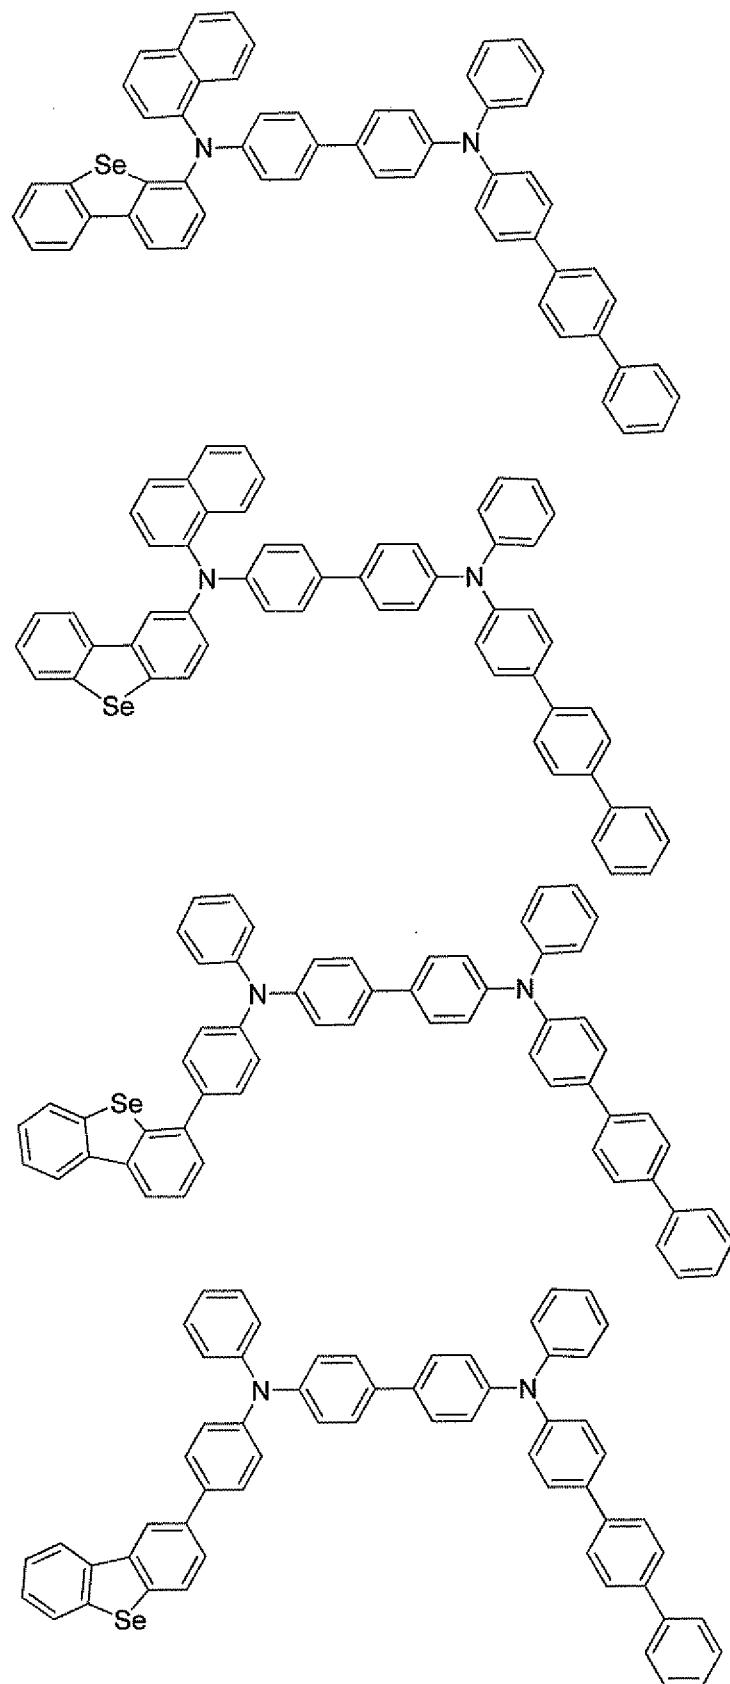

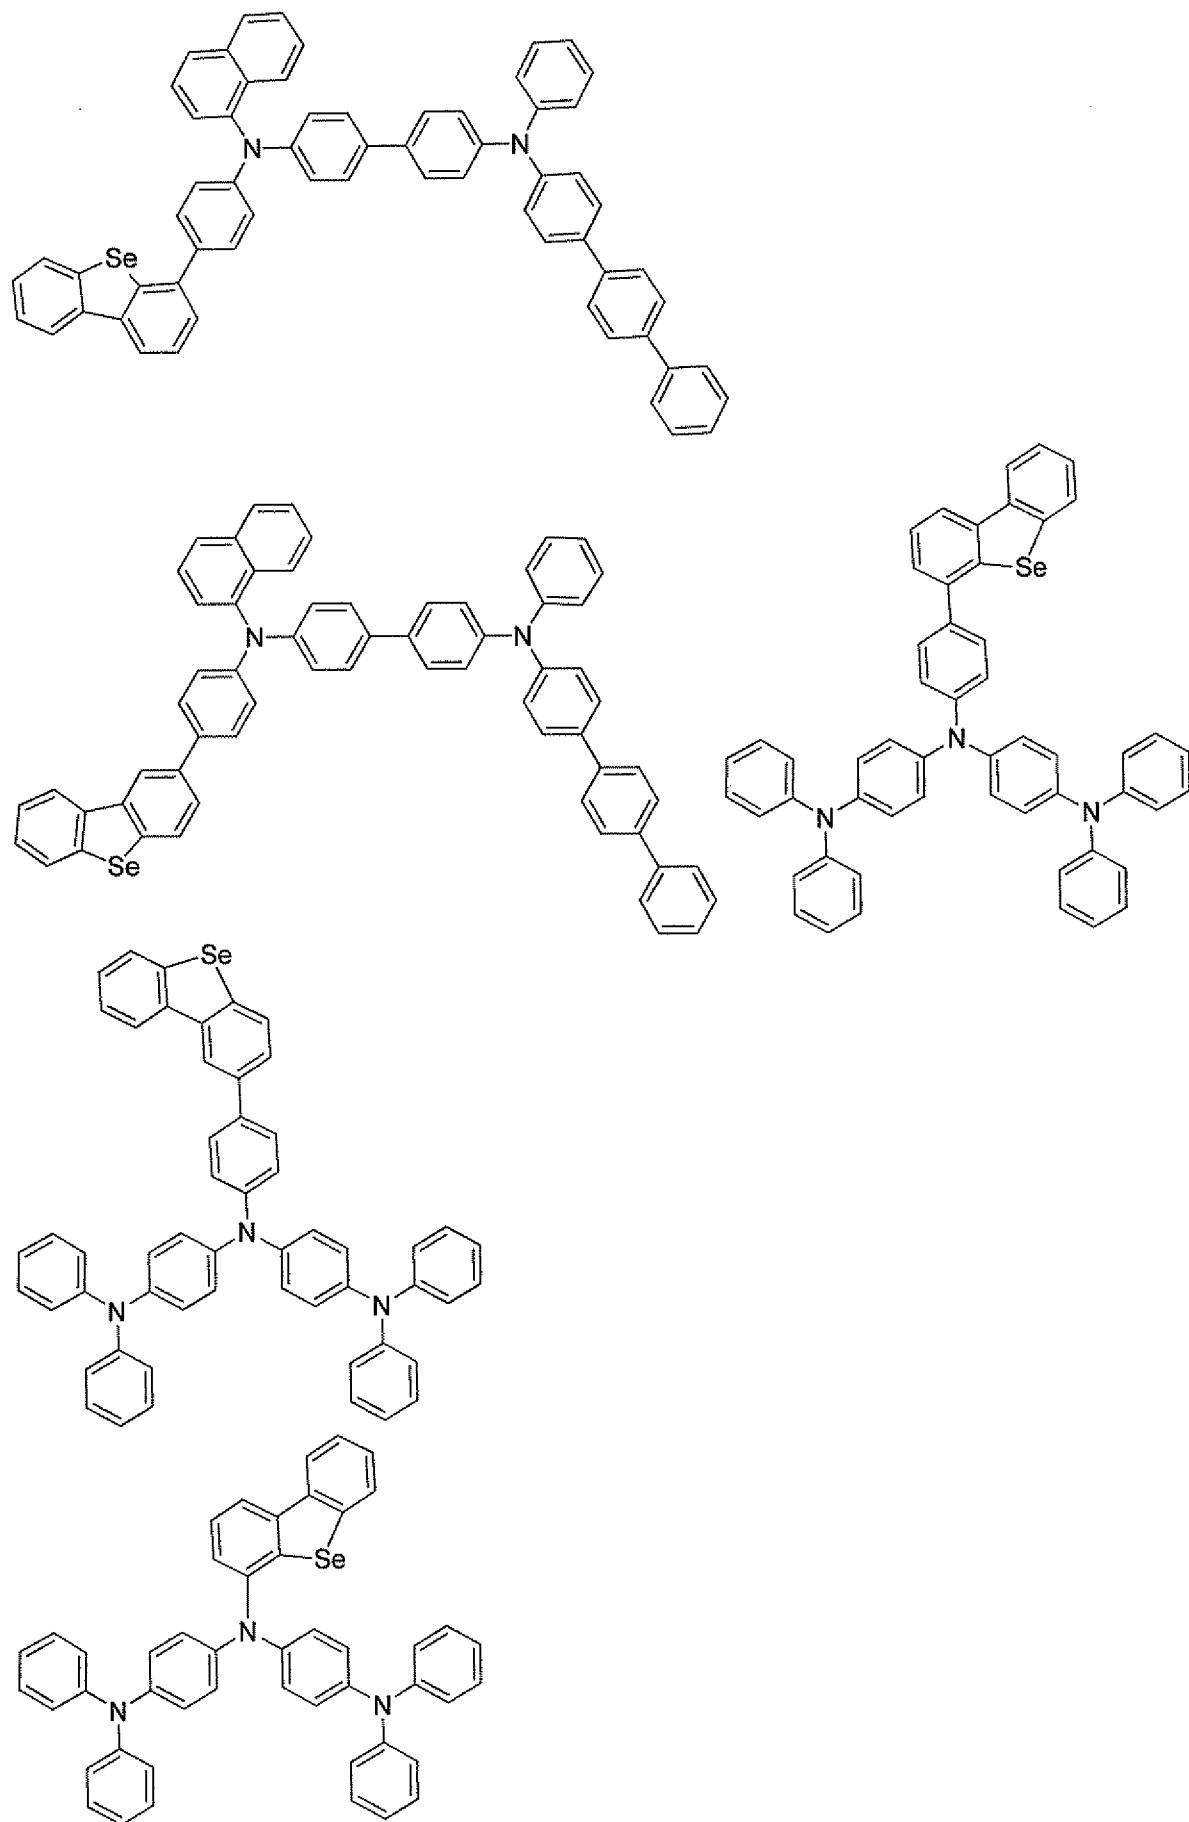


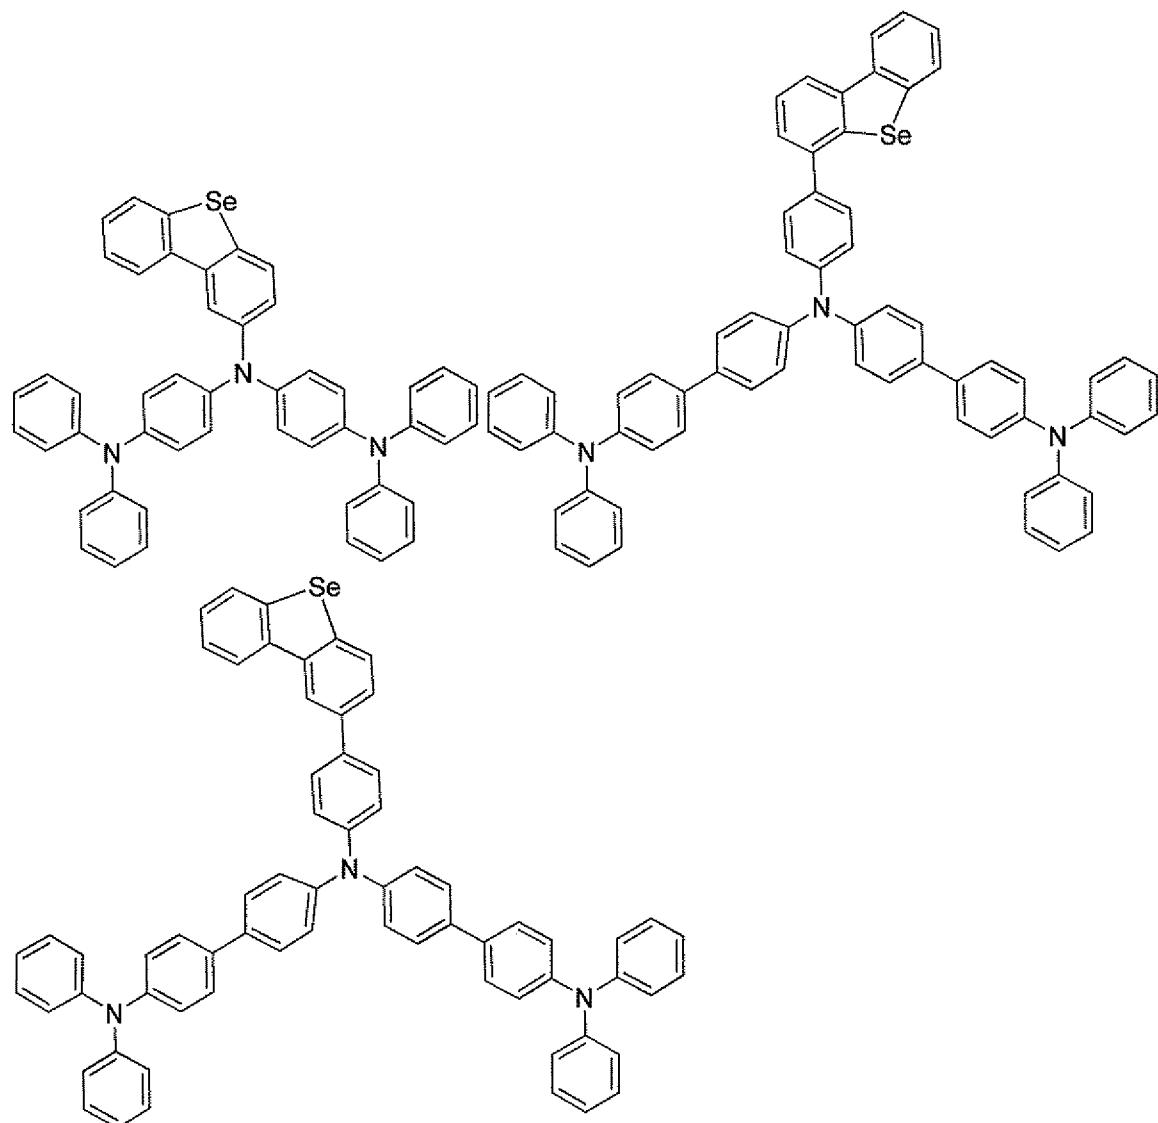

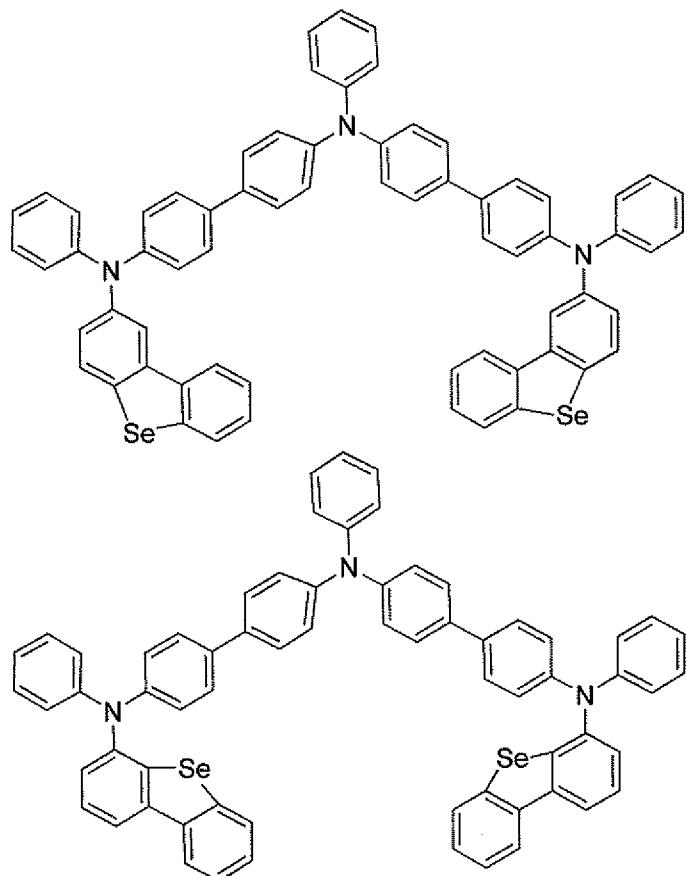




and derivatives thereof.

5 4. The organic light emitting device of claim 1, wherein said organoselenium material  
is selected from the group consisting of

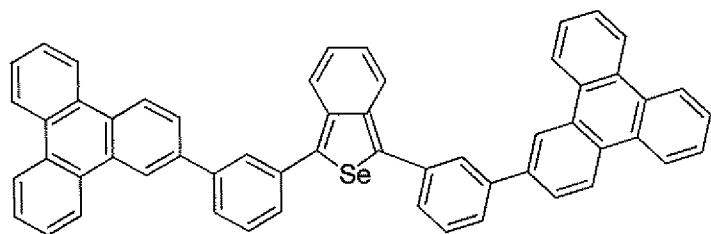


10

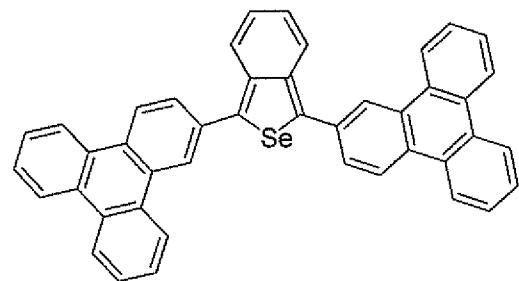

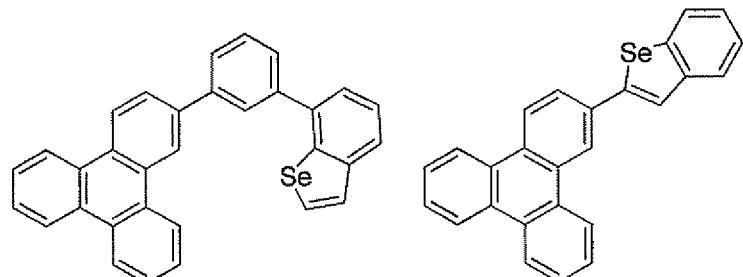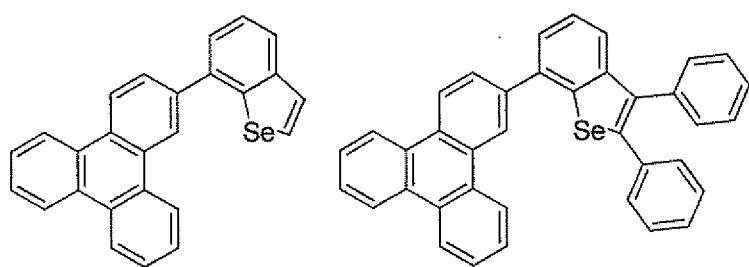


5

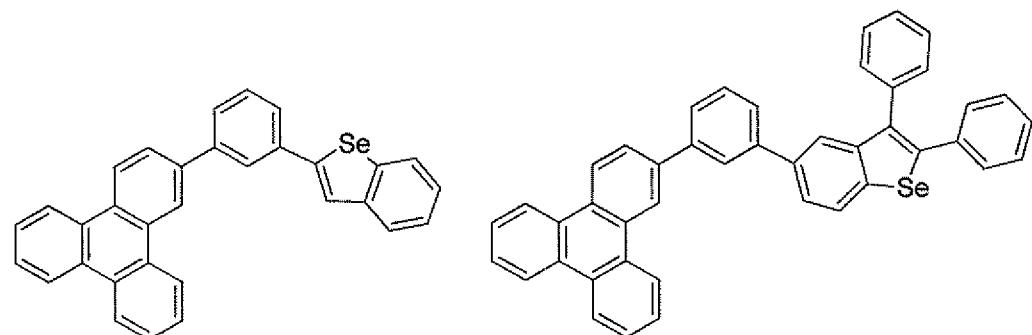

10

and derivatives thereof.


5. The organic light emitting device of claim 3, wherein said organoselenium material is

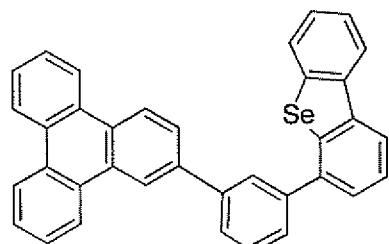

H-1

15 or a derivative thereof.

6. The organic light emitting device of claim 3, wherein said organoselenium material is

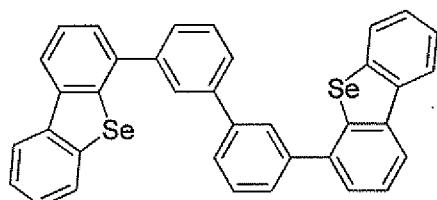

H-2


or a derivative thereof.

7. The organic light emitting device of any of claims 1 to 6, wherein said  
5 organoseelenium material is a host material, and wherein said organic layer further comprises  
a dopant material.


8. The organic light emitting device of claim 7, wherein said organic layer is an emissive layer, and wherein said dopant material is a phosphorescent or fluorescent dopant material.

10 9. The organic light emitting device of claim 8, wherein said dopant material is a  
phosphorescent dopant material.

10. The organic light emitting device of claim 9, wherein said dopant material is a phosphorescent dopant material selected from the group consisting of

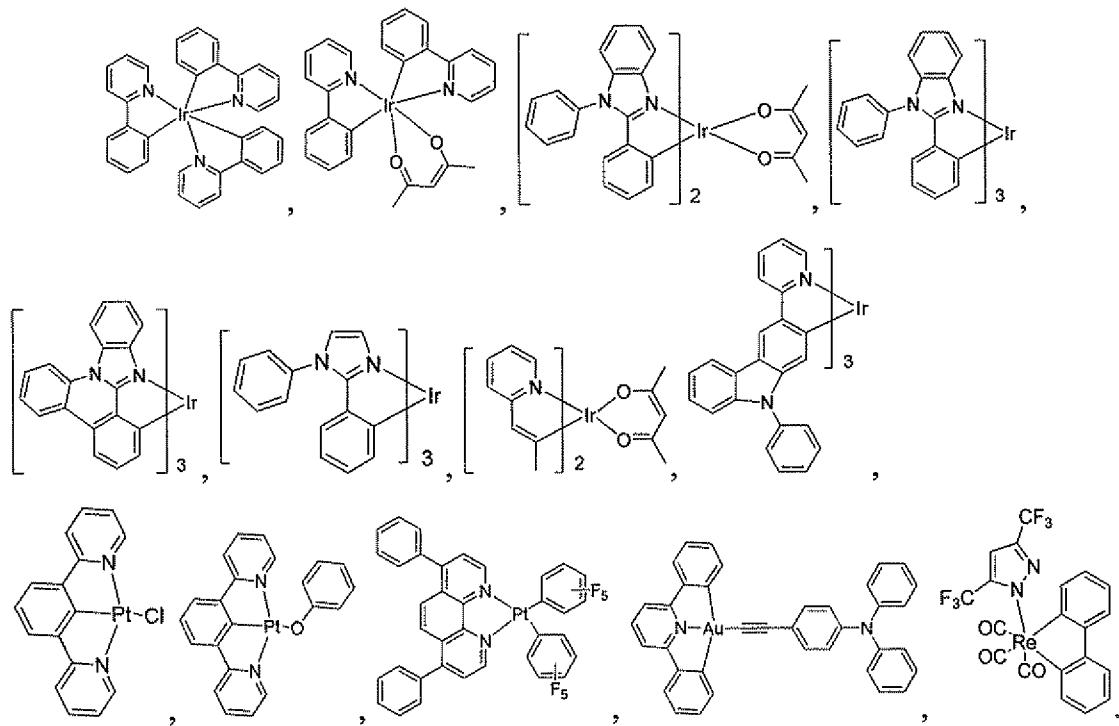



11. The organic light emitting device of claim 9, wherein said dopant material is a phosphorescent dopant material selected from the group consisting of

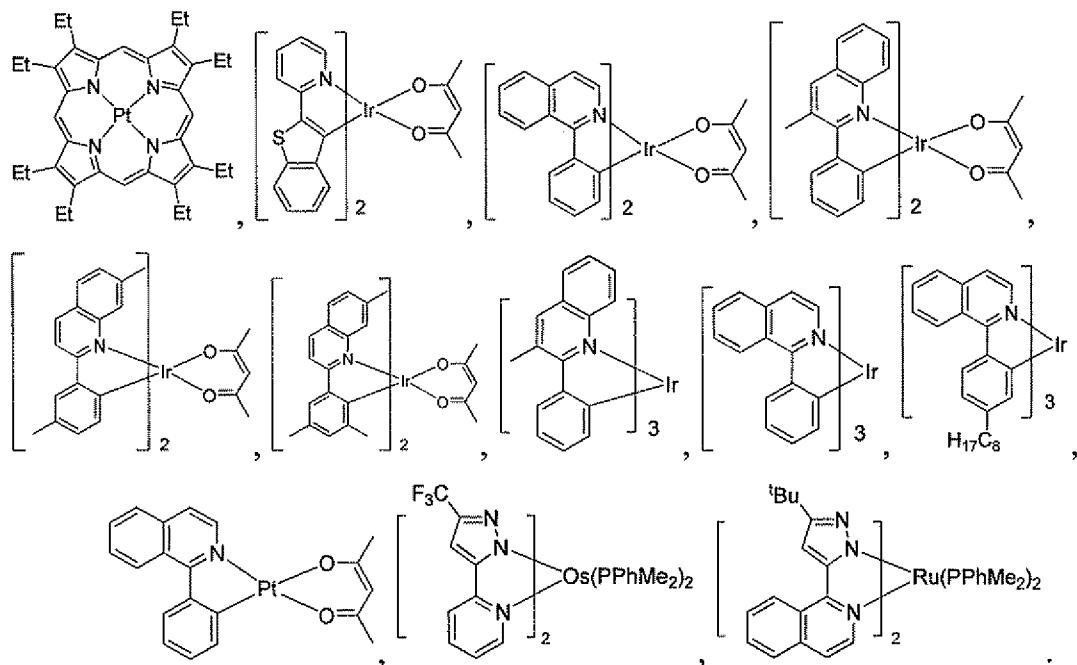

5

12. The organic light emitting device of claim 9, wherein said dopant material is a phosphorescent dopant material selected from the group consisting of

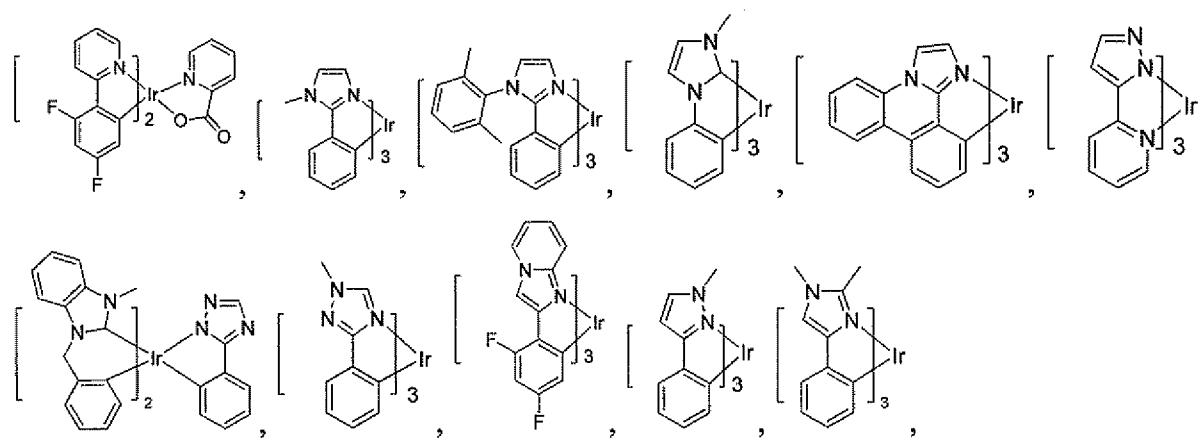

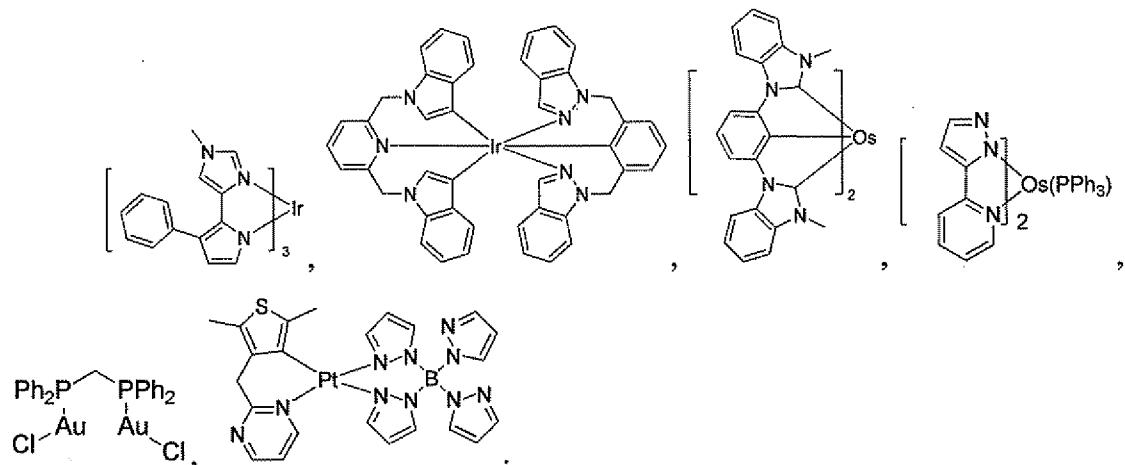

13. The organic light emitting device of claim 9, further comprising one or more organic layers selected from the group consisting of a hole injecting layer, an electron injecting layer, a hole transporting layer, an electron transporting layer, a hole blocking layer, an exciton blocking layer, and an electron blocking layer.


14. The organic light emitting device of claim 13, wherein said hole transporting layer comprises an organoselenium material.


15. The organic light emitting device of claim 13, wherein said electron transporting layer comprises an organoselenium material.


16. The organic light emitting device of any of claims 1 to 4, wherein said organic layer is a hole transporting layer or an electron transporting layer.


17. The organic light emitting device of claim 5 or 6, wherein said organic layer is an electron transporting layer.


18. An organoselenium compound selected from the group consisting of

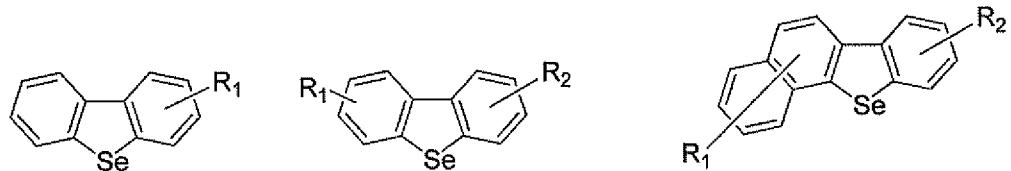


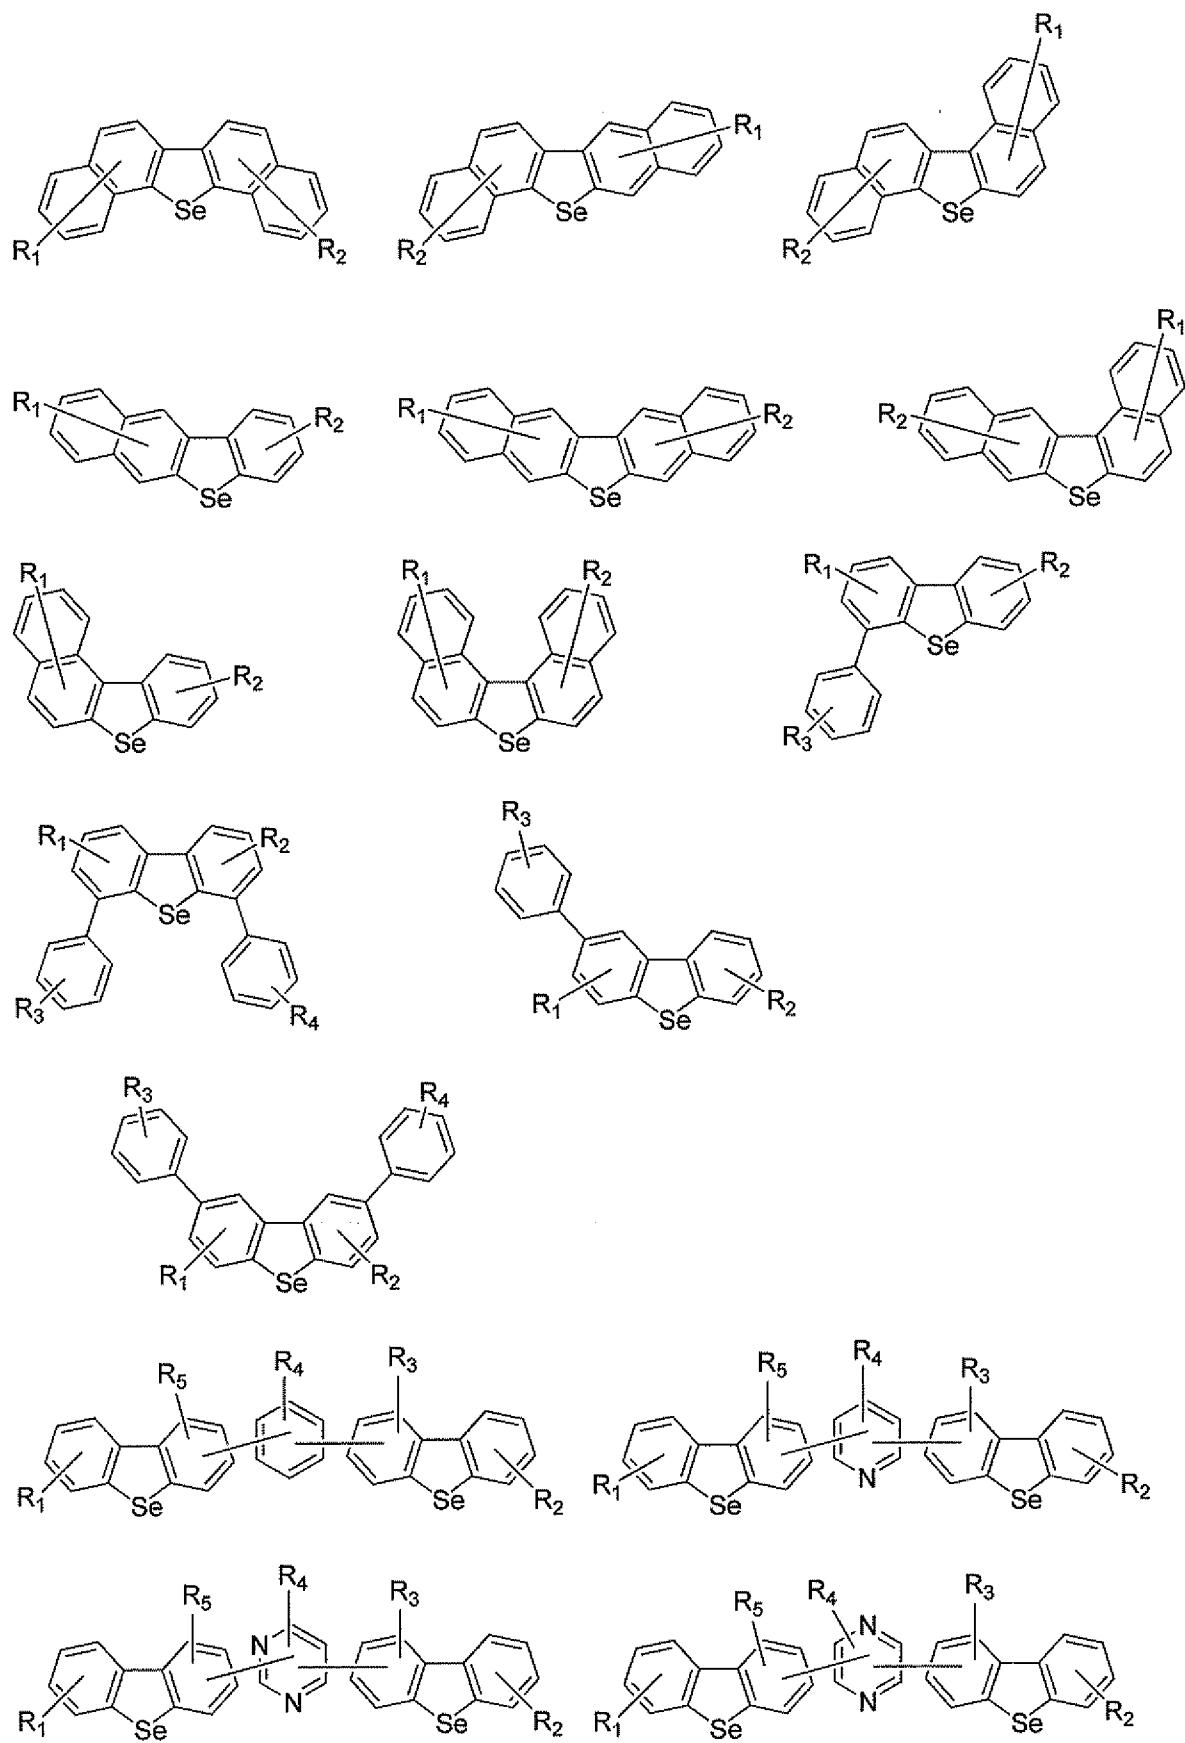

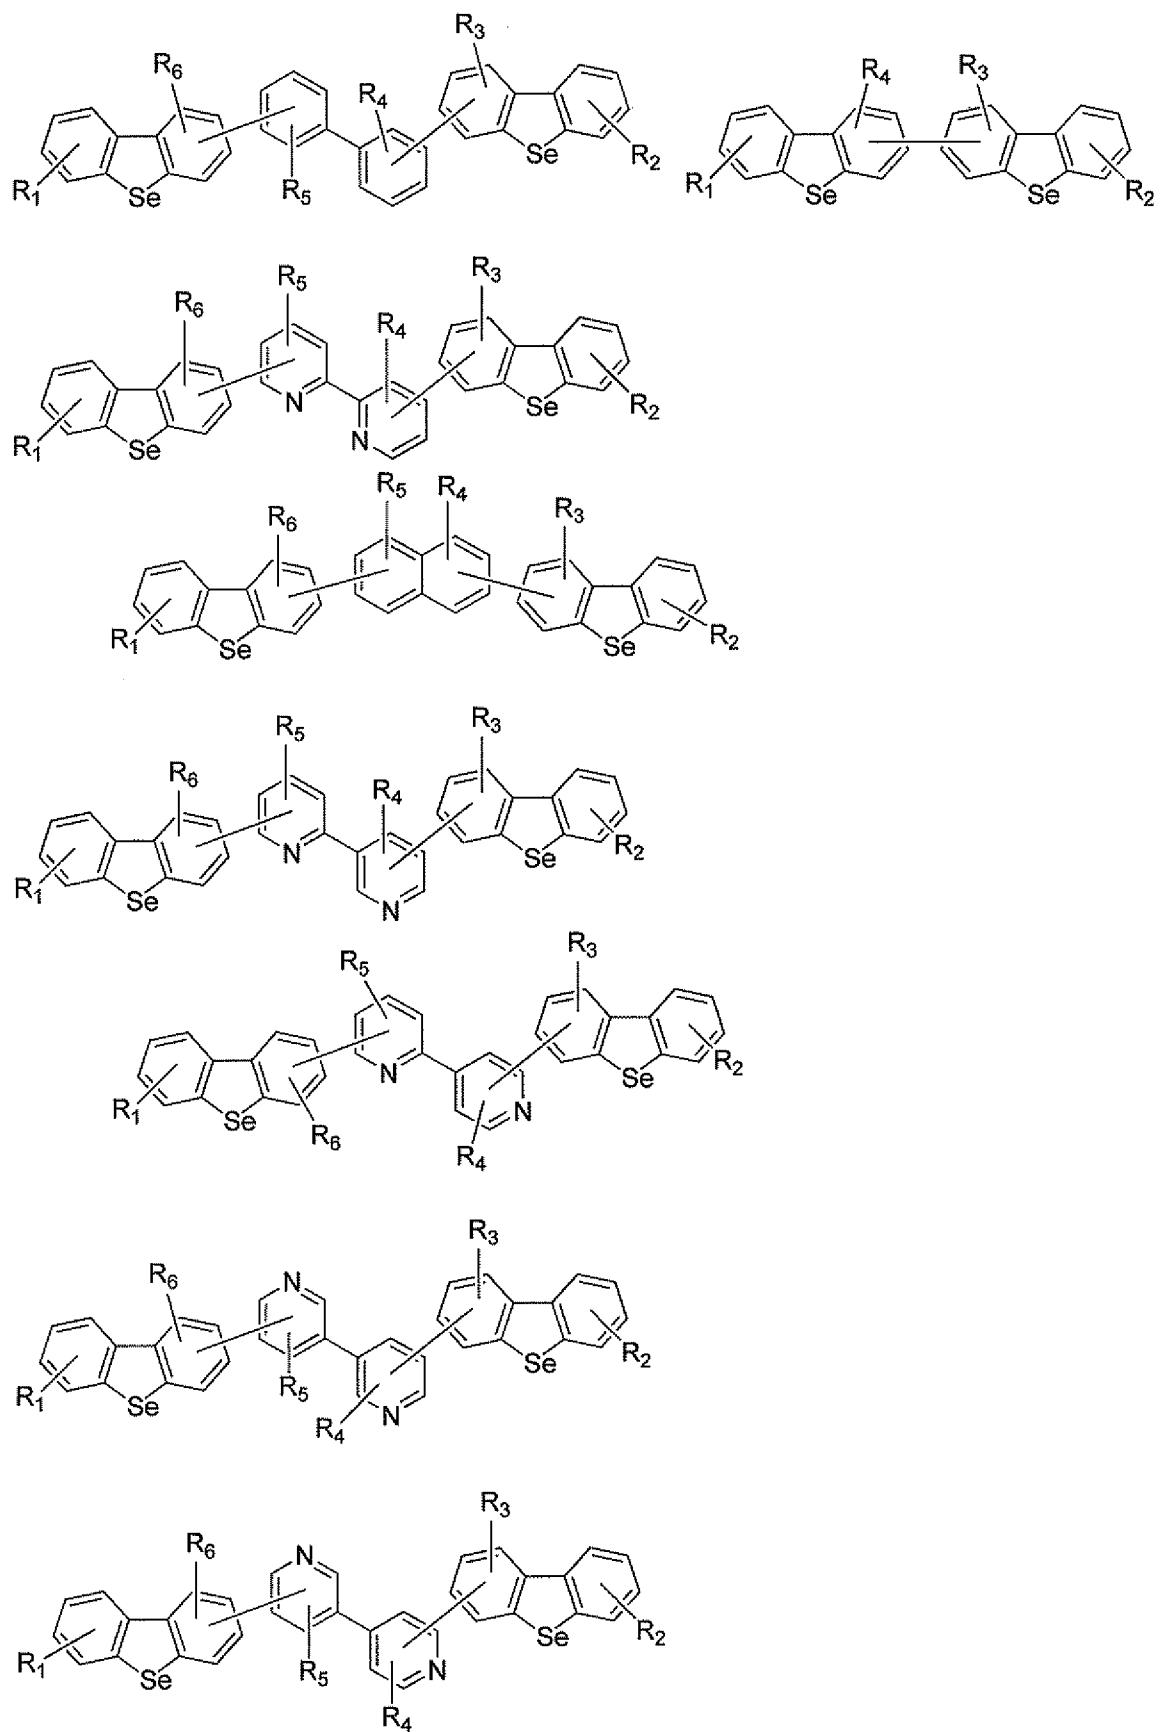












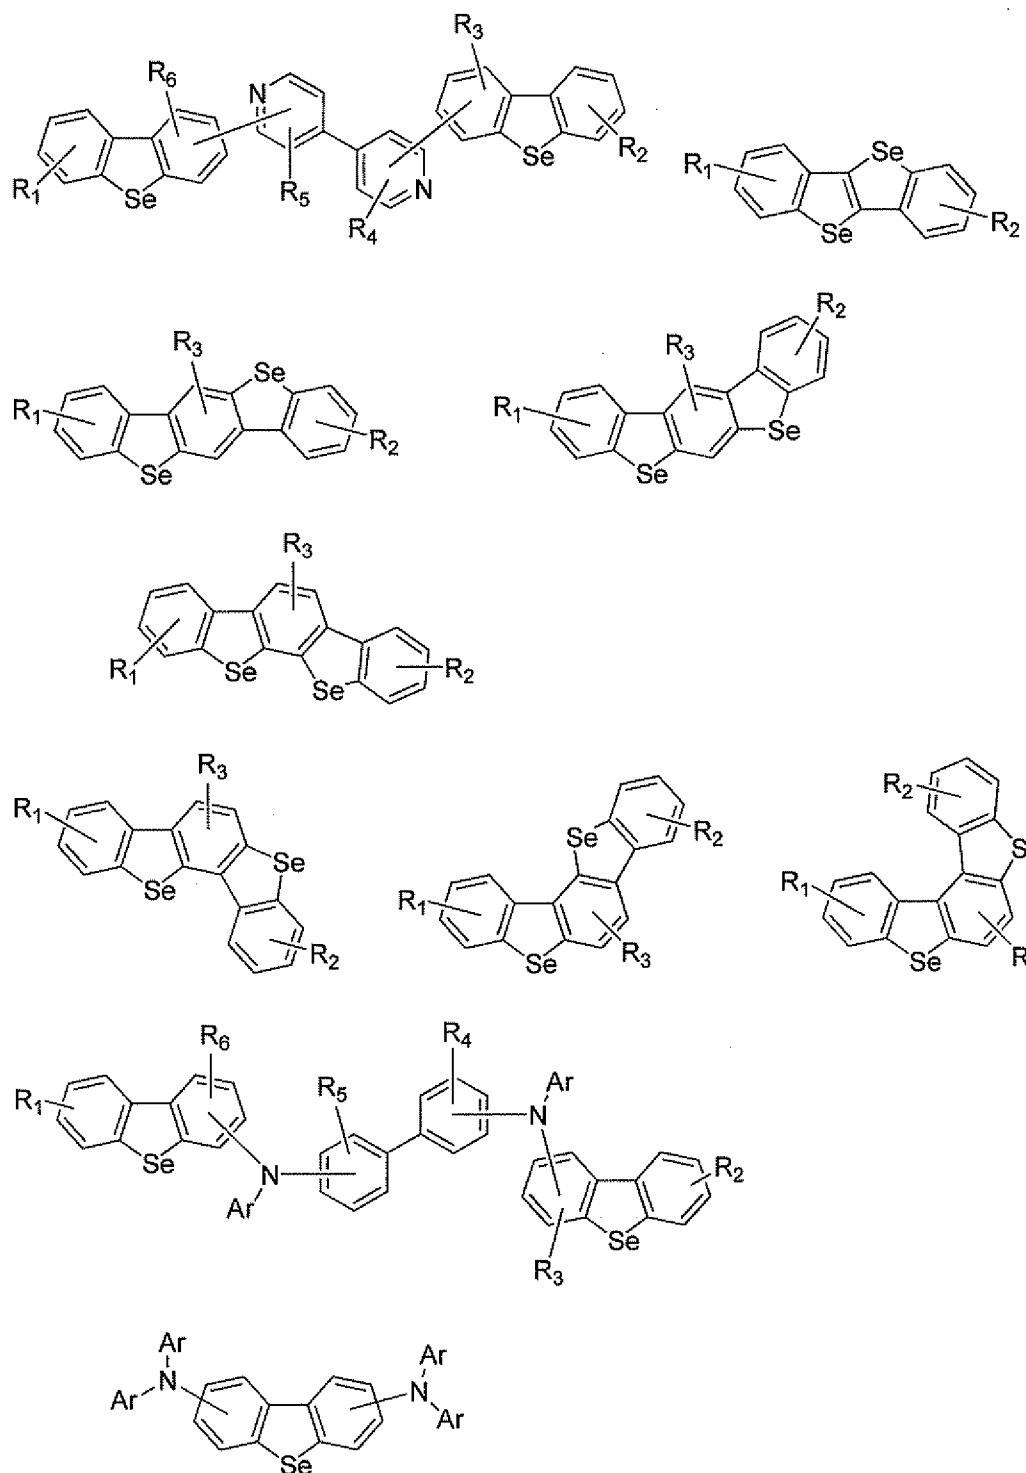


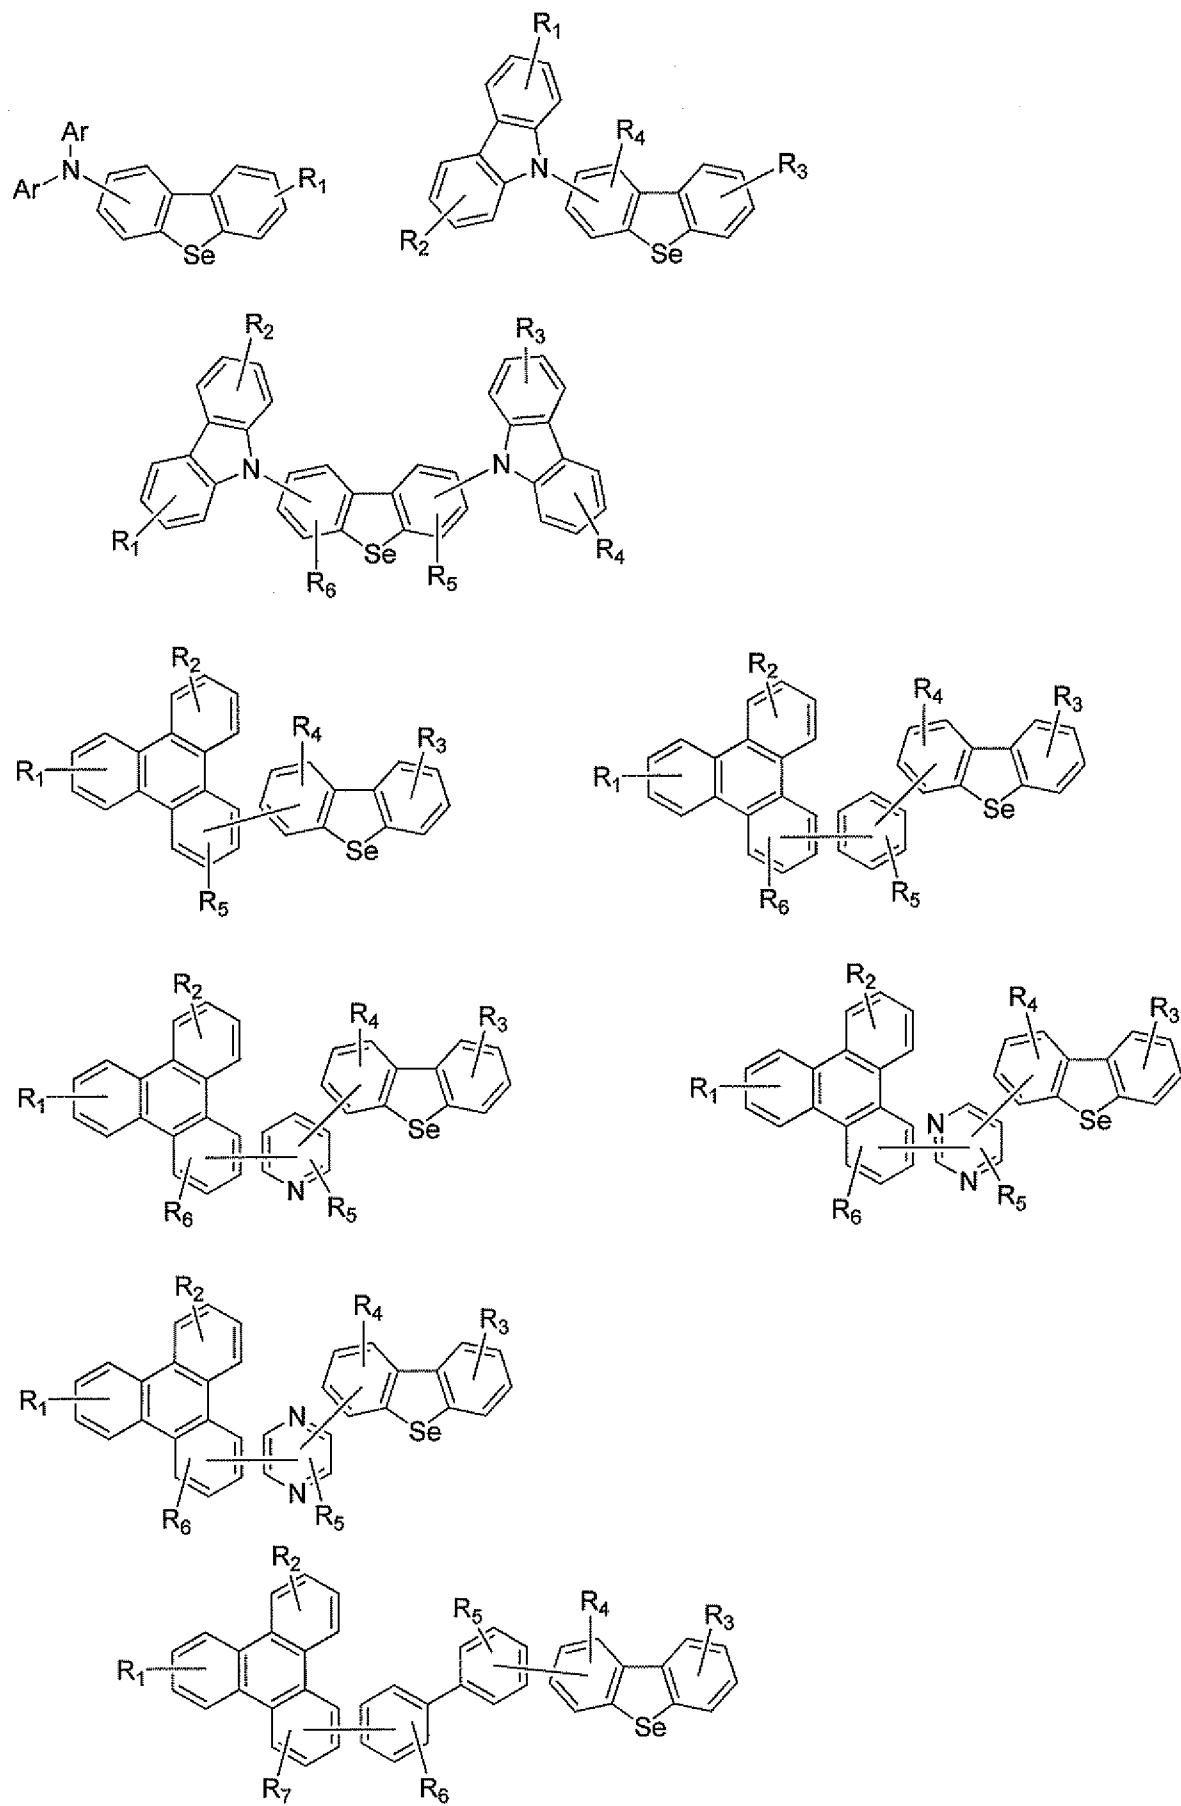


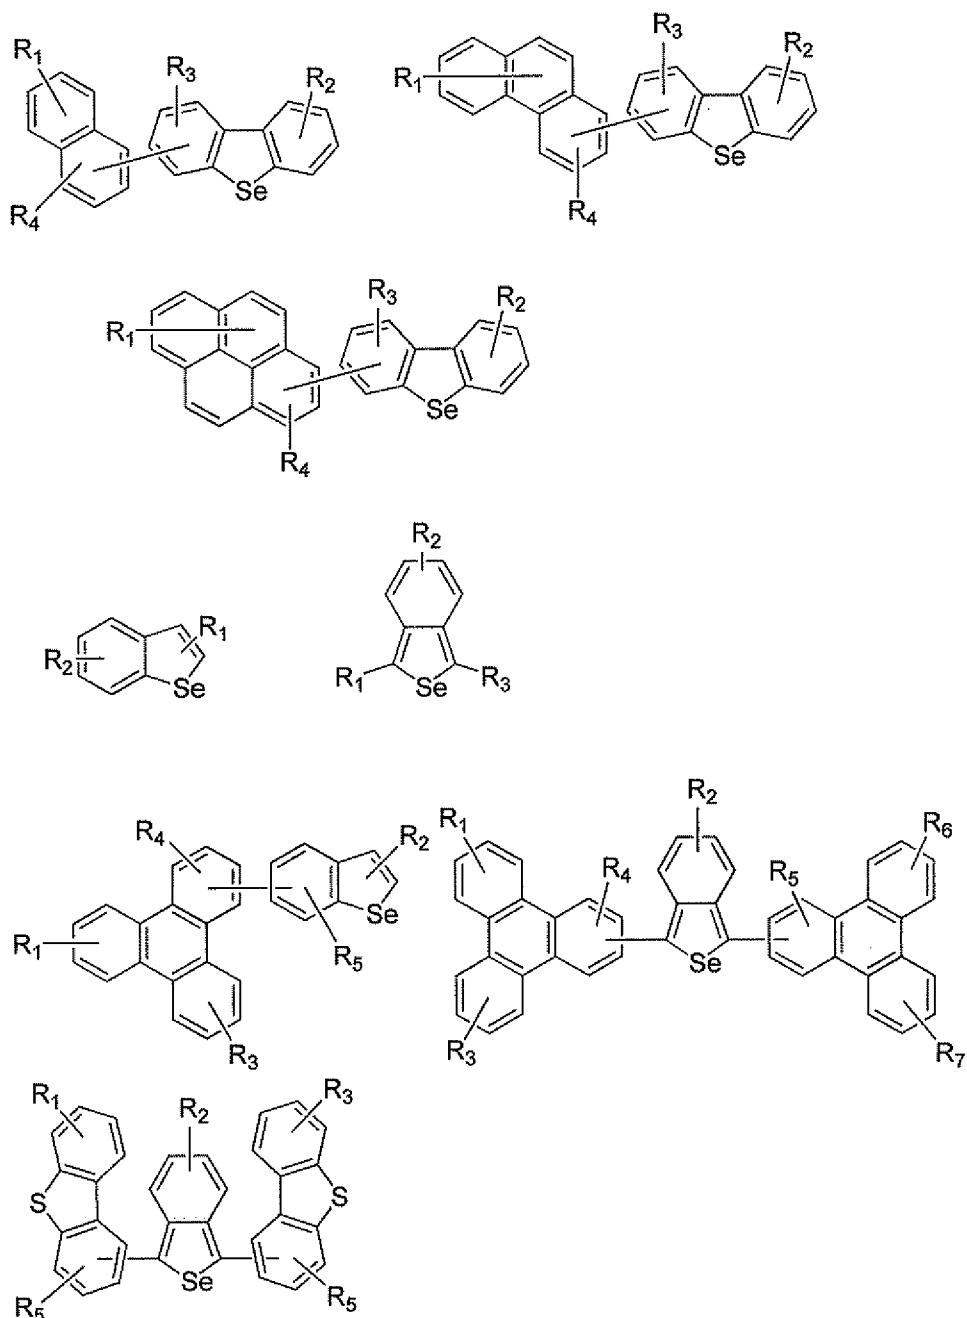



wherein each of R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub> and R<sub>7</sub> indicates an optional substituent to any possible position in the relevant moiety, Ar indicates an aromatic group, and each line linking two molecular moieties indicates attachment between the two moieties at any possible positions on the respective moieties.

19. The organoselenium compound of claim 18, which is selected from the group consisting of

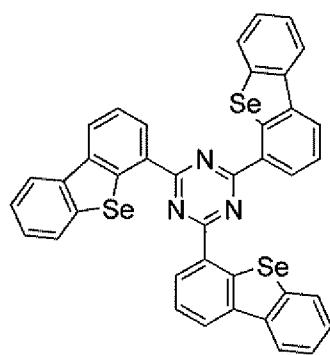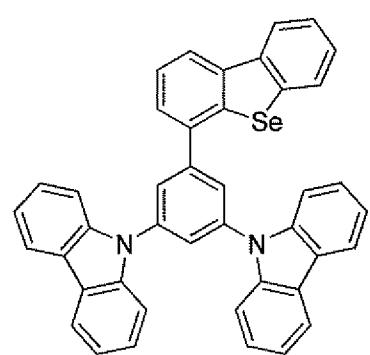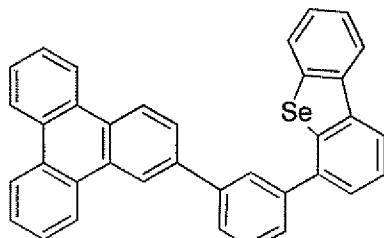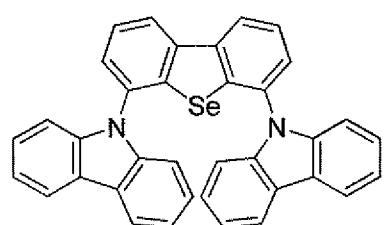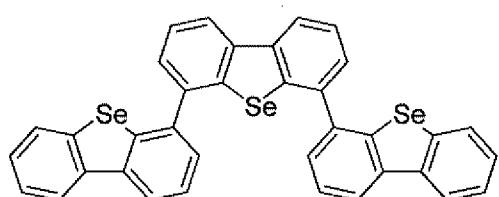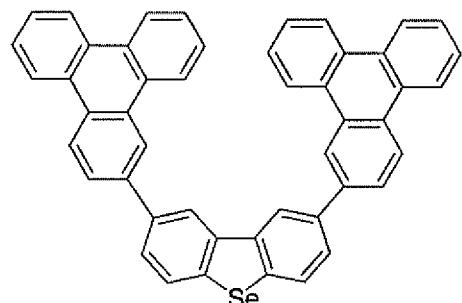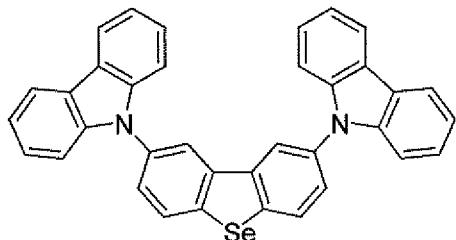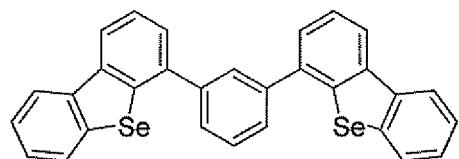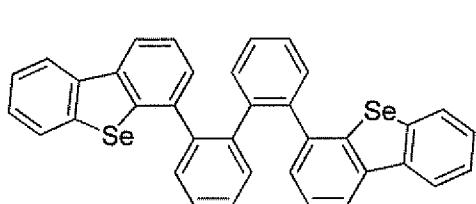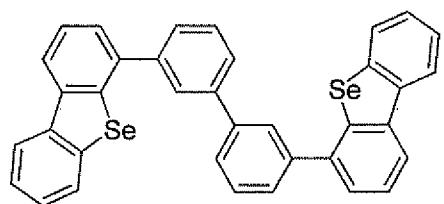


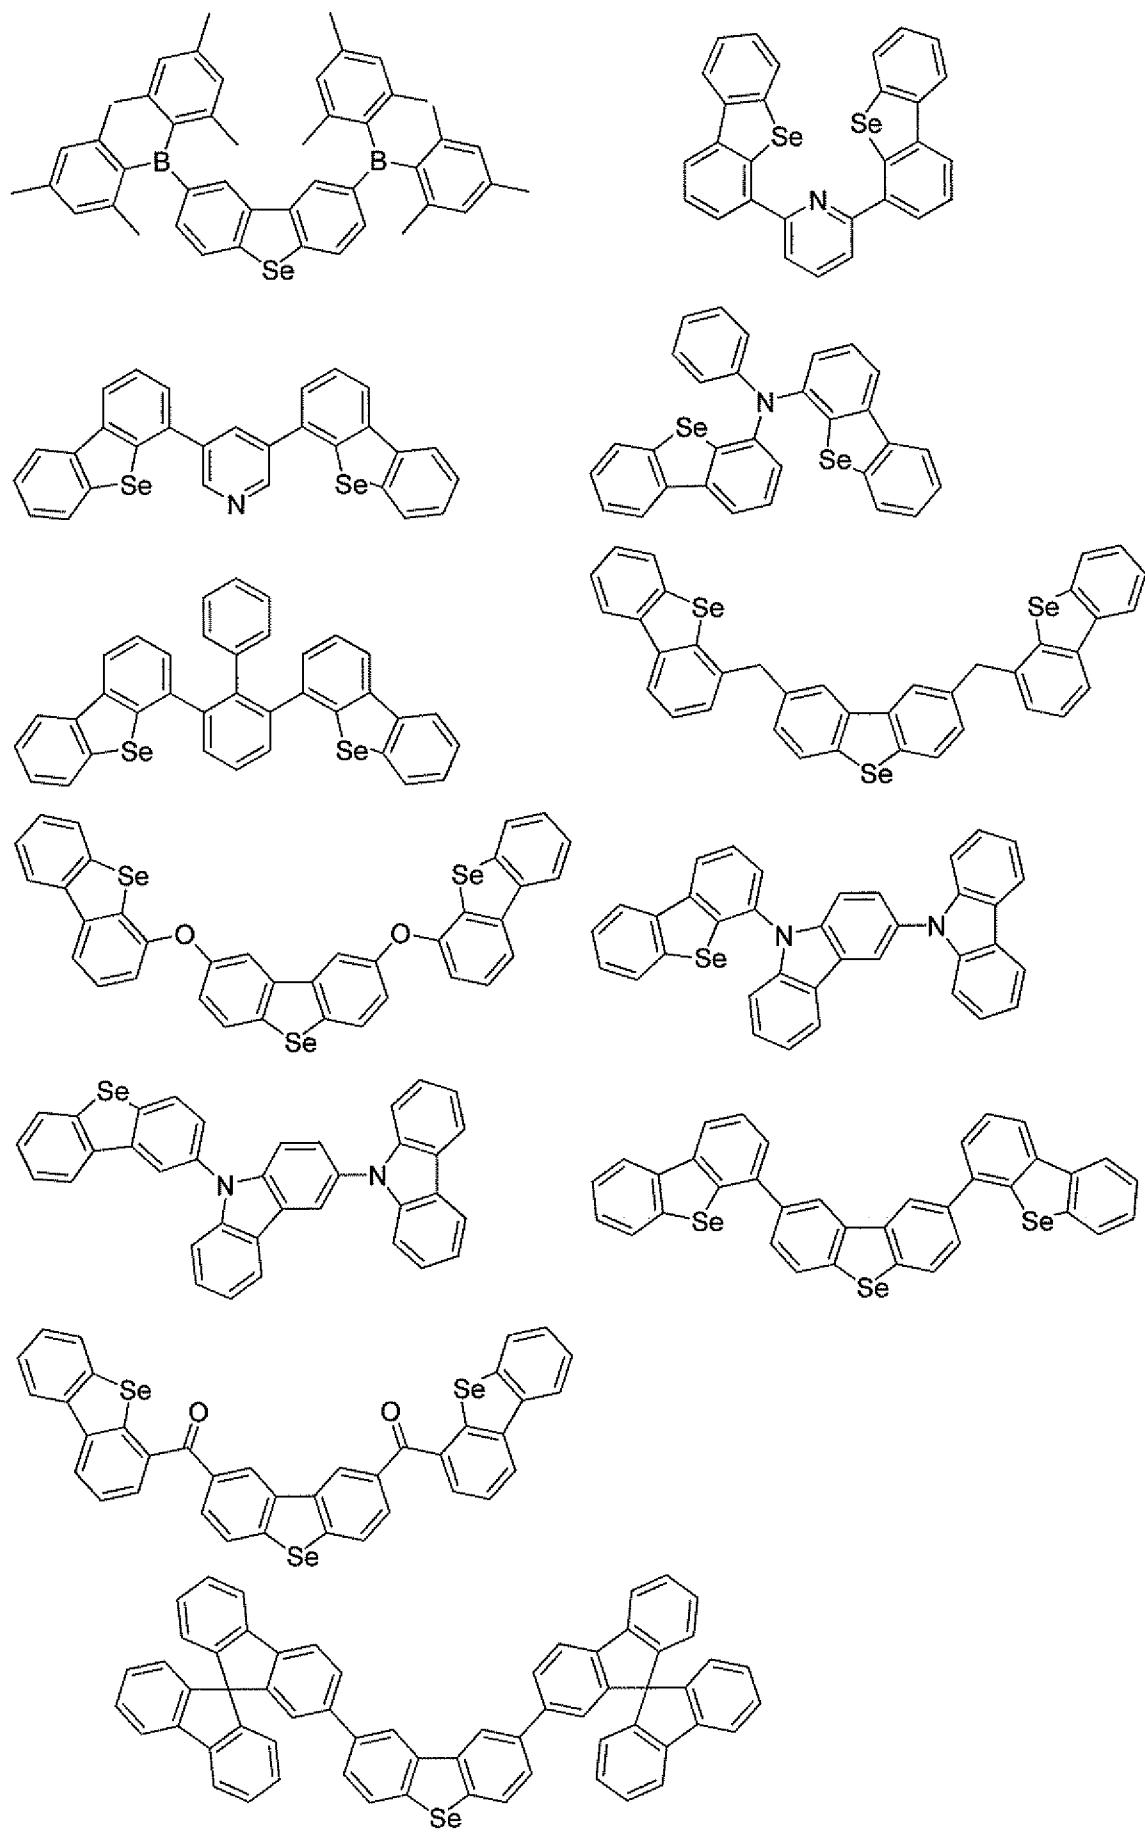


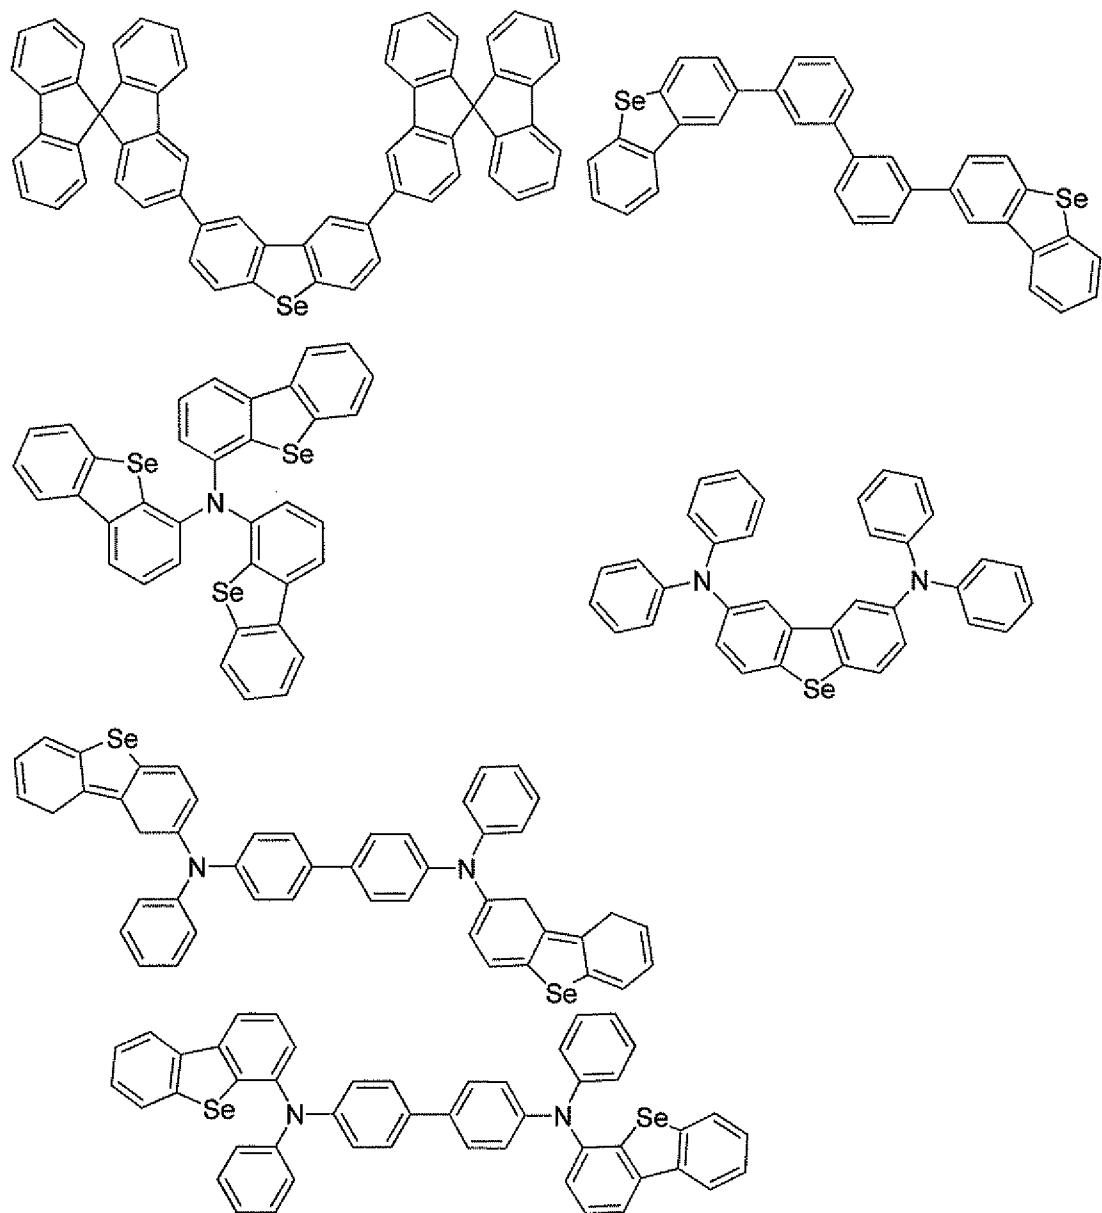


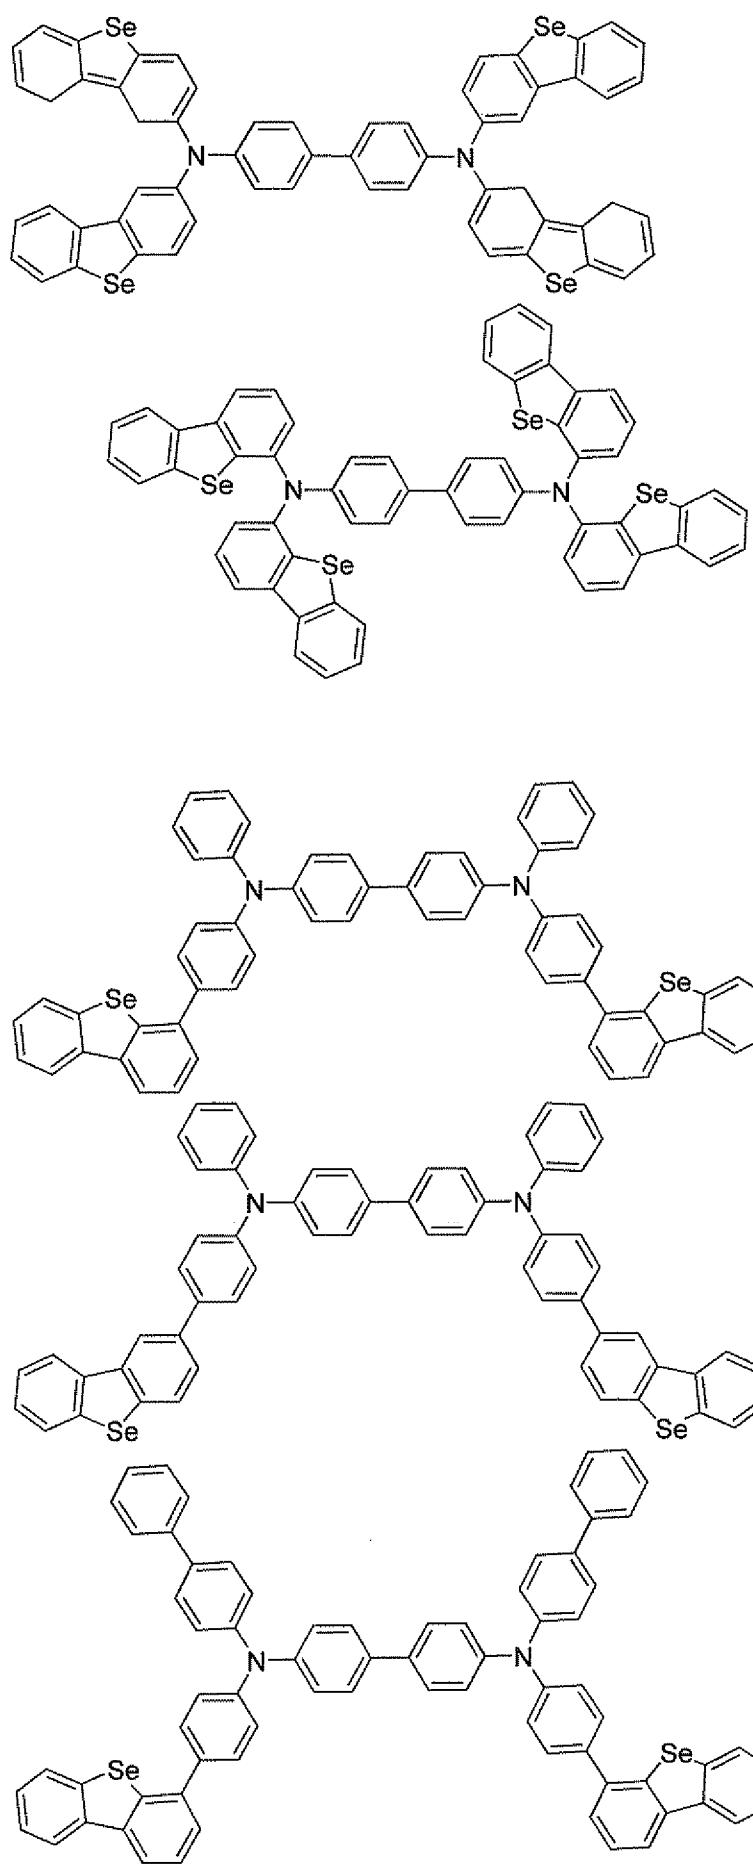



5

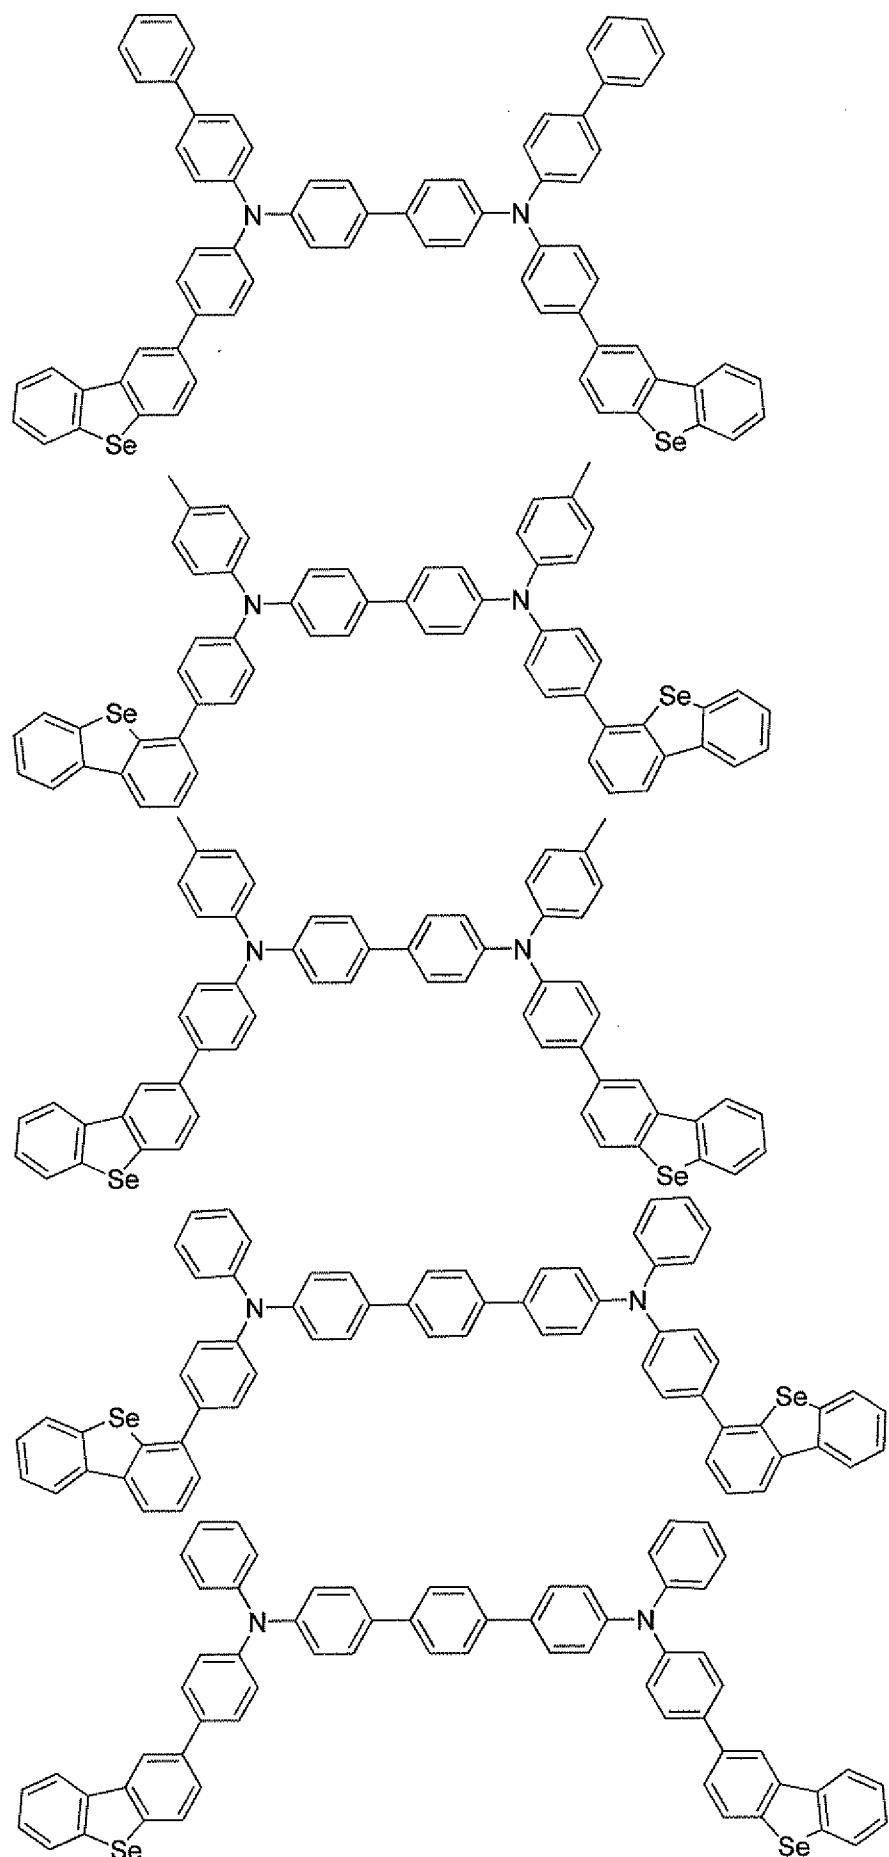


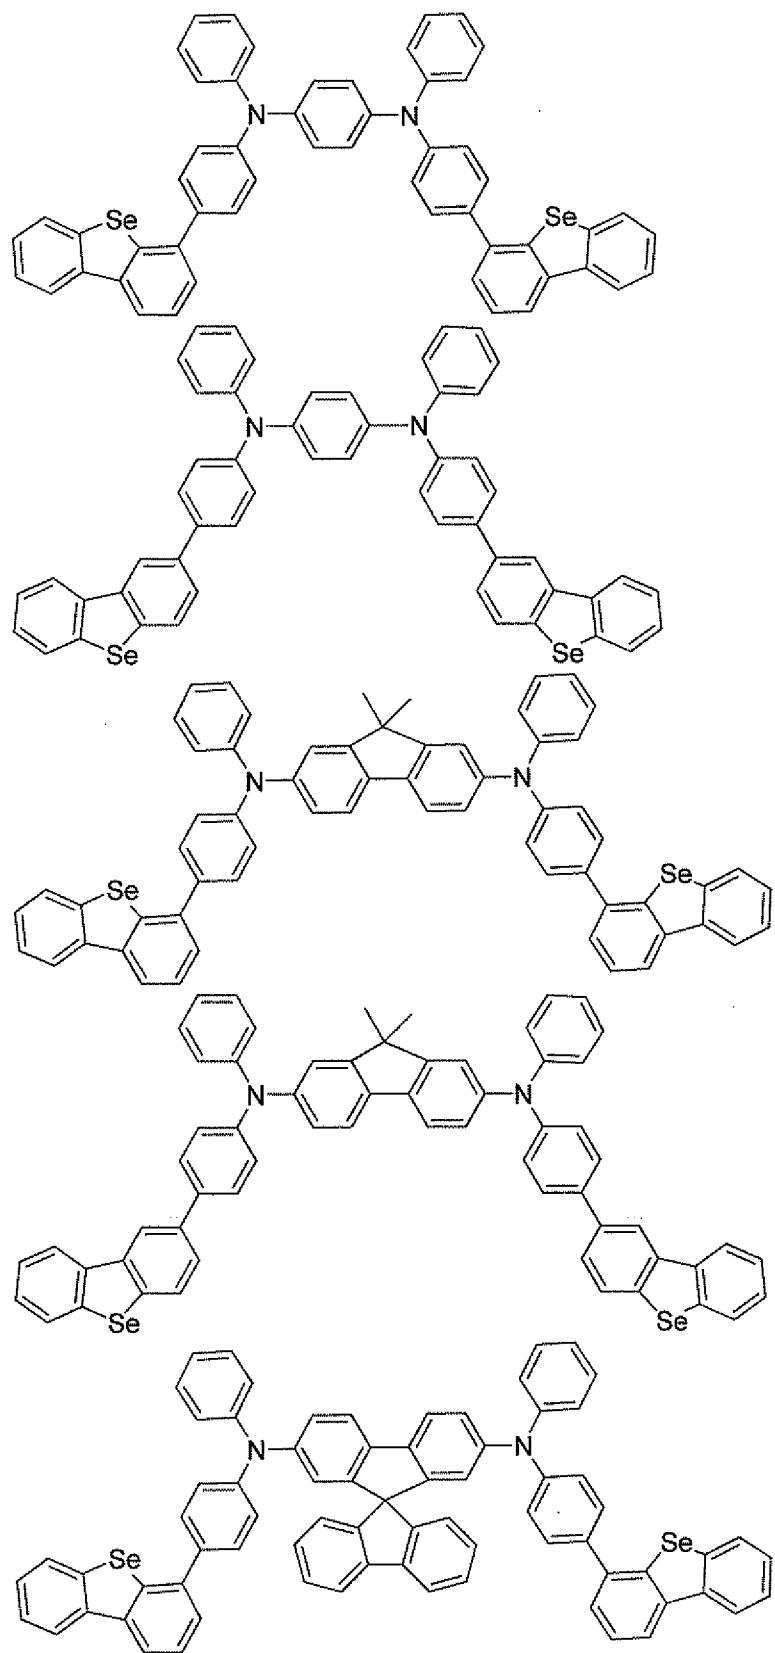


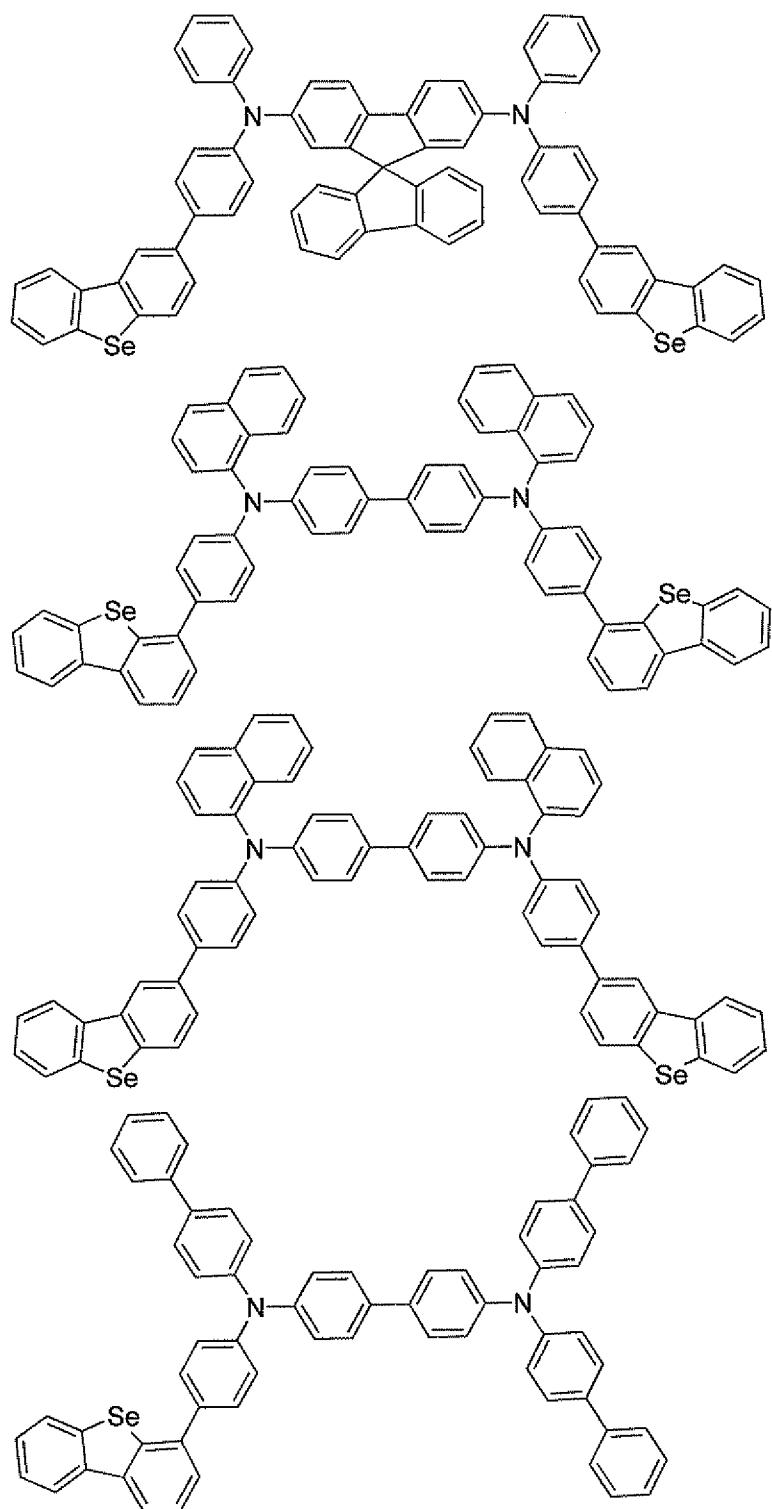


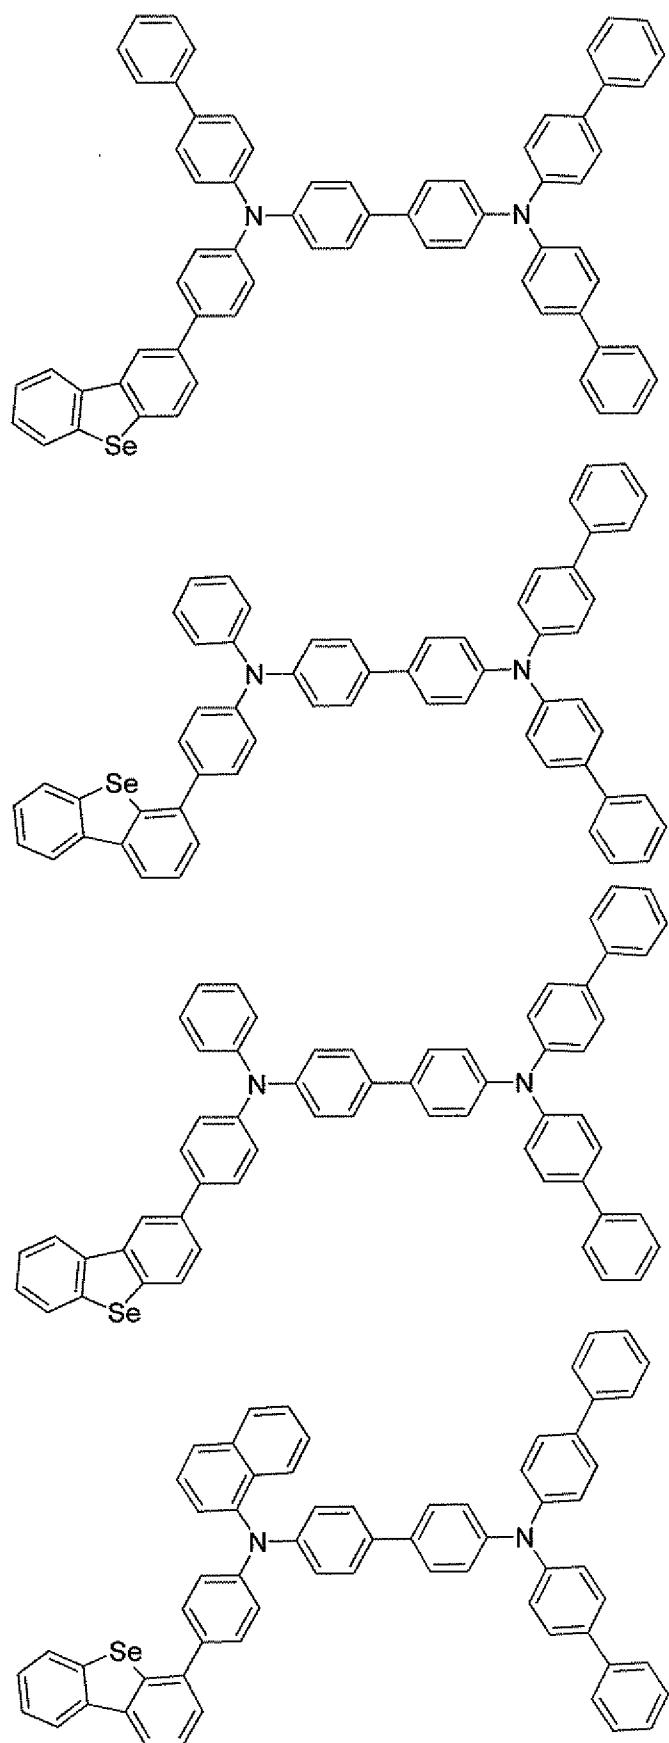


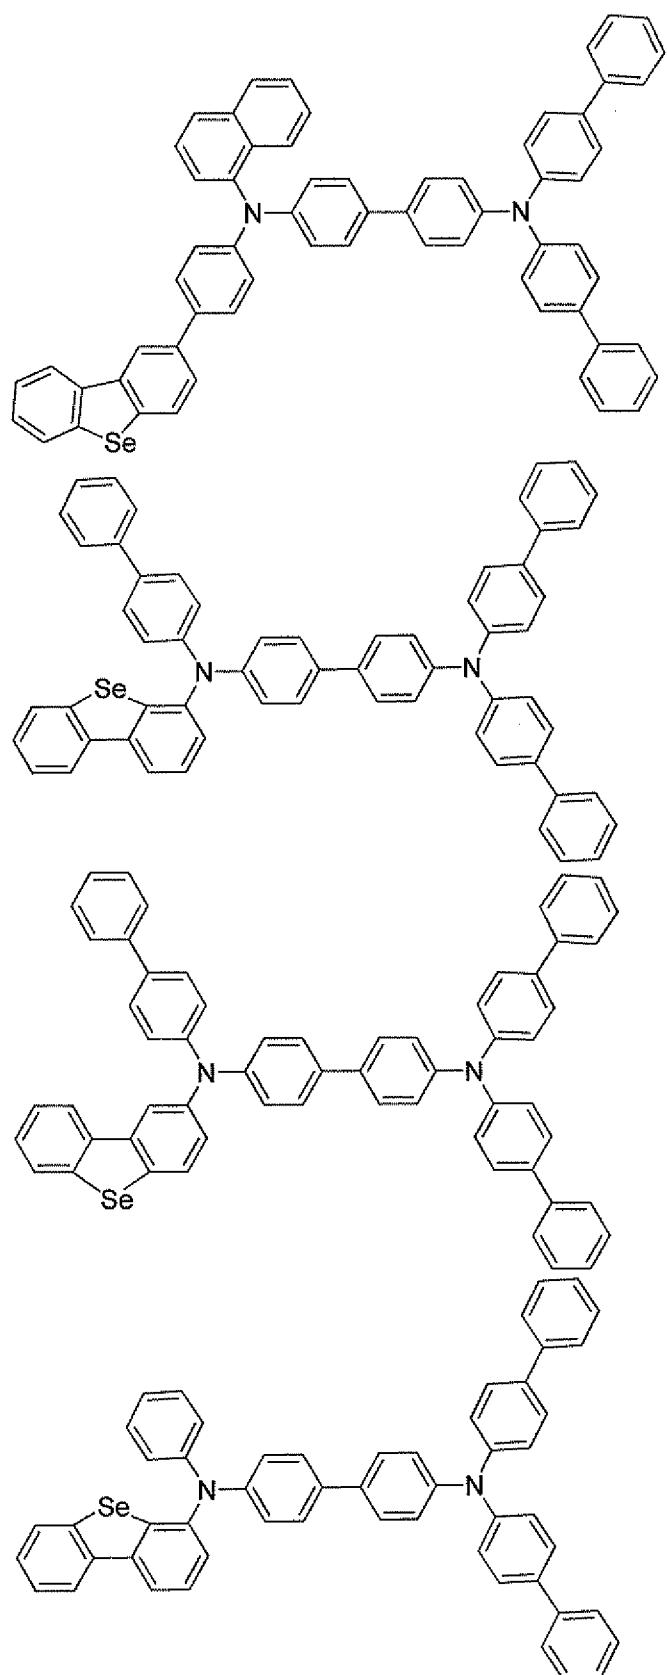


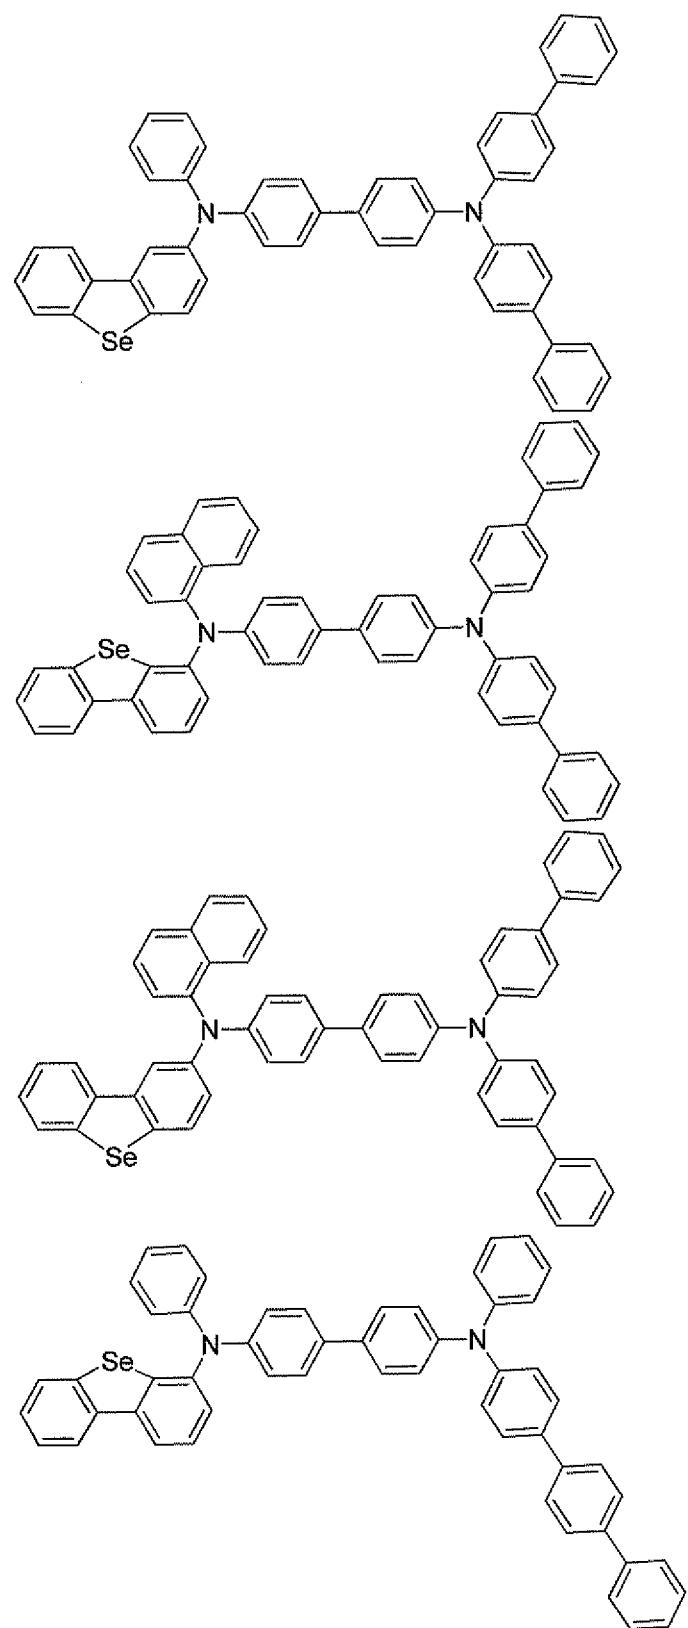

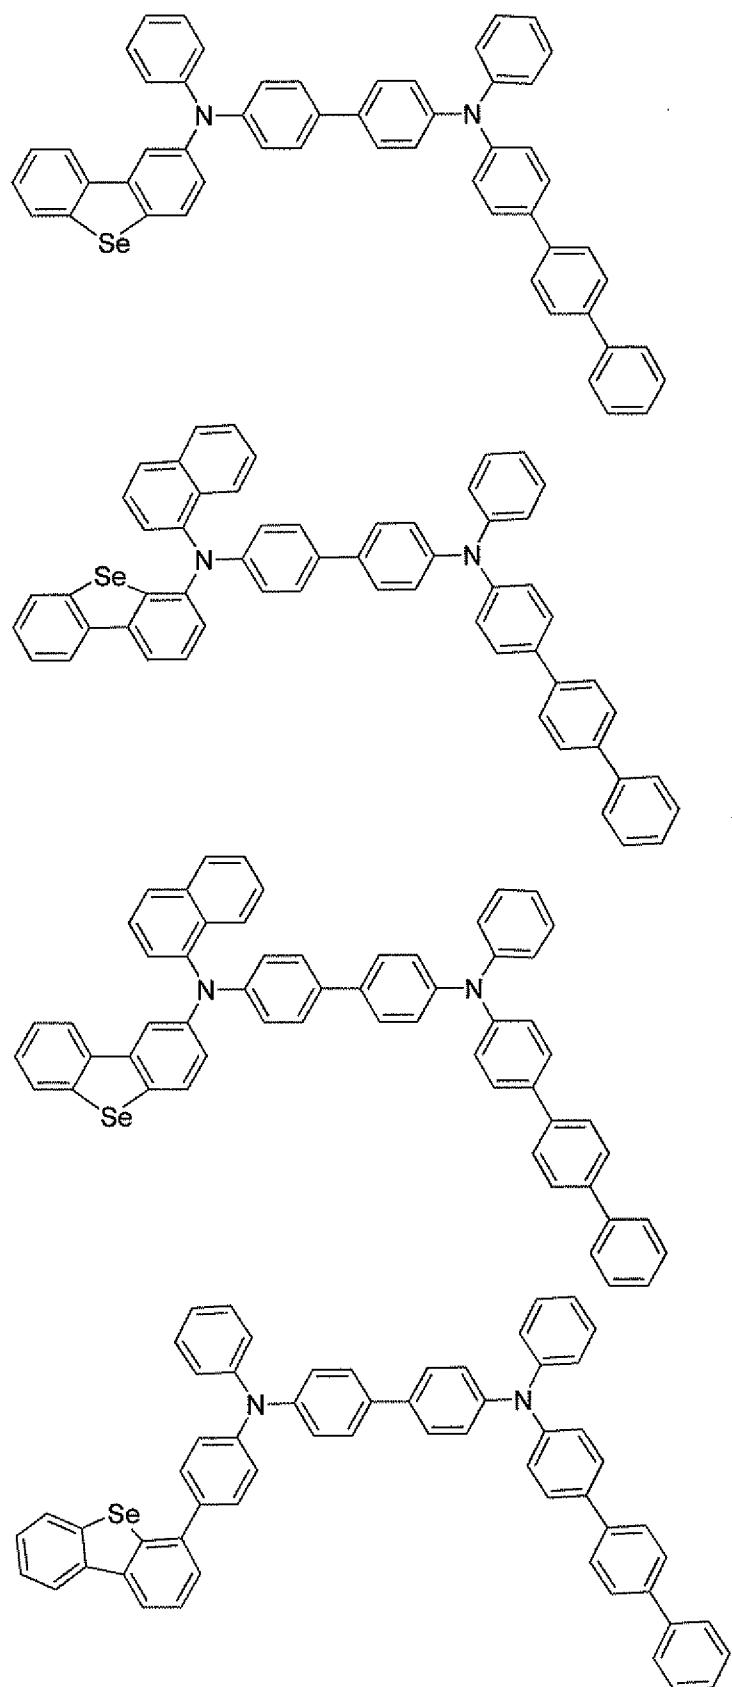

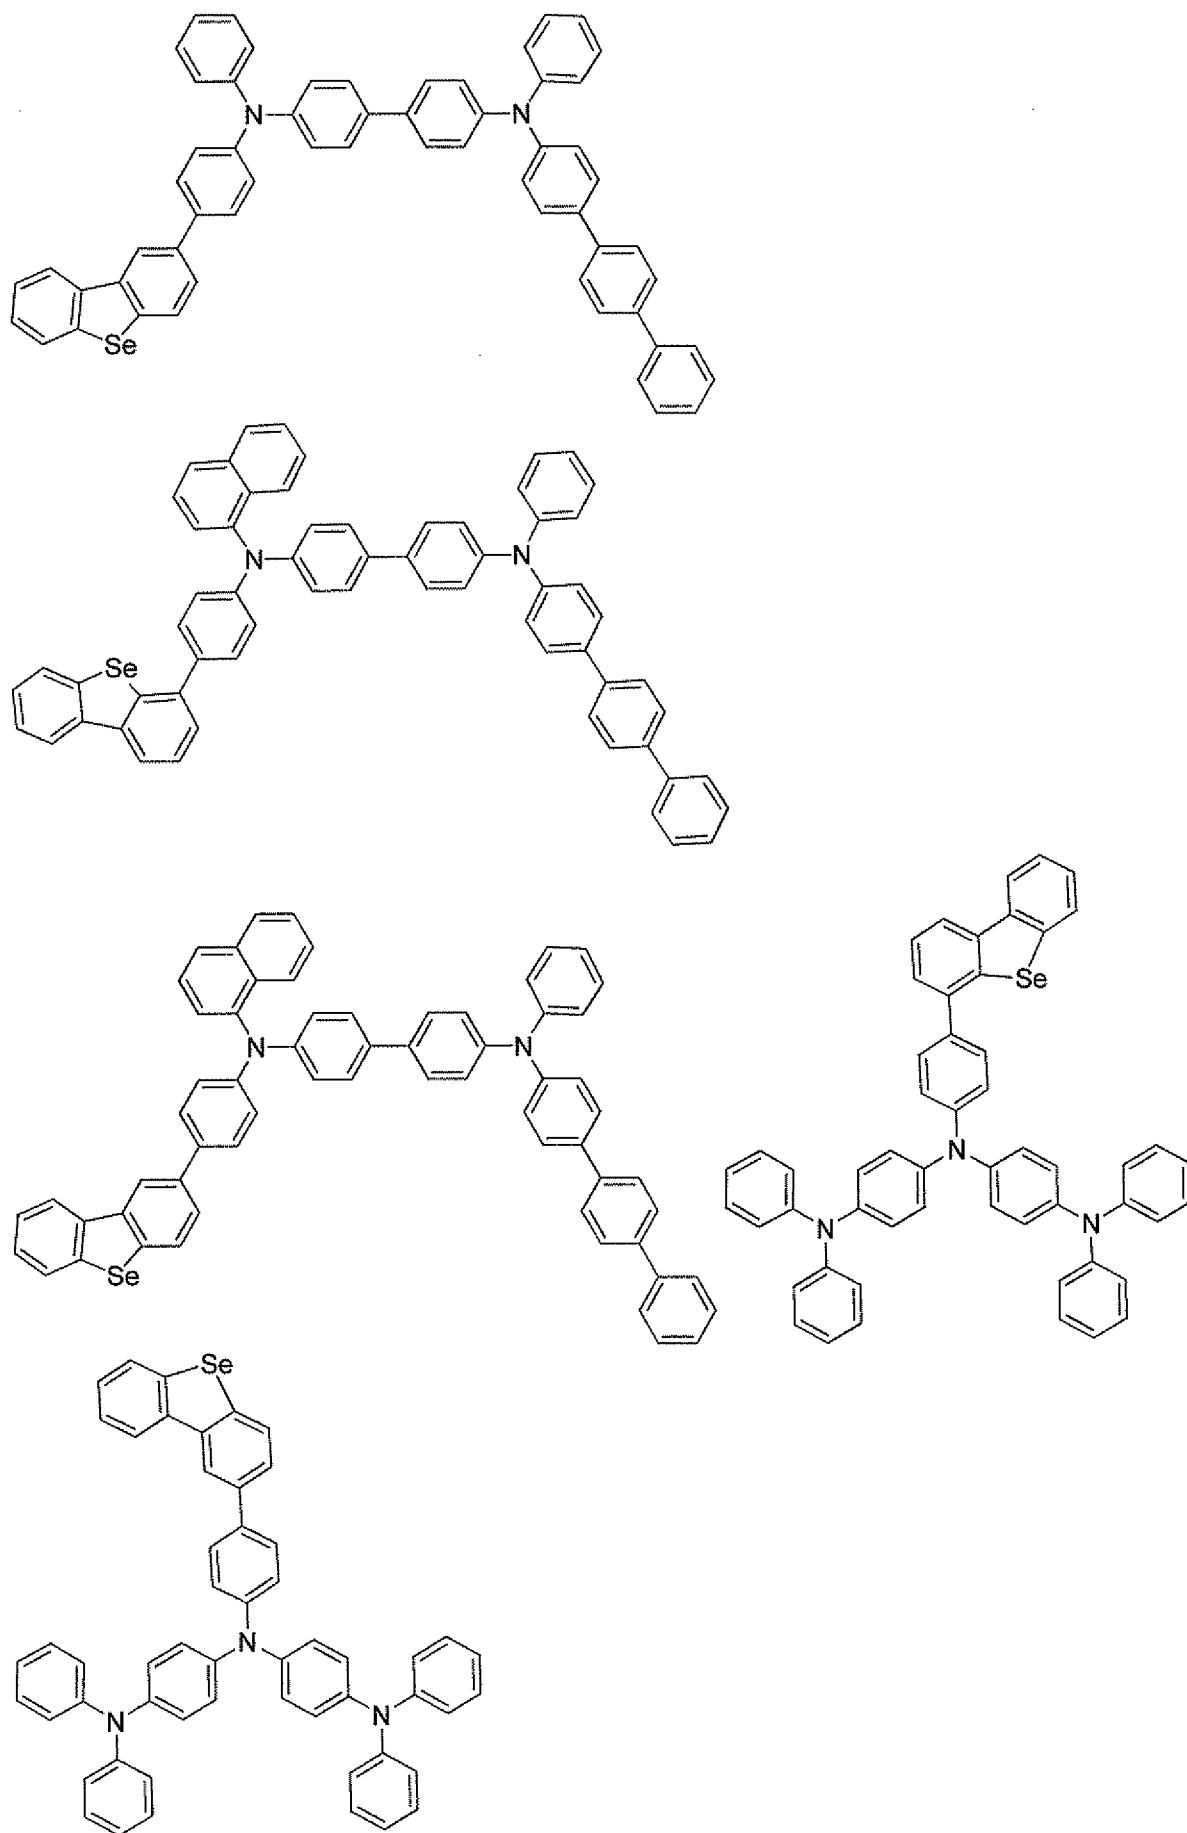


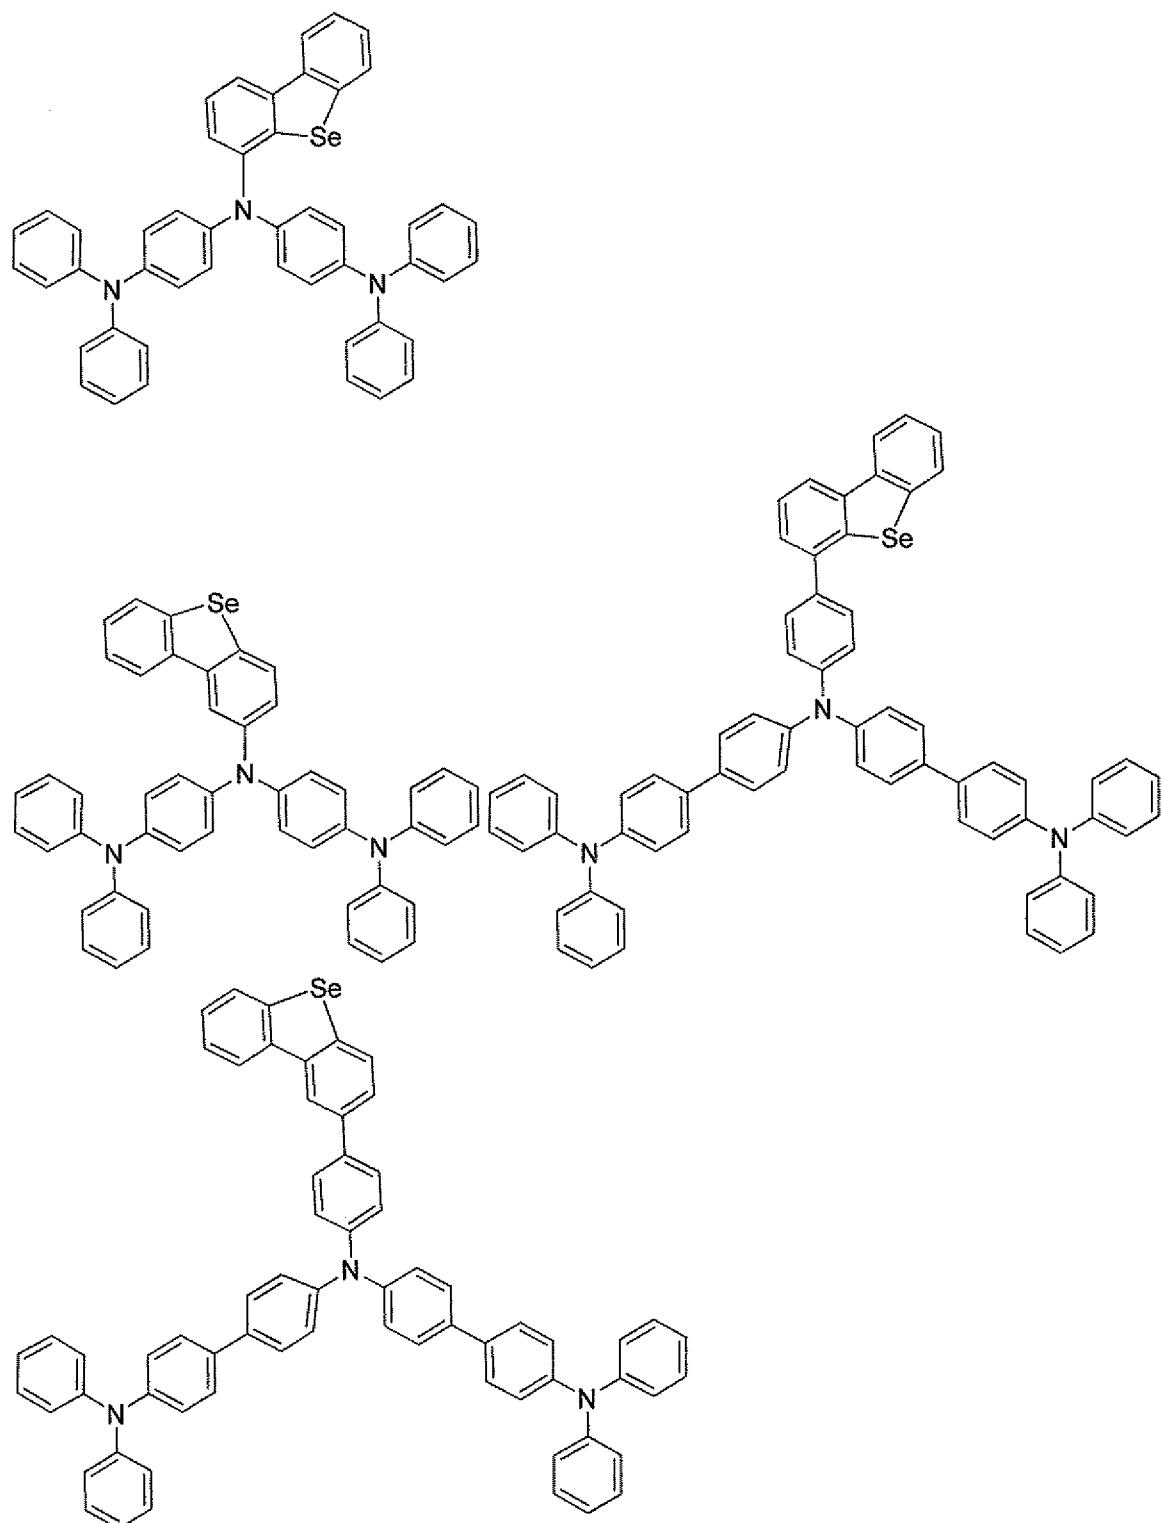

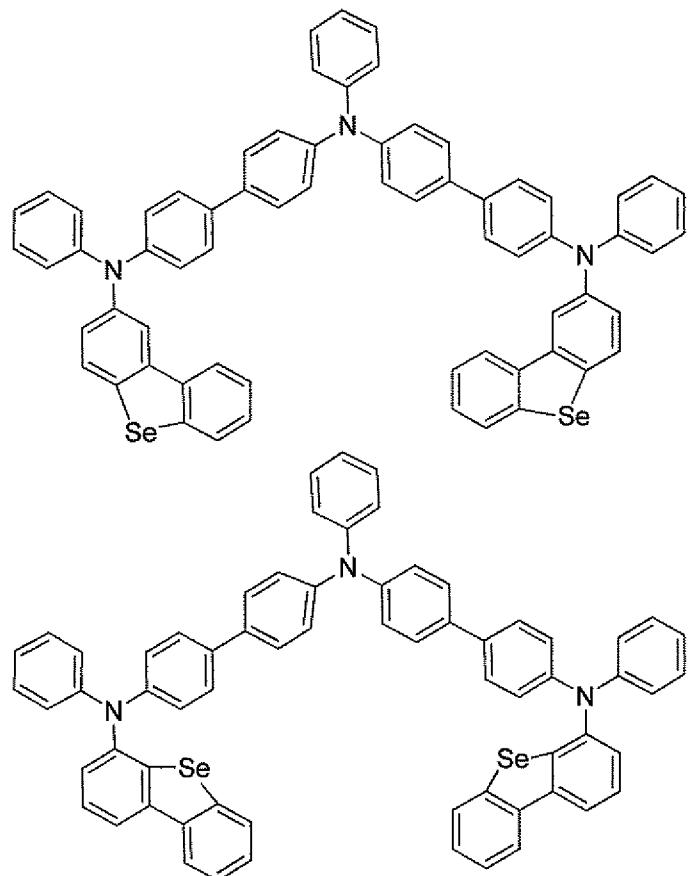


and derivatives thereof.

5 20. The organoselenium compound of claim 18, which is

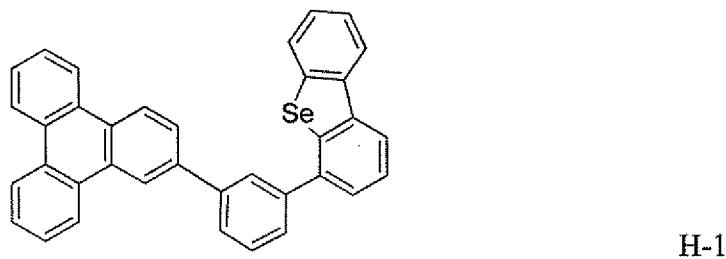

or a derivative thereof.


10 21. The organoselenium compound of claim 18, which is

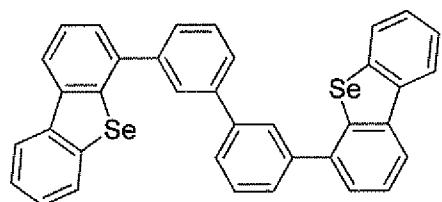


H-2

or a derivative thereof.



22. An organoselenium compound selected from the group consisting of

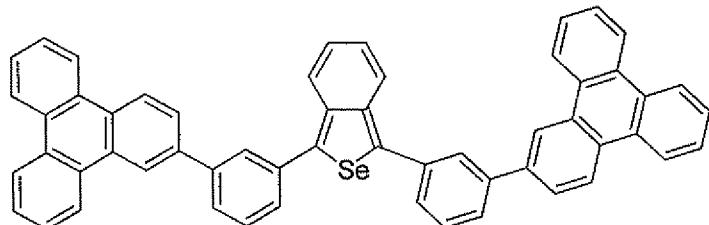


5

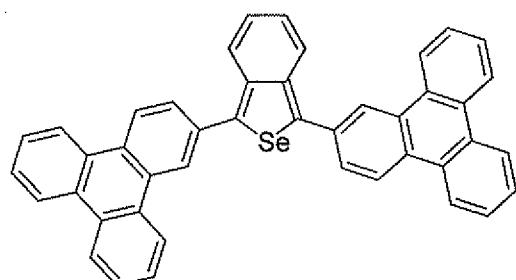

10

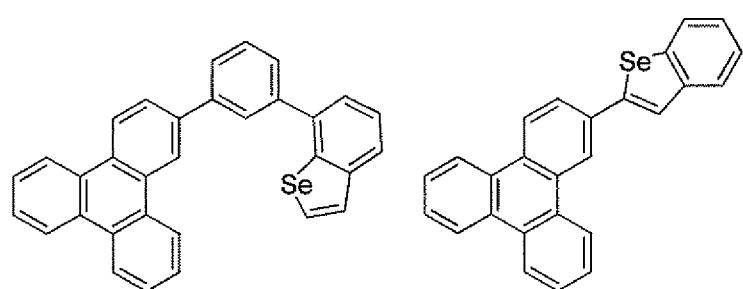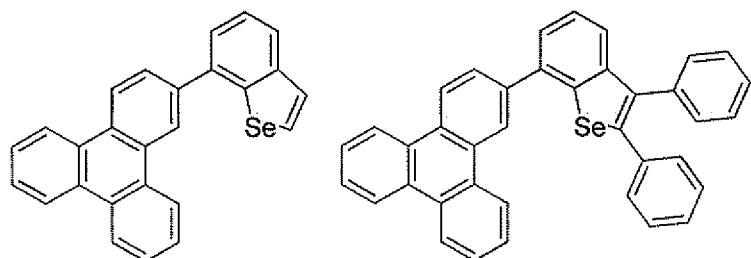

15

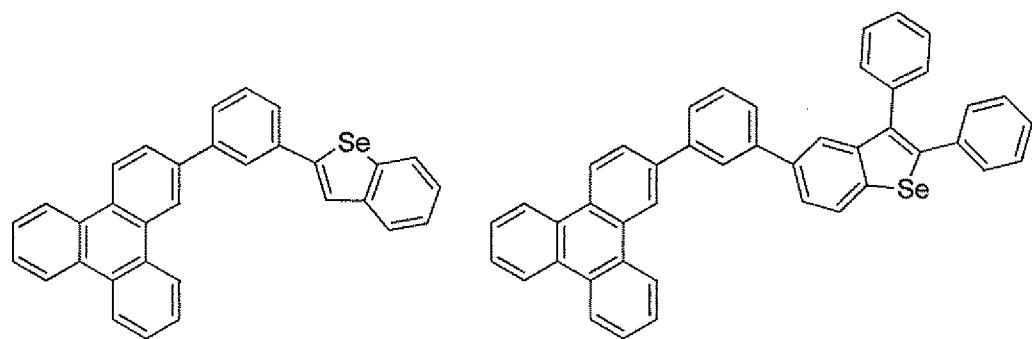

and derivatives thereof.

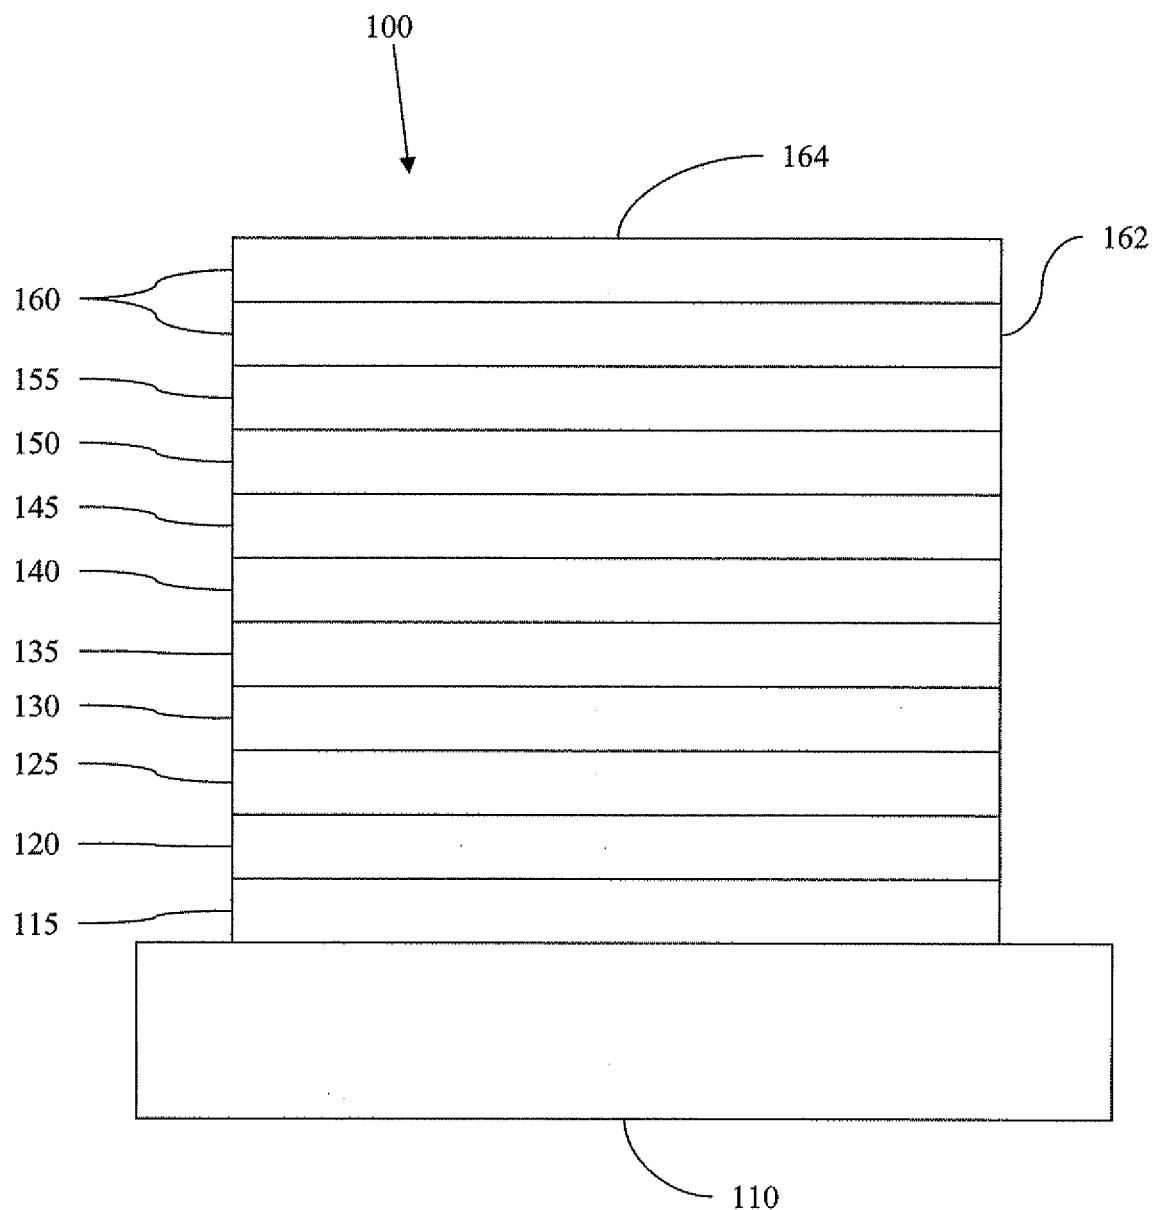


Figure 1

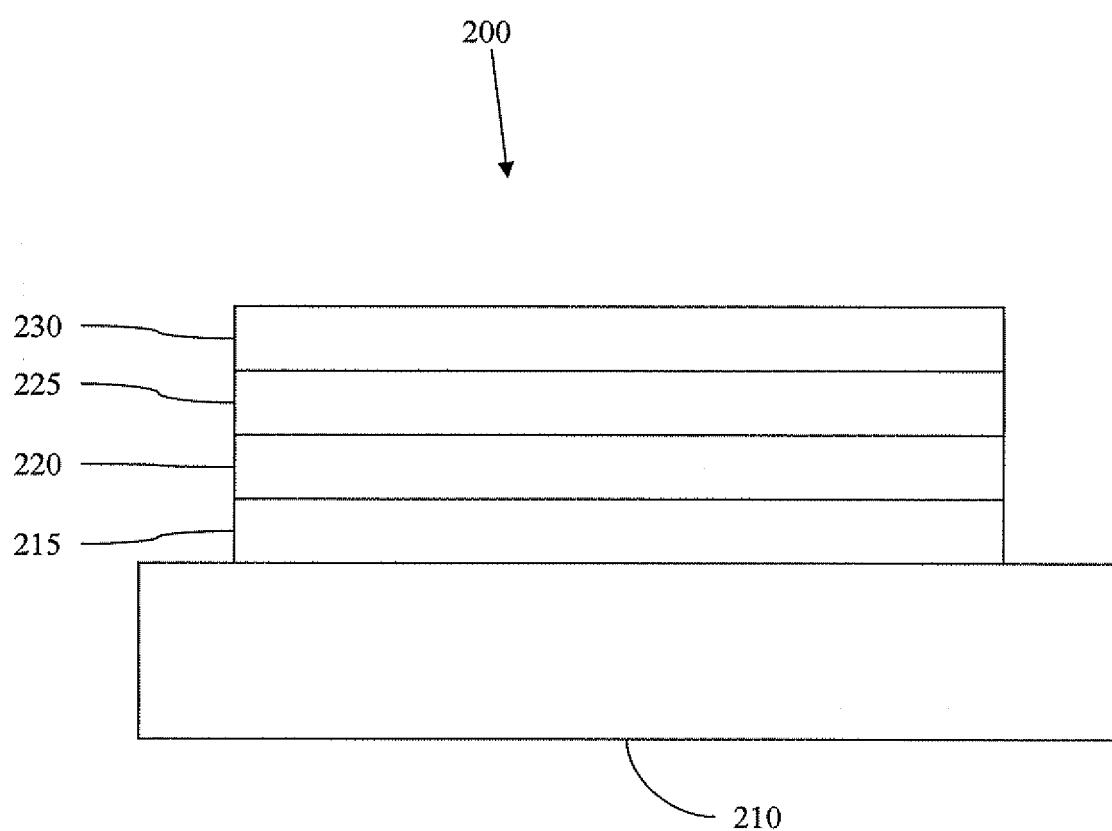


Figure 2

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2009/058162

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H01L51/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/100207 A1 (PARK SANG-HOON [KR] ET AL) 1 May 2008 (2008-05-01) paragraphs [0077], [0080], [0081], [0093]; claim 7; figure 1 -----	1,2, 7-16,18
X	JP 2000 252065 A (SUMITOMO CHEMICAL CO) 14 September 2000 (2000-09-14) claim 1 -----	1
X	GAIDIS, J.M.: "Biphenylene Insertion Products, Dibenzoselenophene and Diphenyldibenzostannole" J.ORG.CHEM., vol. 35, no. 8, 1970, pages 2811-2813, XP002560305 figures compound, II ----- -/-	18

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 December 2009	10/03/2010
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Fratiloiu, Silvia

## INTERNATIONAL SEARCH REPORT

International application No PCT/US2009/058162
---

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>SATO, S. AND FURUKAWA, N.: "First Detection of 2,2'-Biphenylenediphenylsulfurane and -Selenurane [10-M-4(C4), M=S,Se] by Low Temperature NMR Experiments and Isolation of the Tellurane" <i>TETRAHEDRON LETTERS</i>, vol. 36, no. 16, 1995, pages 2803-2806, XP002560306 figures compound,9,scheme,1</p> <p>-----</p>	18
X	<p>SUZUKI, H. AND NAKAMURA, T.: "A Convenient Synthesis of Functionalized Dibenzotellurophenes and Related Compounds via the Intramolecular Telluro Coupling Reaction. The positive Effect of Heavy Chalcogen Atoms on the Molecular Hyperpolarizability of a Captodative Conjugation System" <i>J. ORG. CHEM.</i>, vol. 60, 1995, pages 5274-5278, XP002560307 figures compound,4a,chart,1</p> <p>-----</p>	18
X	<p>KIMURA, T., ISHIKAWA, Y., UEKI, K., HORIE, Y., FURUKAWA, N.: "Effect of Through-Space Interaction on the Photolytic Desulfurization or Deselenization and Intramolecular Cyclization Reactions of 1,9-Disubstituted Dibenzochalcogenophenes" <i>J. ORG. CHEM.</i>, vol. 59, 1994, pages 7117-7124, XP002560308 figures Scheme,1</p> <p>-----</p>	18

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2009/058162

### Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1(part), 2(part), 7(part)-16(part), 18(part)

#### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part):  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (1) and (2)  
---
2. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (3), (7) and (10).  
---
3. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (4), (5), (6), (8), (9) and (11)  
---
4. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (12) and (14)  
---
5. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (13) and (15)  
---
6. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (16)  
---
7. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)  
the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (17)  
---
8. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (18) and (19)

---

9. claims: claims 1(part)-3(part), 6, 7(part)-19(part), 21

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (20)

---

10. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (21)

---

11. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (22), (24), (25), (26), (27) and (28)

---

12. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (23)

---

13. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (29)

---

14. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (30), (31), (32), (33), (34) and (35)

---

15. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (36)

---

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

16. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (37)

---

17. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (38)

---

18. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (39)

---

19. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (40)

---

20. claims: claims 1(part)-3(part), 7(part)-16(part), 18(part), 19(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (41) and (49)

---

21. claims: claims 1(part)-3(part), 5, 7(part)-19(part), 20

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (42)

---

22. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (43)

---

23. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (44) and (45)

---

24. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (46)

---

25. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (47)

---

26. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (48)

---

27. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (50), (51), (52) and (53)

---

28. claims: claims 1(part), 2(part), 4(part), 7(part)-16(part), 18(part), 22(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (54)

---

29. claims: claims 1(part), 2(part), 4(part), 7(part)-16(part), 18(part), 22(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (55)

---

30. claims: claims 1(part), 2(part), 7(part)-16(part), 18(part)

the organic emitting device comprising an organoselenium compound or the organoselenium compound, respectively, which is denoted compound (56)

---

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/US2009/058162

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008100207	A1 01-05-2008	KR 20080039057 A	07-05-2008
JP 2000252065	A 14-09-2000	JP 3772576 B2	10-05-2006

专利名称(译)	有机硒材料及其在有机发光器件中的用途		
公开(公告)号	<a href="#">EP2329540A1</a>	公开(公告)日	2011-06-08
申请号	EP2009792929	申请日	2009-09-24
[标]申请(专利权)人(译)	环球展览公司		
申请(专利权)人(译)	通用显示器公司		
当前申请(专利权)人(译)	通用显示器公司		
[标]发明人	XIA CHUANJUN KWONG RAYMOND MA BIN LIN CHUN		
发明人	XIA, CHUANJUN KWONG, RAYMOND MA, BIN LIN, CHUN		
IPC分类号	H01L51/00 H01L51/54		
CPC分类号	H01L51/0071 C07D345/00 C07D421/14 C07F5/027 H01L51/0061 H01L51/0067 H01L51/0069 H01L51/0072 H01L51/0085 H01L51/0087 H01L51/0088 H01L51/5012 H01L51/5016 H01L51/506 H01L51/5076 Y10S428/917		
优先权	61/100229 2008-09-25 US		
其他公开文献	<a href="#">EP2329540B1</a>		
外部链接	<a href="#">Espacenet</a>		

**摘要(译)**

本发明提供了包含二苯并硒吩，苯并[b]硒吩或苯并[c]硒吩的有机硒化合物及其在有机发光器件中的用途。