



(51) International Patent Classification:

C09K 11/06 (2006.01) *H01L 51/54* (2006.01)
H01L 27/32 (2006.01)

(21) International Application Number:

PCT/KR20 15/003485

(22) International Filing Date:

7 April 2015 (07.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10-2014-0041844 8 April 2014 (08.04.2014) KR
10-2014-0086754 10 July 2014 (10.07.2014) KR
10-2015-0042704 26 March 2015 (26.03.2015) KR

(71) Applicant: **ROHM AND HAAS ELECTRONIC MATERIALS KOREA LTD.** [KR/KR]; 56, 3gongdan 1-ro, Seobuk-gu, Cheonan-si, Chungcheongnam-do 331-980 (KR).

(72) Inventors: **AHN, Hee-Choon**; 62, Yeongtong-ro 174beongil, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-400 (KR). **KIM, Young-Kwang**; 304, 46, Maeyeong-ro 415 beongil, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-814 (KR). **MOON, Doo-Hyeon**; 906-1304, 117, Byeongjeom 3-ro, Hwaseong-si, Gyeonggi-do 445-768 (KR). **LEE, Su-Hyun**; 105-1 102, 205, Suil-ro, Jangan-gu, Suwon-si, Gyeonggi-do 440-200 (KR). **LEE, Seon-Woo**; 104-108, 49-5, Osan-ro, Osan-si, Gyeonggi-do 447-3 10 (KR). **KIM, Chi-Sik**; 441-1201, 71, Dongtanbanseok-ro, Hwaseong-si, Gyeonggi-do 445-752 (KR). **PARK, Kyoung-Jin**; 31, Wonteo-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-838 (KR). **KIM, Nam-Kyun**; 302-1801, 219, Poendaero, Suji-gu, Yongin-si, Gyeonggi-do 448-527 (KR). **CHOI, Kyung-Hoon**; 337-801, 189, Dongtanjungang-ro,

Hwaseong-si, Gyeonggi-do 445-160 (KR). **SHIM, Jae-Hoon**; H-407, 79, Gukjegeumyung-ro, Yeongdeungpo-gu, Seoul 150-796 (KR). **CHO, Young-Jun**; 204-701, 393, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 463-400 (KR). **LEE, Kyung-Joo**; 210-1001, 72, Saechang-ro 8-gil, Mapo-gu, Seoul 121-773 (KR).

(74) Agent: **CHANG, Hoon**; Central Intellectual Property & Law, Korean Re Bldg. 5F, 68, Jong-ro 5-gil, Jongno-gu, Seoul 110-733 (KR).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTI-COMPONENT HOST MATERIAL AND ORGANIC ELECTROLUMINESCENT DEVICE COMPRISING THE SAME

(57) Abstract: The present invention relates to an organic electroluminescent device comprising at least one light-emitting layer between an anode and a cathode, wherein the light-emitting layer comprises a host and a phosphorescent dopant; the host consists of multi-component host compounds; at least a first host compound of the multi-component host compounds is a specific bicarbazole derivative containing an aryl group, and a second host compound is a specific carbazole derivative including a nitrogen-containing heteroaryl group. According to the present invention, the organic electroluminescent device using the multi-component host compounds has a high efficiency and long lifespan compared with the conventional device using one component host compound.



WO 2015/156587 A1

Description

Title of Invention: **MULTI-COMPONENT HOST MATERIAL AND ORGANIC ELECTROLUMINESCENT DEVICE COMPRISING THE SAME**

Technical Field

- [1] The present invention relates to a multi-component host material and an organic electroluminescent device comprising the same.

Background Art

- [2] An electroluminescent (EL) device is a self-light-emitting device with the advantage of providing a wider viewing angle, a greater contrast ratio, and a faster response time. An organic EL device was first developed by Eastman Kodak, by using small aromatic diamine molecules and aluminum complexes as materials for forming a light-emitting layer (see Appl. Phys. Lett. 51, 913, 1987).
- [3] The organic EL device changes electric energy into light by the injection of a charge into an organic light-emitting material and commonly comprises an anode, a cathode, and an organic layer formed between the two electrodes. The organic layer of the organic EL device may be composed of a hole injection layer (HIL), a hole transport layer (HTL), an electron blocking layer (EBL), a light-emitting layer (EML) (containing host and dopant materials), an electron buffer layer, a hole blocking layer (HBL), an electron transport layer (ETL), an electron injection layer (EIL), etc.: the materials used in the organic layer can be classified into a hole injection material, a hole transport material, an electron blocking material, a light-emitting material, an electron buffer material, a hole blocking material, an electron transport material, an electron injection material, etc., depending on functions. In the organic EL device, holes from an anode and electrons from a cathode are injected into a light-emitting layer by the injection of a charge, and an exciton having high energy is produced by the recombination of holes and electrons. The organic light-emitting compound moves into an excited state by the energy and emits light which changes from energy when the organic light-emitting compound returns to the ground state from the excited state.
- [4] The most important factor determining luminescent efficiency in an organic EL device is the light-emitting material. The light-emitting material is required to have the following features: high quantum efficiency, high movement degree of an electron and a hole, formability of a uniform layer, and stability. The light-emitting material is classified into blue light-emitting materials, green light-emitting materials, and red light-emitting materials according to the light-emitting color, and further includes yellow light-emitting materials or orange light-emitting materials. Furthermore, the

light-emitting material is classified into a host material and a dopant material in the functional aspect. Recently, an urgent task is the development of an organic EL device having high efficacy and long operating lifespan. In particular, the development of highly excellent light-emitting material over conventional light-emitting materials is urgent considering EL properties required in medium- and large-sized OLED panels. For this, preferably, as a solvent in a solid state and energy transmitter, a host material should have high purity and suitable molecular weight in order to be deposited under vacuum. Furthermore, a host material is required to have high glass transition temperature and pyrolysis temperature to guarantee thermal stability, high electrochemical stability to provide long lifespan, easy formability of an amorphous thin film, good adhesion with adjacent layers, and no movement between layers.

[5] A mixed system of a dopant/host material can be used as a light-emitting material to improve color purity, luminescent efficiency, and stability. Generally, the device having the most excellent EL properties comprises the light-emitting layer, wherein a dopant is doped onto a host. If the dopant/host material system is used, the selection of the host material is important since the host material greatly influences on efficiency and performance of a light-emitting device.

[6] WO 2013/168688 A1, Japanese Patent No. 3139321, Korean Patent No. 10-1 170666, Korean Patent Application Laying-open No. 10-2012-0013173, and WO 2013/1 12557 A1 disclose organic EL devices comprising a dopant/host material system. The above literature use one host component having a carbazole-carbazole skeleton or exclude a host having a carbazole skeleton from second and third hosts.

[7] The present inventors have found that an organic EL device using a multi-component host compounds having a specific bicarbazole derivative which contains an aryl group and a specific carbazole derivative which includes a nitrogen-containing heteroaryl group has high efficiency and long lifespan, compared with using one component host compound in a light-emitting layer.

Disclosure of Invention

Technical Problem


[8] The object of the present invention is to provide an organic EL device having high efficiency and long lifespan.

Solution to Problem


[9] The above objective can be achieved by an organic electroluminescent device comprising at least one light-emitting layer between an anode and a cathode, wherein the light-emitting layer comprises a host and a phosphorescent dopant: the host consists of multi-component host compounds: at least a first host compound of the multi-component host compounds is represented by the following formula 1 which is a

specific bicarbazole derivative containing an aryl group, and a second host compound is represented by the following formula 2 which is a specific carbazole derivative including a nitrogen-containing heteroaryl group:

[10]

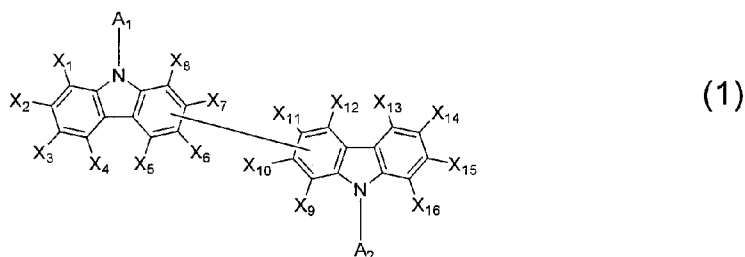

[11]

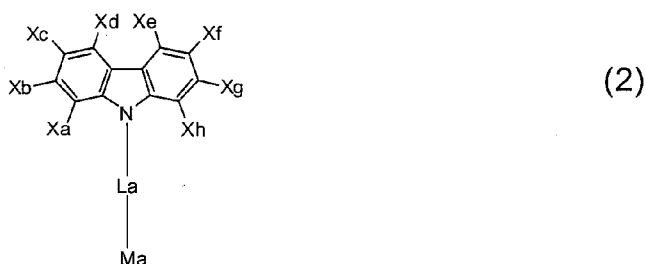

[12] wherein

[13] A_1 and A_2 each independently represent a substituted or unsubstituted (C6-C30)aryl group:

[14] X_1 to X_{16} each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

[15] Ma represents a substituted or unsubstituted nitrogen-containing 5- to 30-membered heteroaryl group:[16] La represents a single bond, or a substituted or unsubstituted (C6-C30)arylene group:[17] Xa to Xh each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted

(C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

- [18] the fused aromatic or heteroaromatic ring is selected from the group consisting of benzene, indole, indene, benzofuran and benzothiophene, which may be further substituted with a (C1-C10)alkyl group or a (C6-C15)aryl group: and
- [19] the heteroaryl group contains at least one hetero atom selected from B, N, O, S, P(=O), Si and P.



Advantageous Effects of Invention

- [20] According to the present invention, the organic EL device having high efficiency and long lifespan is provided and the production of a display device or a lighting device is possible by using the organic EL device.



Mode for the Invention

- [21] Hereinafter, the present invention will be described in detail. However, the following description is intended to explain the invention, and is not meant in any way to restrict the scope of the invention.
- [22] The compound of formula 1 is represented by the following formula 3, 4, 5, or 6:

[23]

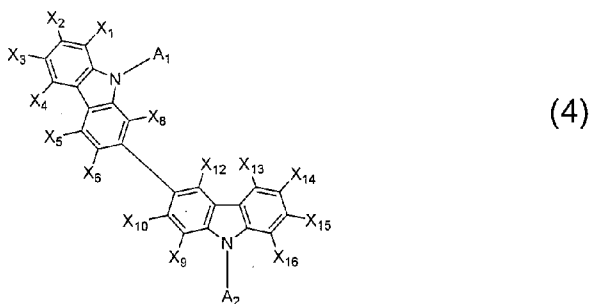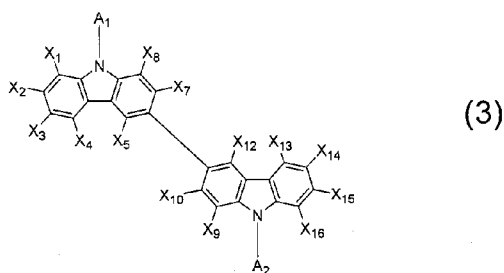

[24]

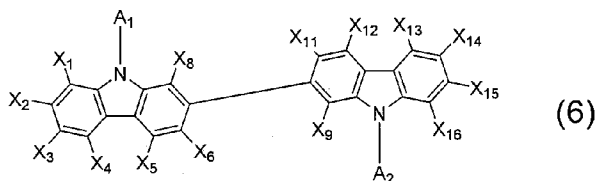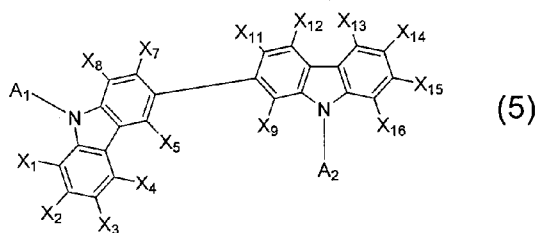

[25] wherein


[26] A_1 , A_2 and X_1 to X_{16} are as defined in formula 1.

[27] In formula 1, A_1 and A_2 each independently represent a substituted or unsubstituted (C6-C30)aryl group: preferably, a substituted or unsubstituted (C6-C18)aryl group: more preferably, a (C6-C18)aryl group which is unsubstituted or substituted with a (C1-C6)alkyl group, a (C6-C12)aryl group, or a tri(C6-C12)arylsilyl group: and even more preferably, phenyl, biphenyl, terphenyl, naphthyl, fluorenyl, phenanthrenyl, anthracenyl, indenyl, triphenylenyl, pyrenyl, tetraceny, perylenyl, chrysenyl, naphthacenyl, or fluoranthenyl.

[28] In formula 1, X_1 to X_{16} each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur: preferably, hydrogen, a substituted or unsubstituted (C6-C20)aryl group, a substituted or unsubstituted tri(C6-C12)arylsilyl group, or a substituted or unsubstituted 3- to 15-membered heteroaryl group: and more preferably, hydrogen, a substituted or unsubstituted (C6-C18)aryl group, an unsubstituted triphenylsilyl group, a substituted or unsubstituted dibenzothiophene group, or a substituted or unsubstituted dibenzofuran group.


[29] The compound of formula 2 is represented by the following formula 7, 8, or 9:

[30]

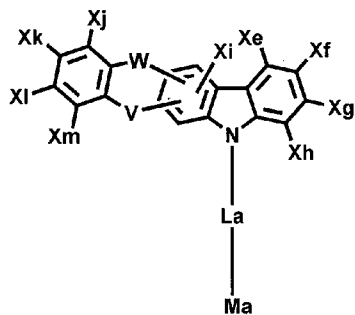


(7)

[31]



(8)

[32]

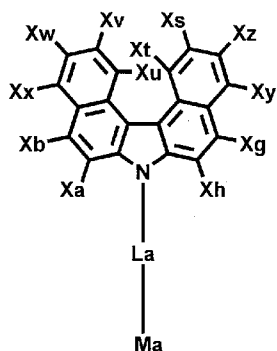

(9)

[33] wherein

[34] V and W each independently represent a single bond, NR_{15} , $\text{CR}_{16}\text{R}_{17}$, S, or O, provided that both V and W neither represent a single bond nor represent NR_{15} ;

[35] A_2 represents a substituted or unsubstituted (C6-C30)aryl group and may be bonded to Xn or Xo;

[36] L_3 and L_4 each independently represent a single bond, or a substituted or unsubstituted (C6-C60)arylene group;

[37] Xi represents hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a

substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

[38] X_j to X_z each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, -NR₅R₆, or -SiR₇R₈R₉; or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

[39] Ma, La, Xa, Xb, and Xe to Xh are as defined in formula 2:

[40] R₅ to R₉ each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, or a substituted or unsubstituted 3- to 30-membered heteroaryl group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur: preferably, hydrogen, or a substituted or unsubstituted (C6-C25)aryl group: more preferably, hydrogen or an unsubstituted (C6-C18)aryl group: and specifically, hydrogen, an unsubstituted phenyl group, a biphenyl group, or a fluorenyl group:

[41] R₁₆ and R₁₇ each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, or a substituted or unsubstituted 3- to 30-membered heteroaryl group: and

[42] R₁₅ represents hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, or a substituted or


unsubstituted 3- to 30-nienibeied heteroaryl group: preferably, a substituted or unsubstituted (C6-C30)aryl group: and more preferably, a substituted or unsubstituted phenyl group, an unsubstituted biphenyl group, an unsubstituted naphthyl group, or a substituted fluorenyl group.

[43] In formula 2, La represents a single bond, or a substituted or unsubstituted (C6-C30)arylene group: preferably, a single bond, or a substituted or unsubstituted (C6-C12)arylene group: and more preferably, a single bond, a (C6-C12)arylene group which is unsubstituted or substituted with a tri(C6-C10)arylsilyl group or a (C6-C12)aryl group.


[44] Furthermore, La represents a single bond, or is represented by one selected from the following formulas 10 to 19:

[45]

[46]




(10)




(11)

[47]




(12)




(13)

[48]




(14)




(15)

[49]




(16)




(17)

[50]



(18)



(19)

[51] wherein

[52] Xi to Xp each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group.

a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur; preferably, hydrogen, a cyano group, a substituted or unsubstituted (C6-C15)aryl group, a substituted or unsubstituted 10- to 20-membered heteroaryl group, or a substituted or unsubstituted tri(C6-C10)arylsilyl group: more preferably, hydrogen, a cyano group, a (C6-C15)aryl group which is unsubstituted or substituted with a tri(C6-C10)arylsilyl group, or a 10- to 20-membered heteroaryl group which is unsubstituted or substituted with a (C6-C15)aryl group.

[53] In formula 2, Ma represents a substituted or unsubstituted nitrogen-containing 5- to 11-membered heteroaryl group: preferably, a substituted or unsubstituted nitrogen-containing 6- to 10-membered heteroaryl group: and more preferably, a nitrogen-containing 6- to 10-membered heteroaryl group which is substituted with a substituents(s) selected from the group consisting of an unsubstituted (C6-C18)aryl group, a (C6-C12)aryl group substituted with a cyano group, a (C6-C12)aryl group substituted with a (C1-C6)alkyl group, a (C6-C12)aryl group substituted with a tri(C6-C12)arylsilyl group, and a 6- to 15-membered heteroaryl group.

[54] Furthermore, Ma represents a monocyclic-based heteroaryl group selected from the group consisting of pyrrolyl, imidazolyl, pyrazolyl, triazinyl, tetrazinyl, triazolyl, tetrazolyl, pyridyl, pyrazinyl, pyrimidinyl, pyridazinyl, etc., or a fused ring-based heteroaryl group selected from the group consisting of benzoimidazolyl, isoindolyl, indolyl, indazolyl, benzothiadiazolyl, quinolyl, isoquinolyl, cinnolinyl, quinazolinyl, naphthyridinyl, quinoxalinyl, carbazolyl, phenanthridinyl, etc.: preferably, triazinyl, pyrimidinyl, pyridyl, quinolyl, isoquinolyl, quinazolinyl, naphthyridinyl, or quinoxalinyl.


[55] Herein, "(C1-C30)alkyl(ene)" is meant to be a linear or branched alkyl(ene) having 1 to 30 carbon atoms, in which the number of carbon atoms is preferably 1 to 20, more preferably 1 to 10, and includes methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, etc. "(C2-C30)alkenyl" is meant to be a linear or branched alkenyl having 2 to 30 carbon atoms, in which the number of carbon atoms is preferably 2 to 20, more preferably 2 to 10, and includes vinyl, 1-propenyl, 2-propenyl, 1-butenyl, 2-butenyl, 3-butenyl, 2-methylbut-2-enyl, etc. "(C2-C30)alkynyl" is a linear or branched alkynyl having 2 to 30 carbon atoms, in which the number of carbon atoms is preferably 2 to

20, more preferably 2 to 10, and includes ethynyl, 1-propynyl, 2-propynyl, 1-butynyl, 2-butynyl, 3-butynyl, 1-methylpent-2-ynyl, etc. "(C3-C30)cycloalkyl" is a mono- or polycyclic hydrocarbon having 3 to 30 carbon atoms, in which the number of carbon atoms is preferably 3 to 20, more preferably 3 to 7, and includes cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, etc. "3- to 7-membered heterocycloalkyl" is a cycloalkyl having at least one heteroatom selected from the group consisting of B, N, O, S, P(=O), Si and P, preferably O, S and N, and 3 to 7, preferably 5 to 7 ring backbone atoms, and includes tetrahydrofuran, pyrrolidine, thiolan, tetrahydropyran, etc. "(C6-C30)aryl(ene)" is a monocyclic or fused ring derived from an aromatic hydrocarbon having 6 to 30 carbon atoms, in which the number of carbon atoms is preferably 6 to 20, more preferably 6 to 15, and includes phenyl, biphenyl, terphenyl, naphthyl, fluorenyl, phenanthrenyl, anthracenyl, indenyl, triphenylenyl, pyrenyl, tetracenyl, perylenyl, chrysenyl, naphthacenyl, fluoranthenyl, etc. "3- to 30-membered heteroaryl(ene)" is an aryl group having at least one, preferably 1 to 4 heteroatom selected from the group consisting of B, N, O, S, P(=O), Si and P, and 3 to 30 ring backbone atoms; is a monocyclic ring, or a fused ring condensed with at least one benzene ring; has preferably 3 to 20, more preferably 3 to 15 ring backbone atoms; may be partially saturated; may be one formed by linking at least one heteroaryl or aryl group to a heteroaryl group via a single bond(s); and includes a monocyclic ring-type heteroaryl including furyl, thiophenyl, pyrrolyl, imidazolyl, pyrazolyl, thiazolyl, thiadiazolyl, isothiazolyl, isoxazolyl, oxazolyl, oxadiazolyl, triazinyl, tetrazinyl, triazolyl, tetrazolyl, furazanyl, pyridyl, pyrazinyl, pyrimidinyl, pyridazinyl, etc., and a fused ring-type heteroaryl including benzofuranyl, benzothiophenyl, isobenzofuranyl, dibenzofuranyl, dibenzothiophenyl, benzoimidazolyl, benzothiazolyl, benzoisothiazolyl, benzoisoxazolyl, benzoxazolyl, isoindolyl, indolyl, indazolyl, benzothiadiazolyl, quinolyl, isoquinolyl, cinnolinyl, quinazoliny, quinoxaliny, carbazolyl, phenoxazinyl, phenanthridinyl, benzodioxolyl, etc. "Nitrogen-containing 5- to 30-membered heteroaryl(ene) group" is an aryl(ene) group having at least one heteroatom N and 5 to 30 ring backbone atoms. 5 to 20 ring backbone atoms and 1 to 4 heteroatom are preferable, and 5 to 15 ring backbone atoms are more preferable. It is a monocyclic ring, or a fused ring condensed with at least one benzene ring; may be partially saturated; may be one formed by linking at least one heteroaryl or aryl group to a heteroaryl group via a single bond(s); and includes a monocyclic ring-type heteroaryl including pyrrolyl, imidazolyl, pyrazolyl, triazinyl, tetrazinyl, triazolyl, tetrazolyl, pyridyl, pyrazinyl, pyrimidinyl, pyridazinyl, etc., and a fused ring-type heteroaryl including benzoimidazolyl, isoindolyl, indolyl, indazolyl, benzothiadiazolyl, quinolyl, isoquinolyl, cinnolinyl, quinazoliny, quinoxaliny, carbazolyl, phenanthridinyl, etc. "Halogen" includes F, Cl, Br and I.


[56] Herein, "substituted" in the expression "substituted or unsubstituted" means that a hydrogen atom in a certain functional group is replaced with another atom or group, i.e., a substituent. Substituents of the substituted alkyl(ene) group, the substituted alkenyl group, the substituted alkynyl group, the substituted cycloalkyl group, the substituted aryl(ene) group, the substituted heteroaryl(ene) group, the substituted trialkylsilyl group, the substituted triarylsilyl group, the substituted dialkylarylsilyl group, the substituted mono- or di-arylamino group, or the substituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring are each independently at least one selected from the group consisting of deuterium; a halogen; a cyano group; a carboxyl group; a nitro group; a hydroxyl group; a (C1-C30)alkyl group; a halo(C1-C30)alkyl group; a (C2-C30)alkenyl group; a (C2-C30)alkynyl group; a (C1-C30)alkoxy group; a (C1-C30)alkylthio group; a (C3-C30)cycloalkyl group; a (C3-C30)cycloalkenyl group; a 3- to 7-membered heterocycloalkyl group; a (C6-C30)aryloxy group; a (C6-C30)arylthio group; a 3- to 30-membered heteroaryl group which is unsubstituted or substituted with a (C6-C30)aryl group; a (C6-C30)aryl group which is unsubstituted or substituted with a cyano group, a 3- to 30-membered heteroaryl group, or a tri(C6-C30)arylsilyl group; a tri(C1-C30)alkylsilyl group; a tri(C6-C30)arylsilyl group; a di(C1-C30)alkyl(C6-C30)arylsilyl group; a (C1-C30)alkyldi(C6-C30)arylsilyl group; an amino group; a mono- or di(C1-C30)alkylamino group; a mono- or di(C6-C30)arylamino group; a (C1-C30)alkyl(C6-C30)arylamino group; a (C1-C30)alkylcarbonyl group; a (C1-C30)alkoxycarbonyl group; a (C6-C30)arylcarbonyl group; a di(C6-C30)arylboronyl group; a di(C1-C30)alkylboronyl group; a (C1-C30)alkyl(C6-C30)arylboronyl group; a (C6-C30)aryl(C1-C30)alkyl group; and a (C1-C30)alkyl(C6-C30)aryl group. Preferably, the substituents are each independently at least one selected from the group consisting of a (C1-C6)alkyl group; a 5- to 15-membered heteroaryl group; a (C6-C18)aryl group which is unsubstituted or substituted with a cyano group or a tri(C6-C12)arylsilyl group; a tri(C6-C12)arylsilyl group; and a (C1-C6)alkyl(C6-C12)aryl group.

[57] The compound of formula 1 as a first host compound may be selected from the group consisting of following compounds, but is not limited thereto:


[58]

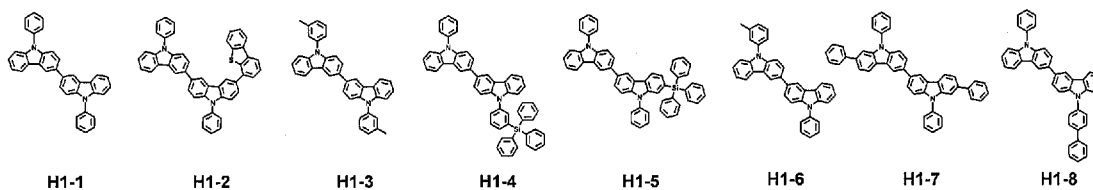


[59]

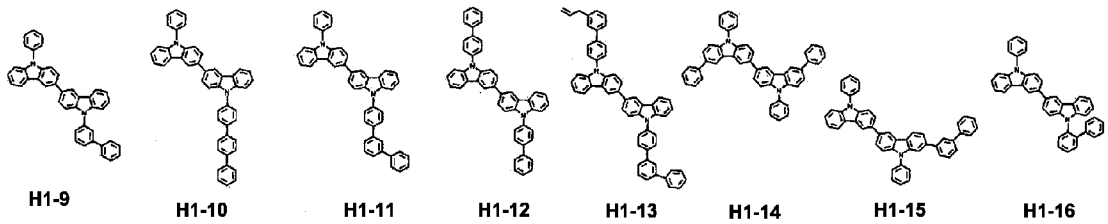


[60]

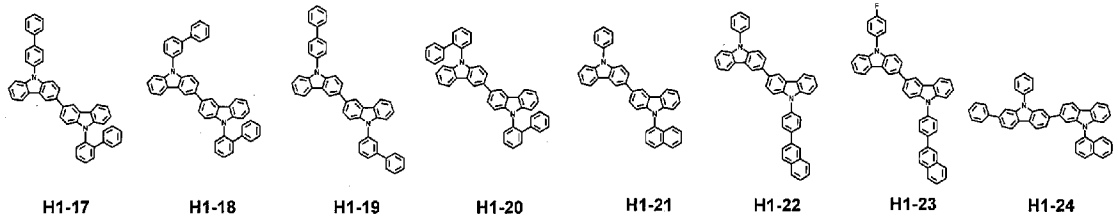


[61]

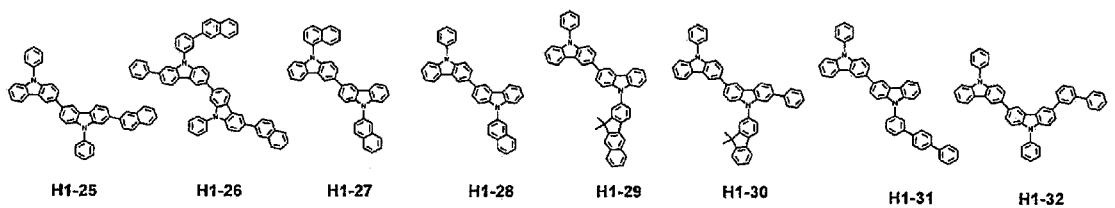


[62]

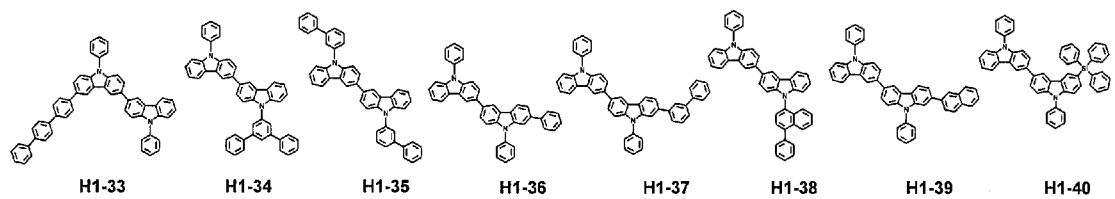


[63]

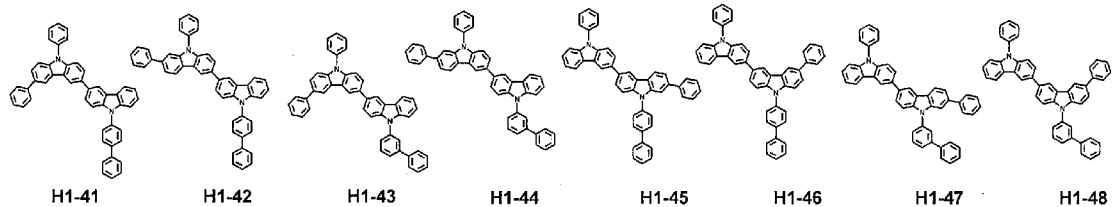


[64]

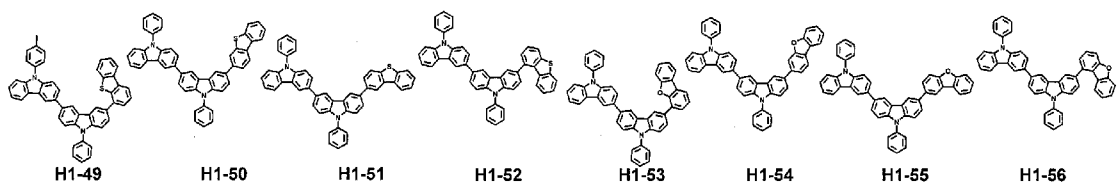


[65]

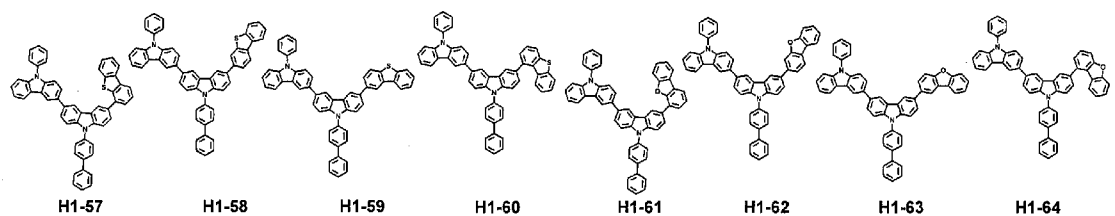


[66]

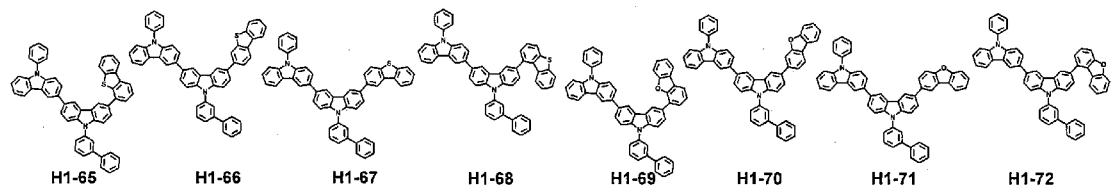


[67]

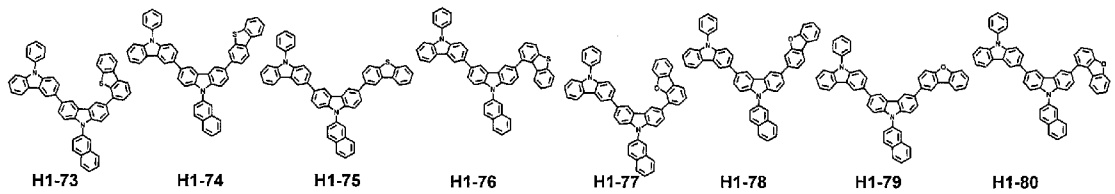


[68]

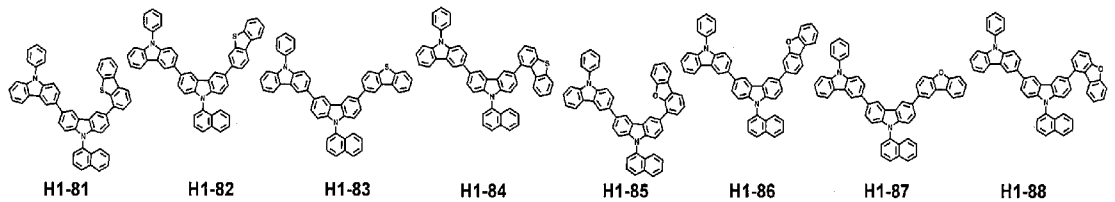


[69]

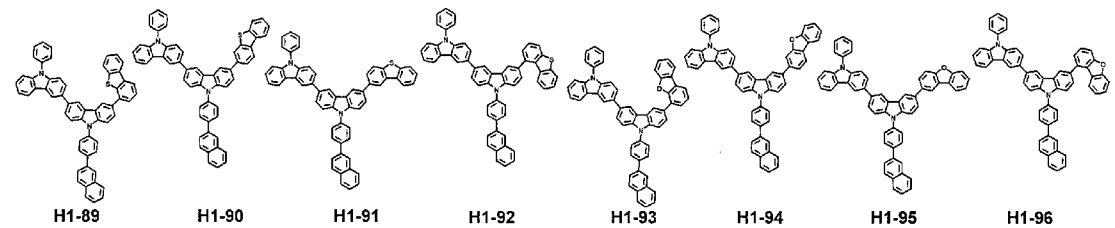


[70]

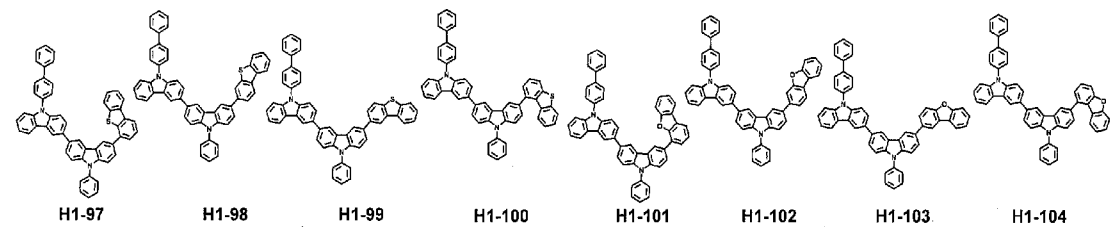


[71]

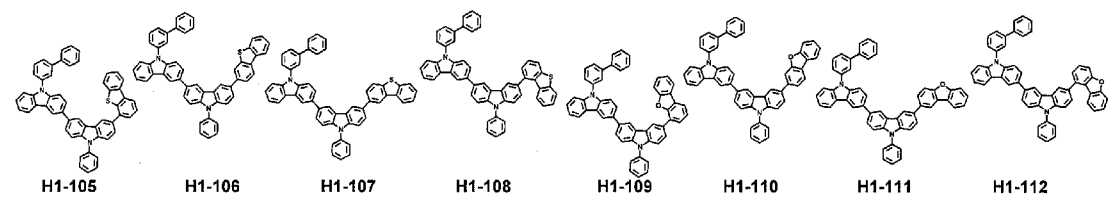


[72]

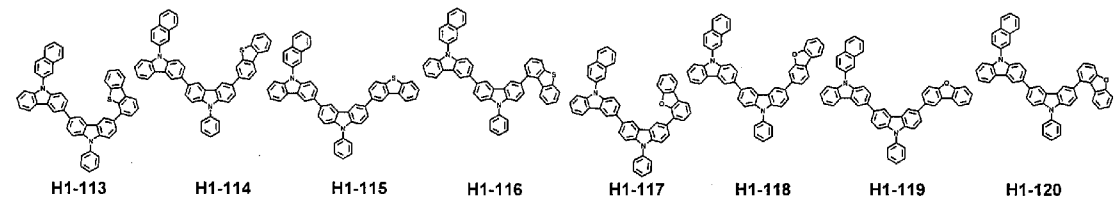


[73]

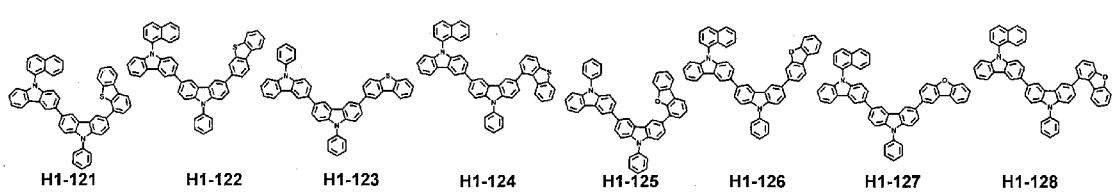


[74]

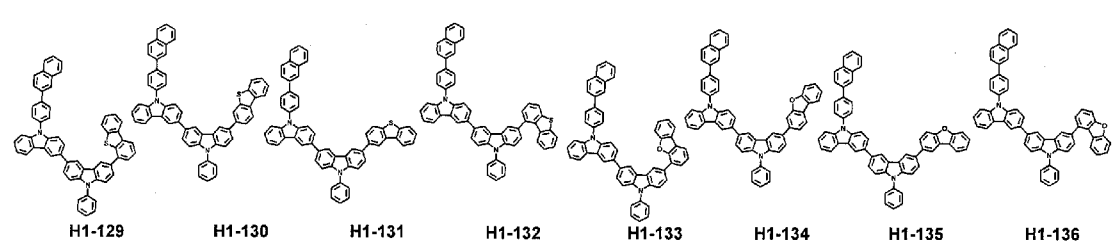


[75]

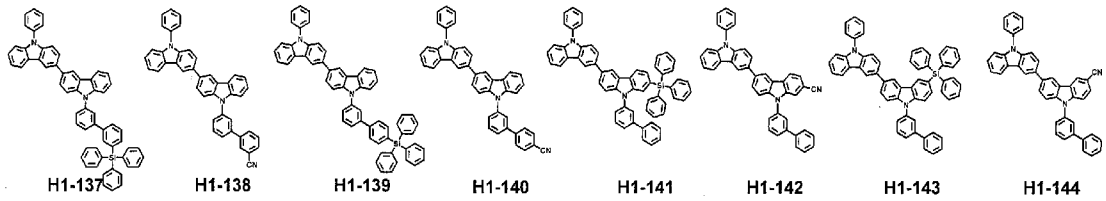


[76]

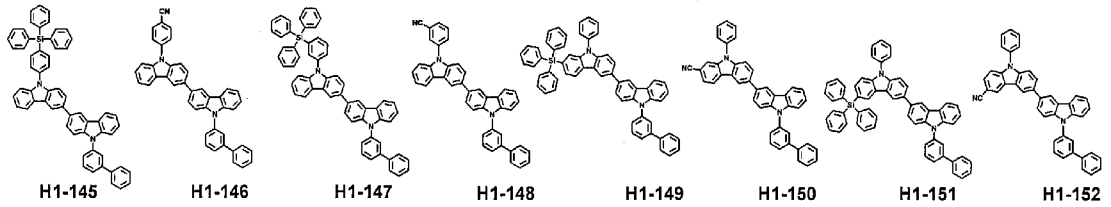


[77]

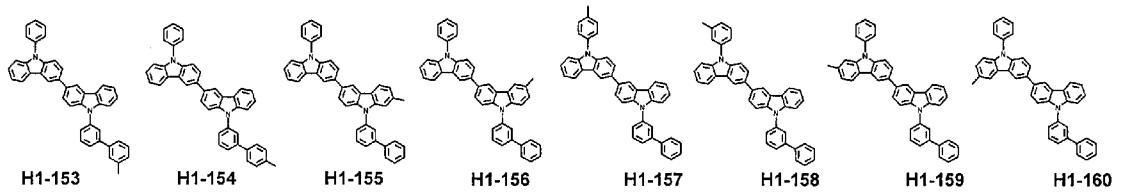


[78]

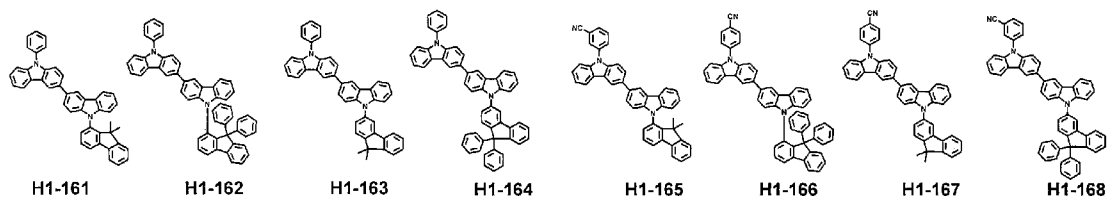


[79]

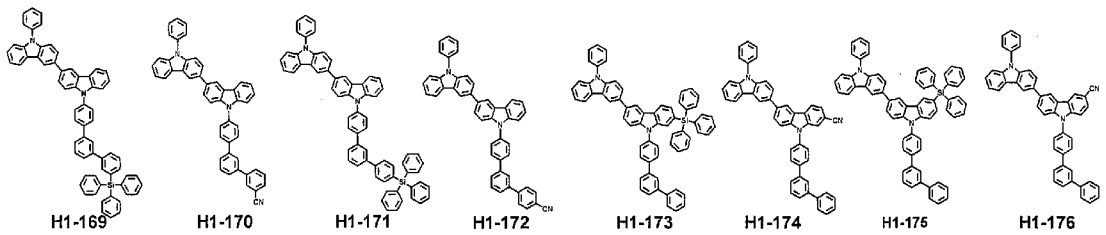


[80]

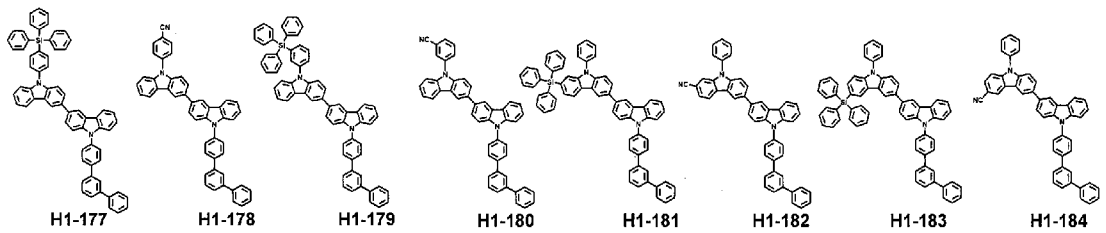


[81]

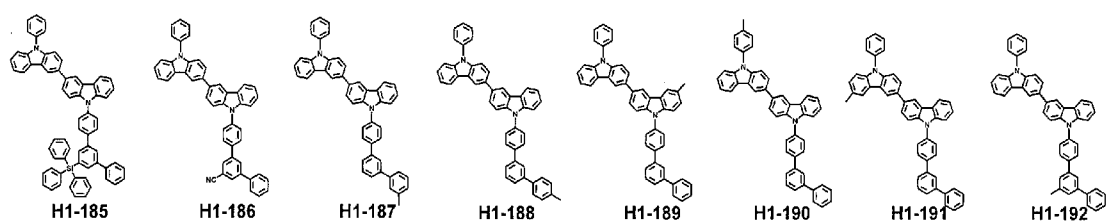


[82]

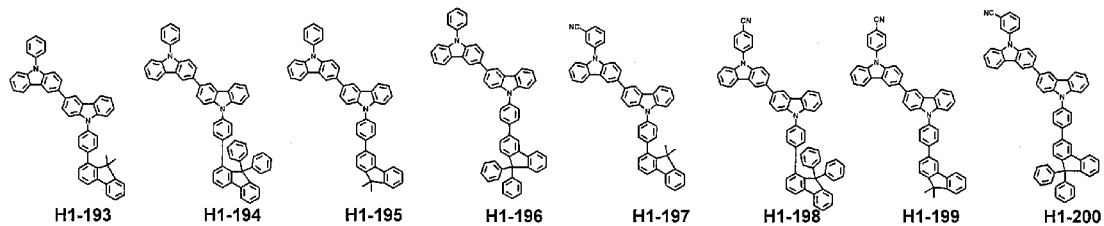


[83]

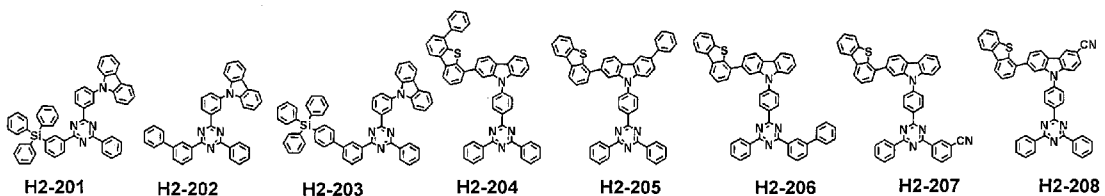


[84]

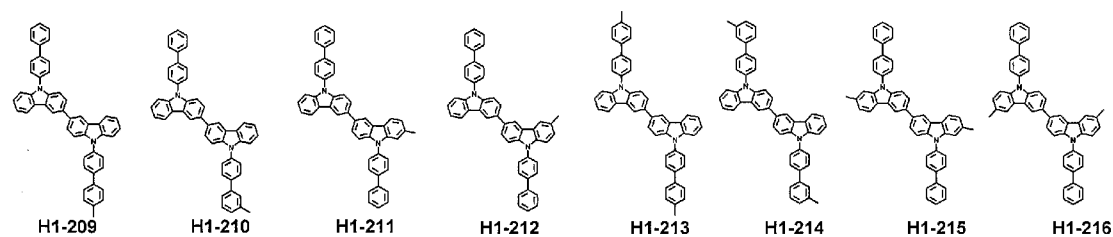


[85]

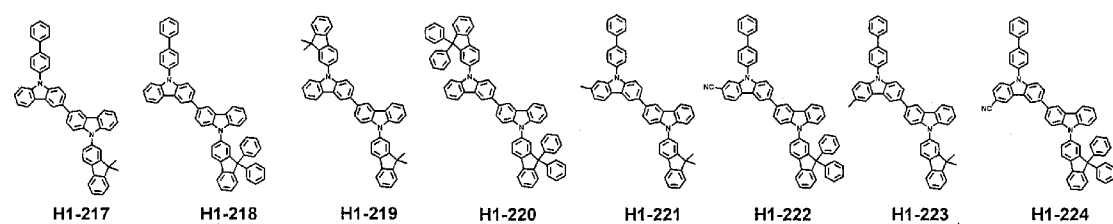


[86]

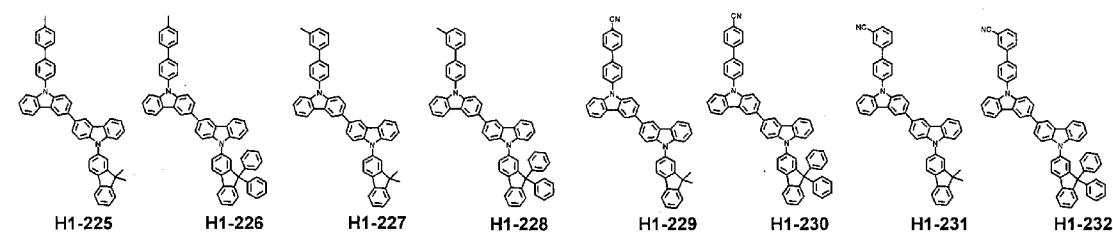


[87]

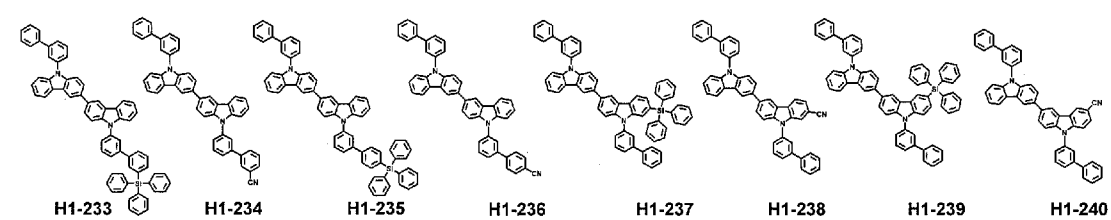


[88]

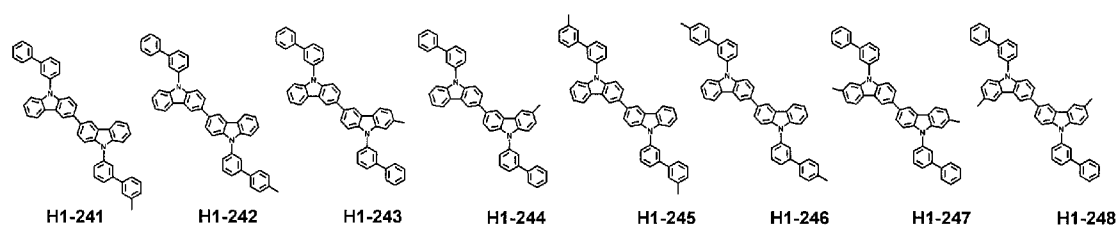


[89]

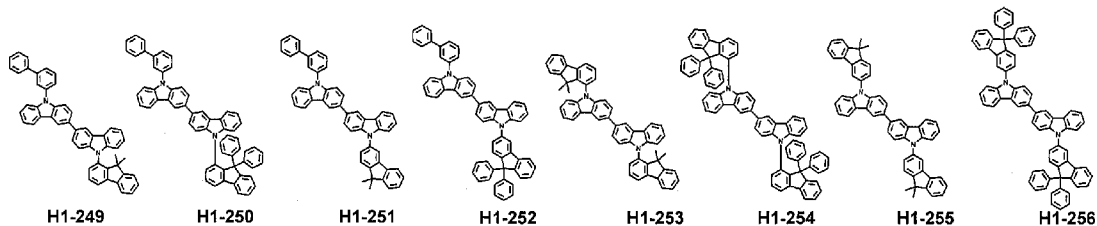


[90]

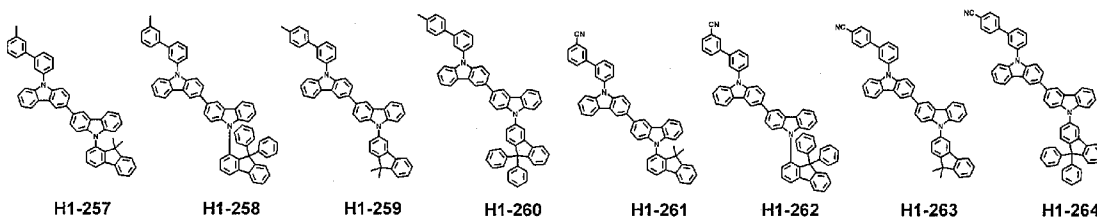


[91]

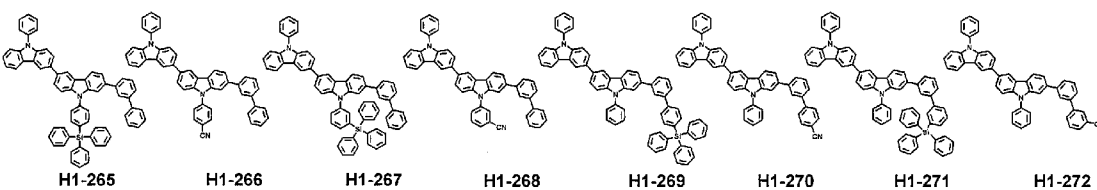


[92]

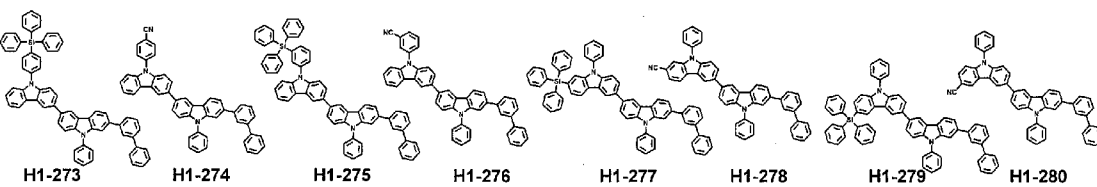

[93]

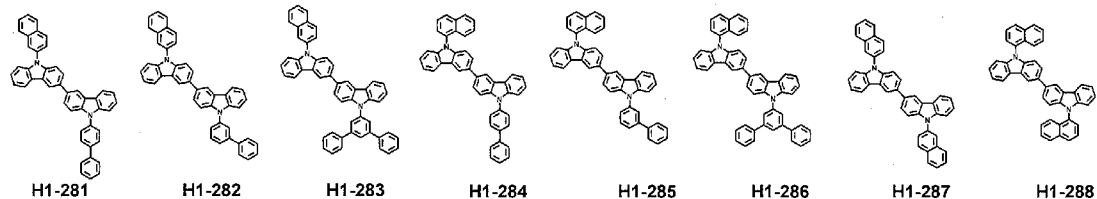


[94]

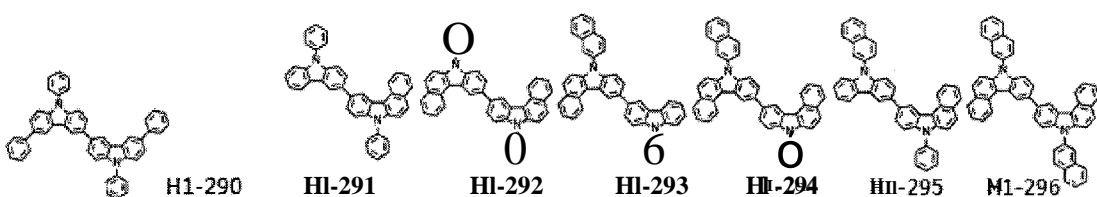


[95] The compound of formula 2 as a second host compound may be selected from the group consisting of following compounds, but is not limited thereto:


[96]

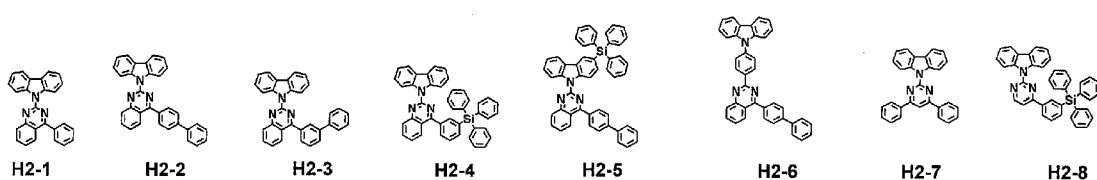


[97]

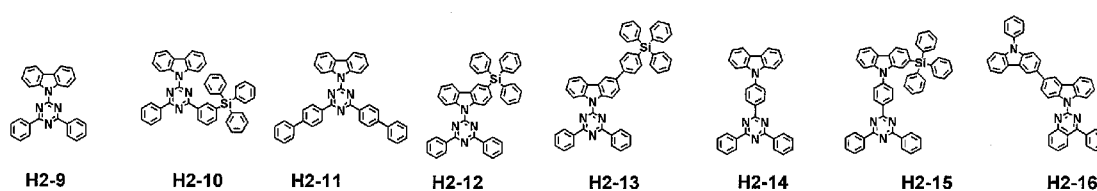


[98]

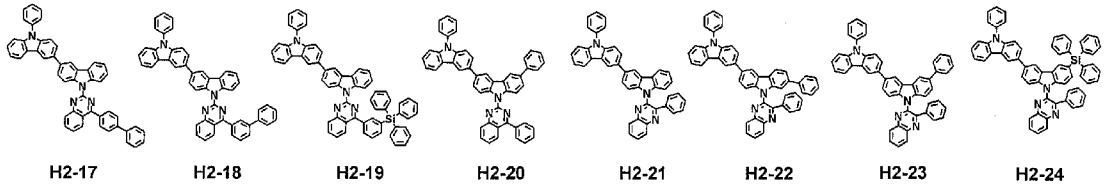


[99]

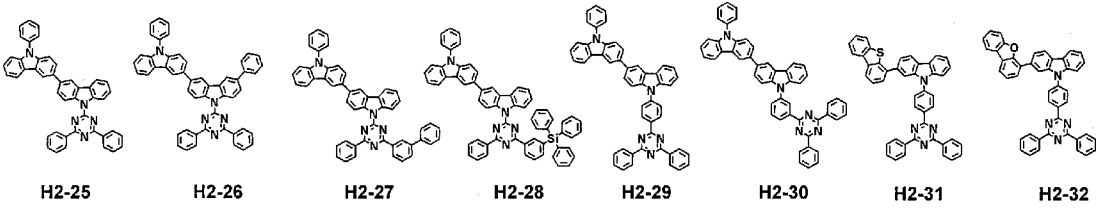


[100]

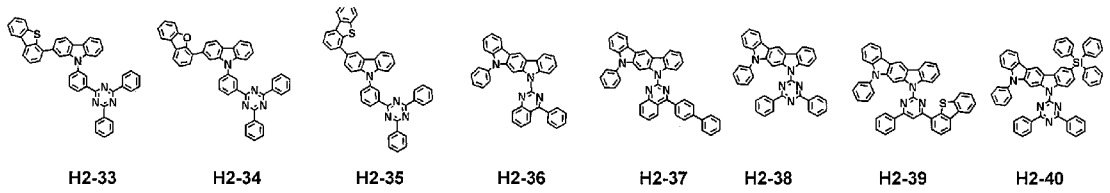


[101]

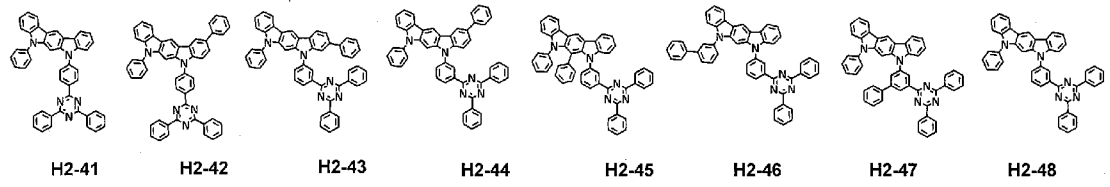


[102]

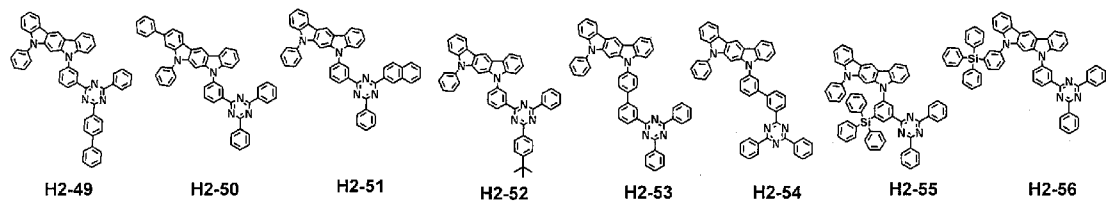


[103]

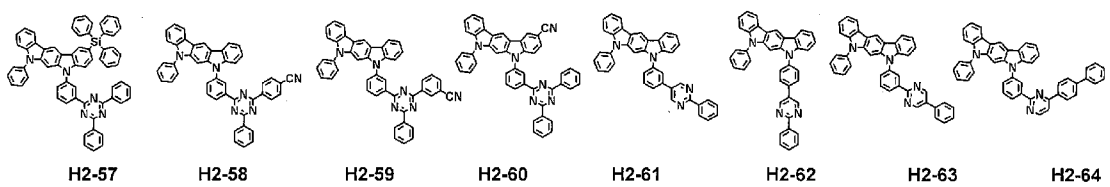


[104]

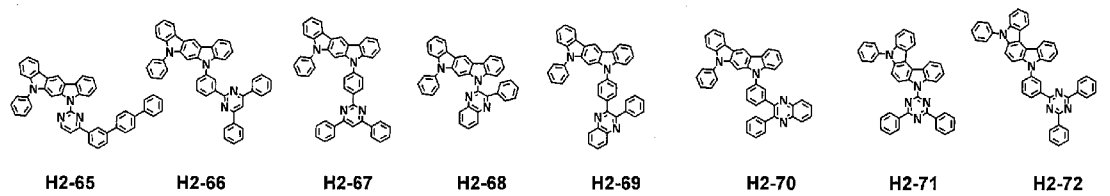


[105]

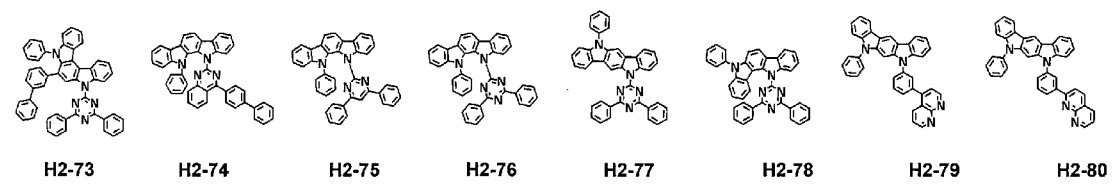


[106]

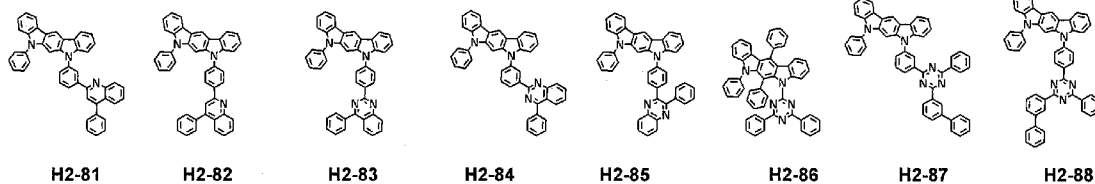


[107]

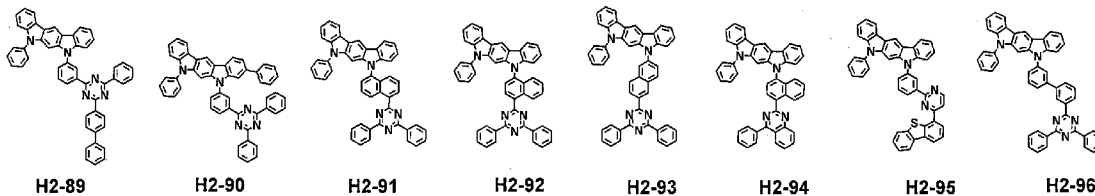


[108]

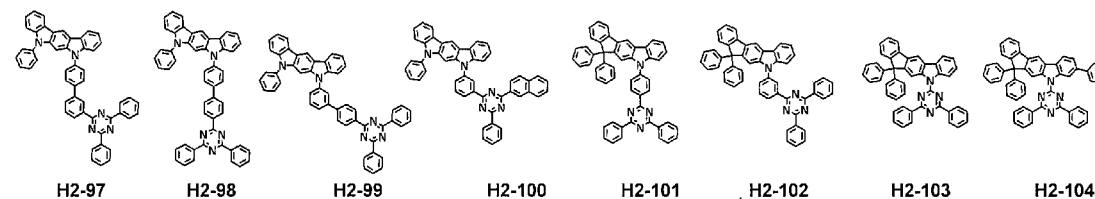


[109]

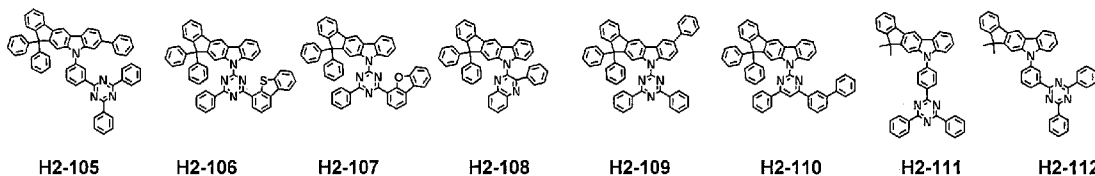


[110]

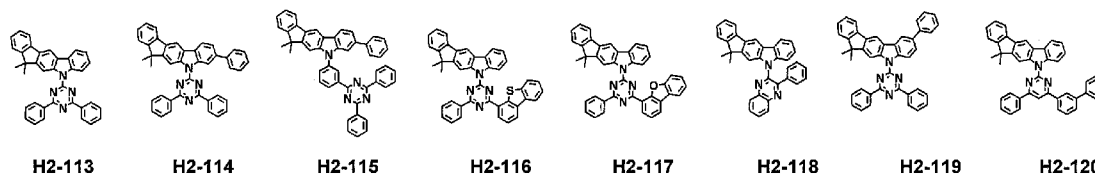


[111]

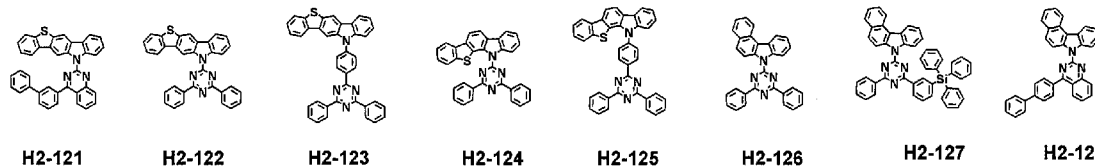


[112]

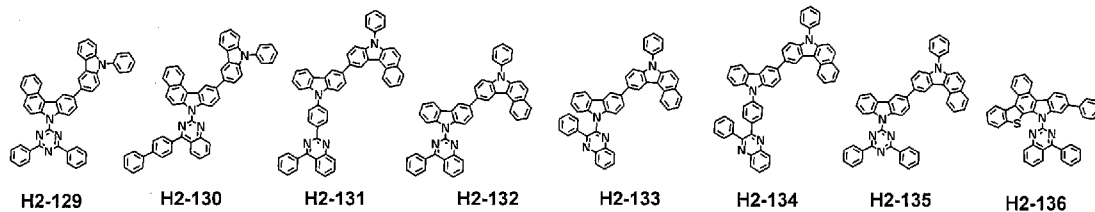


[113]

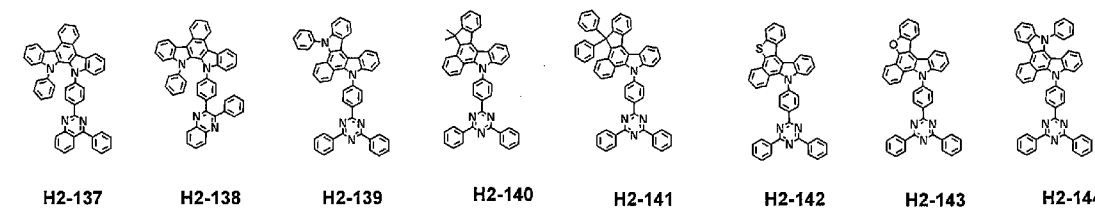


[114]

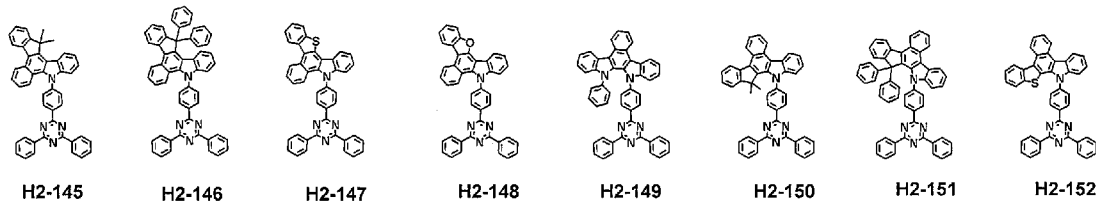


[115]

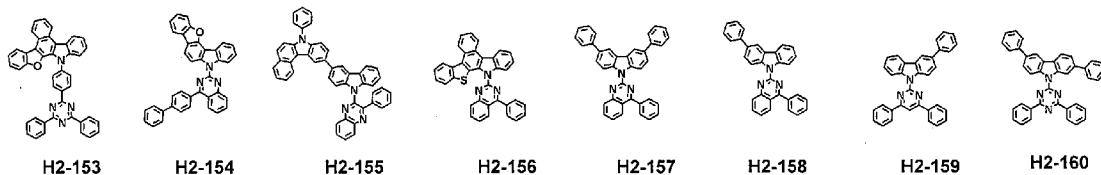


[116]

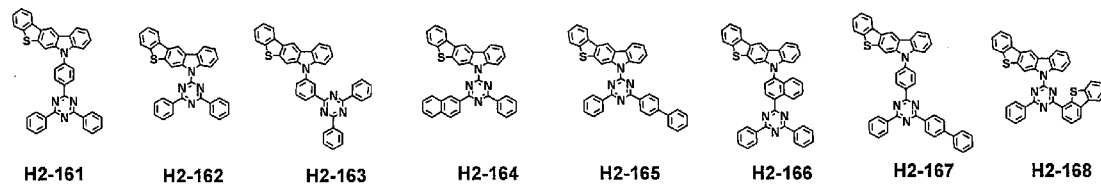


[117]

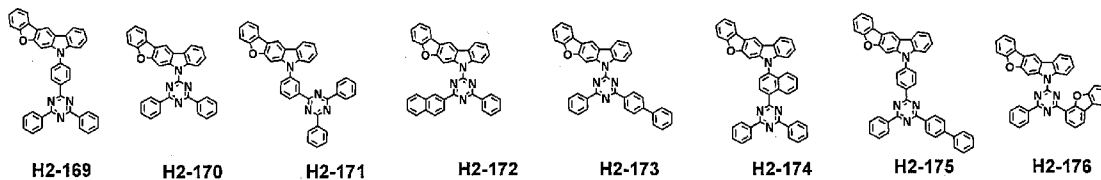


[118]

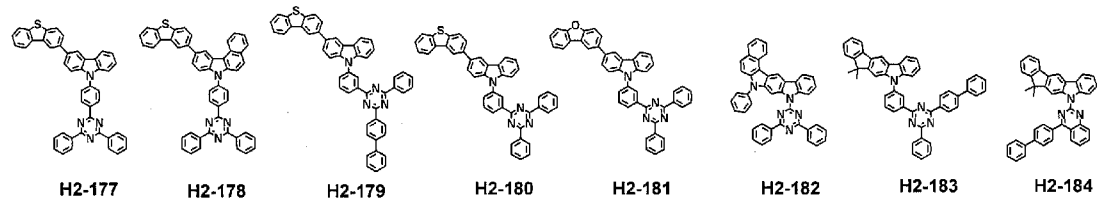


[119]

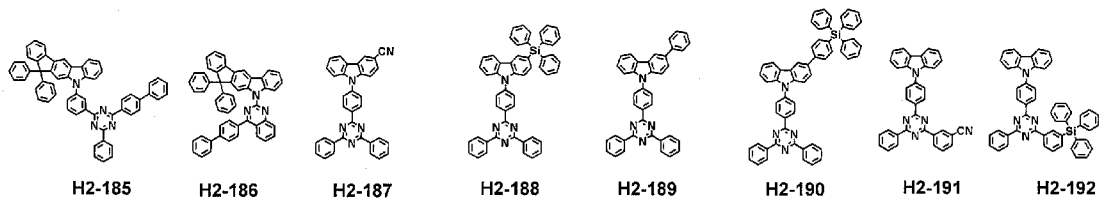


[120]

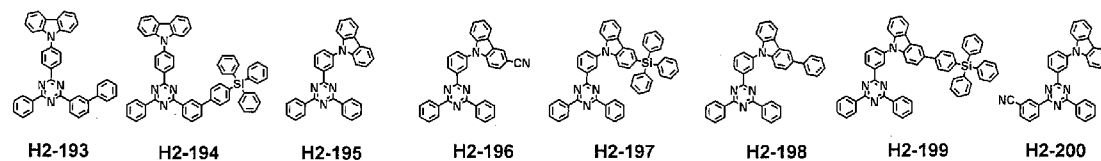


[121]

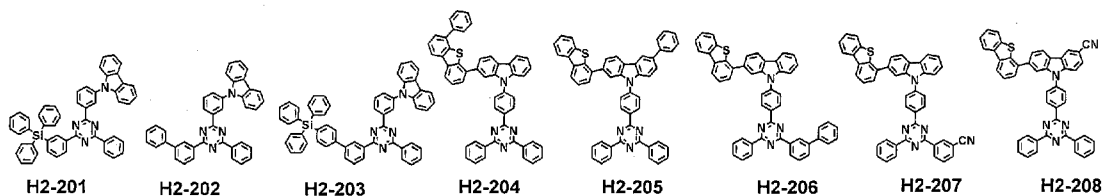


[122]

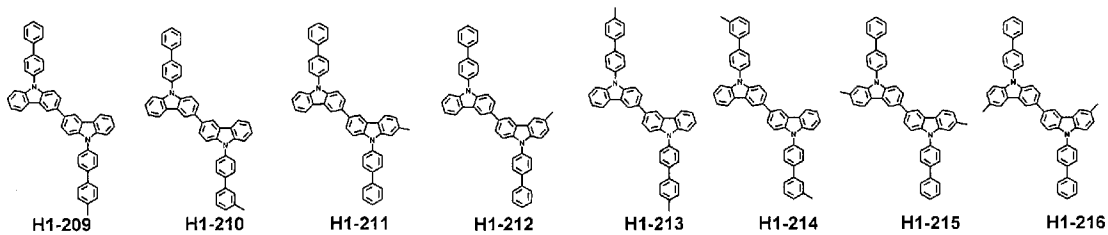


[123]

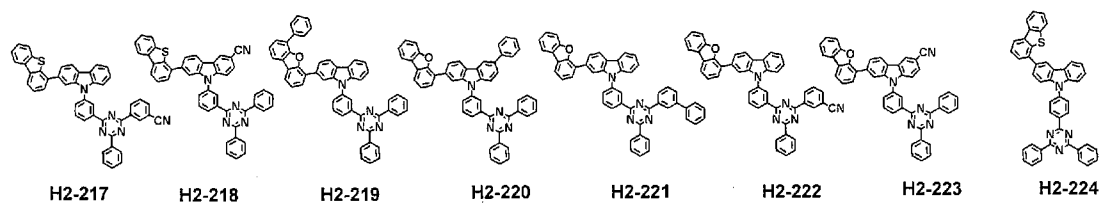


[124]

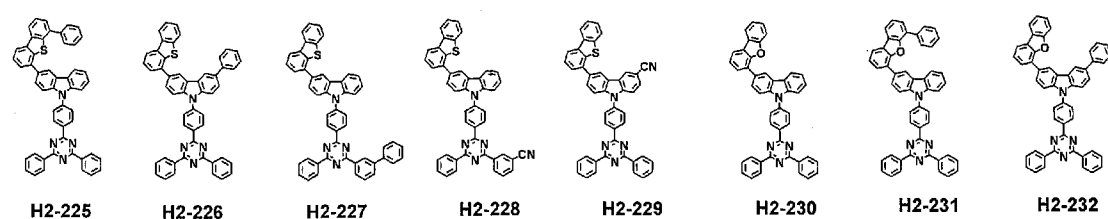


[125]

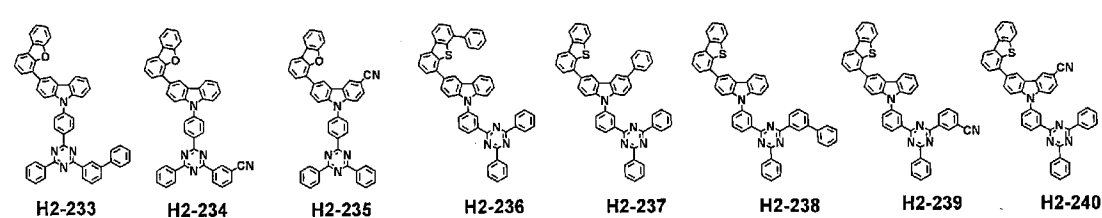


[126]

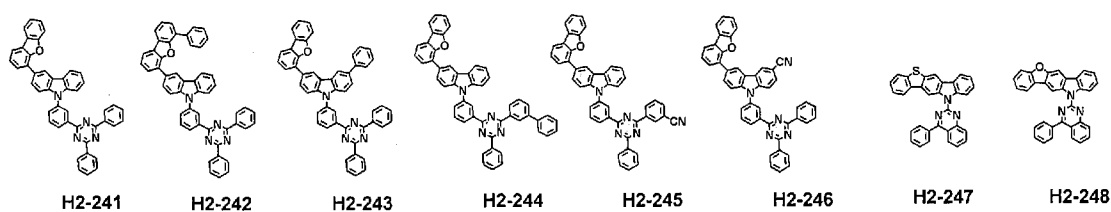


[127]

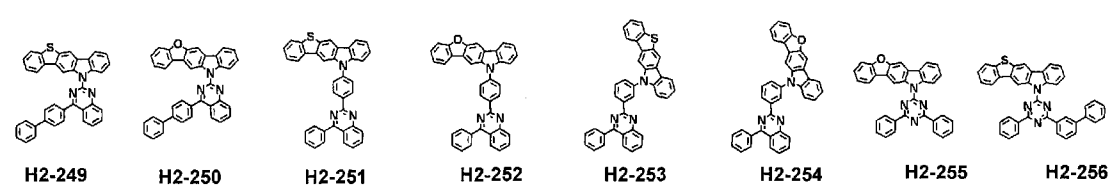


[128]

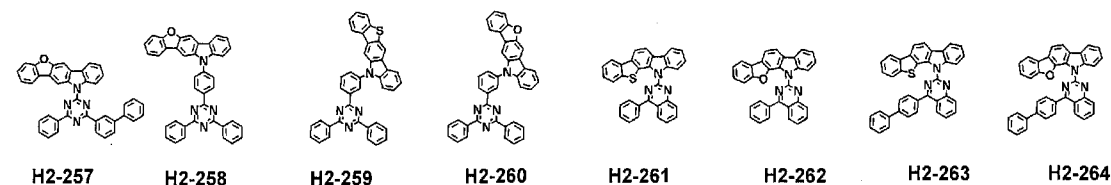


[129]

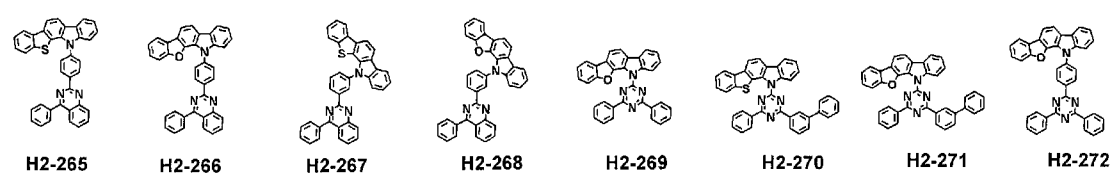


[130]

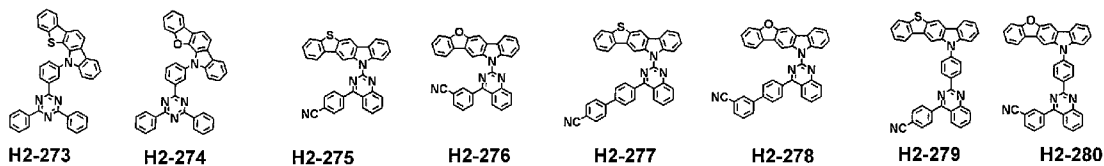


[131]

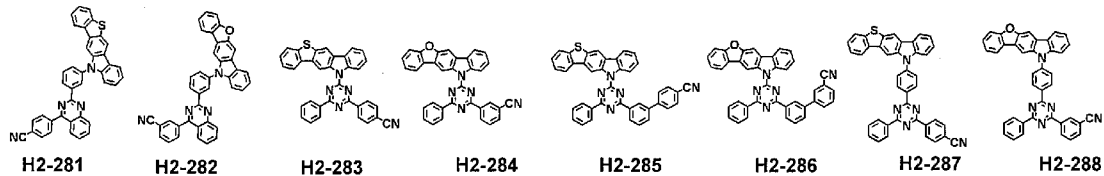


[132]

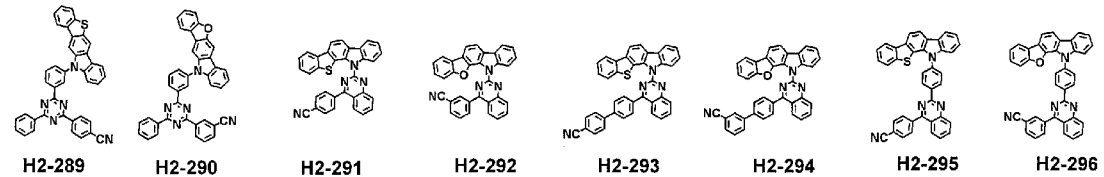


[133]

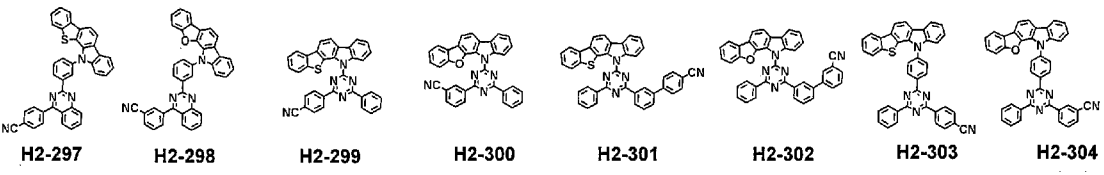


[134]

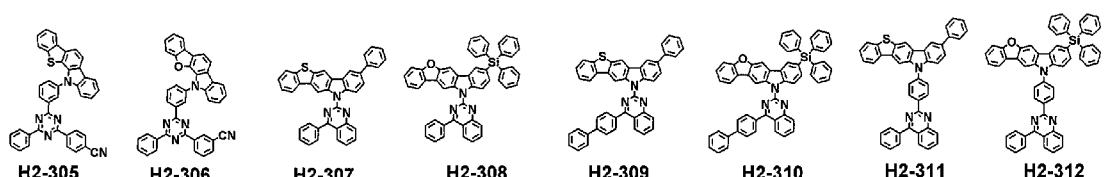


[135]

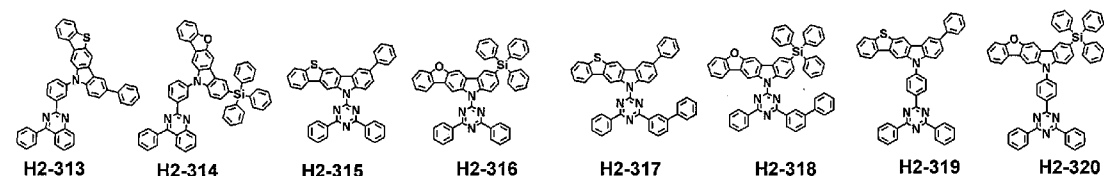


[136]

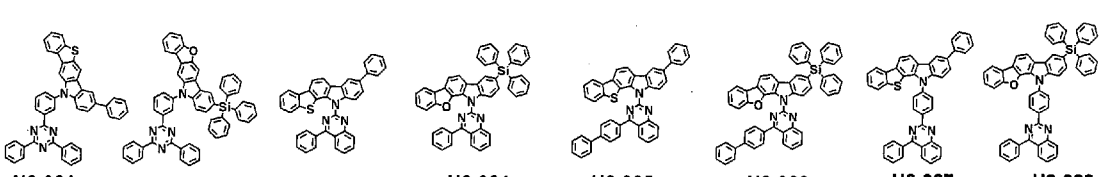


[137]

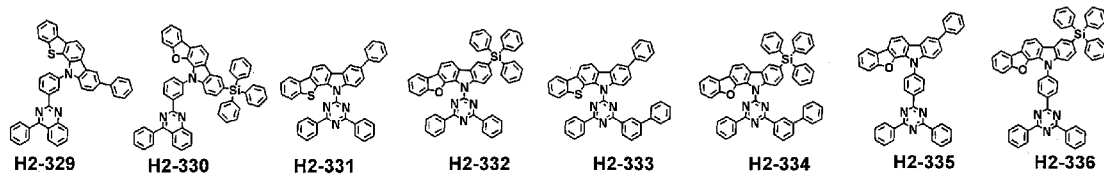


[138]

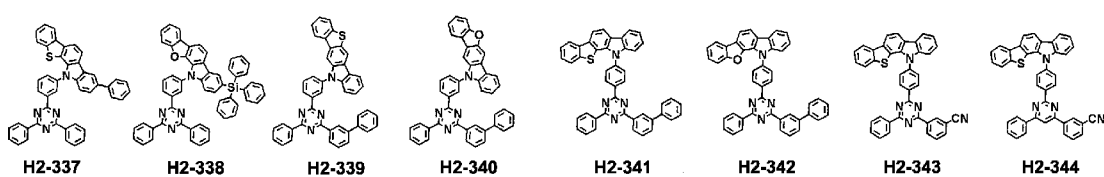


[139]

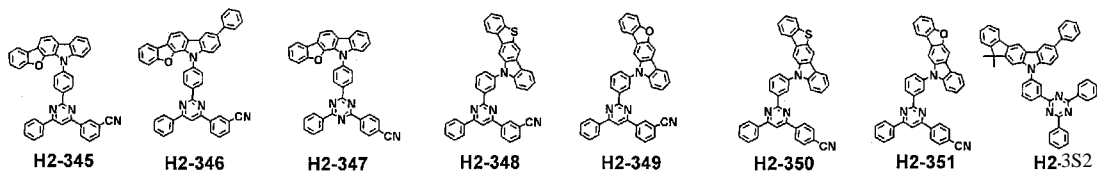


[140]

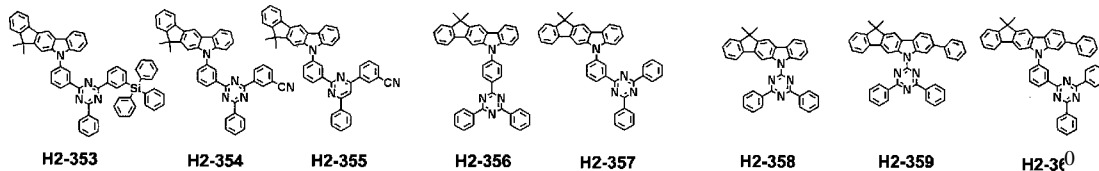


[141]

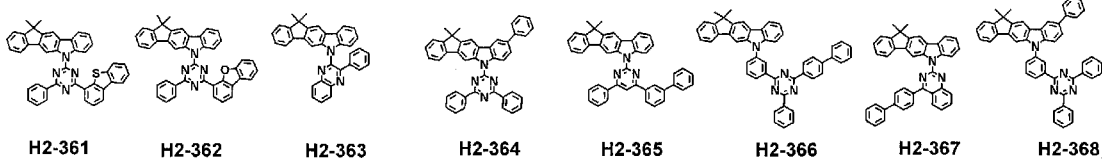


[142]

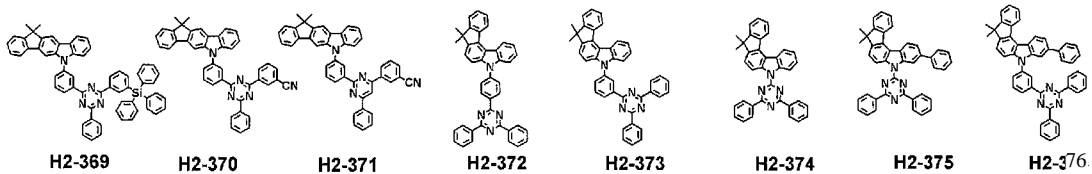


[143]

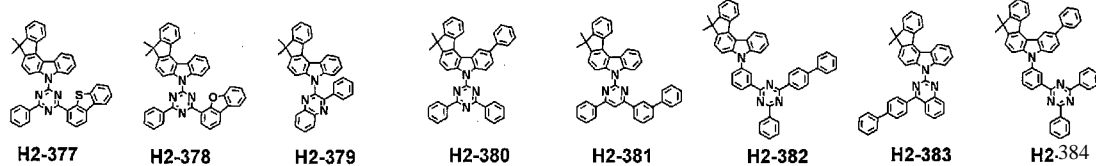


[144]

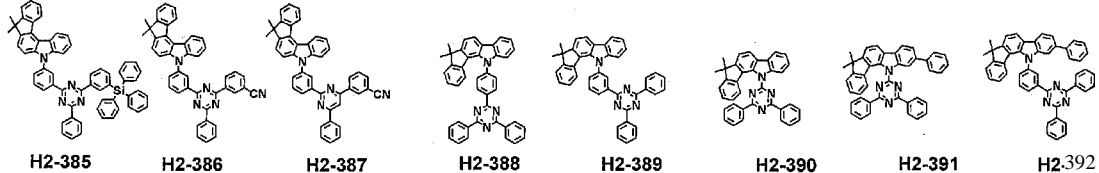


[145]

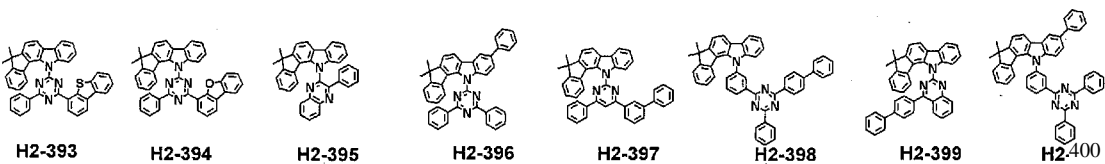


[146]

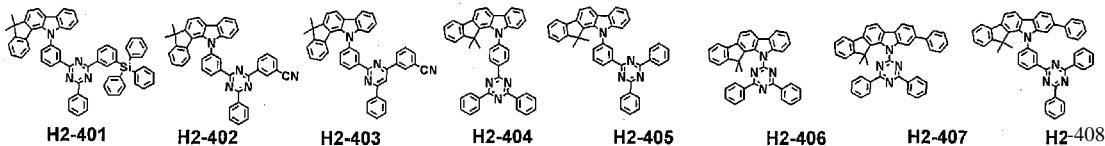


[147]

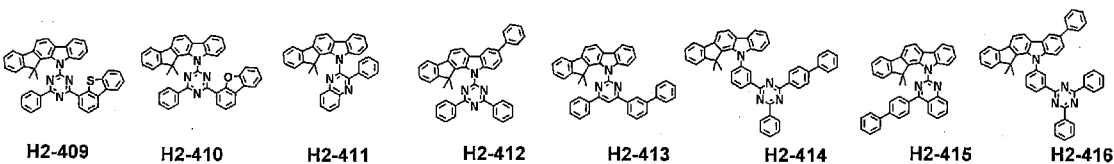


[148]

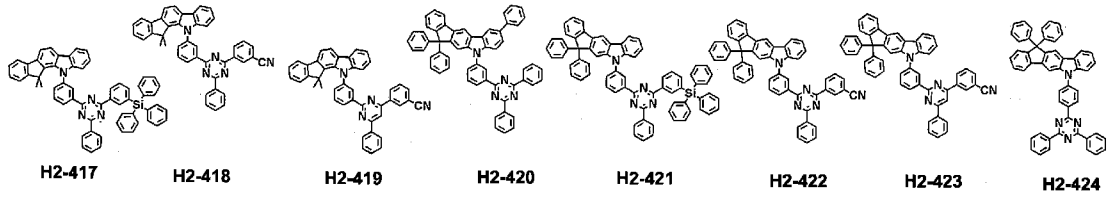


[149]

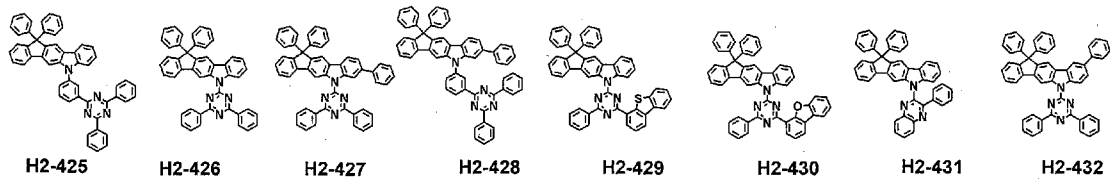


[150]

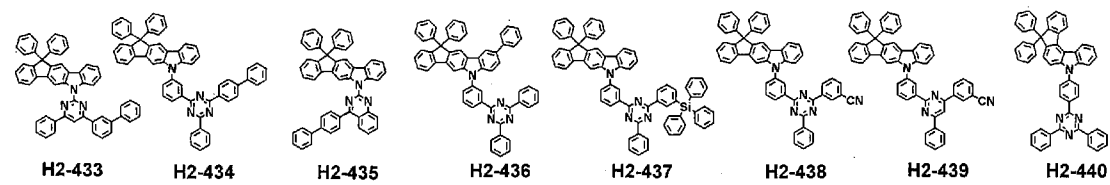


[151]

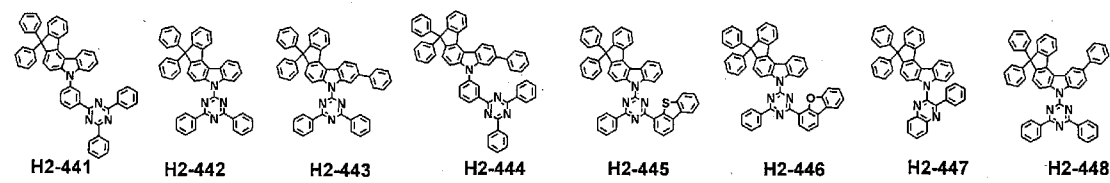


[152]

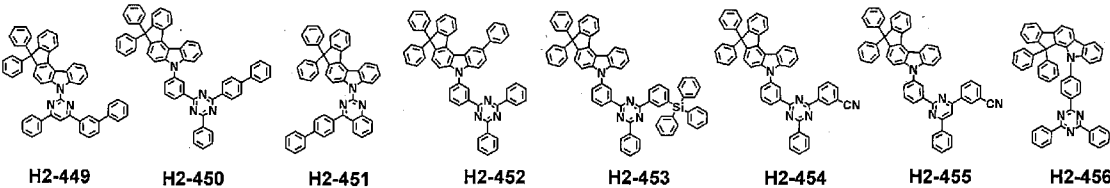


[153]

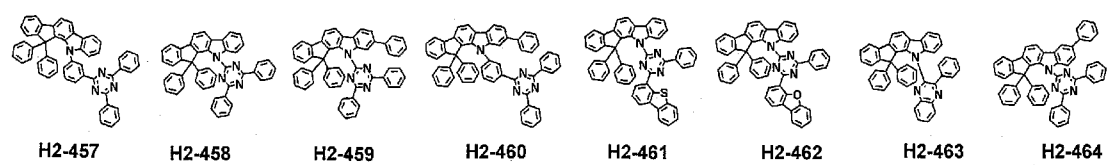


[154]

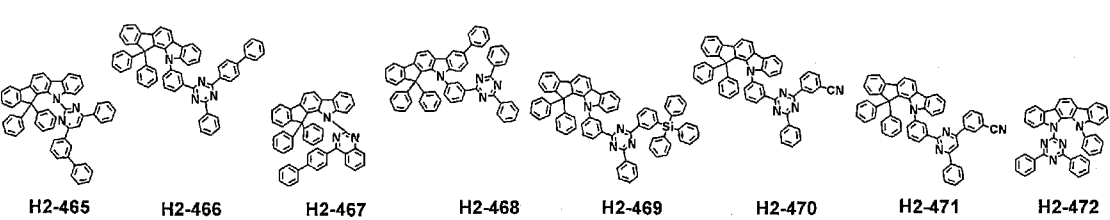


[155]

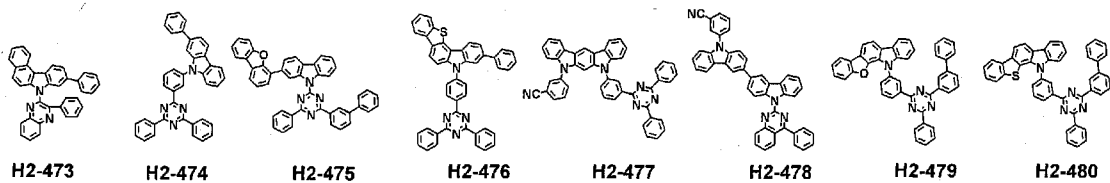


[156]

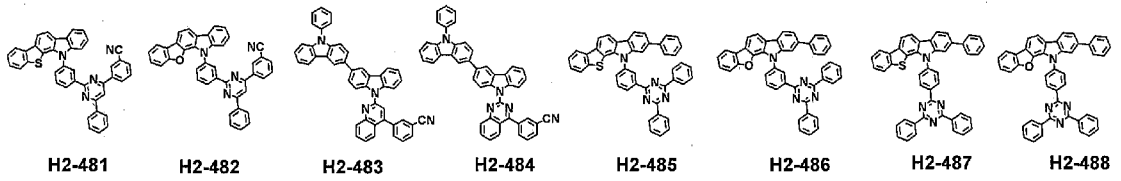


[157]

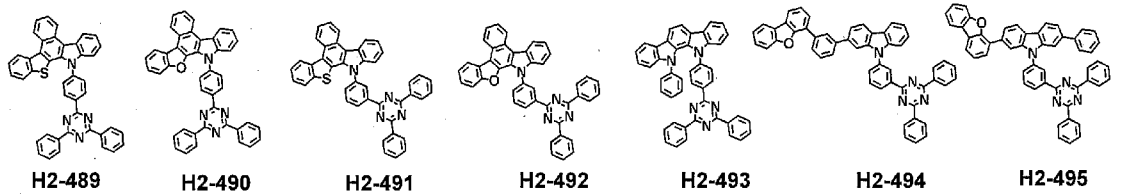


[158]

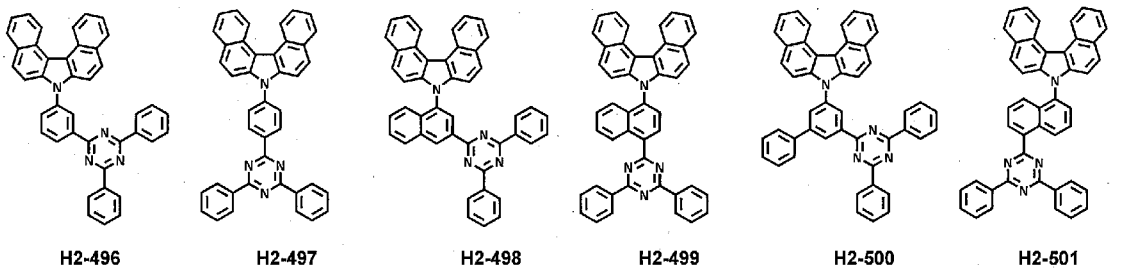


[159]

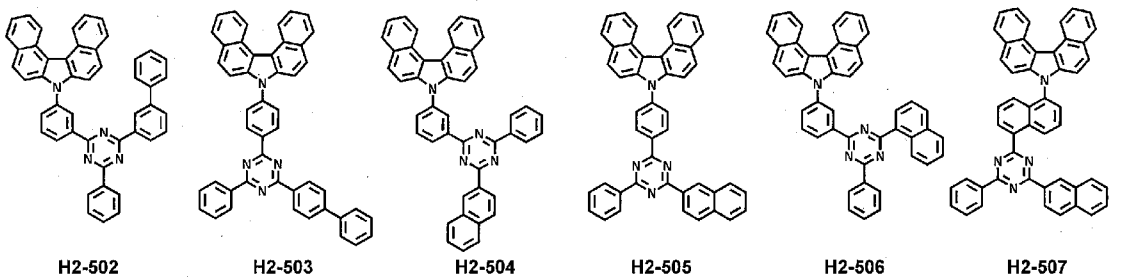


[160]

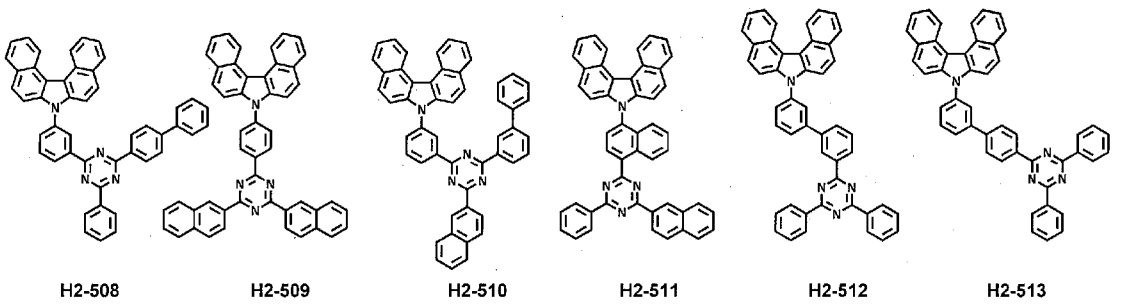


[161]

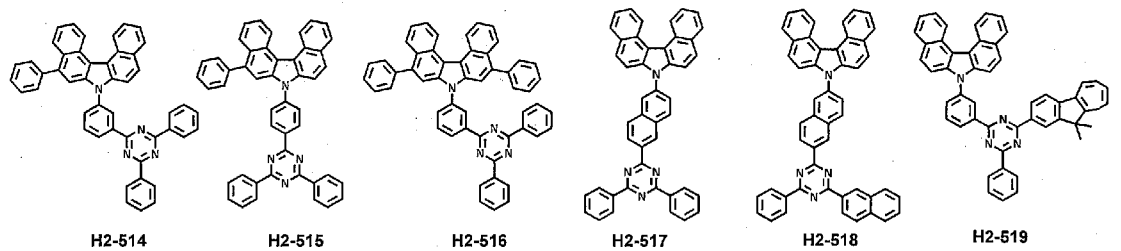


[162]

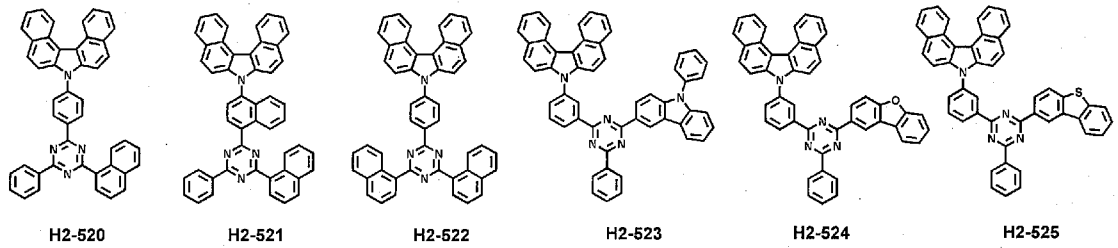


[163]

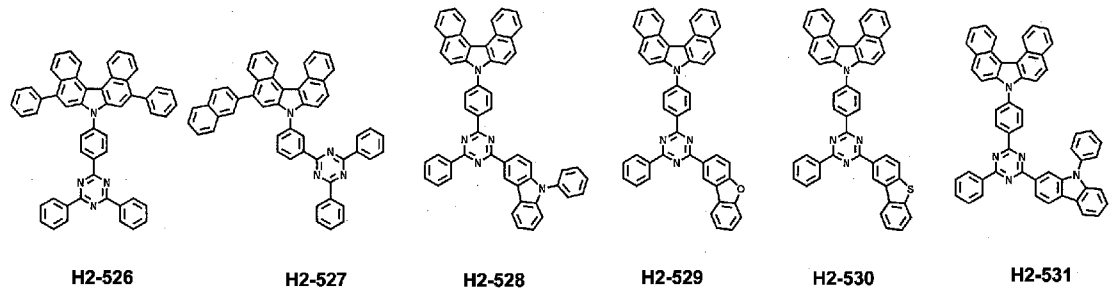


[164]

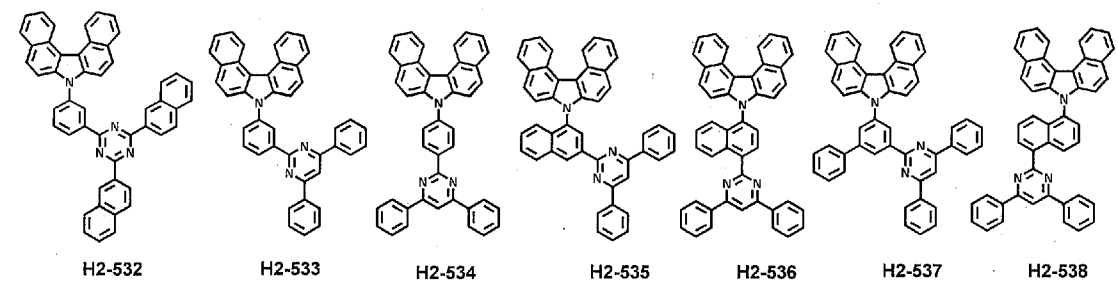


[165]

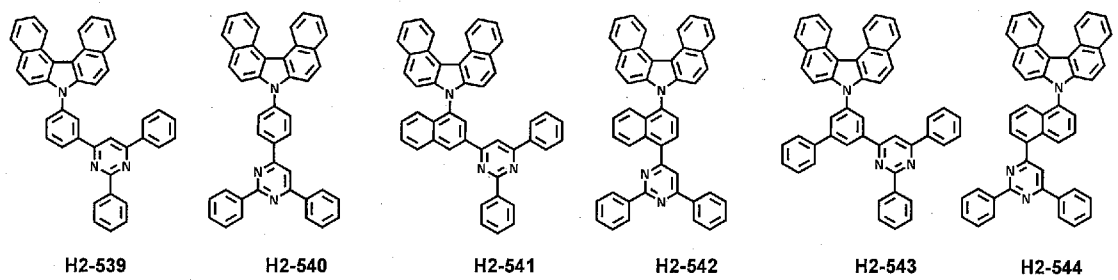


[166]

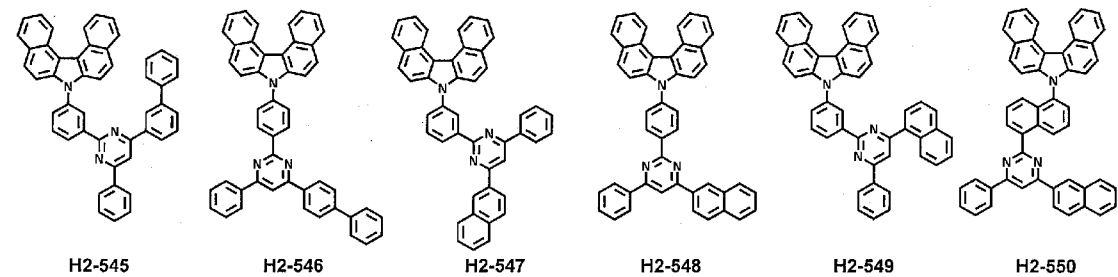


[167]

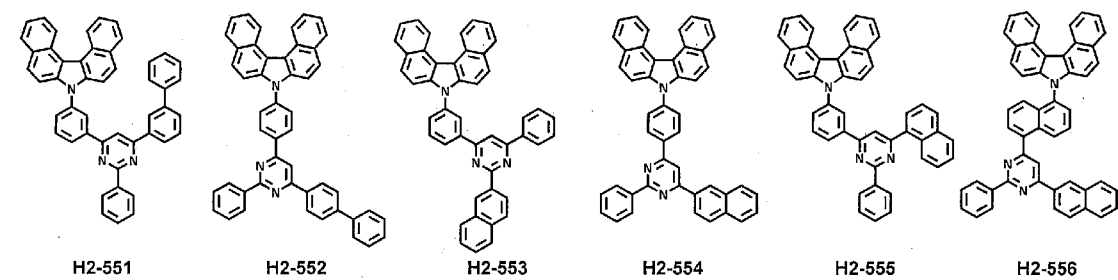


[168]

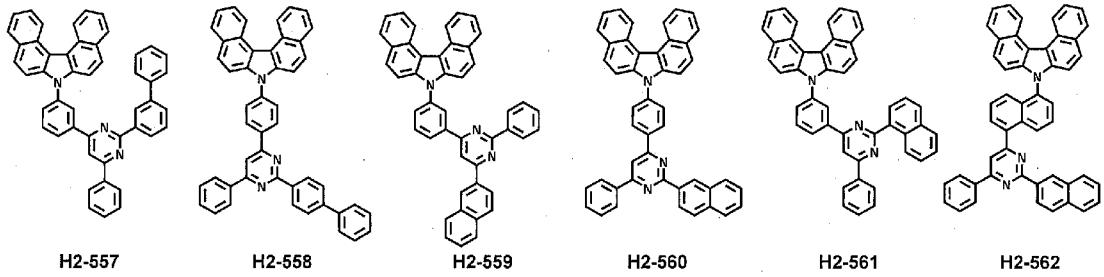


[169]

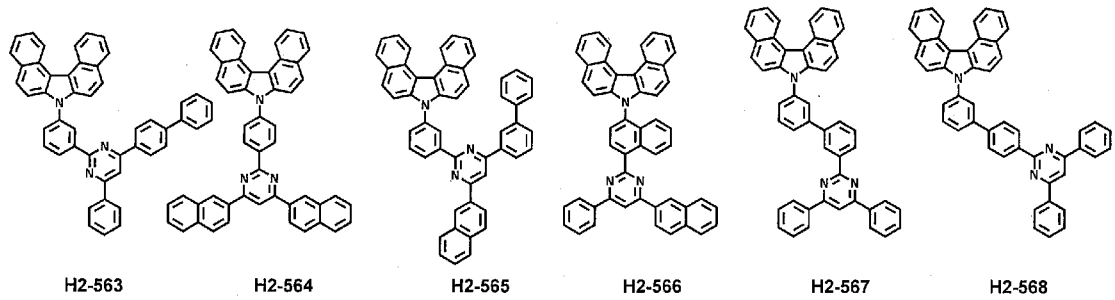


[170]

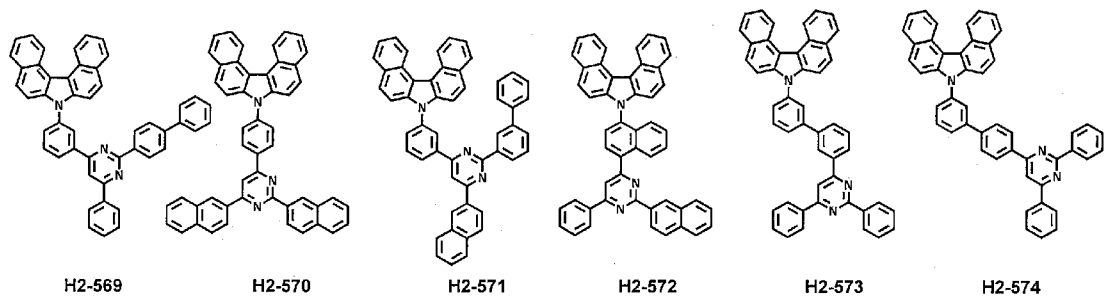


[171]

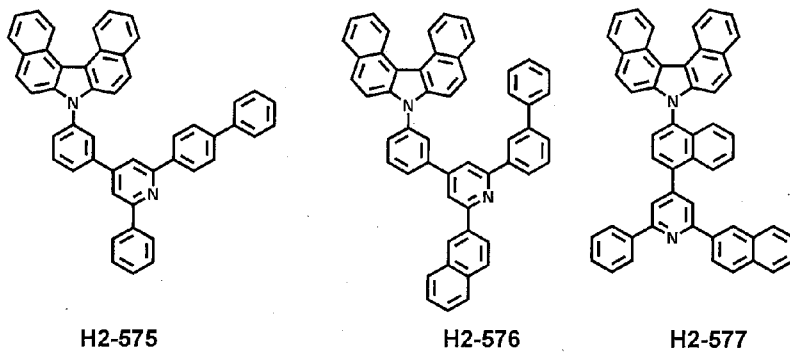


[172]

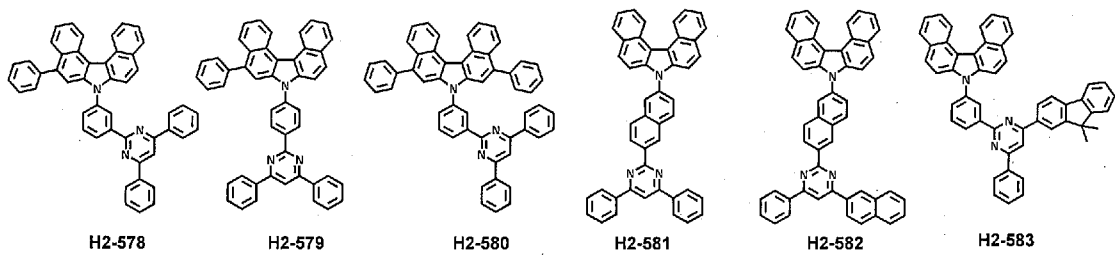


[173]

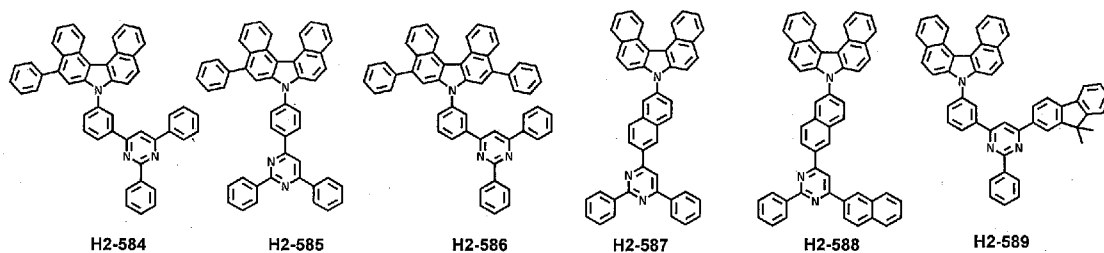


[174]

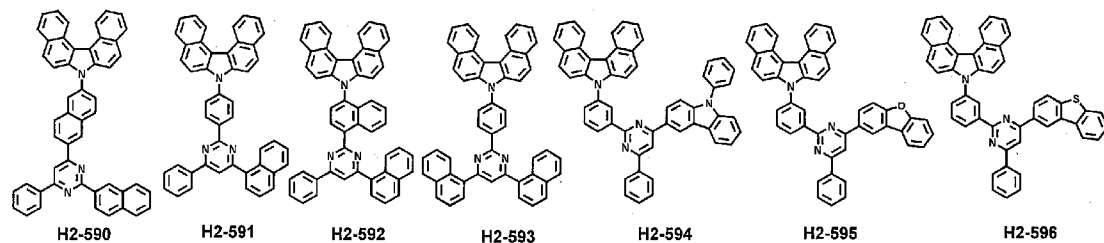


[175]

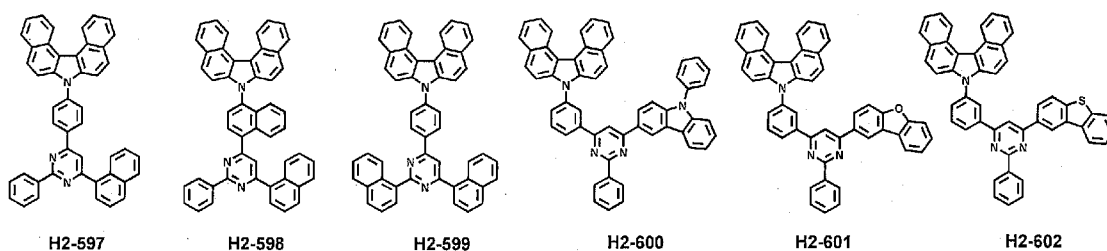


[176]

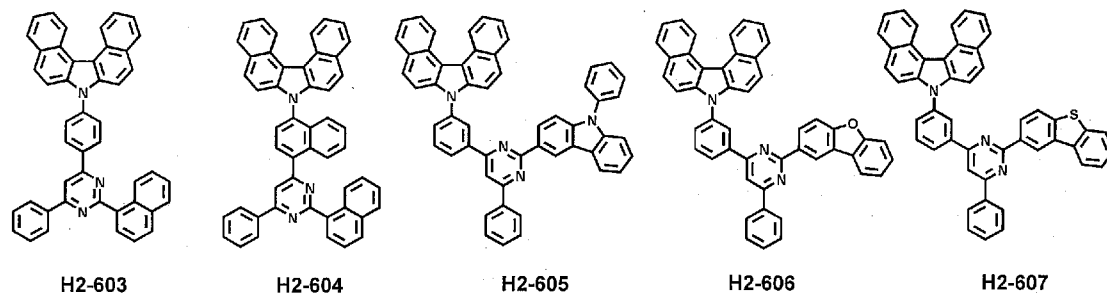


[177]

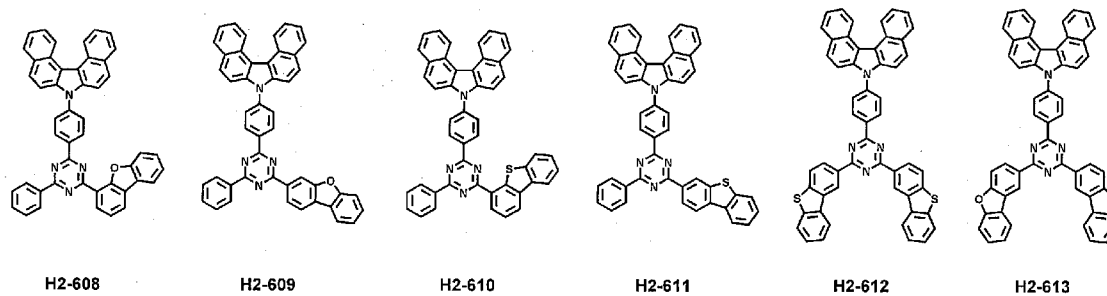


[178]

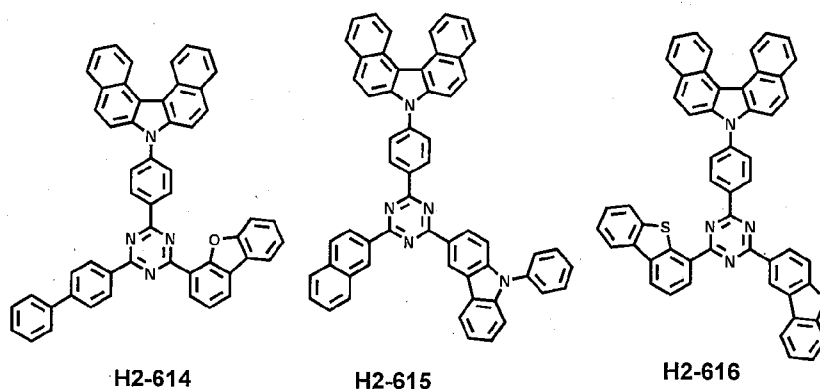


[179]

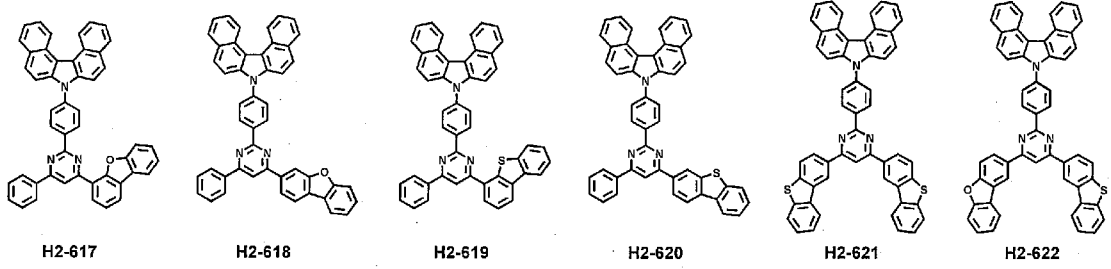


[180]

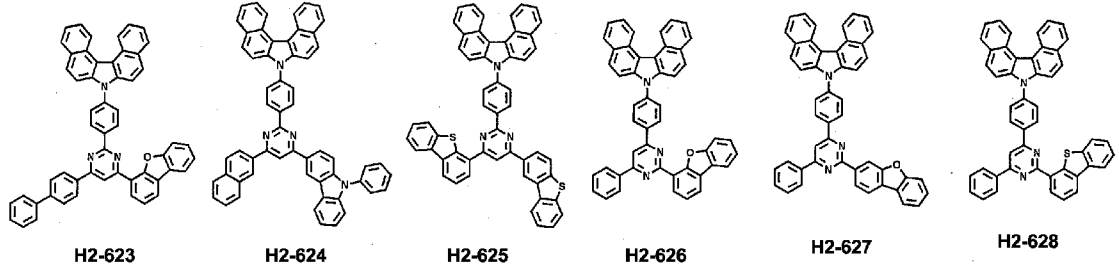


[181]

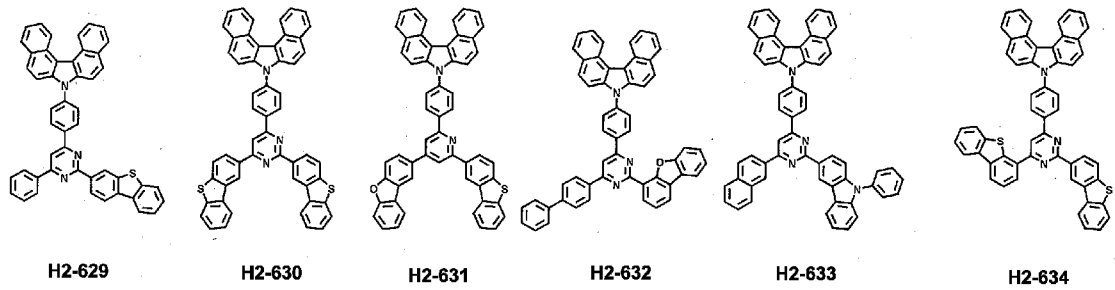


[182]

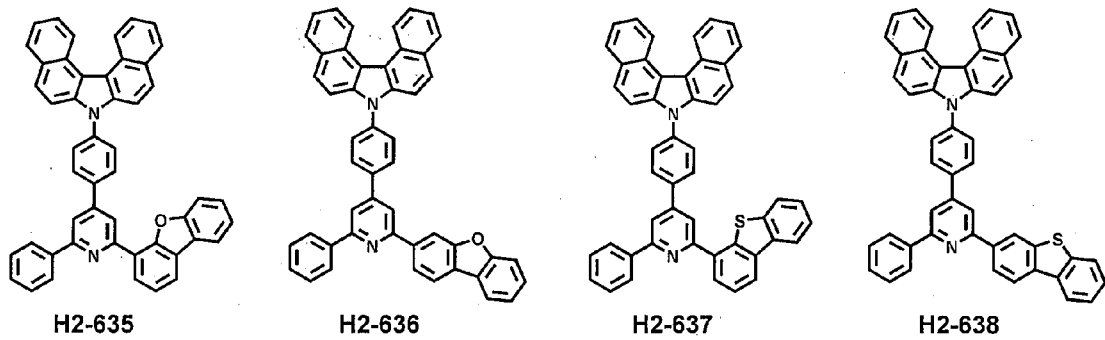


[183]

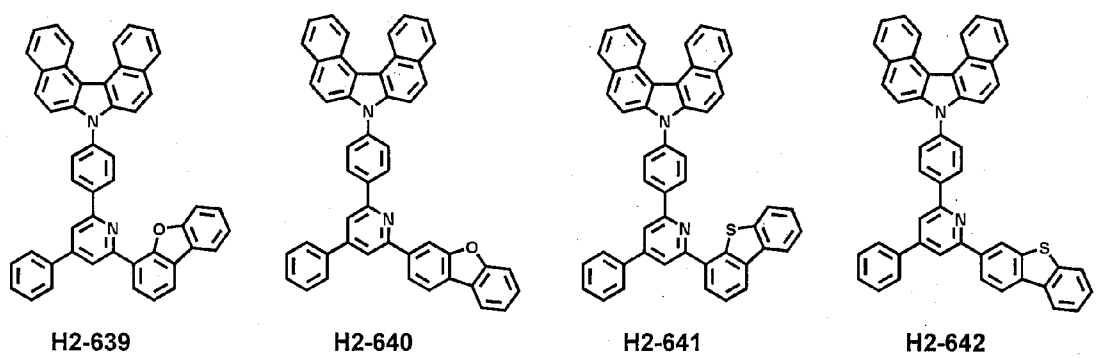


[184]

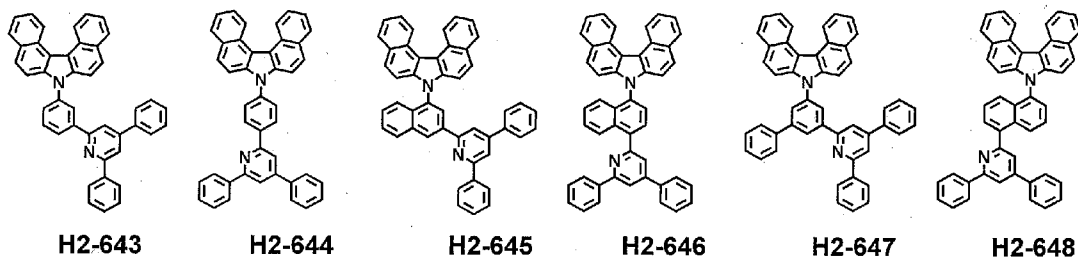


[185]

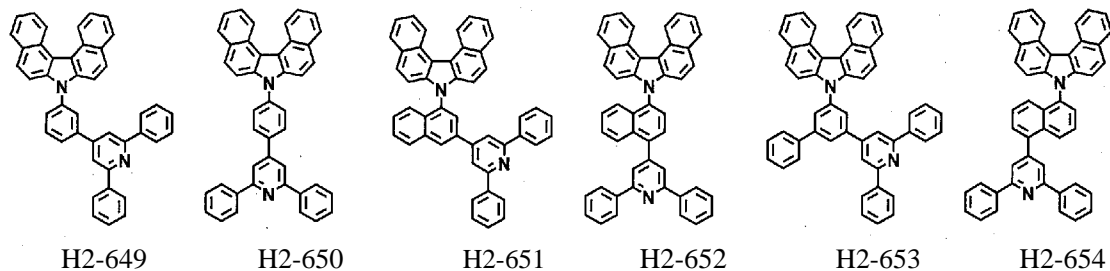


[186]

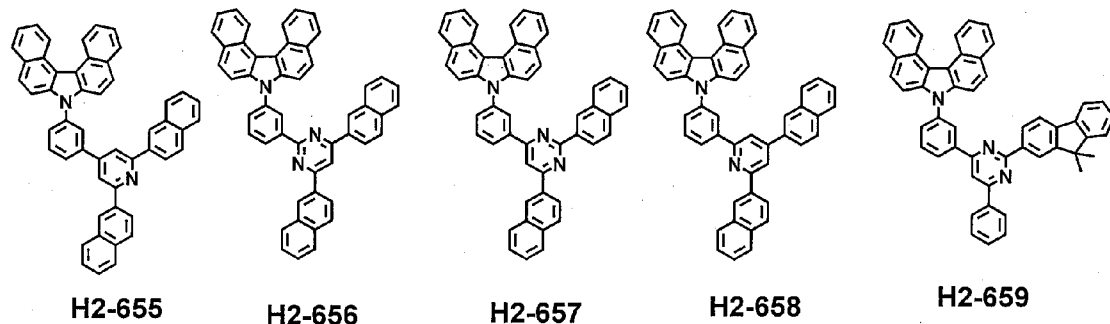

[187]

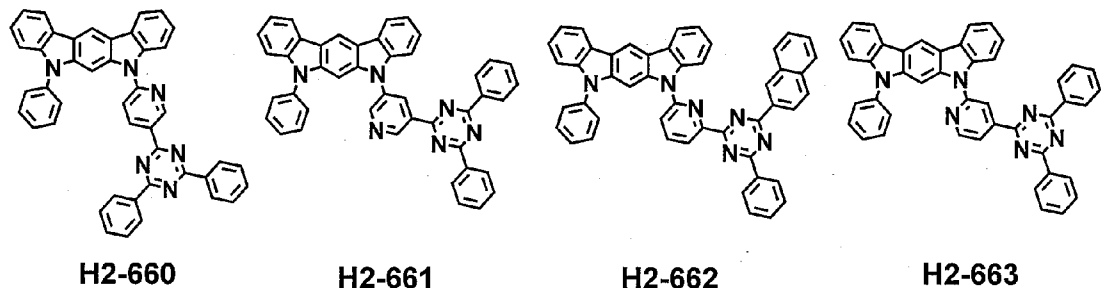

[188]

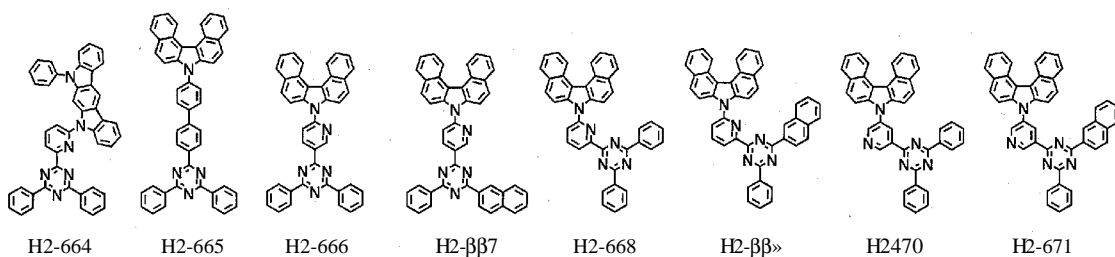

[189]

The organic EL device according to the present invention may comprise an anode, a cathode, and at least one organic layer between the two electrodes, wherein the organic layer comprises a light-emitting layer, the light-emitting layer comprises a host and a phosphorescent dopant: the host consists of multi-component host compounds: at least a first host compound of the multi-component host compounds is represented by formula 1 which is a specific bicarbazole derivative containing an aryl group, and a


second host compound is represented by formula 2 which is a specific carbazole derivative including a nitrogen-containing heteroaryl group.

[190] The light-emitting layer means a layer emitting light and may be a single layer or multi-layers consisting of two or more layers. The doping concentration of dopant compounds to host compounds in the light-emitting layer is preferably less than 20 wt%.


[191] The dopants included in the organic EL device of the present invention are preferably one or more phosphorescent dopants. The phosphorescent dopant material applied to the organic electroluminescent device of the present invention is not specifically limited, but preferably may be selected from complex compounds of iridium (Ir), osmium (Os), copper (Cu), and platinum (Pt), more preferably ortho metallated complex compounds of iridium (Ir), osmium (Os), copper (Cu), and platinum (Pt), and even more preferably ortho metallated iridium complex compounds.

[192] The phosphorescent dopants may be selected from the group consisting of the compounds represented by the following formulae 101 to 103:


[193]

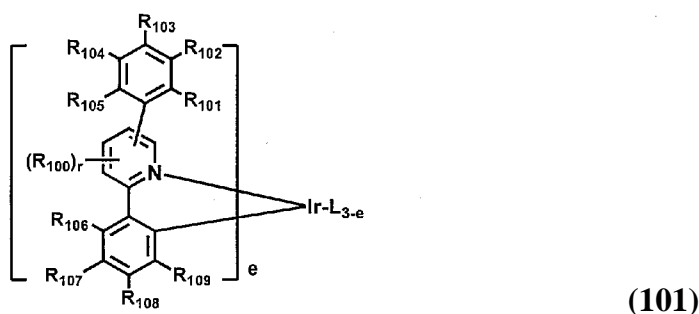

[194]

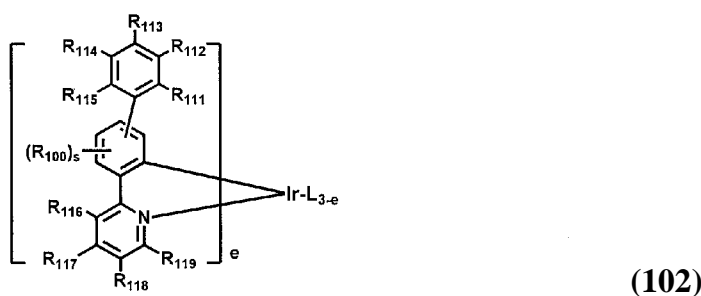


[195]

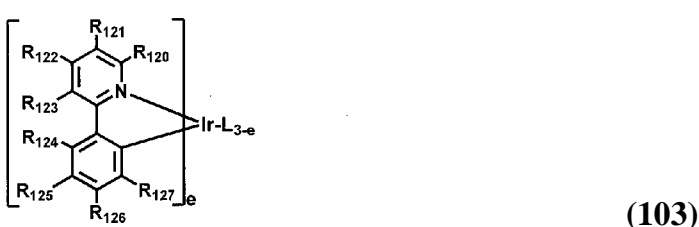

[196] wherein

[197] L is selected from the following structures:


[198]




[199] **Rim** represents hydrogen, or a substituted or unsubstituted (C1-C30)alkyl group: R_{101} to R_m and R_{M1} to R_i , each independently represent hydrogen, deuterium, a halogen: a (C1-C30)alkyl group unsubstituted or substituted with halogen(s): a cyano group, a substituted or unsubstituted (C1-C30)alkoxy group, a substituted or unsubstituted (C6-C30)aryl group, or a substituted or unsubstituted (C3-C30)cycloalkyl group: R_{134} to **RIM** are linked to an adjacent substituent(s) to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring, for example, quinoline: **RIM** to R_i , each independently represent hydrogen, deuterium, a halogen, a substituted or unsubstituted (C1-C30)alkyl group, or a substituted or unsubstituted (C6-C30)aryl group: when **RIM** to R_i are aryl groups, they are linked to an adjacent substituent(s) to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring, or a heteroaromatic ring, for example, fluorene, dibenzothiophene, or dibenzofuran: $R_{:,i}$ to R_m each independently represent hydrogen, deuterium, a halogen, a (C1-C30)alkyl group unsubstituted or substituted with halogen(s), or a substituted or unsubstituted (C6-C30)aryl group: R^A to R_m may be linked to an adjacent substituent(s) to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring, or a heteroaromatic ring, for example, fluorene, dibenzothiophene, or dibenzofuran: r and s each independently represent an integer of 1 to 3: where r or s is an integer of 2 or more, each of R_m may be the same or different: and e represents an integer of 1 to 3.

[200] The phosphorescent dopant material includes the following:


[201]

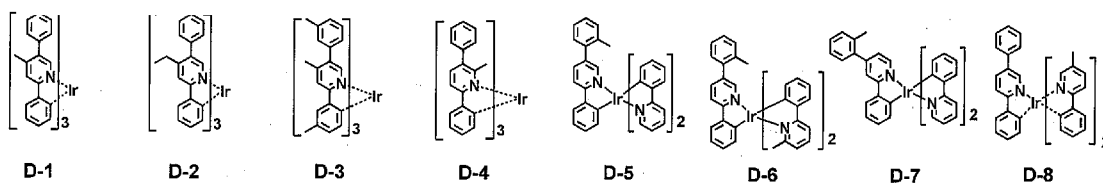


[202]

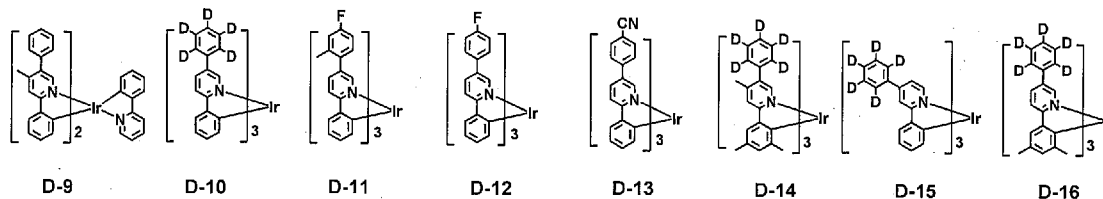


[203]

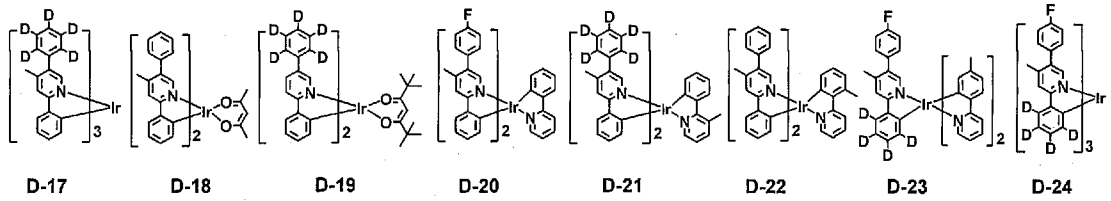


[204]

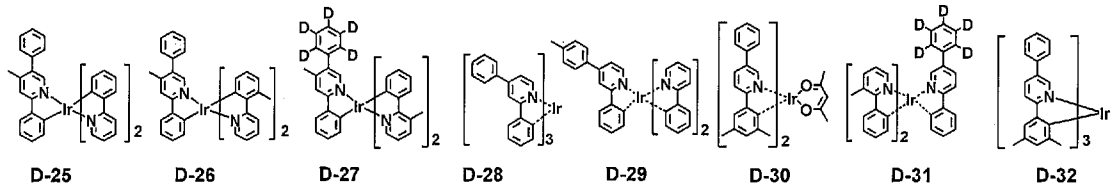


[205]

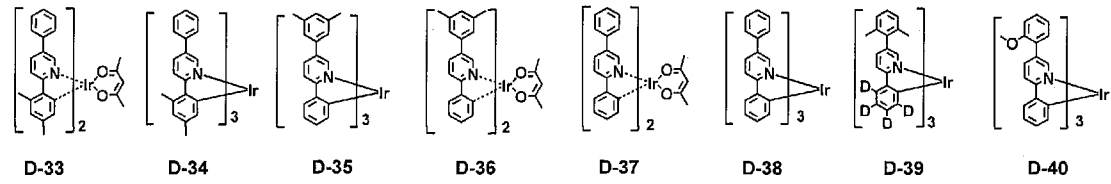


[206]

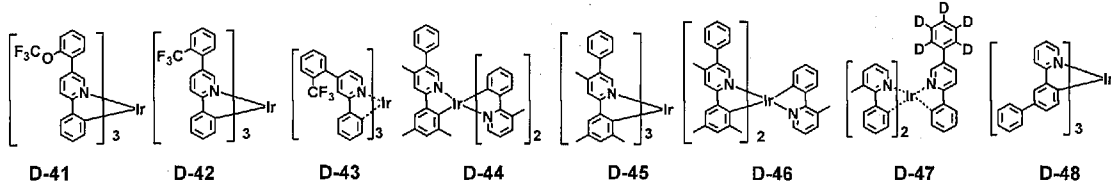


[207]

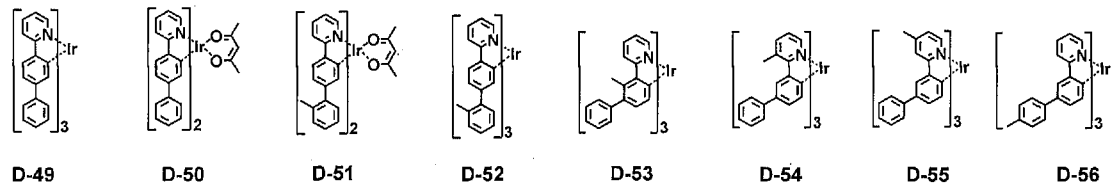


[208]

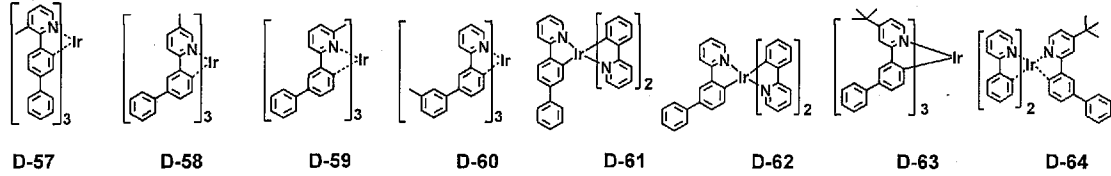


[209]

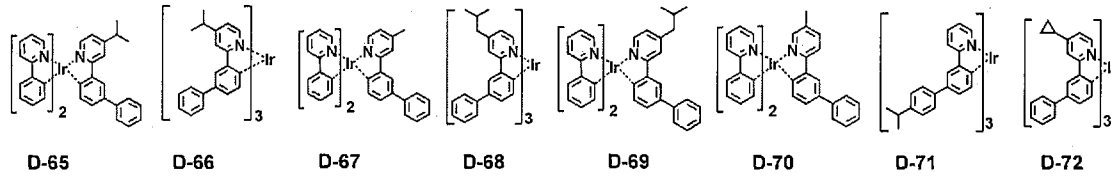


[210]

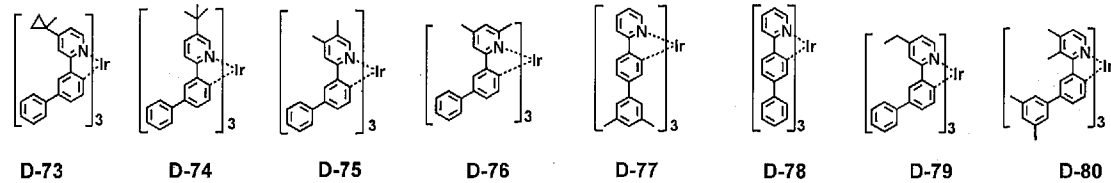


[211]

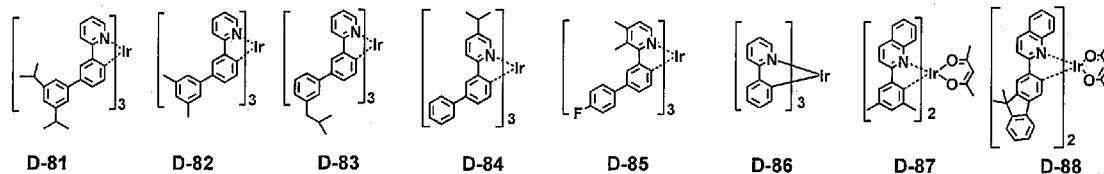


[212]

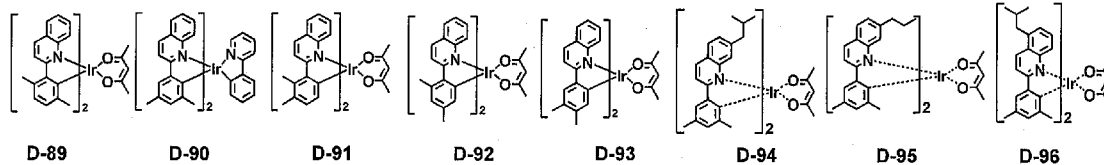


[213]

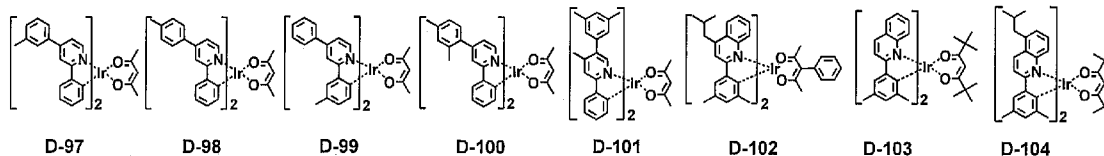


[214]

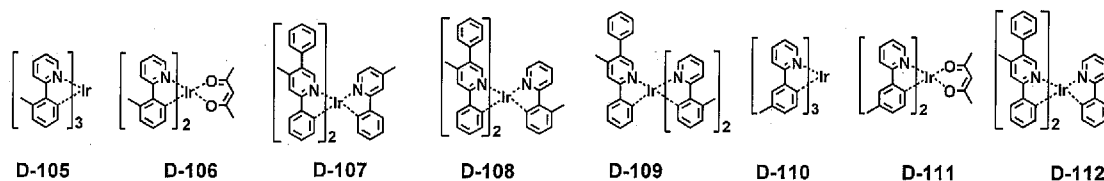


[215]

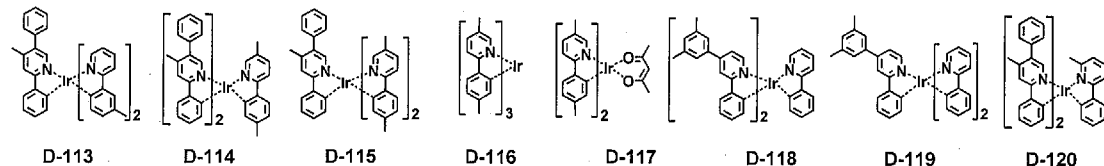


[216]

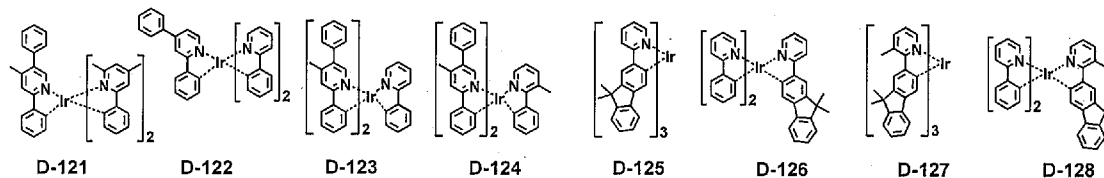


[217]

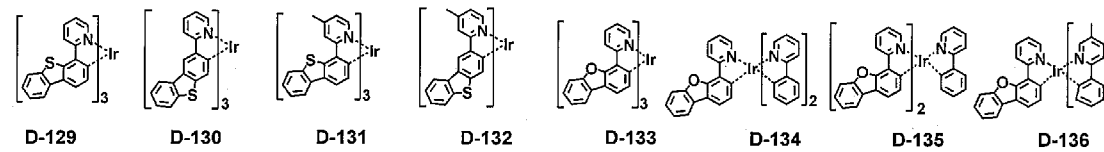


[218]

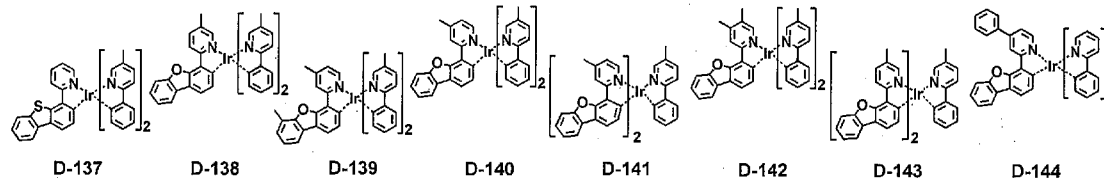


[219]

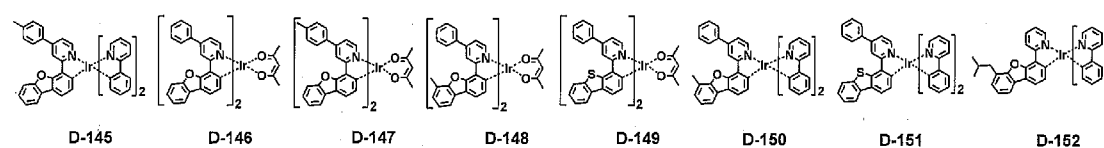


[220]

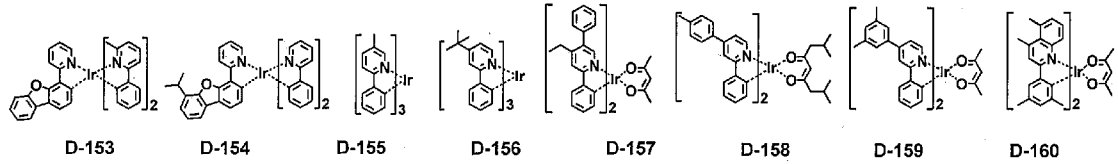


[221]

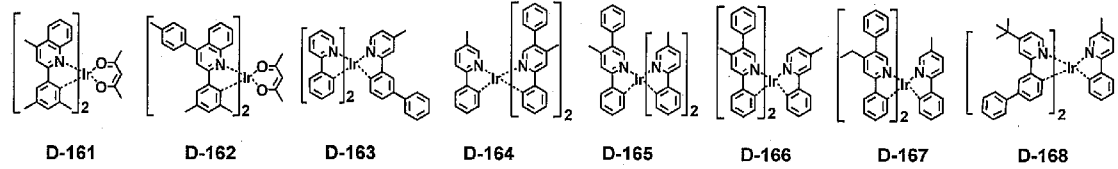


[222]

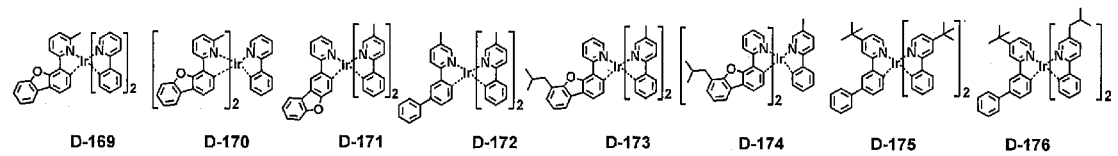


[223]

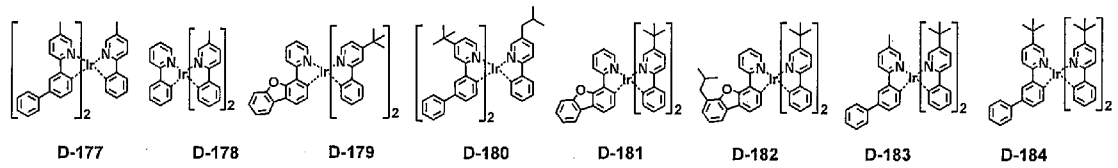


[224]

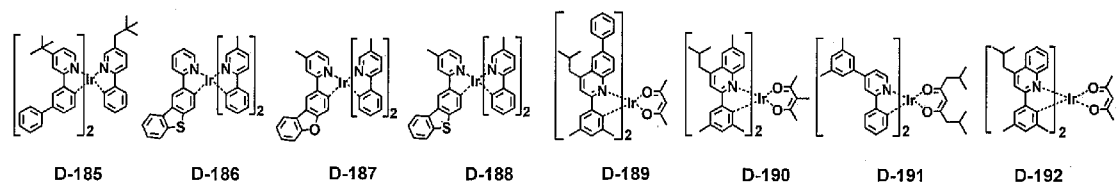


[225]

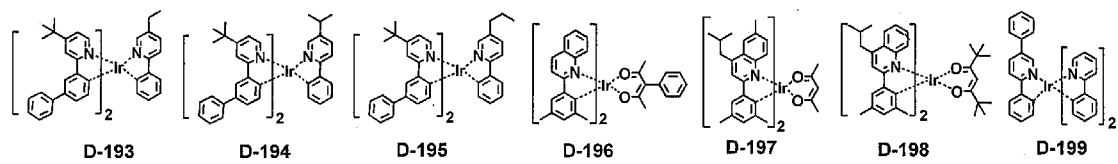

[226]

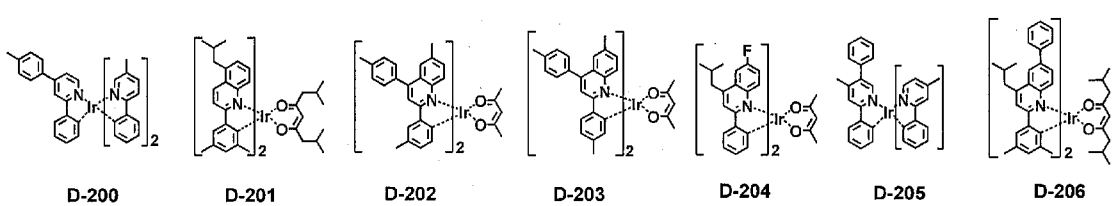

[227]

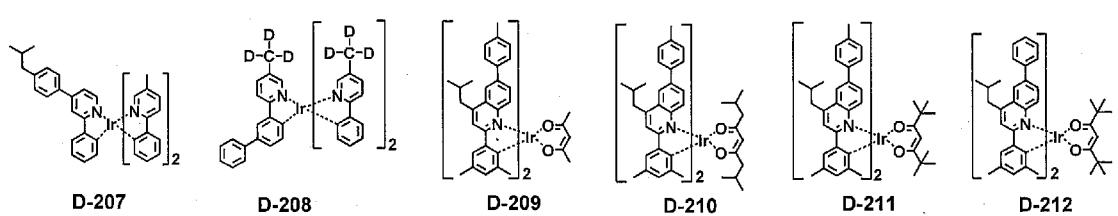

[228]

The organic EL device of the present invention may further include at least one compound selected from the group consisting of arylamine-based compounds and styrylamine-based compounds in the organic layer.

[229]

In the organic EL device of the present invention, the organic layer may further comprise at least one metal selected from the group consisting of metals of Group 1, metals of Group 2, transition metals of the 4th period, transition metals of the 5th period.

lanthanides, and organic metals of d-transition elements of the Periodic Table, or at least one complex compound comprising the metal.

[230] Preferably, in the organic electroluminescent device of the present invention, at least one layer (hereinafter, "a surface layer") selected from a chalcogenide layer, a metal halide layer and a metal oxide layer may be placed on an inner surface(s) of one or both electrode(s). Specifically, it is preferred that a chalcogenide (including oxides) layer of silicon or aluminum is placed on an anode surface of a light-emitting medium layer, and a metal halide layer or metal oxide layer is placed on a cathode surface of an electroluminescent medium layer. The surface layer provides operating stability for the organic electroluminescent device. Preferably, the chalcogenide includes SiO_x ($1 < x < 2$), AlO_x ($1 < x < 1.5$), SiON , SiAlON , etc.; the metal halide includes LiF , MgF_2 , CaF_2 , a rare earth metal fluoride, etc.; and the metal oxide includes Cs_2O , Li_2O , MgO , SrO , BaO , CaO , etc.

[231] A hole injection layer, a hole transport layer, an electron blocking layer, or their combinations can be used between an anode and a light-emitting layer. The hole injection layer may be multi-layers in order to lower a hole injection barrier (or hole injection voltage) from an anode to a hole transport layer or an electron blocking layer, wherein each of the multi-layers simultaneously uses two compounds. The hole transport layer or the electron blocking layer may also be multi-layers.

[232] An electron buffer layer, a hole blocking layer, an electron transport layer, an electron injection layer, or their combinations can be used between a light-emitting layer and a cathode. The electron buffer layer may be multi-layers in order to control the injection of an electron and improve interface properties between the light-emitting layer and the electron injection layer, wherein each of the multi-layers simultaneously uses two compounds. The hole blocking layer or the electron transport layer may also be multi-layers, wherein each of the multi-layers may use a multi-component of compounds.

[233] Preferably, in the organic electroluminescent device of the present invention, a mixed region of an electron transport compound and a reductive dopant, or a mixed region of a hole transport compound and an oxidative dopant may be placed on at least one surface of a pair of electrodes. In this case, the electron transport compound is reduced to an anion, and thus it becomes easier to inject and transport electrons from the mixed region to a light-emitting medium. Further, the hole transport compound is oxidized to a cation, and thus it becomes easier to inject and transport holes from the mixed region to a light-emitting medium. Preferably, the oxidative dopant includes various Lewis acids and acceptor compounds; and the reductive dopant includes alkali metals, alkali metal compounds, alkaline earth metals, rare-earth metals, and mixtures thereof. A reductive dopant layer may be employed as a charge-generating layer to prepare an

organic electroluminescent device having two or more light-emitting layers and emitting white light.

[234] In order to form each layer constituting the organic electroluminescent device of the present invention, dry film-forming methods, such as vacuum deposition, sputtering, plasma, ion plating methods, etc., or wet film-forming methods, such as spin coating, dip coating, flow coating methods, etc., can be used. When forming a layer by using a first host and a second host according to the present invention, co-deposition or mixed-deposition may be used.

[235] When using a wet film-forming method, a thin film is formed by dissolving or dispersing the material constituting each layer in suitable solvents, such as ethanol, chloroform, tetrahydrofuran, dioxane, etc. The solvents are not specifically limited as long as the material constituting each layer is soluble or dispersible in the solvents, which do not cause any problems in forming a layer.

[236] Furthermore, a display device or a light device can be produced by using the organic EL device of the present invention.

[237] Hereinafter, the preparation methods of devices by using host compounds and dopant compounds of the present invention will be explained in detail with reference to the following examples:

[238]

[239] Device Example 1-1: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host


[240] An OLED device comprising the organic electroluminescent compound of the present invention was produced as follows: A transparent electrode indium tin oxide (ITO) thin film (10 Ω /sq) on a glass substrate for an OLED device (Samsung Corning, Republic of Korea) was subjected to an ultrasonic washing with trichloroethylene, acetone, ethanol, and distilled water, sequentially, and was then stored in isopropanol. Next, the ITO substrate was mounted on a substrate holder of a vacuum vapor depositing apparatus. N,N'-diphenyl-N,N'-bis(9-phenyl-9H-carbazole-3-yl)-[1,1'-biphenyl]-4,4'-diamine as HI-1 was introduced into a cell of the vacuum vapor depositing apparatus, and the pressure in the chamber of the apparatus was then controlled to 10^{-6} ton*. Thereafter, an electric current was applied to the cell to evaporate the introduced material, thereby forming a hole injection layer 1 having a thickness of 80 nm on the ITO substrate.

1,4,5,8,9,12-hexaazatriphenylene hexacarbonitrile as HI-2 was then introduced into another cell of the vacuum vapor depositing apparatus, and an electric current was applied to the cell to evaporate the introduced material, thereby forming a hole injection layer 2 having a thickness of 5 nm on hole injection layer 1. N-

([1,1'-biphenyl]-4-yl)-9,9-dimethyl-N-(4-(9-phenyl-9H-carbazole-3-yl)phenyl)-9H-fluorene-2-amine as HT-1 was introduced into one cell of the vacuum vapor depositing apparatus. Thereafter, an electric current was applied to the cell to evaporate the introduced material, thereby forming a hole transport layer 1 having a thickness of 10 nm on hole injection layer 2.

N,N-di([1,1'-biphenyl]-4-yl)-4'-(9H-carbazole-9-yl)-[1,1'-biphenyl]-4-amine as HT-2 was then introduced into another cell of the vacuum vapor depositing apparatus, and an electric current was applied to the cell to evaporate the introduced material, thereby forming a hole transport layer 2 having a thickness of 60 nm on hole transport layer 1. Thereafter, compounds HI-1 and H2-2 as hosts were respectively introduced into two cells of the vacuum vapor depositing apparatus and compound D-96 as a dopant was introduced into another cell. The two host materials were evaporated at the same rates of 1:1, and the dopant was evaporated at a different rate and deposited in a doping amount of 3 wt%, based on the total weight of the host and dopant, to form a light-emitting layer having a thickness of 40 nm on the hole transport layer. Next, 2,4-bis(9,9-dimethyl-9H-fluorene-2-yl)-6-(naphthalene-2-yl)-1,3,5-triazine as ET-1 and lithium quinolate as EI-1 were evaporated at the same rates of 1:1 on another two cells to form an electron transport layer having a thickness of 30 nm on the light-emitting layer. After depositing lithium quinolate of EI-1 having a thickness of 2 nm as an electron injection layer on the electron transport layer, an Al cathode having a thickness of 80 nm was then deposited by another vacuum vapor deposition apparatus on the electron injection layer. Thus, an OLED device was produced.

[241] The produced OLED device showed the driving voltage at a luminance of 1,000nit, luminescent efficiency, CIE color coordinate, and the lifespan taken to be reduced from 100% to 90% of the constant current at a luminance of 5,000nit as provided in Table 1 below.

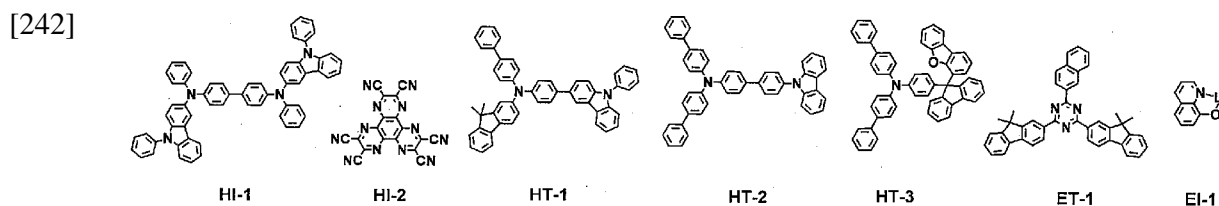

[243] Comparative Example 1-1: Production of an OLED device by using only the second host compound according to the present invention as a host

[244] An OLED device was produced in the same manner as in Device Example 1-1, except that only the second host compound was used as a host in a light-emitting layer.

[245] The luminescent properties of the OLED devices produced in Device Example 1-1 and Comparative Example 1-1 are provided in Table 1 below.

[246]

[247] Table 1

[248]

	Hole Transport Layer	Host	Dopant	Voltage (V)	Efficiency (cd/A)	Color Coordinate (x, y)	T90 lifespan (hr)
Device Example 1-1	HT-1/HT-2	H1-1:H2-2	D-96	4.3	25.5	0.663, 0.336	360
Comparative Example 1-1	HT-1/HT-2	H2-2	D-96	4.1	28.2	0.662, 0.337	100

[249]

[250] Device Examples 2-1 to 2-13: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[251] An OLED device was produced in the same manner as in Device Example 1-1, except that hole injection layer 2 has a thickness of 3 nm, hole transport layer 1 has a thickness of 40 nm, hole transport layer 2 is not present, D-25 as a dopant was deposited in a doping amount on 15wt% in a light-emitting layer, the electron transport layer having a thickness of 35 nm was deposited via the evaporation rate of 4:6, the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 2-1 to 2-13 as provided in Table 2 below, and the lifespan taken to be reduced from 100% to 90% of the constant current at a luminance of 15,000nit as provided in Table 2 below.

[252]

[253] Device Examples 2-14 to 2-18: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[254] An PLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that hole injection layer 2 has a thickness of 3 nm, hole transport layer 1 has a thickness of 40 nm, hole transport layer 2 is not present, D-1 as a dopant was used in a light-emitting layer, the electron transport layer having a thickness of 35 nm was deposited via the evaporation rate of 4:6, the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 2-14 to 2-18 as provided in Table 2 below, and the lifespan taken to be reduced from 100% to 90% of the constant current at a luminance of 15,000nit as provided in Table 2 below.

[255]

[256] Device Examples 3-1 to 3-8: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[257] An PLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that hole transport layer 1 has a thickness of 10 nm, hole transport layer 2

of HT-3 has a thickness of 30 nm, D-136 as a dopant was used in a light-emitting layer, and the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 3-1 to 3-8 as provided in Table 2 below.

[258]

[259] Device Example 3-9: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[260] An OLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that hole transport layer 1 has a thickness of 10 nm, hole transport layer 2 of HT-3 has a thickness of 30 nm, D-164 as a dopant was used in a light-emitting layer, and the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Example 3-9 as provided in Table 2 below.

[261]

[262] Device Examples 3-10 to 3-12: Production of an OLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[263] An OLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that hole transport layer 1 has a thickness of 10 nm, hole transport layer 2 of HT-3 has a thickness of 30 nm, D-168 as a dopant was used in a light-emitting layer, and the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 3-10 to 3-12 as provided in Table 2 below.

[264]

[265] Device Example 3-13: Production of an OLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[266] An OLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that hole transport layer 1 has a thickness of 10 nm, hole transport layer 2 of HT-3 has a thickness of 30 nm, D-180 as a dopant was used in a light-emitting layer, and the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Example 3-13 as provided in Table 2 below.

[267]

[268] Comparative Examples 2-1 to 2-3: Production of an OLED device by using only the first host compound according to the present invention as a host

[269] An OLED device was produced in the same manner as in Device Examples 2-1 to

2-13, except that the first host compound used as hosts in a light-emitting layer is based on Comparative Examples 2-1 to 2-3 as provided in Table 2 below.

[270]

[271] Comparative Examples 3-1 to 3-9: Production of an PLED device by using only the second host compound according to the present invention as a host

[272] An OLED device was produced in the same manner as in Device Examples 2-1 to 2-13, except that the second host compound used as hosts in a light-emitting layer is based on Comparative Examples 3-1 to 3-9 as provided in Table 2 below.

[273]

[274] Comparative Example 4-1: Production of an PLED device by using only the second host compound according to the present invention as a host

[275] An PLED device was produced in the same manner as in Device Examples 3-1 to 3-8, except that the second host compound used as hosts in a light-emitting layer is based on Comparative Example 4-1 as provided in Table 2 below.

[276] The luminescent properties of the PLED devices produced in the above Device Examples and Comparative Examples are provided in Table 2 below.

[277]

[278] Table 2

[279]

	Hole Transport Layer	Host	Dopant	Voltage [V]	Efficiency [cd/A]	Color Coordinate (x, y)	T90 lifespan [hr]
Device Example 2-1	HT-1	H1-1:H2-25	D-25	3.3	43.2	0.297, 0.660	100
Device Example 2-2	HT-1	H1-1:H2-31	D-25	3	58.8	0.303, 0.657	143
Device Example 2-3	HT-1	H1-1:H2-48	D-25	2.8	55.3	0.302, 0.657	124
Device Example 2-4	HT-1	H1-1:H2-34	D-25	3	55.7	0.302, 0.657	127
Device Example 2-5	HT-1	H1-11:H2-31	D-25	2.9	56.9	0.306, 0.656	147
Device Example 2-6	HT-1	H1-12:H2-31	D-25	2.9	54.5	0.304, 0.657	206
Device Example 2-7	HT-1	H1-14:H2-31	D-25	3.1	49.1	0.306, 0.655	124
Device Example 2-8	HT-1	H1-4:H2-31	D-25	2.9	55.2	0.300, 0.657	131
Device Example 2-9	HT-1	H1-35:H2-31	D-25	2.9	55.6	0.303, 0.656	161

[280]

Device Example 2-10	HT-1	H1-1:H2-101	D-25	3	55.6	0.303, 0.656	124
Device Example 2-11	HT-1	H1-9:H2-31	D-25	2.9	56	0.301, 0.657	203
Device Example 2-12	HT-1	H1-2:H2-31	D-25	2.8	54.9	0.307, 0.656	116
Device Example 2-13	HT-1	H1-34:H2-31	D-25	3	52.5	0.303, 0.657	160
Device Example 2-14	HT-1	H1-1:H2-31	D-1	2.8	57.8	0.315, 0.658	254
Device Example 2-15	HT-1	H1-1:H2-48	D-1	2.8	60.2	0.316, 0.659	240
Device Example 2-16	HT-1	H1-11:H2-31	D-1	2.8	52.4	0.317, 0.658	274
Device Example 2-17	HT-1	H1-11:H2-48	D-1	2.7	54.3	0.316, 0.659	272
Device Example 2-18	HT-1	H1-11:H2-87	D-1	2.9	51.9	0.319, 0.655	240

[281]

Device Example 3-1	HT-1/HT-3	H1-1:H2-30	D-136	3.3	63.9	0.324, 0.660	240
Device Example 3-2	HT-1/HT-3	H1-1:H2-31	D-136	3.2	71.2	0.326, 0.659	265
Device Example 3-3	HT-1/HT-3	H1-1:H2-48	D-136	3.1	68	0.325, 0.659	265
Device Example 3-4	HT-1/HT-3	H1-1:H2-87	D-136	3.3	67.4	0.327, 0.658	290
Device Example 3-5	HT-1/HT-3	H1-11:H2-31	D-136	3.1	69.2	0.327, 0.658	292
Device Example 3-6	HT-1/HT-3	H1-11:H2-48	D-136	3.2	64	0.326, 0.658	322
Device Example 3-7	HT-1/HT-3	H1-11:H2-87	D-136	3.1	65.2	0.327, 0.657	367
Device Example 3-8	HT-1/HT-3	H1-35:H2-125	D-136	3.1	65.2	0.330, 0.655	408
Device Example 3-9	HT-1/HT-3	H1-35:H2-31	D-164	3.2	61.5	0.316, 0.656	241
Device Example 3-10	HT-1/HT-3	H1-1:H2-31	D-168	3.2	62.1	0.281, 0.665	148
Device Example 3-11	HT-1/HT-3	H1-35:H2-31	D-168	3.2	59.4	0.278, 0.668	162
Device Example 3-12	HT-1/HT-3	H1-12:H2-125	D-168	3.1	56.6	0.288, 0.665	164
Device Example 3-13	HT-1/HT-3	H1-12:H2-125	D-180	3.1	49.7	0.291, 0.664	240


[282]

Comparative Example 2-1	HT-1	H1-12	D-25	5.9	3.1	0.299, 0.656	×
Comparative Example 2-2	HT-1	H1-4	D-25	6.7	3	0.289, 0.658	×
Comparative Example 2-3	HT-1	H1-35	D-25	6.6	3.9	0.395, 0.658	×
Comparative Example 3-1	HT-1	H2-25	D-25	3.1	54.2	0.308, 0.655	45
Comparative Example 3-2	HT-1	H2-31	D-25	2.9	42.8	0.314, 0.652	39
Comparative Example 3-3	HT-1	H2-48	D-25	2.6	49.6	0.314, 0.652	67
Comparative Example 3-4	HT-1	H2-101	D-25	2.8	50.3	0.315, 0.651	24
Comparative Example 3-5	HT-1	H2-34	D-25	2.7	49.2	0.312, 0.652	38
Comparative Example 3-6	HT-1	H2-30	D-25	2.8	55.3	0.314, 0.652	70
Comparative Example 3-7	HT-1	H2-31	D-1	2.9	33.5	0.323, 0.653	130
Comparative Example 3-8	HT-1	H2-48	D-1	2.6	41.2	0.325, 0.653	124
Comparative Example 3-9	HT-1	H2-87	D-1	2.8	37.9	0.323, 0.653	146
Comparative Example 4-1	HT-1/HT-3	H2-125	D-136	3.0	64.9	0.337, 0.649	124

[283] Device Examples 4-1 to 4-7; Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[284] An OLED device was produced in the same manner as in Device Example 1-1, except that HT-4 was used as a hole transport layer 2, the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 4-1 to 4-7 as provided in Table 3 below, and the lifespan taken to be reduced from 100% to 95% of the constant current at a luminance of 5,000nit as provided in Table 3 below.

[285]



HT-4

[286] Comparative Examples 5-1 and 5-2; Production of an PLED device by using only the second host compound according to the present invention as a host

[287] An PLED device was produced in the same manner as in Device Examples 4-1 to 4-7, except that the second host compound used as hosts in a light-emitting layer is based on Comparative Examples 5-1 and 5-2 as provided in Table 3 below.

[288] The luminescent properties of the PLED devices produced in Device Examples 4-1 to 4-7, and Comparative Examples 5-1 and 5-2 are provided in Table 3 below.

[289]

[290] Table 3

[291]

	Hole Transport Layer	Host	Dopant	Voltage [V]	Efficiency [cd/A]	Color Coordinate (x, y)	T95 lifespan [hr]
Device Example 4-1	HT-1 / HT-4	H1-287 : H2-496	D-96	3.8	30.8	0.667, 0.333	310
Device Example 4-2	HT-1 / HT-4	H1-12 : H2-504	D-96	3.5	30.7	0.667, 0.333	390
Device Example 4-3	HT-1 / HT-4	H1-9 : H2-496	D-96	3.9	31.1	0.665, 0.335	130
Device Example 4-4	HT-1 / HT-4	H1-35 : H2-496	D-96	3.8	31.1	0.665, 0.334	200
Device Example 4-5	HT-1 / HT-4	H1-287 : H2-504	D-96	3.7	31.3	0.666, 0.333	200
Device Example 4-6	HT-1 / HT-4	H1-282 : H2-504	D-96	3.7	31.4	0.666, 0.334	120
Device Example 4-7	HT-1 / HT-4	H1-12 : H2-496	D-96	3.6	29.2	0.667, 0.333	150
Comparative Example 5-1	HT-1 / HT-4	H2-496	D-96	3.7	31.0	0.665, 0.334	90
Comparative Example 5-2	HT-1 / HT-4	H2-504	D-96	3.7	31	0.667, 0.333	70

[292]

[293] Device Examples 5-1 and 5-2: Production of an PLED device by co-deposition of the first host compound and the second host compound according to the present invention as a host

[294] An OLED device was produced in the same manner as in Device Examples 3-1 to 3-11, except that D-134 was used as a dopant in a light-emitting layer, the combinations of the first host compound and the second host compound used as hosts in a light-emitting layer are based on Device Examples 5-1 and 5-2 as provided in Table 4 below, and the lifespan taken to be reduced from 100% to 97% of the constant current at a luminance of 15,000nit as provided in Table 4 below.

[295]

[296] Comparative Examples 6-1 and 6-2: Production of an PLED device by using only the first host compound according to the present invention as a host

[297] An PLED device was produced in the same manner as in Device Examples 5-1 and 5-2, except that the first host compound used as hosts in a light-emitting layer is based on Comparative Examples 6-1 and 6-2 as provided in Table 4 below.

[298]

[299] Comparative Example 7-1: Production of an PLED device by using only the second host compound according to the present invention as a host

[300] An PLED device was produced in the same manner as in Device Examples 5-1 and 5-2, except that the second host compound used as hosts in a light-emitting layer is

based on Comparative Example 7-1 as provided in Table 4 below.

[301] The luminescent properties of the OLED devices produced in Device Examples 5-1 and 5-2, Comparative Examples 6-1 and 6-2, and Comparative Example 7-1 are provided in Table 4 below.

[302]

[303] Table 4

[304]

	Hole Transport Layer	Host	Dopant	Voltage [V]	Efficiency [cd/A]	Color Coordinate (x, y)	T97 lifespan [hr]
Device Example 5-1	HT-1/ HT-3	H1-12 : H2-660	D-134	3.1	63.2	0.313, 0.665	39
Device Example 5-2	HT-1/ HT-3	H1-35 : H2-660	D-134	3.2	64.8	0.312, 0.665	56
Comparative Example 6-1	HT-1/ HT-3	H1-12	D-134	6.4	2.9	0.305, 0.660	×
Comparative Example 6-2	HT-1/ HT-3	H1-35	D-134	7.2	3.5	0.302, 0.664	×
Comparative Example 7-1	HT-1/ HT-3	H2-660	D-134	3.0	55.4	0.321, 0.659	5



[305]

[306] The organic electroluminescent device of the present invention provides longer lifespan compared with conventional devices by comprising a light-emitting layer containing a host and a phosphorescent dopant, wherein the host consists of multi-component host compounds, at least a first host compound of the multi-component host compounds has a specific bicarbazole derivative containing an aryl group, and a second host compound has a specific carbazole derivative including a nitrogen-containing heteroaryl group.

Claims

[Claim 1]

An organic electroluminescent device comprising at least one light-emitting layer between an anode and a cathode, wherein the light-emitting layer comprises a host and a phosphorescent dopant: the host consists of multi-component host compounds: at least a first host compound of the multi-component host compounds is represented by the following formula 1 which is a bicarbazole derivative containing an aryl group, and a second host compound is represented by the following formula 2 which is a carbazole derivative including a nitrogen-containing heteroaryl group:

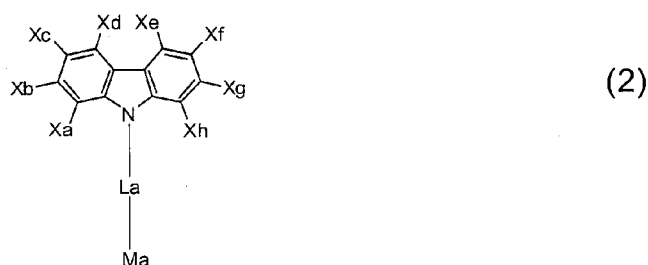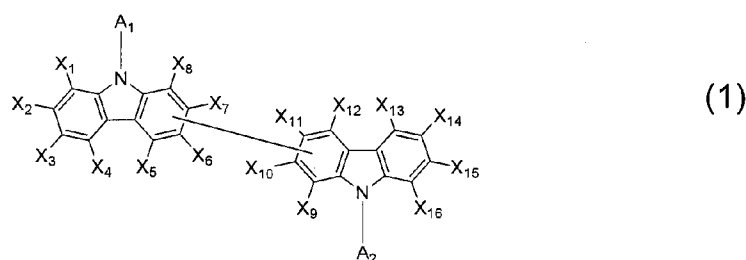

wherein

A_1 and A_2 each independently represent a substituted or unsubstituted (C6-C30)aryl group:

X_1 to X_{16} each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon

atom(s) may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

Ma represents a substituted or unsubstituted nitrogen-containing 5- to 30-membered heteroaryl group:

La represents a single bond, or a substituted or unsubstituted (C6-C30)arylene group:


Xa to Xh each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:




the fused aromatic or heteroaromatic ring is selected from the group consisting of benzene, indole, indene, benzofuran and benzothiophene, which may be further substituted with a (C1-C10)alkyl group or a (C6-C15)aryl group: and

the heteroaryl group contains at least one hetero atom selected from B, N, O, S, P(=O), Si and P.

[Claim 2]

The organic electroluminescent device according to claim 1, wherein the compound of formula 1 is represented by the following formula 3, 4, 5, or 6:

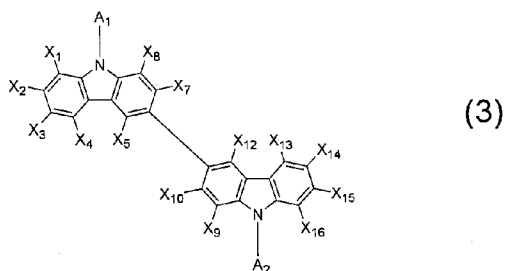

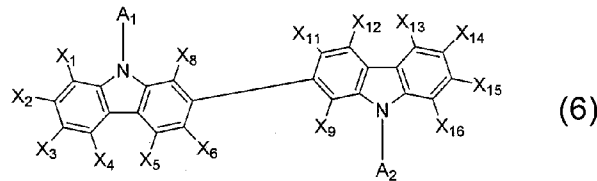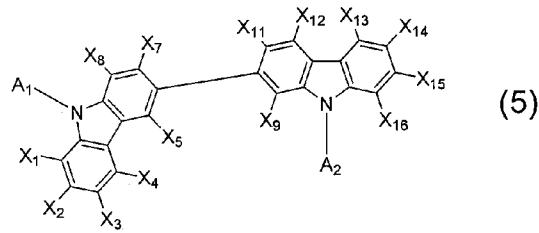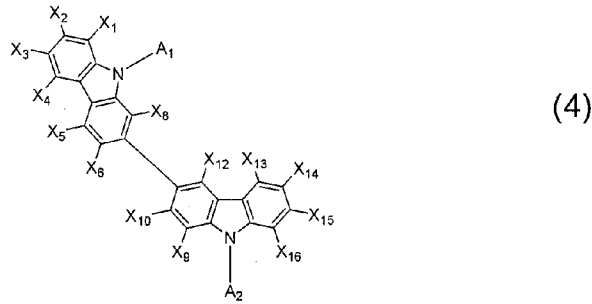




wherein

A_1 and A_2 each independently represent a substituted or unsubstituted (C6-C30)aryl group; and

X_1 to X_{16} each independently represent hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group; or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur.

[Claim 3]

The organic electroluminescent device according to claim 1, wherein the compound of formula 2 is represented by the following formula 7, 8, or 9:

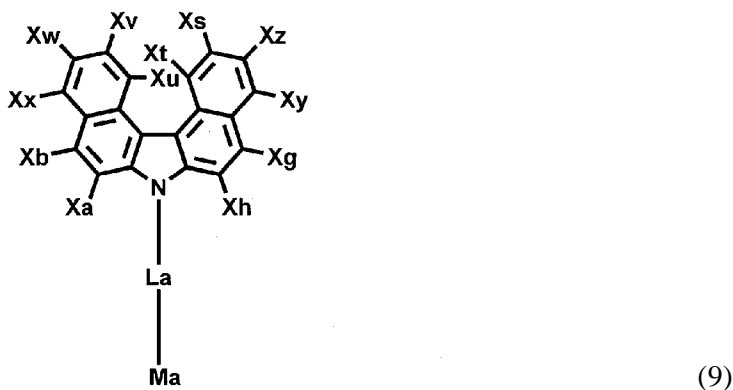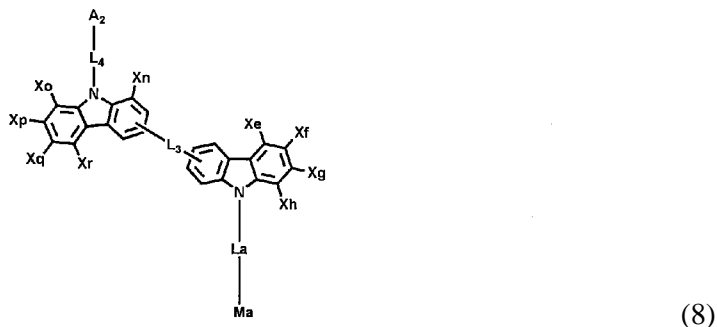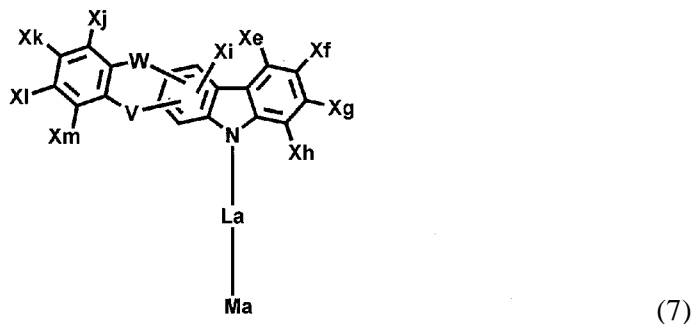

wherein

V and W each independently represent a single bond, NR_{1S}, CR₁, R₁₇, S, or O, provided that both V and W neither represent a single bond nor represent NR_{1S};

A: represents a substituted or unsubstituted (C6-C30)aryl group and may be bonded to Xn or Xo;

L₃ and L₄ each independently represent a single bond, or a substituted or unsubstituted (C6-C60)arylene group;

Xi represents hydrogen, deuterium, a halogen, a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl

group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C₁-C₃₀)alkylsilyl group, a substituted or unsubstituted tri(C₆-C₃₀)arylsilyl group, a substituted or unsubstituted di(C₁-C₃₀)alkyl(C₆-C₃₀)arylsilyl group, or a substituted or unsubstituted mono- or di-(C₆-C₃₀)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C₃-C₃₀) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

X_j to X_z each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C₁-C₃₀)alkyl group, a substituted or unsubstituted (C₃-C₃₀)cycloalkyl group, a substituted or unsubstituted (C₃-C₃₀)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C₆-C₆₀)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, -NR₅R₆, or -SiR₇R₈R₉; or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C₃-C₃₀) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:

Ma, La, Xa, Xb, and Xe to Xh are as defined in formula 2:

R₅ to R₉ each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C₁-C₃₀)alkyl group, a substituted or unsubstituted (C₃-C₃₀)cycloalkyl group, a substituted or unsubstituted (C₃-C₃₀)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C₆-C₆₀)aryl group, or a substituted or unsubstituted 3- to 30-membered heteroaryl group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C₃-C₃₀) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur:


R₁₆ and R₁₇ each independently represent hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C₁-C₃₀)alkyl group, a substituted or unsubstituted (C₃-C₃₀)cycloalkyl group, a substituted or unsub-

stituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, or a substituted or unsubstituted 3- to 30-membered heteroaryl group; and

R_{15} represents hydrogen, deuterium, a halogen, a cyano group, a carboxyl group, a nitro group, a hydroxyl group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C3-C30)cycloalkenyl group, a substituted or unsubstituted 3- to 7-membered heterocycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, or a substituted or unsubstituted 3- to 30-membered heteroaryl group.

[Claim 4]

The organic electroluminescent device according to claim 1, wherein La in formula 2 represents a single bond, or is represented by one selected from the following formulas 10 to 19:

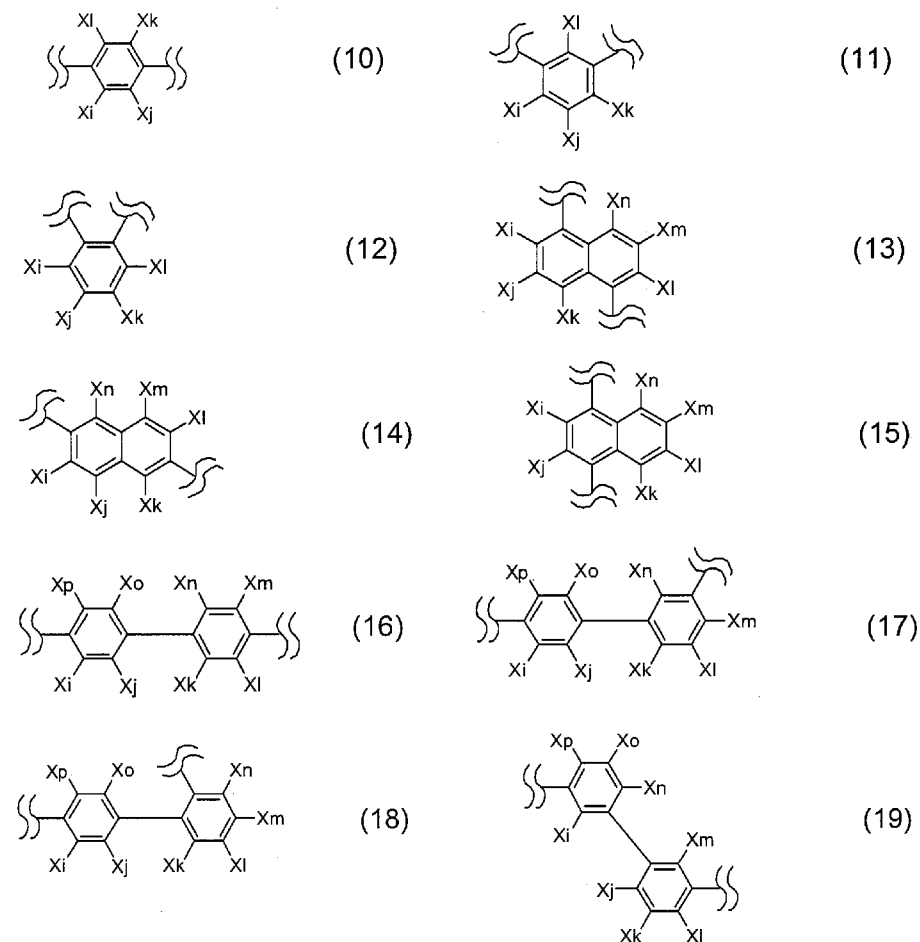


wherein










X_i to X_p each independently represent hydrogen, deuterium, a halogen.










a cyano group, a substituted or unsubstituted (C1-C30)alkyl group, a substituted or unsubstituted (C2-C30)alkenyl group, a substituted or unsubstituted (C2-C30)alkynyl group, a substituted or unsubstituted (C3-C30)cycloalkyl group, a substituted or unsubstituted (C6-C60)aryl group, a substituted or unsubstituted 3- to 30-membered heteroaryl group, a substituted or unsubstituted tri(C1-C30)alkylsilyl group, a substituted or unsubstituted tri(C6-C30)arylsilyl group, a substituted or unsubstituted di(C1-C30)alkyl(C6-C30)arylsilyl group, or a substituted or unsubstituted mono- or di-(C6-C30)arylamino group: or are linked between adjacent substituents to form a substituted or unsubstituted mono- or polycyclic, (C3-C30) alicyclic or aromatic ring whose carbon atom(s) ring may be replaced with at least one hetero atom selected from nitrogen, oxygen and sulfur.


- [Claim 5] The organic electroluminescent device according to claim 1, wherein Ma in formula 2 is a monocyclic-based heteroaryl group selected from the group consisting of pyrrolyl, imidazolyl, pyrazolyl, triazinyl, tetrazinyl, triazolyl, tetrazolyl, pyridyl, pyrazinyl, pyrimidinyl and pyridazinyl, or a fused ring-based heteroaryl group selected from the group consisting of benzoimidazolyl, isoindolyl, indolyl, indazolyl, benzothiadiazolyl, quinolyl, isoquinolyl, cinnolinyl, quinazolinyl, naphthyridinyl, quinoxalinyl, carbazolyl and phenanthridinyl.
- [Claim 6] The organic electroluminescent device according to claim 1, wherein A₁ and A₂ in formula 1 each independently represent phenyl, biphenyl, terphenyl, naphthyl, fluorenyl, phenanthrenyl, anthracenyl, indenyl, triphenylenyl, pyrenyl, tetracenyl, perylenyl, chrysenyl, naphthacenyl, or fluoranthenyl.
- [Claim 7] The organic electroluminescent device according to claim 1, wherein Xa to Xh in formula 2 each independently represent hydrogen: a cyano group: a (C6-C15)aryl group which is unsubstituted or substituted with a tri(C6-C10)arylsilyl group, or a 10- to 20-membered heteroaryl group which is unsubstituted or substituted with a (C6-C12)aryl group: or are linked between adjacent substituents to form a substituted or unsubstituted benzene, a substituted or unsubstituted indole, a substituted or unsubstituted indene, a substituted or unsubstituted benzofuran, or a substituted or unsubstituted benzothiophene.
- [Claim 8] The organic electroluminescent device according to claim 1, wherein the triarylsilyl as X₁ to X₁₆ in formula 1 is triphenylsilyl.
- [Claim 9] The organic electroluminescent device according to claim 1, wherein


the compound represented by formula 1 is selected from the group consisting of the following compounds:

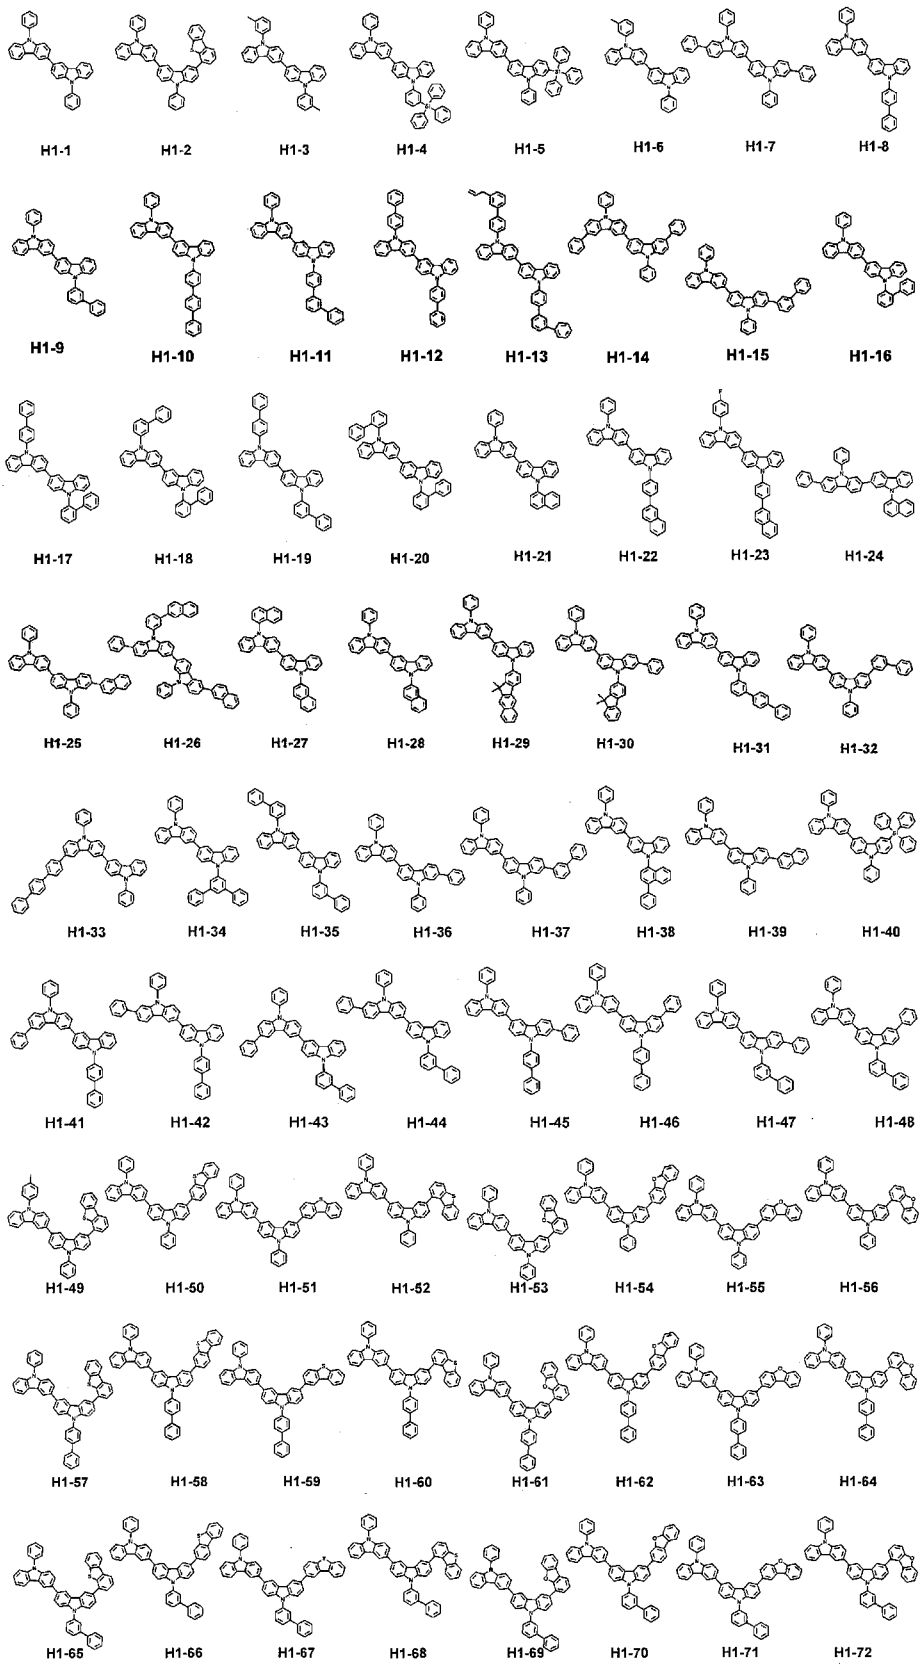

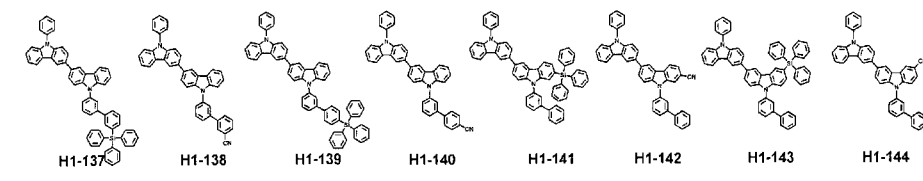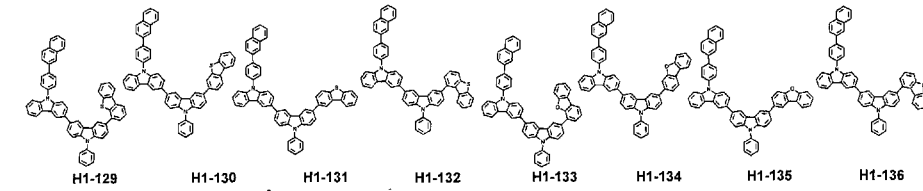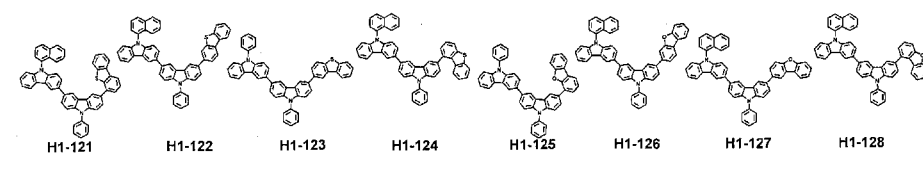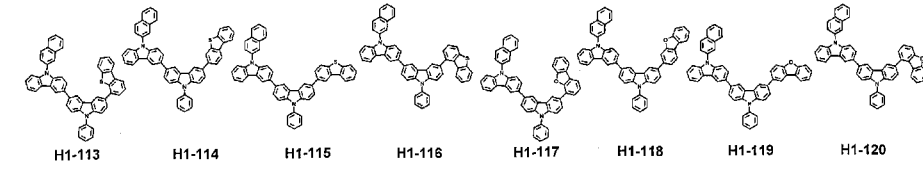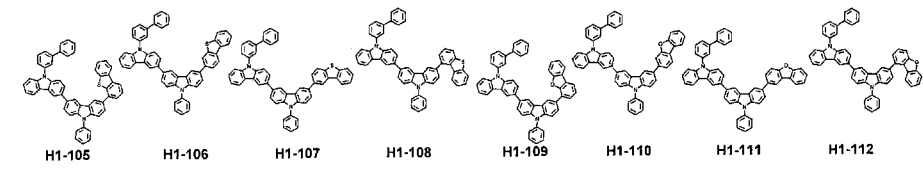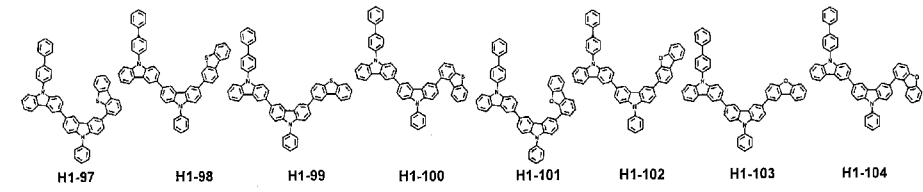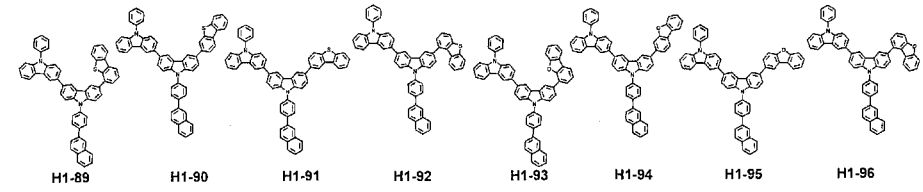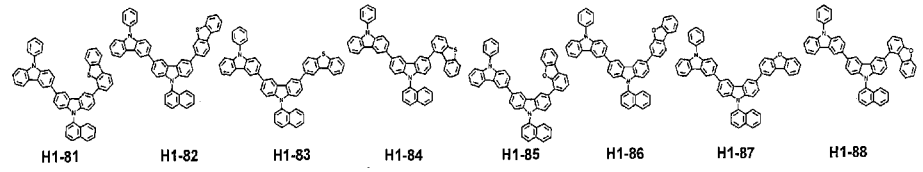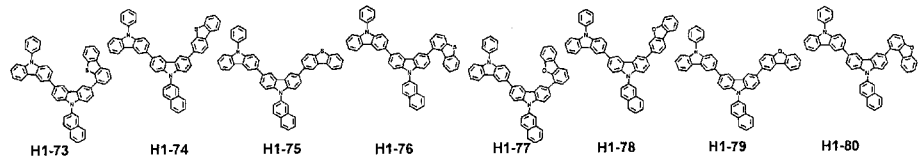

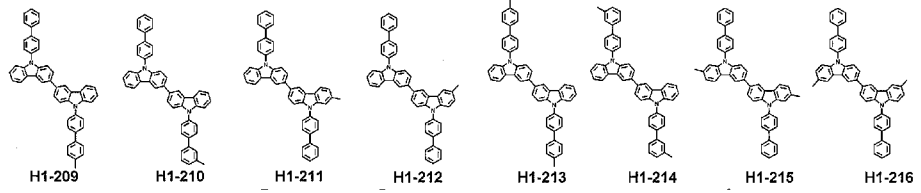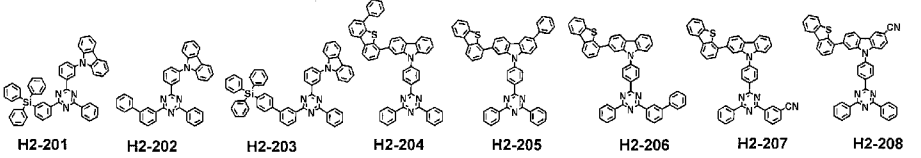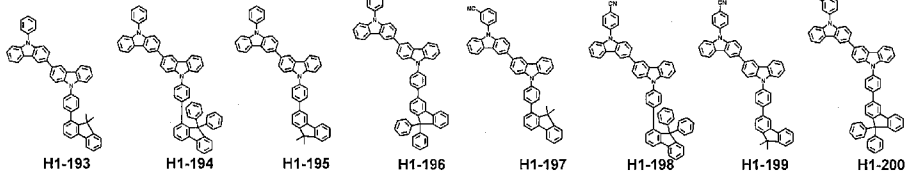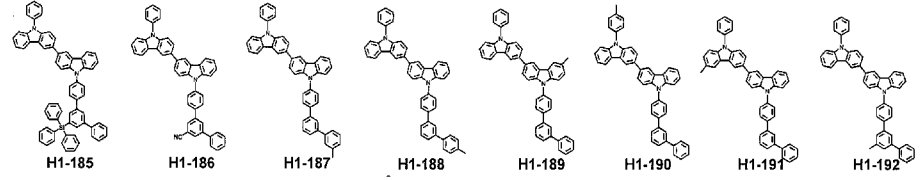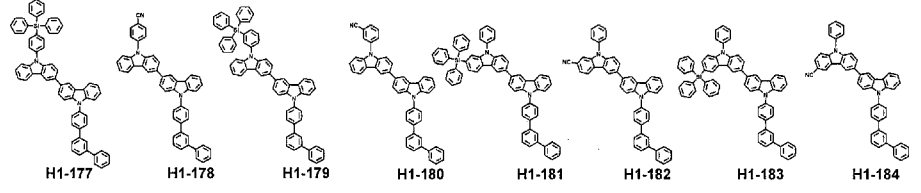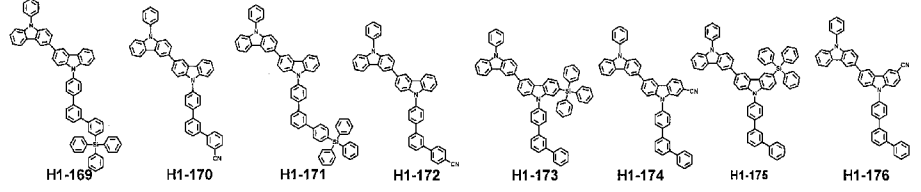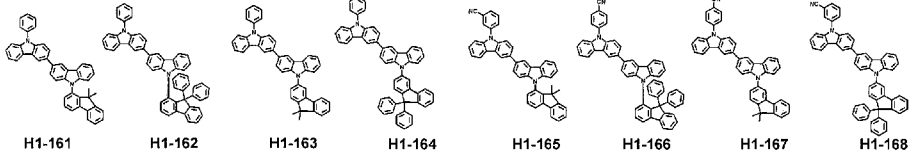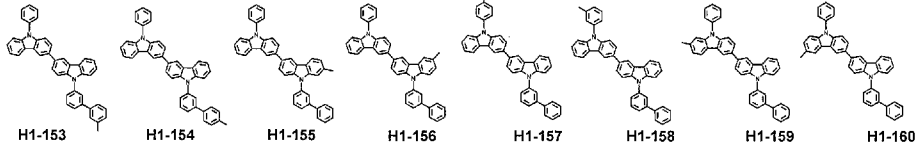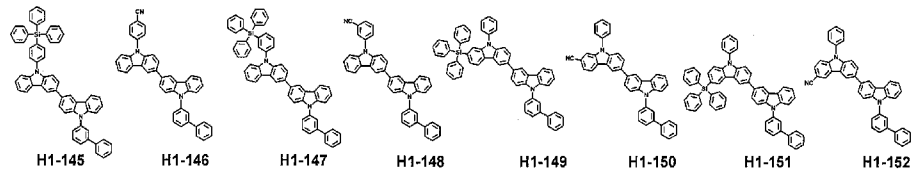


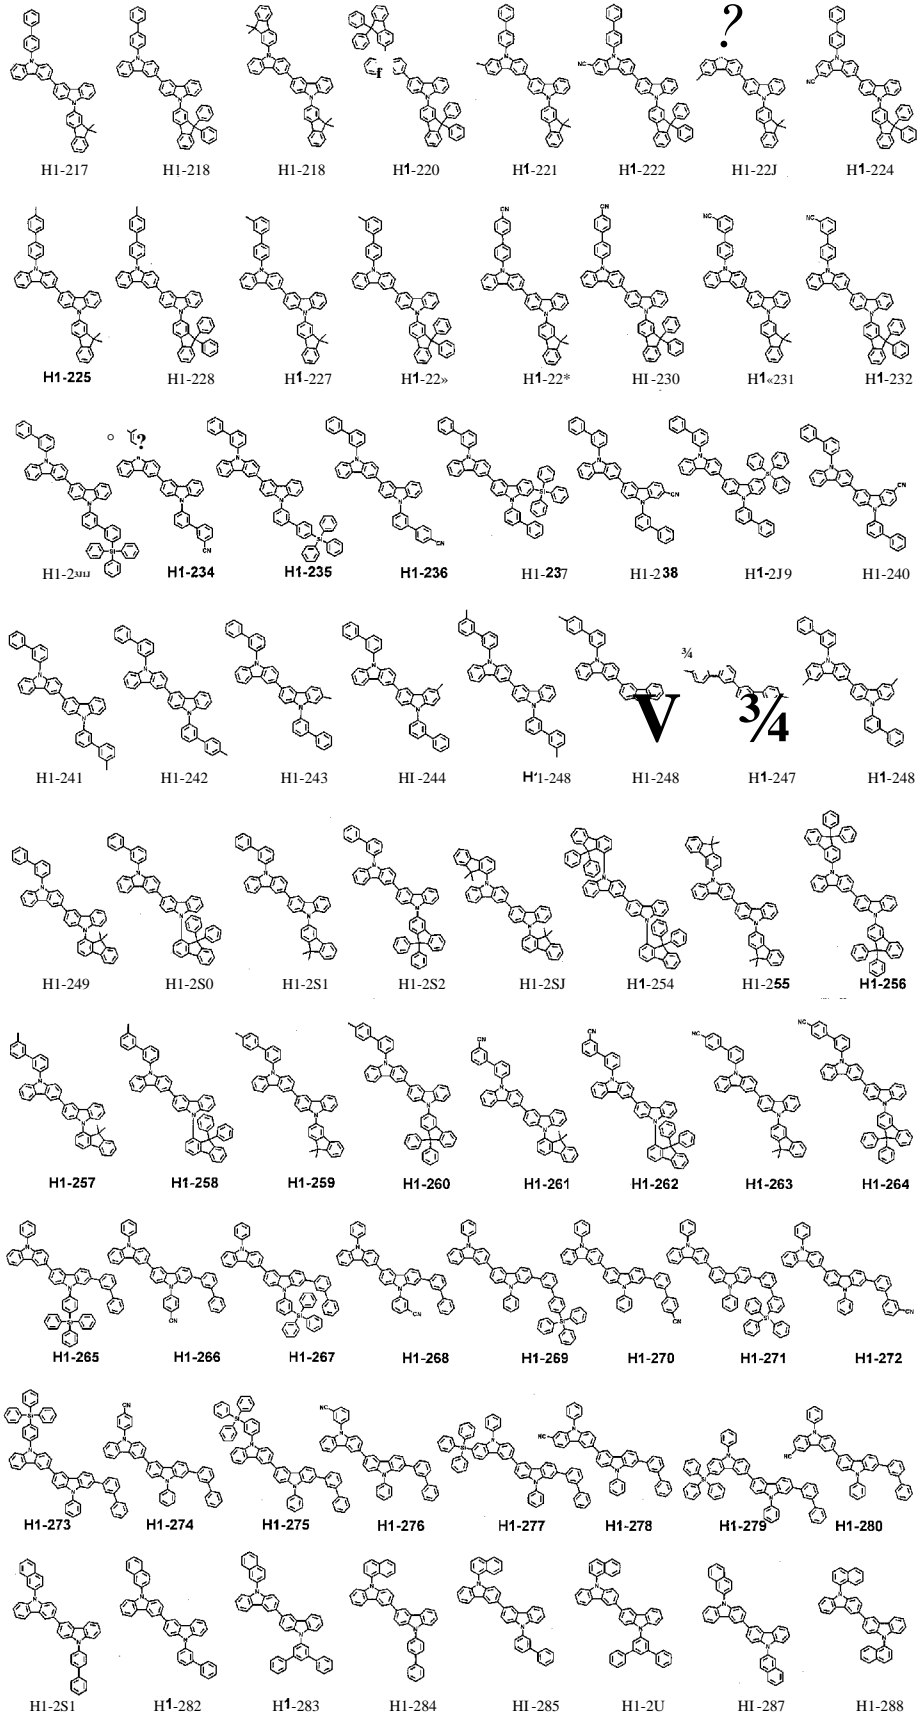


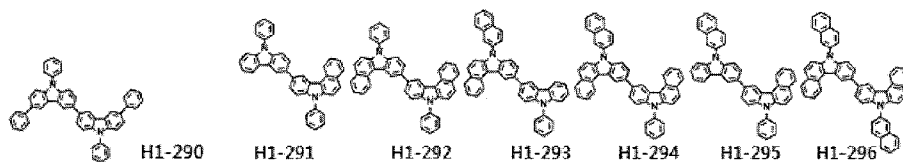


[Claim 10]

The organic electroluminescent device according to claim 1, wherein the compound represented by formula 2 is selected from the group consisting of the following compounds:

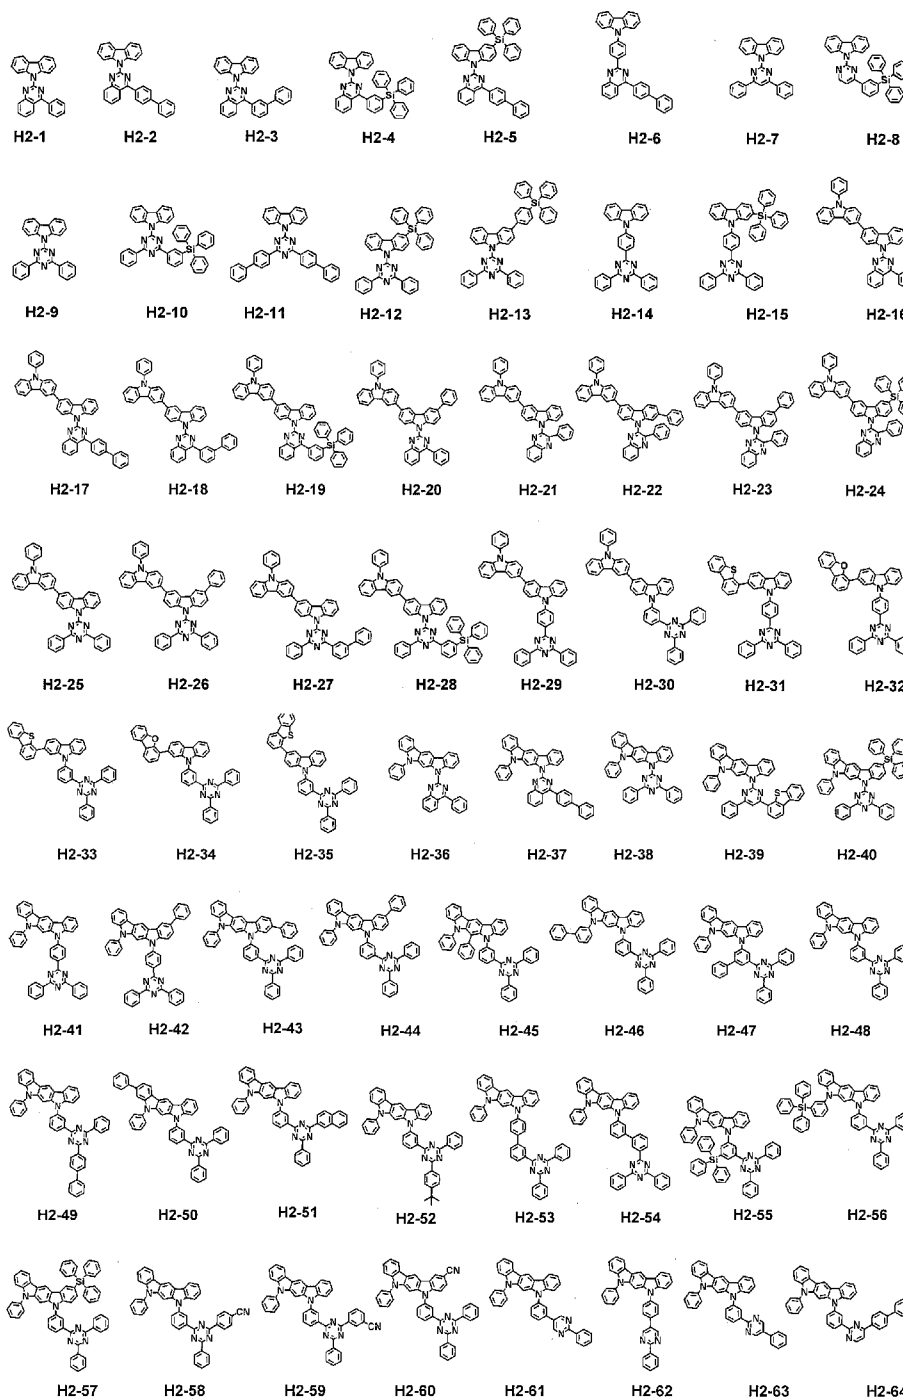





H2-65 H2-66 H2-67 H2-68 H2-69 H2-70 H2-71 H2-72




H2-73 H2-74 H2-75 H2-76 H2-77 H2-78 H2-79 H2-80




H2-81 H2-82 H2-83 H2-84 H2-85 H2-86 H2-87 H2-88




H2-89 H2-90 H2-91 H2-92 H2-93 H2-94 H2-95 H2-96




H2-97 H2-98 H2-99 H2-100 H2-101 H2-102 H2-103 H2-104




H2-105 H2-106 H2-107 H2-108 H2-109 H2-110 H2-111 H2-112




H2-113 H2-114 H2-115 H2-116 H2-117 H2-118 H2-119 H2-120




H2-121 H2-122 H2-123 H2-124 H2-125 H2-126 H2-127 H2-128





H2-129 H2-130 H2-131 H2-132 H2-133 H2-134 H2-135 H2-136





H2-137 H2-138 H2-139 H2-140 H2-141 H2-142 H2-143 H2-144

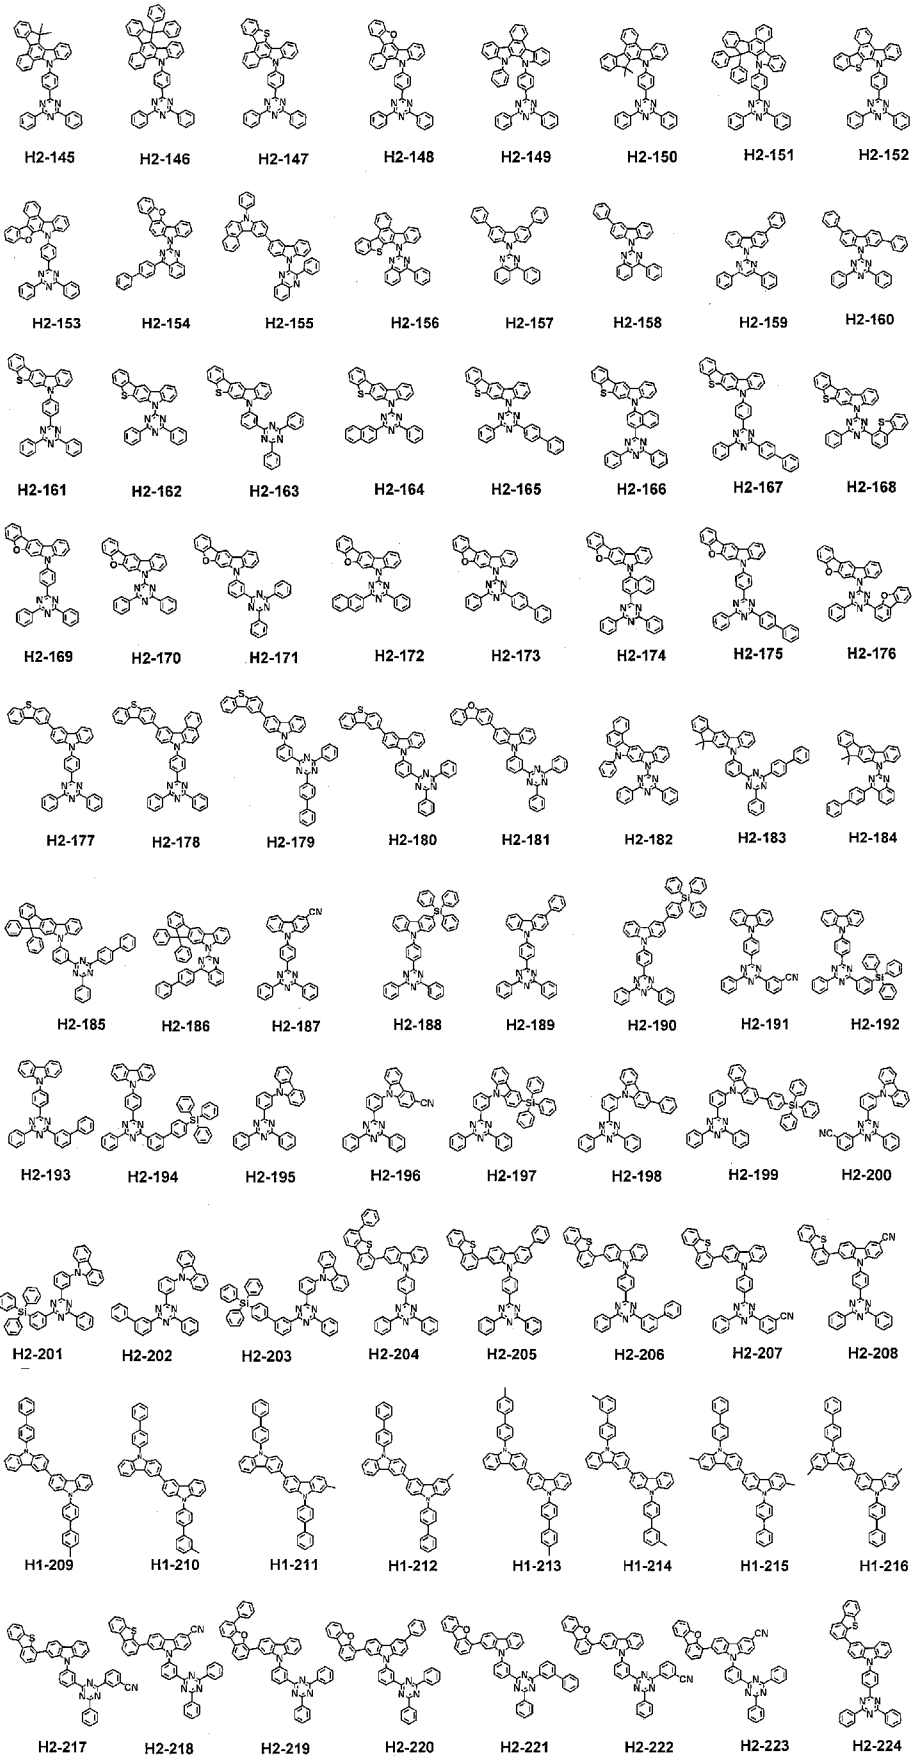


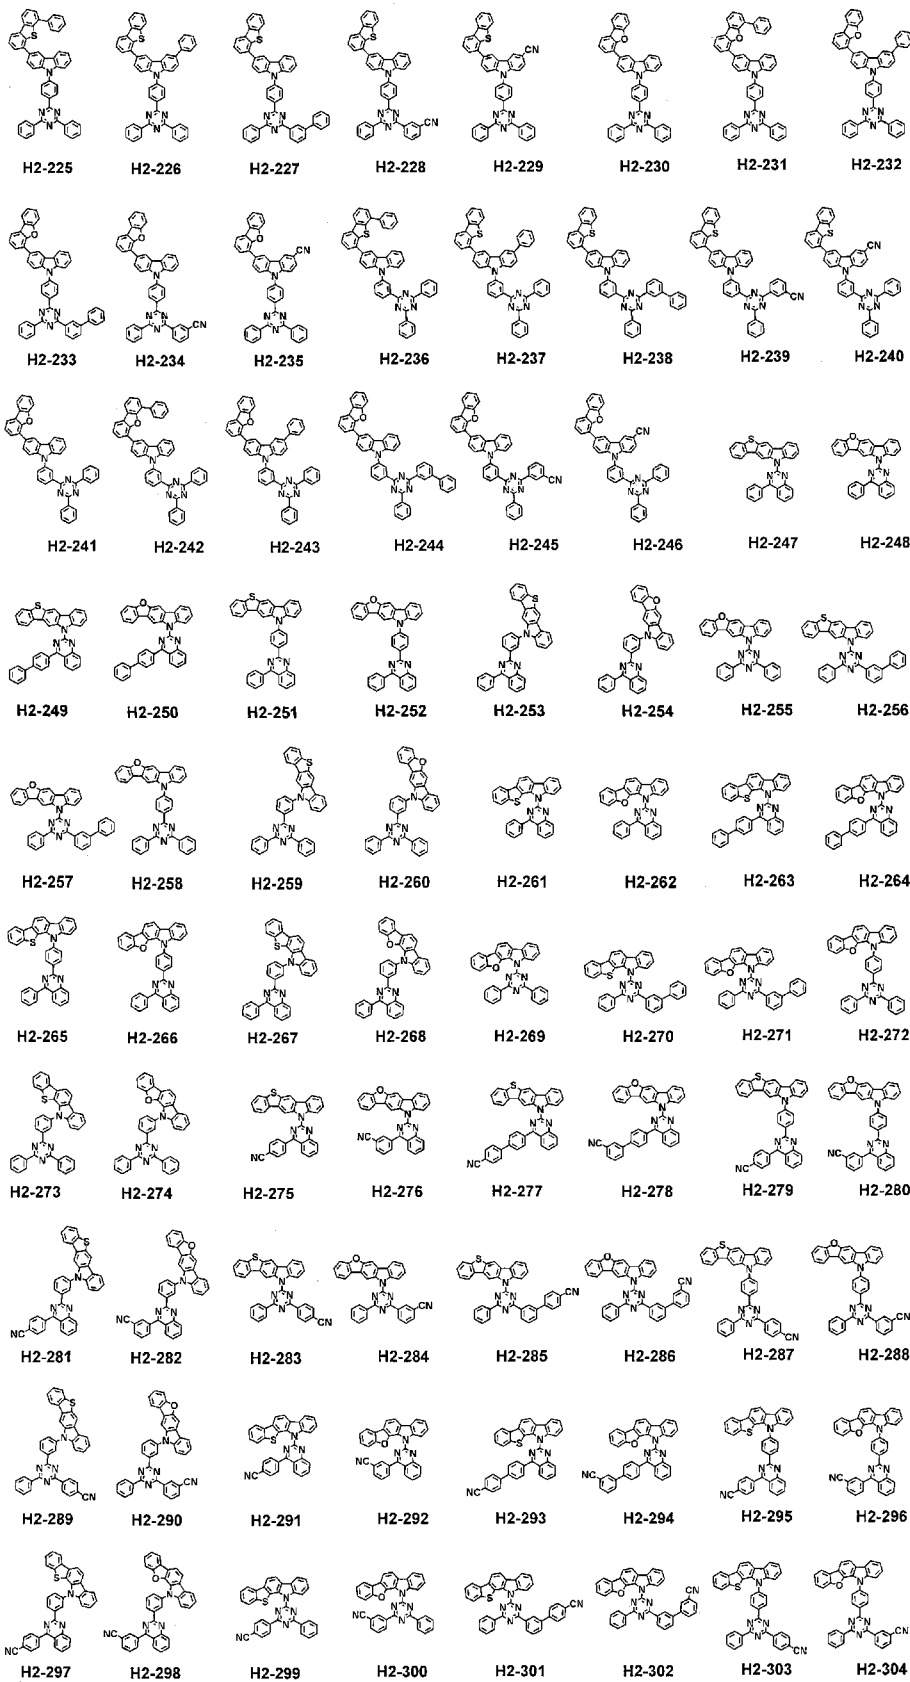

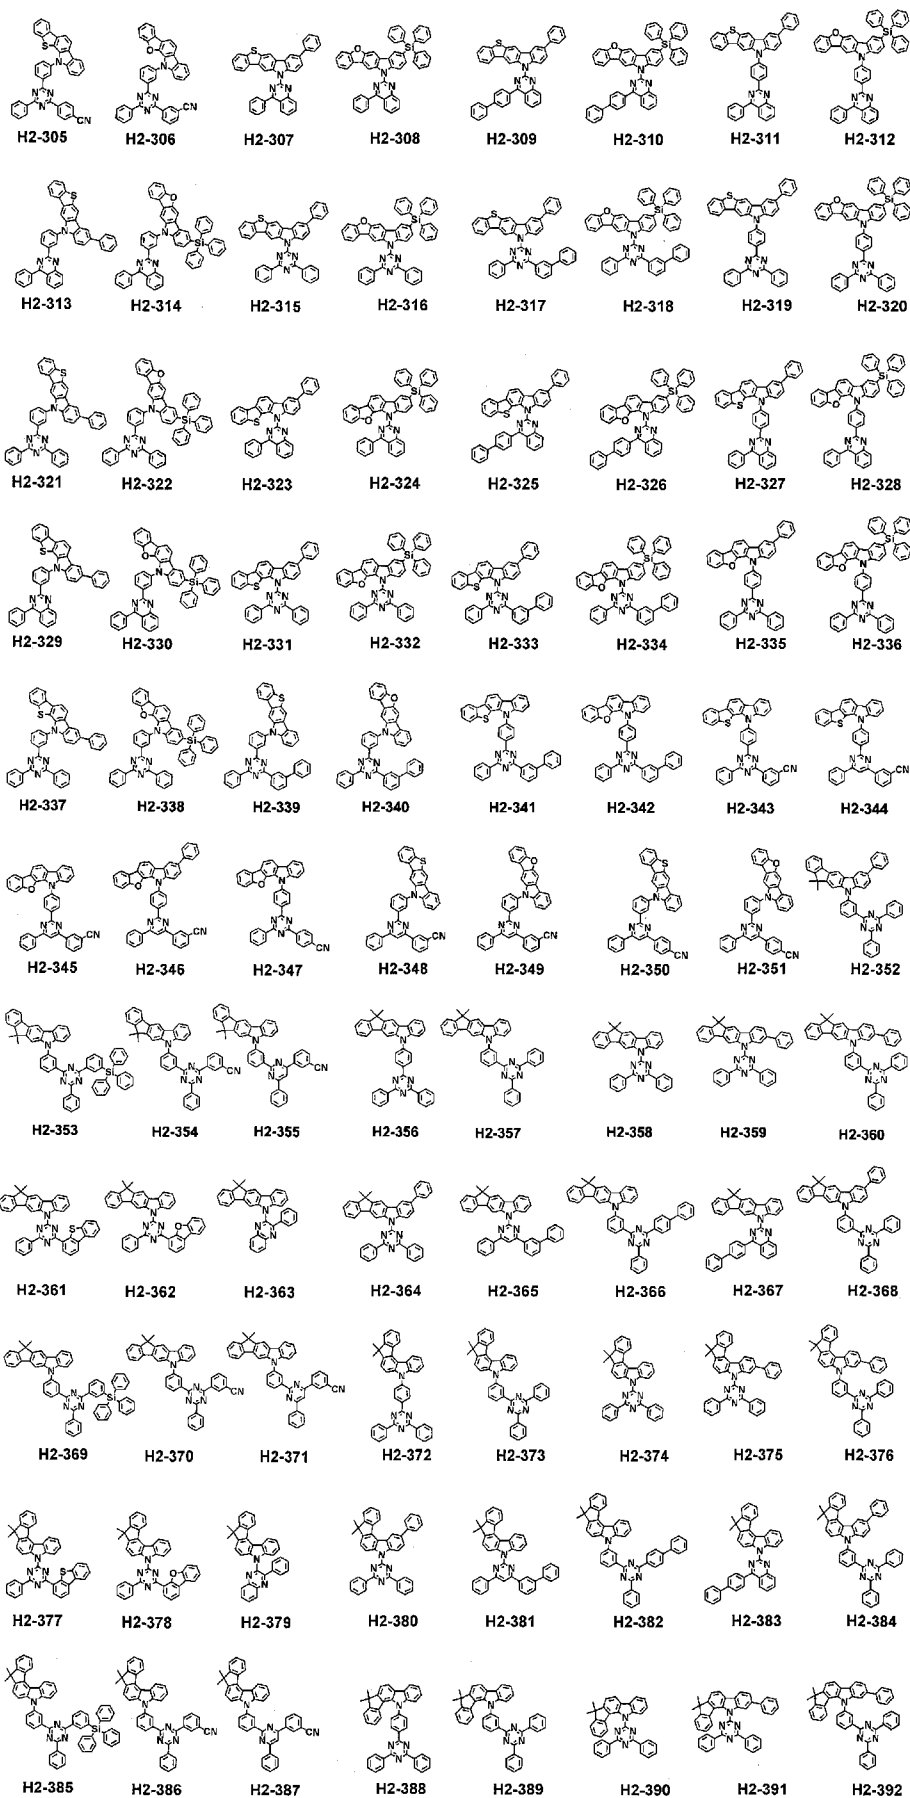


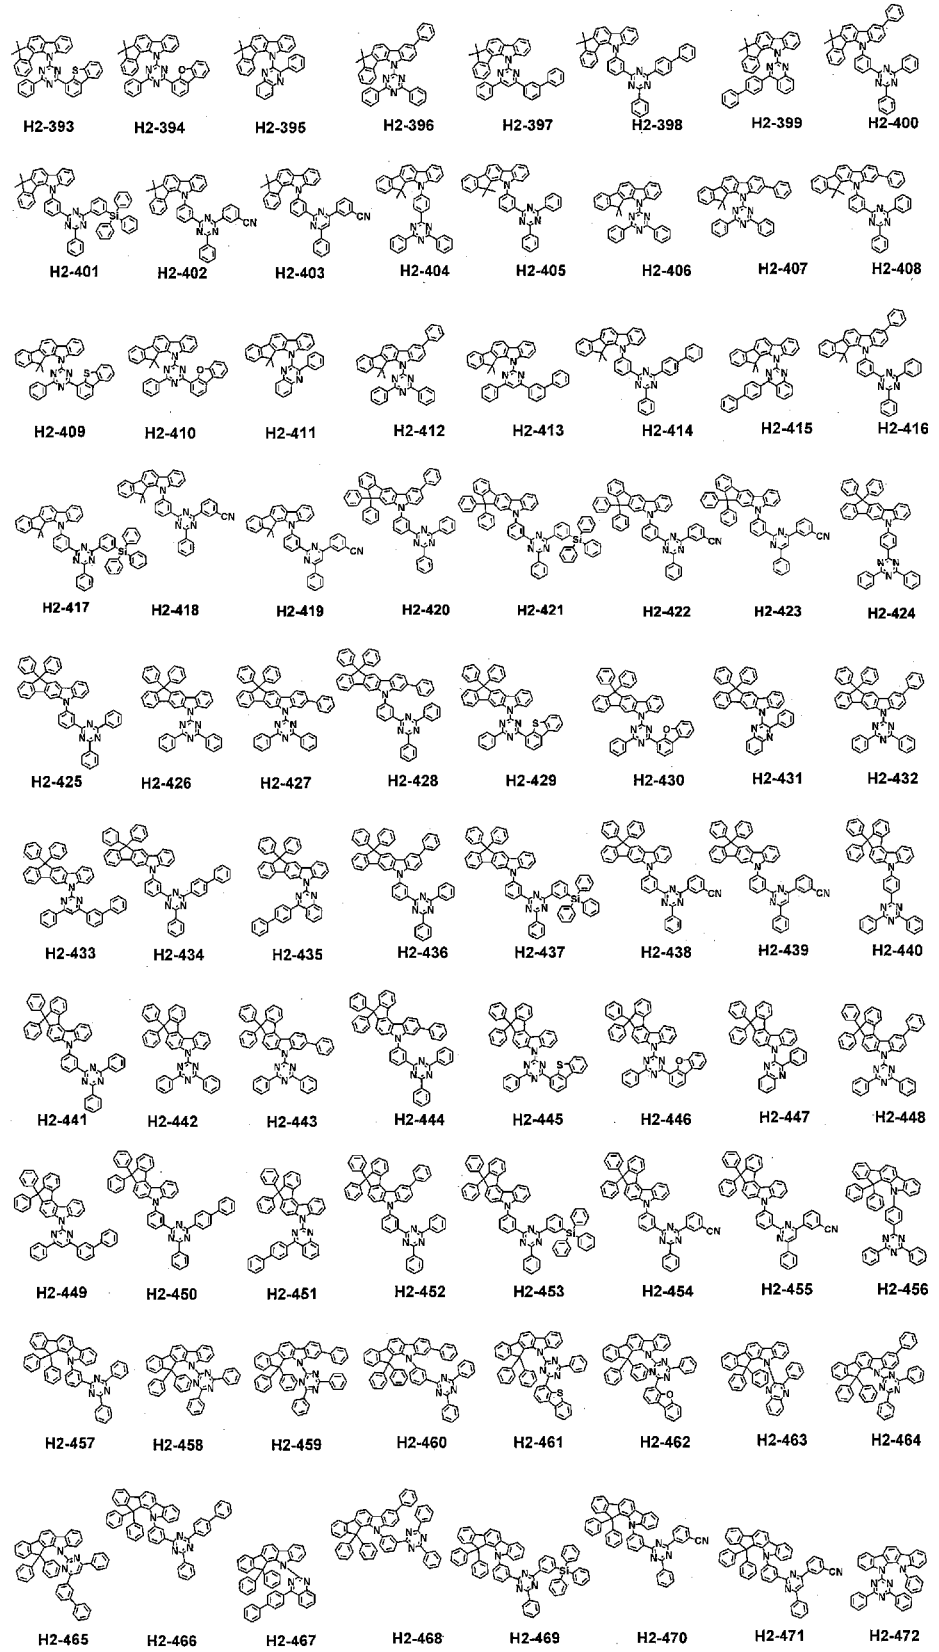

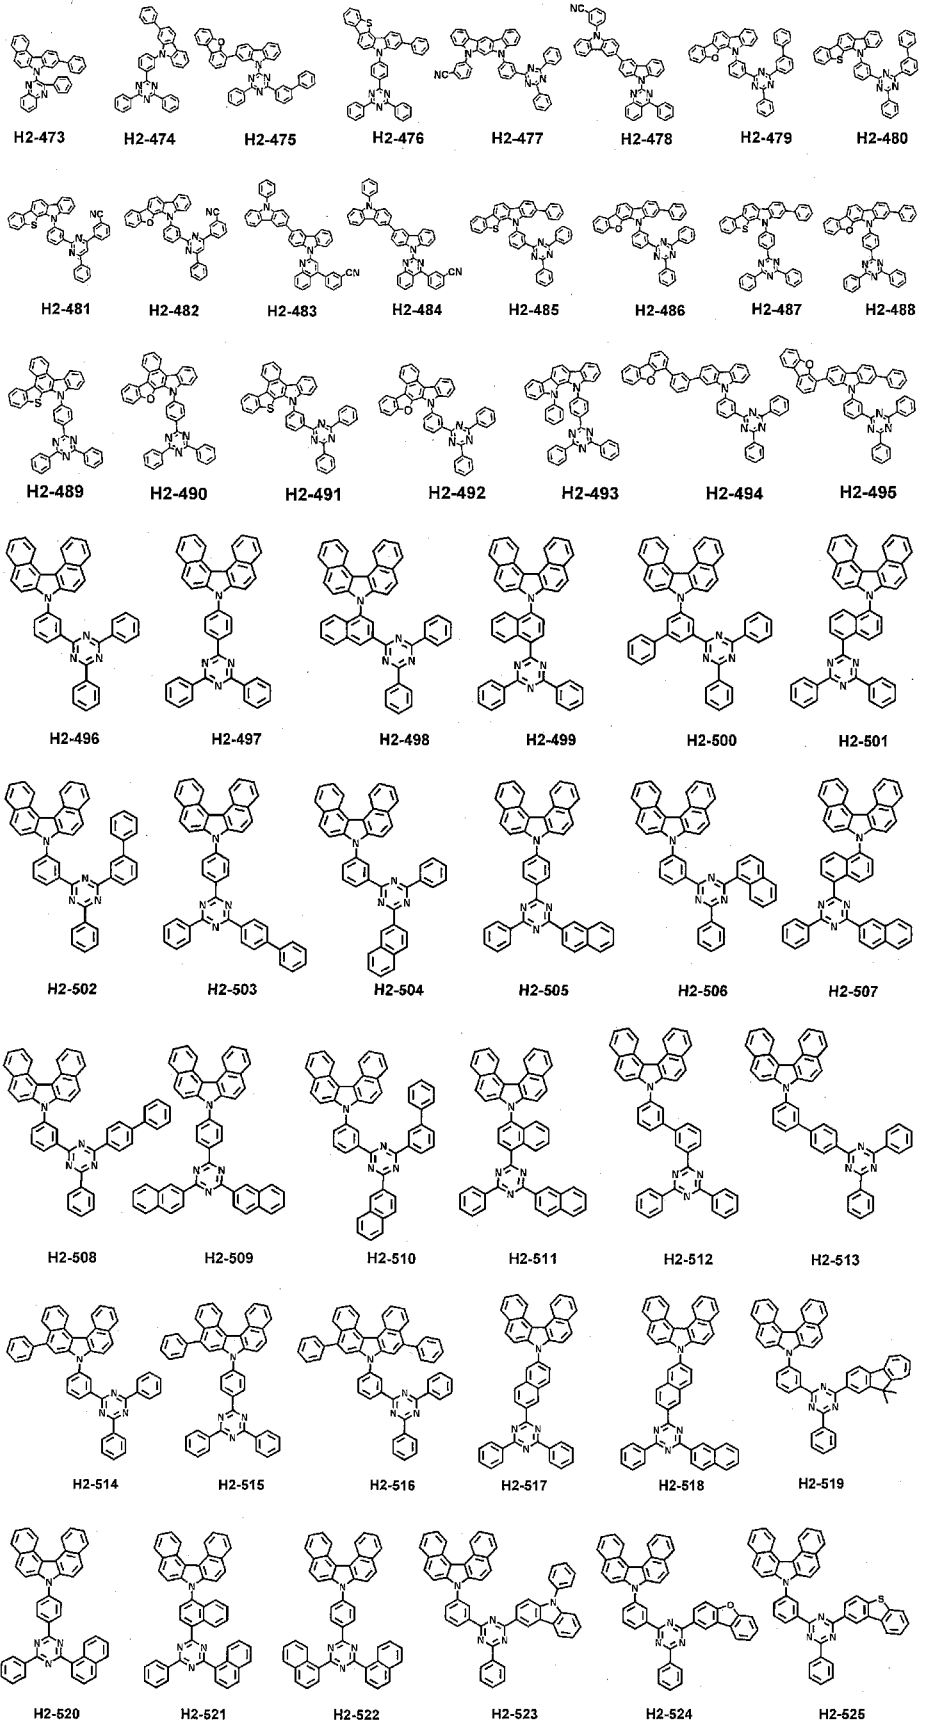


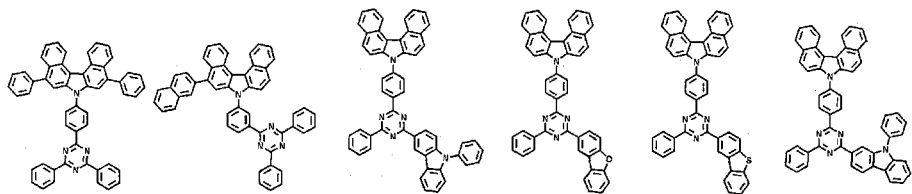


H2-526 H2-527 H2-528 H2-529 H2-530 H2-531

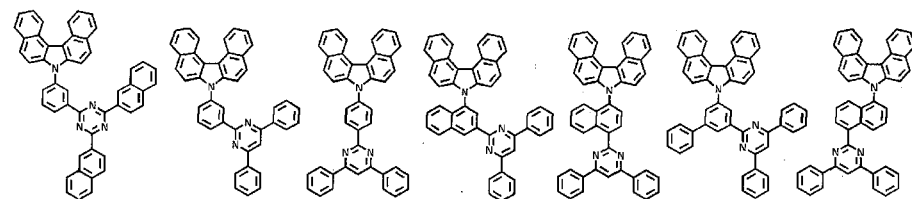


H2-532 H2-533 H2-534 H2-535 H2-536 H2-537 H2-538

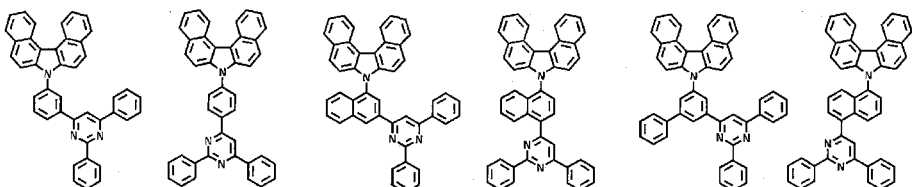


H2-539 H2-540 H2-541 H2-542 H2-543 H2-544

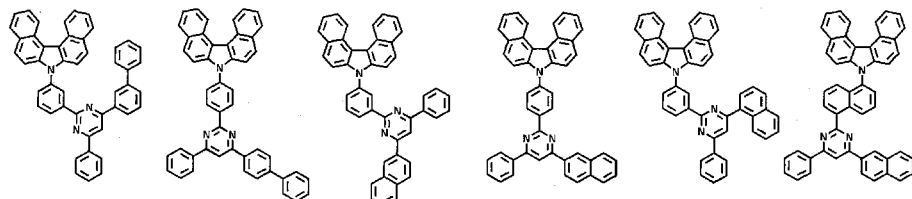


H2-545 H2-546 H2-547 H2-548 H2-549 H2-550

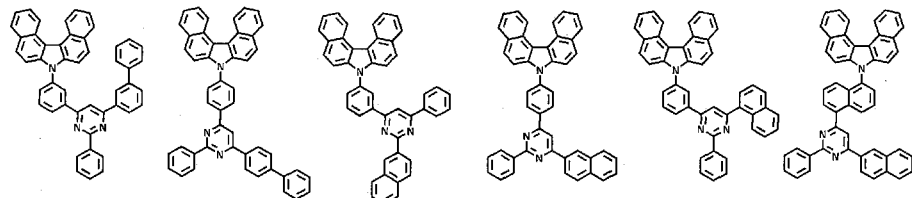


H2-551 H2-552 H2-553 H2-554 H2-555 H2-556

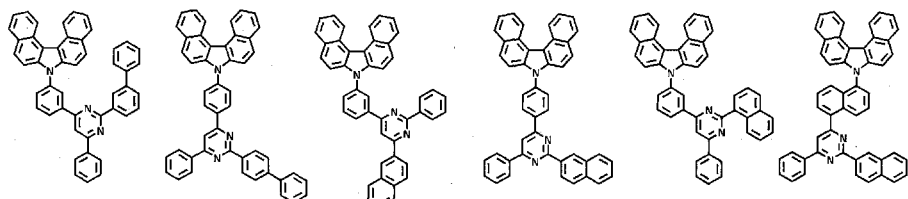


H2-557 H2-558 H2-559 H2-560 H2-561 H2-562

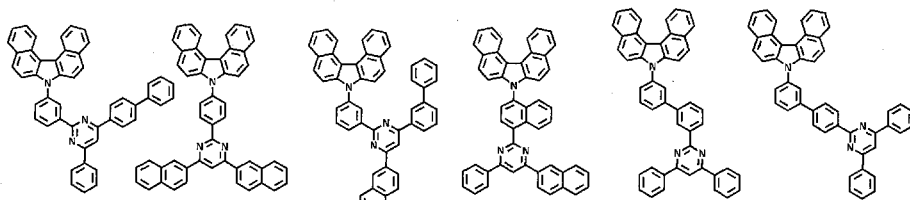


H2-563 H2-564 H2-565 H2-566 H2-567 H2-568




H2-569




H2-570




H2-571




H2-572




H2-573




H2-574




H2-575




H2-576




H2-577




H2-578




H2-579




H2-580




H2-581




H2-582




H2-583




H2-584




H2-585




H2-586




H2-587




H2-588




H2-589




H2-590




H2-591




H2-592




H2-593




H2-594




H2-595




H2-596




H2-597




H2-598




H2-599




H2-600




H2-601




H2-602




H2-603




H2-604




H2-605



H2-606



H2-607

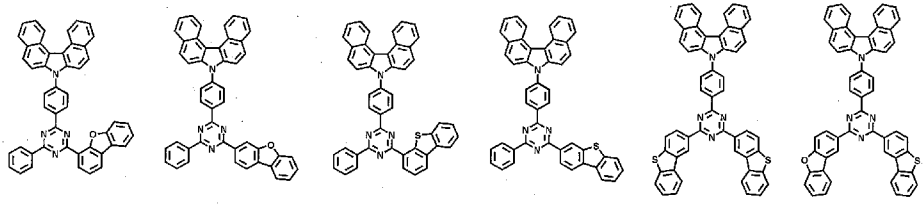

H2-608


H2-609

H2-610

H2-611

H2-612


H2-613

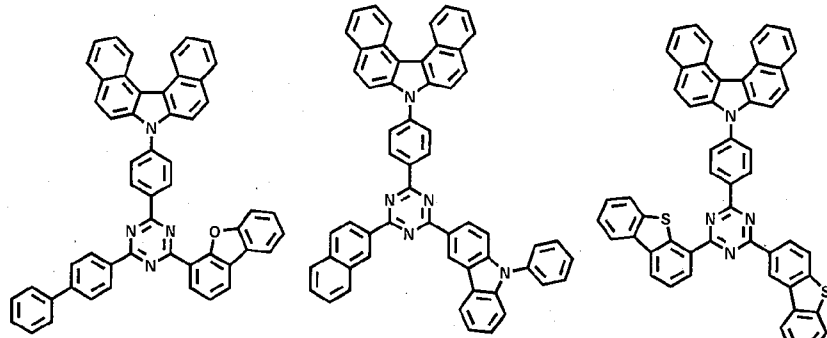

H2-614

H2-615

H2-616

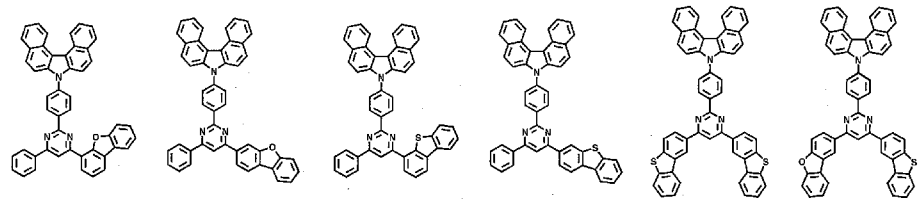

H2-617


H2-618

H2-619

H2-620

H2-621

H2-622

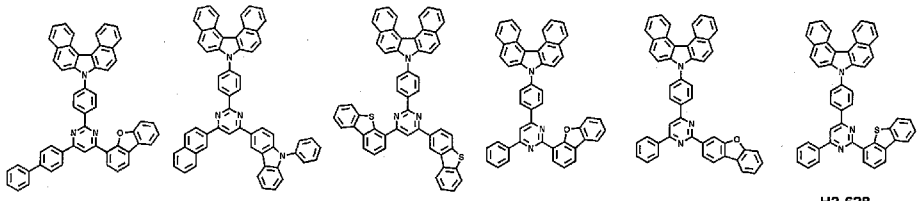

H2-623


H2-624

H2-625

H2-626

H2-627

H2-628

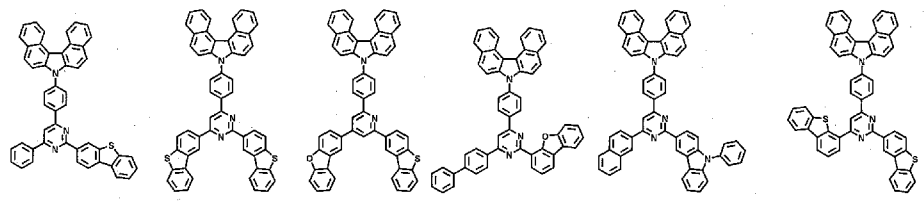

H2-629


H2-630

H2-631

H2-632

H2-633

H2-634






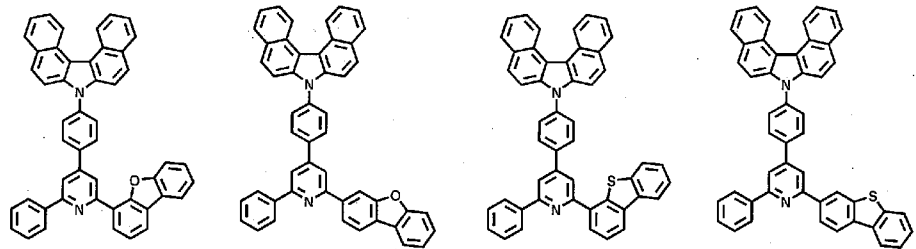


H2-635

H2-636

H2-637

H2-638

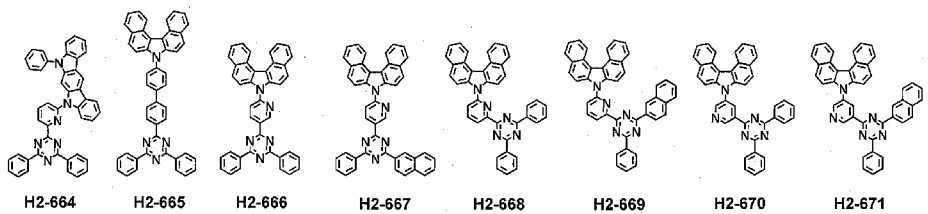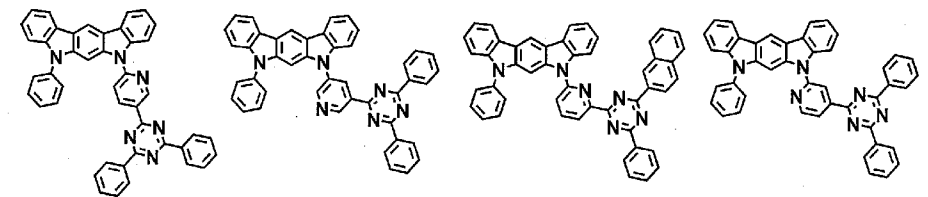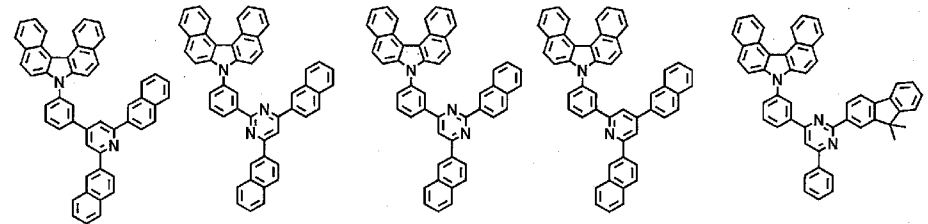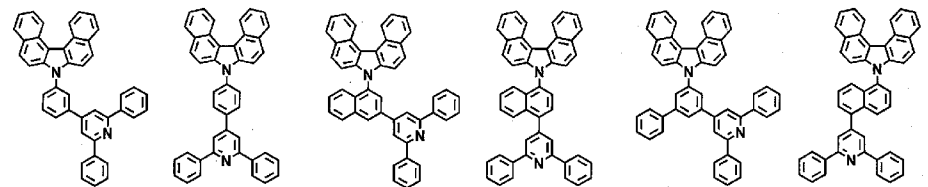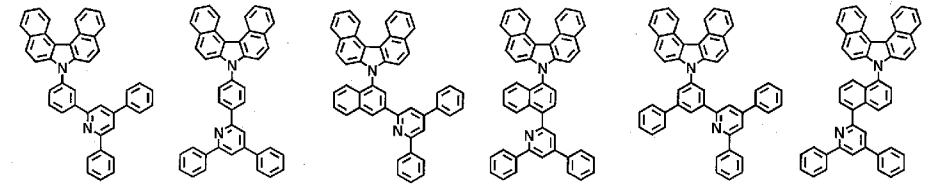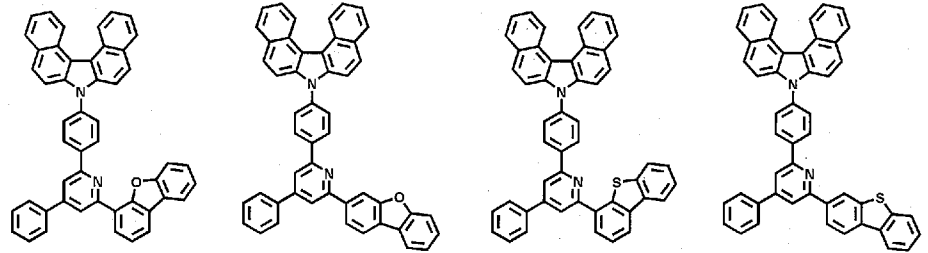

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2015/003485

A. CLASSIFICATION OF SUBJECT MATTER

C09K 11/06 (2006.01) H01L 27/32 (2006.01) H01L 51/54 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

STN: databases REGISTRY and CAPLUS; structure search based on formulae 1 and 2 of claim 1.

Inventor names were search in Espacenet combined with H01L IPC mark in some instances to narrow large answer sets.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	

 Further documents are listed in the continuation of Box C
 See patent family annex

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 26 May 2015	Date of mailing of the international search report 26 May 2015
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustalia.gov.au	Authorised officer Chetan Makani AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. 0262832896

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/KR2015/003485
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/02341 19 A1 (IDEMITSU KOSAN CO., LTD.) 12 September 2013 See table 1 (comparative example 1) and table 2 (several examples, e.g. example 6)	1 to 10
X	WO 201 3/1 12557 A1 (UNIVERSAL DISPLAY CORPORATION) 01 August 2013 See example 12 in table 4 on page 48	1 to 10
X	WO 2014/038677 A1 (IDEMITSU KOSAN CO., LTD.) 13 March 2014 See example 9 in table 1 on page 97	1 to 10
X	US 2014/0042469 A1 (SEMICONDUCTOR ENERGY LABORATORY CO., LTD.) 13 February 2014 See example 1 (pages 19 to 21), in particular paragraph 0251	1 to 10
X	WO 2013/1 87896 A1 (UNIVERSAL DISPLAY CORPORATION) 19 December 2013 see examples 3 to 8 in table 1 on page 75	1 to 10
X	WO 201 3/147205 A1 (IDEMITSU KOSAN CO., LTD.) 03 October 201 3 See example 8 in table 2 on page 126	1 to 10
X	WO 201 1/155507 A1 (IDEMITSU KOSAN CO., LTD.) 15 December 201 1 See examples 3 and 4 in table 1 (paragraph 0251 on page 78)	1 to 10
X	JP 2014-049539 A (IDEMITSU KOSAN CO., LTD.) 17 March 2014 See the working example of paragraphs 0106 to 0108	1 to 10
X	WO 2013/058343 A1 (IDEMITSU KOSAN CO., LTD.) 25 April 201 3 See example 3 in table 1 on page 153	1 to 10
P,X	WO 2014/096961 A1 (MERCK PATENT GMBH) 26 June 2014 See the example devices in table 1 from page 95 onwards, compounds M2 and M3 (page 95)	1 to 4, 6, 7
P,X	WO 2014/087913 A1 (IDEMITSU KOSAN CO., LTD.) 12 June 2014 See example 1 in paragraph 0174	1 to 4, 7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2015/003485

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 2013/02341 19 A1	12 September 2013	CN 103959503 A	30 Jul 2014
		EP 2790239 A1	15 Oct 2014
		JP WO2013084881 A1	27 Apr 2015
		KPv 20140108637 A	12 Sep 2014
		TW 201326121 A	01 Jul 2013
		TW 201332970 A	16 Aug 2013
		US 2014001446 A1	02 Jan 2014
		US 201415 1647 A1	05 Jun 2014
		WO 201 308488 1 A1	13 Jun 2013
		WO 201 3084885 A1	13 Jun 2013
		WO 201 3 145923 A1	03 Oct 201 3
		WO 2013/1 12557 A1	01 August 2013
US 2014374728 A1	25 Dec 2014		
WO 2014/038677 A1	13 March 2014	CN 104603 107 A	06 May 2015
		TW 201410672 A	16 Mar 2014
US 2014/0042469 A1	13 February 2014	CN 1035795 15 A	12 Feb 2014
		JP 20140568 14 A	27 Mar 2014
		KR 20140020768 A	19 Feb 2014
WO 2013/1 87896 A1	19 December 2013		
WO 2013/147205 A1	03 October 2013	US 2015060801 A1	05 Mar 2015
WO 201 1/1 55507 A1	15 December 2011	EP 2581957 A1	17 Apr 2013
		JP 201 3201 153 A	03 Oct 201 3
		US 2013075716 A1	28 Mar 2013
		US 89877 15 B2	24 Mar 2015
JP 2014-049539 A	17 March 2014	US 2014167003 A1	19 Jun 2014
WO 2013/058343 A1	25 April 2013	JP WO2013058343 A1	02 Apr 2015
		KR 20140092332 A	23 Jul 2014
		TW 201335333 A	01 Sep 2013
		US 2014299865 A1	09 Oct 2014
WO 2014/096961 A1	26 June 2014	None	
WO 2014/08791 3 A1	12 June 2014	JP 20141 10348 A	12 Jun 2014

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2015/003485

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report**Patent Family Member/s****Publication Number****Publication Date****Publication Number****Publication Date****End of Annex**

专利名称(译)	多组分主体材料和包含其的有机电致发光器件		
公开(公告)号	EP3129446A1	公开(公告)日	2017-02-15
申请号	EP2015777273	申请日	2015-04-07
[标]申请(专利权)人(译)	罗门哈斯电子材料有限公司		
申请(专利权)人(译)	罗门哈斯电子材料KOREA LTD.		
当前申请(专利权)人(译)	罗门哈斯电子材料KOREA LTD.		
[标]发明人	AHN HEE CHOON KIM YOUNG KWANG MOON DOO HYEON LEE SU HYUN LEE SEON WOO KIM CHI SIK PARK KYOUNG JIN KIM NAM KYUN CHOI KYUNG HOON SHIM JAE HOON CHO YOUNG JUN LEE KYUNG JOO		
发明人	AHN, HEE-CHOON KIM, YOUNG-KWANG MOON, DOO-HYEON LEE, SU-HYUN LEE, SEON-WOO KIM, CHI-SIK PARK, KYOUNG-JIN KIM, NAM-KYUN CHOI, KYUNG-HOON SHIM, JAE-HOON CHO, YOUNG-JUN LEE, KYUNG-JOO		
IPC分类号	C09K11/06 H01L27/32 H01L51/54		
CPC分类号	C09K11/025 C09K11/06 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1033 C09K2211/1037 C09K2211/1044 C09K2211/1059 C09K2211/1088 C09K2211/1092 H01L51/0067 H01L51/0072 H01L51/0085 H01L51/5016 H01L2251/5384 C07D209/82 H01L51/0058 H01L51/0071 H01L51/50 C09K2211/185 H01L51/0052 H01L51/0073 H01L51/0074 H01L51/0094		
代理机构(译)	霍顿MARK PHILLIP		
优先权	1020140041844 2014-04-08 KR 1020140086754 2014-07-10 KR 1020150042704 2015-03-26 KR		
其他公开文献	EP3129446A4		
外部链接	Espacenet		
摘要(译)			

本发明涉及一种有机电致发光器件，其包括在阳极和阴极之间的至少一个发光层，其中所述发光层包含主体和磷光掺杂剂；宿主由多组分宿主化合物组成；至少第一种多组分主体化合物的主体化合物是含有芳基的特定双咪唑衍生物，第二种主体化合物是含有含氮杂芳基的特定咪唑衍生物。根据本发明，与使用单组分主体化合物的常规装置相比，使用多组分主体化合物的有机电致发光器件具有高效率 and 长寿命。