



(11) **EP 1 605 432 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
06.10.2010 Bulletin 2010/40

(51) Int Cl.:
G09G 3/32^(2006.01)

(21) Application number: **05011549.2**

(22) Date of filing: **28.05.2005**

(54) **Organic electro luminescent display device and driving method thereof**

Organische Elektrolumineszenzanzeige und Ansteuerverfahren dafür

Panneau d'affichage électroluminescent en matière organique et procédé de commande correspondant

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

(30) Priority: **01.06.2004 KR 2004039748**
09.06.2004 KR 2004042115

(43) Date of publication of application:
14.12.2005 Bulletin 2005/50

(73) Proprietor: **LG Display Co., Ltd.**
Seoul 150-721 (KR)

(72) Inventors:
• **Kim, Hak Su**
Gangbuk-gu
Seoul (KR)

• **Lee, Jae Do**
Gumi-si
Gyeongsangbuk-do (KR)
• **Ha, Won Kyu**
Yeongdeok-gun
Gyeongsangbuk-do (KR)

(74) Representative: **Viering, Jentschura & Partner**
Postfach 22 14 43
80504 München (DE)

(56) References cited:
WO-A-03/034390 US-A1- 2002 169 575

EP 1 605 432 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This application claims the benefit of the Korean Patent Application Nos. P2004-39748 and P2004-42115 filed on June 1, 2004, and, on June 9, 2004.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to an electro luminescence display device, and more particularly to an organic electro luminescence display device using a pre-charge, and a driving method thereof.

Description of the Related Art

[0003] Recently, there have been developed various flat panel displays that can reduce their weight and size which are the disadvantages of the cathode ray tube CRT. The flat panel display includes the liquid crystal display LCD, the field emission display FED, the plasma display panel PDP, the electro luminescence EL display device and etc.

[0004] The PDP is relatively simple in its structure and fabricating process, thus it is most advantageous in being made into large screen, but there is a big disadvantage in that its luminous efficiency and brightness is low and its power consumption is high.

[0005] The LCD is mainly used as a display device of a notebook computer and its demand is increasing. However, the LCD is fabricated by a semiconductor process, thus there is difficulty in being made into large screen. And, the LCD is not a self luminous device to require a separate light source, thus there is a disadvantage in that its power consumption is high due to the light source. Further, the LCD has a disadvantage in that its viewing angle is narrow and light loss is great due to optical devices such as a polarizing sheet, a prism sheet, a diffusion plate and etc.

[0006] The EL display device is generally classified into an inorganic EL display device and an organic EL display device, and it has an advantage in that its response speed is fast and its luminous efficiency, brightness and viewing angle is big. The EL display device can display a picture at a high brightness of tens of thousands of $[cd/m^2]$ by a voltage of about 10[V], and it has been applied to most of the EL display devices which are commonly used.

[0007] A unit element of the organic EL display device, as shown in FIG. 1, includes an anode 2 formed of a transparent conductive material on a glass substrate 1; and a hole injection layer 3, a light-emitting layer 4 formed of an organic material and a cathode 5 formed of a metal having a low work function are deposited thereon. If an electric field is applied between the anode 2 and the cathode 5, holes within the hole injection layer 3 and electrons within the metal are progressed to and combined together

in the light-emitting layer 4. Then, a phosphorous material within the light-emitting layer 4 is excited and transitioned to generate a visible light. At this moment, the brightness is in proportion to a current between the anode 2 and the cathode 5.

[0008] The organic EL display device is divided into passive type and active types.

[0009] FIG. 2 is a circuit diagram equivalently representing part of a passive type organic EL display device, and FIG. 3 is a waveform representing scan signal and data signal waveforms of the passive type organic EL display device.

[0010] Referring to FIGs. 2 and 3, the passive type EL display device includes a plurality of data lines D1 to D3 and a plurality of scan lines S1 to S3 which cross each other; and organic EL elements OLED formed at intersections between the data lines DL1 to D3 and the scan lines S1 to S3.

[0011] The data lines D1 to D3 are connected to the anode of the organic EL element OLED to supply data currents Id to the anode of the organic EL element OLED.

[0012] The scan lines S1 to S3 are connected to the cathode of the organic EL element OLED to supply scan pulses SP1 to SP3 synchronized with the data currents Id to the cathode of the organic EL element OLED.

[0013] The organic EL element OLED emits light in proportion to the current flowing between the anode and the cathode for a display period DT when the scan pulses SP1 to SP3 are applied.

[0014] The organic EL elements OLED of the organic EL display device are charged with the current for a response time RT which is delayed by resistance components of the data lines D1 to D3 and a capacitance which is in the organic EL elements OLED, thus there is a problem in that the response speed and brightness are low. In order to compensate the low response speed of the organic EL elements OLED, there has recently been a trend that a pre-charge period PCHA is provided as a non-display period between the display periods DT and the organic EL elements OLED are pre-charged during the pre-charge period PCHA. However, even the organic EL display device is pre-charged, there is a problem in that the response time RT of the organic EL elements OLED is lengthened in a low gray level as in FIG. 4.

[0015] Further, in a driving method of pre-charging the organic EL display device, there is a problem in that the response speed is fast but the organic EL elements OLED are over-charged by an overshoot in a high gray level. This is because the pre-charged current Ipre is fixed to be the value of gray level of data x the pre-charged constant " 10" regardless of the gray level of data as in FIG. 5. The current Ioled of the organic EL elements OLED which is charged with the fixed pre-charged current Ipre increases exponentially as the gray level increases as in FIG. 6. As a result, if the organic EL elements OLED are driven by the pre-charging method, its brightness is not changed linearly but increases exponentially as the gray level increases, thus there is a prob-

lem in that the gray level expression ability becomes low.

[0016] Besides, most of the pre-charging method used currently has a problem in that power consumption is high and the current is not sufficiently pre-charged to the organic EL element OLED in the low gray level range such that the gray level expression ability is low in the low gray level.

[0017] WO 03/034390 A discloses a method for applying an adaptive current boost to pre-charge current-driven OLEDs. According to this document, a current is driven through an OLED connected to a first matrix connection for a first conduction period of time, changes are sensed during the first conduction period in a voltage of a path of the driven conduction period current, and a quantity of charge to be delivered to pre-charge a second matrix connection during a pre-charge period is adjusted upon the sensed voltage changes.

[0018] US 2002/169575 A1 discloses a method to provide a proper pre-charge voltage to OLED elements wherein a value of the device conduction voltage is determined by measuring the voltage induced at an OLED element and a parasitic capacitance when fully charged to the steady state, and the device conduction voltage is used as a calibration value of a pre-charge voltage.

SUMMARY OF THE INVENTION

[0019] Accordingly, it is an object of the present invention to provide an organic electro luminescence display device that there is no overcharge, its response speed is fast and its gray level expression ability is high, and a driving method thereof.

[0020] Further, it is another object of the present invention to provide an organic electro luminescence display device that consumes low power and has high gray level expression ability in a low gray level, and a driving method thereof.

[0021] In order to achieve these and other objects of the invention, an organic electro luminescence display device according to an aspect of the present invention includes: a display panel where a plurality of data lines cross a plurality of gate lines, and electro luminescence elements are arranged at intersections thereof; a pre-charge driver to select a pre-charge current corresponding to a gray level of data to be supplied to the electro luminescence elements and to supply the pre-charge current to the electro luminescence elements through the data line; and a data driver to supply the data to the electro luminescence elements which are charged with the pre-charge current.

[0022] The organic electro luminescence display device further includes: a scan driver to supply a scan pulse synchronized with the data to the scan lines.

[0023] The organic electro luminescence display device further includes: a lookup table in which a pre-charge current data is registered, wherein the pre-charge current data indicates the current amount of the pre-charge current in correspondence to a gray level of the data; and a

controller which reads the pre-charge current data registered in the lookup table, and controls the pre-charge driver in accordance with the pre-charge current data.

[0024] In the organic electro luminescence display device, the pre-charge driver includes: a plurality of current sources of which current values are different from one another; a selection part to select any one of the plurality of current sources as the pre-charge current; and a first switch device to supply the pre-charge current to the data line for a non-display period.

[0025] In the organic electro luminescence display device, the data driver includes: a second switch device to supply the data current to the data line for a display period subsequent to the non-display period.

[0026] In the organic electro luminescence display device, the pre-charge current has the same current value within a gray level range inclusive of a plurality of gray levels and a different current value in gray levels out of the gray level range.

[0027] A driving method of an organic electro luminescence display device where a plurality of data lines cross a plurality of scan lines and electro luminescence elements are arranged at intersections thereof, according to another aspect of the present invention includes the steps of: selecting a pre-charge current corresponding to a gray level of data; supplying the pre-charge current to the electro luminescence elements through the data line; and supplying a data to the electro luminescence elements which are charged with the pre-charge current.

[0028] The driving method further includes the step of: supplying a scan pulse synchronized with the data to the scan lines.

[0029] The driving method further includes the step of: providing a pre-charge current data which indicates the current amount of the pre-charge current in correspondence to a gray level of the data; and reading the pre-charge current data corresponding to the gray level of the data, and controls the pre-charge current in accordance with the pre-charge current data.

[0030] In the driving method, the step of selecting the pre-charge current includes the step of: selecting any one of a plurality of current sources, of which the current values are different from one another, as the pre-charge current; and supplying the pre-charge current to the data line for a non-display period.

[0031] In the driving method, the step of charging the electro luminescence elements with the data includes the step of: supplying the data to the data line for a display period subsequent to the non-display period.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] These and other objects of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

[0033] FIG. 1 is a sectional diagram briefly representing a unit element of a related art organic electro lumi-

nescence display device;

[0034] FIG. 2 is a diagram equivalently representing part of an array of a passive type organic electro luminescence display device;

[0035] FIG. 3 is a waveform diagram representing a delay of a response time which is generated in a driving method of the related art organic electro luminescence display device;

[0036] FIG. 4 is a waveform diagram representing a related art pre-charge driving method;

[0037] FIG. 5 is a graph representing a pre-charge current applied to the pre-charge driving method as in FIG. 4;

[0038] FIG. 6 is a graph representing a deterioration of gray level expression ability resulted from the pre-charge driving method as in FIG. 4;

[0039] FIG. 7 is a block diagram representing an organic electro luminescence display device according to a first embodiment of the present invention;

[0040] FIG. 8 is a graph representing a pre-charge current applied to the organic electro luminescence display device and a driving method thereof according to the first embodiment of the present invention;

[0041] FIG. 9 is a circuit diagram representing a pre-charge driver shown in FIG. 7 in detail;

[0042] FIG. 10 is a circuit diagram equivalently representing a display panel and its drive circuits shown in FIG. 7;

[0043] FIG. 11 is a waveform diagram explaining a drive method of the organic electro luminescence display device according to the first embodiment of the present invention;

[0044] FIG. 12 is a block diagram representing an organic electro luminescence display device according to a second embodiment of the present invention;

[0045] FIG. 13 is a circuit diagram representing a pre-charge driver shown in FIG. 12 in detail; and

[0046] FIG. 14 is a waveform diagram explaining a driving method of the organic electro luminescence display device according to the second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0047] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0048] Hereinafter, the preferred embodiments of the present invention will be described in detail with reference to FIGs. 7 to 14.

[0049] Referring to FIG. 7, the organic EL display device according to the first embodiment of the present invention includes a display panel 64 where $m \times n$ numbers of organic EL elements OLED are arranged in a matrix type; a data driver 61 to generate a data current; a pre-charge driver 62 to generate a pre-charge current; a scan driver 63 to generate a scan pulse which is synchronized with the data current; and a pre-charge/data controller

65 to control the pre-charge driver 62 in accordance with a lookup table 66.

[0050] In the display panel 64, m numbers of data lines D1 to D m and n numbers of scan lines S1 to S n cross each other and the organic EL elements OLED are arranged between intersections thereof.

[0051] The data driver 61 includes a shift register circuit to sequentially sample data, and a current source of a current mirror circuit or a current sink circuit. The data driver 61 samples a digital video data and supplies a data current corresponding to the gray level value of the digital video data RGB to the data lines D1 to D m through the pre-charge driver 62.

[0052] The pre-charge driver 62 makes a pre-charge current different in accordance with the gray level of the data RGB under control of the pre-charge/data controller 65, and supplies the pre-charge current to the data lines D1 to D m prior to the data current.

[0053] The scan driver 63 includes a shift register circuit to sequentially shift a scan pulse and sequentially supplies a scan pulse synchronized with the data current to the scan lines S1 to S n .

[0054] The pre-charge/data controller 65 judges the gray level value of the digital video data RGB and read a pre-charge current data corresponding to the gray level value in the lookup table 66. And, the pre-charge/data controller 65 receives a vertical/horizontal synchronization signal and a clock signal (not shown), selectively generates control signals SEL1, SEL2 corresponding to the pre-charge current data, and controls the pre-charge driver 62 by use of the control signals SEL1, SEL2. Herein, the first control signal SEL1 is a control signal that is for being generated during a scan period, i.e., the pre-charge period, prior to the display period to select the amount of pre-charge current, and supplying the pre-charge current to the data lines D1 to D m during the pre-charge period. And, the second control signal SEL2 is a control signal for supplying the data current to the data lines D1 to D m during the scan period, i.e., the display period.

[0055] Pre-charge current data corresponding to each gray level of the digital video data RGB are registered in the lookup table 66. The lookup table 66 is stored at a read-only-memory ROM. The pre-charge current data registered in the lookup table 66 has a value which is divided into fixed gray level ranges, and the value is set in the ratio that the amount of pre-charge current decreases exponentially as the gray level increases as shown in FIG. 8.

[0056] In FIG. 7, the pre-charge driver 62 and the pre-charge/data controller 65 can be integrated into one chip, and the lookup table 66 can also be integrated with the pre-charge driver 62 and the pre-charge/data controller 65.

[0057] The foundation for the fact that the amount of pre-charge current should decrease exponentially as the gray level increases is as follow. In order to increase the gray level expression ability in the whole gray level range,

the pre-charge current required in case that the gray level is changed in the low gray level range should be increased at a higher rate in case that the gray level is changed in the middle gray level or high gray level range which is higher than that. For example, assuming that the gray level of maximum brightness is 100% and the gray level value of data is changed at the same gray level difference, the pre-charge amount required in case that the gray level is changed from 10% to 50% is much larger than the pre-charge amount required in case that the gray level is changed from 50% to 90%.

[0058] As known in FIG. 8 by the pre-charge current data registered in the lookup table 66, assuming that the maximum brightness is 100%, in the pre-charge/data controller 65, the amount of the pre-charge current I_{pre} charged in the organic EL element OLED prior to the data current is 50 times the pre-set reference pre-charge current if the gray level of the digital video data RGB is 10%, but it decreases exponentially, as the gray level increases, to 10 times the reference pre-charge current if the gray level of the digital video data RGB increases to 10%.

[0059] FIG. 9 represents a pre-charge driver 62 in detail.

[0060] Referring to FIG. 9, the pre-charge driver 62 includes a selection part 71 to select the current amount of the pre-charge current I_{pre} ; a first switch device 72A to supply the pre-charge current I_{pre} to the data line D1; and a second switch device 72B to supply a data current I_{d1} to the data line D1. The second switch device 72B might be included in the data driver 61.

[0061] The current selection part 71 selects the pre-charge current I_{pre} from any one of k numbers (but, k is a positive integer not less than 2) of current sources I_1, I_2, \dots, I_k , of which the current amount are different from each other, in response to the first selection signal SEL1 from the pre-charge/data controller 65, and supplies the selected pre-charge current I_{pre} to the first switch device 72A.

[0062] The first switch device 72A supplies the pre-charge current I_{pre} selected by the current selection part 71 to the data line D1 during the non-display period prior to the display period in response to the first selection signal SEL1 from the pre-charge/data controller 65.

[0063] The second switch device 72B supplies the data current I_{d1} from the data driver 61 to the data line D1 for the scan period, i.e., the display period, in response to the selection signal from the pre-charge/data controller 65.

[0064] FIG. 10 is a circuit diagram equivalently representing a drive circuit, signal lines D1 to Dm, S1 to Sn and an organic EL element OLED shown in FIG. 7.

[0065] Referring to FIG. 10, the reference numeral "R" is a parasitic resistor of the data line D1 to Dm, and "CAP" is a parasitic capacitance of the organic EL element OLED. And, "61A" is a constant current source included in the data driver 61 to generate the data current. "63A" is a switch device included in the scan driver 63, and it applies a ground voltage GND to the cathode of the or-

ganic EL element OLED for the display period, i.e., scan period, and supplies a positive scan bias voltage to the cathode of the organic EL element OLED for the non-display period, i.e., non-scan period. "VDD" is a high potential drive voltage applied to the constant current source, and "VSS" is a scan bias voltage applied to the cathode of the organic EL element OLED for the non-display period, i.e., non-scan period.

[0066] A driving method of the organic EL display device according to the first embodiment of the present invention will be explained in conjunction with FIGs. 10 and 11.

[0067] Referring to FIGs. 10 and 11, the first switch device 72A of the pre-charge driver 62 is turned on during the pre-charge period PCHA prior to the display period DT to supply to the data line D1 to Dm the pre-charge current I_{pre} which is selected in accordance with the gray level of the digital video data RGB by the pre-charge/data controller 65. Then, for the pre-charge period PDHA, the organic EL elements OLED are charged with the pre-charge current I_{pre} of which the current amount decreases exponentially as the gray level of the data increases as in FIG. 8. The pre-charge current I_{pre} causes the organic EL elements OLED to be pre-charged with the greater amount of current in the low gray level to reduce the response time RT , and pre-charged with the smaller amount of current in the high gray level not to be overcharged by the overshoot, when compared with the related art pre-charge method.

[0068] Subsequently to the pre-charge period PCHA, in the display period DT, the second switch device 72B is turned on, but the first switch device 72A is turned off. Then, the data current I_{d1} is supplied to the data lines D1 to Dm through the second switch device 72B of the pre-charge driver 61 for the display period DT. In synchronization with the data current I_{d1} , the switch device 63A of the scan driver 63 sequentially supplies the scan pulse of the ground voltage GND to the scan lines S1 to Sm. During the display period DT, the organic EL elements OLED emit light as the data current I_{d1} flows from the anode to the cathode by the positive bias.

[0069] As known in FIG. 11, the pre-charge current I_{pre} is applied to the organic EL elements OLED in an optimal current amount in the whole gray level range, thus the gray level is changed linearly in the whole gray level range to improve the gray level expression ability of each gray level.

[0070] On the other hand, the organic EL display device and the driving method thereof according to the first embodiment of the present invention, even though it is explained with an embodiment based on the passive method, can be applied to any known active type of organic electro luminescence display device.

[0071] Referring to FIG. 12, an organic electro luminescence display device according to a second embodiment of the present invention includes a display panel 164 in which $m \times n$ numbers of organic EL elements OLED are arranged in a matrix type; a data driver 161; a pre-

charge driver 162; a scan driver 163; a data comparison part 167; a gray level judgment part 166; and a pre-charge controller 165.

[0072] In the display panel 164, m numbers of data lines D1 to Dm and n numbers of scan lines S1 to Sn cross each other and the organic EL elements OLED are arranged between intersections thereof.

[0073] The data driver 161 includes a shift register circuit to sequentially sample data, and a current mirror circuit or a current sink circuit. The data driver 161 samples a digital video data and supplies a data corresponding to the gray level value of the data to the data lines D1 to Dm through the pre-charge driver 162.

[0074] The pre-charge driver 162, under control of the pre-charge controller 165, is charged with the pre-charge current after discharging from the data lines D1 to Dm before the data below the reference gray level α_{gs} , and selectively has the discharge generated in or charges the data lines D1 to Dm before the data of the gray level higher than the reference gray level α_{gs} are supplied to the data lines D1 to Dm. Herein, the reference gray level α_{gs} is a gray level that corresponds to the brightness of 30% - 50% when the maximum brightness of the organic EL element OLED is 100%.

[0075] The scan driver 163 includes a shift register circuit to sequentially shift a scan pulse and sequentially supplies a scan pulse synchronized with the data current to the scan lines Si to Sn.

[0076] The data comparison part 167 has a line memory to store the digital video data by the one line, and compares the data delayed by the line memory with the non-delayed data, i.e., compares the data of the previous line with the data of the current line, to supply the comparison result to the pre-charge controller 165.

[0077] The gray level judgment part 166 judges the gray level of the digital video data and supplies the gray level to the pre-charge controller 165.

[0078] The pre-charge controller 165 controls the pre-charge driver 162 so that the data lines D1 to Dm are charged after the discharge being generated therein for the non-scan period if the data supplied to the data lines D1 to Dm is judged to be the data below the reference gray level α_{gs} on the basis of the gray level judgment result from the gray level judgment part 166 and the data comparison result from the data comparison part 167. Also, the pre-charge controller 165 controls the pre-charge driver 162 so that the data lines D1 to Dm are charged or the discharge is generated in the data lines D1 to Dm for the non-scan period if the data supplied to the data lines D1 to Dm is judged to be the data above the reference gray level α_{gs} on the basis of the gray level judgment result from the gray level judgment part 166 and the data comparison result from the data comparison part 167. Herein, in case that the data is a data of the gray level higher than the reference gray level α_{gs} , the pre-charge controller 165 controls the pre-charge driver 162 so that the corresponding data line is charged during the non-scan period between the scan period of the (n-

1)th line and the scan period of nth line if the data of an nth line has a higher gray level value than the data of an (n-1)th line. But on the other hand, in case that the data is a data of the gray level higher than the reference gray level α_{gs} , the pre-charge controller 165 controls the pre-charge driver 162 so that the discharge is generated in the corresponding data line during the non-scan period between the scan period of the (n-1)th line and the scan period of nth line if the data of an nth line has a lower gray level value than the data of an (n-1)th line.

[0079] FIG. 13 represents an embodiment of the pre-charge driver 162 shown in FIG. 12.

[0080] Referring to FIG. 12, the pre-charge driver 162 includes a first switch device 162A to supply a low potential voltage Vss to the data lines D1 to Dm in response to a first control signal ϕ_1 ; a second switch device 162B to supply the pre-charge current Ipre to the data lines D1 to Dm in response to the second control signal ϕ_2 ; and a third switch device 162C to supply the data current Id1 to the data lines D1 to Dm in response to the third control signal ϕ_3 .

[0081] The low potential voltage is 0[V] or a ground voltage GND.

[0082] The control signals ϕ_1 , ϕ_2 , ϕ_3 are supplied from the pre-charge controller 165.

[0083] The first switch device 162A is connected between a low potential voltage source Vss and the data lines D1 to Dn, and is turned on in response to the first control signal ϕ_1 to generate the discharge in the data lines D1 to Dm.

[0084] The second switch device 162B is connected between a pre-charge current source Ipre and the data lines D1 to Dn, and is turned on in response to the second control signal ϕ_2 to charge the data lines D1 to Dm with the pre-charge current Ipre.

[0085] The third switch device 162C is connected between an output terminal of the data driver 161 and the data lines D1 to Dn, and is turned on in response to the third control signal ϕ_3 to supply the data current Id1 to the data lines D1 to Dm.

[0086] FIG. 14 is a diagram for explaining a driving method of the organic electro luminescence display device according to the second embodiment of the present invention, and it is a waveform diagram representing a data current supplied to the first data line and a scan pulse supplied to the first and second scan lines S1, S2.

[0087] Referring to FIG. 14, the driving method of the organic electro luminescence display device according to the present invention provides a non-scan period nsc between the scan periods sc when scan pulses Sp1, Sp2 are supplied to the scan lines S1, S2, and supplies the pre-charge current Ipre after generating the discharge in the data line D1 during the non-scan period nsc between the scan periods sc when the data currents Id1, Id2 below the reference gray level are supplied. The non-scan period nsc provide between the scan periods sc when the data below the reference gray level are supplied includes a discharge period dcha and a charge period pcha sub-

sequent to the discharge period d_{cha} .

[0088] And, the driving method of the organic electro luminescence display device according to the second embodiment of the present invention, during the non-scan period nsc between the scan periods sc when the data current I_{d3} of a gray level higher than the reference gray level is supplied, supplies the pre-charge current I_{pre} to the data line $D1$ if the data current I_{d3} is higher than the previous data current I_{d2} , but on the other hand, it generates the discharge in the data line $D1$ if the data current I_{d3} is lower than the previous data current I_{d2} .

[0089] On the other hand, the organic electro luminescence display device and the driving method thereof according to the second embodiment of the present invention, even though it is explained with an embodiment based on the passive method, can be applied to any known active type of organic electro luminescence display device.

[0090] As described above, the organic electro luminescence display device and the driving method thereof according to the present invention optimizes the current amount of the pre-charge current at each gray level of the data, thus no overcharge is in the high gray level, the response speed becomes fast and the gray level expression ability can be increased in the whole gray level.

[0091] Further, the pre-charge current is charged after generating the discharge in the data line if the data supplied to the data line is a data below the reference gray level, but on the other hand, the charge or the discharge is generated in the data line in accordance with the comparison result of the data line if the data supplied to the data line is a data above the reference gray level. As a result, the organic electro luminescence display device and the driving method thereof according to the present invention might improve the gray level expression ability in the low gray level and reduce power consumption.

[0092] Although the present invention has been explained by the embodiments shown in the drawings described above, the scope of the invention shall be determined only by the appended claims and their equivalents.

Claims

1. An organic electro luminescence display device, comprising:

a display panel (64) where a plurality of data lines ($D1-Dm$) cross a plurality of gate lines ($S1-Sn$), and electro luminescence elements (OLED) are arranged at intersections thereof; a pre-charge driver (62) adapted to select a pre-charge current and adapted to supply the pre-charge current (I_{pre}) to the electro luminescence elements through the data line; and a data driver (61) adapted to supply the data to the electro luminescence elements (OLED) which are charged with the pre-charge current

characterised in that said precharge current corresponds to a gray level of data to be supplied to the electro luminescence elements (OLED).

2. The organic electro luminescence display device according to claim 1, further comprising:

a scan driver (63) adapted to supply a scan pulse synchronized with the data to the scan lines ($S1-Sn$).

3. The organic electro luminescence display device according to claim 1, further comprising:

a lookup table (66) in which a pre-charge current data is registered, wherein the pre-charge current data indicates the current amount of the pre-charge current in correspondence to a gray level of the data; and

a controller (65) adapted to read the pre-charge current data registered in the lookup table (66), and adapted to control the pre-charge driver in accordance with the pre-charge current data.

4. The organic electro luminescence display device according to claim 1, wherein the pre-charge driver includes:

a plurality of current sources ($I1-Ik$) of which current values are different from one another; a selection part. (71) adapted to select any one of the plurality of current sources as the pre-charge current; and a first switch device (72a) adapted to supply the pre-charge current to the data line for a non-display period.

5. The organic electro luminescence display device according to claim 4, wherein the data driver (61) includes:

a second switch device (72b) adapted to supply the data current to the data line for a display period subsequent to the non-display period.

6. The organic electro luminescence display device according to claim 1, wherein the pre-charge current (I_{pre}) has the same current value within a gray level range inclusive of a plurality of gray levels and a different current value in gray levels out of the gray level range.

7. A driving method of an organic electro luminescence display device comprising a plurality of data lines ($D1-Dm$) crossing a plurality of scan lines ($S1-Sn$) and electro luminescence elements (OLED) arranged at intersections thereof, comprising the steps of:

selecting a pre-charge current (I_{pre});
 supplying the pre-charge current (I_{pre}) to the electro luminescence elements (OLED) through the data line; and
 supplying a data to the electro luminescence elements (OLED) which are charged with the pre-charge current (I_{pre}).

characterised in that said precharge current corresponds to a gray level of data.

8. The driving method according to claim 7, further comprising the step of:

supplying a scan pulse synchronized with the data to the scan lines.

9. The driving method according to claim 7, further comprising the step of:

providing a pre-charge current data which indicates the current amount of the pre-charge current (I_{pre}) in correspondence to a gray level of the data; and
 reading the pre-charge current data corresponding to the gray level of the data, and controls the pre-charge current in accordance with the pre-charge current data.

10. The driving method according to claim 7, wherein the step of selecting the pre-charge current (I_{pre}) includes the step of:

selecting any one of a plurality of current sources ($I1-Ik$), of which the current values are different from one another, as the pre-charge current (I_{pre}); and
 supplying the pre-charge current (I_{pre}) to the data line for a non-display period.

11. The driving method according to claim 10, wherein the step of charging the electro luminescence elements (OLED) with the data includes the step of:

supplying the data to the data line for a display period subsequent to the non-display period (DT).

Patentansprüche

1. Organische Elektrolumineszenzanzeigevorrichtung, aufweisend:

ein Anzeigepanel (64), wo eine Mehrzahl von Datenleitungen ($D1-Dm$) eine Mehrzahl von Gateleitungen ($S1-Sn$) kreuzen und Elektrolumineszenzelemente (OLED) an Kreuzungen davon angeordnet sind;

ein Vorladungstreiber (62) eingerichtet zum Auswählen eines Vorladungsstroms und eingerichtet zum Anlegen des Vorladungsstroms (I_{pre}) an die Elektrolumineszenzelemente durch die Datenleitung; und
 einen Datentreiber (61) eingerichtet zum Anlegen von Daten an die Elektrolumineszenzelemente (OLED), die mit dem Vorladungsstrom geladen sind,

gekennzeichnet dadurch, dass der Vorladungsstrom einem an die Elektrolumineszenzelemente (OLED) anzulegenden Grauegel von Daten entspricht.

2. Organische Elektrolumineszenzanzeigevorrichtung gemäß Anspruch 1, ferner aufweisend:

einen Abtasttreiber (63) eingerichtet zum Anlegen eines Abtastpulses in Synchronisation mit den Daten an die Abtastleitungen ($S1-Sn$).

3. Organische Elektrolumineszenzanzeigevorrichtung gemäß Anspruch 1, ferner aufweisend:

eine Nachschlagetabelle (66), in der ein Vorladungsstromdatenwert eingetragen ist, wobei der Vorladungsstromdatenwert die Strommenge des Vorladungsstrom in Übereinstimmung mit einem Grauegel der Daten anzeigt; und
 eine Steuervorrichtung (65) eingerichtet zum Lesen des Vorladungsstromdatenwerts, der in der Nachschlagetabelle (66) eingetragen ist, und eingetragen zum Steuern des Vorladungstreiber in Übereinstimmung mit dem Vorladungsstromdatenwert.

4. Organische Elektrolumineszenzanzeigevorrichtung gemäß Anspruch 1, wobei der Vorladungstreiber aufweist:

eine Mehrzahl von Spannungsquellen ($I1-Ik$) von denen Stromwerte voneinander unterschiedlich sind;
 ein Auswahlteil (71) eingerichtet zum Auswählen einer der Mehrzahl von Spannungsquellen als Vorladungsstrom; und
 eine erste Schaltungsvorrichtung (72a) eingerichtet zum Anlegen des Vorladungsstroms an die Datenleitung für eine Nicht-Anzeigezeitspanne.

5. Organische Elektrolumineszenzanzeigevorrichtung gemäß Anspruch 4, wobei der Datentreiber (61) aufweist:

eine zweite Schaltungsvorrichtung (72b) eingerichtet zum Anlegen des Datenstroms an die Datenleitung für eine Anzeigezeitspanne, die der Nicht-Anzeigezeitspanne nachfolgt.

6. Organische Elektrolumineszenzanzeigevorrichtung gemäß Anspruch 1, wobei der Vorladungsstrom (I_{pre}) denselben Stromwert innerhalb eines Graupegelbereichs einschließlich einer Mehrzahl von Graupegel und einen unterschiedlichen Stromwert in Graupegel außerhalb des Graupegelbereichs aufweist.

7. Ansteuerungsverfahren einer organischen Elektrolumineszenzanzeigevorrichtung aufweisend eine Mehrzahl von Datenleitungen (D1-D_m), die eine Mehrzahl von Gateleitungen (S1-S_n) kreuzen und Elektrolumineszenzelemente (OLED), die an Kreuzungen davon angeordnet sind, aufweisend die Schritte:

Auswählen eines Vorladungsstroms;
Anlegen des Vorladungsstroms (I_{pre}) an die Elektrolumineszenzelemente (OLED) durch die Datenleitung; und
Anlegen von Daten an die Elektrolumineszenzelemente (OLED), die mit dem Vorladungsstrom (I_{pre}) geladen sind,
gekennzeichnet dadurch, dass der Vorladungsstrom einem Graupegel von Daten entspricht.

8. Ansteuerungsverfahren gemäß Anspruch 7, ferner aufweisend den Schritt:

Anlegen eines Abtastpulses in Synchronisation mit den Daten an die Abtastleitungen.

9. Ansteuerungsverfahren gemäß Anspruch 7, ferner aufweisend den Schritt:

Bereitstellen eines Vorladungsstromdatenwerts, der die Strommenge des Vorladungsstroms (I_{pre}) in Übereinstimmung mit einem Graupegel der Daten anzeigt; und
Laden des Vorladungsstromdatenwerts entsprechend dem Graupegel der Daten, und Steuern des Vorladungsstroms in Übereinstimmung mit dem Vorladungsstromdatenwert.

10. Ansteuerungsverfahren gemäß Anspruch 7, wobei der Schritt des Auswählens des Vorladungsstroms (I_{pre}) den Schritt aufweist:

Auswählen eines einer Mehrzahl von Stromquellen (I1-I_k), von denen die Stromwerte voneinander unterschiedlich sind, als Vorladungsstrom (I_{pre}); und
Anlegen des Vorladungsstroms (I_{pre}) an die Datenleitung für eine Nicht-Anzeigezeitspanne.

11. Ansteuerungsverfahren gemäß Anspruch 10, wobei der Schritt des Ladens der Elektrolumineszenzele-

mente (OLED) mit den Daten den Schritt aufweist:

Anlegen der Daten an die Datenleitung für eine Anzeigezeitspanne, die der Nicht-Anzeigezeitspanne (DT) nachfolgt.

Revendications

1. Dispositif d'affichage organique à électroluminescence, comprenant :

un panneau d'affichage (64) où une pluralité de lignes de données (D1 à D_m) croisent une pluralité de lignes de grille (S1 à S_n) et où des éléments à électroluminescence (OLED) sont agencés aux croisements desdites lignes ;
un pilote de précharge (62) apte à sélectionner un courant de précharge et apte à fournir le courant de précharge (I_{pre}) aux éléments à électroluminescence par l'intermédiaire de la ligne de données ; et

un pilote de données (61) apte à fournir les données aux éléments à électroluminescence (OLED) qui sont chargés avec le courant de précharge,

caractérisé en ce que ledit courant de précharge correspond à un niveau de gris des données devant être fournies aux éléments à électroluminescence (OLED).

2. Dispositif d'affichage organique à électroluminescence selon la revendication 1, comprenant en outre :

un pilote de balayage (63) apte à fournir une impulsion de balayage synchronisée avec les données aux lignes de balayage (S1 à S_n).

3. Dispositif d'affichage organique à électroluminescence selon la revendication 1, comprenant en outre :

une table de référence (66) dans laquelle une donnée de courant de précharge est enregistrée, ladite donnée de courant de précharge indiquant la quantité de courant du courant de précharge correspondant au niveau de gris des données ; et

un dispositif de commande (65) apte à lire la donnée de courant de précharge enregistrée dans la table de référence (66) et apte à commander le pilote de précharge en fonction de la donnée de courant de précharge.

4. Dispositif d'affichage organique à électroluminescence selon la revendication 1, dans lequel le pilote de précharge comprend :

- une pluralité de sources de courant (I1 à Ik) dont les valeurs de courant diffèrent les unes des autres ;
 une partie de sélection (71) apte à sélectionner l'une quelconque de la pluralité de sources de courant comme courant de précharge ; et
 un premier commutateur (72a) apte à fournir le courant de précharge à la ligne de données pendant une période sans affichage.
- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
- lire la donnée de courant de précharge correspondant au niveau de gris des données et commander le courant de précharge en fonction de la donnée de courant de précharge.
10. Procédé de pilotage selon la revendication 7, dans lequel l'étape de sélection du courant de précharge (Ipre) comprend l'étape consistant à :
- sélectionner l'une quelconque d'une pluralité de sources de courant (I1 à Ik) dont les valeurs de courant diffèrent les unes des autres, en tant que courant de précharge (Ipre) ; et fournir le courant de précharge (Ipre) à la ligne de données pendant une période sans affichage.
11. Procédé de pilotage selon la revendication 10, dans lequel l'étape de chargement des éléments à électroluminescence (OLED) avec les données comprend l'étape consistant à :
- fournir les données à la ligne de données pendant une période d'affichage consécutive à la période sans affichage (DT).
5. Dispositif d'affichage organique à électroluminescence selon la revendication 4, dans lequel le pilote de données (61) comprend :
- un second commutateur (72b) apte à fournir le courant de données à la ligne de données pendant une période d'affichage consécutive à la période sans affichage.
6. Dispositif d'affichage organique à électroluminescence selon la revendication 1, dans lequel le courant de précharge (Ipre) a une valeur de courant identique à l'intérieur d'une plage de niveaux de gris incluant une pluralité de niveaux de gris et une valeur de courant différente dans des niveaux de gris situés en dehors de la plage de niveaux de gris.
7. Procédé de pilotage d'un dispositif d'affichage organique à électroluminescence comprenant une pluralité de lignes de données (D1 à Dm) croisant une pluralité de lignes de balayage (S1 à Sn) et des éléments à électroluminescence (OLED) agencés aux croisements desdites lignes, comprenant les étapes consistant à :
- sélectionner un courant de précharge (Ipre) ;
 fournir le courant de précharge (Ipre) aux éléments à électroluminescence (OLED) par l'intermédiaire de la ligne de données ; et
 fournir des données aux éléments à électroluminescence (OLED) qui sont chargés avec le courant de précharge (Ipre),
caractérisé en ce que ledit courant de précharge correspond à un niveau de gris des données.
8. Procédé de pilotage selon la revendication 7, comprenant en outre l'étape consistant à :
- fournir aux lignes de balayage une impulsion de balayage synchronisée avec les données.
9. Procédé de pilotage selon la revendication 7, comprenant en outre l'étape consistant à :
- fournir une donnée de courant de précharge qui indique la quantité de courant du courant de précharge (Ipre) correspondant au niveau de gris des données ; et

FIG. 1
RELATED ART

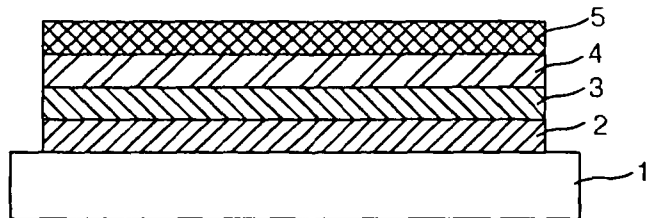


FIG.2
RELATED ART

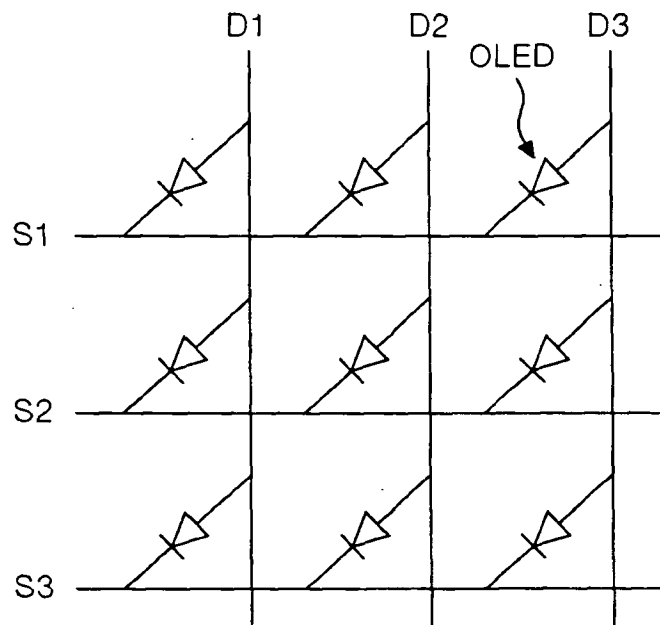


FIG.3
RELATED ART

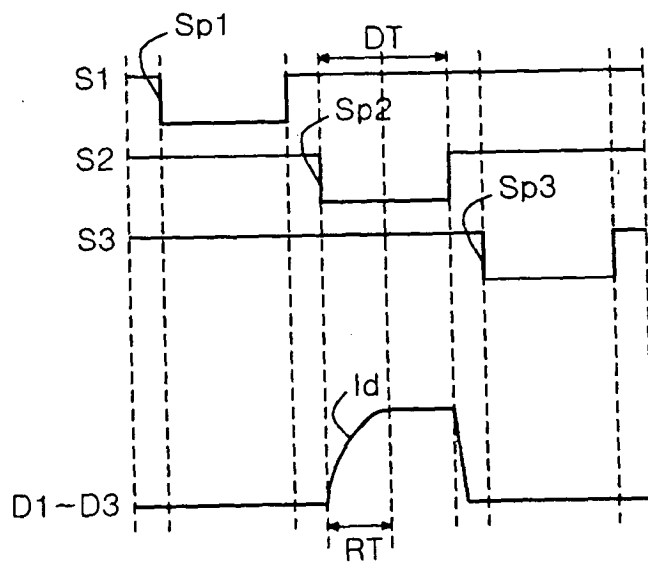


FIG. 4
RELATED ART

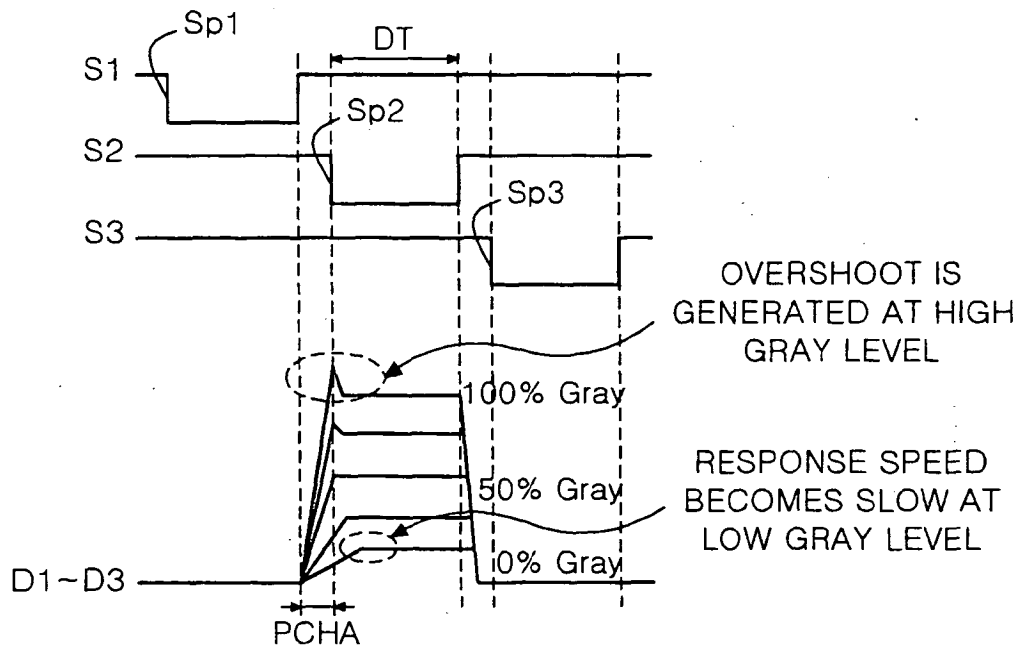


FIG. 5
RELATED ART

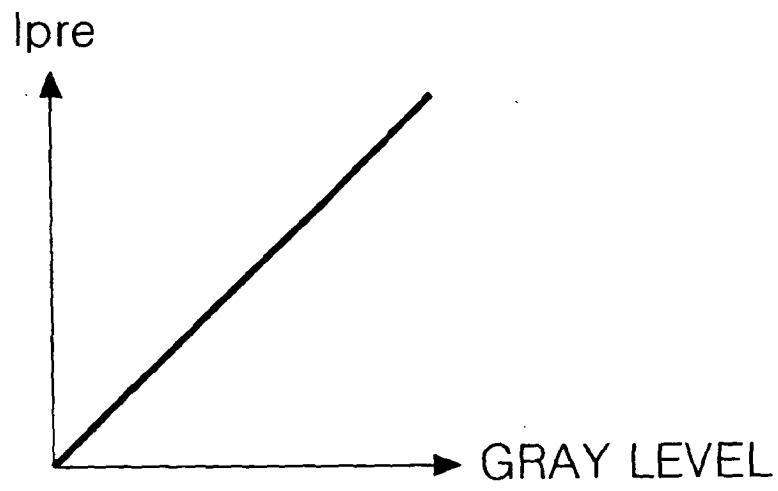


FIG. 6
RELATED ART

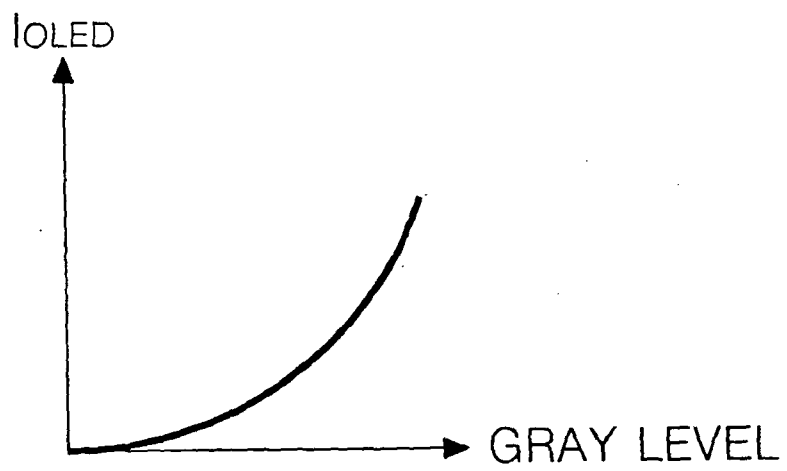


FIG.7

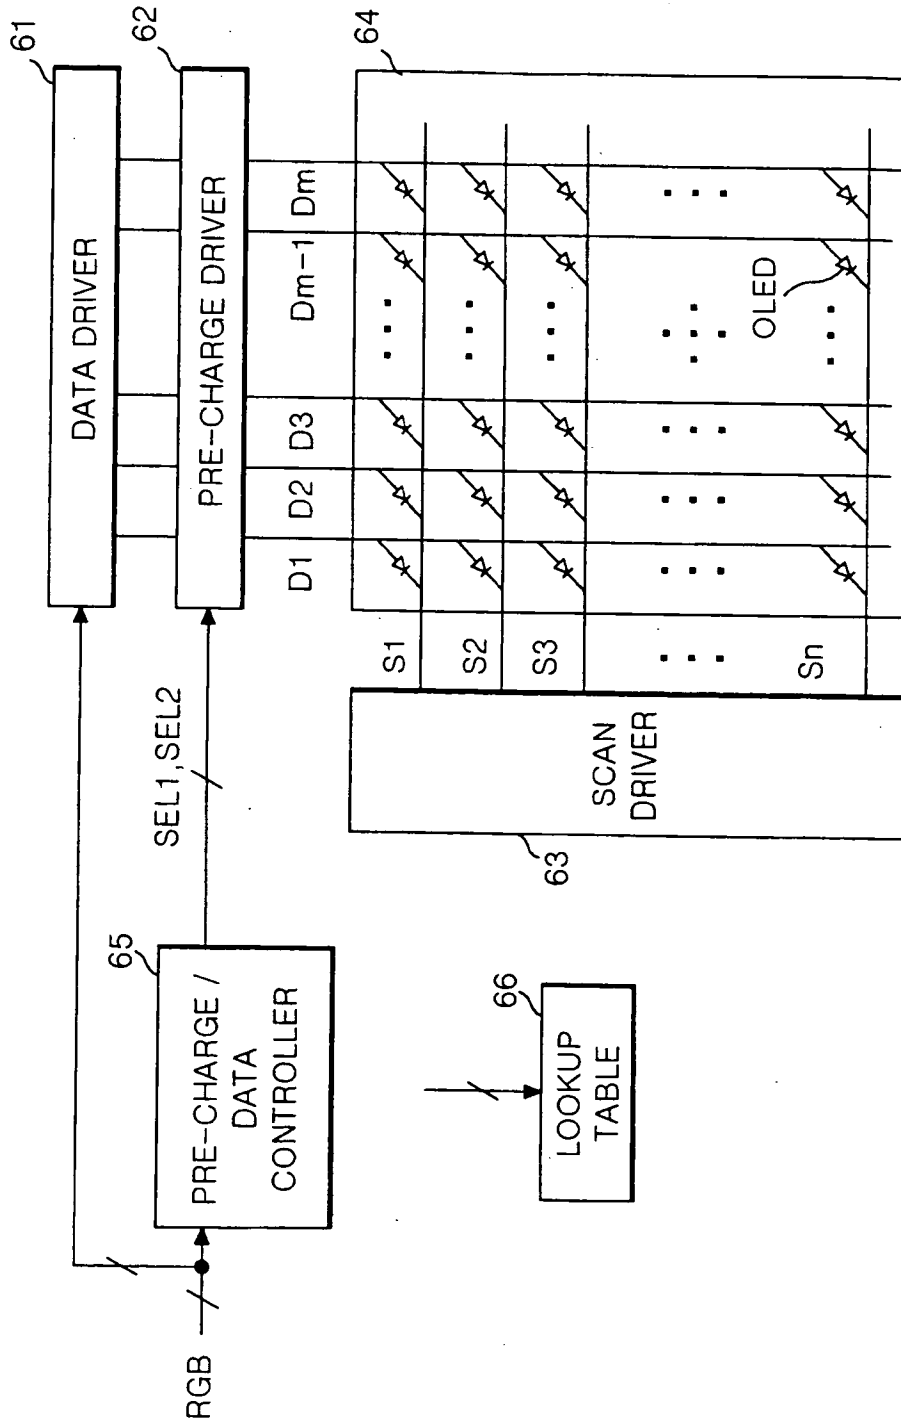


FIG.8

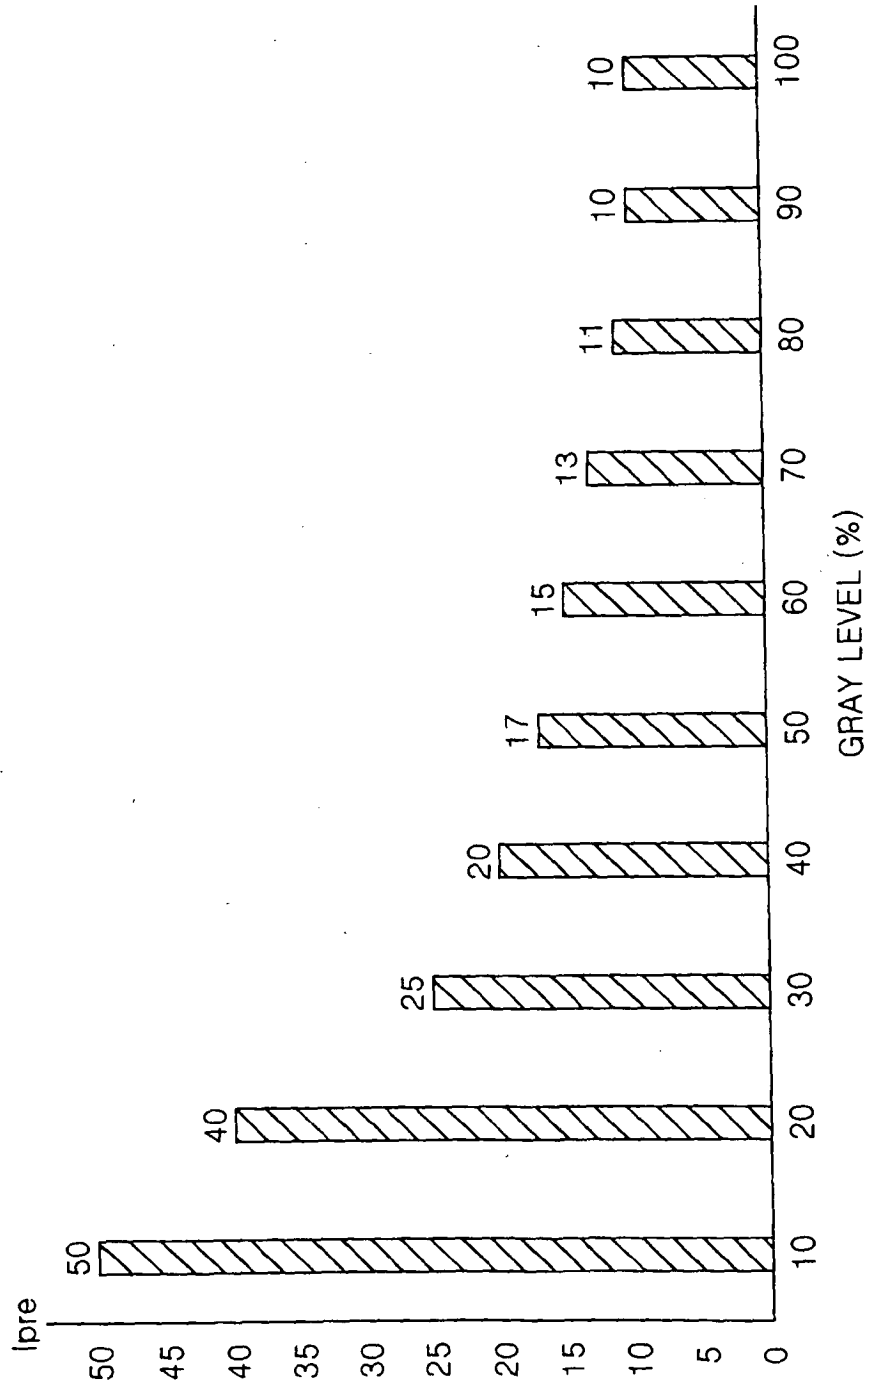


FIG.9

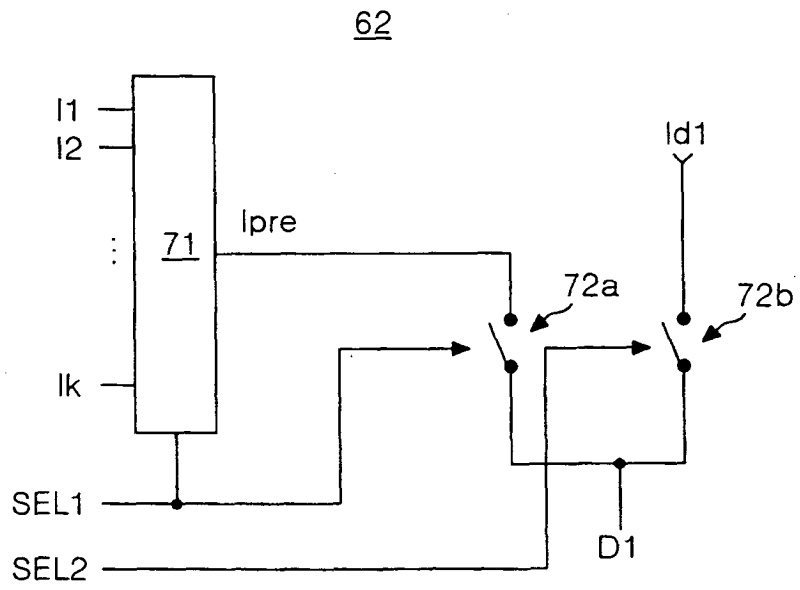


FIG.10

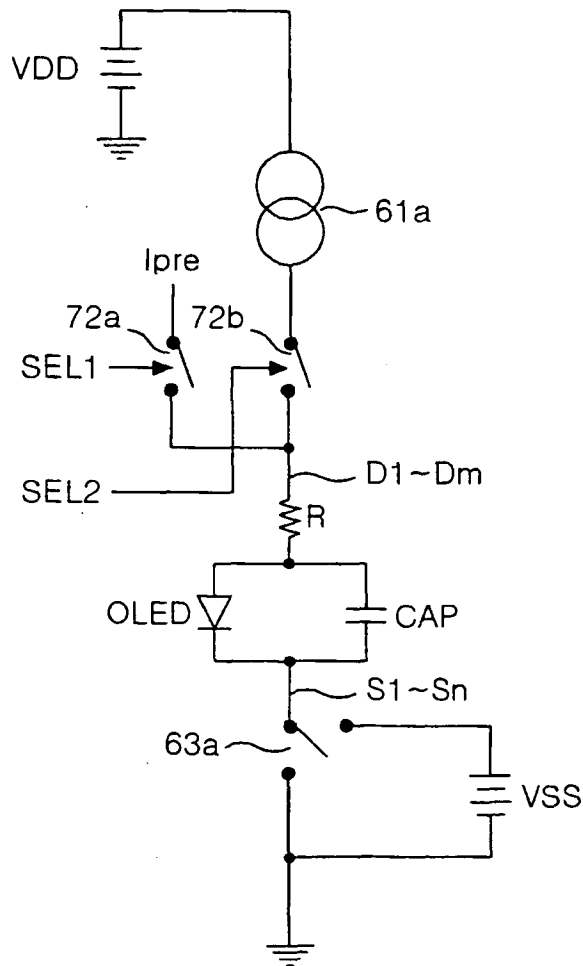


FIG.11

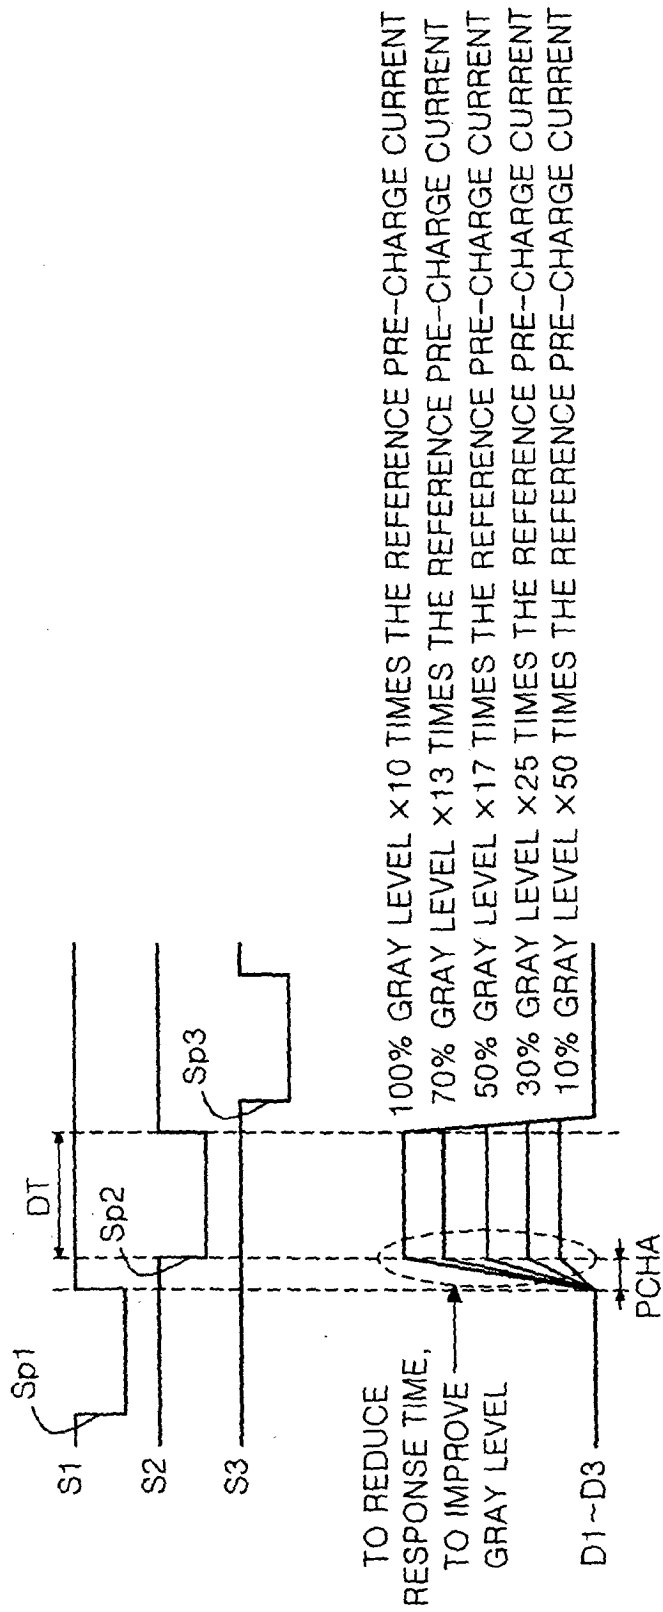


FIG.12

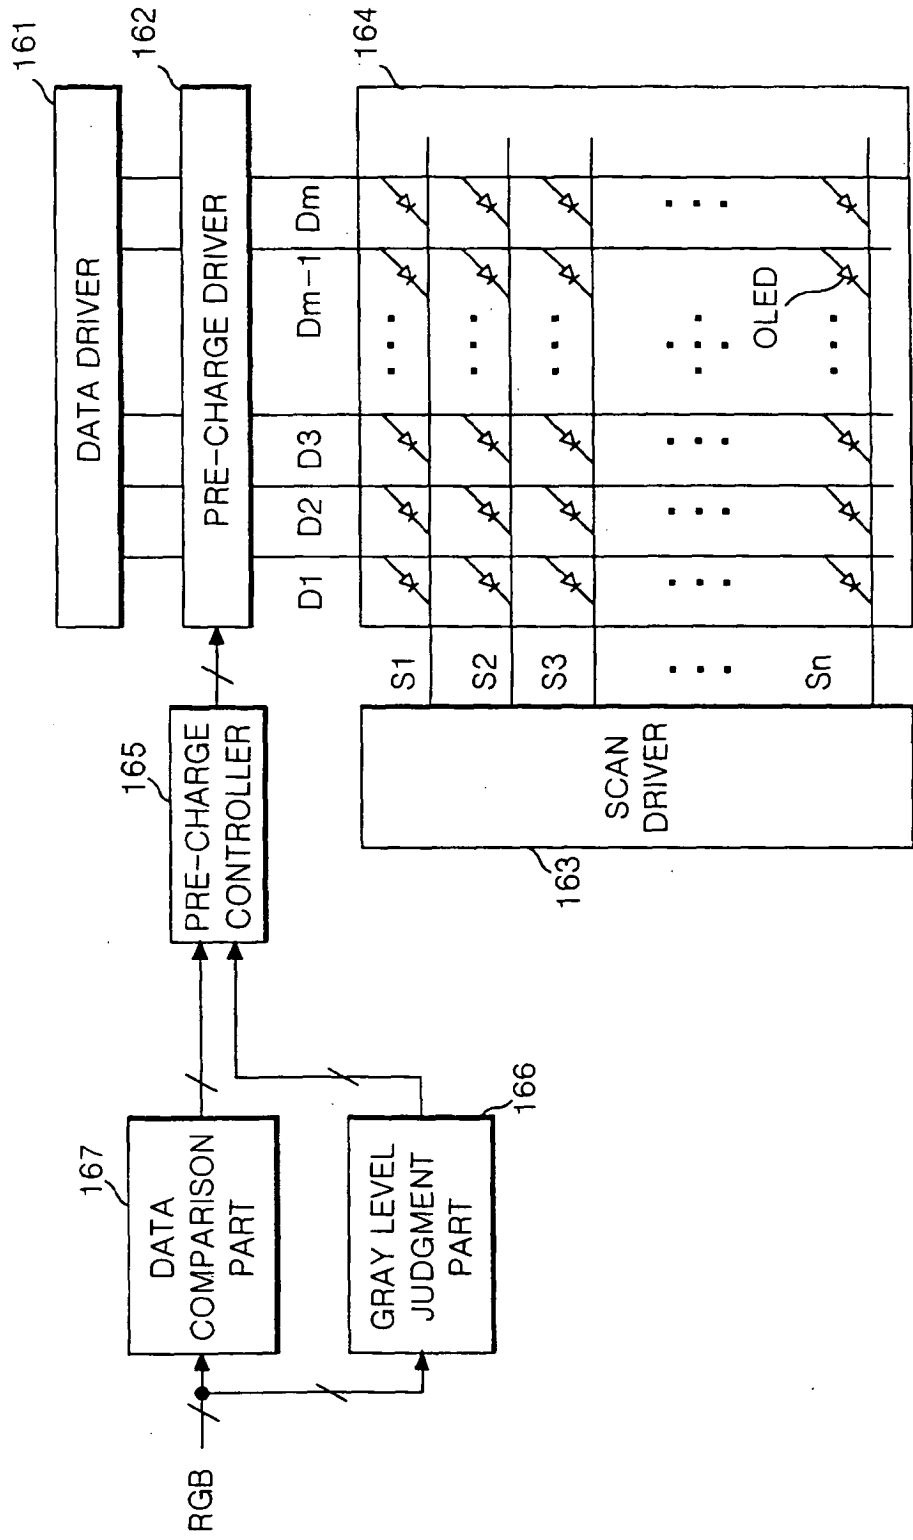


FIG. 13


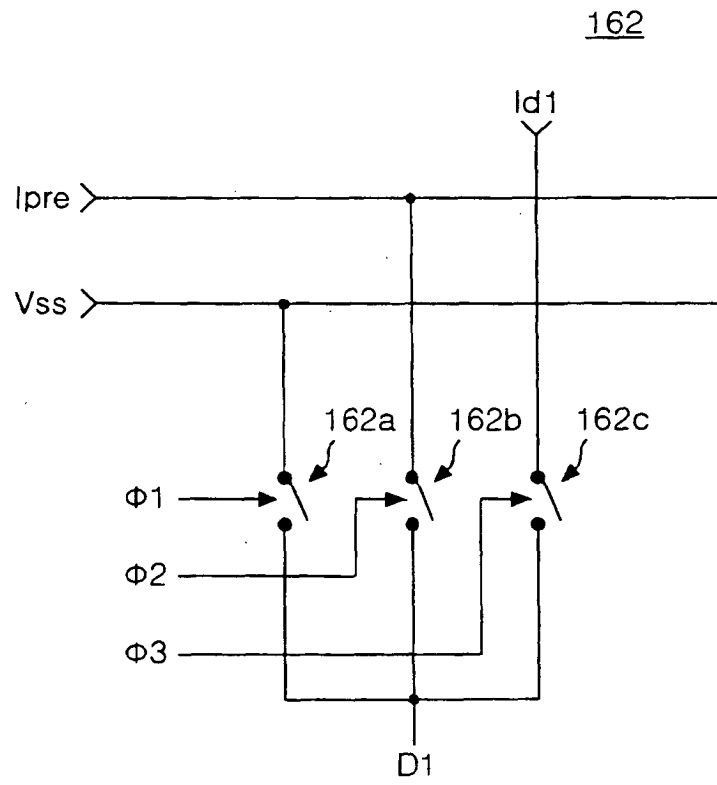


FIG. 14

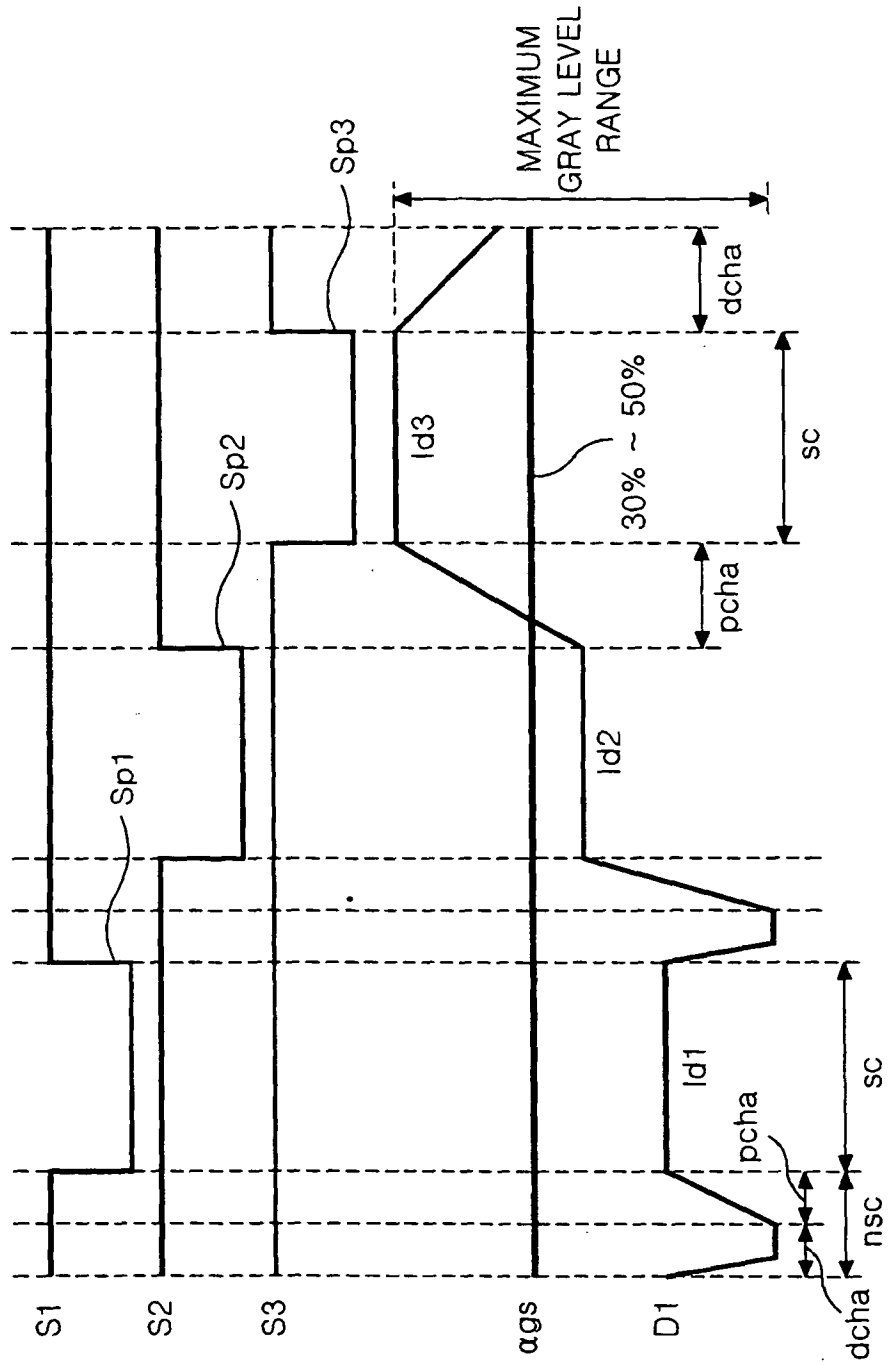

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR P200439748 [0001]
- KR P200442115 [0001]
- WO 03034390 A [0017]
- US 2002169575 A1 [0018]

专利名称(译)	有机电致发光显示装置及其驱动方法		
公开(公告)号	EP1605432B1	公开(公告)日	2010-10-06
申请号	EP2005011549	申请日	2005-05-28
申请(专利权)人(译)	LG电子株式会社.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM HAK SU LEE JAE DO HA WON KYU		
发明人	KIM, HAK SU LEE, JAE DO HA, WON KYU		
IPC分类号	G09G3/32 G09G3/30 G09G3/20		
CPC分类号	G09G3/3216 G09G2300/0408 G09G2310/0248 G09G2330/021		
代理机构(译)	庆祝活动 , JENTSCHURA & PARTNER		
优先权	1020040042115 2004-06-09 KR 1020040039748 2004-06-01 KR		
其他公开文献	EP1605432A3 EP1605432A2		
外部链接	Espacenet		

摘要(译)

本发明涉及一种使用预充电的有机电致发光显示装置及其驱动方法。根据本发明实施例的有机电致发光显示装置包括：显示面板，其中多条数据线与多条栅极线交叉，并且电致发光元件布置在其交叉点处；预充电驱动器，用于根据灰度级数据选择不同的电流，并通过数据线向电致发光元件提供预充电电流；数据驱动器向电子发光元件提供数据，该电子发光元件用预充电电流充电。

FIG. 1
RELATED ART

