

(19)



(11)

EP 2 151 867 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

03.08.2016 Bulletin 2016/31

(51) Int Cl.:

H01L 27/32^(2006.01)

(86) International application number:

PCT/JP2008/001268

(21) Application number: **08751786.8**

(22) Date of filing: **21.05.2008**

(87) International publication number:

WO 2008/149499 (11.12.2008 Gazette 2008/50)

(54) **ORGANIC EL DISPLAY PANEL**

ORGANISCHE EL-ANZEIGETAFEL

PANNEAU D’AFFICHAGE ÉLECTROLUMINESCENT ORGANIQUE

(84) Designated Contracting States:
DE

(30) Priority: **30.05.2007 JP 2007143906**

(43) Date of publication of application:
10.02.2010 Bulletin 2010/06

(73) Proprietor: **JOLED INC.**
Tokyo 101-0054 (JP)

(72) Inventors:
• **YOSHIDA, Hidehiro**
Osaka-shi, Osaka 540-6207 (JP)
• **KITAMURA, Yoshiro**
Osaka-shi, Osaka 540-6207 (JP)

• **YAMAMURO, Keisei**
Osaka-shi, Osaka 540-6207 (JP)

(74) Representative: **Grünecker Patent- und
Rechtsanwälte
PartG mbB
Leopoldstraße 4
80802 München (DE)**

(56) References cited:
JP-A- 2000 195 668 JP-A- 2004 234 901
JP-A- 2004 235 128 JP-A- 2005 235 569
JP-A- 2006 114 477 JP-A- 2007 019 489
JP-A- 2007 026 976 JP-A- 2007 095 614
US-A1- 2004 119 066 US-A1- 2004 140 759

EP 2 151 867 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to an organic EL (OEL) display panel and a manufacturing method thereof.

Background Art

[0002] An OEL display panel is a display panel that uses light-emitting elements exploiting electro-luminescence of organic compounds. That is, the OEL display panel has a cathode, an anode, and organic compound-containing EL elements for electro-luminescence which are provided between the electrodes. Electro-luminescent organic compounds can be roughly classified into combinations of low-molecular organic compounds (host material and dopant material) and high-molecular organic compounds (polymer organic compounds). Examples of the electro-luminescent polymer organic compounds include polyphenylenevinylene (also referred to as PPV) and its derivatives. The OEL display panel using the electro-luminescent polymer organic compound is driven with a relatively low voltage, consumes less power and is considered to be capable of contributing to display panel size reduction; therefore, active research has been promoted.

[0003] Electro-luminescent polymer organic compounds are applied with a printing technique such as ink-jetting to respective pixels according to their color of emitting light (R, G or B). For example, for printing, an ink-jet head is used to discharge polymer inks containing such polymer organic compound and solvent. When an ink containing electro-luminescent polymer organic compound is printed in a certain pixel, it is necessary to prevent intrusion of the polymer ink into adjacent pixels.

[0004] In order to prevent intrusion of the polymer ink into the adjacent pixels, the following two methods have been employed. A first method is to provide banks defining sub pixels in a pixel and drop a polymer ink precisely only to each sub pixel so as to prevent the intrusion of the ink into adjacent pixels.

[0005] A second method is to provide banks defining line-state pixels and banks defining sub pixels in each pixel in such a way that the former banks are higher than the latter banks defining the sub pixels, thereby suppressing intrusion of a polymer ink into adjacent pixels when it is applied to the entire region (including regions between adjacent sub pixels) of a pixel (See Patent Documents 1 and 2, for example).

[0006] A polymer ink can be readily and rapidly applied to all of the sub pixels by applying it over the entire pixel region at a time with the second method, rather than by applying it on a one-by-one basis with the first method. However, with the second method, the thickness of an organic light-emitting layer is unlikely to be uniform.

[0007] In order to make the leveling and the thickness of the organic light-emitting layer uniform, a technique is

proposed to provide a bank on the hole injection layer (See Patent Documents 3 and 4 for example).

[0008] Furthermore in order to make the leveling and the thickness of the organic light-emitting layer uniform, the organic EL display panel with a plurality of the longitudinal banks and a plurality of the transverse banks is proposed (See Patent Document 5 for example). In the organic EL display panel disclosed in the Patent Document 5, the height of the transverse bank is less than the height of the longitudinal bank.

Patent Document 1: U.S. Patent No. 6388377

Patent Document 2: U.S. Patent No. 7091660

Patent Document 3: Japanese Patent Application Laid-Open No.2004-235128

Patent Document 4: Japanese Patent Application Laid-Open No.2004-234901

Patent Document 5: U.S. Patent Application Publication No.2004/119066

Disclosure of the Invention

Problems to be Solved by the Invention

[0009] The inventors conducted studies to provide an easier method of manufacturing an OEL display panel which includes the step of making an organic light-emitting layer by applying polymer inks containing an electro-luminescent polymer organic compound to line-state pixel regions, each including a plurality of sub pixels. In the course of the studies, it was found that one cause of non-uniformity in the thickness of an organic light-emitting layer prepared from the applied polymer ink was due to non-uniformity in the thickness of a hole transport layer or interlayer -- a layer disposed under the organic light-emitting layer.

[0010] The cause of non-uniform thickness of the hole transport layer or interlayer was found to be the manner in which it is prepared: Banks defining pixel regions and banks defining sub pixel regions are formed, and then a hole transport layer or interlayer is formed in regions defined by these banks. That is, it was found that one cause of the above problem was due to the formation of the hole transport layer or interlayer inside banks with complicated structure.

Means for Solving the Problem

[0011] The present inventors have found that, without providing a discrete hole transport layer or interlayer for each sub pixel, an OEL display operates normally even when a hole transport layer or interlayer is shared by a plurality of sub pixels, .

[0012] Accordingly, the inventors conducted studies to

obtain an organic EL layer having a uniform thickness in the manner as follows:

A hole transport layer or interlayer is formed on a substrate on which anode electrodes are formed; banks defining line-state pixels and banks defining sub pixels in each pixel are formed on the hole transport layer or interlayer; and polymer inks containing an electro-luminescent polymer organic compound are applied over the entire pixel regions.

[0013] The inventors conducted further studies to obtain an organic EL layer having a uniform thickness in the manner as follows: banks defining line-state pixels are formed on a substrate on which anode electrodes are formed; a hole transport layer or interlayer is formed on the line-state pixel; banks defining sub pixels in each pixel are formed on the hole transport layer or interlayer; and polymer inks containing an electro-luminescent polymer organic compound are applied over the entire pixel regions.

[0014] With these procedures, the hole transport layer or interlayer can be formed by means of so-called "overall coating" over the entire substrate including a plurality of pixels regions or over the entire pixel region including a plurality of sub pixels. In this way, a hole transport layer or interlayer with a uniform thickness can be obtained. As used herein, "overall coating" means coating by such a coating method as spin coating, die coating or slit coating. Since it is possible to produce a hole transport layer or interlayer with a uniform thickness, the thickness of the resultant organic EL layer becomes likely to be uniform. The invention is as specifies in the appended claims, furthermore some details are mentioned below:

[0015]

[1] An organic EL display panel including: a substrate; anode electrodes set on the substrate; a hole transport layer provided on a surface of the substrate provided with the anode electrodes; banks set in lines on the hole transport layer to define line-state pixel regions; line-state interlayers set in the pixel regions; line-state organic EL layers set on the interlayers in the pixel regions; and a cathode electrode provided on the polymer organic EL layer.

[2] The organic EL display panel according to [1], wherein the bank contains a fluorine resin, or a surface of the bank is fluorinated by fluorine gas plasma.

[3] The organic EL display panel according to [1] or [2], further including an insulating inorganic film that protrudes from the bank into the pixel region and is in contact with a bottom surface of the interlayer or polymer organic EL layer, wherein a material of the hole transport layer contains tungsten oxide (WO_x), molybdenum oxide (MoO_x), vanadium oxide (VO_x) or a combination thereof.

[4] An organic EL display panel including: a substrate; anode electrodes set on the substrate; line-

state banks provided on the substrate to define line-state pixel regions; a line-state hole transport layer set in the pixel region; a line-state interlayer set in the pixel region; a line-state polymer organic EL layer set on the interlayer in the pixel region; and a cathode electrode provided on the polymer organic EL layer. [5] The organic EL display panel according to [4], wherein the bank contains a fluorine resin, or a surface of the bank is fluorinated by fluorine gas plasma. [6] The organic EL display panel according to [4] or [5], further including an insulating inorganic film that protrudes from the bank into the pixel region and is in contact with a bottom surface of the interlayer or polymer organic EL layer, wherein a material of the hole transport layer contains tungsten oxide (WO_x), molybdenum oxide (MoO_x), vanadium oxide (VO_x) or a combination thereof.

[7] The organic EL display panel according to claim 8, further including an insulating inorganic film that protrudes from the bank into the pixel region and is in contact with a bottom surface of the hole transport layer, wherein a material of the hole transport layer contains polyethylenedioxythiophene.

[0016] Moreover, a method of manufacturing the OEL display panel is given below:

[8] A manufacturing method of an organic EL display panel including: forming a first conductive layer on a surface of a substrate; forming a hole transport layer on the substrate on which the first conductive layer is formed; forming electrically insulating line-state banks on the hole transport layer so as to define line-state regions to be pixel regions; forming a line-state interlayer in the region to be a pixel region; forming a line-state polymer organic EL layer by coating the region to a pixel region with an ink containing a polymer organic EL material and a solvent by ink-jet, dispensing, nozzle coating, intaglio printing or letterpress printing; and forming a second conductive layer on the organic EL layer.

[9] A manufacturing method of an organic EL display panel including: forming a first conductive layer on a surface of a substrate; forming electrically insulating line-state banks on the substrate on which the first conductive layer is provided so as to define line-state region to be pixel regions; forming a line-state hole transport layer in the region to be a pixel region; forming a line-state interlayer in the regions to be a pixel region; forming a line-state polymer organic EL layer by coating the region to be a pixel region with an ink containing a polymer organic EL material and a solvent by ink-jet, dispensing, nozzle coating, intaglio printing or letterpress printing; and forming a second conductive layer on the organic EL layer.

Effect of the Invention

[0017] A polymer organic EL display panel of the present invention includes functional layers (e.g., polymer organic EL layer) having uniform thickness held between the cathode electrode and anode electrode and thus shows improved light-emitting characteristics over conventional display panels. In addition, among such functional layers, since the hole transport layer and interlayer (except for the polymer organic EL layer) held between the cathode electrode and anode electrode are provided by means of so-called "overall coating", a manufacturing process of the polymer organic EL display panel can be simplified.

Brief Description of Drawings

[0018]

FIG. 1A is a plan view of an organic EL display panel ;
 FIG. 1B is a plan view of the organic EL display panel in a state where a cathode electrode is removed;
 FIG. 2A is an A-A sectional view of the organic EL display panel shown in FIG. 1 in Embodiment 1;
 FIG. 2B is a B-B sectional view of the organic EL display panel shown in FIG. 1 in Embodiment 1;
 FIG. 3 is a plan view of the organic EL display panel in a state where a cathode electrode is removed;
 FIG. 4A is an A-A sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 2;
 FIG. 4B is a B-B sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 2;
 FIG. 5A is an A-A sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 3;
 FIG. 5B is a B-B sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 3;
 FIG. 6A is an A-A sectional view of the organic EL display panel shown in FIG. 1 in Embodiment 4;
 FIG. 6B is a B-B sectional view of the organic EL display panel shown in FIG. 1 in Embodiment 4;
 FIG. 7A is an A-A sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 5;
 FIG. 7B is a B-B sectional view of the organic EL display panel shown in FIG. 3 in Embodiment 5;
 FIG. 8 is a sectional view of the organic EL display having a first bank in an inverted taper shape;
 FIG. 9 is a sectional view of the organic EL display panel having an insulating film under an interlayer;
 FIG. 10 is a sectional view of the organic EL display panel having an insulating film under an interlayer; and
 FIG. 11 is a sectional view of the organic EL display panel having an insulating film under a hole transport layer.

Best Mode for Carrying Out the Invention

[0019] 1. Organic EL display panel. An organic EL dis-

play panel has a substrate, anode electrodes, cathode electrode, and organic EL element having a hole transport layer, interlayer and light-emitting layer, which layers are held between the electrodes. In addition, the organic EL display panel has first banks.

[0020] The organic EL display panel preferably uses a polymer organic EL material for the light-emitting layer. The display panel has thin film transistors (driving TFTs) for driving organic EL elements, and the anode electrode of the organic EL element and a source or drain electrode of the driving TFT are connected to each other.

[0021] The organic EL display panel is characterized by the structure of the organic EL element, particularly the arrangements of the functional layers; however, the other configurations may be the same as those of known organic EL display panels as long as the effect of the present invention is not impaired.

[0022] For example, the organic EL display panel may be of passive matrix type in which anode electrodes are arranged in lines or active matrix type in which anode electrodes are arranged in matrix form. Furthermore, the organic EL display may be of bottom emission type (where emitted light is taken out through the anode electrodes and substrate) or top emission type (where emitted light is taken out through a cathode electrode or seal film).

[0023] The material of the substrate of the organic EL display panel changes depending on whether it is of bottom emission type or top emission type. In the case of bottom emission type, since the substrate is required to be transparent, the substrate may be made of glass, transparent resin or the like. On the other hand, in the case of top emission type, there is no need for the substrate to be transparent, and any insulating material can be employed.

[0024] The anode electrodes are formed on the substrate. When the organic EL display panel is of passive matrix type, the anode electrodes are arranged in lines. The lines of the anode electrodes preferably run in parallel with each other. When the organic EL display panel is of active matrix type, the anode electrodes are arranged in matrix form on the substrate.

[0025] When the organic EL display panel is of bottom emission type, the anode electrodes are required to be transparent electrodes, and therefore, they may be made of ITO or the like. When the organic EL display panel is of top emission type, the anode electrodes are required to have light reflectivity, and therefore, they may be made of an alloy containing silver, more specifically a silver-palladium-copper alloy (also referred to as APC), for example. The anode electrode layer may have a tungsten thin film on its surface.

[0026] On the substrate on which the anode electrodes are formed, a hole transport layer or interlayer is formed. It is needless to say that the both layers may be formed as long as the layers are formed in the order of the hole transport layer and the interlayer from the substrate. The hole transport layer may not be formed in some cases.

[0027] The hole transport layer is a layer made of hole transport material, and examples of the hole transport material include poly (3,4-ethylenedioxythiophene) doped with polyethylene sulfonic acid (also referred to as PEDOT-PSS) and its derivative (e.g., copolymers). The thickness of the hole transport layer is usually 10 nm or more and 100 nm or less and may be approximately 30 nm. The material of the hole transport layer may be an metal oxide such as WO_x (tungsten oxide), MoO_x (molybdenum oxide), VO_x (vanadium oxide) or a combination thereof.

[0028] The interlayer has a role to block transportation of electrons to the hole transport layer and to efficiently transport holes to the polymer organic EL layer and is a layer made of, for example, polyaniline material. The thickness of the interlayer is usually 10 nm or more and 100 nm or less and may be approximately 40 nm.

[0029] As mentioned above, the present OEL display panel is characterized in that the hole transport layer or the interlayer can be formed by means of so-called "overall coating". That is, the hole transport layer or the interlayer may be easily formed by means of "plane formation" or "line formation" by a technique such as spin coating, die coating or slit coating, with their thickness being made uniform.

[0030] As used herein, "plane formation" means formation of a functional layer (e.g., a hole transport layer or interlayer) as a single layer over the substrate, including a plurality of pixel regions, on which the anode electrodes are provided. In addition, "line formation" as used herein means formation of a line-state functional layer for each of line-state pixel regions on a display panel which will be described later.

[0031] The organic EL display panel preferably includes a polymer organic EL layer as a light-emitting layer. The organic EL layer may be formed in lines (line formation) in pixel regions defined by first banks which will be described later.

[0032] The polymer organic EL material is selected as appropriate so that a desired color (red (R), green (G), or blue (B)) is generated from each pixel. For example, a green pixel is arranged adjacent to a red pixel, a blue pixel is arranged adjacent to the green pixel, and a red pixel is arranged adjacent to the blue pixel.

[0033] By applying an ink containing a polymer organic EL material and solvent on the pixel region by a coating method such as ink-j etting, an organic EL layer is formed easily while avoiding damages to the other materials. Examples of the polymer organic EL material include poly phenylene vinylene (PPV) and its derivatives, poly acetylene and its derivatives, poly phenylene (PPP) and its derivatives, poly para phenylene ethylene (PPV) and its derivatives, poly 3-hexyl thiophene (P3HT) and its derivatives, poly fluorene (PF) and its derivatives, and the like. The thickness of the polymer organic EL layer is preferably approximately 50 to 100 nm (60 nm, for example).

[0034] The organic EL display of the present invention has first banks defining pixel regions.

The first banks are formed in lines for defining pixel regions. The first banks preferably run in parallel with each other. In addition, when anode electrodes are arranged in lines, the line-state first banks are preferably orthogonal to the lines of the anode electrodes.

[0035] The first bank may be either tapered or inverted tapered. If the first bank has inverted tapered shape, as will be described later, energization between adjacent cathodes is prevented. On the other hand, if the first bank has tapered shape, the cathode electrodes may be made thinner as compared with the inverted tapered first banks.

[0036] Any material can be selected for the first bank as long as it is insulating, and it is preferably made of insulating resin (such as polyimide). The surface of the first bank preferably has low lyophilicity (e.g., water repellency). The contact angle of the first bank with respect to water is 60° or more, for example. Thus, the material of the first bank is preferably made of insulating resin containing a fluorine resin. Alternatively, lyophilicity may be lowered by fluorinating the surface of the first bank by fluorine gas plasma.

[0037] The first banks may be formed by a photolithographic method that includes an exposure/development process, and may also be formed by intaglio printing or the like. If it is formed by intaglio printing or the like, other materials (e.g., hole transport layer) are hardly damaged.

[0038] The first banks define pixel regions and also can function as a cathode separator. The cathode separator is a member for dividing a cathode electrode (which will be described later), dividing the cathode electrode formed on the organic EL layer by, for example, deposition for each line-state pixel regions.

[0039] The organic EL display panel has a cathode electrode layer on the polymer organic EL layer. The material of the cathode electrode layer changes depending on whether it is of top emission type or bottom emission type. In the case of top emission type, the cathode electrode needs to be transparent, and therefore, an ITO electrode or IZO electrode is preferably formed. A buffer layer and the like are preferably formed between the polymer organic EL layer and the cathode electrode layer. On the other hand, in the case of bottom emission type, there is no need for the cathode electrode to be transparent, and therefore, an electrode made of any material may be used.

[0040] It is only necessary that the cathode electrode be formed on the organic EL layer set in each pixel region, but it is usually formed so as to cover the entire pixel regions (See FIG. 1A). Usually, first banks serve as a cathode separator so that the separated cathode electrodes in mutually adjacent pixel regions are not energized to each other. Since the cathode electrode layer is usually formed by the deposition method, by forming the first banks in inverted taper shape (See FIG. 8), energization between adjacent cathode electrodes is prevented more surely. It may be that the cathode electrodes do not have to be separated for each pixel region. That is, when the anode electrodes are independently controlled

at each pixel electrode as in the active matrix type, the TFT elements driving the pixel electrode is independent and thereby the cathode electrode may be shared by a plurality of pixel regions.

[0041] For sealing, on the organic EL display panel, a cover material may further be provided on the surface on which the cathode electrode is formed. The cover material suppresses intrusion of water or oxygen.

[0042] The organic EL display panel further have an electrically insulating inorganic film (hereinafter referred to as "inorganic insulating film"). It is needless to say that the inorganic insulating film is electrically insulating, but it is preferable that the inorganic insulating film further have high lyophilicity. Examples of materials of the inorganic insulating film include silicon oxide (SiO_2), silicon nitride (Si_3N_4), silicon oxynitride (SiON) and the like. The thickness of insulating inorganic film is preferably 10 to 200 nm.

[0043] The inorganic insulating film preferably protrudes from the bank into the pixel region (See FIGs.9, 10, and 11). The inorganic insulating film preferably protrudes from the bank into the pixel region by 5 to 10 μm .

[0044] A solution containing a material of the functional layer (polymer organic EL layer, hole transport layer or interlayer) is applied on the inorganic insulating film protruding from the bank. The solution is applied on the entire pixel region uniformly by the inorganic insulating film, and a functional layer with a uniform film thickness can be obtained.

[0045] In addition, as shown in FIG.9, since inorganic insulating film 22 protrudes up to sub pixel region 17, holes injected from contact hole 23 are prevented from intruding into the polymer organic EL layer. As a result, light emission from unwanted spots (e.g., contact holes) can be prevented.

[0046] As mentioned above, the organic EL display panel of the present invention has first banks and an optional inorganic insulating film protruding from each of the first banks. The configurations (shapes and arrangements) of the first bank and inorganic insulating film can be classified into the following three categories (1) to (3) according to the configurations of the hole transport layer and the interlayer. The shapes and arrangements of the first banks and insulating inorganic film will be described below for each category.

[0047] (1) When the hole transport layer is provided by means of plane formation (See FIGs.2, 4, 5, and 9)

Hole transport layer

[0048] In this category, the hole transport layer is provided by means of plane formation. The material of the hole transport layer is preferably an oxide such as tungsten oxide.

Interlayer

[0049] In this category, the interlayer is either provided

by means of line formation in pixel regions which are defined in lines by the first banks on the hole transport layer, or provided by means of plane formation on the hole transport layer. Line formation is preferable.

First bank

[0050] In this category, first banks are formed on a single hole transport layer or interlayer which has been formed by plane formation, and define regions of the polymer organic EL layer or regions of both of the interlayer and polymer organic EL layer (See FIGs.2, 4, 5, and 9). More specifically, 1) if the interlayer is formed as a single layer by means of plane formation, first banks are formed on the interlayer so as to define regions of the polymer organic EL layer (See FIG.5) ; and 2) if the line-state interlayers are to be provided by means of line formation, the first banks are formed on the hole transport layer so as to define regions of both of the interlayer and the polymer organic EL layer (See FIGs.2, 4, and 9).

[0051] Preferably, the first banks are formed on the hole transport layer so as to define the line-state interlayer and polymer organic EL layer (See FIGs.2, 4, and 9).

Polymer organic EL layer

[0052] The polymer organic EL layer is formed by means of line formation on the interlayer in pixel line regions defined by the first banks.

Inorganic insulating film

[0053] In this category, the inorganic insulating film is formed on the hole transport layer or the interlayer so as to be in contact with the bottom surface of the interlayer or the polymer organic EL layer (See FIG.9). More specifically, 1) when the interlayer is formed as a single layer by means of plane formation, the inorganic insulating film is formed on the interlayer so as to be in contact with the bottom surface of the polymer organic EL layer; and 2) when the line-state interlayers are formed by means of line formation, the inorganic insulating film is formed on the hole transport layer so as to be in contact with the bottom surface of the interlayer (See FIG.9).

[0054] Preferably, the inorganic insulating film is formed on the hole transport layer so as to be in contact with the bottom surface of the interlayer (See FIG.9). Since the inorganic insulating film is set on the hole transport layer so as to be in contact with the bottom surface of the interlayer, when the interlayer is formed in lines by coating pixel regions defined by first banks with a solution containing the material of the interlayer, the film thickness of the interlayer may be made uniform (See FIG.9).

[0055] The organic EL display panel of this category may be manufactured in the order of 1) hole transport layer (plane formation), 2) interlayer (plane formation), 3) first bank, and 4) polymer organic EL layer (line for-

mation) or in the order of 1) hole transport layer (plane formation), 2) first bank, 3) interlayer (line formation), and 4) polymer organic EL layer (line formation).

[0056] Preferably, the organic EL display of this category is manufactured in the order of 1) hole transport layer (plane formation), 2) first bank, 3) interlayer (line formation), 4) polymer organic EL layer (line formation).

[0057] (2) When the hole transport layer is formed in lines and the material of the hole transport layer is an oxide such as tungsten oxide (See FIG.10)

Hole transport layer

[0058] In this category, the material of the hole transport layer is an oxide such as tungsten oxide. The hole transport layer is formed in lines so as to be located in regions defined by first banks which will be described later. The hole transport layer is preferably formed so as to cover the anode electrode.

Interlayer

[0059] In this category, the interlayer is either formed by means of line formation in the pixel regions defined by the first banks, or formed by means of plane formation on the hole transport layer or substrate. The interlayer is preferably formed in lines.

First bank

[0060] In this category, first banks are formed on the substrate (See FIG.10) or interlayer and define regions of the polymer organic EL layer or regions of both of the interlayer and polymer organic EL layer. More specifically, 1) when the interlayer is provided as a single layer by means of plane formation, first banks are formed on the interlayer and define regions of the polymer organic EL layer; and 2) when the line-state interlayers are to be provided by means of line formation, the first banks are formed on the substrate and define regions of the interlayer and polymer organic EL layer.

[0061] Preferably, the first banks are formed on the substrate (See FIG. 10) and define regions of the interlayer and polymer organic EL layer.

Polymer organic EL layer

[0062] The polymer organic EL layer is in lines (line formation) on the interlayer in pixel line regions defined by the first banks.

Inorganic insulating film

[0063] In this category, the inorganic insulating film is formed so as to be in contact with the bottom surface of the interlayer or the polymer organic EL layer (See FIG.10). More specifically, 1) when the interlayer is formed as a single layer by means of plane formation,

the inorganic insulating film is formed on the interlayer so as to be in contact with the bottom surface of the polymer organic EL layer; and 2) when the line-state interlayers are formed, the inorganic insulating film is formed so as to be in contact with the bottom surface of the interlayer (See FIG.10).

[0064] Preferably, the inorganic insulating film is formed so as to be in contact with the bottom surface of the interlayer (See FIG. 10). The inorganic insulating film may be set on the hole transport layer (FIG.10A), may be set on the substrate (FIG.10B) or may be set on the substrate and below the hole transport layer (FIG.10C) as long as it is formed so as to be in contact with the bottom surface of the interlayer. By forming the inorganic insulating film so as to be in contact with the bottom surface of the interlayer, when the line-state interlayers are formed by coating the pixel regions defined by the first banks with a solution containing a material of the interlayer, the film thickness of the interlayer may be made more uniform (See FIG.10). In addition, by setting the inorganic insulating film between the first bank and the hole transport layer (FIG.10A), adhesion between the first bank and the hole transport layer made of oxide is reinforced.

[0065] The organic EL display panel in this category may be manufactured in the order of 1) hole transport layer (line formation), 2) interlayer (plane formation), 3) first bank, and 4) polymer organic EL layer (line formation), or may be manufactured in the order of 1) hole transport layer (line formation), 2) first bank, 3) interlayer (line formation), and 4) polymer organic EL layer (line formation).

[0066] Preferably, the organic EL display panel of this category is manufactured in the order of 1) hole transport layer (line formation), 2) first bank, 3) interlayer (line formation), and 4) polymer organic EL layer (line formation).

[0067] (3) When the hole transport layer is in lines and the material of the hole transport layer is PEDOT-PSS (See FIG.11)

Hole transport layer

[0068] In this category, the hole transport layer is in lines (line formation) by applying PEDOT-PSS in pixel line regions defined by first banks which will be described later.

Interlayer

[0069] In this category, the interlayer is formed in lines (line formation) on the hole transport layer in pixel line regions defined by first banks.

Polymer organic EL layer

[0070] The polymer organic EL layer is formed in lines (line-formed) on the interlayer in the line pixel regions defined by first banks.

First bank

[0071] In this category, first banks are formed on the substrate and define regions of the hole transport layer, interlayer, and polymer organic EL layer (See FIG.11).

Inorganic insulating film

[0072] The inorganic insulating film in this category is set on the substrate so as to be in contact with the bottom surface of the hole transport layer (See FIG.11). Since the inorganic insulating film is formed in contact with the bottom surface of the hole transport layer, the film thickness of the hole transport layer prepared using PEDOT-PSS may be made more uniform.

[0073] The organic EL display panel of this category is preferably manufactured in the order of 1) first bank, 2) hole transport layer (line formation), 3) interlayer (line formation), and 4) polymer organic EL layer (line formation).

[0074] As mentioned above, in the organic EL display panel, the arrangements of the first banks and the inorganic insulating film layer change depending on the form (shapes and constituent materials) of the hole transport layer and the interlayer. On the other hand, the arrangements of the polymer organic EL layer, the cathode electrode and second banks which will be described later are common in the above three categories.

[0075] The organic EL display panel may further have second banks.

[0076] The second banks define two or more sub pixel regions in a pixel region. The second bank may be set on the hole transport layer or may be set on the interlayer. When the second banks are set on the hole transport layer, the interlayer and the polymer organic EL layer are defined by the second banks. On the other hand, when the second banks are set on the interlayer, the polymer organic EL layer is defined by the second banks.

[0077] The second banks are preferably set on the hole transport layer and define the interlayer and polymer organic EL layer.

[0078] The material of the second bank is not particularly limited as long as it is insulating as with the first bank, and it is preferably an insulating resin. By the second banks, electrical cross-talk between the pixels may be suppressed. Further, the material of the second bank is preferably in black color. Since the second banks define sub pixel regions, by making the bank be in a color having high contrast with the light emitted from the sub pixel regions, a display panel with high brightness is obtained.

[0079] Moreover, since the second banks defining the sub pixel regions are set on the hole transport layer or interlayer, the second banks and the hole transport layer or interlayer are preferably brought into close contact with each other. Therefore, the lyophilicity on the surface of the second bank may be increased to a level higher than that of the surface of the first bank so as to enhance adhesion with the hole transport layer or interlayer. For

example, the contact angle of the second bank with respect to water is 40 degrees or less. Thus, the material of the second bank may be non-fluorine resin (e.g., non-fluorine polyimide resin, or non-fluorine polyacrylic resin).

[0080] As mentioned above, the second bank is formed on the hole transport layer or the interlayer. Therefore, the hole transport layer or the hole transport layer and the interlayer may be manufactured by so-called "over-all application". That is, the hole transport layer and the interlayer are formed easily by spin-coating, die-coating, slit-coating and the like and moreover, their thickness are made uniform.

[0081] The depth of the second bank may only be approximately 1 to 2 μm . In addition, the height of the top of the first bank from the substrate is preferably higher than that of the second bank by approximately 1 to 10 μm . It is for preventing the intrusion of inks into adjacent pixel regions by setting the banks defining the pixel regions higher, since an organic EL layer is formed by applying inks containing a polymer organic EL material and solvent in the pixel regions defined by the first banks, as will be described later.

[0082] To the second bank for defining sub pixel regions, a groove for connecting adjacent sub pixel regions with each other may be provided (See FIG. 3). After the second banks are formed, in the sub pixel regions defined by the second banks, a solution containing the material of the interlayer or an ink containing a polymer organic EL material may be applied in the pixel regions. Therefore, when such grooves are provided, the solution or ink moves between the sub pixel regions and thereby the thickness of the interlayer or the organic EL layer to be formed is leveled out in the pixel regions. The depth of the groove may only be within 90 % of the depth of the second bank, and the width of the groove may only be approximately 20 to 50 μm . Further, the interval between the adjacent sub pixel regions is usually 10 μm or more. The lateral width of the sub pixel region (as lateral when the running direction of the first bank is deemed to be vertical) is approximately 60 to 100 μm .

[0083] 2. A method of manufacturing an organic EL display panel. The organic EL display panel may be manufactured by any method as long as the effect of the present invention is not impaired.

[0084] A first example of a preferred manufacturing method includes the steps of 1) forming a first conductive layer as a single layer over a substrate; 2) forming a hole transport layer on the substrate on which the first conductive layer is formed; 3) forming electrically insulating banks in lines on the hole transport layer so as to define regions that serve line-state pixel regions ; 4) forming a line-state organic EL layers in the regions; and 5) forming a second conductive layer on the organic EL layer.

[0085] In the 1) step, the first conductive layer may be formed by forming a conducting thin film on the substrate and by patterning it in lines (See FIG.3) or in matrix form (See FIG.1B) by photolithography or etching, which method is not particularly limited. The first conductive

layer serves as an anode electrode.

[0086] In the 2) step, when the material of the hole transport layer is PEDOT-PSS, in order to provide the hole transport layer on the substrate with the first conductive layer by means of plane formation, spin coating, die coating, slit coating or the like is preferably employed. Although they are simple methods, a layer with a relatively uniform thickness may be formed. On the other hand, when the material of the hole transport layer is a metal oxide such as tungsten oxide, the hole transport layer is formed by sputtering method or heating deposition method, for example.

[0087] In the 3) step, electrically insulating line-state banks defining pixel regions are formed on the hole transport layer. When the first conductive layer is formed in lines (See FIG.3), the line-state banks are preferably orthogonal to the line-state conductive layers. The banks may be formed by applying a resist on the hole transport layer and by exposing via a photomask, or by printing an insulating resin molded product by intaglio printing. In the former method, the hole transport layer or the interlayer may be damaged by irradiated light, therefore the latter method is preferably employed. Region to be pixel regions are defined by the line-state banks. In addition, the banks may serve as a cathode electrode separator.

[0088] In the pixel region, second electrically insulating banks may be further formed. The banks may be formed by applying a resist on the hole transport layer and by exposing it via a photomask, or by printing an insulating resin by intaglio printing. By these banks, a plurality of regions to be sub pixels is defined. In addition, while the banks define regions to be sub pixels, they may have a groove for connecting adjacent sub pixel regions with each other. The groove may be formed by etching or the like. Alternatively, a resin molded product in which a groove is formed in advance by intaglio printing may be printed.

[0089] Either the formation of electrically insulating line-state banks or formation of regions defining regions to be sub pixels may precede the other or may be carried out at the same time. For example, when the insulating resin is printed by intaglio printing, both banks are formed at the same time by printing a resin molded product in a desired shape.

[0090] The example of this manufacturing method may have a step of forming the interlayer before or after the 3) step. That is, when the interlayer is formed before the 3) step, the interlayer is preferably formed by means of plane formation on the hole transport layer. On the other hand, when the interlayer is formed after the 3) step, the interlayer is preferably formed by means of line formation in the pixel regions defined by the banks after formation of the electrically insulating line-state banks.

[0091] In order to form the interlayer, spin coating, die coating, slit coating or the like is preferably employed.

[0092] The example of this manufacturing method may have a step of forming the inorganic insulating film before formation of the interlayer and before the 3) step, or after

formation of the interlayer and before the 3) step.

[0093] That is, when the interlayer is formed by means of plane formation, the inorganic insulating film is formed on the interlayer and below the electrically insulating banks. On the other hand, when the interlayer is formed by means of line formation, the inorganic insulating film is formed on the hole transport layer and below the electrically insulating banks.

[0094] The inorganic insulating film is formed by plasma CVD or sputtering, for example.

[0095] The hole transport layer may be formed on the entire substrate surface but it may only be formed in regions at least including all of the pixel regions.

[0096] Usually, both the hole transport layer and the interlayer are formed, but the hole transport layer might not be formed.

[0097] The pixel region defined in the 4) step is coated with an ink containing a polymer organic EL material and solvent. The coating may be applied by using a technique such as ink-jet, dispensing, nozzle coating, intaglio printing, letterpress printing or the like. When coating is applied using a dispenser, ink discharge from the dispenser is preferably controlled by a suck-back operation and the like at the beginning and end of each line-wise application. The thickness of the applied ink (thickness of the coat film) may be approximately 1 to 10 μm . Further, by drying the coat film, a layer including the polymer organic EL material is formed and, preferably formed in the sub pixel region in the pixel region selectively.

[0098] A layer including a polymer organic EL material may be further rubbed. Specifically, rubbing may be carried out using a coater or the like. By rubbing treatment, the structural units of polymer can be highly aligned, leading to increased light-emission efficiency.

[0099] In the 5) step, a second conductive layer is formed on the organic EL layer. The second conductive layer may be made by deposition method. By forming electrically insulating banks with inverted taper shape, the second conductive layer may be cut off at each pixel more assuredly.

[0100] A second example of the preferred manufacturing method includes the steps of 1) forming a first conductive layer on a substrate; 2) forming electrically insulating line-state banks so as to define regions to be line-state pixel regions on the substrate on which the first conductive layer is formed; 3) forming a line-state hole transport layer in the region to be a pixel region; 4) forming a line-state interlayer in the region to be a pixel region; 5) forming a line-state polymer organic EL layer in the region to be a pixel region; and 6) forming a second conductive layer on the organic EL layer.

[0101] In addition, the above manufacturing method may include between the 1) step and the 2) step a step of forming an insulating inorganic film (hereinafter referred to as "inorganic insulating film") on the substrate. In this case, the electrically insulating banks are preferably formed on the inorganic insulating film.

[0102] Further, when the material of the hole transport

layer is an oxide such as tungsten oxide, the order of the 2) step and the 3) step may be reversed.

[0103] The step of forming the first conductive layer on the substrate, the step of forming the line-state polymer organic EL layers, and the step of forming the second conductive layer in the second example of the manufacturing method are similar to those in the first example and may be carried out in a similar manner.

[0104] In the 2) step, the electrically insulating line-state banks are formed on the substrate on which the first conductive layer is formed. When the first conductive layer is formed in lines, the line-state banks are preferably orthogonal to the line-state conductive layer. The banks may be formed by applying a resist on the substrate and by exposing it via a photomask, or by printing an insulating resin molded product by intaglio printing. The pixel regions are defined by the banks. The banks can be a cathode separator.

[0105] In the 3) step, the hole transport layer is formed in the pixel regions defined by the electrically insulating line-state banks and in the 4) step, the interlayer is formed in the pixel regions defined by the electrically insulating line-state banks and on the hole transport layer. The hole transport layer or the interlayer may be formed by means of spin coating, die coating, slit coating, or the like.

[0106] It may be configured that the second electrically insulating banks are formed on the hole transport layer in the pixel regions so as to define sub pixel regions. The banks defining sub pixel regions may be formed by applying a resist on the hole transport layer and by exposing it via a photomask, or by printing an insulating resin molded product by intaglio printing.

[0107] After sub pixel regions are defined, the pixel region is coated with an ink containing a polymer organic EL material and solvent so as to form an organic EL layer as with the manufacturing method of the first example.

[0108] The present invention will be described below in more detail referring to the attached drawings.

(Example 1)

[0109] In Embodiment 1, an active matrix type organic EL display panel in which a hole transport layer is provided as a single layer by means of plane formation will be described.

[0110] FIG. 1A is a plan view of an active matrix type organic EL display panel. In the panel shown in FIG. 1A, line-state first banks 9 formed are provided. First banks 9 define pixel regions 17. The pixel regions 17 are of three types: pixel regions 17R emitting red light; pixel regions 17G emitting green light; and pixel regions 17B emitting blue light. These three types of pixel regions are arranged in order. Pixel regions 17 are covered by cathode electrode 15 and separated by first banks 9 as discrete pixel regions.

[0111] FIG. 1B is a plan view of the organic EL display panel of active matrix type of the present device from which the cathode electrode is removed.

[0112] FIG. 2A shows a line A-A sectional view of the organic EL display panel of the present embodiment shown in FIG. 1B. FIG. 2B shows a line B-B sectional view of the organic EL display panel of the present embodiment shown in FIG. 1B.

[0113] As shown in FIGs. 2A and 2B, in the present example, Anode electrodes 3 are formed on substrate 1 in matrix form. Single hole transport layer 5 is formed by means of plane formation on substrate 1 so as to cover anode electrodes 3. First banks 9 are formed on inorganic insulating film 22 on hole transport layer and define pixel regions 17. First bank 9 is preferably made of fluorine resin in order to lower lyophilicity. Interlayer 7 is formed on hole transport layer 5 in pixel region 17. In pixel region 17 on interlayer 7, polymer organic EL layer 13 is set.

(Example 2)

[0114] In 1, the active matrix type organic EL display panel was explained. In example 2, a passive matrix type organic EL display panel will be described. In the present embodiment, the organic EL display panel has second banks.

[0115] FIG. 3 is a plan view of a state where cathode electrode 15 is removed from the organic EL display in the present example. In the panel shown in FIG. 3, substrate 1, line-state anode electrodes 3', and line-state first banks 9 are set. The line direction (lateral direction in the figure) of anode electrodes 3' and the line direction (vertical direction in the figure) of first banks 9 are orthogonal to each other.

[0116] Inside pixel region 17, two or more sub pixel regions 19 defined by second banks 11 are set. Adjacent sub pixel regions 19 in region 17 are connected with each other by grooves 21. In sub pixel regions 19 and grooves 21, polymer organic EL material 13 with corresponding color is provided.

[0117] FIG. 4A shows a line A-A sectional view of the organic EL display panel of the present example shown in FIG. 3. FIG. 4B shows a line B-B sectional view of the organic EL display panel of the present example shown in FIG. 3.

[0118] As shown in FIGs. 4A and 4B, the organic EL display panel of the present example is the same as the organic EL display panel of Embodiment 1 except that it has anode electrode 3' and second banks 11 and has no inorganic insulating film 22. Therefore, the same reference numerals are given to the same members as those in the organic EL display panel in Embodiment 1 and the description thereof will be omitted.

[0119] As shown in FIGs. 4A and 4B, line-state anode electrodes 3' are set on substrate 1. Single hole transport layer 5 is formed by means of plane formation on substrate 1 so as to cover anode electrodes 3'.

[0120] On interlayer 7, second banks 11 are set so as to define sub pixel regions 19. The top of first bank 9 is higher than the top of second bank 11, from substrate 1. The difference in height is 1 μm or more and 10 μm or

less, for example. In addition, second banks 11 preferably have some lyophilicity in view their close contact with interlayer 7.

[0121] Polymer organic EL material 13 is patterned in sub pixel regions 19 or patterned in pixel regions 17.

[0122] As shown in FIG.4B, internal second banks 11 are set lower than those at the periphery (right and left ends in the figure). Second banks 11 in the inside correspond to grooves 21 (See FIG.3). Polymer organic EL layer 13 is set so as to cover internal second banks 11 (grooves 21). That is, grooves 21 connect adjacent sub pixel regions 19 with each other. When a polymer ink containing polymer organic EL material is applied on pixel regions 17 defined by first banks 9, when sub pixel regions 19 are discrete without being connected with each other, it would be difficult to form polymer organic EL layer 13 19 uniformly in each sub pixel region. On the other hand, when grooves 21 are provided, since the polymer ink applied on pixel regions 17 flows between sub pixel regions 19, the thickness of polymer organic EL layer 13 is leveled out.

(Example 3)

[0123] In examples 1 and 2, the organic EL display panel in which the hole transport layer is formed as a single layer by means of plane formation and the interlayer is formed in lines was described. For Example 3, the organic EL display panel in which the interlayer is formed as a single layer by means of plane formation will be described. The organic EL display panel of the present example is the passive matrix type and has second banks.

[0124] The plan view of the organic EL display panel of the present example is the same as that of Embodiment 2. Therefore, FIG.3 is also a plan view of the organic EL display panel of the present example.

[0125] FIG.5A shows a line A-A sectional view of the organic EL display panel of the present example shown in FIG.3. FIG.5B shows a line B-B sectional view of the organic EL display panel of the present example shown in FIG.3.

[0126] As shown in FIGs.5A and 5B, the organic EL display panel of the present example is the same as the organic EL display panel of Embodiment 2 except for the shape of interlayer 5 and the arrangement of first banks 9. Therefore, the same reference numerals are given to the same members as those of the organic EL display panel in example 2 and the description thereof will be omitted.

[0127] As shown in FIGs.5A and 5B, interlayer 7 is as a single layer on single hole transport layer 5 formed by means of plane formation. On interlayer 7, first banks 9, second banks 11, and polymer organic EL layer 13 are set.

(Example 4)

[0128] In examples 1 to 3, the organic EL display panel in which hole transport layer is formed as a single layer by means of plane formation was described. In example 4, the organic EL display panel in which hole transport layer is formed in lines by means of line formation will be described. The organic EL display panel of the present example is of active matrix type.

[0129] The plan view of the organic EL display panel of the present example is the same as that of Example 1. Therefore, FIGs.1A and 1B are also plan views of the organic EL display panel of the present example.

[0130] FIG.6A shows a line A-A sectional view of the organic EL display panel of the present example shown in FIG.1B. FIG.6B shows a line B-B sectional view of the organic EL display panel of the present example shown in FIG.1B.

[0131] As shown in FIGs.6A and 6B, the organic EL display panel of the present example is the same as the organic EL display panel in Example 1 except for the shape of hole transport layer 5 and the arrangements of first banks 9 and inorganic insulating film 22. Therefore, the same reference numerals are given to the same components as those of the organic EL display panel in example 1 and the description thereof will be omitted.

[0132] As shown in FIG.6A, hole transport layer 5 is formed in lines in pixel regions 17 defined by first banks 9. Further, insulating film 22 is set on substrate 1 below hole transport layer 5. First banks 9 are set on insulating film 22.

(Example 5)

[0133] In Example 4, the organic EL display panel having no second banks was explained. In Example 5, the organic EL display panel in which the hole transport layer is formed in lines and having second banks will be described. The organic EL display panel of the present Example is of passive matrix type.

[0134] The plan view of the organic EL display panel of the present example is the same as that of Example 2. Therefore, FIG.3 is also a plan view of the organic EL display panel of the present example.

[0135] FIG.7A shows a line A-A sectional view of the organic EL display panel of the present example shown in FIG.3. FIG. 7B shows a line B-B sectional view of the organic EL display panel of the present example shown in FIG.3.

[0136] As shown in FIGs.7A and 7B, the organic EL display panel of the present example is the same as the organic EL display panel of Example 4 except that it has anode electrodes 3' and second banks 11 and does not have insulating film 22. Therefore, the same reference numerals are given to the same members as those of the organic EL display panel in Example 1 and the description thereof will be omitted.

[0137] As shown in FIGs.7A and 7B, line-state anode

electrodes 3' are set on substrate 1. Hole transport layer 5 is formed in lines on anode electrodes 3' in pixel regions 17. On interlayer 7, second banks 11 are set and define sub pixel regions. The top of first bank 9 is higher than the top of second bank 11, from substrate 1. The difference in the height is 1 μm or more and 10 μm or less, for example. In addition, second banks 11 preferably have some lyophilicity in view of their close contact with interlayer 7.

[0138] Polymer organic EL material 13 is patterned in sub pixel region 19 or patterned in pixel regions 17.

[0139] As shown in FIG.7B, internal second banks 11 are set lower than those at the periphery(right and left ends in the figure). Internal second banks 11 correspond to grooves 21 (See FIG.3). A layer of polymer organic EL material 13 is set so as to cover internal second banks 11 (grooves 21). That is, grooves 21 connect adjacent sub pixel regions 19 with each other. When a polymer ink containing polymer organic EL material is applied on pixel regions 17 defined by first banks 9, when sub pixel regions 19 are discrete without being connected with each other, it would be difficult to form polymer organic EL layer 13 uniformly in each sub pixel region 19. On the other hand, when grooves 21 are provided, since the polymer ink applied on pixel regions 17 flows between sub pixel regions 19, the thickness of polymer organic EL layer 13 is leveled out.

(Example 6)

[0140] In FIG.8, similarly to Example 5, both hole transport layer 5 and interlayer 7 are formed in lines on each pixel region 17. The present example is characterized in that first banks 9 defining pixel regions 17 have inverted taper shape. With this configuration, first banks 9 serve more effectively as a cathode separator, and mutual energization of respective cathode electrodes formed in organic EL layer 13 by a deposition method may be prevented more assuredly.

[0141] The present application claims priority based on Japanese Patent Application No. 2007-143906 filed on May 30, 2007.

Industrial Applicability

[0142] The organic EL display panel of the present invention is made simply in the manufacturing process, in which the polymer organic EL layer included is formed by ink-jet or the like and hole transport layer and the like is formed by spin coating or the like. Further, since the thickness of the polymer organic EL layer is made uniform, light-emission characteristics are also improved. Therefore, a display panel with performance higher than that of conventional ones is manufactured efficiently.

Explanation of Reference Numerals

[0143]

1	substrate
3, 3'	anode electrode
5	hole transport layer
7	interlayer
9	first bank
11	second bank
13	polymer organic EL layer
15	cathode electrode
17	pixel region
19	sub pixel region
21	groove
22	inorganic insulating film
23	contact hole

Claims

1. An organic EL display panel comprising:

a substrate (1);
anode electrodes (3) set on the substrate (1);
a hole transport layer (5) provided on the substrate (1) provided with the anode electrodes (3);
banks (9) defining a pixel region (17), the banks (9) being set on the hole transport layer (5);
an organic EL layer (13) in the pixel region (17);
and

a cathode electrode (15) provided on the organic EL layer (13);

characterized in that

the banks (9) are line-state banks which are electrically insulating,
the pixel region (17) defined by the banks (9) is a line-state pixel region,
the organic EL display panel further comprises:

a line-state interlayer (7, FIG. 4A) formed on hole transport layer (5, FIG. 4A) in the pixel region (17, FIG. 4A) and polymer organic EL layer (13, FIG. 4A) set on interlayer (7, FIG. 4A) in pixel region (17, FIG. 4A), and second banks (11), which are electrically insulating, defining two or more sub pixel regions (19) inside the pixel region (17), wherein the second banks (11, FIG. 4A) being set on the hole transport layer (5,

- FIG. 4A) thereby defining the interlayer (7, FIG. 4A) and the polymer organic EL layer (13, FIG. 4A),
the second bank (11) has a groove (21) for connecting the adjacent sub pixel regions (19) with each other, and
the organic EL layer (13) is a line-state polymer organic EL layer set on the interlayer (7) in the pixel region (17).
2. The organic EL display panel according to claim 1, wherein the line-state bank (9) contains a fluorine resin.
 3. The organic EL display panel according to claim 1, wherein the line-state bank (9) has a fluorinated surface.
 4. The organic EL display panel according to claim 1, further comprising an insulating inorganic film (22) that protrudes from the line-state bank (9) into the pixel region (17) and is in contact with a bottom surface of the interlayer (7) or polymer organic EL layer (13), wherein a material of the hole transport layer (5) contains tungsten oxide (WO_x), molybdenum oxide (MoO_x), vanadium oxide (VO_x) or a combination thereof.
 5. The organic EL display panel according to claim 1, wherein the organic EL display panel is of active matrix type and the anode electrodes (3) are arranged in matrix form on the substrate (1).
 6. The organic EL display panel according to claim 1, wherein the polymer organic EL layer (13) is a coating layer containing a polymer organic EL material.
 7. The organic EL display panel according to claim 1, wherein the interlayer (7) is a coating layer containing a material of the interlayer.
 8. An organic EL display panel comprising:
 - a substrate (1);
 - anode electrodes (3) set on the substrate (1);
 - banks (9) defining a pixel region (17);
 - a hole transport layer (5) provided on the substrate (1) provided with the anode electrodes (3);
 - an organic EL layer (13) in the pixel region (17);
 - and
 - a cathode electrode (15) provided on the organic EL layer (13);

characterized in that
the banks (9) are line-state banks which are electrically insulating and set on the substrate (1),
the pixel region (17) defined by the banks (9) is a line-state pixel region,
- the hole transport layer (5) is a line-state hole transport layer and is set in the pixel region (17),
the organic EL display panel further comprises:
- a line-state interlayer (7, FIG. 4A) formed on hole transport layer (5, FIG. 4A) in the pixel region (17, FIG. 4A) and polymer organic EL layer (13, FIG. 4A) set on interlayer (7, FIG. 4A) in pixel region (17, FIG. 4A),
second banks (11), which are electrically insulating, defining two or more sub pixel regions (19) inside the pixel region (17),
wherein the second banks (11, FIG. 4A) being set on the hole transport layer (5, FIG. 4A) thereby defining the interlayer (7, FIG. 4A) and the polymer organic EL layer (13, FIG. 4A),
the second bank (11) has a groove (21) for connecting the adjacent sub pixel regions (19) with each other, and
the organic EL layer (13) is a line-state polymer organic EL layer set on the interlayer (7) in the pixel region (17).
9. The organic EL display panel according to claim 8, wherein the line-state bank (9) contains a fluorine resin.
 10. The organic EL display panel according to claim 8, wherein the line-state bank (9) has a fluorinated surface.
 11. The organic EL display panel according to claim 8, further comprising an insulating inorganic film (22) that protrudes from the line-state bank (9) into the pixel region (17) and is in contact with a bottom surface of the interlayer (7) or polymer organic EL layer (13), wherein a material of the hole transport layer (5) contains tungsten oxide (WO_x), molybdenum oxide (MoO_x), vanadium oxide (VO_x) or a combination thereof.
 12. The organic EL display panel according to claim 8, further comprising an insulating inorganic film (22) that protrudes from the line-state bank (9) into the pixel region (17) and is in contact with a bottom surface of the hole transport layer (5), wherein a material of the hole transport layer (5) contains polyethylenedioxythiophene.
 13. The organic EL display panel according to claim 8, wherein the organic EL display panel is of active matrix type and the anode electrodes (3) arranged in matrix form on the substrate (1).
 14. The organic EL display panel according to claim 8, wherein the polymer organic EL layer (13) is a coating layer containing a polymer organic EL material.

15. The organic EL display panel according to claim 11, wherein the interlayer (7) is a coating layer containing a material of the interlayer.
16. The organic EL display panel according to claim 12, wherein the hole transport layer (5) is a coating layer containing a material of the hole transport layer.

Patentansprüche

1. Organische EL-Anzeigetafel, umfassend:

ein Substrat (1);
positive Elektroden (3), die auf dem Substrat (1) aufgesetzt sind;
eine Lochtransportschicht (5), die auf dem mit den positiven Elektroden (3) versehenen Substrat (1) vorgesehen ist;
Reihenanordnungen (9), die einen Pixelbereich (17) definieren, wobei die Reihenanordnungen (9) auf der Lochtransportschicht (5) aufgesetzt sind;
eine organische EL-Schicht (13) in dem Pixelbereich (17); und
eine negative Elektrode (15), die auf der organischen EL-Schicht (13) vorgesehen ist;
dadurch gekennzeichnet, dass
die Reihenanordnungen (9) Zeilenzustands-Reihenanordnungen sind, die elektrisch isolierend sind,
der durch die Reihenanordnungen (9) definierte Pixelbereich (17) ein Zeilenzustands-Pixelbereich ist,
die organische EL-Anzeigetafel, des Weiteren aufweist:

eine Zeilenzustands-Zwischenschicht (7, FIG. 4A), ausgebildet auf der Lochtransportschicht (5, FIG. 4A) in dem Pixelbereich (17, FIG. 4A), und eine organische EL-Polymerschicht (13, FIG. 4A), aufgesetzt auf der Zwischenschicht (7, FIG. 4A) im Pixelbereich (17, FIG. 4A), und
zweite Reihenanordnungen (11), die elektrisch isolierend sind, zwei oder mehrere untergeordnete Pixelbereiche (19) innerhalb des Pixelbereichs (17) definieren, wobei die zweiten Reihenanordnungen (11, FIG. 4A) auf der Lochtransportschicht (5, FIG. 4A) aufgesetzt sind, wodurch die Zwischenschicht (7, FIG. 4A) und die organische EL-Polymerschicht (13, FIG. 4A) gebildet werden,
die zweite Reihenanordnung (11) eine Ausnehmung (21) zur Verbindung der benachbarten, untergeordneten Pixelbereiche (19) miteinander aufweist, und die organische

EL-Schicht (13) eine organische EL-Zeilenzustandsschicht ist, die auf der Zwischenschicht (7) in dem Pixelbereich (17) aufgesetzt ist.

2. Organische EL-Anzeigetafel nach Anspruch 1, wobei die Zeilenzustands-Reihenanordnung (9) ein Fluorkunstharz enthält.
3. Organische EL-Anzeigetafel nach Anspruch 1, wobei die Zeilenzustands-Reihenanordnung-(9) eine fluoridierte Oberfläche aufweist.
4. Organische EL-Anzeigetafel nach Anspruch 1, des Weiteren umfassend eine isolierende, anorganische Folie (22), die von der Zeilenzustands-Reihenanordnung (9) in den Pixelbereich (17) vorsteht und sich mit einer Bodenfläche der Zwischenschicht (7) oder organischen EL-Polymerschicht (13) in Kontakt befindet, wobei ein Material der Lochtransportschicht (5) Wolframoxid (WO_x), Molybdänoxid (MoO_x), Vanadiumoxid (VO_x) oder eine Kombination davon enthält.
5. Organische EL-Anzeigetafel nach Anspruch 1, wobei die organische EL-Anzeigetafel vom Typ einer aktiven Matrix ist und die positiven Elektroden (3) in Matrixform auf dem Substrat (1) angeordnet sind.
6. Organische EL-Anzeigetafel nach Anspruch 1, wobei die organische EL-Polymerschicht (13) eine Überzugsschicht ist, die einen organischen EL-Polymerwerkstoff enthält.
7. Organische EL-Anzeigetafel nach Anspruch 1, wobei die Zwischenschicht (7) eine Überzugsschicht ist, die ein Material der Zwischenschicht enthält.
8. Organische EL-Anzeigetafel, umfassend:
- ein Substrat (1);
positive Elektroden (3), auf dem Substrat (1) aufgesetzt;
Reihenanordnungen (9), die einen Pixelbereich (17) definieren;
eine Lochtransportschicht (5), die auf dem mit den positiven Elektroden (3) versehenen Substrat (1) vorgesehen ist;
eine organische EL-Schicht (13) in dem Pixelbereich (17); und
eine negative Elektrode (15), die auf der organischen EL-Schicht (13) vorgesehen ist;
dadurch gekennzeichnet, dass
die Reihenanordnungen (9) Zeilenzustands-Reihenanordnungen sind, die elektrisch isolierend sind und auf dem Substrat (1) aufgesetzt sind,
der durch die Reihenanordnungen (9) definierte

Pixelbereich (17) ein Zeilenzustands-Pixelbereich ist,
 die Lochtransportschicht (5) eine Zeilenzustands-Lochtransportschicht ist und in dem Pixelbereich (17) eingesetzt ist,
 die organische EL-Anzeigetafel des Weiteren aufweist:

eine Zeilenzustands-Zwischenschicht (7, FIG. 4A), ausgebildet auf der Lochtransportschicht (5, FIG. 4A) in dem Pixelbereich (17, FIG. 4A), und eine organische EL-Polymerschicht (13, FIG. 4A), aufgesetzt auf der Zwischenschicht (7, FIG. 4A) im Pixelbereich (17, FIG. 4A),
 zweite Reihenanordnungen (11), die elektrisch isolierend sind, zwei oder mehrere untergeordnete Pixelbereiche (19) im Inneren des Pixelbereiches (17) definieren, wobei die zweiten Reihenanordnungen (11, FIG. 4A) auf der Lochtransportschicht (5, FIG. 4A) aufgesetzt sind, wodurch die Zwischenschicht (7, FIG. 4A) und die organische EL-Polymerschicht (13, FIG. 4A) definiert sind,
 die zweite Reihenanordnung (11) eine Ausnehmung (21) aufweist, um die benachbarten, untergeordneten Pixelbereiche (19) miteinander zu verbinden, und die organische EL-Schicht (13) eine organische EL-Zeilenzustandsschicht ist, die auf der Zwischenschicht (7) in dem Pixelbereich (17) aufgesetzt ist.

9. Organische EL-Anzeigetafel nach Anspruch 8, wobei die Zeilenzustands-Reihenanordnung (9) ein Fluorkunstharz enthält.

10. Organische EL-Anzeigetafel nach Anspruch 8, wobei die Zeilenzustands-Reihenanordnung (9) eine fluoridierte Oberfläche aufweist.

11. Organische EL-Anzeigetafel nach Anspruch 8, des Weiteren umfassend eine isolierende, anorganische Folie (22), die von der Zeilenzustands-Reihenanordnung (9) in den Pixelbereich (17) vorsteht und sich mit einer Bodenfläche der Zwischenschicht (7) oder organischen EL-Polymerschicht (13) in Kontakt befindet, wobei ein Werkstoff der Lochtransportschicht (5) Wolframoxid (WO_x), Molybdändioxid (MoO_x), Vanadiumoxid (VO_x) oder eine Kombination davon enthält.

12. Organische EL-Anzeigetafel nach Anspruch 8, des Weiteren umfassend eine isolierende, anorganische Folie (22), die von der Zeilenzustands-Reihenanordnung (9) in den Pixelbereich (17) vorsteht und sich mit einer Bodenfläche der Lochtransportschicht (5)

in Kontakt befindet, wobei ein Werkstoff der Lochtransportschicht (5) Polyethylenedioxythiophen enthält.

13. Organische EL-Anzeigetafel nach Anspruch 8, wobei die organische EL-Anzeigetafel vom Typ einer aktiven Matrix ist und die positiven Elektroden (3) in Matrixform auf dem Substrat (1) angeordnet sind.

14. Organische EL-Anzeigetafel nach Anspruch 8, wobei die organische EL-Polymerschicht (13) eine Überzugsschicht ist, die ein organisches EL-Polymermaterial enthält.

15. Organische EL-Anzeigetafel nach Anspruch 11, wobei die Zwischenschicht (7) eine Überzugsschicht ist, die ein Material der Zwischenschicht enthält.

16. Organische EL-Anzeigetafel nach Anspruch 12, wobei die Lochtransportschicht (5) eine Überzugsschicht ist, die ein Material der Lochtransportschicht enthält.

25 Revendications

1. Panneau d'affichage EL organique comprenant :

un substrat (1) ;
 des électrodes d'anode (3) disposées sur le substrat (1) ;
 une couche de transport de trous (5) prévue sur le substrat (1) prévu avec les électrodes d'anode (3) ;
 des bancs (9) définissant une région de pixels (17), les bancs (9) étant disposés sur la couche de transport de trous (5) ;
 une couche EL organique (13) dans la région de pixels (17) ; et
 une électrode de cathode (15) prévue sur la couche EL organique (13) ;
caractérisé en ce que
 les bancs (9) sont des bancs à l'état de ligne qui sont électriquement isolants,
 la région de pixels (17) définie par les bancs (9) est une région de pixels à l'état de ligne,
 le panneau d'affichage EL organique comprend en outre :

une intercouche à l'état de ligne (7, FIG. 4A) formée sur la couche de transport de trous (5, FIG. 4A) dans la région de pixels (17, FIG. 4A) et une couche EL organique polymère (13, FIG. 4A) disposée sur l'intercouche (7, FIG. 4A) dans la région de pixels (17, FIG. 4A), et
 des seconds bancs (11), qui sont électriquement isolants, définissant deux régions

- de sous-pixels ou plus (19) à l'intérieur de la région de pixels (17),
 dans lequel les seconds bancs (11, FIG. 4A) sont disposés sur la couche de transport de trous (5, FIG. 4A) définissant de là l'intercouche (7, FIG. 4A) et la couche EL organique polymère (13, FIG. 4A),
 le second banc (11) présente une rainure (21) pour la connexion des régions adjacentes de sous-pixels (19) les unes avec les autres, et
 la couche EL organique (13) est une couche EL organique polymère à l'état de ligne disposée sur l'intercouche (7) dans la région de pixels (17).
2. Panneau d'affichage EL organique selon la revendication 1, dans lequel le banc à l'état de ligne (9) contient une résine fluorée.
 3. Panneau d'affichage EL organique selon la revendication 1, dans lequel le banc à l'état de ligne (9) présente une surface fluorée.
 4. Panneau d'affichage EL organique selon la revendication 1, comprenant en outre un film inorganique isolant (22) qui fait saillie depuis le banc à l'état de ligne (9) dans la région de pixels (17) et qui se trouve en contact avec une surface inférieure de l'intercouche (7) ou de la couche EL organique polymère (13), dans lequel une matière de la couche de transport de trous (5) contient de l'oxyde de tungstène (WO_x), de l'oxyde de molybdène (MoO_x), de l'oxyde de vanadium (VO_x) ou une combinaison de ceux-ci.
 5. Panneau d'affichage EL organique selon la revendication 1, dans lequel le panneau d'affichage EL organique est du type matrice active et les électrodes d'anode (3) sont configurées sous la forme d'une matrice sur le substrat (1).
 6. Panneau d'affichage EL organique selon la revendication 1, dans lequel la couche EL organique polymère (13) est une couche de revêtement contenant un matériau EL organique polymère.
 7. Panneau d'affichage EL organique selon la revendication 1, dans lequel l'intercouche (7) est une couche de revêtement contenant une matière de l'intercouche.
 8. Panneau d'affichage EL organique comprenant :
 - un substrat (1) ;
 - des électrodes d'anode (3) disposées sur le substrat (1) ;
 - des bancs (9) définissant une région de pixels (17) ;

une couche de transport de trous (5) prévue sur le substrat (1) prévu avec les électrodes d'anode (3) ;
 une couche EL organique (13) dans la région de pixels (17) ; et
 une électrode de cathode (15) prévue sur la couche EL organique (13) ;
caractérisé en ce que
 les bancs (9) sont des bancs à l'état de ligne qui sont électriquement isolants et disposés sur le substrat (1),
 la région de pixels (17) définie par les bancs (9) est une région de pixels à l'état de ligne,
 la couche de transport de trous (5) est une couche de transport de trous à l'état de ligne et est disposée dans la région de pixels (17),
 le panneau d'affichage EL organique comprend en outre :

- une intercouche à l'état de ligne (7, FIG. 4A) formée sur la couche de transport de trous (5, FIG. 4A) dans la région de pixels (17, FIG. 4A) et une couche EL organique polymère (13, FIG. 4A) disposée sur l'intercouche (7, FIG. 4A) dans la région de pixels (17, FIG. 4A),
 des seconds bancs (11), qui sont électriquement isolants, définissant deux régions de sous-pixels ou plus (19) à l'intérieur de la région de pixels (17),
 dans lequel les seconds bancs (11, FIG. 4A) sont disposés sur la couche de transport de trous (5, FIG. 4A) définissant de là l'intercouche (7, FIG. 4A) et la couche EL organique polymère (13, FIG. 4A),
 le second banc (11) présente une rainure (21) pour la connexion des régions adjacentes de sous-pixels (19) les unes avec les autres, et
 la couche EL organique (13) est une couche EL organique polymère à l'état de ligne disposée sur l'intercouche (7) dans la région de pixels (17).
- 9. Panneau d'affichage EL organique selon la revendication 8, dans lequel le banc à l'état de ligne (9) contient une résine fluorée.
- 10. Panneau d'affichage EL organique selon la revendication 8, dans lequel le banc à l'état de ligne (9) présente une surface fluorée.
- 11. Panneau d'affichage EL organique selon la revendication 8, comprenant en outre un film inorganique isolant (22) qui fait saillie depuis le banc à l'état de ligne (9) dans la région de pixels (17) et qui se trouve en contact avec une surface inférieure de l'intercouche (7) ou de la couche EL organique polymère (13),

dans lequel une matière de la couche de transport de trous (5) contient de l'oxyde de tungstène (WO_x), de l'oxyde de molybdène (MoO_x), de l'oxyde de vanadium (VO_x) ou une combinaison de ceux-ci.

5

12. Panneau d'affichage EL organique selon la revendication 8, comprenant en outre un film inorganique isolant (22) qui fait saillie depuis le banc à l'état de ligne (9) dans la région de pixels (17) et se trouve en contact avec une surface inférieure de la couche de transport de trous (5), dans lequel une matière de la couche de transport de trous (5) contient du polyéthylènedioxythiophène. 10
13. Panneau d'affichage EL organique selon la revendication 8, dans lequel le panneau d'affichage EL organique est du type matrice active et les électrodes d'anode (3) sont configurées sous la forme d'une matrice sur le substrat (1). 15 20
14. Panneau d'affichage EL organique selon la revendication 8, dans lequel la couche EL organique polymère (13) est une couche de revêtement contenant un matériau EL organique polymère. 25
15. Panneau d'affichage EL organique selon la revendication 11, dans lequel l'intercouche (7) est une couche de revêtement contenant une matière de l'intercouche. 30
16. Panneau d'affichage EL organique selon la revendication 12, dans lequel la couche de transport de trous (5) est une couche de revêtement contenant une matière de la couche de transport de trous. 35

40

45

50

55

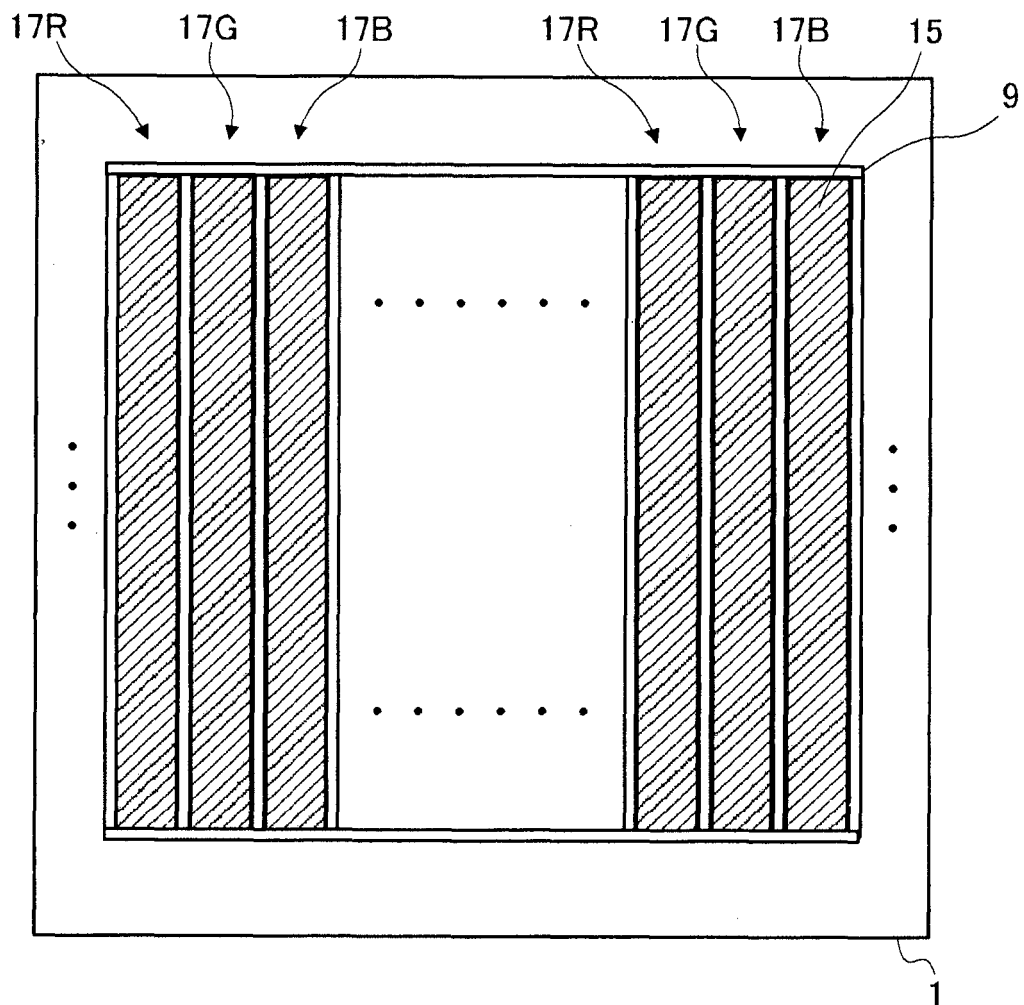


FIG.1A

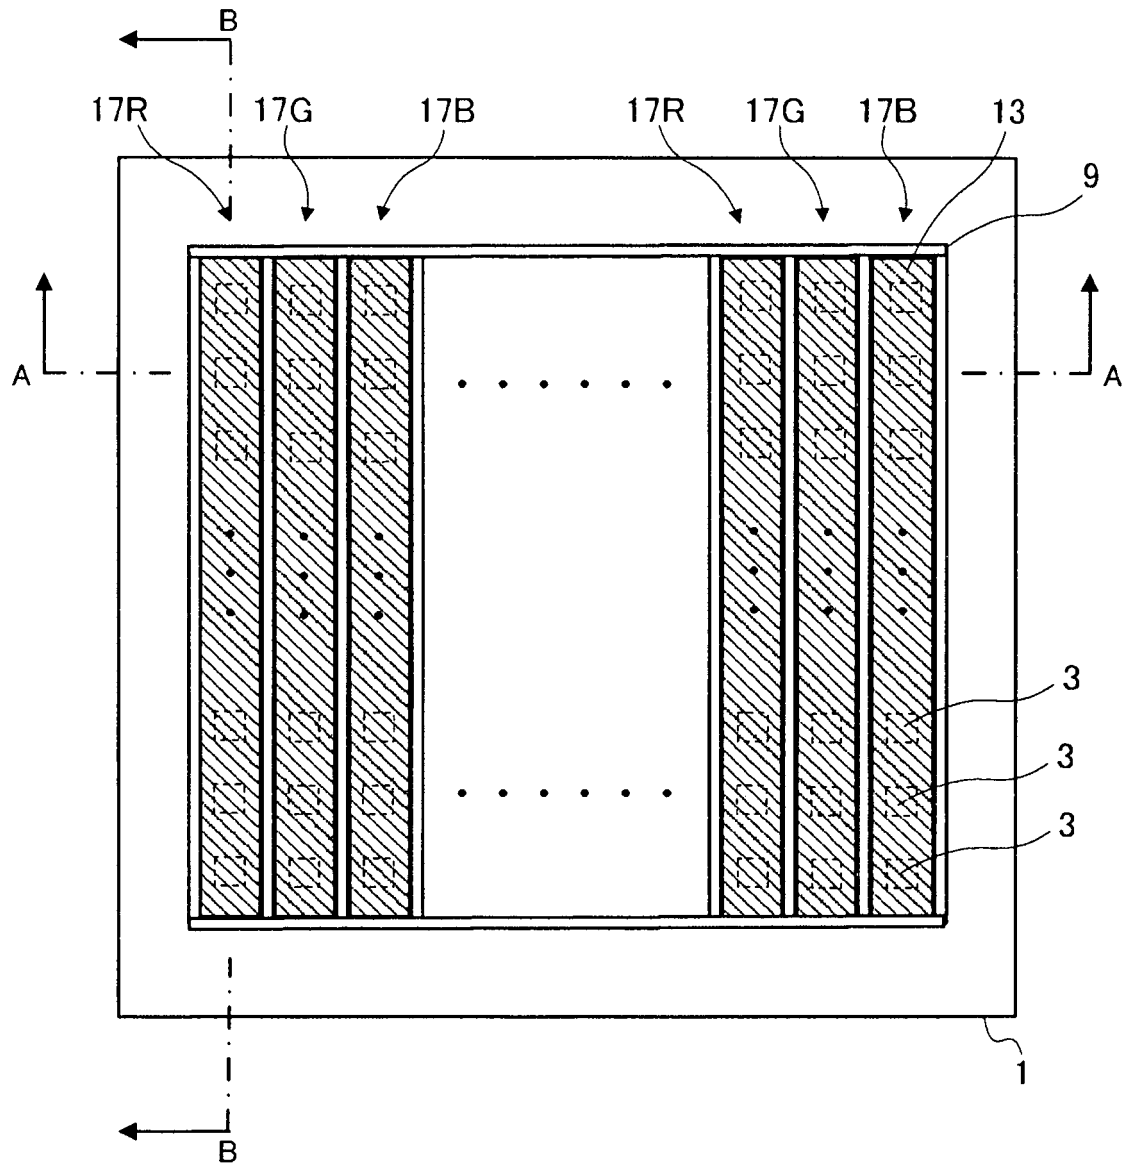


FIG.1B

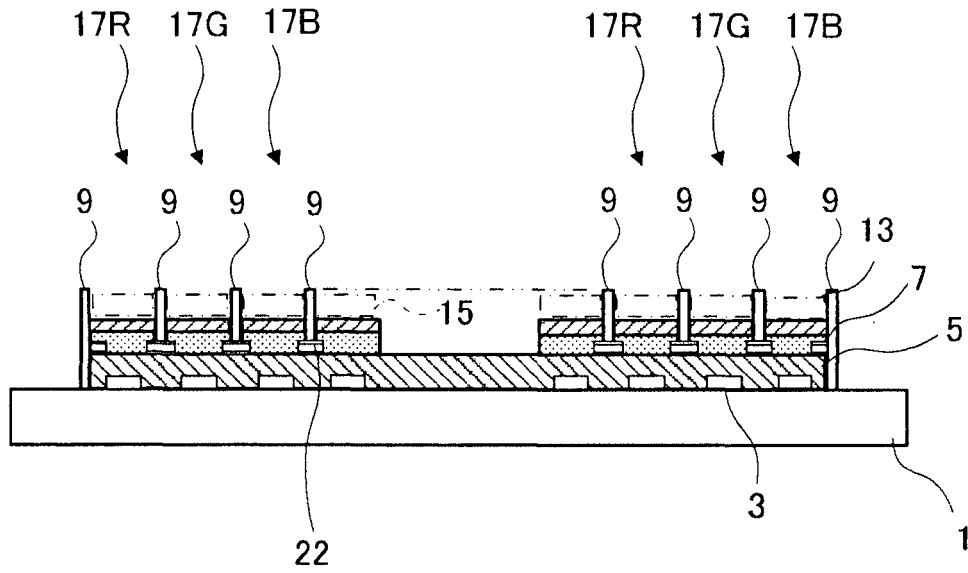


FIG. 2A

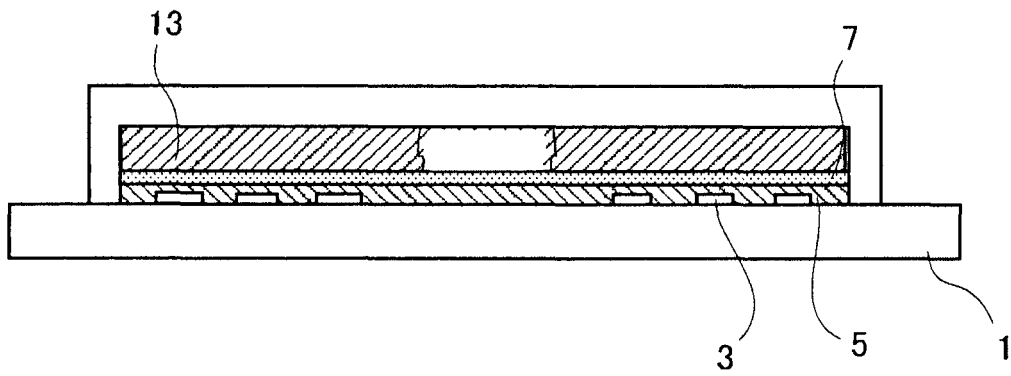


FIG. 2B

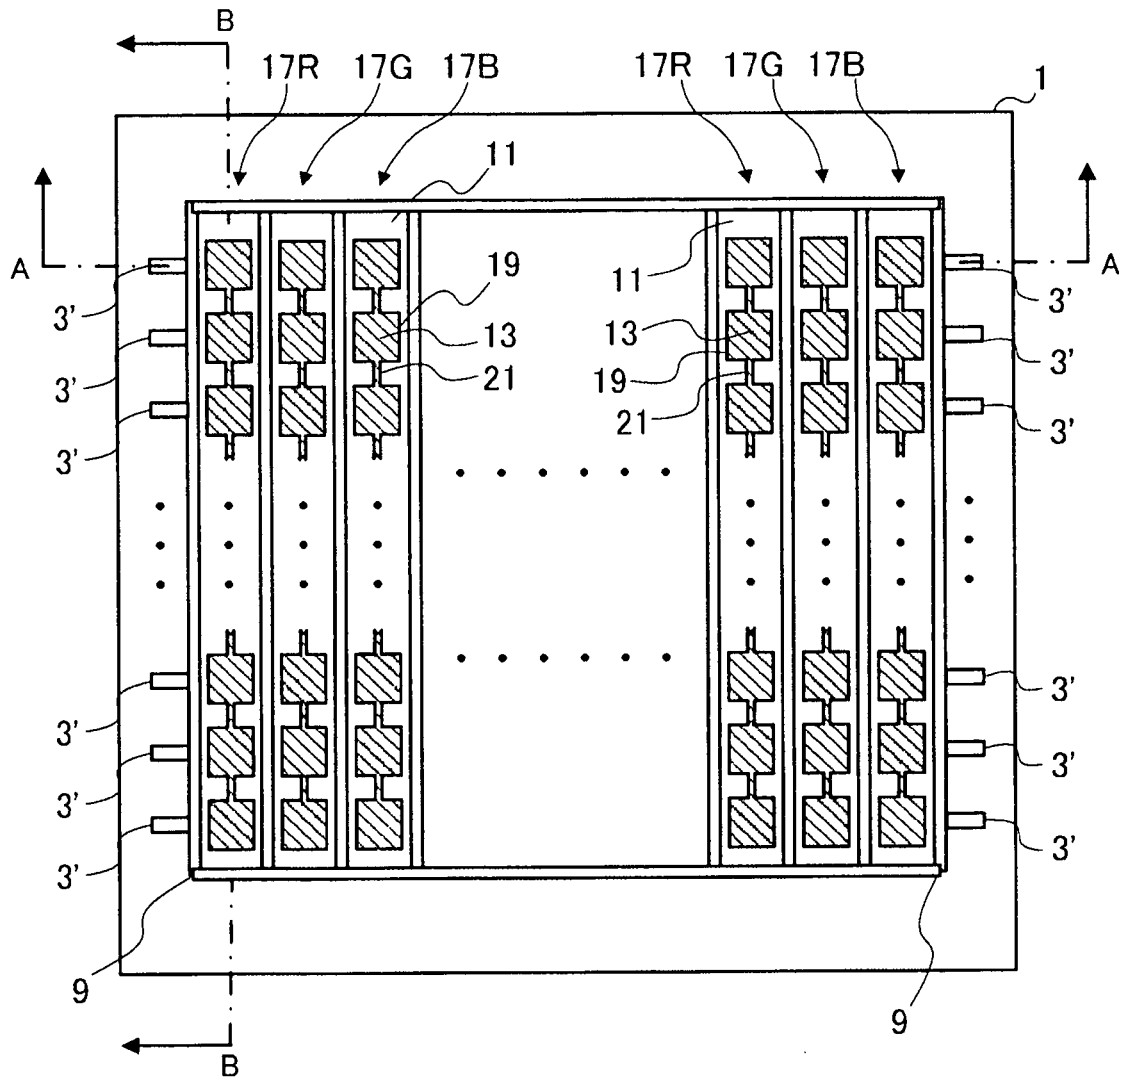


FIG.3

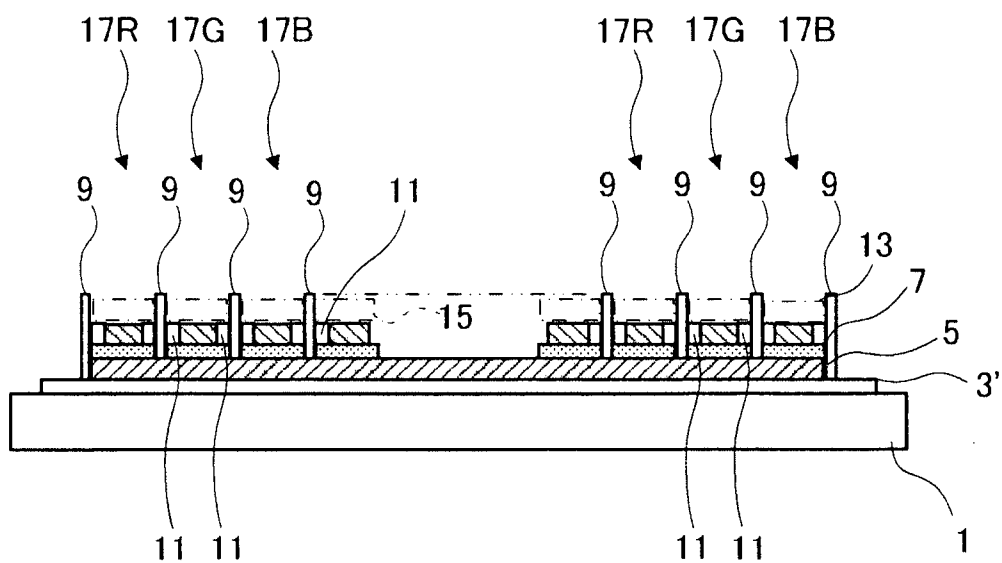


FIG. 4A

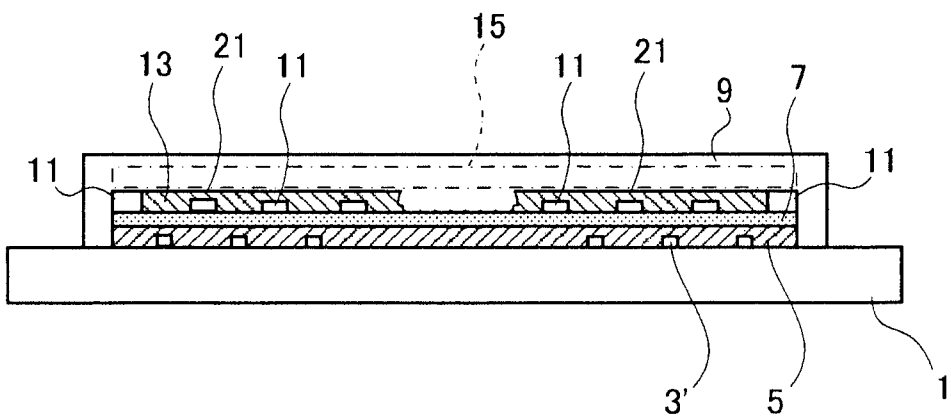


FIG. 4B

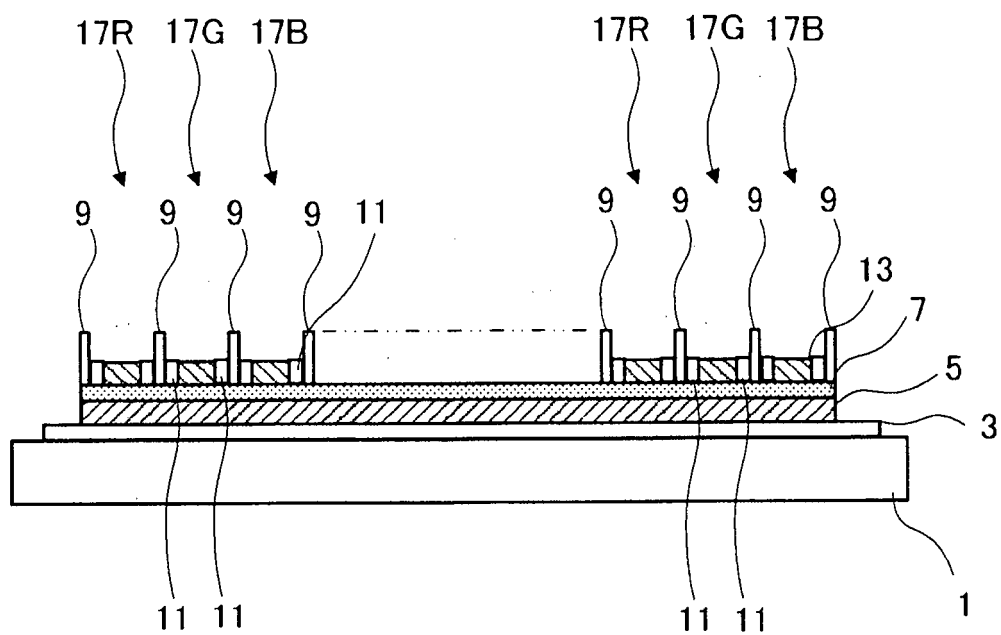


FIG.5A

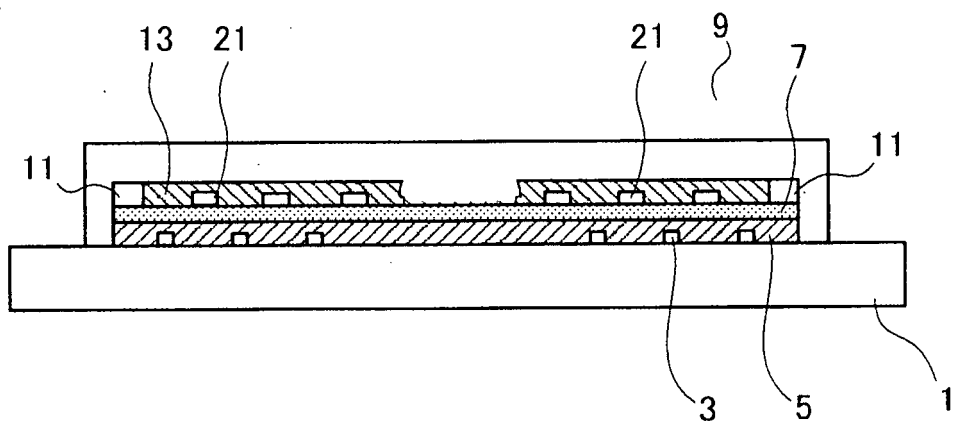


FIG.5B

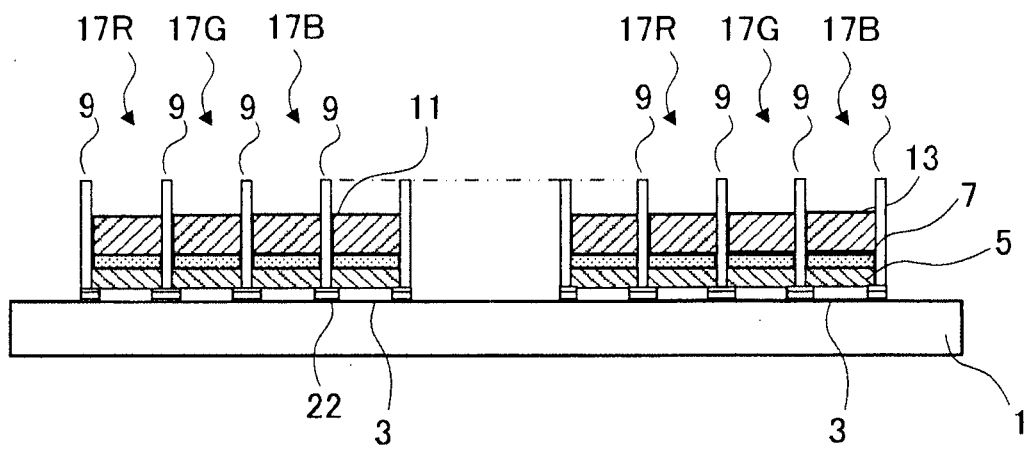


FIG. 6A

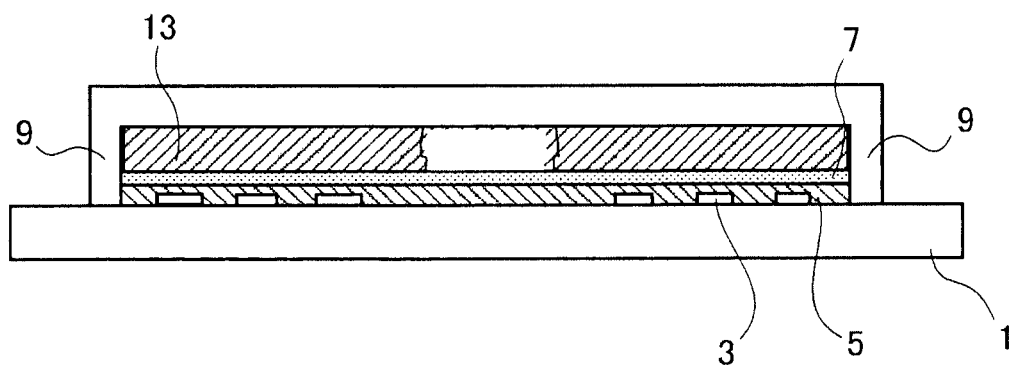


FIG. 6B

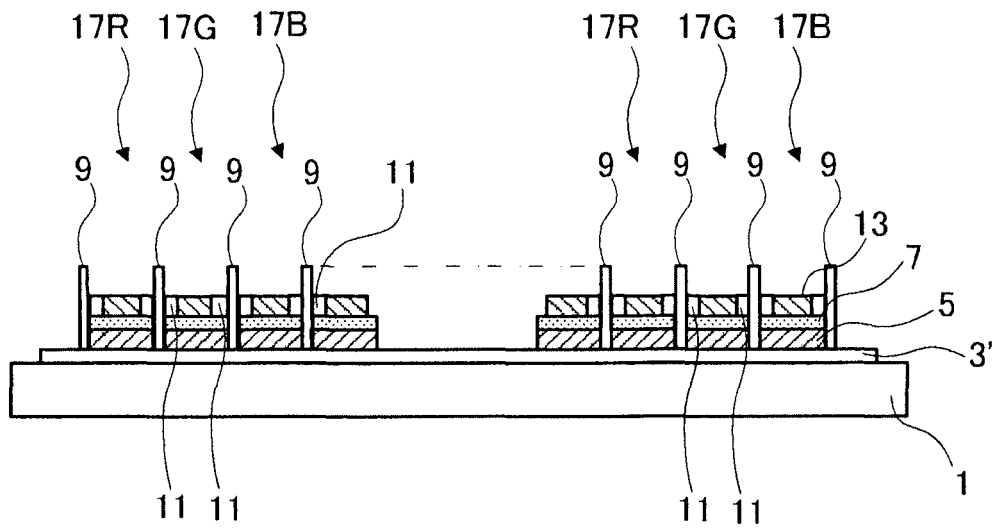


FIG. 7A

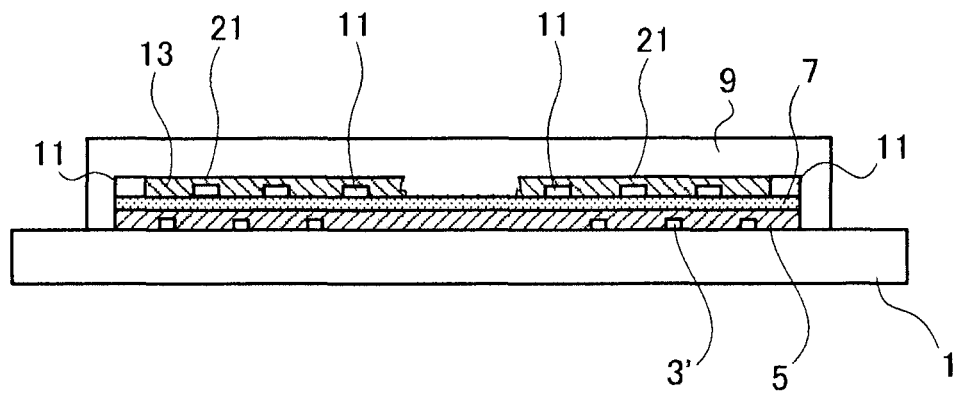


FIG. 7B

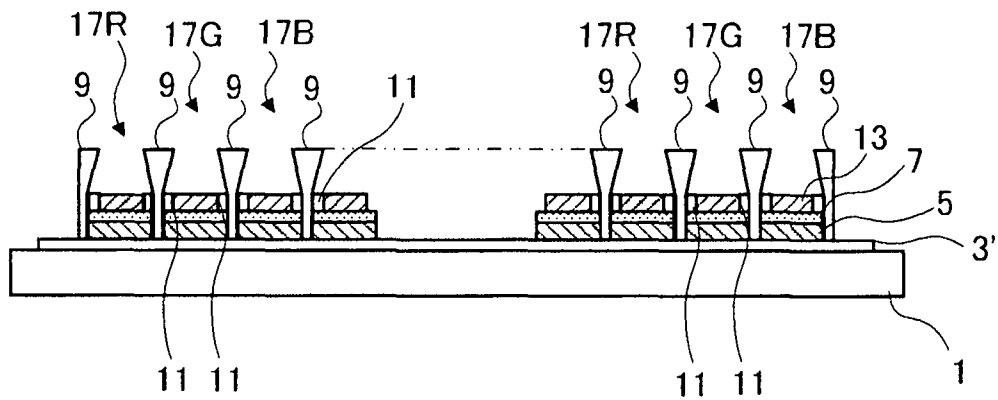


FIG.8

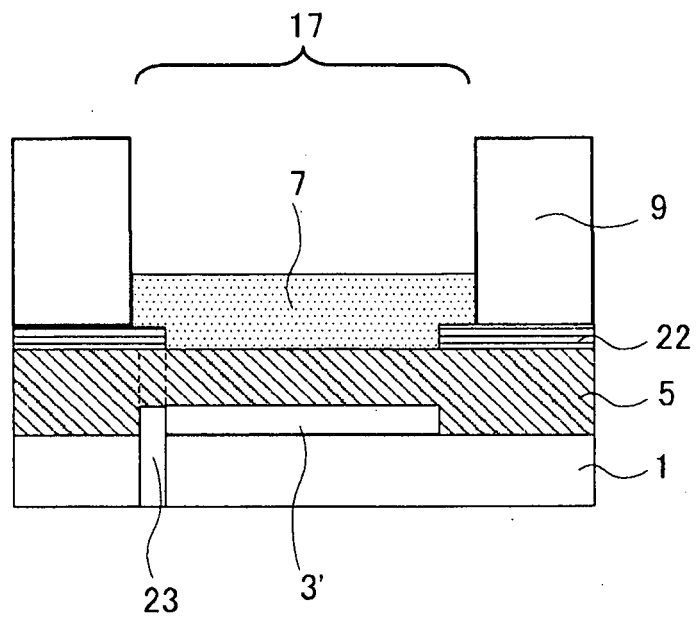


FIG.9

FIG.10A

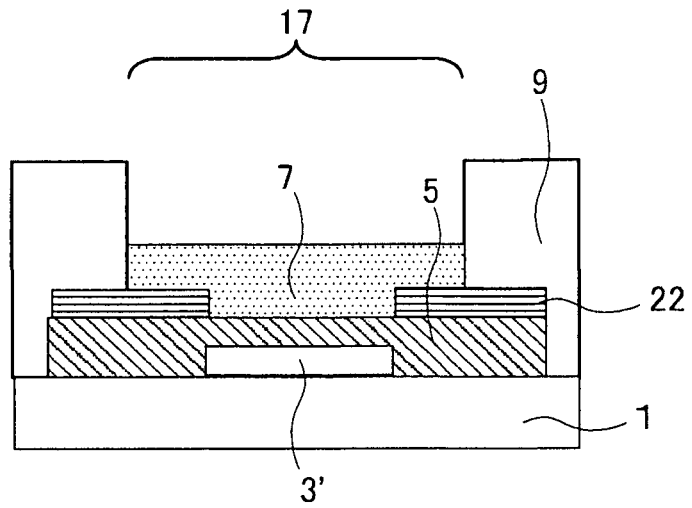


FIG.10B

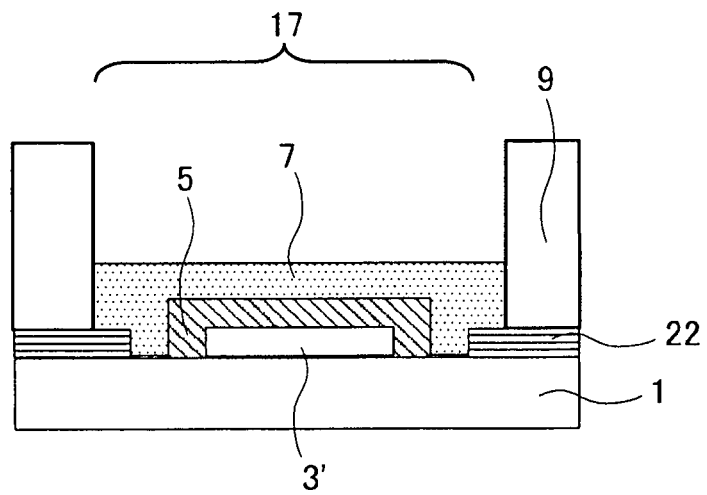
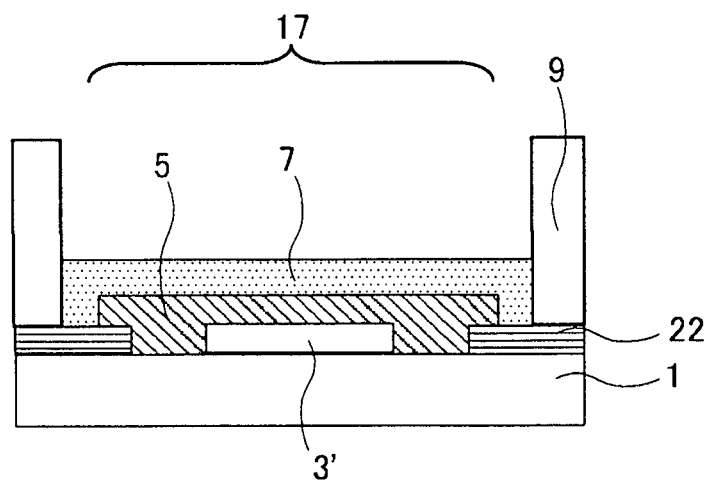


FIG.10C



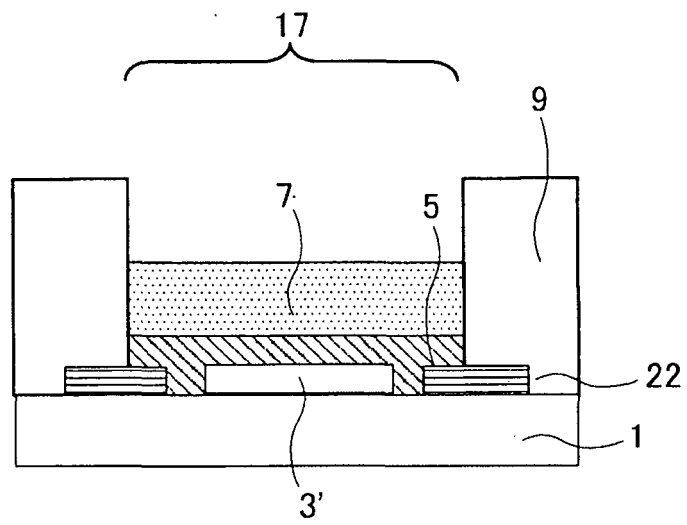


FIG.11

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6388377 B [0008]
- US 7091660 B [0008]
- JP 2004235128 A [0008]
- JP 2004234901 A [0008]
- US 2004119066 A [0008]
- JP 2007143906 A [0141]

专利名称(译)	有机EL显示板		
公开(公告)号	EP2151867B1	公开(公告)日	2016-08-03
申请号	EP2008751786	申请日	2008-05-21
[标]申请(专利权)人(译)	松下电器产业株式会社		
申请(专利权)人(译)	松下电器产业株式会社		
当前申请(专利权)人(译)	JOLED INC.		
[标]发明人	YOSHIDA HIDEHIRO KITAMURA YOSHIRO YAMAMURO KEISEI		
发明人	YOSHIDA, HIDEHIRO KITAMURA, YOSHIRO YAMAMURO, KEISEI		
IPC分类号	H01L27/32		
CPC分类号	H01L27/3246 H01L27/3211 H01L27/3283 H01L51/5048 H05B33/22		
优先权	2007143906 2007-05-30 JP		
其他公开文献	EP2151867A4 EP2151867A1		
外部链接	Espacenet		

摘要(译)

提供一种具有均匀厚度的聚合物有机EL层的有机EL显示板。有机EL显示面板包括基板，设置在基板上的阳极；空穴传输层，设置在基板上，阳极电极设置在基板上；在空穴传输层上的线中提供堤以限定线状像素区域；设置在像素区域中的线中间的中间层；聚合物有机EL层，在像素区域的中间层上排成一行；和设置在聚合物有机EL层上的阴极。

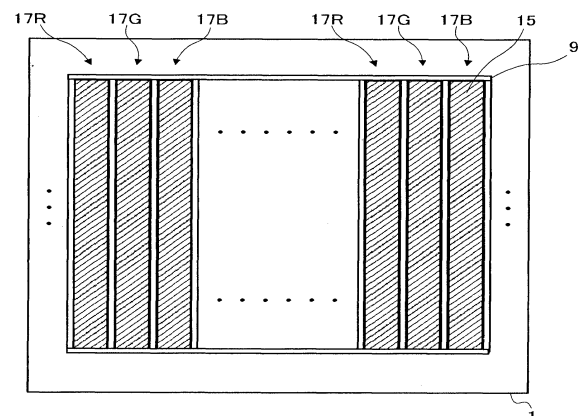


FIG. 1A