

(19)



(11)

EP 1 970 000 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.04.2016 Bulletin 2016/17

(51) Int Cl.:
A61B 5/021 ^(2006.01) *A61B 5/0452* ^(2006.01)
A61B 5/00 ^(2006.01)

(21) Application number: **08004559.4**

(22) Date of filing: **12.03.2008**

(54) **Method and apparatus for cufflessly and non-invasively measuring wrist blood pressure in association with communication device**

Verfahren und Vorrichtung zur manschettenlosen und nicht-invasiven Messung des Handgelenkblutdrucks in Zusammenhang mit einem Kommunikationsgerät

Procédé et appareil pour mesurer la tension du poignet de manière non invasive et sans manchette en association avec un dispositif de communication

(84) Designated Contracting States:
DE FR GB

(30) Priority: **12.03.2007 KR 20070024163**

(43) Date of publication of application:
17.09.2008 Bulletin 2008/38

(73) Proprietor: **Samsung Electronics Co., Ltd.**
Suwon-si, Gyeonggi-do, 443-742 (KR)

(72) Inventors:

- **Cho, Jae-Geol**
Suwon-si
Gyeonggi-do (KR)
- **Jung, Sun-Tae**
Suwon-si
Gyeonggi-do (KR)
- **Im, Jae-Jung**
Suwon-si
Gyeonggi-do (KR)

(74) Representative: **Nederlandsch Octrooibureau**
P.O. Box 29720
2502 LS The Hague (NL)

(56) References cited:
WO-A-2004/019754 JP-A- 2006 149 846
US-A1- 2007 021 676

- **IM J J ET AL: "A study for the development of a noninvasive continuous blood pressure measuring system by analyzing radial artery pulse from a wrist" ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY, 1995., IEEE 17TH ANNUAL CONFERENCE MONTREAL, QUE., CANADA 20-23 SEPT. 1995, NEW YORK, NY, USA, IEEE, US, vol. 2, 20 September 1995 (1995-09-20), pages 1033-1034, XP010215080 ISBN: 978-0-7803-2475-6**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 970 000 B1

Description

BACKGROUND OF THE INVENTION

5 Field of the Invention

[0001] The present invention relates to the use of a pulse wave generated around an artery of a human body. More particularly, the present invention relates to a method and apparatus for acquiring a pulse wave signal and an electrocardiogram (ECG) signal using a pressure sensor, an infrared sensor, and an electrode and providing an analyzed result as a blood pressure value of an artery of a brachium.

Description of the Related Art

[0002] The occurrence of diseases related to high blood pressure such as heart disease and strokes has been shown to increase with a decrease of physical activity and a certain dietary habits. On the other hand, one of reasons that the importance of preventing diseases related to high blood pressure is that society is that the occurrence of diseases related to high blood pressure rapidly increases with an increase in age. One of methods of diagnosing and preventing the occurrence of diseases related to high blood is to periodically measure blood pressure. Arterial blood pressure is determined by the flow of blood, the elasticity of a blood vessel, contraction resistance, etc., and is a vital sign indicating an abnormal symptom in organs related to high blood pressure. High blood pressure can damage all major organs in the body.

[0003] There are two basic methods of measuring blood pressure, i.e. an invasive method and a non-invasive method. When a high-risk patient is being treated in an Operating Room (OR) or an Intensive Care Unit (ICU), the invasive method, which can continuously monitor arterial blood pressure and take an arterial blood sample on demand for analyzing gas of the arterial blood, is used. However, the invasive method is very cumbersome in preparation and treatment, may cause a complication such as damage to tissues due to infection or blood vessel obstruction. In addition, as the invasive method, is mostly applied to critically ill patients, and patient management in such cases requires a great deal of care use, there is a concern regarding complications associate with use of the invasive method. Thus, under ordinary circumstances, the non-invasive method of measuring blood pressure using a cuff is mainly used. However, the non-invasive method has disadvantages that blood pressure cannot be continuously monitored, a difference may occur according to subjectivity of the person taking the measurement, etc. Also, there is difficulty in measuring blood pressure in the case where the blood pressure decreases to less than a predetermined value. For example, it has been reported that it is difficult to apply the non-invasive method to children and critically ill patients, and accuracy of the non-invasive method is significantly lower for patients having diastolic blood pressure of 70 mm Hg.

[0004] In addition, there is another disadvantage in that correct blood pressure measurements cannot be obtained if the circumference of a brachium wrapped by a cuff is not factored into a blood pressure measurement using a cuff. However, at present, it is impossible to measure blood pressure with a cuff and factor in the circumference of a brachium. Moreover, since a process of applying pressure of around 200 mmHg is necessary when a cuff is used, a blood vessel or tissue may be damaged from the pressure. In order to compensate these disadvantages due to a cuff, there has been unsuccessful attempts to continuously measure blood pressure via a non-invasive method without the use of the cuff. However, reliable blood pressure monitoring under such circumstances has not been realized.

[0005] Attempts at providing apparatuses for continuously measuring non-invasive and cuffless blood pressure are disclosed in US Patent Publication No. 6,413,223 titled "Cuffless Continuous Blood Pressure Monitor" and US Patent Publication No. 6,669,648 titled "Continuous Non-invasive Sphygmomanometer". However, such measured positions are limited to a finger, or blood pressure is measured at a position around a wrist, which is difficult to affix. Moreover, since such as the apparatus as disclosed in the aforementioned patent requires additional devices for driving a light source to continuously measure blood pressure, such apparatuses fail to solve a problem that it is inconvenient and difficult to apply the such apparatuses to a human body in order to make an accurate measurement.

[0006] WO 2004/019754 A2 relates to an automatic blood pressure measuring instrument and method designed to obtain a pulse wave signal and electrocardiogram (ECG) signals from a pressure sensor and an ECG monitor, to analyze correlation between both signals, to operate a maximum blood pressure and a minimum blood pressure based on the analyzed data, and to output the operated result to a display. The automatic blood pressure measuring instrument comprises a pressure sensor for obtaining a pulse wave from a wrist of the subject, a pulse wave signal processing section for amplifying, filtering and noise-removing the pulse wave applied from the pressure sensor, an electrocardiogram monitor for measuring a systolic blood pressure and a diastolic blood pressure and converting the measured results into electrical signals, an electrocardiogram signal processing section for amplifying, filtering and noise-removing the converted electrocardiogram measurement signals applied from the electrocardiogram monitor, an A/D converting section for converting the AC signals, which are applied from both the pulse wave signal processing section and the electrocardiogram signal processing section, into DC signals, a controlling section for comparing and analyzing the pulse wave

signal and the electrocardiogram signals applied through the A/D converting section to operate the blood pressure of the subject, and a display for displaying the blood pressure of the subject operated at the controlling section.

[0007] US 2007/0021676 A1 relates to a portable device having a biosignal measuring instrument that includes: at least one first electrocardiogram signal sensor portion on a first surface of the portable device that contacts a first hand of a user, to measure a first electrocardiogram signal of the user; at least one second electrocardiogram signal sensor portion on a second surface of the portable device that contacts a wrist of a second hand of the user, to measure a second electrocardiogram signal from the wrist; a pulse waveform sensor on the second surface and in parallel with the second electrocardiogram signal sensor portion, to sense a pulse waveform from the wrist; a waveform controller generating an electrocardiogram waveform of the user from the measured first electrocardiogram signal and second electrocardiogram signal, generating a pulse waveform of the user from the sensed pulse waveform, and detecting at least one characteristic point of the pulse waveform by referring to the electrocardiogram waveform; and an output portion providing a result of the pulse wave analysis based on the at least one detected characteristic point of the user.

[0008] The document by IM J.J. et al.: "A study for the development of a noninvasive continuous blood pressure measuring system by analyzing radial artery pulse from a wrist" ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY, 1995., IEEE 17TH ANNUAL CONFERENCE MONTREAL, QUE., CANADA 20-23 SEPT. 1995, NEW YORK, NY, USA, IEEE, US, vol. 2, 20 September 1995 (1995-09-20), pages 1033-1034, XP010215080, relates to a pressure transducer and a prototype system for non-invasive measurement of blood pressure that was developed to detect blood pressure pulse from radial artery on the wrist. Three signals, intra-arterial pressure pulse, radial artery pulse, and FSR output were collected from 5 patients during surgery. The results showed that the phasic configuration of two waveforms, intra-arterial pressure pulse and radial artery pressure pulse, was remarkably similar when the wrist strap was fastened to the point which made the arterial pressure pulse waveform to a maximum peak-to-peak value.

[0009] JP 2006 149846 A relates to a blood vessel observation system for observing the blood vessels running within the living tissue. The blood vessel observation system is used in surgical procedures such as laparoscopic surgery in particular.

[0010] As the measurement of blood pressure provides important diagnostic information and is a factor in the treatment of patients for many illnesses, there is a long-felt need in the art to develop a technique of simply and continuously measuring blood pressure at a wrist without using a cuff. There are many obstacles that must be overcome, such as the deployment of a sensor attached to the human body, the establishment of a correct algorithm for calculating blood pressure values using a waveform of a pulse wave, easy attachment and detachment of such an apparatus, and portability.

SUMMARY OF THE INVENTION

[0011] The present invention has been made in part to solve in part at least some of the above problems and/or disadvantages described above, and to provide at least the advantages discussed herein below.

[0012] The invention provides a method of cufflessly and non-invasively measuring wrist blood pressure according to claim 1 and a corresponding apparatus according to claim 12. Preferred embodiments are defined in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The above and other exemplary objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawing in which:

FIG. 1	is a perspective view of an apparatus for cufflessly and non-invasively measuring blood pressure at a person's wrist according to an exemplary embodiment of the present invention;
FIGs. 2A and 2B	are respectively a front view and a side view of a sensor unit of the apparatus illustrated in FIG. 1 according to an exemplary embodiment of the present invention;
FIGs. 2C and 2D	are respectively a front view and a side view of the sensor unit of the apparatus illustrated in FIG. 1, which includes an optical sensor, according to another exemplary embodiment of the present invention;
FIG. 2E	is a side view of the sensor unit of the apparatus illustrated in FIG. 1, which is put on a wrist of a user, according to an exemplary embodiment of the present invention;
FIG. 3	is a side view of an apparatus for cufflessly and non-invasively measuring blood pressure at a person's wrist according to an exemplary embodiment of the present invention;
FIG. 4	is a conceptual diagram of a blood pressure measurement apparatus according to an exemplary embodiment of the present invention;
FIGs. 5A, 5B, and 5C	are respective circuit diagrams of an analog signal processing unit for processing signals from a pressure sensor, an infrared sensor, and an electrocardiogram (ECG) sensor according to an exemplary embodiment of the present invention;

- FIG. 6 is a circuit diagram of a controller including an input unit, a state display unit, and a display unit according to an exemplary embodiment of the present invention;
- FIG. 7 is a flowchart of a blood pressure measuring method according to an exemplary embodiment of the present invention;
- 5 FIG. 8A is a flowchart of a blood pressure measuring method according to an exemplary embodiment of the present invention;
- FIG. 8B is a graph of an ECG signal and four pulse waveforms acquired through a clinical demonstration using a device for detecting a blood pressure value of a radial artery according to an exemplary embodiment of the present invention; and
- 10 FIGs. 9A, 9B, and 9C are scatter graphs of the lowest blood pressure value, the highest blood pressure value, and a pulse pressure value calculated using a calculation algorithm and actual values obtained from a clinical demonstration according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

15 **[0014]** Preferred exemplary embodiments of the present invention will be described herein below with reference to the accompanying drawings. It will be understood by those skilled in the art that specific factors, such as detail regarding some specific components, described herein below is being provided only for assistance in the general understanding of the present invention by a person of ordinary skill in the art, and the invention is not limited to the examples shown and described herein. Various changes in form and details may be made therein without departing from the scope of the appended claims. Hereinafter, a configuration and an operation of a non-invasive continuous blood pressure measurement apparatus according to an exemplary embodiment of the present invention and a non-invasive continuous blood pressure measurement method performed by the apparatus will be described in detail with reference to the attached drawings.

25 **[0015]** It is to be understood that the term "wrist blood pressure" refers to a measurement made in the region of the wrist. It should also be understood that the forearm could also be considered as being within such a region.

30 **[0016]** FIG. 1 is a perspective view of an apparatus for cufflessly and non-invasively measuring wrist blood pressure according to an exemplary embodiment of the present invention. Referring to FIG. 1, the reference numeral 100 denotes the total configuration of a portable continuous blood pressure measurement apparatus 300 according to an exemplary embodiment of the present invention. The non-invasive continuous blood pressure measurement apparatus 300 adapted for arrangement on a wrist region of a user, and the apparatus 300 is typically driven via a measurement button 101. A normal or abnormal operation state is displayed by a state display Light Emitting Diode (LED) 107. Continuous blood pressure measured using the apparatus 300 is displayed by a display unit 109 of the apparatus 300. Signals measured using the apparatus 300 are a pulse wave signal, an infrared signal for measuring light intensity through incidence and reflection thereof, and an ECG signal, and in order to measure the ECG, the ECG measurement unit 201 measures an ECG of a user via a finger arranged thereon.

35 **[0017]** In addition, in order to detect a pulse wave, a pressure and position are adjusted using a wristband 113 of the apparatus 300. The continuous blood pressure measured using the apparatus 300 can be transmitted to a cellular phone or other communication device via a communication terminal 150.

40 **[0018]** In order to measure continuous blood pressure using the portable continuous blood pressure measurement apparatus 300, the apparatus 300 is switched to a measurement mode by pushing the measurement button 101, which in this case is arranged in the upper right side of the apparatus 300. A sensor unit (200 shown in FIG. 2) is typically disposed near a radial artery region (350a shown in FIG. 3) of a wrist 350w, and the apparatus 300 is adapted for arrangement around or in the region of the wrist 350w of the user using the wristband 113 of the apparatus 300. It is determined through the status display LED 107 of the fixed apparatus 300 whether a pulse wave signal is being stably detected, and in order to measure the stable pulse wave signal, the stable pulse wave is measured by adjusting pressure applied to the sensor unit (200 shown in FIG. 2). An ECG signal is measured by contact of a finger of the other hand, which is free from the apparatus 300, with an ECG sensor 201 of the apparatus 300. The measured pulse wave and ECG signal are stored in a Random Access Memory (RAM) (455 of FIG. 4) included in a controller (450 of FIG. 4) of the apparatus 300. After the stored data is calculation-processed through the process illustrated in FIG. 7 to be described later, a continuous blood pressure value is displayed on the display unit 109.

50 **[0019]** FIG. 2 shows two exemplary types of the sensor unit 200 of a continuous blood pressure measurement apparatus according to an exemplary embodiment of the present invention. FIGs. 2A and 2B respectively illustrate a front view and a side view of the sensor unit 200 of the apparatus 300 illustrated in FIG. 1 according to an exemplary embodiment of the present invention, wherein the sensor unit includes a pressure sensor and an ECG sensor, and FIGs. 2C and 2D respectively show a front view and a side view of the sensor unit 200 of the apparatus illustrated in FIG. 1, which includes an optical sensor, according to another exemplary embodiment of the present invention, in which the sensor unit includes a pressure sensor, an ECG sensor, and an optical sensor. Referring now to FIGs. 2A and 2B, the sensor unit 200 typically

includes more than one pressure sensor 203, a Printed Circuit Board (PCB) 210 to which the pressure sensors 203 are arranged, a gel type epoxy processed unit 220 that typically surrounds the sensors 203 and the PCB 210, and a portion filled with gel 230. Each pressure sensor 203 used in the present invention converts a pressure signal to an electrical signal and measures a pressure of blood flowing through a blood vessel, which is affected to the blood vessel, by being put on a radial artery. The more than one pressure sensors 203 are arranged on the PCB 210, and in order to prevent the gel of a portion to which pressure of the pressure sensors 203 in a vessel of the sensor unit 200 is applied from leaking out and changing the overall the density of the gel 230 in the vessel of the sensor unit 200, the gel 230 of a portion of the sensor unit 200 touched to the wrist 350w of the user is processed by the epoxy processed unit 220. Since the gel 230 is used as a transmitter for transmitting a pulse wave signal, a pulse wave signal transmitted to each pressure sensor 203 varies according to density and a configuration of the gel 230.

[0020] A pulse wave signal transmitted to each pressure sensor 203 varies according to an angle and pressure achieved between the radial artery region (350a of FIG. 3) of the user and the sensor unit 200, and the magnitude of each pulse wave signal output from the more than one pressure sensors 203 varies according to an amount of pressure applied to the wrist 350w. This variation output by the more than one pressure sensors is used to correct the magnitude of a detected pulse wave to absolute pressure, the absolute pressure is processed by a calculation algorithm, and a calculated signal is used for continuous blood pressure analysis.

[0021] Thus, according to an exemplary aspect of the present invention, the sensor unit 200 for selecting a correct position of an artery and extracting a clear pulse wave signal preferably typically includes at least one pressure sensor 203, and outputs such pressure sensors 203, an ECG signal detected from an electrode installed in a wrist strap, and a pulse wave signal can be used for accurate and highly repeatable continuous blood pressure analysis.

[0022] Referring now to FIGs. 2C and 2D corresponding to another exemplary embodiment of the present invention, the sensor unit 200 includes an ECG sensor 201, a plurality of infrared sensors 202, a plurality of pressure sensors 203, a PCB 210 to which the pressure sensors 203 are fixed, a gel type epoxy processed unit 220 surrounding the infrared sensors 202.

[0023] Still referring to FIGs. 2C and 2D, according to this exemplary embodiment of a sensor unit 200 of the present invention, the ECG sensor 201 detects an ECG signal indicating electrical activity of a heart and transmits the ECG signal to an analog signal processing unit (411 shown in FIG. 4). In the case of the exemplary embodiment of FIGs. 2A and 2B, since three ECG sensors including the electrode (201 of FIG. 1) located in the outside of the apparatus 300 are typically used, two additional electrodes are typically used in a strap region. In the case of the exemplary embodiment of FIGs. 2C and 2D, two electrodes in the sensor unit 200 and the electrode (201 of FIG. 1) located in the outside of the apparatus 300 are used to acquire the ECG signal.

[0024] The infrared sensor 202 typically includes a photo diode and an LED, and light emitted by the LED is multiply diffused through the skin, subcutaneous fat, muscles, and a radial artery around the wrist 350w of the user and received by the photo diode, generating an analog output signal. The infrared sensors 202 of the sensor unit 200 according to an exemplary embodiment of the present invention are typically located around a group of the pressure sensors 203, and an output signal of each infrared sensor 202 is processed by a calculation program of the controller (450 shown in FIG. 4), forming a vector component. FIG. 2E is a side view of a sensor unit of the apparatus 300 illustrated in FIG. 1, which is put on a wrist of a user, according to an exemplary embodiment of the present invention.

[0025] FIG. 3 is a side view of an apparatus for cufflessly and non-invasively measuring wrist blood pressure according to an exemplary embodiment of the present invention. FIG. 3 shows an exemplary configuration of the continuous blood pressure measurement apparatus and includes the configuration illustrated in FIG. 1. The configuration of the apparatus will now be described. The non-invasive continuous blood pressure measurement apparatus 300 is put on around the wrist region 350w of the user and operated using the measurement button 101, and a normal or abnormal operating state is displayed by the status display LED 107. Continuous blood pressure that is measured using the apparatus 300 is displayed by the display unit 109 of the apparatus 300. Signals measured using the apparatus 300 are a pulse wave signal, an infrared signal for measuring light intensity through incidence and reflection thereof, and an ECG signal, and in order to measure the ECG, the user 350 typically arranges a finger on the ECG sensor unit 201.

[0026] In addition, in order to detect a normal pulse wave, pressure and position of the sensor unit 200 applied to the artery region 350a passing through a radial bone 350b of the wrist 350w of the user are adjusted using the wristband 113. The continuous blood pressure measured using the apparatus 300 can be transmitted via the terminal 150 of a communication device in order to communicate with an external device (470 shown in FIG. 4).

[0027] FIG. 4 is a conceptual diagram of a blood pressure measurement apparatus according to an exemplary embodiment of the present invention.

[0028] Referring to FIG. 4, a pulse wave signal is measured using the ECG sensor 201, at least one infrared sensor 202 for measuring a correct pulse wave signal, and at least one pressure sensor 203 from the operand 350 corresponding to the user. An ECG signal measured using the ECG sensor 201 is filtered and amplified by the analog signal processing unit corresponding to an SC1 411. The analog signal processed ECG signal is then input to an analog input terminal of an Analog/Digital (A/D) converter 451 of the controller 450, converted to a digital signal, and stored in the RAM 455.

[0029] Each infrared sensor signal, which is measured using the at least one infrared sensor 202, is filtered and amplified by an analog signal processing unit corresponding to an SC2 413. This analog signal processed infrared sensor signal is input to the analog input terminal of the A/D converter 451 of the controller 450, converted to a digital signal, digital signal processed by a Digital Signal Processor (DSP) 453 using a position and depth analysis program stored in a Read Only Memory (ROM) 457, and displayed on the display unit 109.

[0030] The infrared sensor signal is used to compensate individual conditions varying according to a user, such as a measured position and the depth of an artery. A pulse wave signal measured using a plurality of pressure sensors 203 is filtered and amplified by an analog signal processing unit corresponding to an SC3 415, input to the analog input terminal of the A/D converter 451, displayed on the display unit 109, and stored in the RAM 455. The ECG signal and the pulse wave signal stored in the RAM 455 is a digital signal processed by the DSP 453 using a continuous blood pressure analysis program stored in the ROM 457, and the analysis result is displayed on the display unit 109 and stored in a flash memory 459. The stored continuous blood pressure result value can be transmitted to an external device 470, such as a Personal Computer (PC) or a Personal Digital Assistant (PDA), or a server, by using the interface terminal 150, such as an external communication terminal. In order to control the controller 450, external inputs 103 and 105 are used.

[0031] FIGs. 5A, 5B, and 5C are respective diagrams of circuits for processing analog signals measured from the pressure sensor 203, the infrared sensor 202, and the ECG sensor 201 used in the continuous blood pressure measurement apparatus 300 according to an exemplary embodiment of the present invention.

[0032] FIG. 5A is a circuit diagram of a unit for processing an analog signal from a pressure sensor according to an exemplary embodiment of the present invention, showing a circuit taking charge of analog signal processing of a pulse wave signal measured by the pressure sensor 203 of the continuous blood pressure and artery elasticity measurement apparatus 300.

[0033] Referring now to FIG. 5A, a pulse wave signal having two polarities measured by the pressure sensor (203 of FIG. 4) from the user's wrist 350w is input to the input terminal of the analog signal processing unit (415 of FIG. 4). When the input + signal and - signal are input to a differential amplifier 21, noise components corresponding to the same phases are cancelled, only a difference between the two signals is amplified, and an amplification rate of the differential amplifier 21 is adjusted by a ratio of an input resistor R6 or R9 ($R6=R9$) to a feedback resistor R4 or R14 ($R4=R14$). From an initially amplified signal, a signal unnecessary to analyze continuous blood pressure and artery elasticity is removed using a High Pass Filter (HPF) 23, whose cut-off frequency is 0.1 Hz for cutting off low-band noise lower than 0.1 Hz, and a 4th order Low Pass Filter (LPF) 25, whose cut-off frequency is 10 Hz for cutting off high-band noise higher than 10 Hz. The noise-cancelled signal is secondary amplified by a reverse amplification circuit 27 not to be saturated higher than a supplied voltage and is input to the analog input terminal of the A/D converter (451 of FIG. 4) of the controller (450 of FIG. 4) in order to be converted to a digital signal.

[0034] FIG. 5B is a circuit diagram of a unit for processing an analog signal from an infrared sensor according to an exemplary embodiment of the present invention, showing a circuit taking charge of analog signal processing of an infrared sensor signal measured by the infrared sensor (202 shown in FIG. 4) of the continuous blood pressure measurement apparatus 300.

[0035] Referring to FIG. 5B, from the infrared sensor signal measured by the infrared sensor (202 of FIG. 4) from the user's wrist 350w, i.e. an emitter output signal of a photo transistor, a signal unnecessary to analyze artery position information is removed using an HPF 33 whose cut-off frequency is 0.1 Hz for cutting off low-band noise lower than 0.1 Hz and a 4th order LPF 35 whose cut-off frequency is 10 Hz for cutting off high-band noise higher than 10 Hz. The noise-cancelled signal is secondary amplified by a reverse amplification circuit 37 not to be saturated higher than a supplied voltage and is input to the analog input terminal of the A/D converter (451 of FIG. 4) of the controller (450 of FIG. 4) in order to be converted to a digital signal.

[0036] FIG. 5C is a circuit diagram of a unit for processing an analog signal from an ECG sensor according to another exemplary embodiment of the present invention, showing a circuit taking charge of analog signal processing of an ECG signal measured by the ECG sensor (201 of FIG. 4) of the continuous blood pressure measurement apparatus 300.

[0037] Referring to FIG. 5C, an ECG signal is a signal shown by converting an activity potential of a heart measured by three electrodes, i.e. the ECG sensors (201 of FIG. 4), to a voltage, and if a Common Mode Rejection Ratio (CMRR) indicating a ratio of common mode noise input through the human body increases, the common mode noise is removed using a differential amplifier 41, and only a potential difference between a + electrode and a - electrode is amplified. From an initially amplified signal, a signal unnecessary to analyze continuous blood pressure is removed using an HPF 43 whose cut-off frequency is 1 Hz for cutting off low-band noise lower than 1 Hz, a 4th order LPF 45 whose cut-off frequency is 30 Hz for cutting off high-band noise higher than 30 Hz, and a notch filter 47 for removing noise due to the general-use frequency (50/60 Hz) input through the electrodes. The noise-cancelled signal is secondary amplified by a reverse amplification circuit 49 not to be saturated higher than a supplied voltage and is input to the analog input terminal of the A/D converter (451 of FIG. 4) of the controller (450 of FIG. 4) in order to be converted to a digital signal.

[0038] FIG. 6 is a circuit diagram of the controller 450 including an input unit, the state display unit 107, and a display

unit 111 in the continuous blood pressure measurement apparatus 300 according to another exemplary embodiment of the present invention.

[0039] Referring to FIG. 6, the controller 450 (shown in FIG. 4) in the continuous blood pressure measurement apparatus 300 according to the current exemplary embodiment that includes the display unit 109 of the apparatus 300, the measurement button 101 for measuring measurement in the apparatus 300, the measurement buttons 103 and 105 for external inputs, the state display LED 107 displaying an operating state of the apparatus 300, and the communication terminal 150 for interfacing with the external device 470, such as a PC or PDA.

[0040] Analog signal processed pulse wave signal, infrared sensor signal, and ECG signal are input to the analog input terminal of the A/D converter (451 shown in FIG. 4) and converted to digital signals. By performing signal processing of the converted digital signals, the pulse wave signal is displayed on the display unit 109 and stored in the RAM 455 of the controller 450 (shown in FIG. 4). From the stored digital signals, a continuous blood pressure value is deduced using the continuous blood pressure analysis program stored in the ROM (457 in FIG. 4) of the controller 450 and displayed on the display unit 109. Calculated result data is stored in the flash memory 459 of the controller 450 and can be transmitted to the external device 470, such as a cellular phone, via the communication terminal 150. The controller 450 calculates data on an 8-bit basis, has a 16-channel analog input terminal, selects a signal of which an input exists using a multiplexer (MUX) 71, and outputs the selected signal via an output circuit. The equipped A/D converter 451 has 10-bit resolution, and since the controller 450 includes the external communication terminal 150 (shown in FIG. 1), the controller 450 can interface with the external device 470, such as a PC or PDA, without an additional communication interface. The controller 450 also can store the calculation program using the ROM (457 of FIG. 4).

[0041] In addition, although the controller 450 can process input data by itself, memory mapping is necessary to expand data storage memory and connect a display Liquid Crystal Display (LCD). In order to perform the memory mapping, address and data buses are preferably be used. However, since an AVR uses an address (16 bits)/data (8 bits) method and uses the same pins as lower address data, data and an address are divided using a latch 73. A data storage memory and an LCD are memory mapped with each other, and in order to generate a chip selecting signal, a digital signal is converted to an analog signal using a decoder 75.

[0042] The controller 450 forms a vector component by mixing more than infrared sensor signals using the calculation program stored in the ROM 457, searches for correct position and depth information of an artery using the formed vector component, and can show a continuous blood pressure analysis result by comparing and analyzing a measured pulse wave signal and an ECG signal.

[0043] FIG. 7 is a flowchart illustrating exemplary steps of a blood pressure measuring method in the continuous blood pressure measurement apparatus 300 according to an exemplary embodiment of the present invention.

[0044] Referring to FIG. 7, when measurement of a pulse wave signal of the user's wrist 350w using the continuous blood pressure measurement apparatus 300 begins in step F1, a signal generated due to the measurement button (101 of FIG. 1) is input to the external inputs (103 and 105 shown in FIG. 4) of the controller (450 shown in FIG. 4) in step F3. By acquiring artery position and depth information using at least one infrared sensor (202 shown in FIG. 4), measuring a pulse wave signal using the pressure sensor (203 shown in FIG. 4), and measuring an ECG signal using the ECG sensor (201 shown in FIG. 4) in step F5, an analog signal processor performs processes the ECG signal, the infrared sensor signal, and the pulse wave signal in step F7. Each one of the analog signal processed ECG signal, infrared sensor signal, and pulse wave signal is input to the analog input terminal of the A/D converter (451 shown in FIG. 4) of the controller (450 shown in FIG. 4) and converted to a digital signal in step F9. Still referring to FIG. 7, a digital LPF is applied to the radial pulse wave signal converted to the digital signal, and after trends are removed in step F11, the radial pulse wave signal is displayed in step F12. By calculating a non-distorted radial artery pressure value from the signal processed radial pulse wave signal using position and depth information from the infrared sensor signal and an R-peak timing of the ECG signal to be described later, variation due to a pressure difference is compensated in step F13, feature points are detected from the compensated radial pulse wave signal in step F15, and an algorithm for calculating a brachial blood pressure value is applied based on the feature points in step F17. A per-minute pulse rate is calculated from the detection of the feature points of the pulse wave in step F16, the calculated pulse rate is displayed in step F19, and a systolic blood pressure value and a diastolic blood pressure value calculated based on the algorithm are displayed in step F21. The algorithm calculation process will be described with reference to FIG. 8A.

[0045] FIG. 8A is a flowchart of a calculation process of the continuous blood pressure measuring algorithm according to an exemplary embodiment of the present invention.

[0046] Referring to FIG. 8A, when each feature point is detected in step D1, an R-peak is detected from a P-QRS-T waveform indicating one period of electric activity of a heart using an ECG signal. The R-peak denotes a de-polarization timing of the left ventricle of the heart. A beginning point, the highest point, and a notch point are detected from respective pulse wave signals. A pulse wave signal using infrared is used to compensate the detection of the highest point.

[0047] Still referring to FIG. 8A, a linear regression expression correlated to an actual blood pressure value detected through a clinical demonstration using catheters in an actual invasive method using variables calculated using the feature points in step D3, and the highest blood pressure value and the lowest blood pressure value are calculated from the

linear regression expression in steps D7 and D9. When the highest blood pressure value and the lowest blood pressure value are finally calculated, the calculation process using the algorithm ends, and the highest blood pressure value and the lowest blood pressure value are then displayed in step D11.

[0048] FIG. 8B is a graph of an ECG signal E1 and four pulse waveforms E2 through E5 acquired through a clinical demonstration using a device for detecting a blood pressure value of a radial artery according to an exemplary embodiment of the present invention. In the graph illustrated in FIG. 8B, feature points detected by using the blood pressure calculation algorithm described in FIG. 7 are shown.

[0049] Referring to FIG. 8B, an R-peak G1 is detected from a P-QRS-T waveform indicating one period of electric activity of a heart from the ECG signal E1. The R-peak G1 denotes a de-polarization timing of the left ventricle of a heart. A beginning point G2, the highest point G4, and a notch point G3 are detected from the respective pulse wave signals E2 through E5.

[0050] When the algorithm described in FIG. 8 is applied to these feature points, the highest blood pressure value and the lowest blood pressure value are calculated by calculating the time from the R-peak G1 to the pulse wave beginning point G2, the time from the R-peak G1 to the pulse wave highest point G4, the time from the pulse wave highest point G4 to the pulse wave notch point G3, and an area from the pulse wave beginning point G2 to the pulse wave notch point G3 and expressing a relation to an actual blood pressure value as a linear regression expression.

[0051] FIGs. 9A, 9B, and 9C are scatter graphs of the lowest blood pressure value, the highest blood pressure value, and a pulse pressure value calculated using the calculation algorithm and actual values obtained from a clinical demonstration according to an exemplary embodiment of the present invention. The showing scatter graphs of representative variables are deduced by applying the algorithm according to an exemplary embodiment of the present invention to the highest blood pressure value and the lowest blood pressure value invasively detected using catheters and the ECG signal E1 and the pulse waveforms E2 through E5 detected by a continuous blood pressure measurement apparatus for clinical validation.

[0052] FIG. 9A shows a scatter graph and a linear regression line of a time value from the R-peak G1, which is a variable showing high correlation with the highest blood pressure value among the extracted variables, to the pulse wave highest point G4, FIG. 9B shows a scatter graph and a linear regression line of a time value from the pulse wave highest point G4, which is a variable showing high correlation with the lowest blood pressure value among the extracted variables, to the pulse wave notch point G3, and FIG. 9C shows a scatter graph and a linear regression line of an absolute value of a compensated pulse pressure value, which is used for compensation as an absolute pressure value by setting a criterion of pressure applied to a wrist region using magnitude differences between at least one of the pulse wave signals E2 through E5, and an area value from pulse wave beginning point G2 to the pulse wave notch point G3.

[0053] In particular, when the above-described algorithm is summarized, a time difference between an R-peak of an ECG signal and the highest point of a pulse wave has strong correlation with the highest blood pressure, and the time from the highest point of the pulse wave to a notch point has strong correlation with the lowest blood pressure. Since these values are expressed by time, these values are not concerned with measured pressure. In addition, a direct line connecting a beginning point of the pulse wave and the notch point and an area between a waveform of the pulse wave and a direct line connecting a beginning point of the pulse wave and the notch point has strong correlation with pulse pressure indicating a difference between the highest blood pressure and the lowest blood pressure. The three correlation expressions are deduced from a clinical demonstration, and the highest blood pressure, the lowest blood pressure, and mean blood pressure can be obtained from two of the three correlation expressions or a set of any of them.

[0054] As described above, according to the present invention, a linear regression expression correlated to an actual blood pressure value detected through a clinical demonstration using the variables (step D3 of FIG. 8A) calculated using the feature points and the pulse pressure (step D5 of FIG. 8A) compensated using absolute blood pressure, and the highest blood pressure (step D7 of FIG. 8A) and the lowest blood pressure (step D9 of FIG. 8A) are finally calculated, and then the calculation process using the algorithm ends, and the highest blood pressure value and the lowest blood pressure value (step D11 of FIG. 8A) are displayed. In addition, the highest and lowest blood pressure values can be transmitted to an external device, such as a nurse's station, network, health monitoring system, etc. periodically and or when the values exceed a predetermined threshold. The threshold could be either higher or lower than a preset range.

[0055] As described above, according to the present invention, since a noninvasive continuous blood pressure measurement apparatus, which can be easily used on a person and have portability, and a method thereof can be applied to the development of a system for considerably improving the accuracy of conventional values of accurate blood pressure considering various measurement conditions. Accordingly, the apparatus and method can be positively used for early diagnosis of heart/blood related diseases.

[0056] In addition, blood pressure values stored regularly during daily life may be helpful for diagnosis and prescription by being given to a doctor when a user goes to hospital, and excessive substance abuse may be reduced by presenting a planned health care guide based on a trend of variation of blood pressure during one day. Thus, the apparatus can be a requisite health care device in a well-being society. While the invention has been shown and described with reference to a certain preferred exemplary embodiments thereof, it will be understood by those skilled in the art that various changes

in form and details may be made therein without departing from the scope of the appended claims.

Claims

1. A method of cufflessly and non-invasively measuring wrist blood pressure in association with a communication device, the method comprising:
 - (a) detecting an electrocardiogram (ECG) an infrared signal providing at least one of a position and depth information of an artery in a wrist region of a user, and pulse wave signals from the wrist region of a user using an ECG sensor, at least one infrared sensor, and at least one pressure sensor, respectively;
 - (b) calculating a non-distorted artery pressure value from a signal processed pulse wave signal using an R-peak timing of the ECG signal and the artery position and depth information from the infrared sensor signal, for generating a compensated pulse wave signal;
 - (c) detecting feature points from the ECG and the compensated pulse wave signals;
 - (d) extracting variables for calculating a highest blood pressure and a lowest blood pressure by applying the feature points; and
 - (e) calculating the highest blood pressure and the lowest blood pressure of the user by deducing a scatter diagram using the extracted variables.
2. The method of claim 1, wherein the detecting of the ECG and pulse wave signals in step (a) comprises:
 - (i) setting a criterion of pressure applied to the wrist using magnitude differences of the measured more than one pulse wave signals, wherein each pulse wave signal varies according to an angle and pressure to the artery of the wrist region; and
 - (ii) compensating individual conditions varying according to a user, including at least one of a position and depth of an artery measured using the infrared sensor applied outside at the wrist for measuring infrared light intensities through incidences and reflections from the artery, and a criterion value change according to the more than one measured pressure difference.
3. The method of claim 1, wherein the detecting of the feature points from the ECG and pulse wave signals detected from the user in step (c) comprises:
 - (i) detecting an R-peak in a P-QRS-T waveform indicating one period of electric activity of a heart from the measured ECG signal; and
 - (ii) detecting a beginning point, the highest point, and a notch point from the pulse wave signal.
4. The method of claim 1, wherein the variables for calculating the highest blood pressure and the lowest blood pressure comprises a time value from a detected R-peak of the ECG signal to a pulse wave beginning point, a time value from the R-peak to a pulse wave highest point, a time value from the pulse wave beginning point to a pulse wave highest point, a time value from the pulse wave highest point to a pulse wave notch point, and an area value from the pulse wave beginning point to the pulse wave notch point, and the R-peak obtained from the ECG signal is used as a criterion value of time.
5. The method of claim 1, wherein the calculating of the highest blood pressure and the lowest blood pressure comprises:
 - deducing a linear regression expression by using the extracted variables as independent variables; and
 - calculating the highest blood pressure and the lowest blood pressure of the user from the deduced linear regression expression.
6. The method according to claim 1, wherein the ECG sensor and pressure sensor are integrated in a sensor unit for measuring blood pressure in a wrist region without a cuff.
7. The method according to claim 1, further comprising (f) transmitting the highest and lowest blood pressure values calculated are transmitted to an external device.
8. The method according to claim 5, further comprising (f) transmitting the highest and lowest blood pressure values calculated are transmitted to an external device.

9. The method according to claim 5, further comprising (f) storing the highest and lowest blood pressure values from step (e) in a memory.

10. The method according to claim 5, further comprising (f) display the highest and lowest blood pressure values calculated in step (e).

11. The method according to claim 8, wherein the highest and lowest blood pressure values are transmitted when the values exceed a predetermined threshold value.

12. An apparatus for cufflessly and non-invasively measuring wrist blood pressure in association with a communication device, the apparatus comprising:

a sensor unit comprising an ECG sensor, at least one infrared sensor, and at least one pressure sensor for measuring electrocardiogram (ECG) signals, an infrared signal providing at least one of a position and depth information of an artery in a wrist region of the user, and pulse wave signals respectively, wherein said sensor unit does not include a cuff;

a controller for controlling the ECG, the infrared, and the pulse wave signals measured by the sensor unit; and a display unit for displaying the controlled signals, wherein the controller is adapted to calculate a non-distorted artery pressure value using the artery position and depth information from the infrared sensor signal and an R-peak timing of the ECG signal, to generate a compensated pulse wave signal.

13. The apparatus of claim 12, wherein the sensor unit further comprises gel filled inside a closed space of the sensor unit.

14. The apparatus of claim 12, wherein the controller comprises:

an Analog to Digital (A/D) converter for converting an analog signal measured by each sensor to a respective digital signal;

a Random Access Memory (RAM) for storing an ECG signal from among the digital signals;

a Read Only Memory (ROM) for storing the infrared signal and the pulse wave signal;

a digital signal processor for performing digital signal processing by adding signals continuously measured by a continuous blood pressure analysis program; and

a flash memory for storing a signal processed by the digital signal processor.

15. The apparatus of claim 12, wherein the display unit comprises:

an external input providing the controller with commands;

an external device for communicating with one or more communication devices using an interface terminal; and

a status display Light Emitting Diode (LED) for displaying measured values.

16. The apparatus of claim 15, wherein the interface device comprises an external communication terminal, and the controller communicating with the external device when the sensor unit senses values outside of a predetermined range.

Patentansprüche

1. Verfahren des manschettenlosen und nicht-invasiven Messens von Handgelenksblutdruck in Verbindung mit einem Kommunikationsgerät, wobei das Verfahren Folgendes umfasst

(a) Detektieren eines Elektrokardiogramm- (EKG-) eines Infrarotsignales, das mindestens eine einer Positions- und Tiefeninformation einer Arterie in einer Handgelenksregion eines Benutzers bereitstellt, und von Pulswellensignalen von der Handgelenksregion eines Benutzers unter Verwendung eines EKG-Sensors, mindestens eines Infrarotsensors bzw. mindestens eines Drucksensors;

(b) Berechnen eines unverfälschten Arteriendruckwertes aus einem signalverarbeiteten Pulswellensignal unter Verwendung eines R-Spitzen-Zeitwertes des EKG-Signales und der Arterien-Positions- und Tiefeninformation vom Infrarotsensorsignal zum Erzeugen eines kompensierten Pulswellensignales;

(c) Detektieren von Merkmalspunkten aus den EKG- und den kompensierten Pulswellensignalen;

(d) Extrahieren von Variablen zum Berechnen eines höchsten Blutdruckes und eines niedrigsten Blutdruckes

durch Anwenden der Merkmalspunkte und

(e) Berechnen des höchsten Blutdruckes und des niedrigsten Blutdruckes des Benutzers durch Herleiten eines Streudiagrammes unter Verwendung der extrahierten Variablen.

- 5 **2.** Verfahren nach Anspruch 1, wobei das Detektieren der EKG- und Pulswellensignale in Schritt (a) Folgendes umfasst:
 - (i) Setzen eines Kriteriums des auf das Handgelenk ausgeübten Druckes unter Verwendung von Amplitudendifferenzen der gemessenen mehr als einen Pulswellensignale, wobei jedes Pulswellensignal gemäß einem Winkel und Druck auf die Arterie der Handgelenksregion variiert; und
 - 10 (ii) Kompensieren individueller Bedingungen, die gemäß einem Benutzer variieren, einschließlich mindestens einer einer Position und Tiefe einer Arterie, die unter Verwendung des Infrarotsensors gemessen wird, der außen am Handgelenk zum Messen von Infrarotlichtintensitäten durch einfallende Strahlen und Reflexionen von der Arterie angelegt wird, und einer Kriteriumswertänderung gemäß der mehr als einen gemessenen Druckdifferenz.
 - 15 **3.** Verfahren nach Anspruch 1, wobei das Detektieren der Merkmalspunkte aus den EKG- und Pulswellensignalen, die vom Benutzer in Schritt (c) detektiert worden sind, Folgendes umfasst:
 - (i) Detektieren einer R-Spitze in einer P-QRS-T-Wellenform, die eine Periode elektrischer Aktivität eines Herzens
 - 20 anzeigen, aus dem gemessenen EKG-Signal und
 - (ii) Detektieren eines Anfangspunktes, des höchsten Punktes und eines Einschnittspunktes aus dem Pulswellensignal.
 - 25 **4.** Verfahren nach Anspruch 1, wobei die Variablen zum Berechnen des höchsten Blutdruckes und des niedrigsten Blutdruckes einen Zeitwert von einer detektierten R-Spitze des EKG-Signales zu einem Pulswellenanfangspunkt, einen Zeitwert von der R-Spitze zu einem höchsten Pulswellenpunkt, einen Zeitwert vom Pulswellenanfangspunkt zu einem höchsten Pulswellenpunkt, einen Zeitwert vom höchsten Pulswellenpunkt zu einem Pulswelleneinschnittspunkt und einen Flächenwert vom Pulswellenanfangspunkt zum Pulswelleneinschnittspunkt umfassen und die R-Spitze, die aus dem EKG-Signal erlangt wird, als ein Kriteriumswert der Zeit verwendet wird.
 - 30 **5.** Verfahren nach Anspruch 1, wobei das Berechnen des höchsten Blutdruckes und des niedrigsten Blutdruckes Folgendes umfasst:

Herleiten eines Ausdrucks linearer Regression durch Verwenden der extrahierten Variablen als unabhängige Variablen und

 - 35 Berechnen des höchsten Blutdruckes und des niedrigsten Blutdruckes des Benutzers aus dem hergeleiteten Ausdruck linearer Regression.
- 40 **6.** Verfahren nach Anspruch 1, wobei der EKG-Sensor und der Drucksensor in einer Sensoreinheit zum Messen von Blutdruck in einer Handgelenksregion ohne eine Manschette integriert sind.
- 45 **7.** Verfahren nach Anspruch 1, das ferner (f) Senden der berechneten höchsten und niedrigsten Blutdruckwerte an ein externes Gerät umfasst.
- 50 **8.** Verfahren nach Anspruch 5, das ferner (f) Senden der berechneten höchsten und niedrigsten Blutdruckwerte an ein externes Gerät umfasst.
- 55 **9.** Verfahren nach Anspruch 5, das ferner (f) Speichern der höchsten und niedrigsten Blutdruckwerte aus Schritt (e) in einem Speicher umfasst.
- 10.** Verfahren nach Anspruch 5, das ferner (f) Anzeige der höchsten und niedrigsten Blutdruckwerte umfasst, die in Schritt (e) berechnet worden sind.
- 11.** Verfahren nach Anspruch 8, wobei die höchsten und niedrigsten Blutdruckwerte gesendet werden, wenn die Werte einen vorgegebenen Schwellenwert überschreiten.
- 12.** Vorrichtung zum manschettenlosen und nicht-invasiven Messen von Handgelenksblutdruck in Verbindung mit einem Kommunikationsgerät, wobei die Vorrichtung Folgendes aufweist:

eine Sensoreinheit, die einen EKG-Sensor, mindestens einen Infrarotsensor und mindestens einen Drucksensor zum Messen von Elektrokardiogrammsignalen (EKG-Signalen) einem Infrarotsignal, das mindestens eine einer Positions- und Tiefeninformation einer Arterie in einer Handgelenksregion des Benutzers bereitstellt, bzw. Puls-
wellensignalen umfasst, wobei die Sensoreinheit keine Manschette beinhaltet;
eine Steuerung zum Steuern der EKG-, der Infrarot- und der Pulswellensignale, die durch die Sensoreinheit
gemessen worden sind; und
eine Anzeigeeinheit zum Anzeigen der gesteuerten Signale, wobei die Steuerung ausgelegt ist, einen unver-
fälschten Arteriendruckwert unter Verwendung der Arterien-Positions- und Tiefeninformation vom Infrarotsen-
sorsignal und eines R-Spitzen-Zeitwertes des EKG-Signales zu berechnen, um ein kompensiertes Pulswellen-
signal zu erzeugen.

13. Vorrichtung nach Anspruch 12, wobei die Sensoreinheit ferner Gel umfasst, das innerhalb eines geschlossenen Raumes der Sensoreinheit eingefüllt ist.

14. Vorrichtung nach Anspruch 12, wobei die Steuerung Folgendes umfasst:

einen Analog-Digital-Wandler (A/D-Wandler) zum Umwandeln eines analogen Signales, das durch jeden Sensor gemessen worden ist, in ein jeweiliges digitales Signal;
einen Direktzugriffsspeicher (RAM) zum Speichern eines EKG-Signales unter den digitalen Signalen;
einen Nur-Lese-Speicher (ROM) zum Speichern des Infrarotsignales und des Pulswellensignales;
einen Digitalsignalprozessor zum Durchführen von Digitalsignalverarbeitung durch Hinzufügen von Signalen, die kontinuierlich durch ein kontinuierliches Blutdruckanalyseprogramm gemessen worden sind; und
einen Flash-Speicher zum Speichern eines Signales, das durch den Digitalsignalprozessor verarbeitet worden ist.

15. Vorrichtung nach Anspruch 12, wobei die Anzeigeeinheit Folgendes umfasst:

einen externen Eingang, der der Steuerung Befehle bereitstellt;
ein externes Gerät zum Kommunizieren mit einem oder mehreren Kommunikationsgeräten unter Verwendung eines Schnittstellengerätes und
eine Statusanzeigen-Leuchtdiode (Statusanzeigen-LED) zum Anzeigen gemessener Werte.

16. Vorrichtung nach Anspruch 15, wobei das Schnittstellengerät ein externes Kommunikationsendgerät und die Steuerung umfasst, die mit dem externen Gerät kommuniziert, wenn die Sensoreinheit Werte außerhalb eines vorgegebenen Bereiches erkennt.

Revendications

1. Procédé de mesure de tension artérielle au poignet de manière non invasive et sans brassard en association avec un dispositif de communication, le procédé comprenant :

(a) la détection d'un signal d'électrocardiogramme (ECG) d'un signal infrarouge fournissant au moins l'une d'informations de position et de profondeur d'une artère dans une région de poignet d'un utilisateur, et de signaux d'onde de pouls provenant de la région de poignet d'un utilisateur en utilisant respectivement un détecteur d'ECG, au moins un détecteur infrarouge et au moins un détecteur de pression ;
(b) le calcul d'une valeur de tension artérielle sans distorsion à partir d'un signal d'onde de pouls traité en utilisant un timing de crête R du signal d'ECG et les informations de position et de profondeur d'artère provenant du signal de détecteur infrarouge, pour générer un signal d'onde de pouls compensé ;
(c) la détection de points caractéristiques à partir des signaux d'ECG et d'onde de pouls compensés ;
(d) l'extraction de variables pour calculer la plus haute tension artérielle et la plus basse tension artérielle par l'application des points caractéristiques ; et
(e) le calcul de la plus haute tension artérielle et de la plus basse tension artérielle de l'utilisateur par la déduction d'un diagramme de diffusion en utilisant les variables extraites.

2. Procédé selon la revendication 1, dans lequel la détection des signaux d'ECG et d'onde de pouls à l'étape (a) comprend :

- (i) le réglage d'un critère de pression appliquée au poignet en utilisant des différences de grandeur des plusieurs signaux d'onde de pouls mesurés, dans lequel chaque signal d'onde de pouls varie en fonction d'un angle et d'une pression sur l'artère de la région de poignet ; et
- (ii) la compensation de conditions individuelles variant en fonction d'un utilisateur, y compris au moins l'une d'une position et d'une profondeur d'une artère mesurée en utilisant le détecteur infrarouge appliqué à l'extérieur au niveau du poignet pour mesurer des intensités lumineuses infrarouges par le biais d'incidences et de réflexions de l'artère, et d'un changement de valeur de critère en fonction des plusieurs différences de pressions mesurées.

3. Procédé selon la revendication 1, dans lequel la détection des points caractéristiques à partir des signaux d'ECG et d'onde de pouls détectés sur l'utilisateur à l'étape (c) comprend :

- (i) la détection d'une crête R dans une forme d'onde P-QRS-T indiquant une période d'activité électrique d'un cœur à partir du signal d'ECG mesuré ; et
- (ii) la détection d'un point de début, du point le plus haut, et d'un point d'encoche à partir du signal d'onde de pouls.

4. Procédé selon la revendication 1, dans lequel les variables pour calculer la plus haute tension artérielle et la plus basse tension artérielle comprennent une valeur de temps à partir d'une crête R détectée du signal d'ECG jusqu'à un point de début d'onde de pouls, une valeur de temps à partir de la crête R jusqu'au plus haut point d'onde de pouls, une valeur de temps à partir du point de début d'onde de pouls jusqu'au plus haut point d'onde de pouls, une valeur de temps à partir du plus haut point d'onde de pouls jusqu'à un point d'encoche d'onde de pouls, et une valeur d'aire à partir du point de début d'onde de pouls jusqu'au point d'encoche d'onde de pouls, et la crête R obtenue à partir du signal d'ECG est utilisée en tant que critère de valeur de temps.

5. Procédé selon la revendication 1, dans lequel le calcul de la plus haute tension artérielle et de la plus basse tension artérielle comprend :

- la déduction d'une expression de régression linéaire en utilisant les variables extraites en tant que variables indépendantes ; et
- le calcul de la plus haute tension artérielle et de la plus basse tension artérielle de l'utilisateur à partir de l'expression de régression linéaire déduite.

6. Procédé selon la revendication 1, dans lequel le détecteur d'ECG et le détecteur de pression sont intégrés dans une unité de détection pour mesurer une tension artérielle dans une région de poignet sans brassard.

7. Procédé selon la revendication 1, comprenant en outre (f) la transmission des valeurs calculées de la plus haute tension artérielle et de la plus basse tension artérielle à un dispositif externe.

8. Procédé selon la revendication 5, comprenant en outre (f) la transmission des valeurs calculées de la plus haute tension artérielle et de la plus basse tension artérielle à un dispositif externe.

9. Procédé selon la revendication 5, comprenant en outre (f) la mémorisation des valeurs de la plus haute tension artérielle et de la plus basse tension artérielle provenant de l'étape (e) dans une mémoire.

10. Procédé selon la revendication 5, comprenant en outre (f) l'affichage des valeurs de la plus haute tension artérielle et de la plus basse tension artérielle calculées à l'étape (e).

11. Procédé selon la revendication 8, dans lequel les valeurs de la plus haute tension artérielle et de la plus basse tension artérielle sont transmises lorsque les valeurs dépassent une valeur de seuil prédéterminée.

12. Appareil de mesure de tension artérielle au poignet de manière non invasive et sans brassard en association avec un dispositif de communication, l'appareil comprenant :

- une unité de détection comprenant un détecteur d'ECG, au moins un détecteur infrarouge et au moins un détecteur de pression pour mesurer respectivement des signaux d'électrocardiogramme (ECG) un signal infrarouge fournissant au moins l'une d'informations de position et de profondeur d'une artère dans une région de poignet d'un utilisateur, et des signaux d'onde de pouls, dans lequel ladite unité de détection ne comprend pas de brassard ;
- un organe de commande pour commander les signaux d'ECG, infrarouge et d'onde de pouls mesurés par l'unité

de détection ; et

une unité d'affichage pour afficher les signaux commandés, dans lequel l'organe de commande est apte à calculer une valeur de tension artérielle sans distorsion en utilisant les informations de position et de profondeur d'artère provenant du signal de détecteur infrarouge et un timing de crête R du signal d'ECG, pour générer un signal d'onde de pouls compensé.

13. Appareil selon la revendication 12, dans lequel l'unité de détection comprend en outre un gel rempli à l'intérieur d'un espace clos de l'unité de détection.

14. Appareil selon la revendication 12, dans lequel l'organe de commande comprend :

un convertisseur analogique-numérique (A/D) pour convertir un signal analogique mesuré par chaque détecteur en un signal numérique respectif ;

une mémoire vive (RAM) pour mémoriser un signal d'ECG parmi les signaux numériques ;

une mémoire morte (ROM) pour mémoriser le signal infrarouge et le signal d'onde de pouls ;

un processeur de signal numérique pour effectuer un traitement de signal numérique en ajoutant des signaux continuellement mesurés par un programme d'analyse de tension artérielle en continu ; et

une mémoire flash pour mémoriser un signal traité par le processeur de signal numérique.

15. Appareil selon la revendication 12, dans lequel l'unité d'affichage comprend :

une entrée externe fournissant des commandes à l'organe de commande ;

un dispositif externe pour communiquer avec un ou plusieurs dispositifs de communication en utilisant un terminal d'interface ; et

une diode électroluminescente (LED) d'affichage de statut pour afficher les valeurs mesurées.

16. Appareil selon la revendication 15, dans lequel le dispositif d'interface comprend un terminal de communication externe, et l'organe de commande communique avec le terminal de communication externe lorsque l'unité de détection détecte des valeurs à l'extérieur d'une plage prédéterminée.

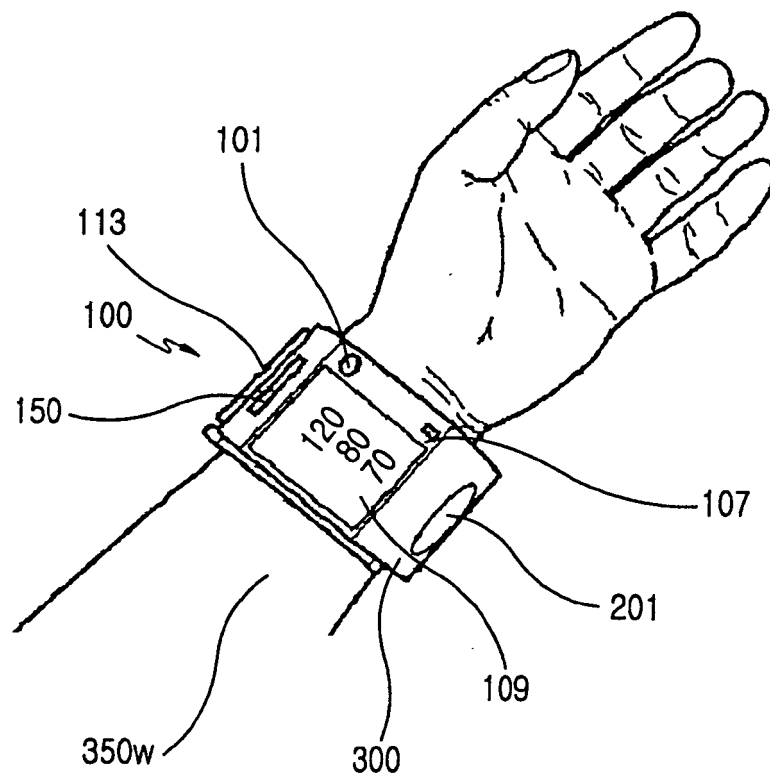


FIG.1

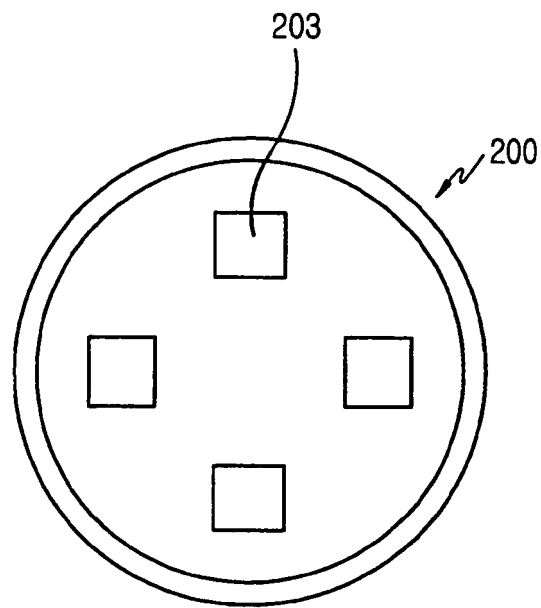


FIG. 2A

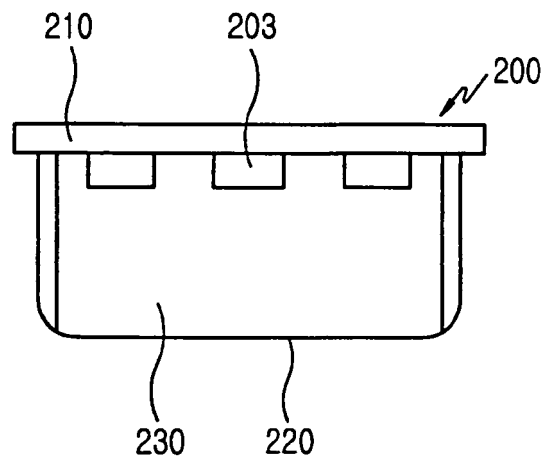


FIG. 2B

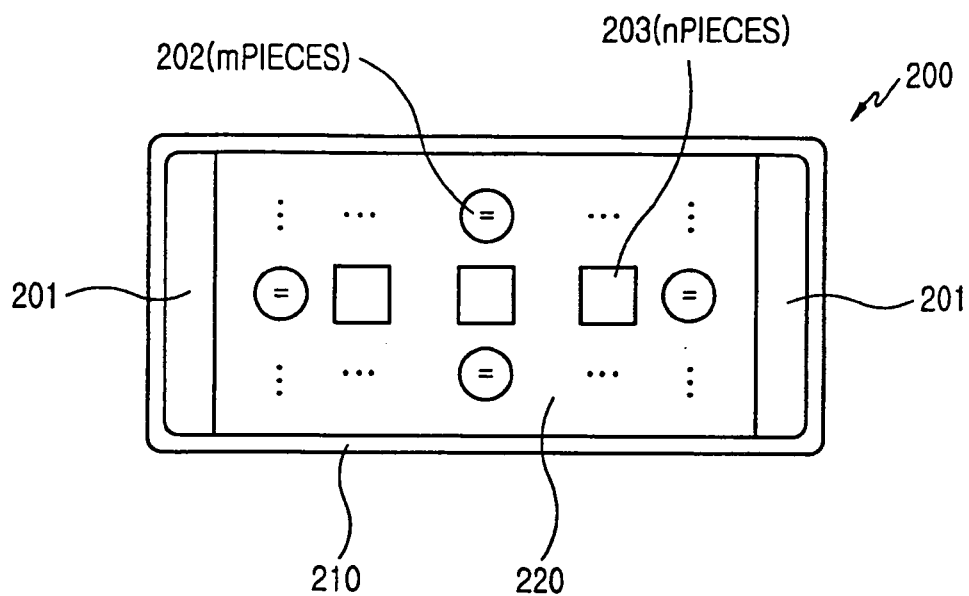


FIG. 2C

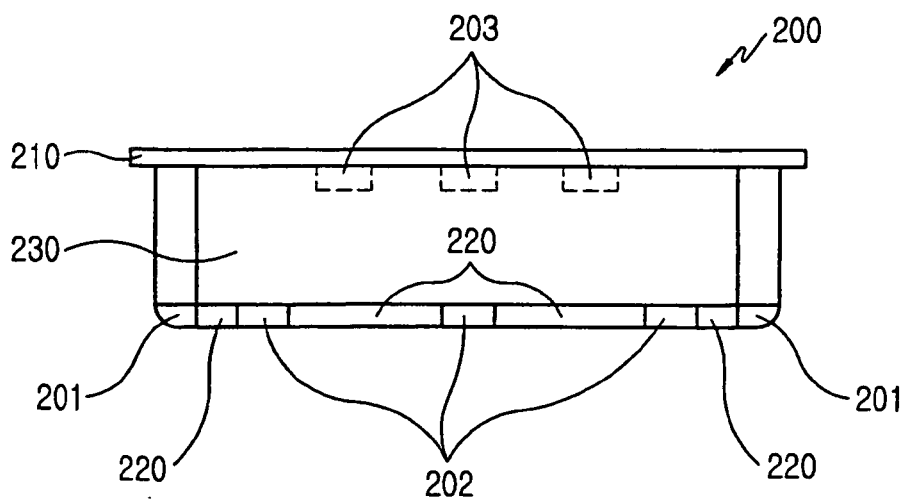


FIG. 2D

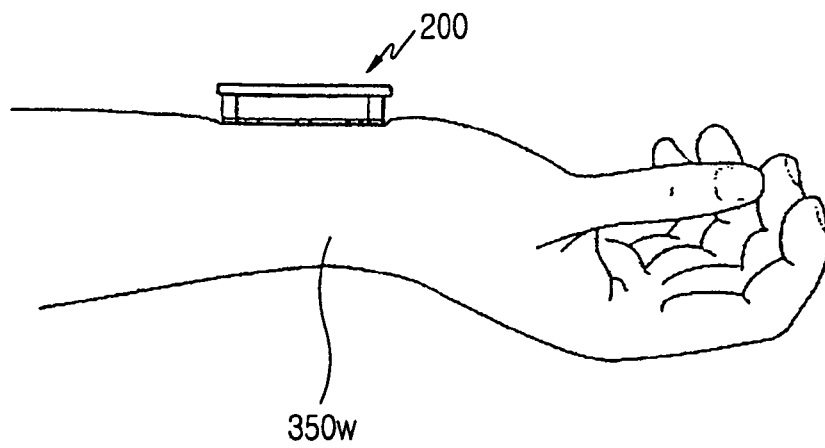


FIG. 2E

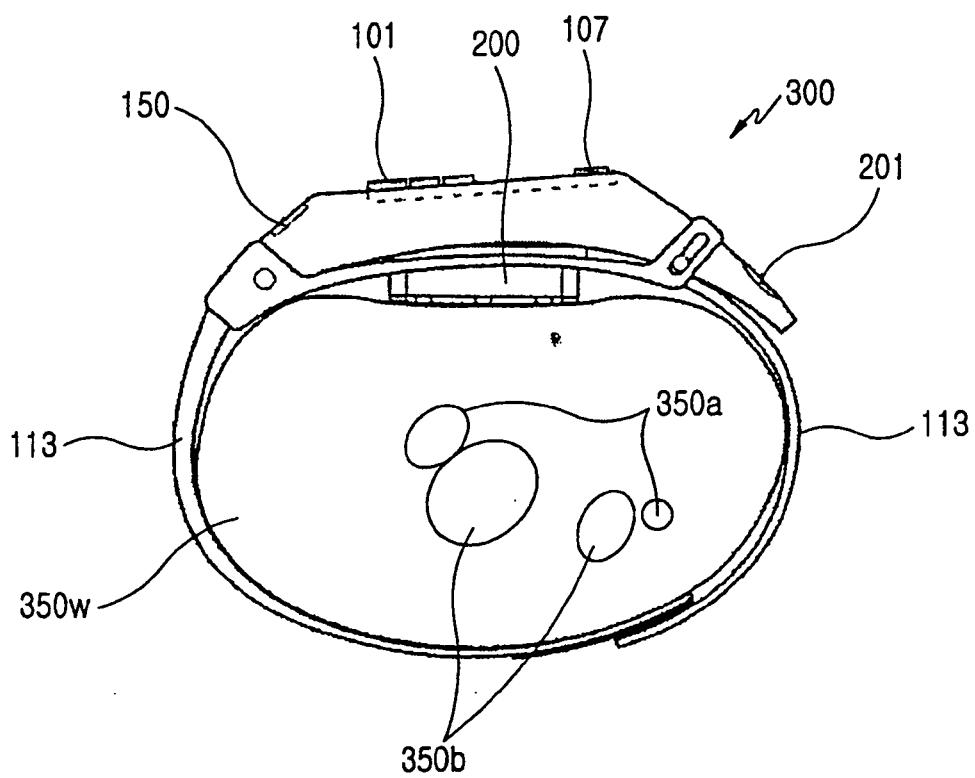


FIG. 3

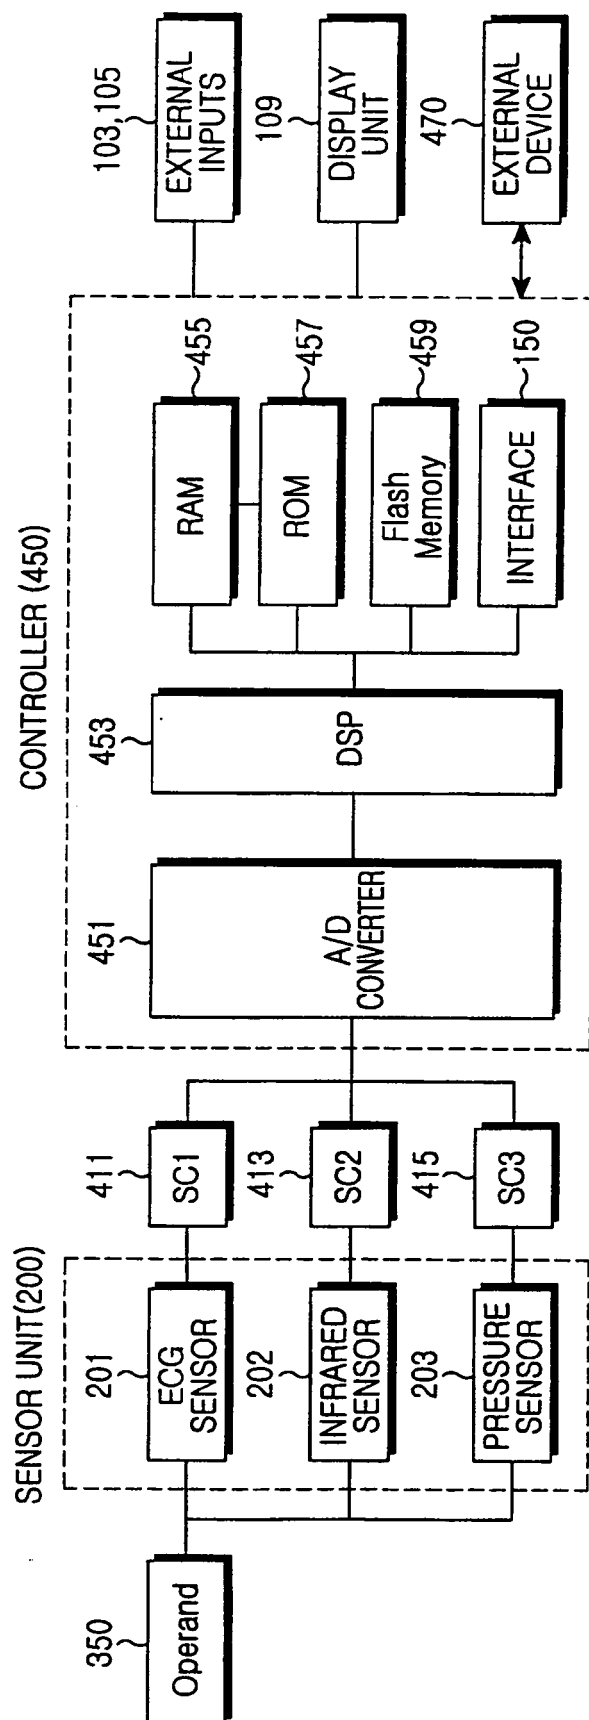


FIG.4

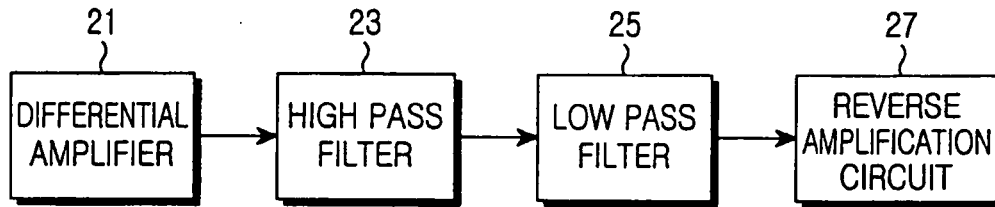


FIG.5A

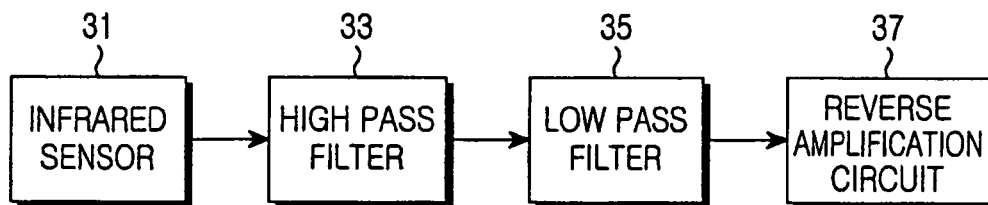


FIG.5B

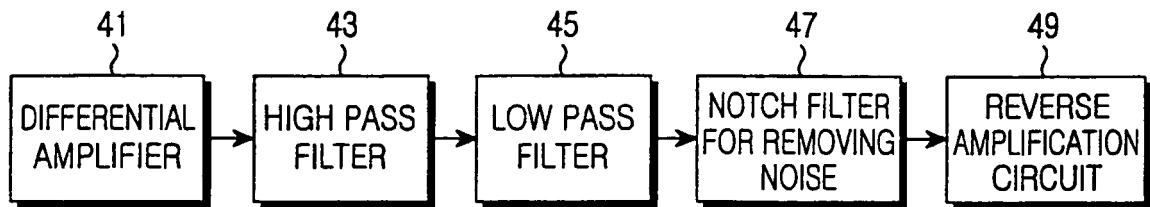


FIG.5C

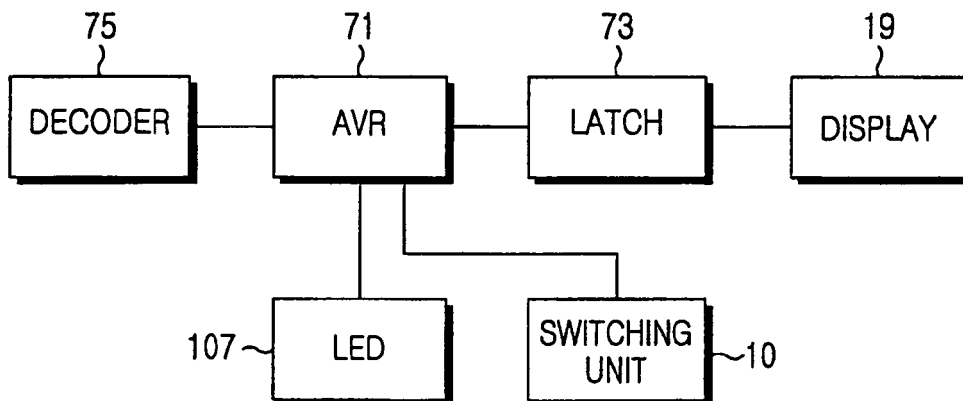


FIG.6

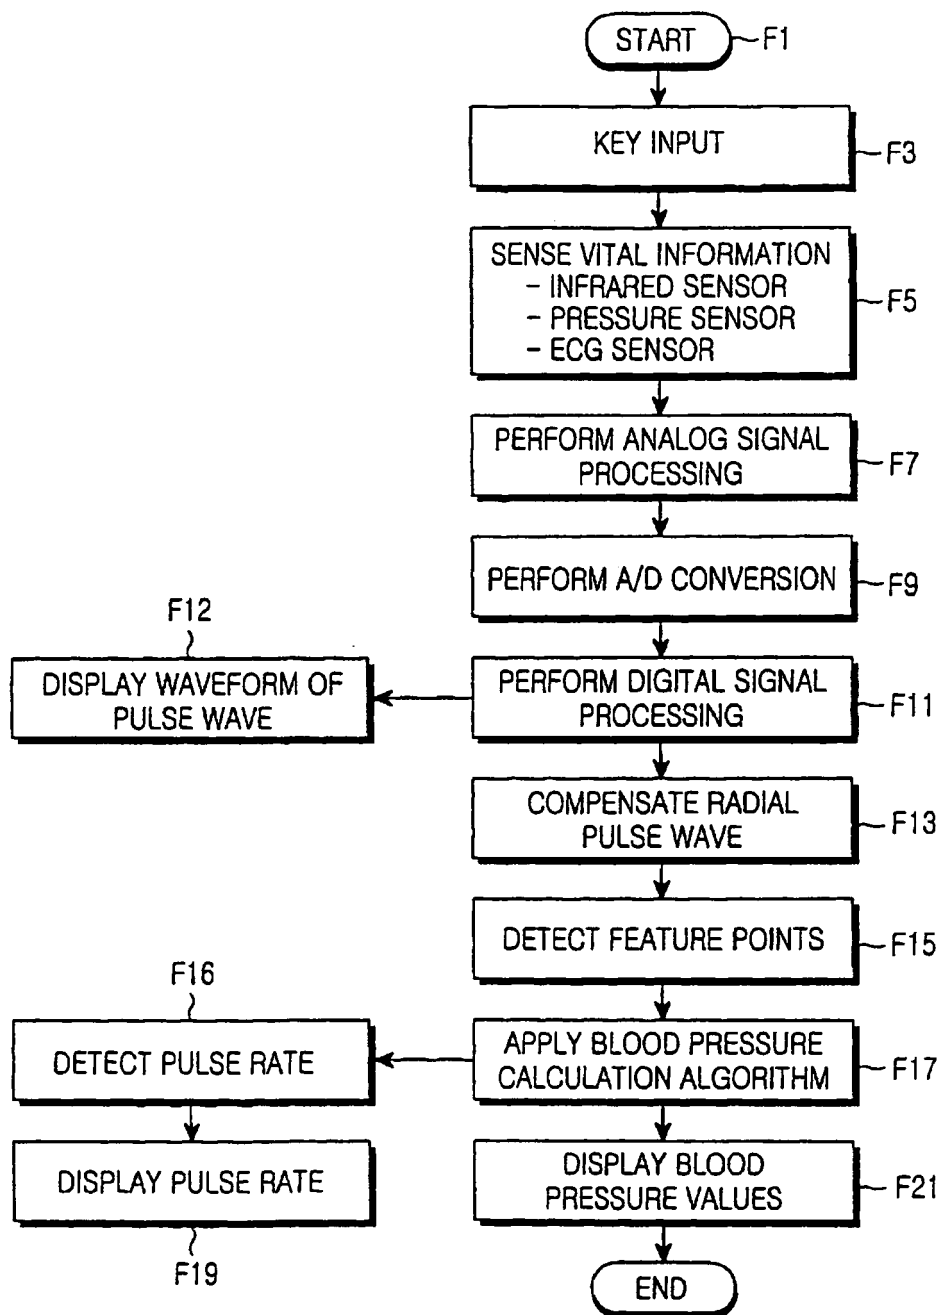


FIG.7

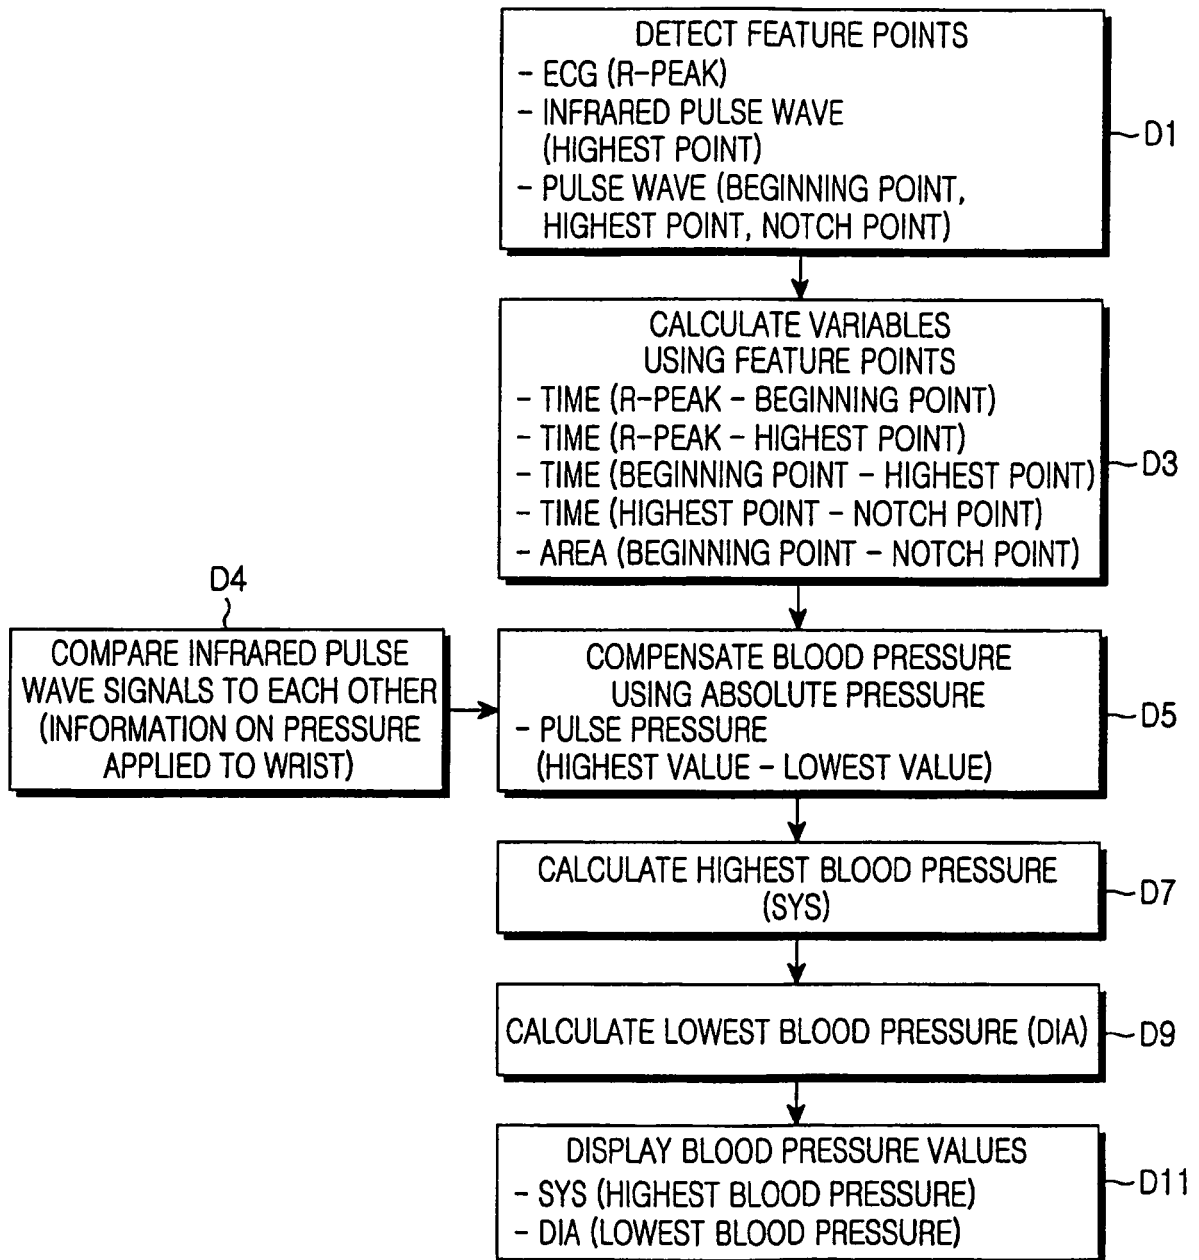


FIG.8A

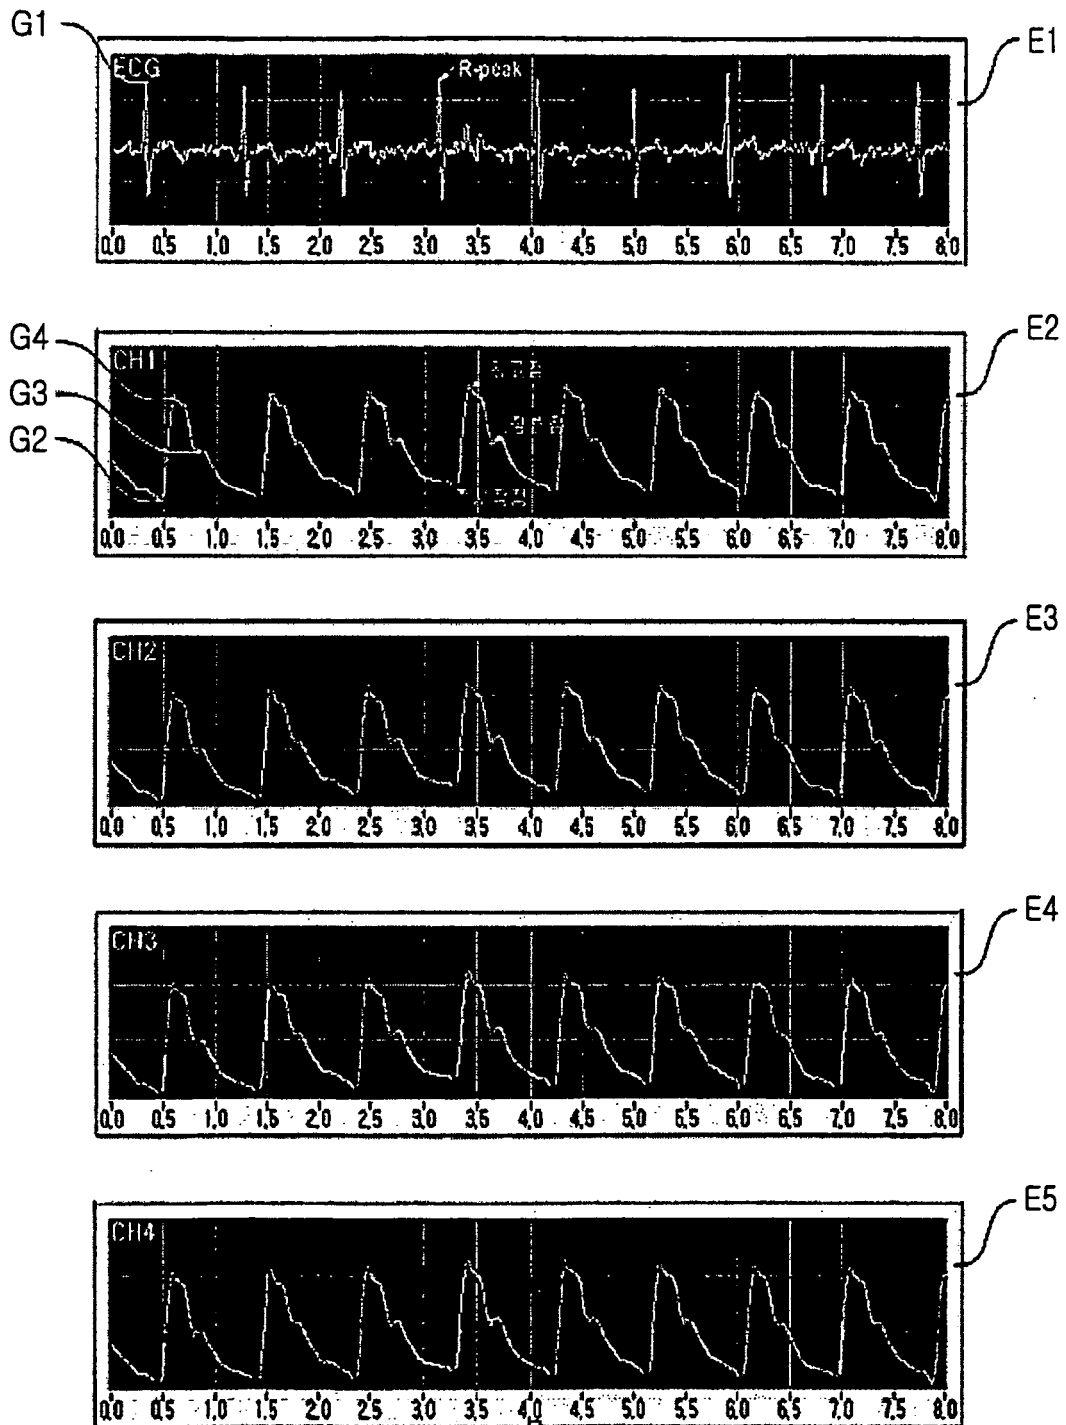


FIG.8B

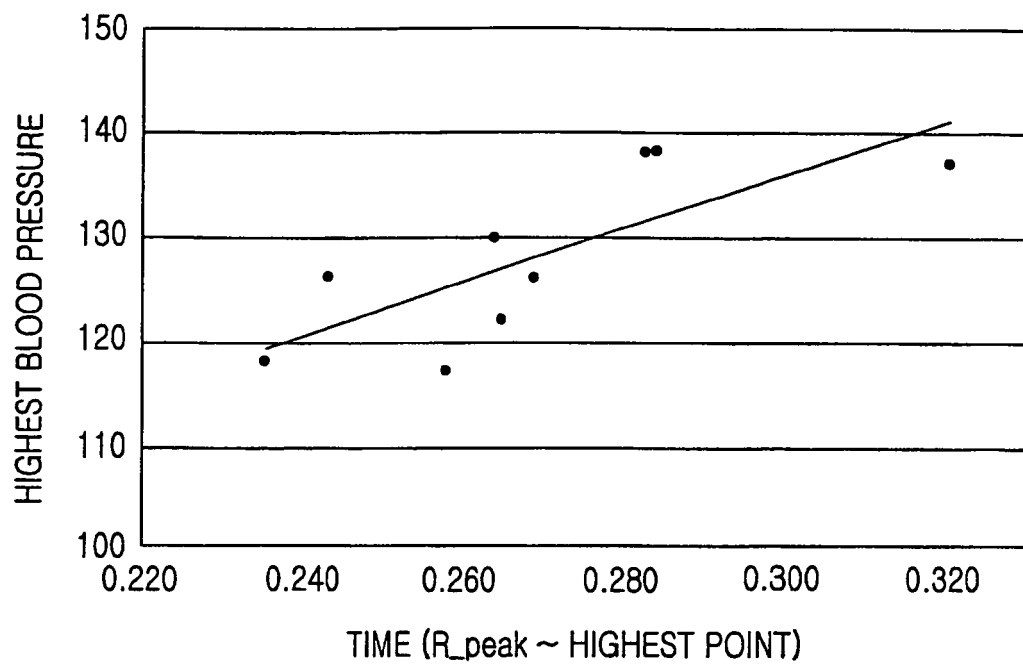


FIG.9A

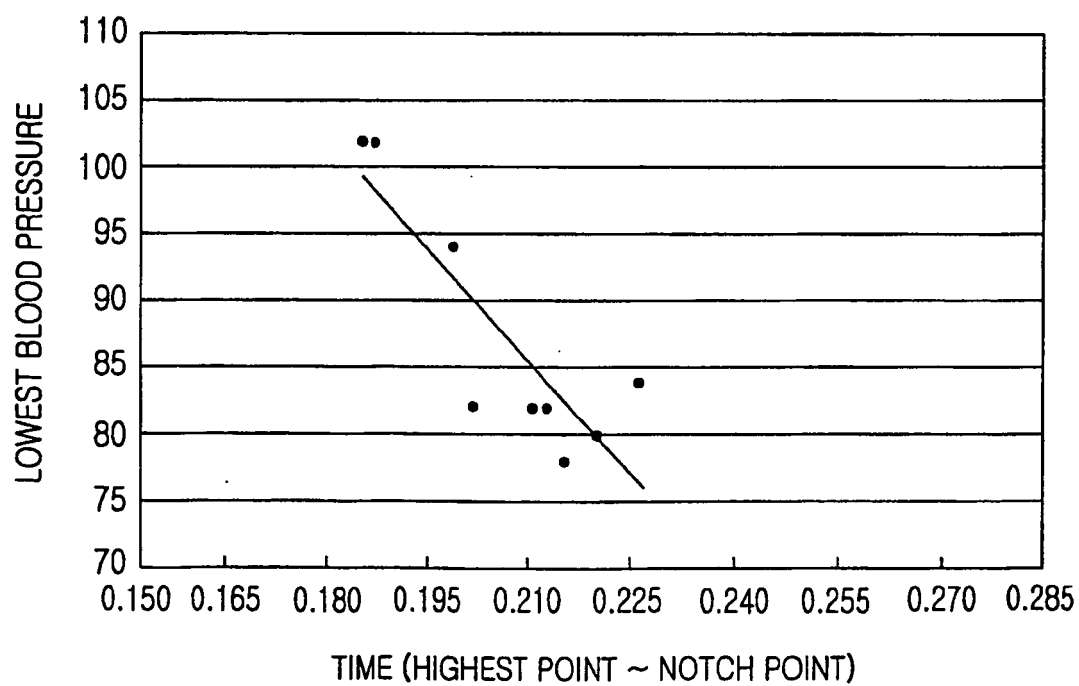


FIG.9B

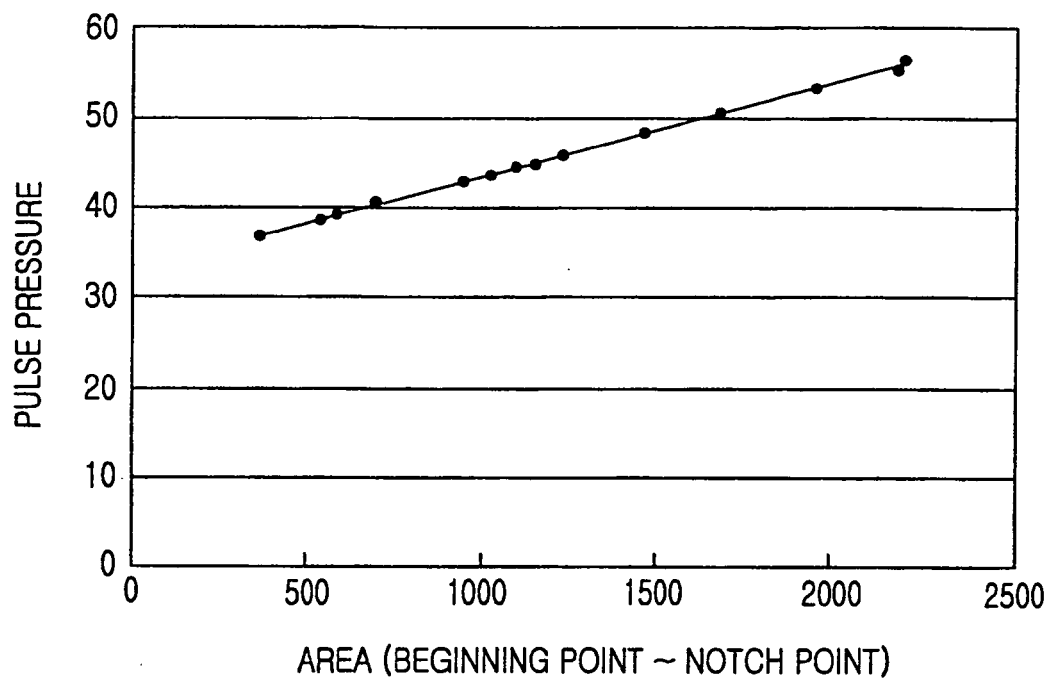


FIG.9C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6413223 B [0005]
- US 6669648 B [0005]
- WO 2004019754 A2 [0006]
- US 20070021676 A1 [0007]
- JP 2006149846 A [0009]

Non-patent literature cited in the description

- **IM J.J. et al.** A study for the development of a non-invasive continuous blood pressure measuring system by analyzing radial artery pulse from a wrist. *ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY, 1995., IEEE 17TH ANNUAL CONFERENCE MONTREAL*, 20 September 1995, vol. 2, 1033-1034 [0008]

专利名称(译)	用于与通信设备相关联地无袖地和非侵入地测量腕部血压的方法和设备		
公开(公告)号	EP1970000B1	公开(公告)日	2016-04-27
申请号	EP2008004559	申请日	2008-03-12
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	CHO JAE GEOL JUNG SUN TAE IM JAE JUNG		
发明人	CHO, JAE-GEOL JUNG, SUN-TAE IM, JAE-JUNG		
IPC分类号	A61B5/021 A61B5/0452 A61B5/00		
CPC分类号	A61B5/021 A61B5/0002 A61B5/02125 A61B5/0452		
代理机构(译)	NEDERLANDSCH OCTROOIBUREAU		
优先权	1020070024163 2007-03-12 KR		
其他公开文献	EP1970000A3 EP1970000A2		
外部链接	Espacenet		

摘要(译)

一种无线且无创地测量患者的腕部区域中的血压的方法，其与中继所测量的信息的通信设备相关联。该方法包括检测从用户的手腕检测到的多个脉搏波信号之间的幅度差异的步骤;检测来自用户检测到的心电图 (ECG) 和脉搏波信号的特征点;使用检测到的特征点提取计算最高血压和最低血压所需的变量;并通过使用提取的变量推导散点图来计算用户的最高血压和最低血压。

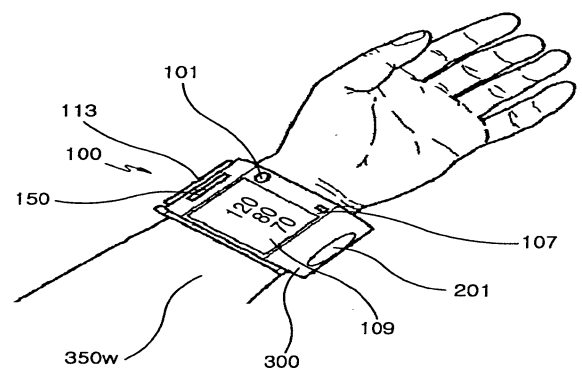


FIG. 1