



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.03.2012 Bulletin 2012/10

(51) Int Cl.:
G09G 3/30 (2006.01)

(21) Application number: **11008346.6**

(22) Date of filing: **26.10.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

• **Cok, Ronald, Steven**
Rochester
New York
14625 (US)

(30) Priority: **09.11.2006 US 558093**

(74) Representative: **Gunzelmann, Rainer**
Wuesthoff & Wuesthoff
Patent- und Rechtsanwälte
Schweigerstraße 2
81541 München (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07861540.8 / 2 092 504

(71) Applicant: **Global OLED Technology LLC**
Herndon, VA 20171 (US)

Remarks:

This application was filed on 17-10-2011 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:
 • **Miller, Michael, Eugene**
Honeoye Falls
New York
14472 (US)

(54) **Passive matrix thin-film electro-luminescent display**

(57) A passive-matrix, thin-film electro-luminescent display system includes a display having a substrate with organic layers and orthogonally arranged electrodes formed thereon. One or more display drivers: (i) receives an input image signal for addressing the light-emitting elements of the display; (ii) decomposes the signal into a low-resolution component signal and a high-resolution

component signal, wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal; and (iii) that provides a drive signal for driving the display wherein the low-resolution component signal and the high-resolution component signal are independently provided to the display to form a combined image.

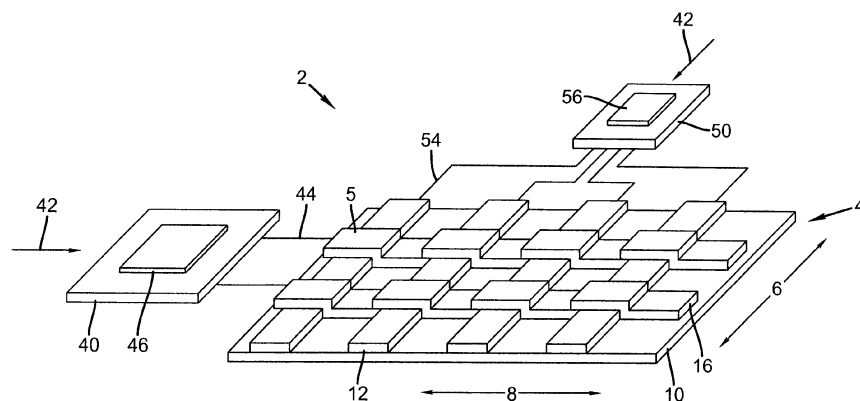


FIG. 1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to passive matrix thin-film electroluminescent display systems and specifically a method for driving them to decrease their refresh rate and power consumption.

BACKGROUND OF THE INVENTION

[0002] Numerous technologies for forming flat-panel displays are known in the art. One such technology is the electro-luminescent display, which is formed by coating a thin layer of electro-luminescent material between a pair of electrodes. Displays employing this technology produce light as a function of the current between the two electrodes when the electro-luminescent materials are electrically stimulated. Electro-luminescent displays are primarily classified as active-matrix or passive-matrix displays. Active-matrix displays employ a relatively complex, active circuit at each pixel in the display to control the flow of current through the electro-luminescent material layer(s). The formation of this active circuit at each pixel can be expensive and often the performance of these circuits is somewhat limited. Passive-matrix displays are much simpler in their construction. Each pair of electrodes at each pixel is formed by the intersection of a row and a column electrode. As this type of display does not require the costly formation of active circuits at each pixel site, they are much less expensive to construct.

[0003] Referring to Figs. 13 and 14, a prior-art display is illustrated having electrodes **12** and **16** with an electro-luminescent layer **14** formed between the electrodes **12** and **16** and responsive to a current provided by the electrodes **12** and **16** to produce light. The two electrodes **12** and **16** are typically patterned in orthogonal directions **8** and **6** over a substrate **10** and driven by external row and column drivers (not shown) connected to the electrodes **12** and **16**.

[0004] While passive-matrix displays can be much less expensive to construct than active-matrix displays, they often suffer from relatively severe operational limitations, for example, resolution and refresh rate limitations, which restrict the commercial application of the passive-matrix displays to small, very low-resolution displays. Because of these limitations, the typical passive-matrix thin-film EL display is less than 2 inches in diagonal and has fewer than 150 lines of light-emitting elements. One of the more severe of these limitations occurs due to the fact that the thin-film EL display is formed from a very thin layer of relatively high-resistance EL material between a pair of metal electrodes. In this configuration, the EL pixel has a very high capacitance and when driving this pixel in a display, enough current must be provided to the pixel to overcome the capacitance before the pixel can emit light. Of course, the larger the pixel, and the thinner the electro-

luminescent material, the larger the capacitance and the more energy that is required to overcome this capacitance before light is produced. Therefore, large displays employing thin films of electro-luminescent materials will require significant power to overcome the capacitance of the pixels in the display.

[0005] This power issue is further worsened for passive-matrix displays having a relatively higher resolution as these displays are typically addressed by placing a reference voltage on a single row electrode, e.g., second electrode **16** shown in Figs. 13 and 14, in the display and then providing pixel voltages on each column line, e.g., first electrode **12**, simultaneously. In this addressing scheme, a pre-charge current is provided to each pixel to overcome the capacitance of each pixel, current is provided to the EL pixels to produce light, the voltages are then changed to switch the row of pixels into reverse bias, draining the capacitance, and then the next line is addressed. To provide a flicker-free image, this process needs to be completed for each line in the display at a rate around 70 Hz. Therefore, as the number of lines on the display is increased, the amount of power that is dissipated by charging and discharging the capacitance of the light-emitting elements in the display increases. Further, it is necessary to turn on and off a large number of rows of data at the very high rates that occur when the display has a large number of lines (e.g., significantly more than 100 lines) that have to be refreshed at a rate of 70 Hz. Accordingly, it becomes very expensive to construct drivers that are capable of providing high enough currents to perform the required process of pre-charging each pixel, providing current to light each pixel, and then providing sufficient reverse bias in order to perform this refresh process. Therefore, it is not only necessary to reduce the amount of power that is dissipated in pre-charging and reverse biasing each light-emitting element, but to also reduce the peak current that must be provided by the drivers.

[0006] Many different solutions for overcoming or avoiding these problems have been suggested. For example, US Patent 6,980,182, issued December 27, 2005 to Nimmer et al, entitled "Display System," suggests patterning an insulating layer over a subset of the rows of the display before depositing the column lines, forming numerous layers of independently addressable row drivers. Different row and column drivers are then used to drive the different rows of the display within each layer of the row drivers. In this way, the amount of current that must be provided by any single driver is reduced as it is divided among two or more drivers. While this does make any single driver for the display less expensive, it requires multiple drivers, which can add significant cost to the overall system.

[0007] US Patent Application 2002/0101179, filed December 27, 2001 by Kawashima, entitled "Organic Electroluminescence Driving Circuit, Passive Matrix Organic Electroluminescence Display Device, and Organic Electroluminescence Driving Method," suggests driving the

passive-matrix display using two power supplies. The first power supply serves as a "voltage holding" supply. The second of these power supplies is used to provide current to activate the light-emitting elements of the display (i.e., provide current to light each light-emitting element). In such a device, all but the active light-emitting elements are attached to the voltage holding supply. This power supply maintains the charge in the capacitors at or near the threshold of the light-emitting diodes such that the light-emitting elements do not have to be charged or discharged. Besides adding the cost of a second power supply, such displays will often have leakage current near this threshold, and therefore require power to be dissipated even when the display is intended to be dark, which of course also elevates the black level of the display somewhat as the light-emitting elements will produce a small amount of light in response to this leakage current.

[0008] A similar approach is employed in US Patent 6,486,607, issued November 26, 2002, by Yeuan, entitled "Circuit and System for Driving Organic Thin-Film Elements," which discusses an electronic circuit that allows the light-emitting elements to be pre-charged via the row line on the cathode while constant current is provided via the column line, attached to the anode. In this way, the light-emitting elements may be pre-charged by a power supply on the row drivers while a power supply on the column drivers is used to provide power to activate the light-emitting elements.

[0009] US Patent Application 2005/0219163, filed April 25, 2002 by Smith et al., entitled "Display Driver Circuits for Organic Light-Emitting Diode Displays with Skipping of Blank Lines," discusses constructing a driver that contains a frame buffer and image processing methods that makes it possible to analyze the information before it is displayed. In the approach that is discussed, each row of input data is analyzed to determine if any row is substantially black. If it is, the drivers skip the line while driving the display such that power is not wasted to pre-charge and then reverse bias each of the light-emitting elements within a row of pixels that will not be activated. Unfortunately, this approach will only reduce power under very specific display conditions and is not generally applicable to large graphic displays, which often employ text on white backgrounds; and, therefore, will rarely display a black line.

[0010] While each of the previously discussed approaches attempt to avoid the problems of power dissipation due to pre-charging and reverse biasing the light-emitting elements or reducing the current that any single driver is required to provide, each of these approaches apply the same basic drive technique. A different approach to driving a passive matrix display is employed in WO 2006/035248, filed September 30, 2004 by Smith et al., however, which discusses an approach that allows all of the light-emitting elements of a display to be lit simultaneously. In such an approach, the driver employs a frame buffer to store an input image. This input image is then analyzed and a number of orthogonal pairs of

matrices are formed and stored, which may be used to approximately describe the content of the image. One of the matrices in each orthogonal pair is then used to provide a signal to the row drivers while the second of the matrices in the same orthogonal pair is used to provide a signal to the column drivers. These row and column driver inputs are then updated to display each of the orthogonal pairs of matrices during each image update cycle. Using this method, pre-charging and reverse biasing of the light-emitting elements are avoided, reducing the overall power required to drive the passive matrix display and decreasing the instantaneous current load that is required from each of the drivers. Unfortunately, the image processing that is required to create the orthogonal pairs of matrices is significant, especially when such processing must be accomplished in real time and at rates of 30 Hz or higher. Further, the drivers must be equipped with significant memory and be capable of driving each row to several drive voltage levels. These features can add significant cost to the drive electronics, which are required to drive the thin-film EL display, significantly increasing the cost of the overall display system.

[0011] There is a need; therefore, for a method of controlling and driving passive-matrix displays that enables the use of lower-cost drivers, reduces the power consumption, and improves the resolution of the passive-matrix display.

SUMMARY OF THE INVENTION

[0012] The aforementioned need is met by providing a passive-matrix, thin-film electroluminescent display system according to claim 1. The system may include a display having a substrate with organic layers and orthogonally-arranged electrodes formed thereon. One or more display drivers: (i) receives an input image signal for addressing the light-emitting elements of the display; (ii) decomposes the signal into a low-resolution component signal and a high-resolution component signal, wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal; and (iii) provides a drive signal for driving the display wherein the low-resolution component signal and the high-resolution component signal are independently provided to the display to form a combined image.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

Fig. 1 is a perspective view of a passive-matrix display and controller according to an embodiment of the present invention;

Fig. 2 is a perspective view of a single light-emitting element of a passive-matrix display according to an embodiment of the present invention;

Fig. 3 is a cross section of stacked light-emitting elements of a passive-matrix display formed on opposite sides of a single substrate according to an alternative embodiment of the present invention;

Fig. 4 is a cross section of stacked light-emitting elements of a passive-matrix display formed on two substrates according to an alternative embodiment of the present invention;

Fig. 5 is a perspective view of stacked light-emitting elements of a passive-matrix display formed on one substrate and sharing an electrode according to an alternative embodiment of the present invention;

Fig. 6 is an illustration of prior-art temporal control of a passive-matrix display;

Figs. 7A-7C are an illustration of row-interleaved temporal control of a passive-matrix display according to an embodiment of the present invention;

Fig. 8 is an illustration of row-interleaved temporal control of a passive-matrix display according to an alternative embodiment of the present invention;

Fig. 9 is an illustration of two-dimensionally interleaved temporal control of a passive-matrix display according to another embodiment of the present invention;

Fig. 10 is an illustration of row-interleaved temporal control of a passive-matrix display according to another alternative embodiment of the present invention;

Figs. 11A-11D are an illustration of frame-interleaved temporal control of a passive-matrix display according to an embodiment of the present invention;

Fig. 12 is a flow diagram illustrating a method of the present invention;

Fig. 13 is a perspective view of a light-emitting element of a prior-art passive-matrix display; and

Fig. 14 is a perspective view of a prior-art passive-matrix display.

DETAILED DESCRIPTION OF THE INVENTION

[0014] Referring to Figs. 1 and 2, this need is met by providing a passive-matrix, thin-film electro-luminescent display system **2** having improved efficiency, comprising a display **4** consisting of a substrate **10**, a first electrode layer **12** patterned to form lines along a first dimension **6** of the substrate **10**, one or more thin-film electro-luminescent layers **14** formed on the first electrode layer **12** and a second electrode layer **16** formed on the one or more thin-film electro-luminescent layer(s) **14** wherein the second electrode layer **16** is patterned to form lines along a second dimension **8** of the substrate **10** different from the first dimension **6** comprising an electro-luminescent unit **5**. Individual light-emitting elements **5** are formed at the intersection of the lines of the first and second electrode layers **12** and **16**, respectively; and one or more display drivers **40**, **50** for receiving an input image signal **42** for addressing the light-emitting elements **5** of the display **4**,

decomposing the input image signal **42** into a low-resolution component signal and a high-resolution component signal wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal; and providing a drive signal **44**, **54** for driving the display **4**. The low-resolution component signal and the high-resolution component signal are independently provided to the display **4** to form a final image such that the refresh rate of the display **4** may be reduced; thereby; reducing the power used to charge the capacitance of the light-emitting elements **5**. Alternatively, the passive-matrix display may have greater resolution without requiring an increase in power consumption.

[0015] Typically, the first and second electrodes **12**, **16** are formed orthogonally over the surface of the display **4** and are often referred to as row and column electrodes. Electrical signals are provided to the first and second electrodes by row driver **46** and column driver **56**. These row and column drivers may be a single integrated circuit or, as shown, separate devices. Additional digital logic or analog circuitry (not shown) may be provided to receive an input image signal **42** and to decompose the signal into a low-resolution component signal and a high-resolution component signal which is provided through the row driver **40** and column driver **50**. Such circuitry is known in the art, as are methods for forming electrodes and depositing electro-luminescent materials between the electrodes; for example, by employing OLED, PLED, or inorganic light-emitting materials. As described in U.S. Patent No. 4,769,292, issued September 6, 1988 by Tang et al., and co-pending USSN 11/226,622 filed September 14, 2005 by Kahen, entitled "Quantum Dot Light Emitting Layer", and incorporated by reference herein. The formation of electrodes in passive-matrix configurations over a substrate is also known, for example, by employing photolithography to pattern the first electrodes **12**, evaporative or coating techniques to form the electro-luminescent layer **14**, and employing pillars (not shown in Figs. 1 and 2) to pattern the second electrodes **16**. The electro-luminescent layer **14** may emit a single color or a broadband light such as white, or be patterned to emit different colors at different locations over the substrate **10**. Color filters may be employed to provide patterned color emission. As described herein, rows and columns are arbitrary designations and may be exchanged in various embodiments of the present invention.

[0016] The present invention provides an improved resolution display without increasing the refresh rate or power requirements of the display. Alternatively, the apparent resolution of the display may stay the same while power usage is reduced. The power usage is reduced by requiring fewer charge/discharge cycles of rows or columns or the same number of charge/discharge cycles at a lower refresh frequency, thereby reducing the power required to drive the rows or columns. Because the human visual system (HVS) is sensitive to either high spatial resolution component information at a relatively lower

temporal frequency or low spatial resolution information at a relatively higher temporal frequency, but not both at the same time, providing the highspatial resolution component information at a relatively lower temporal frequency and the low spatial resolution information at a relatively higher temporal frequency apparent display resolution is maintained, while reducing the required refresh rate for the high spatial resolution component information, the power requirements are reduced as compared to a prior-art display having a similar resolution. This limitation serves to take optimal advantage of the bandwidth of the human visual system (HVS) and can be employed to likewise optimize the performance of a passive-matrix display system.

[0017] According to the present invention, a passive-matrix display optimized to take advantage of the spatial frequency response of the HVS can include alternating high- and low-resolution component signals driven to a single display. In various embodiments, for example, a low-spatial resolution component signal might be written more often than a high spatial resolution component signal, less often, or at the same frequency. A full frame of each signal type might be temporally interleaved or groups of lines or single lines of each signal type might be temporally interleaved. However, the low spatial resolution component signal will preferably be written more often than the high spatial resolution component signal.

[0018] In various embodiments, the concept can be extended to any size display and/or multiple levels of resolution. The low-resolution component lines should be contiguous, generally, since they all receive the same signal. However, they need not be the same lines each time (ignoring top and bottom edge effects). The high-resolution component lines may be chosen arbitrarily. Note that the averaging is only necessary in one dimension, since the same number of columns is employed in the other dimension in either case.

[0019] In other embodiments, it is also possible to write high- and low-resolution component to different levels of a stacked display. In a color system, the colors may be treated differently, for example, one may display green high spatial resolution component more frequently than red or blue since both the temporal and spatial resolution of the human visual system tends to be lower for red or blue than for high luminance signals such as green. Likewise, in an RGBW system, white might get more high-resolution component signals.

[0020] According to various embodiments of the present invention, a variety of means may be employed to form the electro-luminescent elements **5**. In one embodiment, for example, as illustrated in Figs. 1 and 2, the high- and low-resolution signals may be alternately provided to a display **4** having one electroluminescent element **5** formed over each location on a substrate **10**. In an alternative embodiment, illustrated in Fig. 3, electro-luminescent elements **5** may be formed on either side of a substrate **10** by employing an additional first electrode **13**, additional electro-luminescent layer **18**, and addition-

al second electrode **20** on a second side of the substrate **10**.

[0021] In yet another embodiment, illustrated in Fig. 4, the display may further comprise a second substrate **19**. A first plurality of electro-luminescent elements **5a** in a first stack layer **24** are formed on the first substrate **10** and is driven by the low-resolution component signal while a second plurality of electroluminescent elements **5b** in a second stack layer **26** are formed on the second substrate **19** and is driven by the high-resolution component signal. Alternatively, the high- and low-resolution elements may be exchanged with respect to the first and second substrates **19**. As illustrated in Fig. 4, the second substrate **19** is located on the patterning pillars **11**; however, the second substrate **19** is not limited to that location and may be located anywhere above (or below) the first substrate **10**. To provide a visible image combining the high- and low-resolution images, the substrates and electrodes through which light travels should preferably be transparent. Typically this implies that the back substrate and/or electrode may be opaque or reflective while the others are transparent. The location of the reflective or opaque electrode depends upon whether the device is intended to be a top- or a bottom-emitting device. Note that the first stack layer **24** and the second stack layer **26** are oriented such that one is viewed through an additional substrate **19** as compared to the other. In other embodiments, additional layers that may serve as an insulator may be placed over the top of one or both of the first and second stack layers **24**, **26**, to provide electrical insulation and the first and second stack layers **24**, **26** may be arranged such that both substrates **10**, **19** are external to the device and provide a means for creating physical protection of the active areas of the device.

[0022] In an alternative embodiment illustrated in Fig. 5, two electroluminescent elements may be stacked on top of each other and share a common electrode **16**. Such structures and means for driving them are discussed in more detail in commonly assigned, co-pending US Patent Application 11/536,712, filed September 29, 2006 by Cok, which is hereby incorporated in its entirety by reference. In such a structure, the display further comprises one or more thin-film electro-luminescent layers **18** which together comprise a second electroluminescent unit and at least a third electrode layer **20** and wherein the low-resolution component signal is used to drive a first electro-luminescent unit at a first refresh rate and the high-resolution component signal is used to drive a second electro-luminescent unit at a second refresh rate.

[0023] In the embodiments of Figs. 3, 4, and 5, the first plurality of electro-luminescent elements are shown formed at the same resolution on the first substrate as the second plurality of electro-luminescent elements formed on the second substrate (or on the other side of the same substrate). In alternative embodiments, the first plurality of electro-luminescent elements may be formed at a relatively lower resolution on the first substrate and the second plurality of electro-luminescent elements are

formed at a relatively higher resolution on the second substrate. Alternatively, if the substrate comprises two sides (as shown in Fig. 3), the first plurality of electro-luminescent elements formed on a first side of the substrate may be driven by the low-resolution component signal and the second plurality of electro-luminescent elements formed on the second side of the substrate may be driven by the high-resolution component signal. While the present invention may employ a common refresh rate for both the high- and the low-resolution signals, in some embodiments of the present invention, the refresh rates for the high- and the low-resolution signals may be different. In simpler embodiments, the refresh rates may differ by integral values or by multiples of each other. In particular, the first refresh rate may be at least twice the second refresh rate.

[0024] In general, according to the present invention, either the rows or columns of a display may be driven at different refresh rates, or both may be driven at different refresh rates. Alternatively, multiple light-emitting elements along both dimensions of the display may be activated when the low-resolution component signal is provided to the display and multiple light-emitting elements along only one dimension of the display are activated when the high-resolution component signal is provided to the display. In yet another alternative, the low-resolution signal may drive a plurality of contiguous elements in one or more rows or columns simultaneously with the same signal and the high-resolution signal alternately drives one row or column.

[0025] In other embodiments of the present invention, the low-resolution signal may be displayed more frequently than the high-resolution signal. The low-resolution signal and high-resolution signal may be interleaved full-frame signals or the low-resolution signal and high-resolution signals are interleaved row or column signals.

[0026] In the embodiment of the present invention in which the electroluminescent elements are not stacked (e.g. Figs. 1, 2), the low-and high-resolution signals may be alternately displayed on the electro-luminescent elements. In this case, it is useful to group the rows or columns into disjoint sets of contiguous rows or columns, respectively, and the low-resolution signal is displayed on some or all of the rows or columns in the group and the high-resolution signal is alternately and cyclically displayed on one or more of the rows or columns, respectively, in the group. Alternatively, the rows or columns may be grouped into a plurality of disjoint sets of contiguous rows or columns, respectively, and the low-resolution signal is displayed on some or all of the rows or columns in the group and the high-resolution signal is alternately displayed on one or more of the rows or columns in a different group.

[0027] Referring to Fig. 6, the operation of a prior-art passive-matrix display having four rows is illustrated. In this Figure (and Figs. 7, 8, 10, 11), each column is labeled with a different time period and each time-labeled column represents an entire display driven at the time period in-

dicated. The arrows indicate a temporal sequence. Only the rows are shown and all of the light-emitting elements in each row are operated simultaneously where indicated by a dotted pattern for a low-resolution component signal and a slash pattern for a high-resolution component signal. The orthogonal columns overlapping the rows to form light-emitting elements are not illustrated (except in Fig. 9). As shown in the prior-art illustration of Fig. 6, at t₀, the first row is controlled with a signal to emit light (in concert with the column control signal, not shown). At t₁, the second row is operated, at t₂ the third row is operated, and at t₃ the fourth row is operated. All of the light-emitting elements are operated in four time periods comprising a frame refresh cycle, and then the process repeats. The periods are made short enough that an observer does not perceive flicker from the temporally sequential energizing of the rows.

[0028] According to one embodiment of the present invention and as illustrated in Figs. 7A-7C, a six-row display having improved resolution is operated for three refresh cycles having four periods each, thereby demonstrating improved resolution of the display device using the same time and power as the display of Fig. 6. Referring to Fig. 7A, at t₀ the first two rows are operated with a low-resolution component signal. In particular, the two rows are energized with the same column signal, allowing them to be operated simultaneously. This common, low-resolution component signal may be the average of the signals for each row, the minimum value of each row the signal for one row or the other or some proportion of one of these quantities. Because the same signal is supplied to two rows, the signal will effectively reduce the resolution of the image provided on the rows, that is a low-resolution component signal is provided. At t₁, a high-resolution component signal is provided to row 3. The high-resolution component signal may simply be the original row signal. At t₂, a low-resolution component, common signal is provided to rows four and five, and at t₃ a high-resolution component signal is provided to row 6.

[0029] In a second refresh cycle of the same display and illustrated in Fig. 7B, the first and third rows are operated with a common signal at time t₀, a high-resolution component signal is supplied to row two at t₁, the fourth and sixth rows are operated at time t₂ with a common signal, and at t₃ a high-resolution component signal is provided to row 5. In a third refresh cycle illustrated in Fig. 7C, a similar procedure is followed, except that the high-resolution component signals are applied to rows one and four, and the low-resolution component signals are supplied to rows two and three and to rows five and six. While it is not necessary that the high-resolution component signals cycle through all of the rows, improved appearance and reduced flickering will result if such cycling is employed. The order of the cycles is not critical. The process may be extended to displays having more rows and low-resolution component signals may also be provided, for example, as shown in Fig. 8 for a single frame cycle, three or more rows may be averaged to-

gether for the low-resolution component signal and fewer high-resolution component signals provided relative to the number of low-resolution component signals.

[0030] Referring to Fig. 9, for a single frame cycle, all of the light-emitting elements within a row may not be operated at one time. By separately controlling the column drivers, a two-dimensional subset of the light-emitting elements may be driven in common with a low-resolution component signal (as shown at t_0 and t_2) and a two-dimensional subset likewise driven with a high-resolution component signal (as shown at t_1 and t_3). Alternatively, one or the other of the high- and low-resolution component signals may include all of the elements in one or more rows; and the other of the high- and low-resolution component signals may include a two-dimensional subset.

[0031] Referring to Fig. 10, the refresh rate of the high-resolution component signal may differ from the refresh rate of the low-resolution component. As illustrated in Fig. 10, rows one and three may be simultaneously driven at t_0 with a common low-resolution component signal. At t_1 , row four may be driven with a high-resolution component signal, and at t_2 row two may be driven with a high-resolution component signal. During periods t_3 through t_5 , a similar scheme may be employed for rows five through eight. In this case the high-resolution component signals are driven twice as often as the low-resolution component signals. Note that in this illustration, the display has eight rows and six time periods are used for a frame refresh cycle. Alternatively, by driving the low-resolution signal in periods t_1 and t_2 , and then again in t_4 and t_5 , and driving the high-resolution signal periods t_0 and t_3 , the low-resolution component signals are driven twice as often as the low-resolution component signals.

[0032] The example embodiments of Figs. 7-10 employ alternate low and high-resolution signals by rows or groups of rows. In an alternative embodiment, the entire display including all of the light-emitting elements may be driven first by the low-resolution signal and then the entire display, including all of the light-emitting elements, may be driven secondly by the high-resolution signal (or vice versa). Referring to Fig. 11A-D, a display having eight rows driven in four time periods comprising a frame refresh cycle is shown. In Fig. 11A, at time t_0 , the first two rows are driven with a common, low-resolution signal, at time t_1 rows three and four are similarly driven, then rows five and six, followed by rows seven and eight. This frame cycle effectively drives the entire display with a low-resolution component signal in four periods. In a second frame cycle (Fig. 11B), every other row is driven with a high-resolution component signal. In a third frame cycle (Fig. 11C), the low-resolution component signal is applied again (illustrated here with different temporal row ordering) and in the fourth cycle (Fig. 11D) the rows not driven in the second frame cycle (Fig. 11B) are driven with the high-resolution component signal. It is also possible to drive the display with relatively more low-resolution component signals, for example, by driving the display

according to the order of frame cycles of Figures 11A, 11C, 11B, 11A, 11C, 11D and so on. Alternatively, it is also possible to drive the display with relatively more high-resolution component signals, for example by driving the display according to the order of frame cycles of Figures 11A, 11B, 11D, 11C, 11B, 11D and so on.

[0033] In any of the example embodiments presented, the ordering of the rows presented may be varied.

[0034] According to a method of the present invention illustrated in Fig. 12, a passive-matrix display may be controlled by receiving an input image signal in operation 100 for addressing the light-emitting elements of the display. Operation 105 decomposes the input image signal into a low-resolution component signal and a high-resolution component signal, wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal. Operation 110 provides a drive signal for driving the display wherein the low-resolution component signal and the high-resolution component signal are independently provided to the display to form a final image.

[0035] In a preferred embodiment, the present invention is employed in a flat-panel OLED device composed of small molecule or polymeric OLEDs as disclosed in but not limited to US 4,769,292, issued September 6, 1988 to Tang et al., and US 5,061,569, issued October 29, 1991 to VanSlyke et al. Many combinations and variations of organic light-emitting displays can be used to fabricate such a device, including passive-matrix OLED displays having either a top- or bottom-emitter architecture.

[0036] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

[0037] The following description pages 18 to 20 contain preferred embodiments. Accordingly, the term "claim" as used therein refers to such a "preferred embodiment".

PARTS LIST

[0038]

2	display system
4	display
5,5a, 5b	electro-luminescent element
6	first dimension
8	second dimension
10	substrate
11	pillar

12	first electrode		the first and second electrode layers define individual light-emitting elements comprising an electro-luminescent unit; and
13	first electrode		
14	layer of electro-luminescent material	5	b) one or more display drivers that
16	second electrode		i) receives an input image signal for addressing the light-emitting elements of the display;
18	second layer of electro-luminescent material	10	ii) decomposes the signal into a low-resolution component signal and a high-resolution component signal, wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal; and
19	second substrate		iii) provides a drive signal for driving the display wherein the low-resolution component signal and the high-resolution component signal are independently provided to the display to form a combined image.
20	second electrode		
24	first stack layer	15	
26	second stack layer		
40	driver	20	
42	input signal		
44	drive signal		2. The display according to claim 1, wherein multiple light-emitting elements along both dimensions of the display are activated when the low-resolution component signal is provided to the display and multiple light-emitting elements along only one dimension of the display are activated when the high-resolution component signal is provided to the display.
46	circuit	25	
50	driver		
52	input signal	30	
54	drive signal		3. The display according to claim 1, wherein the display further comprises one or more thin-film electro-luminescent layers and at least a third electrode layer which together comprise a second electro-luminescent unit and wherein the low-resolution component signal is used to drive a first electroluminescent unit at a first refresh rate and the high-resolution component signal is used to drive a second electro-luminescent unit at a second refresh rate.
56	circuit		
100	receive signal step	35	
105	decompose signal step		
110	drive display step	40	
	1. A passive-matrix, thin-film electro-luminescent display system, comprising:		4. The display according to claim 3, wherein the first refresh rate is at least twice the second refresh rate.
	a) a display including:	45	5. The display according to claim 1, wherein the display further comprises a second substrate and wherein a first plurality of electroluminescent units are formed on the first substrate and is driven by the low-resolution component signal and a second plurality of electroluminescent units are formed on the second substrate and is driven by the high-resolution component signal.
	i) a substrate;		
	ii) a first electrode layer patterned to form lines along a first dimension of the substrate;	50	
	iii) one or more thin-film electro-luminescent layers, formed on the first electrode layer;		
	iv) a second electrode layer formed on the one or more thin-film electro-luminescent layer(s), wherein the second electrode layer is patterned to form lines along a second dimension of the substrate different from the first dimension	55	
	iv) wherein the intersection of the lines of		6. The display according to claim 5, wherein the first plurality of electroluminescent units are formed at a relatively lower resolution on the first substrate and the second plurality of electroluminescent units are formed at a relatively higher resolution on the second substrate.

7. The display according to claim 1, wherein the substrate comprises two sides and wherein a first plurality of electroluminescent units are formed on a first side of the substrate and is driven by the low-resolution component signal and a second plurality of electroluminescent units are formed on the second side of the substrate and is driven by the high-resolution component signal.

8. The display according to claim 1, wherein the low-resolution signal and the high-resolution signal are driven alternately.

9. The display according to claim 8, wherein the low-resolution signal drives a plurality of contiguous elements in one or more rows or columns simultaneously with the same signal and the high-resolution signal alternately drives one row or column.

10. The display according to claim 1, wherein the low-resolution signal is displayed more frequently than the high-resolution signal.

Claims

1. A passive-matrix, thin-film electro-luminescent display system, comprising:

a) a display including:

- i) a substrate;
- ii) a first electrode layer patterned to form lines along a first dimension of the substrate;
- iii) one or more thin-film electro-luminescent layers, formed on the first electrode layer;
- iv) a second electrode layer formed on the one or more thin-film electro-luminescent layer(s), wherein the second electrode layer is patterned to form lines along a second dimension of the substrate different from the first dimension iv) wherein the intersection of the lines of the first and second electrode layers define individual light-emitting elements comprising an electro-luminescent unit; and

b) one or more display drivers that

- i) receives an input image signal for addressing the light-emitting elements of the display;
- ii) decomposes the signal into a low-resolution component signal and a high-resolution component signal, wherein the low-resolution component signal contains one half or less of the number of addressable loca-

tions as the high-resolution component signal; and

iii) provides a drive signal for driving the display wherein the low-resolution component signal and the high-resolution component signal are independently provided to the display to form a combined image, wherein the low-resolution signal and the high-resolution signal are driven alternately.

2. The display according to claim 1, wherein the low-resolution signal drives a plurality of contiguous elements in one or more rows or columns simultaneously with the same signal and the high-resolution signal alternately drives one row or column.

3. The display according to claim 1, wherein the low-resolution signal is displayed more frequently than the high-resolution signal.

4. The display according to claim 1, wherein the low-resolution signal and high-resolution signal are interleaved full-frame signals.

5. The display according to claim 1, wherein the low-resolution signal and high-resolution signal are interleaved row or column signals.

6. The display according to claim 1, wherein the rows or columns are grouped into disjoint sets of contiguous rows or columns, respectively, and the low-resolution signal is displayed on some or all of the rows or columns in the group and the high-resolution signal is alternately and cyclically displayed on one or more of the rows or columns, respectively, in the group.

7. The display according to claim 1, wherein the rows or columns are grouped into a plurality of disjoint sets of contiguous rows or columns, respectively, and the low-resolution signal is displayed on some or all of the rows or columns in the group and the high-resolution signal is alternately displayed on one or more of the rows or columns in a different group.

8. A method for driving a passive matrix display, comprised of:

- a) receiving an input image signal for addressing the light-emitting elements of the display;
- b) decomposing the signal into a low-resolution component signal and a high-resolution component signal, wherein the low-resolution component signal contains one half or less of the number of addressable locations as the high-resolution component signal; and
- c) independently providing the low-resolution component signal and the high resolution com-

ponent signal to drive the display to form a combined image, wherein the low-resolution signal and the high-resolution signal are driven alternately.

5

- 9. The method claimed in claim 8, wherein the display includes rows or columns of light-emitting elements that are grouped into a plurality of disjoint sets of contiguous rows or columns, respectively, and the low-resolution signal is displayed on all of the rows or columns in the group and the high-resolution signal is alternately displayed on one of the rows or columns in a different group.

10

15

20

25

30

35

40

45

50

55

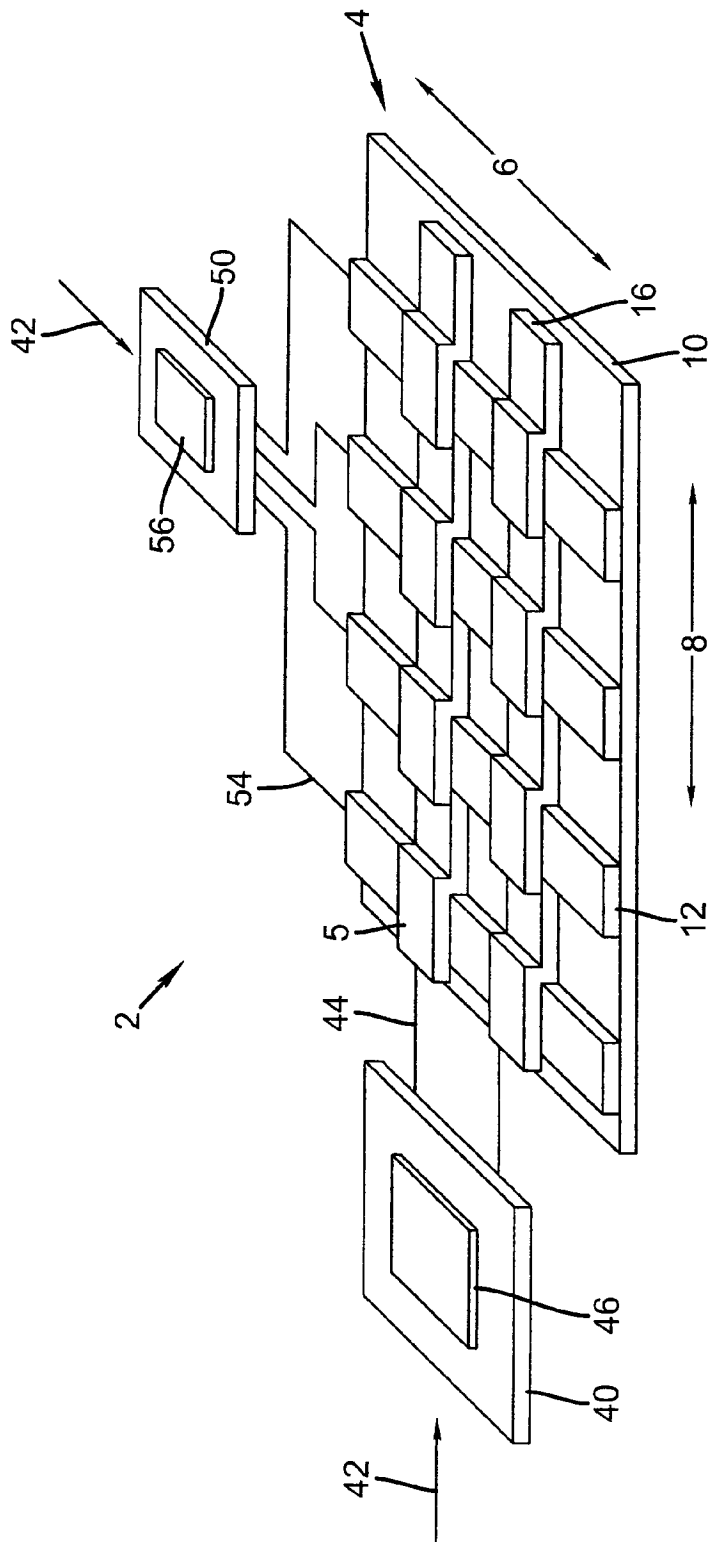


FIG. 1

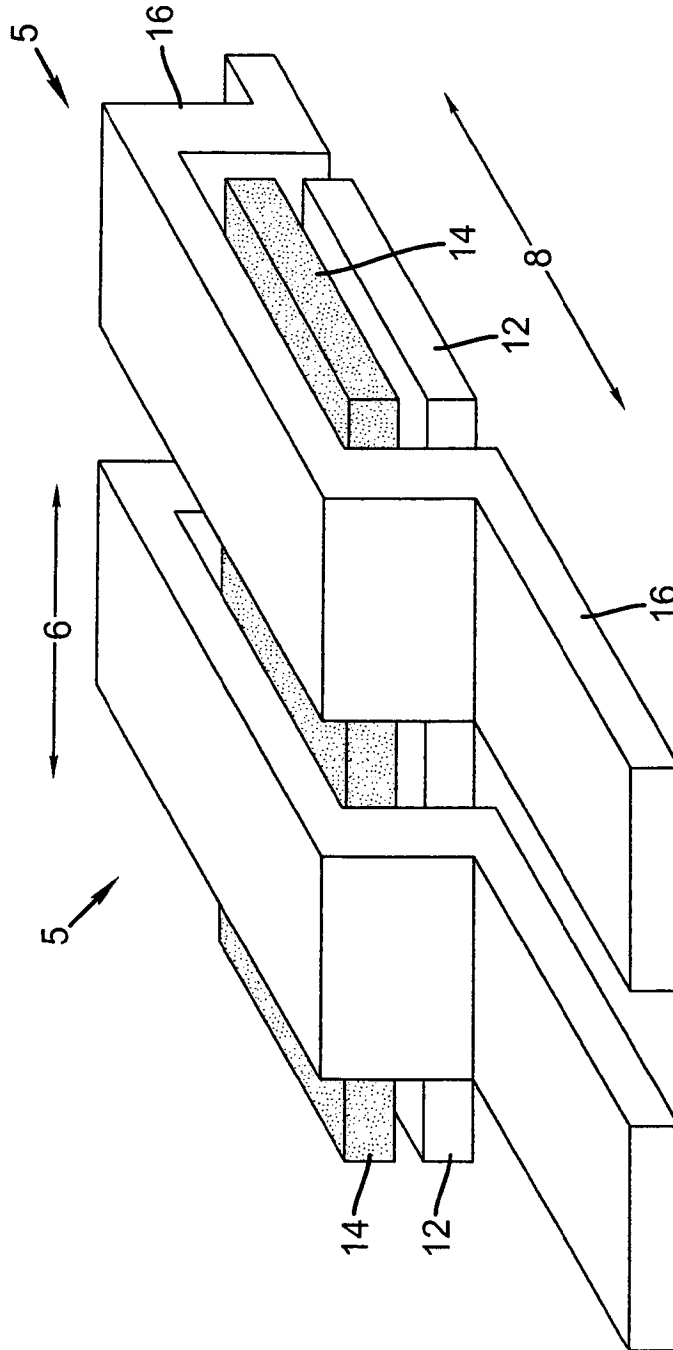


FIG. 2

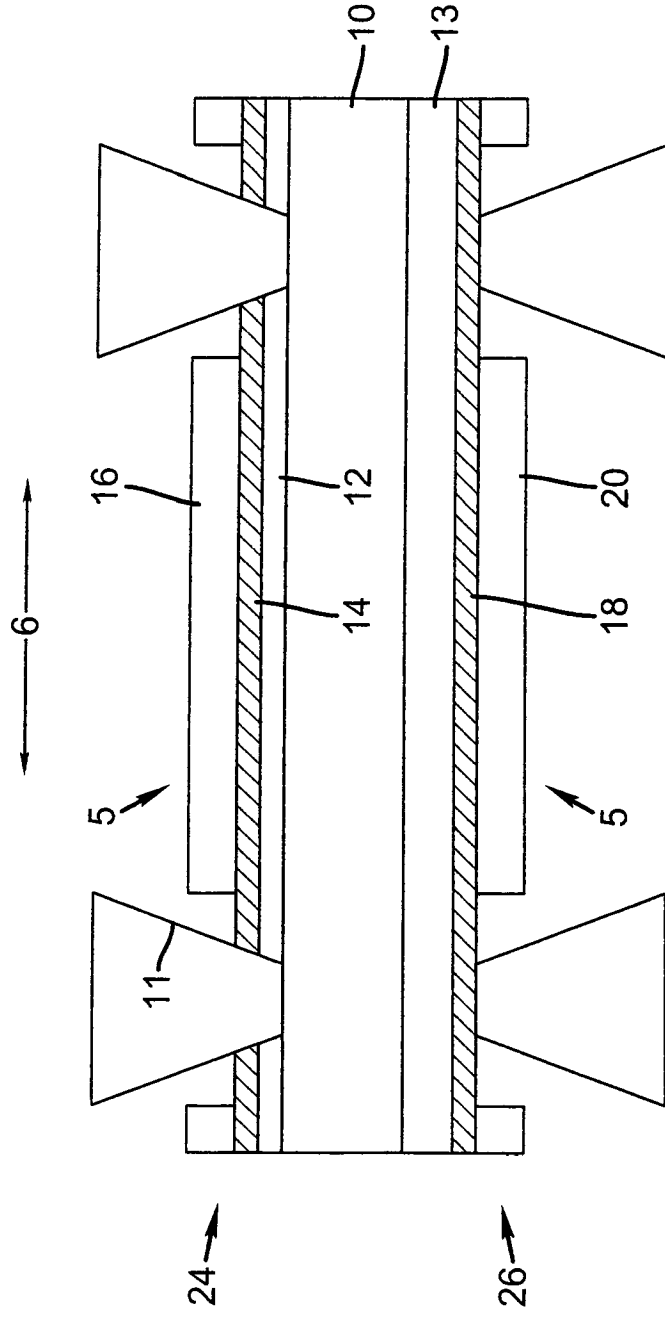


FIG. 3

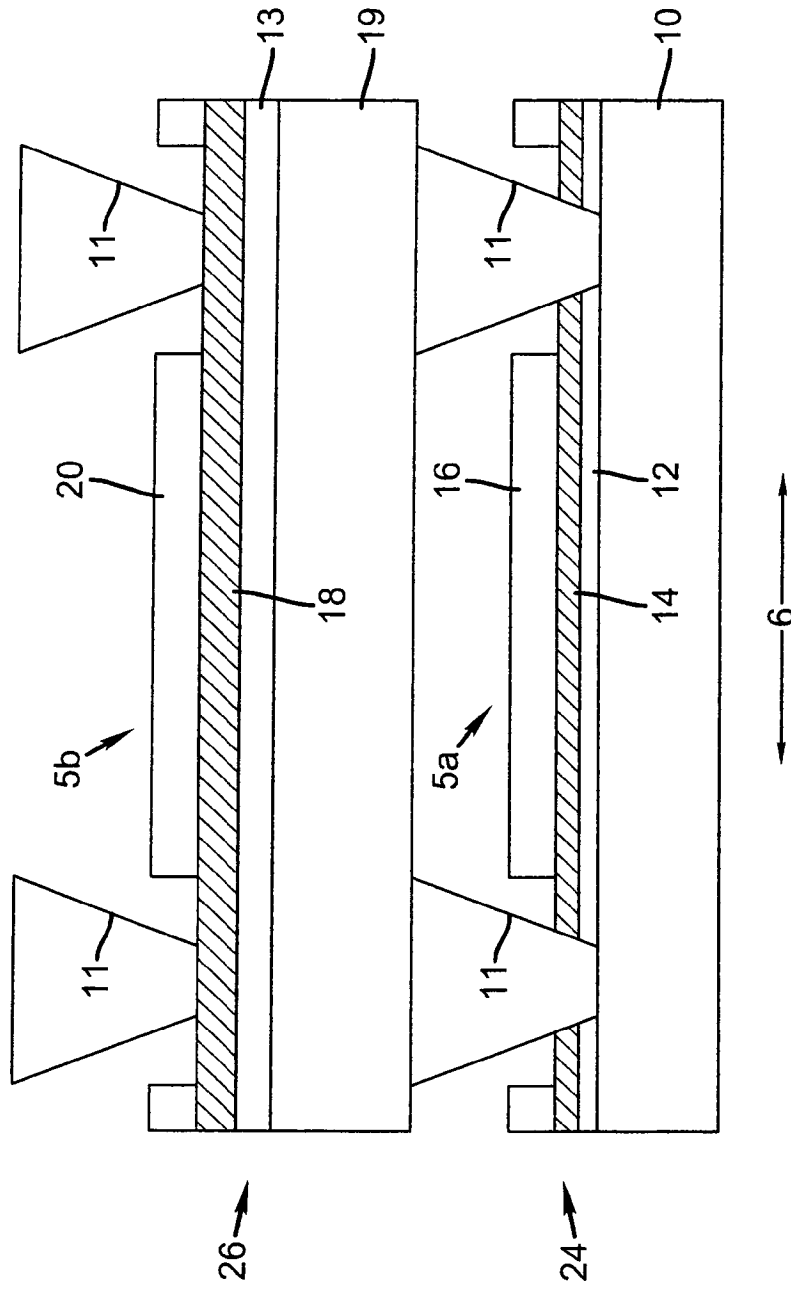


FIG. 4

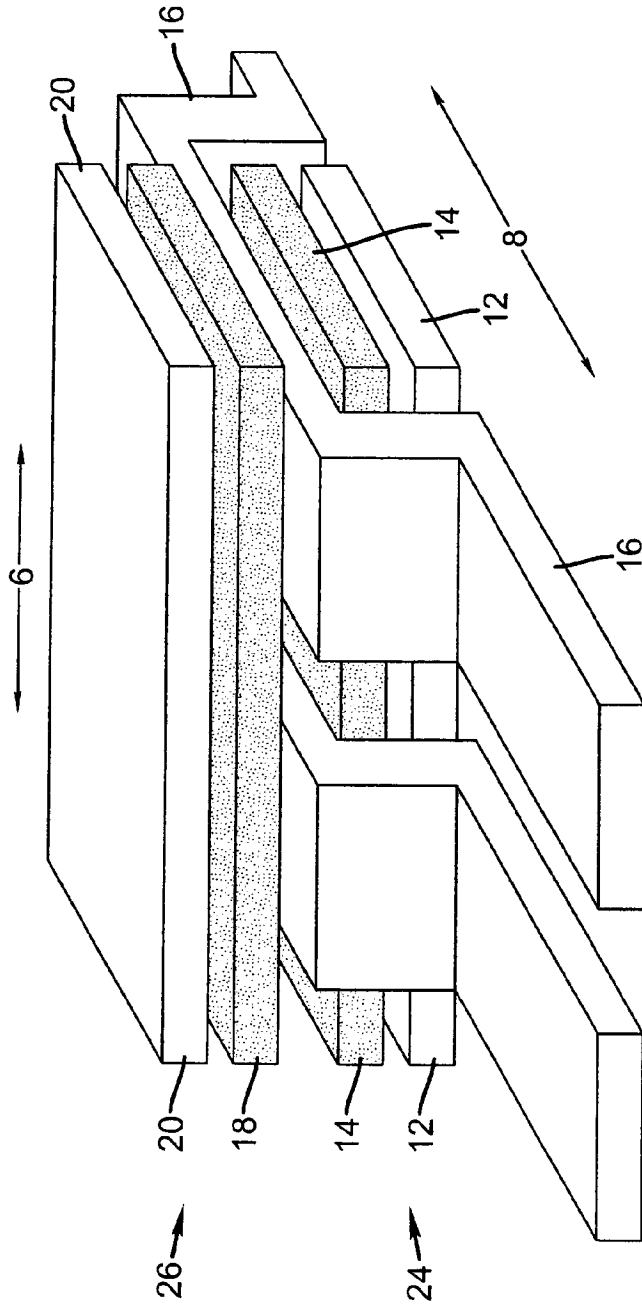
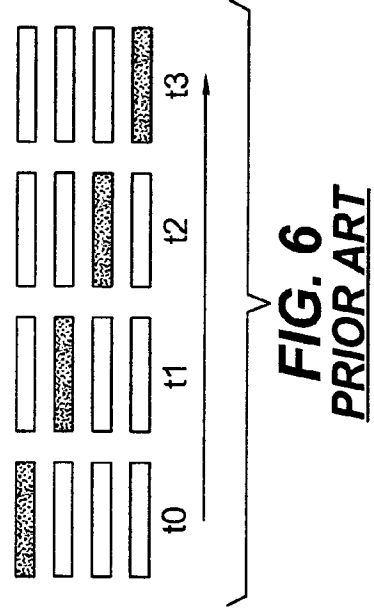


FIG. 5



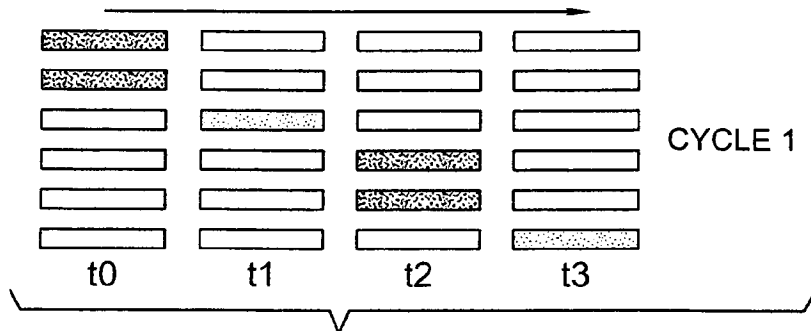


FIG. 7A

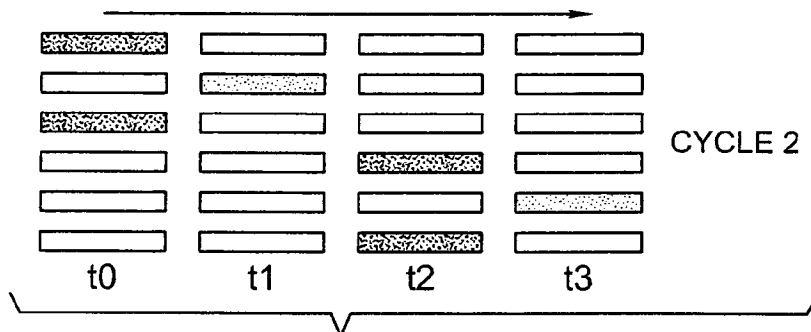


FIG. 7B

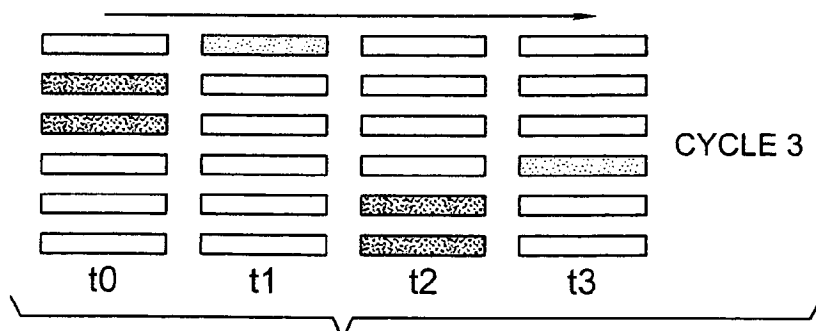
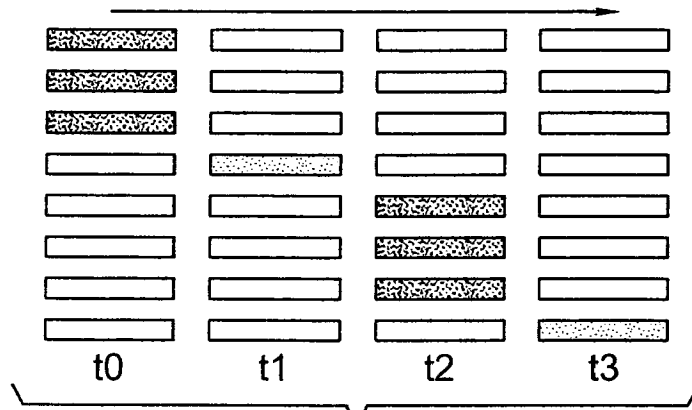
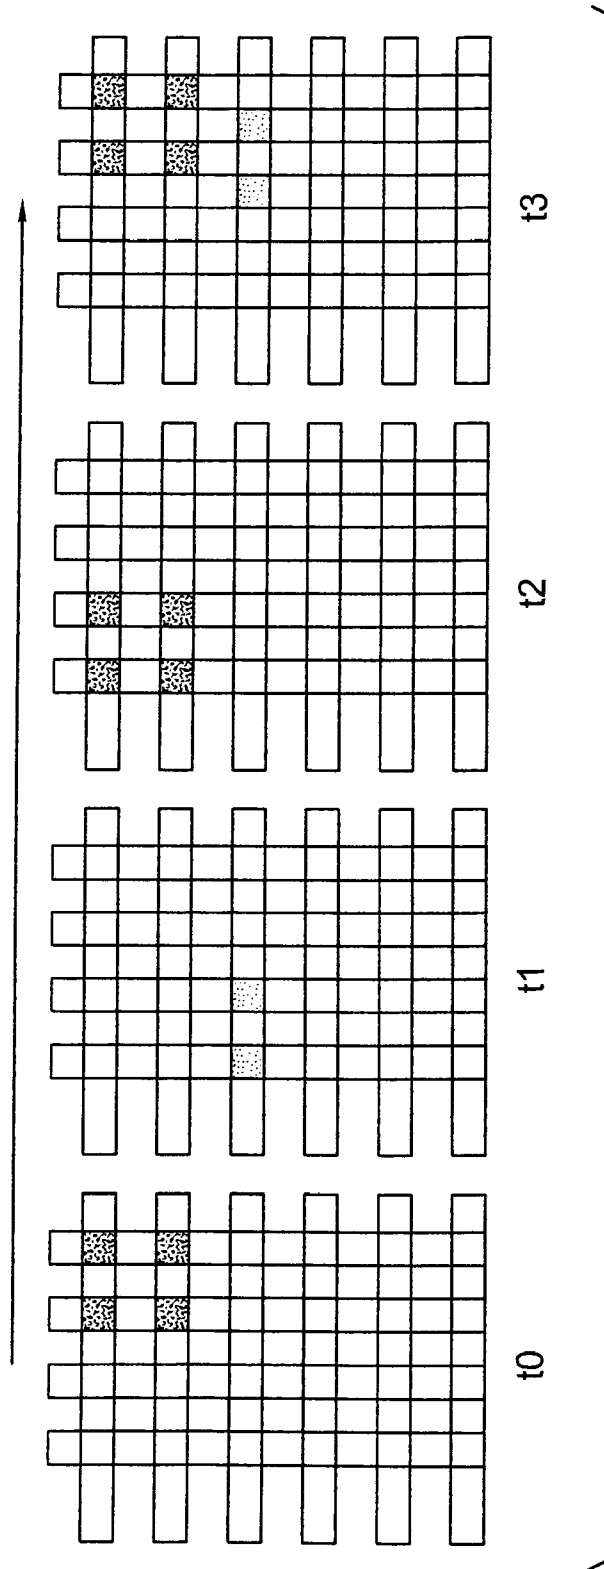


FIG. 7C





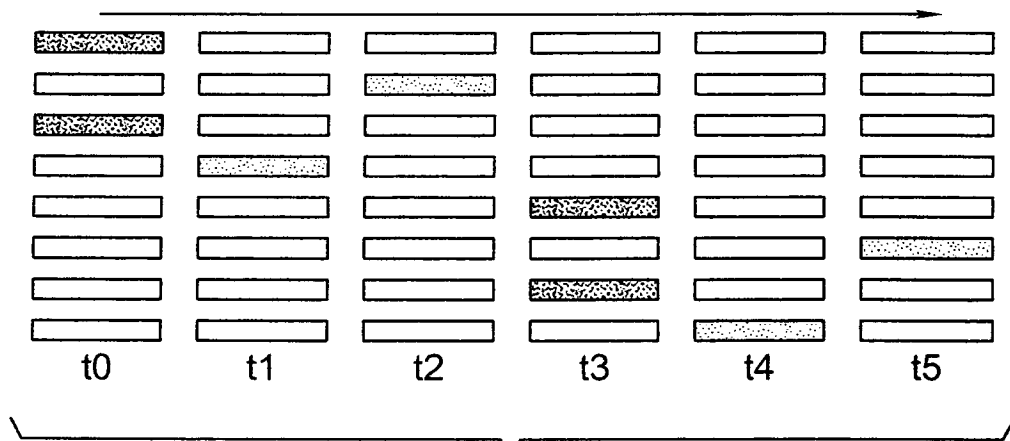
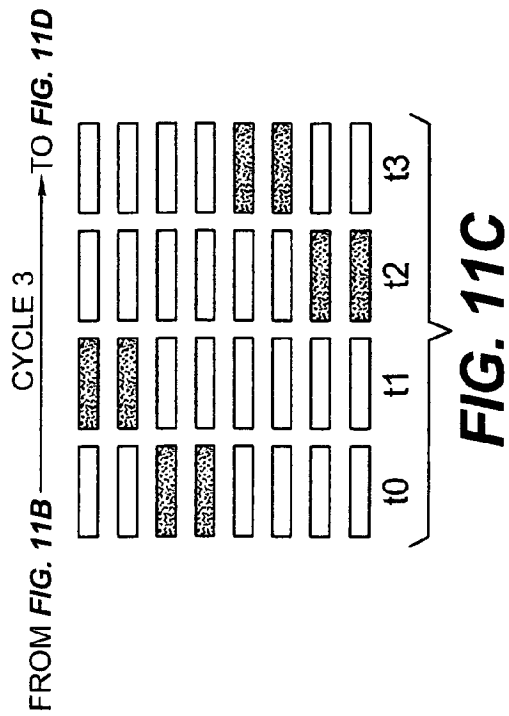
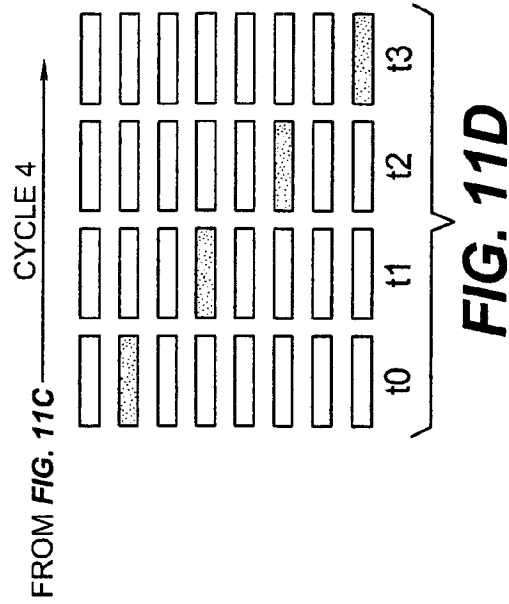
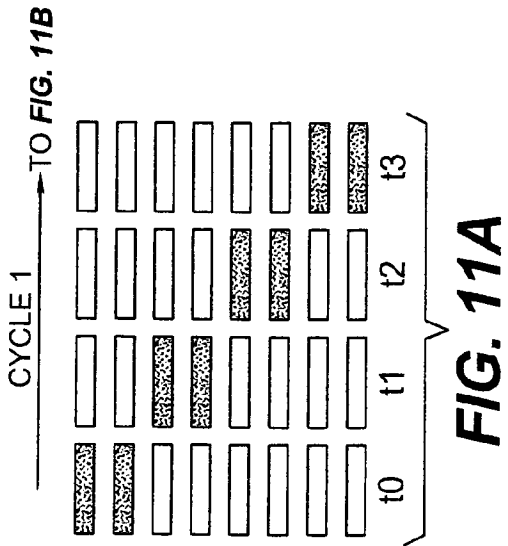
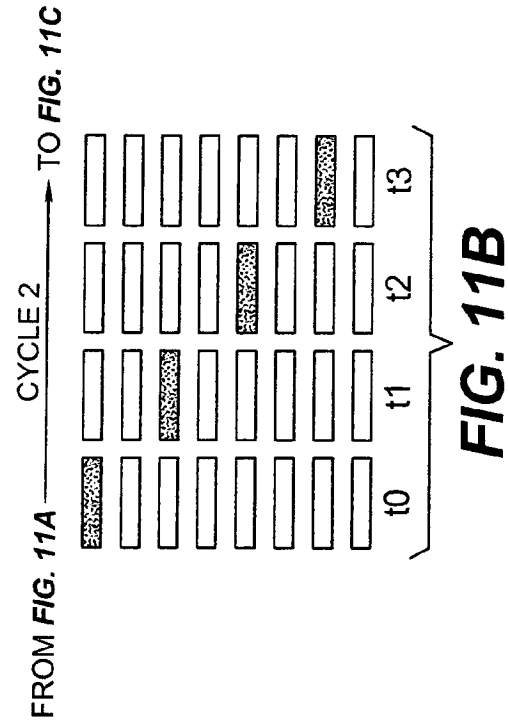


FIG. 10



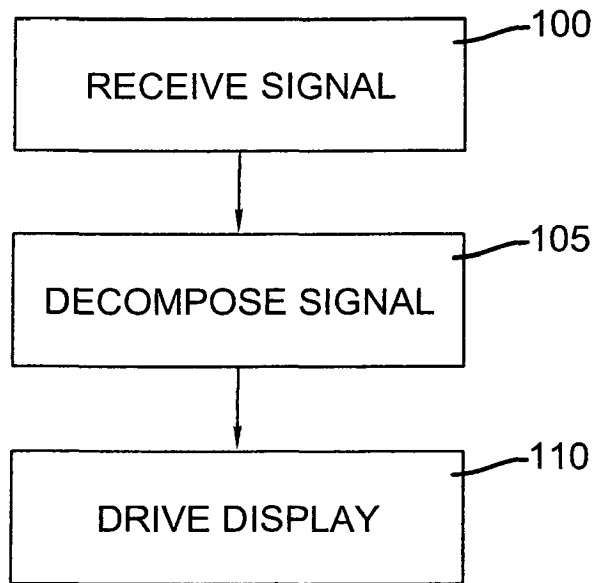


FIG. 12

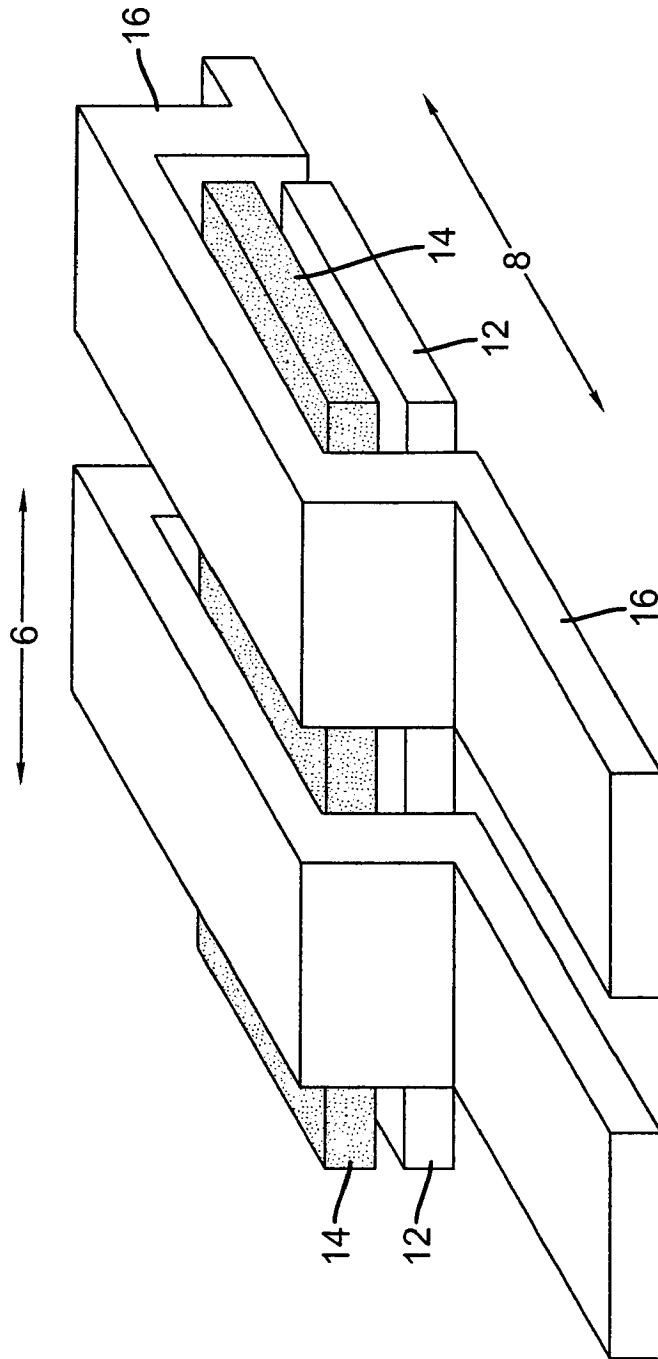


FIG. 13
PRIOR ART

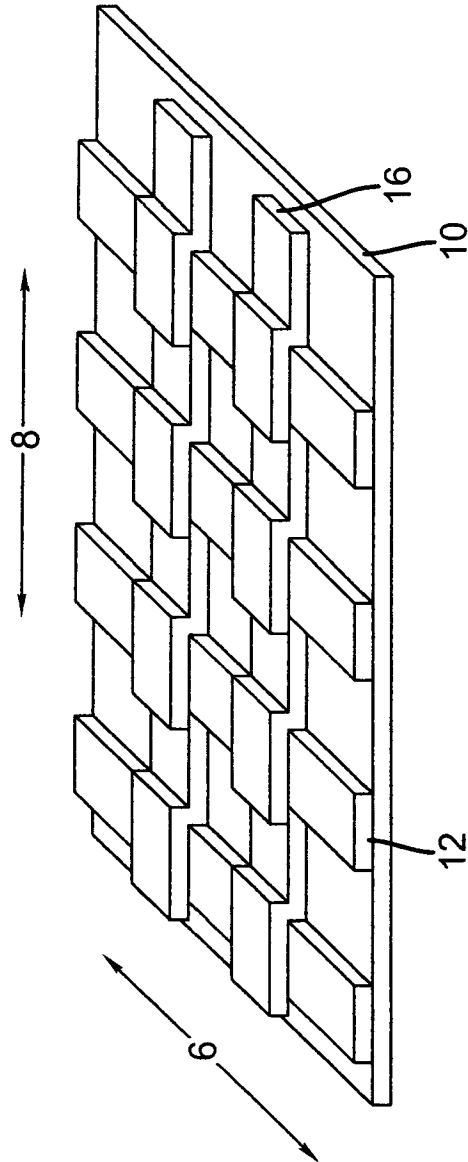


FIG. 14
PRIOR ART



EUROPEAN SEARCH REPORT

Application Number
EP 11 00 8346

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2002/051153 A1 (HIYAMA IKUO [JP] ET AL) 2 May 2002 (2002-05-02) * paragraphs [0104] - [0146]; figures 1,2 * -----	1-3,5,8	INV. G09G3/30
			TECHNICAL FIELDS SEARCHED (IPC)
			G09G
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 19 January 2012	Examiner Giancane, Iacopo
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 00 8346

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-01-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002051153 A1	02-05-2002	JP 2001350453 A	21-12-2001
		US 2002051153 A1	02-05-2002
		US 2006125765 A1	15-06-2006

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6980182 B, Nimmer **[0006]**
- US 20020101179 A, Kawashima **[0007]**
- US 6486607 B, Yeuan **[0008]**
- US 20050219163 A, Smith **[0009]**
- WO 2006035248 A, Smith **[0010]**
- US 4769292 A, Tang **[0015] [0035]**
- US SN11226622 A **[0015]**
- US 11536712 B, Cok **[0022]**
- US 5061569 A, VanSlyke **[0035]**

专利名称(译)	无源矩阵薄膜电致发光显示器		
公开(公告)号	EP2426659A1	公开(公告)日	2012-03-07
申请号	EP2011008346	申请日	2007-10-26
[标]申请(专利权)人(译)	全球OLED TECH		
申请(专利权)人(译)	全球OLED科技有限责任公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	MILLER MICHAEL EUGENE COK RONALD STEVEN		
发明人	MILLER, MICHAEL, EUGENE COK, RONALD, STEVEN		
IPC分类号	G09G3/30		
CPC分类号	G09G3/30 G09G2300/023 G09G2300/06 G09G2310/021 G09G2330/021		
优先权	11/558093 2006-11-09 US		
其他公开文献	EP2426659B1		
外部链接	Espacenet		

摘要(译)

一种无源矩阵薄膜电致发光显示系统，包括显示器，该显示器具有带有有机层的基板和形成在其上的正交排列的电极。一个或多个显示驱动器：(i) 接收用于寻址显示器的发光元件的输入图像信号；(ii) 将信号分解为低分辨率分量信号和高分辨率分量信号，其中低分辨率分量信号包含可寻址位置数量的一半或更少作为高分辨率分量信号；(iii) 提供用于驱动显示器的驱动信号，其中低分辨率分量信号和高分辨率分量信号被独立地提供给显示器以形成组合图像。

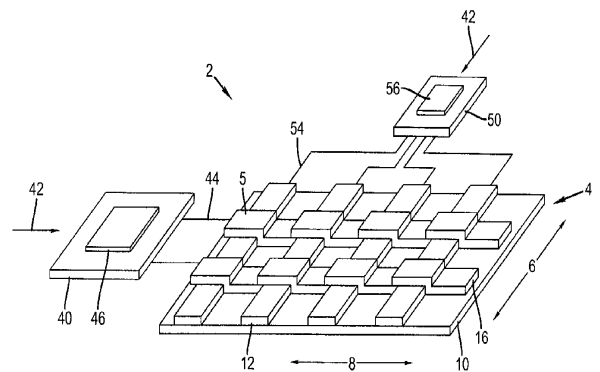


FIG. 1